



CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-27521059 Fax: +86-755-27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No.: **CTC20232378E01**

FCC ID.....: **2BCVO-BHD-TW6**

Applicant: **Guangdong Pisen Electronics Co., Ltd.**

Address.....: No.9, Qinfu 1st Street, Jintang Industry Zone, Niushipu Village, Liuyue, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, PEOPLE'S REPUBLIC OF CHINA

Manufacturer.....: Guangdong Pisen Electronics Co., Ltd.

Address.....: No.9, Qinfu 1st Street, Jintang Industry Zone, Niushipu Village, Liuyue, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, PEOPLE'S REPUBLIC OF CHINA

Product Name: **Wireless earphone**

Trade Mark: PISEN

Model/Type reference.....: BHD-TW6

Listed Model(s): /




Standard: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample.....: Dec. 25, 2023

Date of testing.....: Dec. 27, 2023 ~ Jan. 8, 2024

Date of issue.....: Jan. 19, 2024

Result.....: **PASS**

Compiled by:		
(Printed name+signature)	Lucy Lan	
Supervised by:		
(Printed name+signature)	Eric Zhang	
Approved by:		
(Printed name+signature)	Totti Zhao	

Testing Laboratory Name: **CTC Laboratories, Inc.**

Address.....: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.



Table of Contents

Page

1. TEST SUMMARY 3

1.1. TEST STANDARDS 3

1.2. REPORT VERSION 3

1.3. TEST DESCRIPTION 3

1.4. TEST FACILITY 4

1.5. MEASUREMENT UNCERTAINTY 5

1.6. ENVIRONMENTAL CONDITIONS 5

2. GENERAL INFORMATION 6

2.1. CLIENT INFORMATION 6

2.2. GENERAL DESCRIPTION OF EUT 6

2.3. ACCESSORY EQUIPMENT INFORMATION 7

2.4. OPERATION STATE 8

2.5. MEASUREMENT INSTRUMENTS LIST 9

3. TEST ITEM AND RESULTS 10

3.1. CONDUCTED EMISSION 10

3.2. RADIATED EMISSION 13

3.3. BAND EDGE EMISSIONS (RADIATED) 24

3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) 33

3.5. DTS BANDWIDTH 43

3.6. PEAK OUTPUT POWER 48

3.7. POWER SPECTRAL DENSITY 51

3.8. DUTY CYCLE 54

3.9. ANTENNA REQUIREMENT 57



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC20232378E01	Jan. 19, 2024	Original

1.3. Test Description

FCC Part 15 Subpart C (15.247)			
Test Item	Standard Section	Result	Test Engineer
Antenna Requirement	15.203	Pass	kyire
Conducted Emission	15.207	Pass	kyire
Conducted Band Edge and Spurious Emissions	15.247(d)	Pass	kyire
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	Pass	kyire
6dB Bandwidth	15.247(a)(2)	Pass	kyire
Conducted Max Output Power	15.247(b)(3)	Pass	kyire
Power Spectral Density	15.247(e)	Pass	kyire
Transmitter Radiated Spurious	15.209&15.247(d)	Pass	kyire

Note:

- The measurement uncertainty is not included in the test result.
- N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	±0.0196%	(1)
Maximum Conducted Output Power	±0.686 dB	(1)
Maximum Power Spectral Density Level	±0.743 dB	(1)
Band-edge Compliance	±1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Guangdong Pisen Electronics Co., Ltd.
Address:	No.9, Qinfu 1st Street, Jintang Industry Zone, Niushipu Village, Liuyue, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, PEOPLE'S REPUBLIC OF CHINA
Manufacturer:	Guangdong Pisen Electronics Co., Ltd.
Address:	No.9, Qinfu 1st Street, Jintang Industry Zone, Niushipu Village, Liuyue, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, PEOPLE'S REPUBLIC OF CHINA
Factory:	Guangdong Pisen Electronics Co., Ltd.
Address:	No.9, Qinfu 1st Street, Jintang Industry Zone, Niushipu Village, Liuyue, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, PEOPLE'S REPUBLIC OF CHINA

2.2. General Description of EUT

Product Name:	Wireless earphone
Trade Mark:	PISEN
Model/Type reference:	BHD-TW6
Listed Model(s):	/
Model Difference:	/
Power Supply:	Charging bay: DC 5V 1A from External adapter DC 3.7V 300mAh from Battery Earphone: DC 5V 50mA from charging bay DC 3.7V 30mAh from Battery
Hardware Version:	/
Software Version:	/
Bluetooth 5.3 / BLE	
Modulation:	GFSK
Operation Frequency:	2402MHz~2480MHz
Channel Number:	40
Channel Separation:	2MHz
Data Rate:	1Mbps, 2Mbps
Antenna Type:	Chip Antenna
Antenna Gain:	2.58dBi



2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Adapter	PS06CA050K1000CU	/	/
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	150cm
Test Software Information			
Name	Version	/	/
BT_Tool	V1.1.2	/	/



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT BLE, 40 channels are provided to the EUT. Channels 00/19/39 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2404
:	:
18	2438
19	2440
20	2442
:	:
38	2478
39	2480

Note: The display in grey were the channel selected for testing.

Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.5. Measurement Instruments List

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101654	Aug. 07, 2024
2	RF Control Unit	Tonscend	JS0806-2	/	Aug. 22, 2024
3	Test Software	Tonscend	JS1120-3	V3.3.38	/

Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Dec. 07, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-648	Dec. 07, 2024
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 12, 2024
4	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14 2024
5	Pre-Amplifier	SONOMA	310	186194	Dec. 12, 2024
6	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 12, 2024
7	Test Receiver	R&S	ESC17	100967	Dec. 12, 2024
8	3m chamber 2	Frankonia	EE025	/	Oct. 23, 2024
9	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

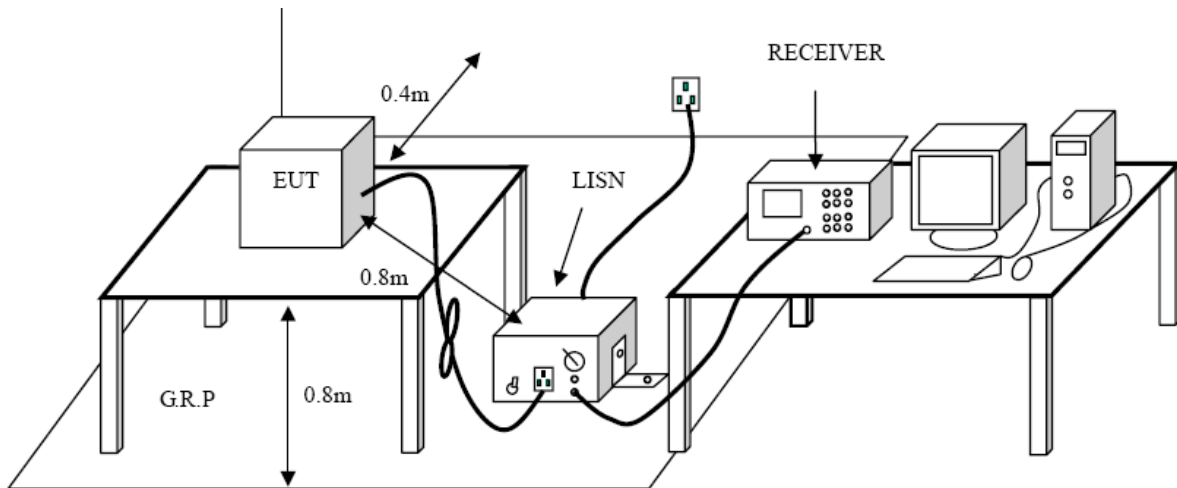

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode


Please refer to the clause 2.4.





Test Result

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported

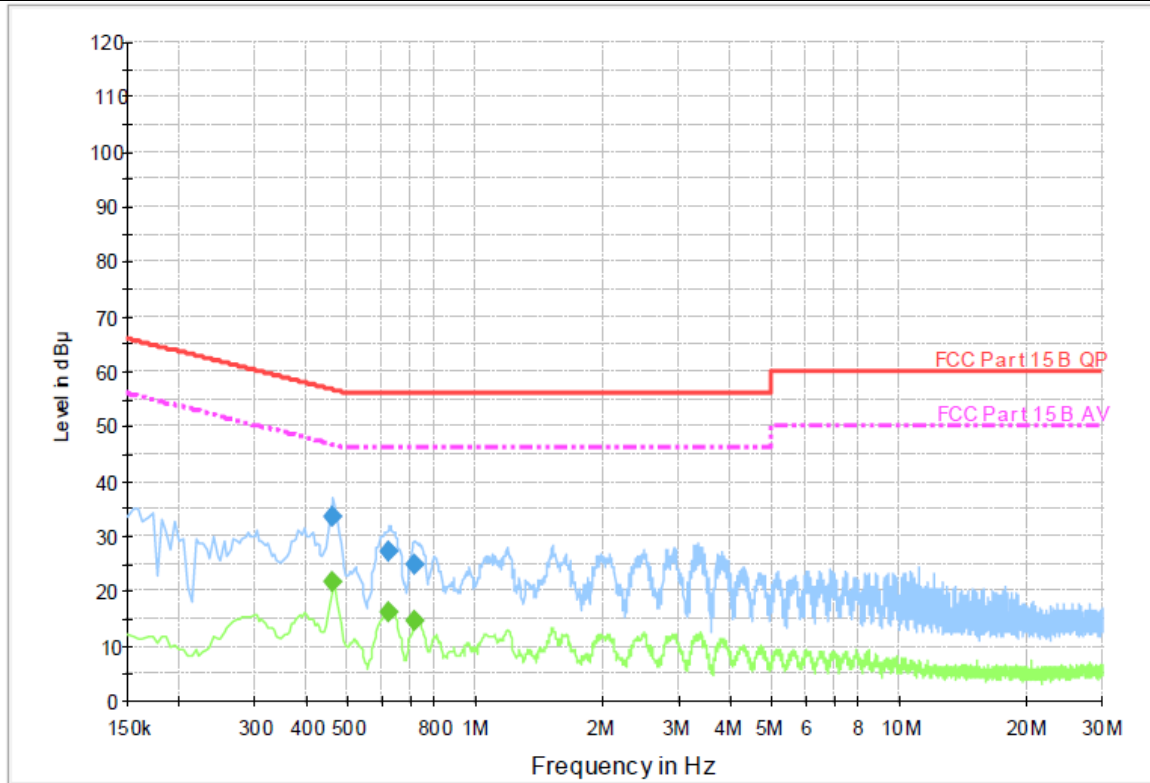

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.460500	33.5	1000.00	9.000	On	L1	9.5	23.2	56.7	
0.622500	27.4	1000.00	9.000	On	L1	9.5	28.6	56.0	
0.717000	24.9	1000.00	9.000	On	L1	9.5	31.1	56.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.460500	21.7	1000.00	9.000	On	L1	9.5	25.0	46.7	
0.622500	16.3	1000.00	9.000	On	L1	9.5	29.7	46.0	
0.717000	14.4	1000.00	9.000	On	L1	9.5	31.6	46.0	

Emission Level = Read Level + Correct Factor





Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported

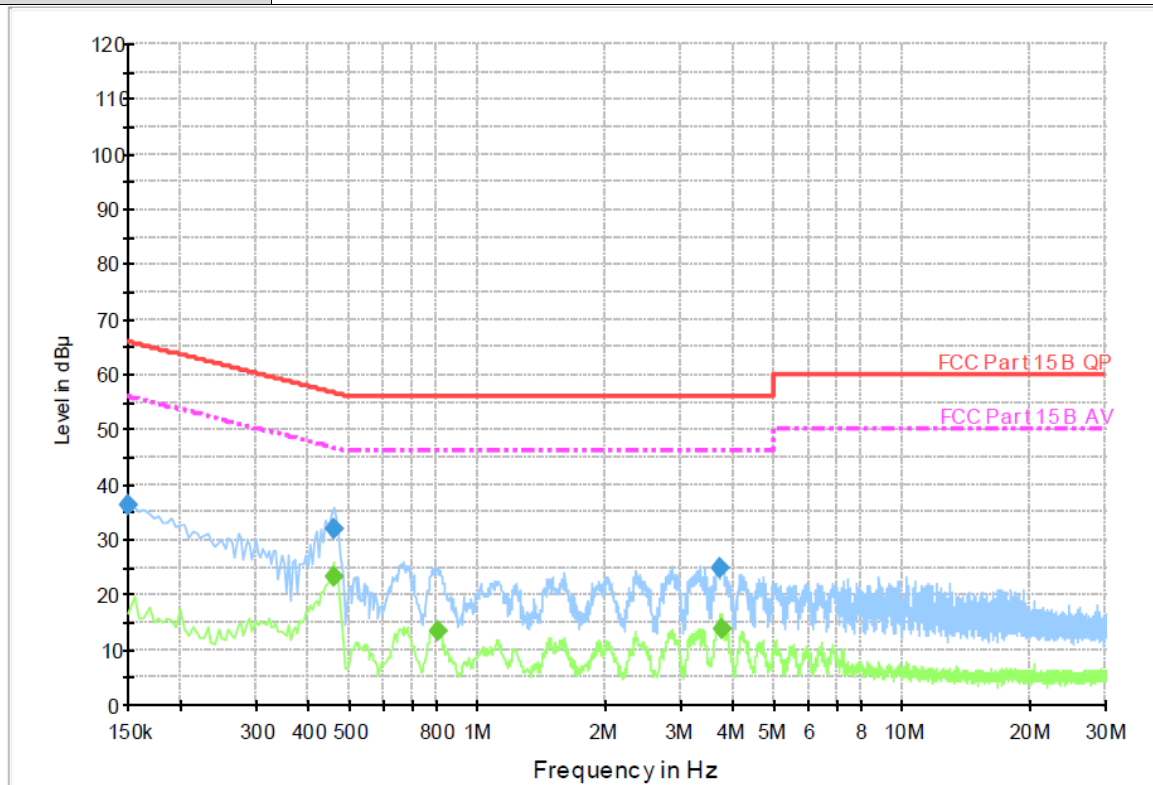

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.150000	36.4	1000.00	9.000	On	N	9.3	29.6	66.0	
0.460500	31.9	1000.00	9.000	On	N	9.4	24.8	56.7	
3.709500	24.7	1000.00	9.000	On	N	9.4	31.3	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.456000	23.3	1000.00	9.000	On	N	9.4	23.5	46.8	
0.802500	13.5	1000.00	9.000	On	N	9.4	33.5	46.0	
3.750000	13.7	1000.00	9.000	On	N	9.4	33.3	46.0	

Emission Level = Read Level + Correct Factor



3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBµV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBµV/m)=20log Emission Level (µV/m).


Test Configuration

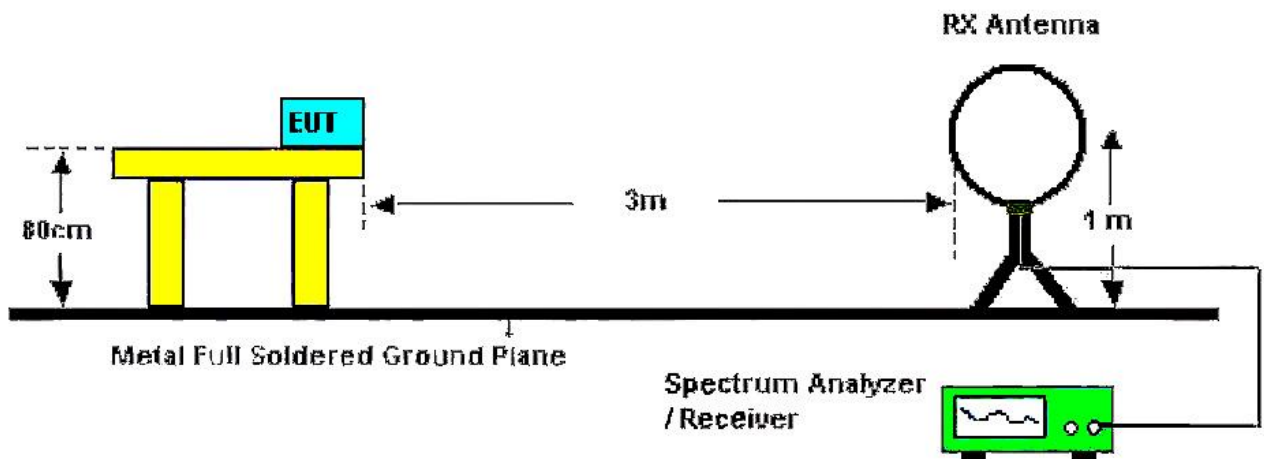

Below 30MHz Test Setup

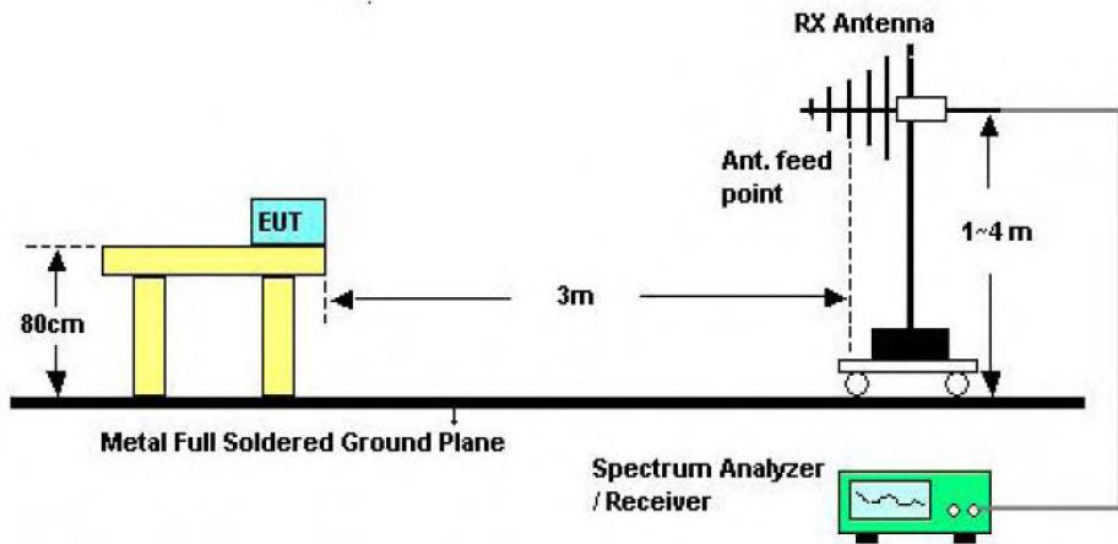

30-1000MHz Test Setup

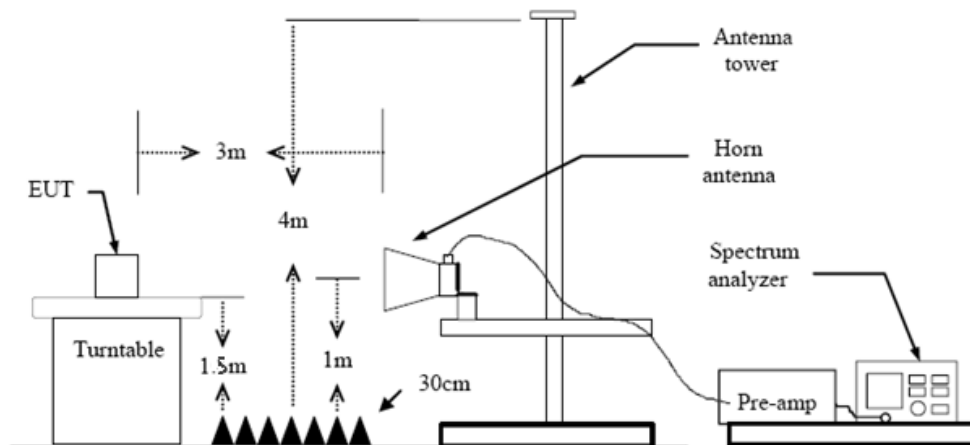

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
 5. Set to the maximum power setting and enable the EUT transmit continuously.
 6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz:
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz:
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold
- If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the



peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 kHz~30 MHz


From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

Ant. Pol.	Horizontal
Test Mode:	TX BLE 1M Mode 2402MHz
Remark:	Only worse case is reported.

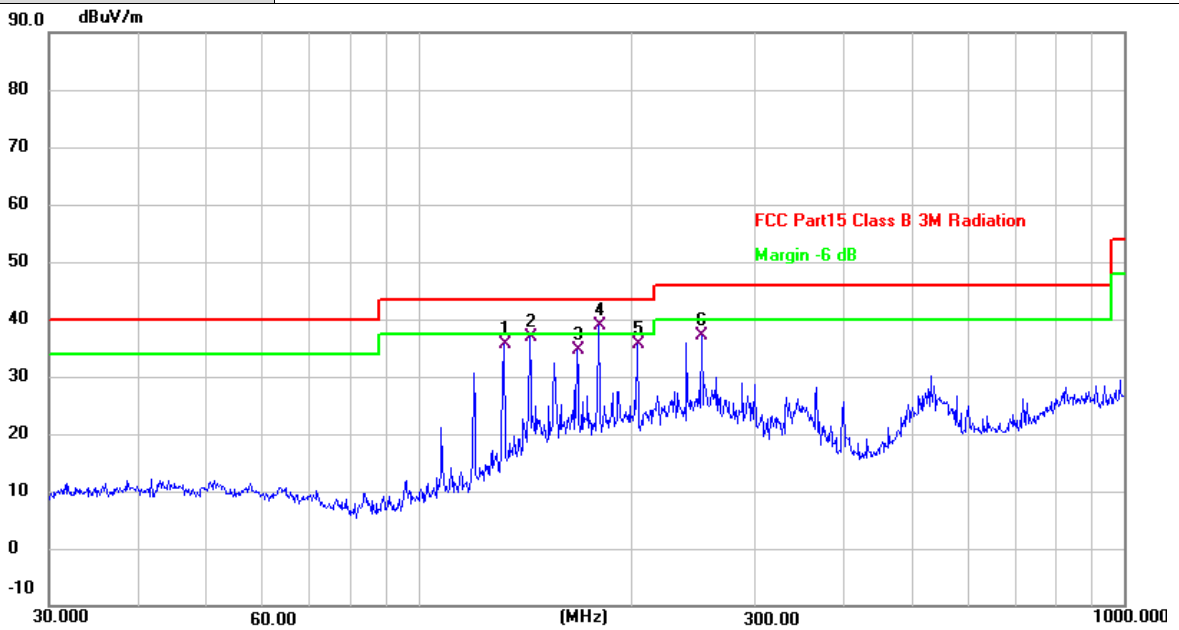

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	132.2206	55.16	-19.58	35.58	43.50	-7.92	QP
2	143.8295	55.18	-18.39	36.79	43.50	-6.71	QP
3	167.8243	53.52	-18.88	34.64	43.50	-8.86	QP
4 *	180.0165	58.57	-19.67	38.90	43.50	-4.60	QP
5	204.2377	56.54	-20.82	35.72	43.50	-7.78	QP
6	252.0627	56.43	-19.21	37.22	46.00	-8.78	QP


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	TX BLE 1M Mode 2402MHz
Remark:	Only worse case is reported.

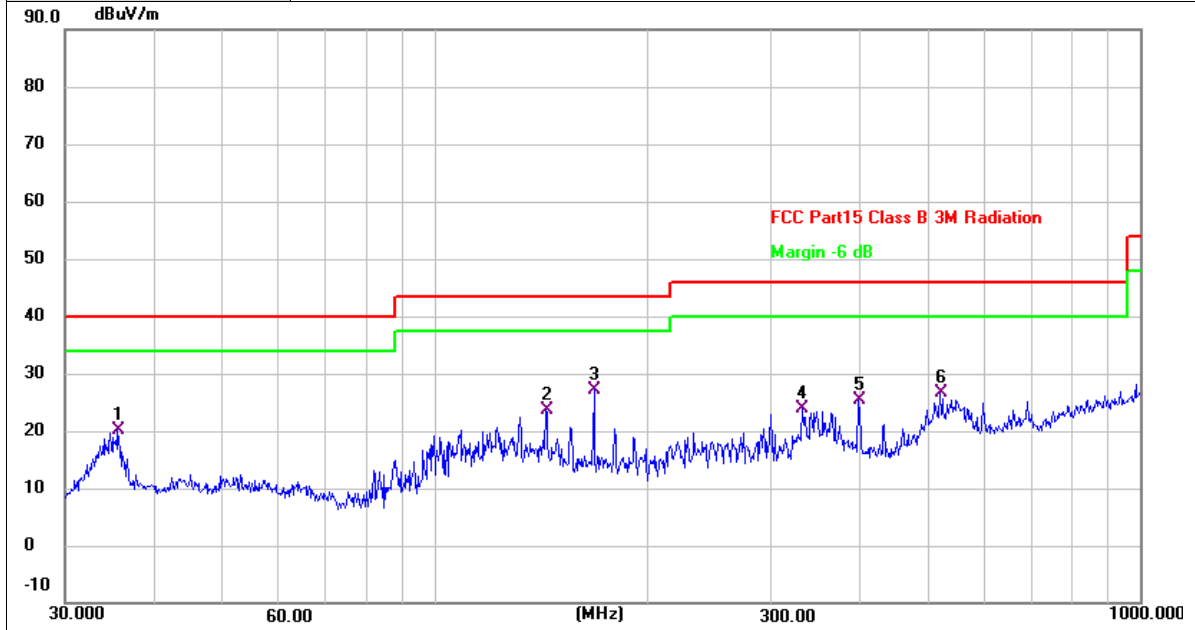

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.6240	38.76	-18.65	20.11	40.00	-19.89	QP
2	143.8295	41.95	-18.39	23.56	43.50	-19.94	QP
3 *	168.4138	45.99	-18.92	27.07	43.50	-16.43	QP
4	332.5187	40.42	-16.56	23.86	46.00	-22.14	QP
5	399.0302	40.00	-14.71	25.29	46.00	-20.71	QP
6	520.8882	38.15	-11.64	26.51	46.00	-19.49	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Above 1GHz

Ant. Pol.	Horizontal																														
Test Mode:	TX BLE 1M Mode 2402MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4803.371</td> <td>52.54</td> <td>-3.21</td> <td>49.33</td> <td>74.00</td> <td>-24.67</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4804.020</td> <td>45.04</td> <td>-3.21</td> <td>41.83</td> <td>54.00</td> <td>-12.17</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4803.371	52.54	-3.21	49.33	74.00	-24.67	peak	2 *	4804.020	45.04	-3.21	41.83	54.00	-12.17	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4803.371	52.54	-3.21	49.33	74.00	-24.67	peak																								
2 *	4804.020	45.04	-3.21	41.83	54.00	-12.17	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Vertical																														
Test Mode:	TX BLE 1M Mode 2402MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4803.943</td> <td>34.74</td> <td>-3.21</td> <td>31.53</td> <td>54.00</td> <td>-22.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4804.681</td> <td>46.05</td> <td>-3.21</td> <td>42.84</td> <td>74.00</td> <td>-31.16</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.943	34.74	-3.21	31.53	54.00	-22.47	AVG	2	4804.681	46.05	-3.21	42.84	74.00	-31.16	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4803.943	34.74	-3.21	31.53	54.00	-22.47	AVG																								
2	4804.681	46.05	-3.21	42.84	74.00	-31.16	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant. Pol.	Horizontal																														
Test Mode:	TX BLE 1M Mode 2440MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4879.536</td> <td>53.09</td> <td>-3.02</td> <td>50.07</td> <td>74.00</td> <td>-23.93</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4879.921</td> <td>45.66</td> <td>-3.02</td> <td>42.64</td> <td>54.00</td> <td>-11.36</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4879.536	53.09	-3.02	50.07	74.00	-23.93	peak	2 *	4879.921	45.66	-3.02	42.64	54.00	-11.36	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4879.536	53.09	-3.02	50.07	74.00	-23.93	peak																								
2 *	4879.921	45.66	-3.02	42.64	54.00	-11.36	AVG																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															

Ant. Pol.	Vertical																														
Test Mode:	TX BLE 1M Mode 2440MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4879.323</td> <td>33.30</td> <td>-3.02</td> <td>30.28</td> <td>54.00</td> <td>-23.72</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4880.853</td> <td>45.85</td> <td>-3.02</td> <td>42.83</td> <td>74.00</td> <td>-31.17</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4879.323	33.30	-3.02	30.28	54.00	-23.72	AVG	2	4880.853	45.85	-3.02	42.83	74.00	-31.17	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4879.323	33.30	-3.02	30.28	54.00	-23.72	AVG																								
2	4880.853	45.85	-3.02	42.83	74.00	-31.17	peak																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															



Ant. Pol.	Horizontal																														
Test Mode:	TX BLE 1M Mode 2480MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4959.582</td> <td>48.81</td> <td>-2.82</td> <td>45.99</td> <td>74.00</td> <td>-28.01</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4959.869</td> <td>39.15</td> <td>-2.82</td> <td>36.33</td> <td>54.00</td> <td>-17.67</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.582	48.81	-2.82	45.99	74.00	-28.01	peak	2 *	4959.869	39.15	-2.82	36.33	54.00	-17.67	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.582	48.81	-2.82	45.99	74.00	-28.01	peak																								
2 *	4959.869	39.15	-2.82	36.33	54.00	-17.67	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Vertical																														
Test Mode:	TX BLE 1M Mode 2480MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4959.550</td> <td>32.84</td> <td>-2.82</td> <td>30.02</td> <td>54.00</td> <td>-23.98</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4960.700</td> <td>45.48</td> <td>-2.82</td> <td>42.66</td> <td>74.00</td> <td>-31.34</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4959.550	32.84	-2.82	30.02	54.00	-23.98	AVG	2	4960.700	45.48	-2.82	42.66	74.00	-31.34	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4959.550	32.84	-2.82	30.02	54.00	-23.98	AVG																								
2	4960.700	45.48	-2.82	42.66	74.00	-31.34	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant. Pol.	Horizontal																														
Test Mode:	TX BLE 2M Mode 2402MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4803.015</td> <td>42.75</td> <td>-3.21</td> <td>39.54</td> <td>54.00</td> <td>-14.46</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4804.031</td> <td>52.34</td> <td>-3.21</td> <td>49.13</td> <td>74.00</td> <td>-24.87</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.015	42.75	-3.21	39.54	54.00	-14.46	AVG	2	4804.031	52.34	-3.21	49.13	74.00	-24.87	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4803.015	42.75	-3.21	39.54	54.00	-14.46	AVG																								
2	4804.031	52.34	-3.21	49.13	74.00	-24.87	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Vertical																														
Test Mode:	TX BLE 2M Mode 2402MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4803.552</td> <td>34.81</td> <td>-3.21</td> <td>31.60</td> <td>54.00</td> <td>-22.40</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4804.141</td> <td>46.96</td> <td>-3.21</td> <td>43.75</td> <td>74.00</td> <td>-30.25</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.552	34.81	-3.21	31.60	54.00	-22.40	AVG	2	4804.141	46.96	-3.21	43.75	74.00	-30.25	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4803.552	34.81	-3.21	31.60	54.00	-22.40	AVG																								
2	4804.141	46.96	-3.21	43.75	74.00	-30.25	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant. Pol.	Horizontal																														
Test Mode:	TX BLE 2M Mode 2440MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4879.006</td> <td>43.88</td> <td>-3.02</td> <td>40.86</td> <td>54.00</td> <td>-13.14</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4879.958</td> <td>53.10</td> <td>-3.02</td> <td>50.08</td> <td>74.00</td> <td>-23.92</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4879.006	43.88	-3.02	40.86	54.00	-13.14	AVG	2	4879.958	53.10	-3.02	50.08	74.00	-23.92	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4879.006	43.88	-3.02	40.86	54.00	-13.14	AVG																								
2	4879.958	53.10	-3.02	50.08	74.00	-23.92	peak																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															

Ant. Pol.	Vertical																														
Test Mode:	TX BLE 2M Mode 2440MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4879.619</td> <td>47.44</td> <td>-3.02</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4879.643</td> <td>35.92</td> <td>-3.02</td> <td>32.90</td> <td>54.00</td> <td>-21.10</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4879.619	47.44	-3.02	44.42	74.00	-29.58	peak	2 *	4879.643	35.92	-3.02	32.90	54.00	-21.10	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4879.619	47.44	-3.02	44.42	74.00	-29.58	peak																								
2 *	4879.643	35.92	-3.02	32.90	54.00	-21.10	AVG																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															



Ant. Pol.	Horizontal																														
Test Mode:	TX BLE 2M Mode 2480MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4959.058</td> <td>38.10</td> <td>-2.82</td> <td>35.28</td> <td>54.00</td> <td>-18.72</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4959.986</td> <td>49.15</td> <td>-2.82</td> <td>46.33</td> <td>74.00</td> <td>-27.67</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4959.058	38.10	-2.82	35.28	54.00	-18.72	AVG	2	4959.986	49.15	-2.82	46.33	74.00	-27.67	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4959.058	38.10	-2.82	35.28	54.00	-18.72	AVG																								
2	4959.986	49.15	-2.82	46.33	74.00	-27.67	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Vertical																														
Test Mode:	TX BLE 2M Mode 2480MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4959.128</td> <td>33.84</td> <td>-2.82</td> <td>31.02</td> <td>54.00</td> <td>-22.98</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4959.958</td> <td>46.04</td> <td>-2.82</td> <td>43.22</td> <td>74.00</td> <td>-30.78</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4959.128	33.84	-2.82	31.02	54.00	-22.98	AVG	2	4959.958	46.04	-2.82	43.22	74.00	-30.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4959.128	33.84	-2.82	31.02	54.00	-22.98	AVG																								
2	4959.958	46.04	-2.82	43.22	74.00	-30.78	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)

Restricted Frequency Band (MHz)	(dBμV/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

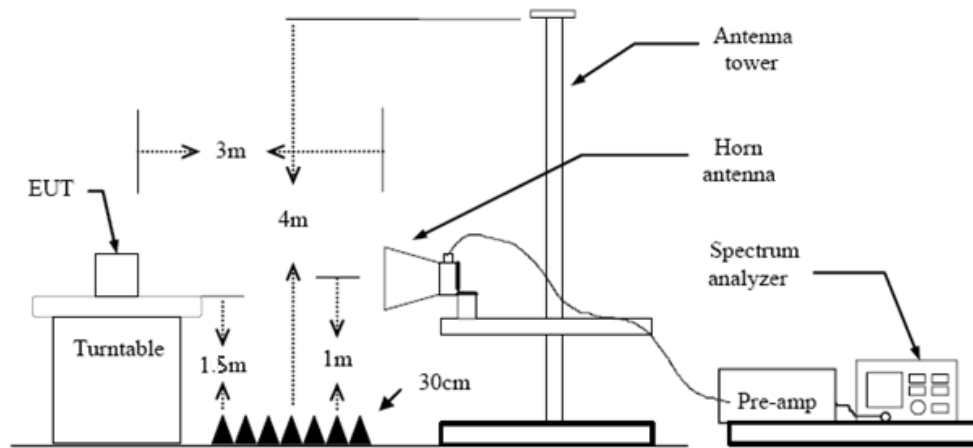

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.
 RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


Test Mode

Please refer to the clause 2.4.



Test Result

Ant. Pol.	Horizontal
Test Mode:	TX BLE 1M Mode 2402MHz

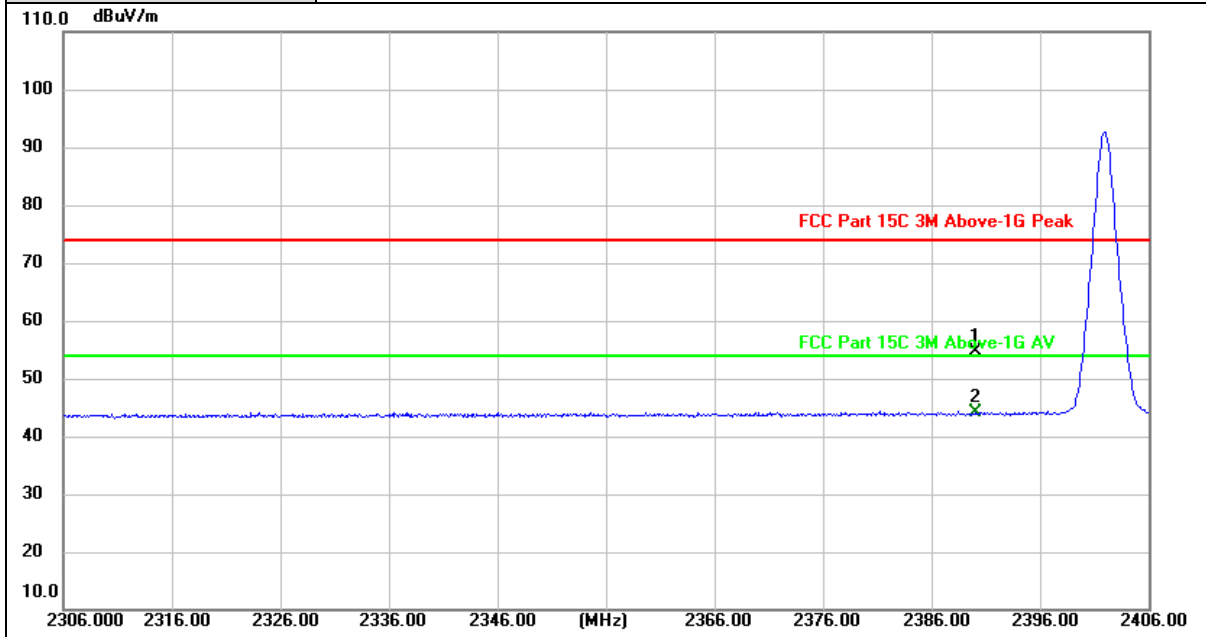


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	23.46	31.08	54.54	74.00	-19.46	peak
2 *	2390.000	12.97	31.08	44.05	54.00	-9.95	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX BLE 1M Mode 2402MHz

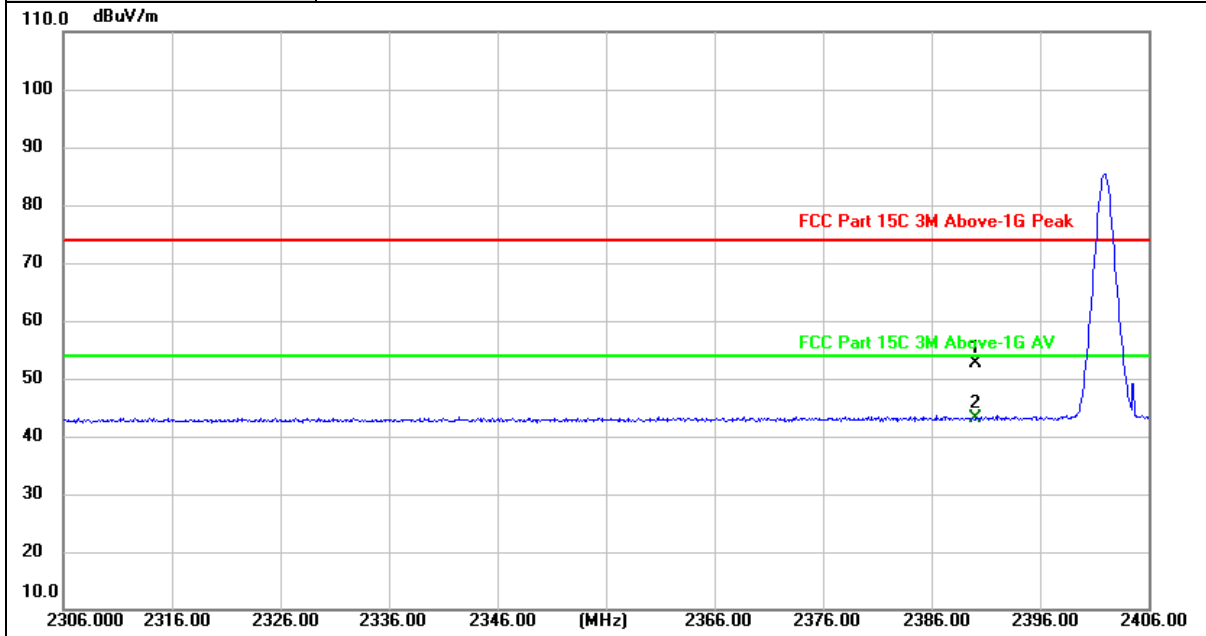


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	21.50	31.08	52.58	74.00	-21.42	peak
2 *	2390.000	12.06	31.08	43.14	54.00	-10.86	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX BLE 1M Mode 2480MHz

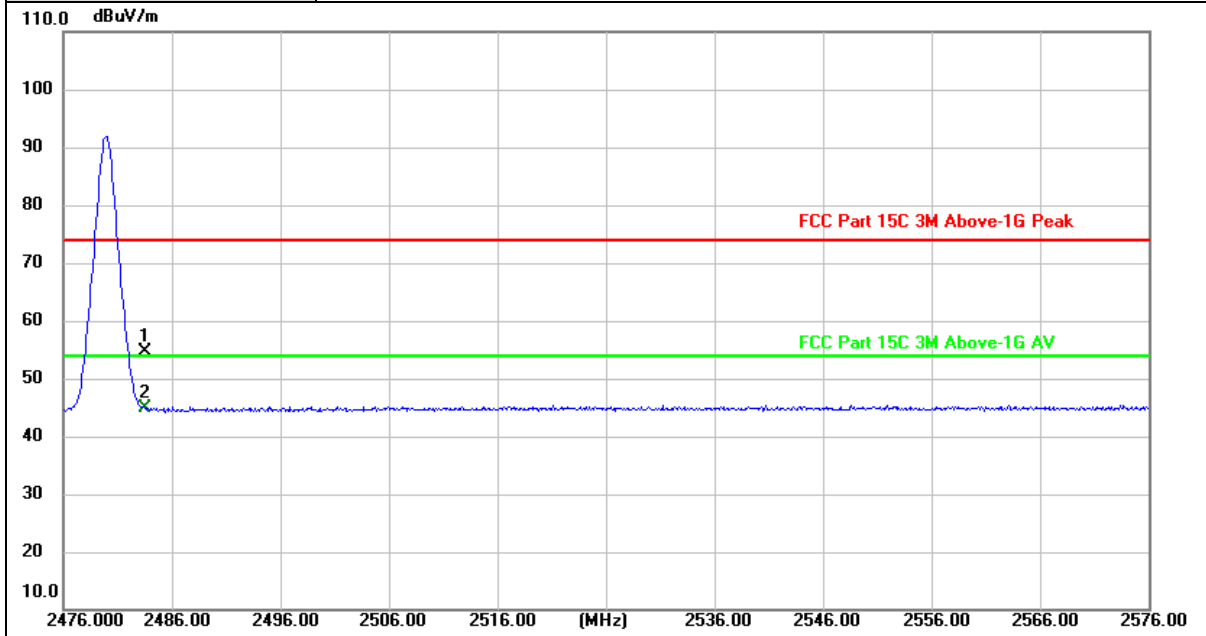


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	23.21	31.43	54.64	74.00	-19.36	peak
2 *	2483.500	13.47	31.43	44.90	54.00	-9.10	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX BLE 1M Mode 2480MHz

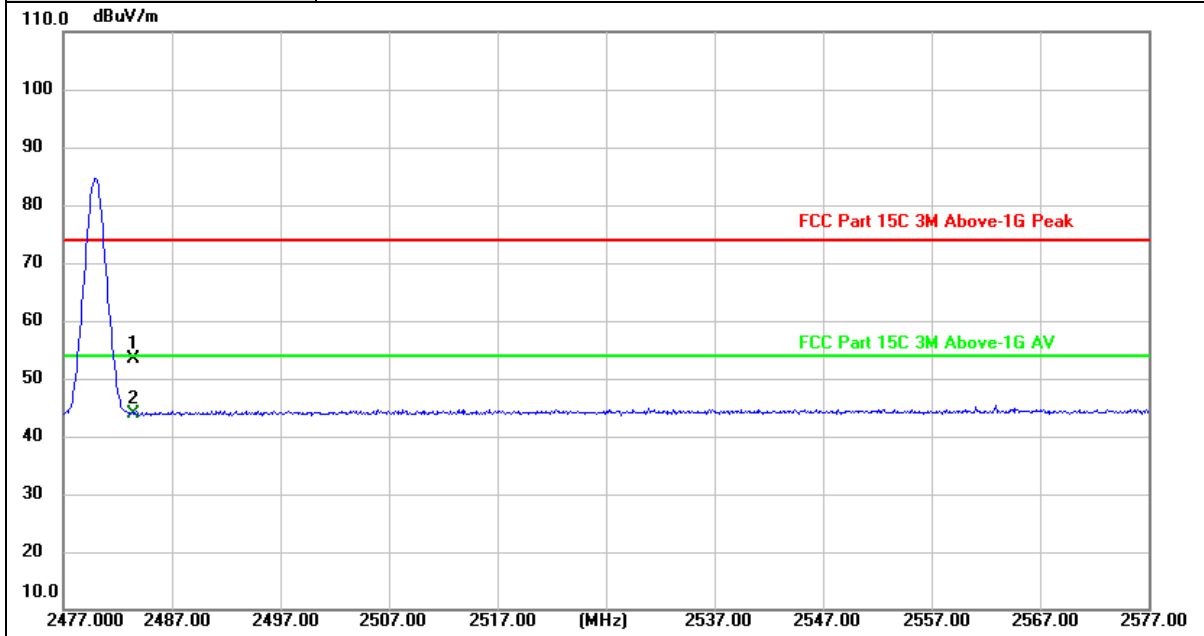

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	21.85	31.43	53.28	74.00	-20.72	peak
2 *	2483.500	12.56	31.43	43.99	54.00	-10.01	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. Pol.	Horizontal
Test Mode:	TX BLE 2M Mode 2402MHz

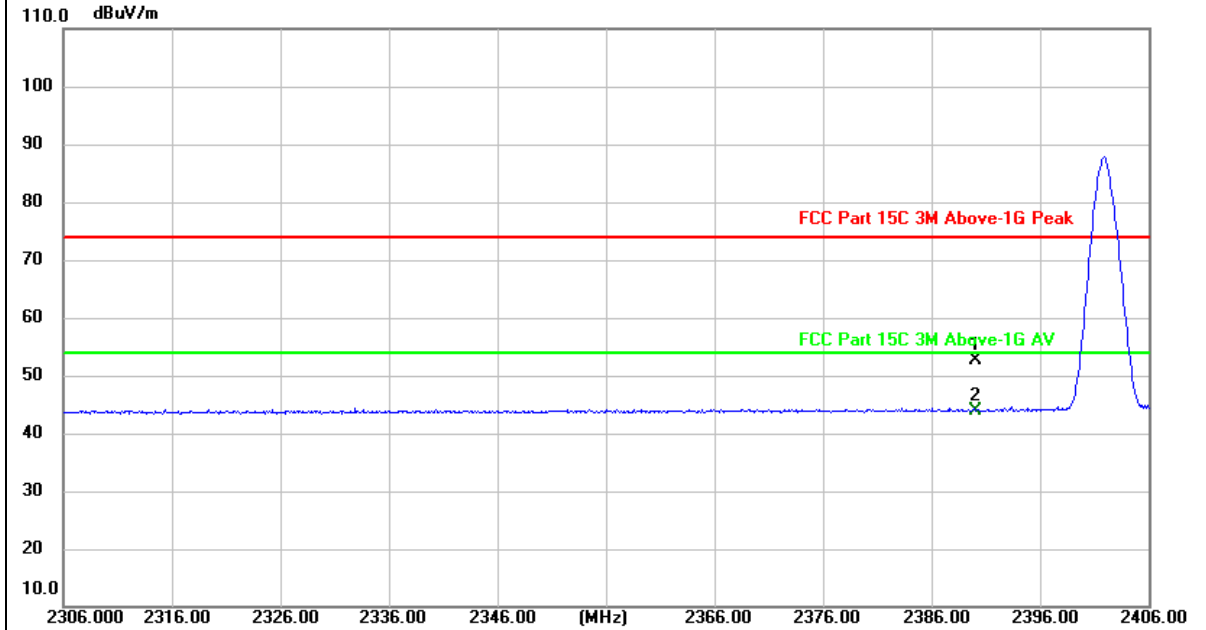


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	21.47	31.08	52.55	74.00	-21.45	peak
2 *	2390.000	12.89	31.08	43.97	54.00	-10.03	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX BLE 2M Mode 2402MHz

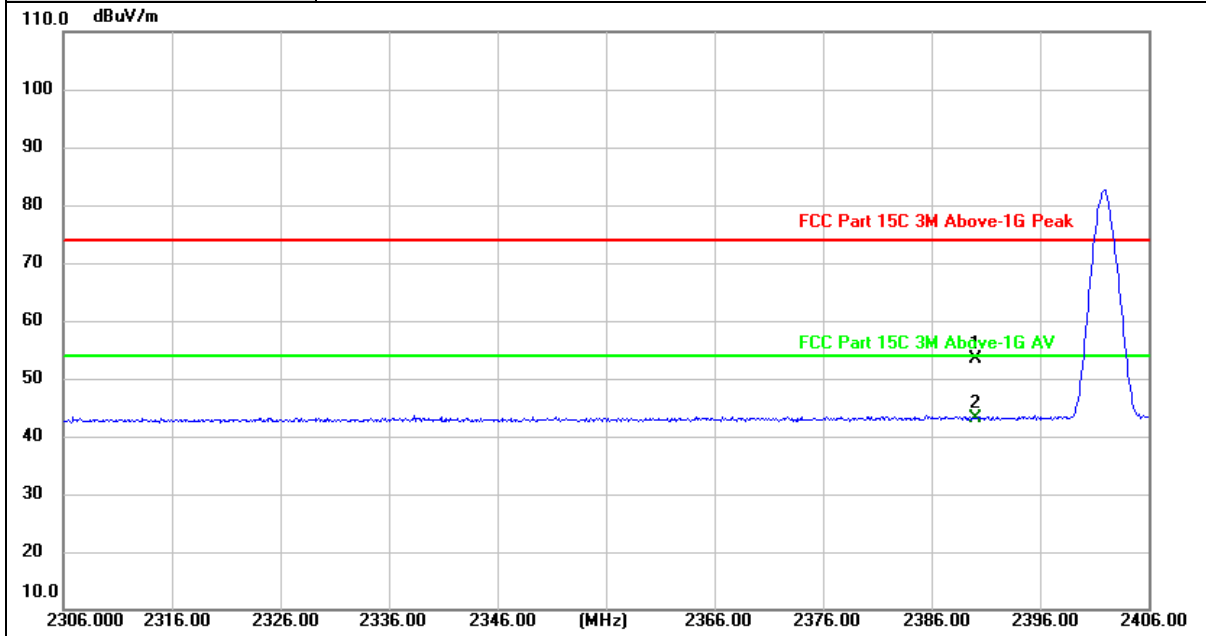


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	22.24	31.08	53.32	74.00	-20.68	peak
2 *	2390.000	12.05	31.08	43.13	54.00	-10.87	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant. Pol.	Horizontal
Test Mode:	TX BLE 2M Mode 2480MHz

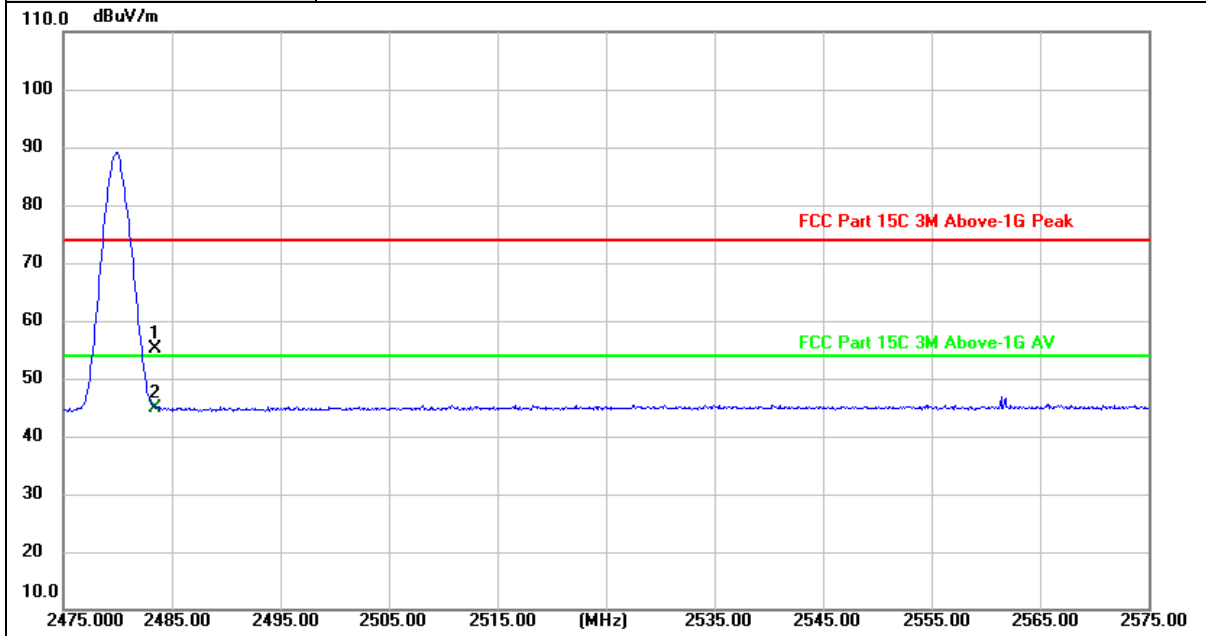

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	23.79	31.43	55.22	74.00	-18.78	peak
2 *	2483.500	13.55	31.43	44.98	54.00	-9.02	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	TX BLE 2M Mode 2480MHz

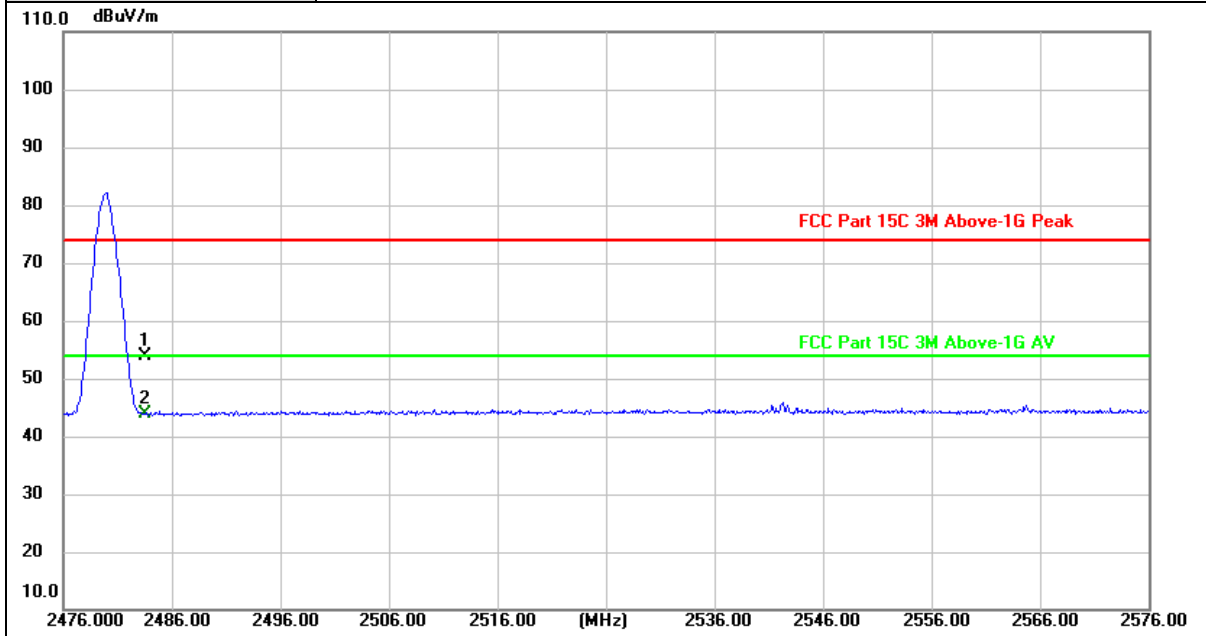

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	22.47	31.43	53.90	74.00	-20.10	peak
2 *	2483.500	12.37	31.43	43.80	54.00	-10.20	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value






3.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration

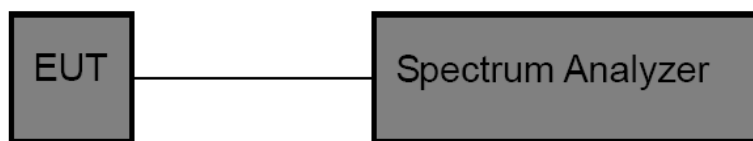

Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW ≥ RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.

Test Result

Band Edge Conducted Test

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-4.42	-54.84	≤-24.42	PASS
		High	2480	-5.56	-57.24	≤-25.56	PASS
BLE_2M	Ant1	Low	2402	-3.86	-41.5	≤-23.86	PASS
		High	2480	-5.42	-57.08	≤-25.42	PASS




Conducted Spurious Emissions Test


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-4.32	-4.32	---	PASS
			30~1000	-4.32	-57.67	≤-24.32	PASS
			1000~26500	-4.32	-36.16	≤-24.32	PASS
		2440	Reference	-4.60	-4.60	---	PASS
			30~1000	-4.60	-58.35	≤-24.6	PASS
			1000~26500	-4.60	-37.86	≤-24.6	PASS
		2480	Reference	-5.56	-5.56	---	PASS
			30~1000	-5.56	-57.9	≤-25.56	PASS
			1000~26500	-5.56	-40.26	≤-25.56	PASS
BLE_2M	Ant1	2402	Reference	-3.89	-3.89	---	PASS
			30~1000	-3.89	-57.44	≤-23.89	PASS
			1000~26500	-3.89	-35.66	≤-23.89	PASS
		2440	Reference	-4.30	-4.30	---	PASS
			30~1000	-4.30	-58.14	≤-24.3	PASS
			1000~26500	-4.30	-42.19	≤-24.3	PASS
		2480	Reference	-5.40	-5.40	---	PASS
			30~1000	-5.40	-57.93	≤-25.4	PASS
			1000~26500	-5.40	-40.76	≤-25.4	PASS




Band Edge Conducted Test plot as follows:

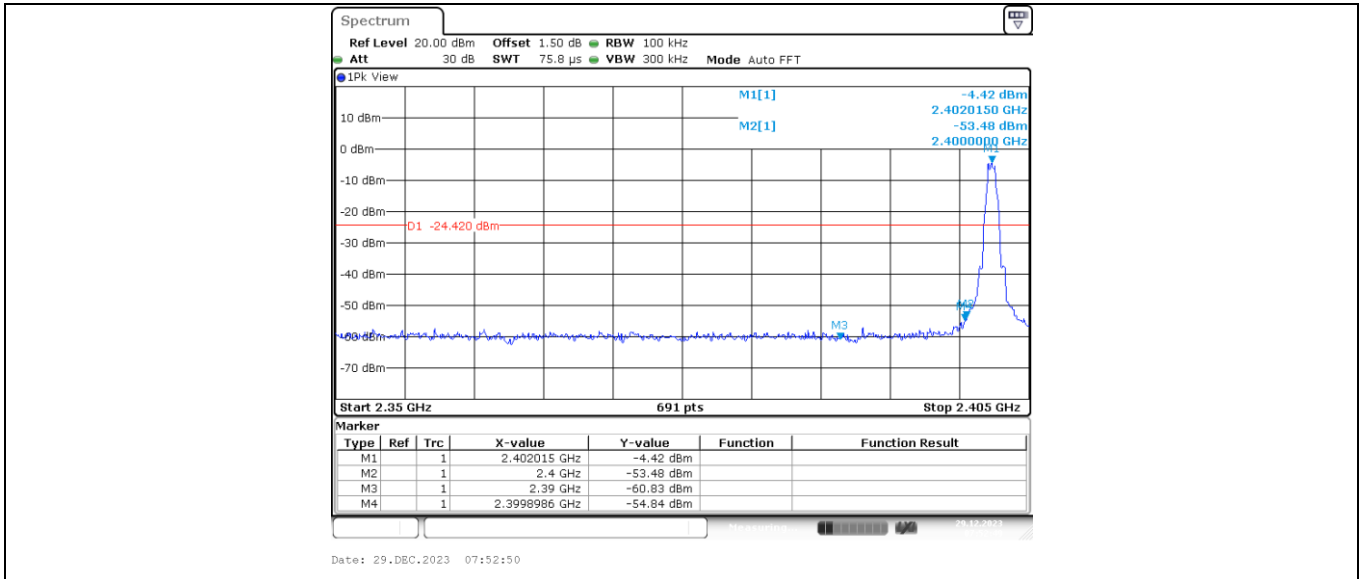

BLE_1M_Ant1_Low_2402

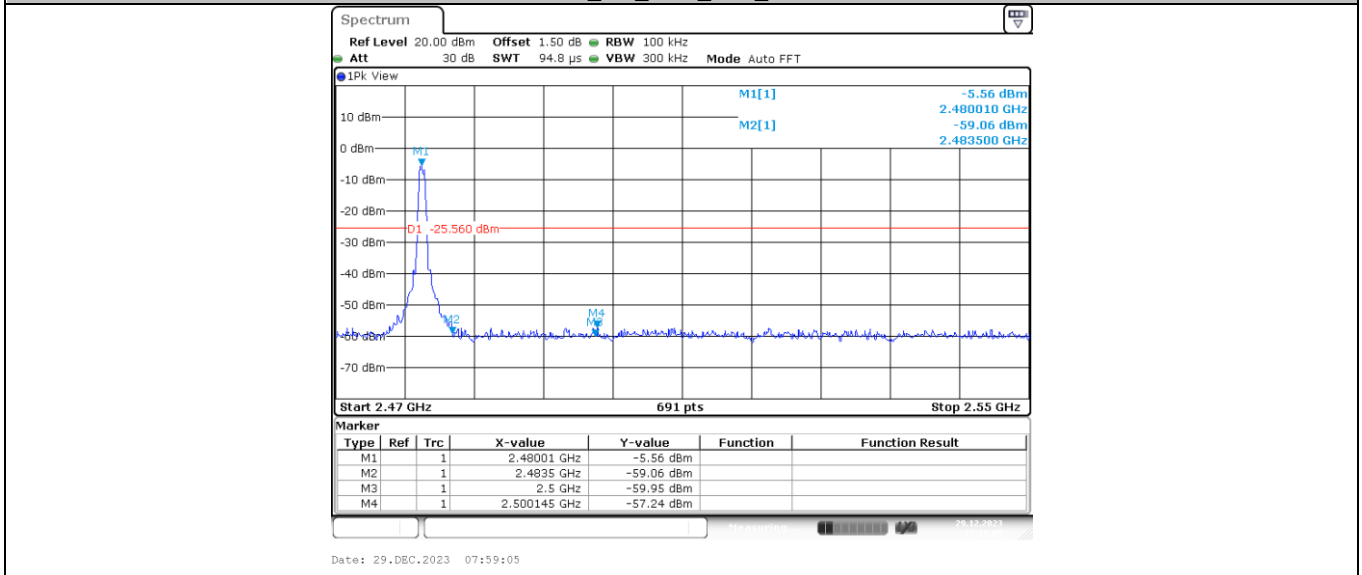


BLE_1M_Ant1_High_2480

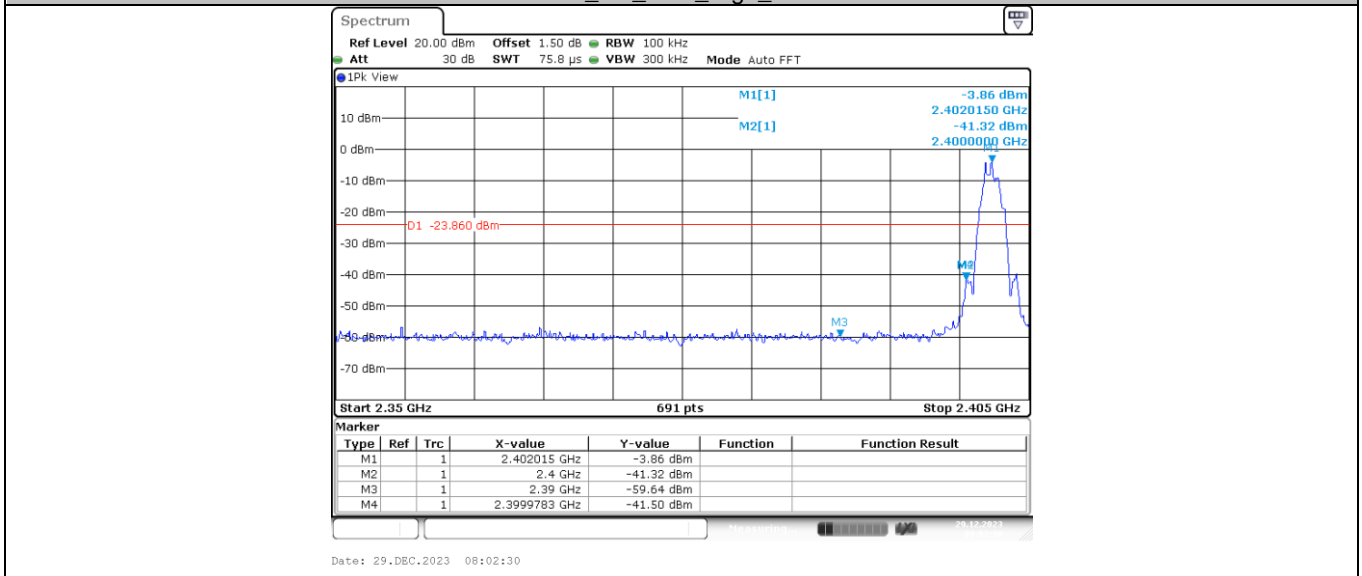


BLE_2M_Ant1_Low_2402




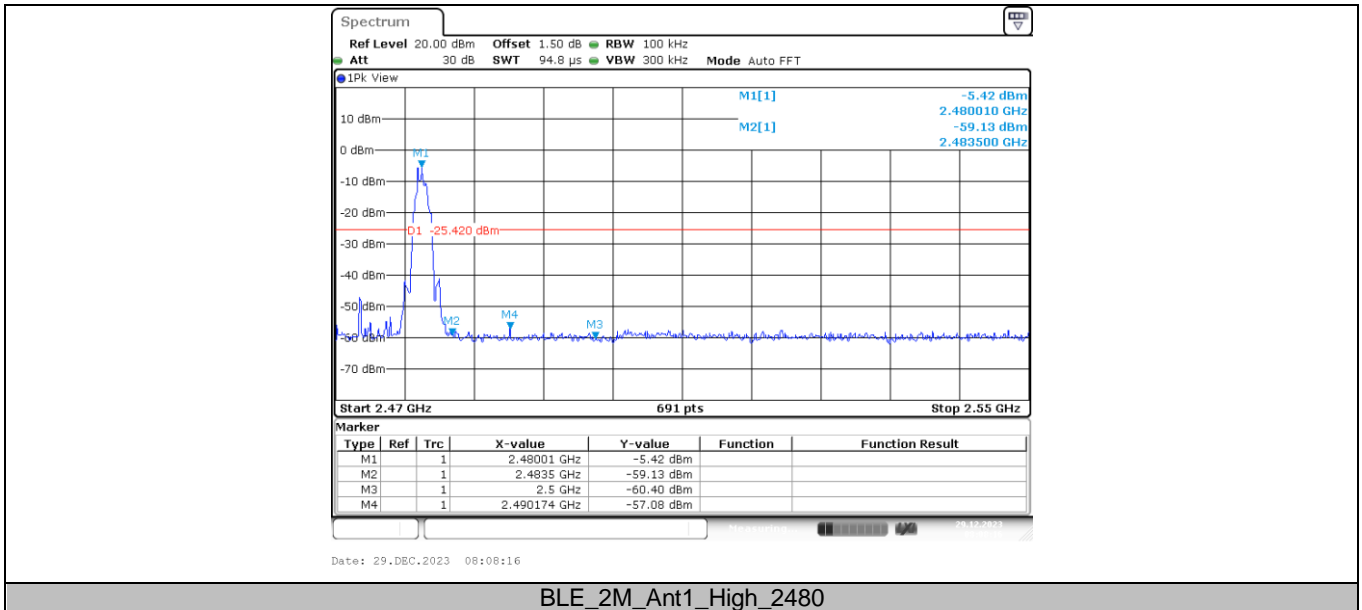


Conducted Spurious Emissions Test plot as follows:

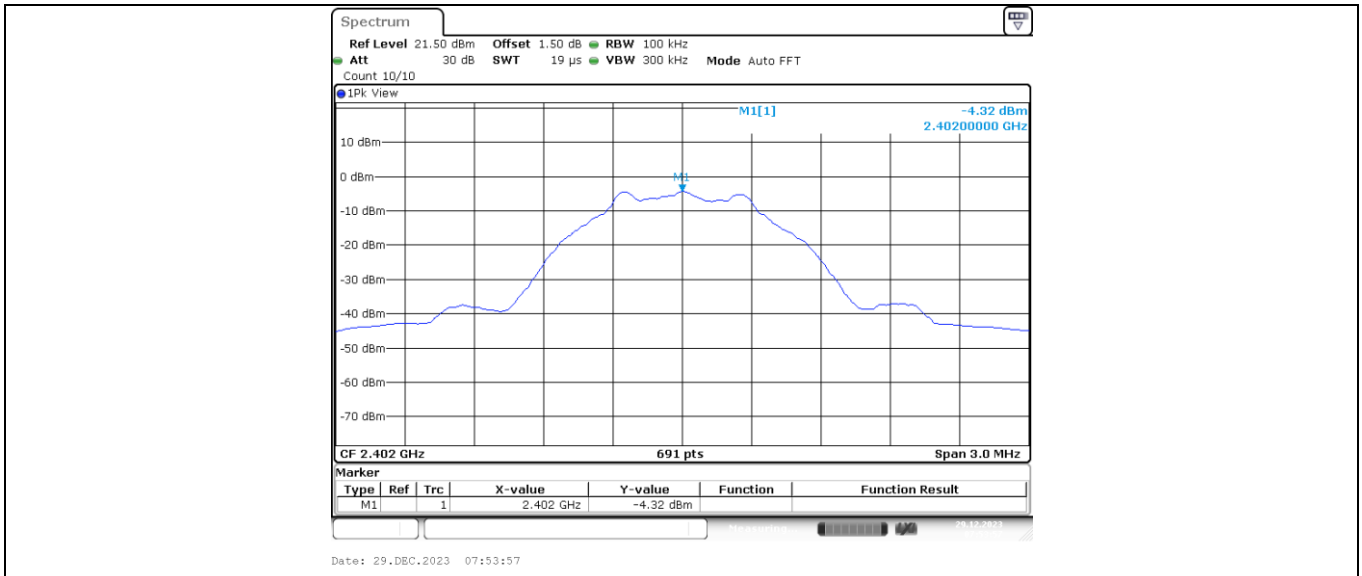


BLE_1M_Ant1_2402_0~Reference

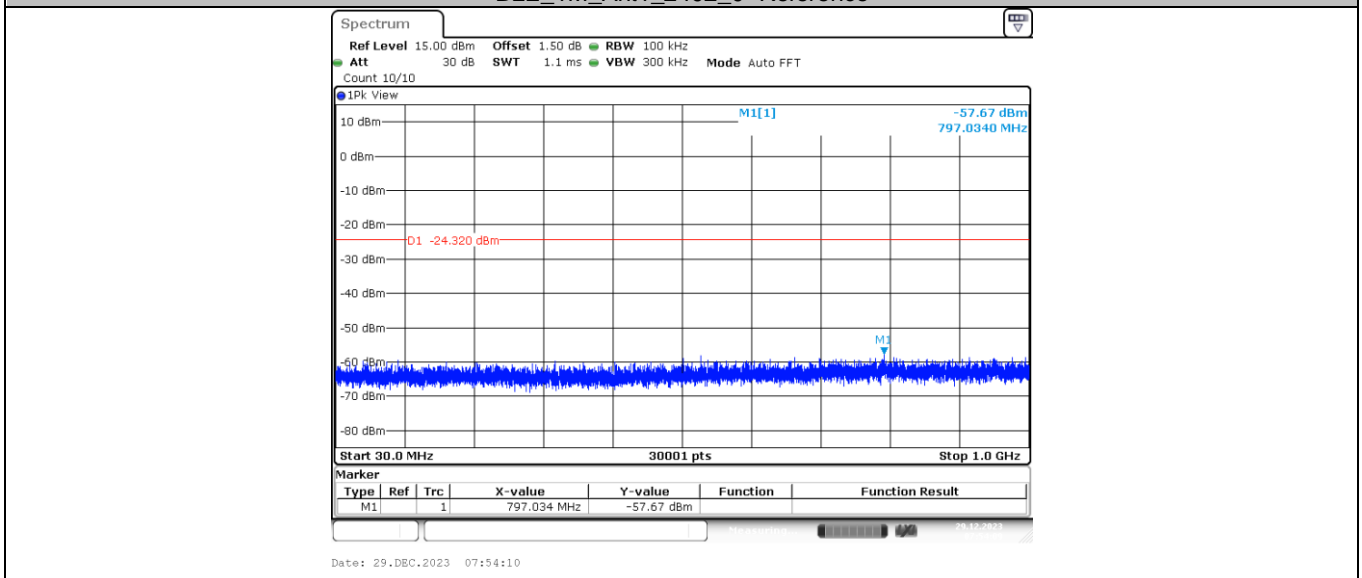

BLE_1M_Ant1_2402_30~1000

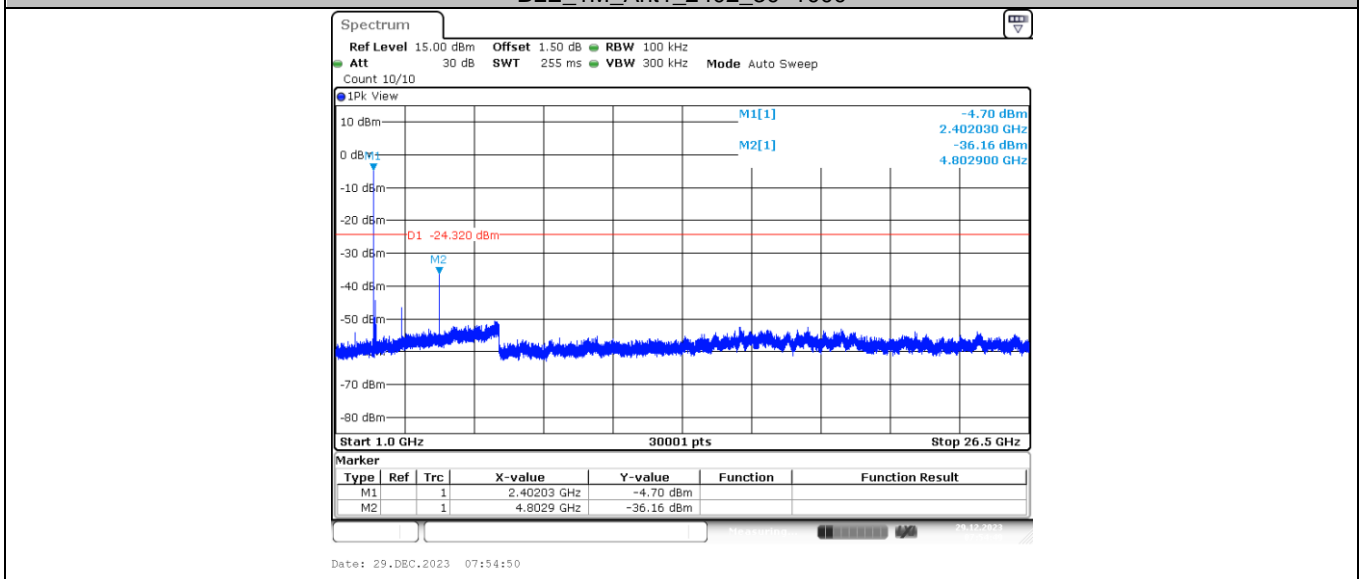


BLE_1M_Ant1_2402_1000~26500

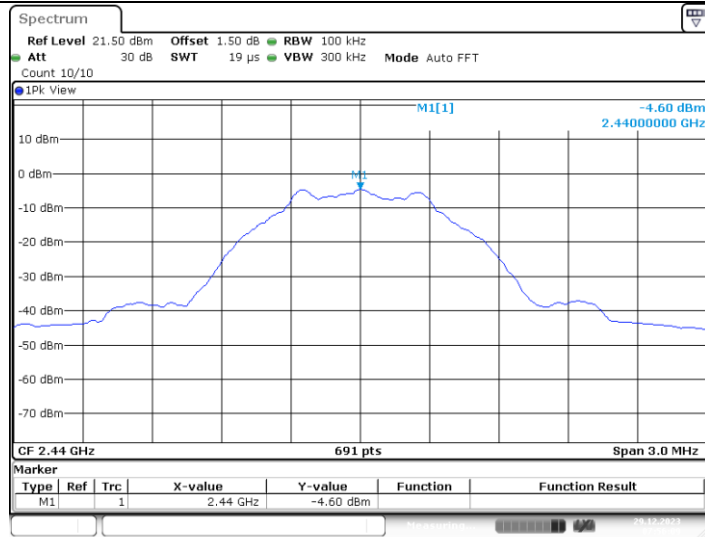


Date: 29.DEC.2023 07:56:08

BLE 1M_Ant1_2440_0~Reference

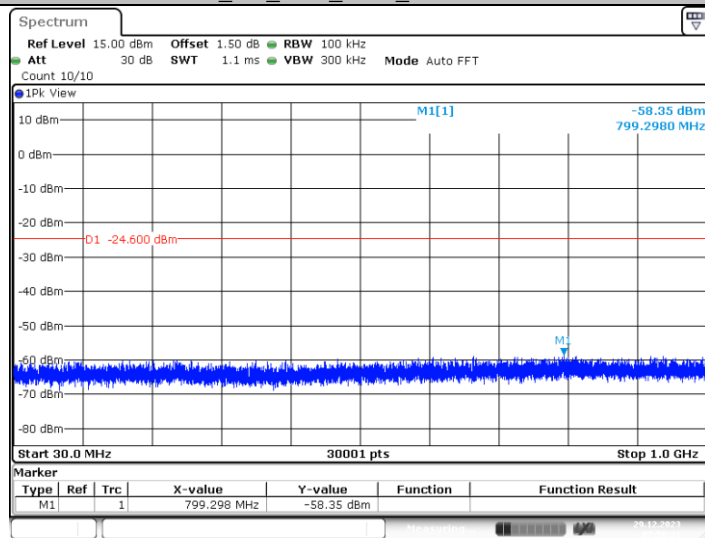

Date: 29.DEC.2023 07:56:21

BLE 1M_Ant1_2440_30~1000

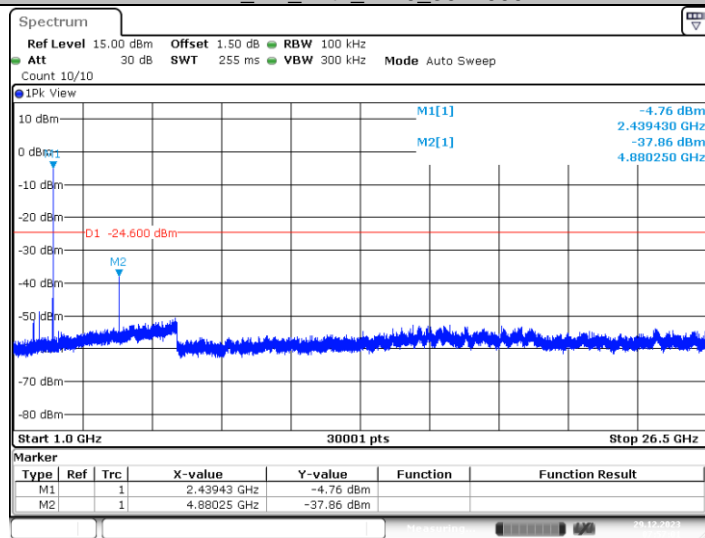

Date: 29.DEC.2023 07:57:01


BLE 1M_Ant1_2440_1000~26500

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>

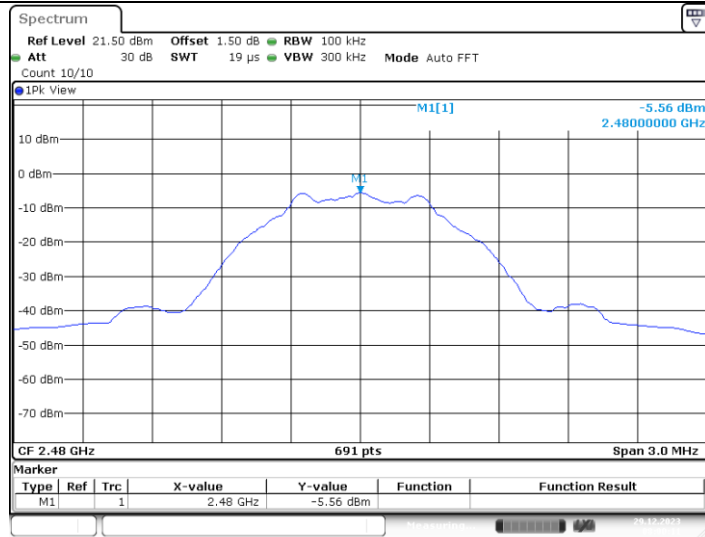


Date: 29.DEC.2023 08:00:12

BLE_1M_Ant1_2480_0~Reference

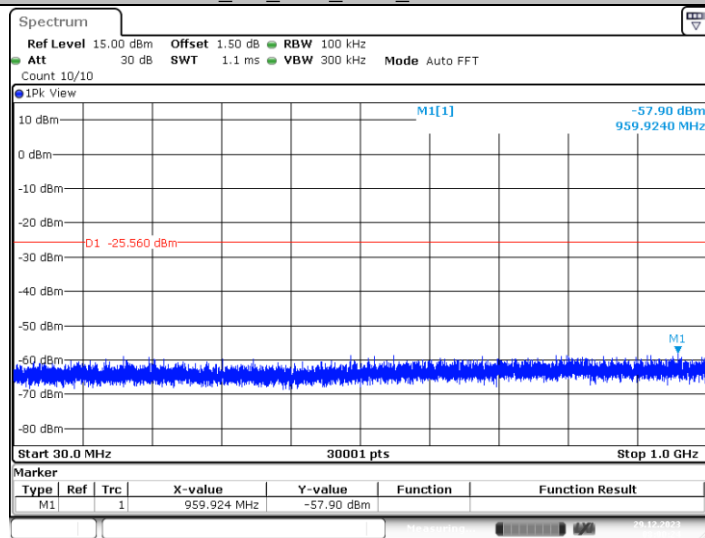

Date: 29.DEC.2023 08:00:24

BLE_1M_Ant1_2480_30~1000

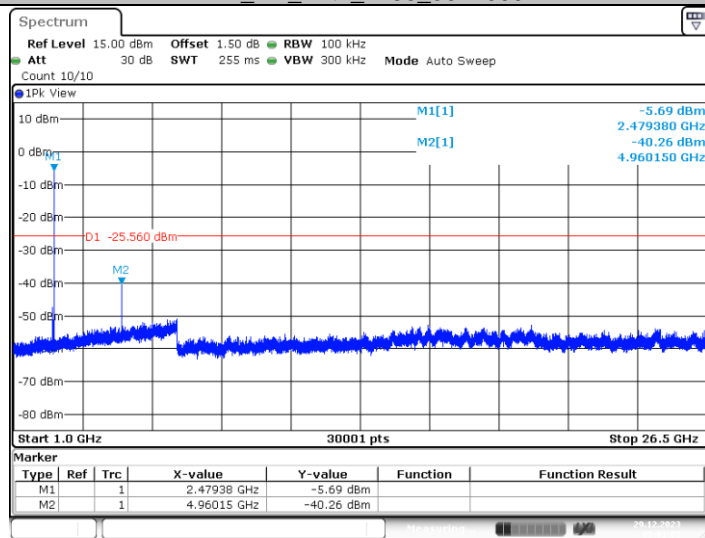

Date: 29.DEC.2023 08:01:04


BLE_1M_Ant1_2480_1000~26500

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>

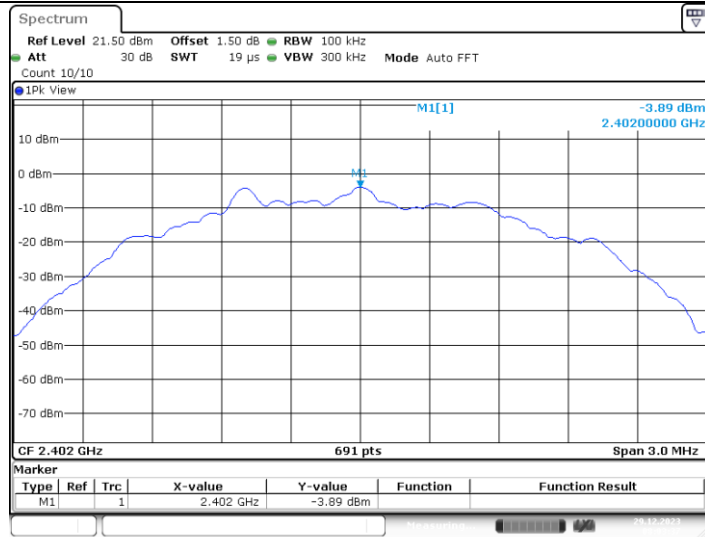


Date: 29.DEC.2023 08:03:37

BLE_2M_Ant1_2402_0~Reference

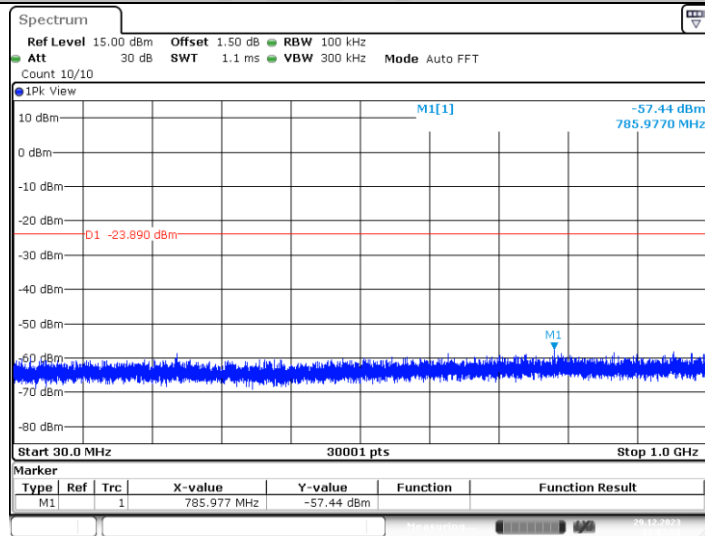

Date: 29.DEC.2023 08:03:50


BLE_2M_Ant1_2402_30~1000

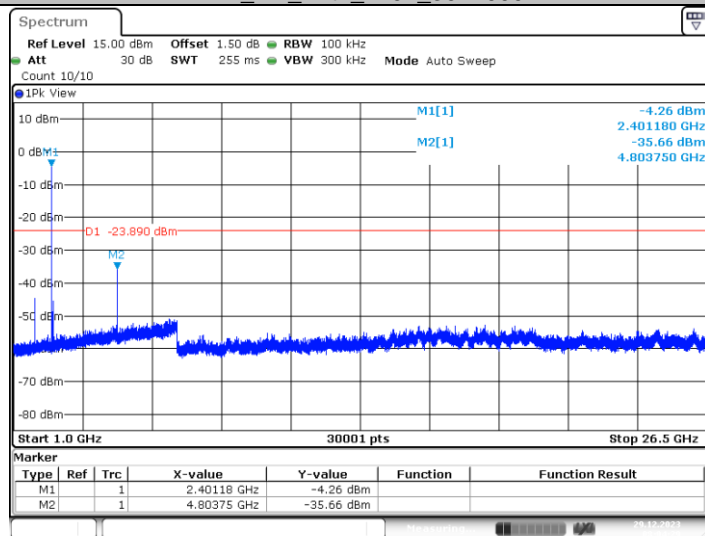

Date: 29.DEC.2023 08:04:30


BLE_2M_Ant1_2402_1000~26500



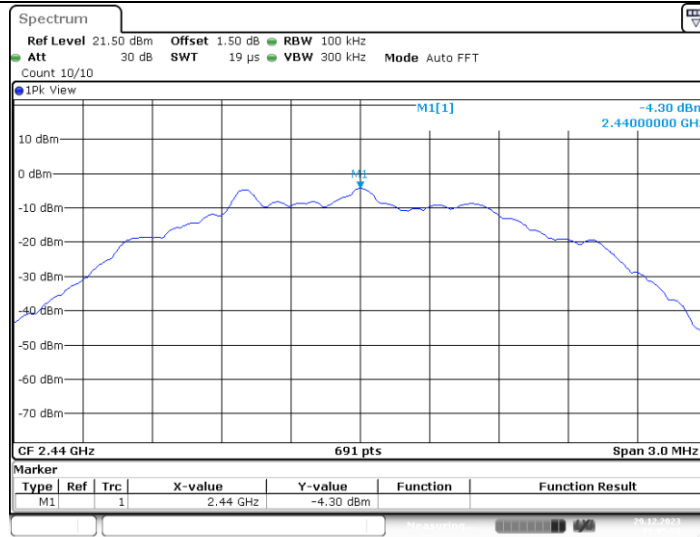


Date: 29.DEC.2023 08:05:50

BLE_2M_Ant1_2440_0~Reference

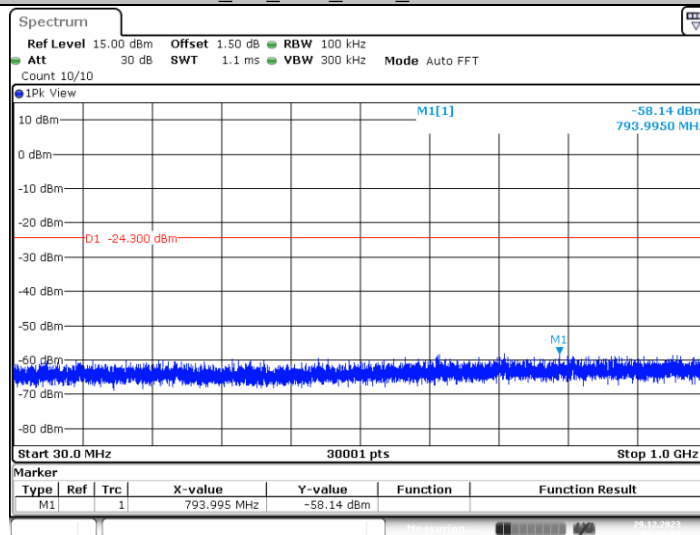

Date: 29.DEC.2023 08:06:03

BLE_2M_Ant1_2440_30~1000

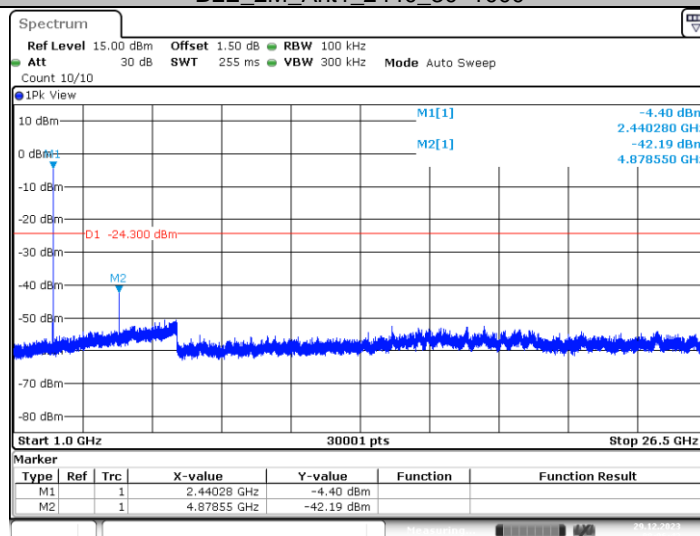

Date: 29.DEC.2023 08:06:43


BLE_2M_Ant1_2440_1000~26500

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>

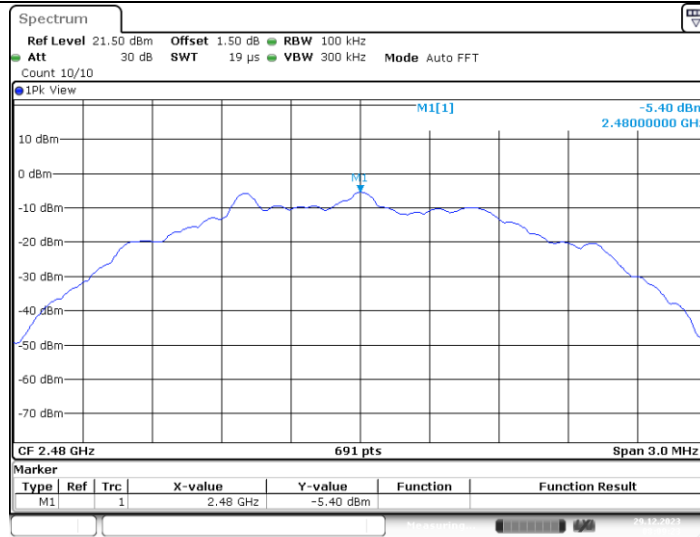


Date: 29.DEC.2023 08:09:23

BLE_2M_Ant1_2480_0~Reference

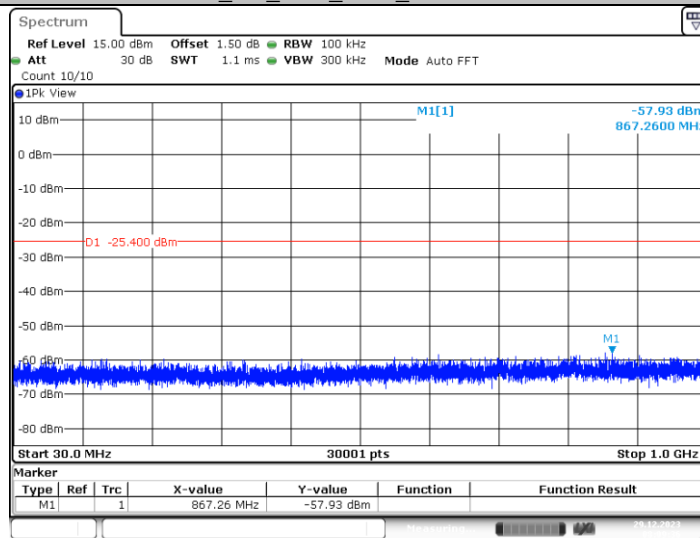

Date: 29.DEC.2023 08:09:36

BLE_2M_Ant1_2480_1000~26500

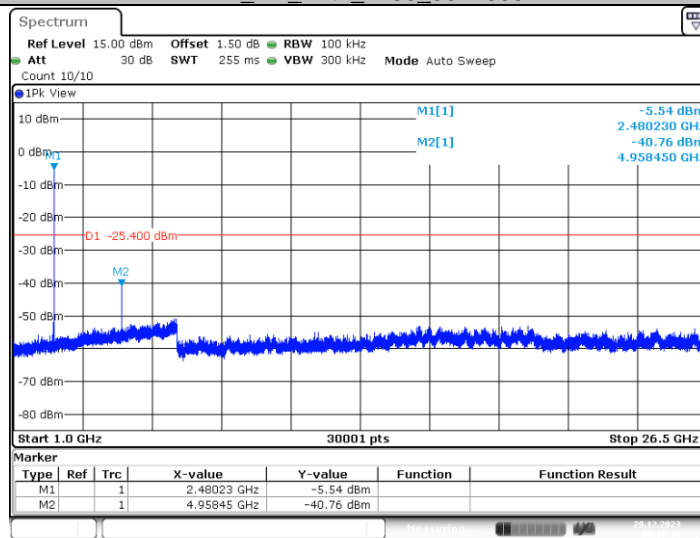

Date: 29.DEC.2023 08:10:16

BLE_2M_Ant1_2480_1000~26500






3.5. DTS Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2)

Test Item	Limit	Frequency Range (MHz)
DTS Bandwidth	≥ 500 kHz (6dB bandwidth)	2400~2483.5

Test Configuration

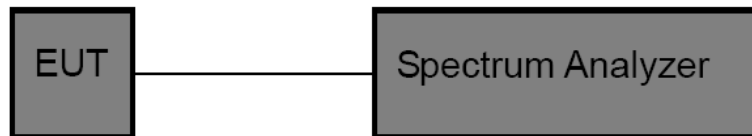

Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- DTS Spectrum Setting:
 - Set RBW = 100 kHz.
 - Set the video bandwidth (VBW) ≥ 3 RBW.
 - Detector = Peak.
 - Trace mode = Max hold.
 - Sweep = Auto couple.
- OCB Spectrum Setting:
 - Set RBW = 1% ~ 5% occupied bandwidth.
 - Set the video bandwidth (VBW) ≥ 3 RBW.
 - Detector = Peak.
 - Trace mode = Max hold.
 - Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode


Please refer to the clause 2.4.

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.007	0.65	0.5	PASS
		2440	1.007	0.65	0.5	PASS
		2480	1.007	0.65	0.5	PASS
BLE_2M	Ant1	2402	1.974	1.13	0.5	PASS
		2440	1.982	1.13	0.5	PASS
		2480	1.974	1.13	0.5	PASS




99% Bandwidth:

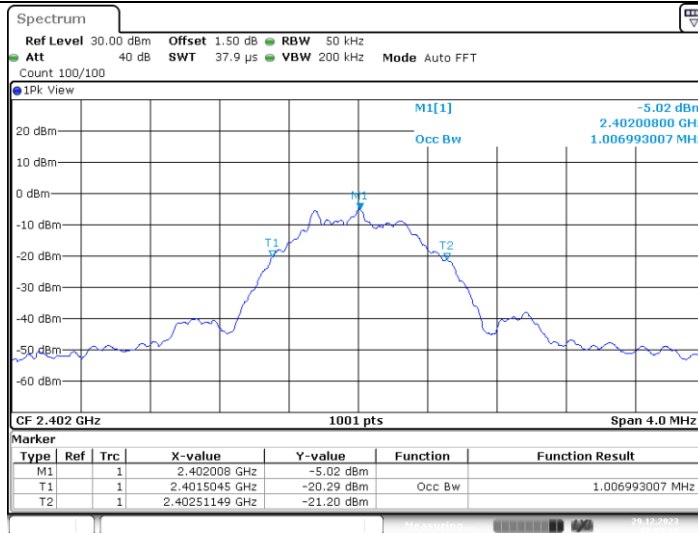


Date: 29.DEC.2023 07:52:21

BLE_1M_Ant1_2402

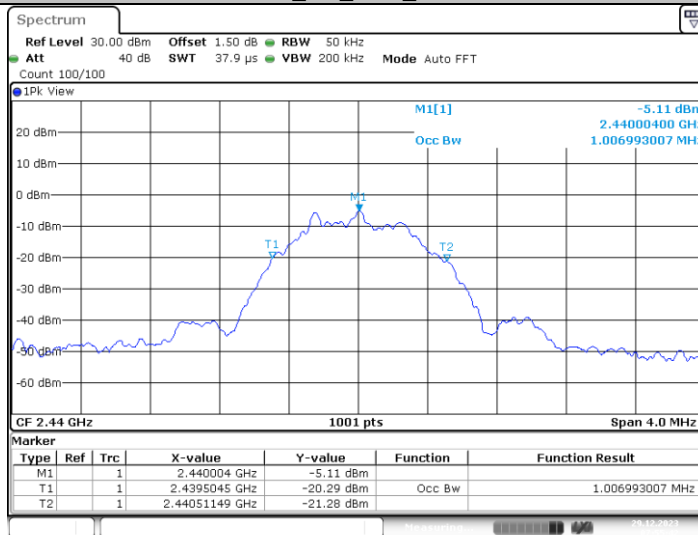

Date: 29.DEC.2023 07:55:42


BLE_1M_Ant1_2440

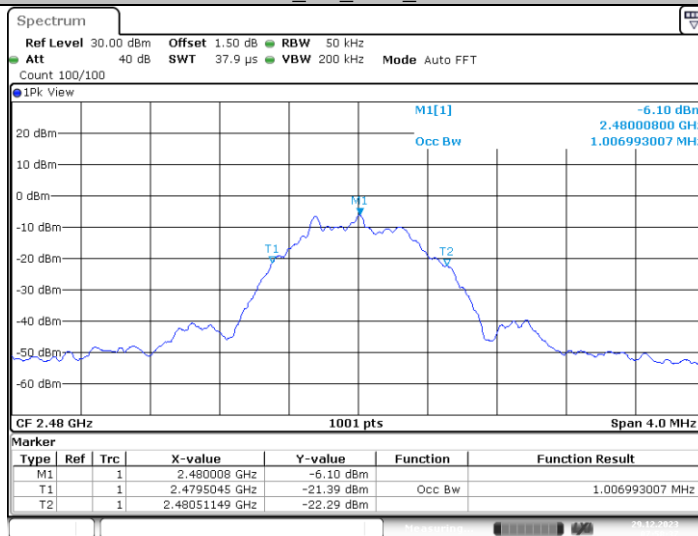


Date: 29.DEC.2023 07:58:37

BLE_1M_Ant1_2480




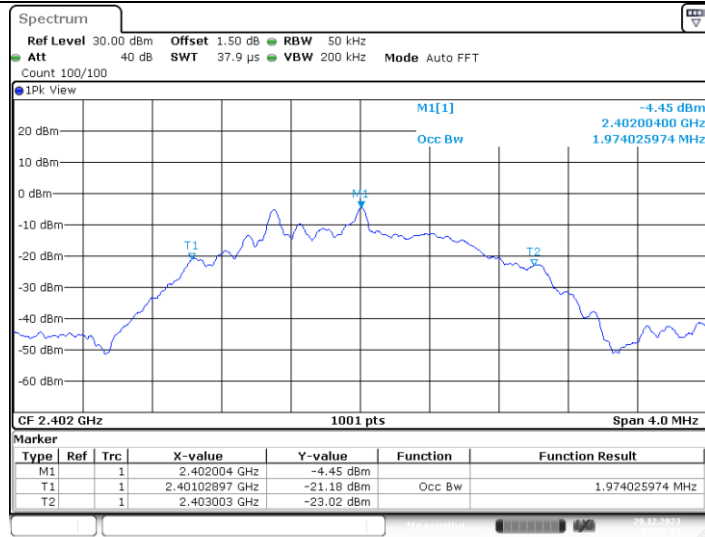

BLE_2M_Ant1_2402

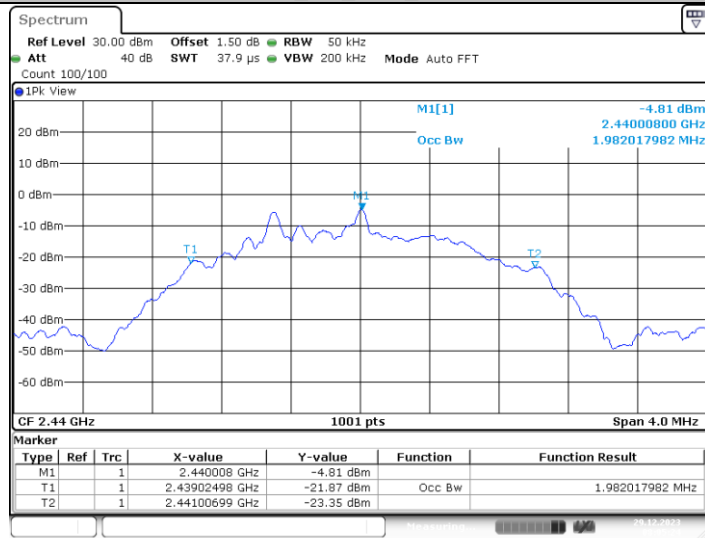


BLE_2M_Ant1_2440

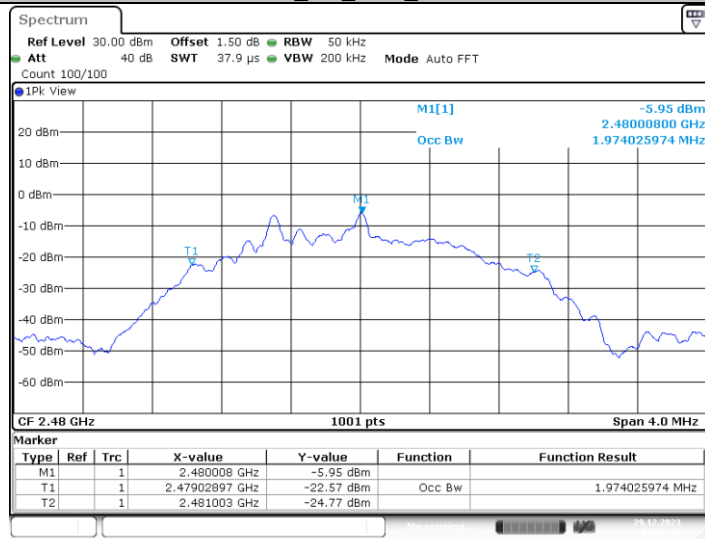


BLE_2M_Ant1_2480




DTS Bandwidth:

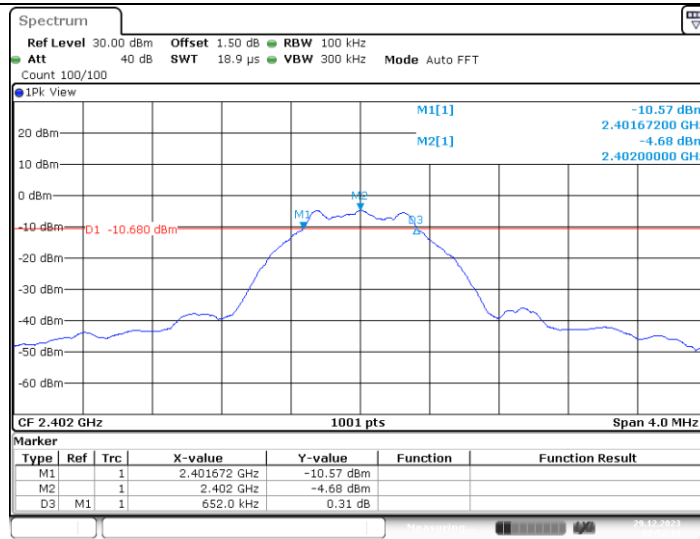

BLE_1M_Ant1_2402

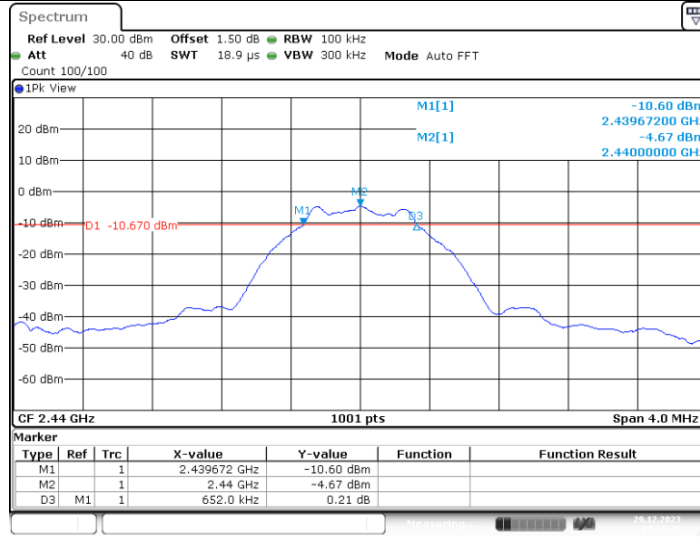


BLE_1M_Ant1_2440

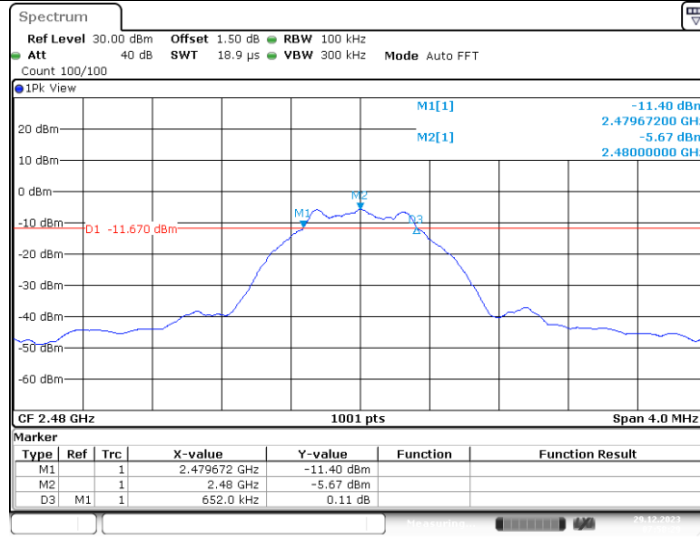


BLE_1M_Ant1_2480



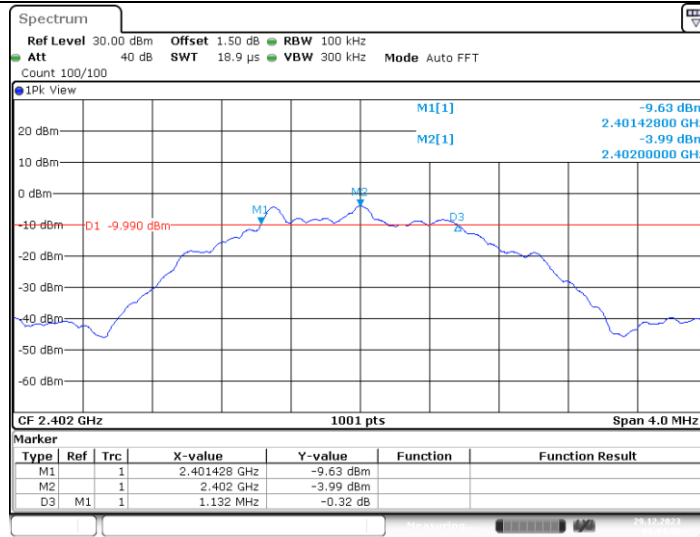


Date: 29.DEC.2023 08:01:55

BLE_2M_Ant1_2402

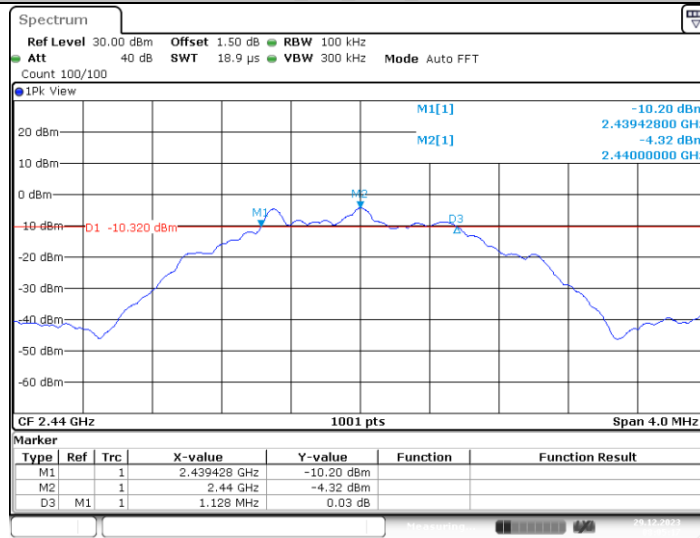

Date: 29.DEC.2023 08:05:17

BLE_2M_Ant1_2440

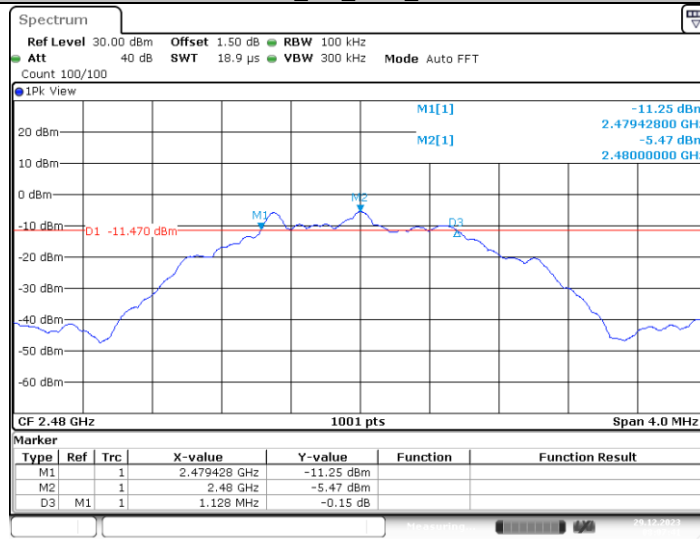

Date: 29.DEC.2023 08:07:41

BLE_2M_Ant1_2480






3.6. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)

Section	Test Item	Limit	Frequency Range (MHz)
FCC CFR 47 Part15.247 (b)(3)	Maximum Conducted Output Power	1 Watt or 30dBm	2400~2483.5

Test Configuration

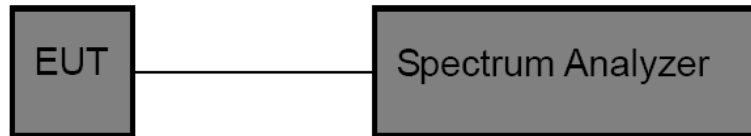

Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting:
 - Set RBW \geq DTS Bandwidth.
 - Set VBW \geq 3*RBW.
 - Set Span \geq 3*RBW.
 - Sweep time = Auto couple.
 - Detector = Peak.
 - Trace mode = Max hold.
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.4.

Test Result

Test Mode	Frequency (MHz)	Conducted Output Power (dBm)	FCC Limit (dBm)	Verdict
BLE_1M	2402	-4.09	≤ 30	Pass
	2440	-4.26	≤ 30	Pass
	2480	-5.30	≤ 30	Pass
BLE_2M	2402	-3.72	≤ 30	Pass
	2440	-3.99	≤ 30	Pass
	2480	-5.24	≤ 30	Pass




Test plot as follows:

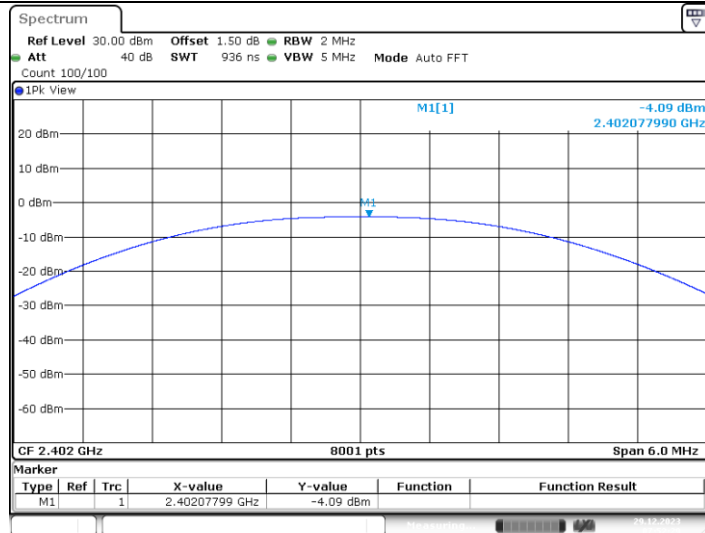


Date: 29.DEC.2023 07:52:29

BLE_1M_Ant1_2402

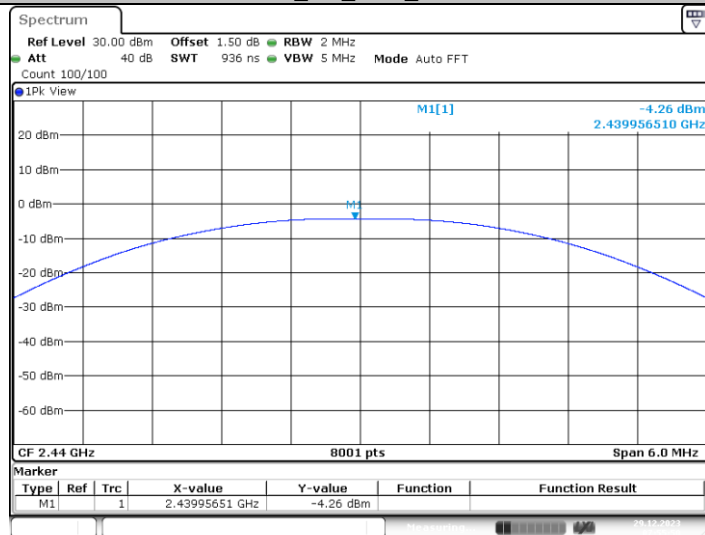

Date: 29.DEC.2023 07:55:50


BLE_1M_Ant1_2440

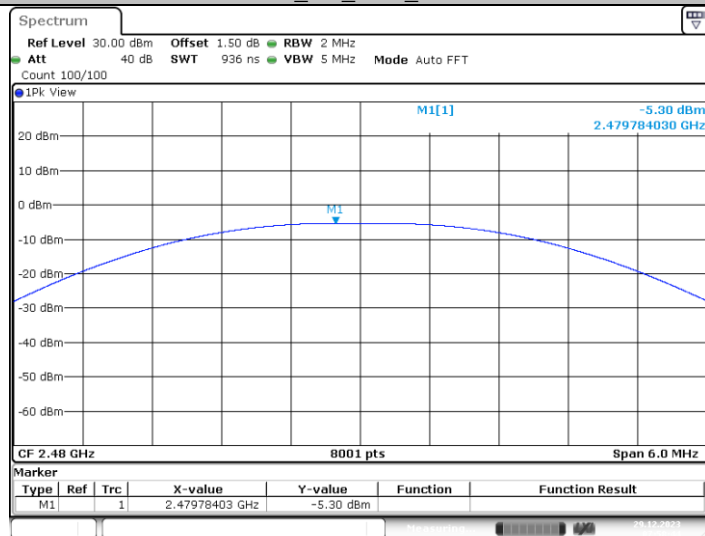


Date: 29.DEC.2023 07:58:45

BLE_1M_Ant1_2480




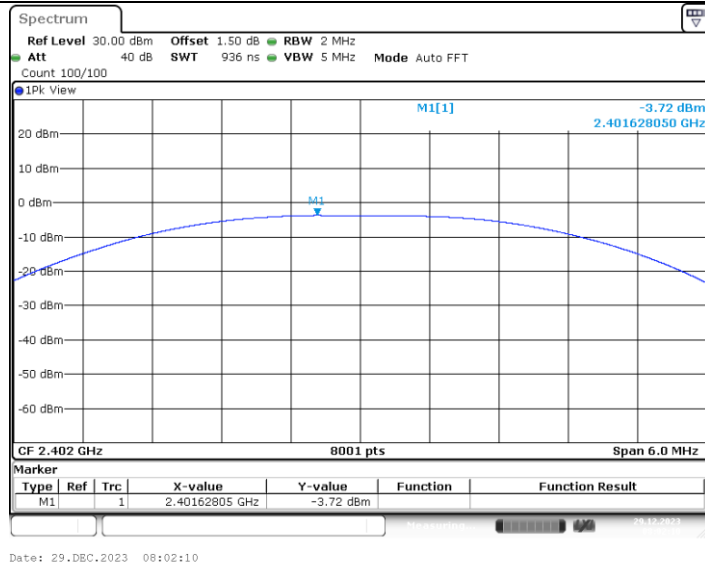

BLE_2M_Ant1_2402

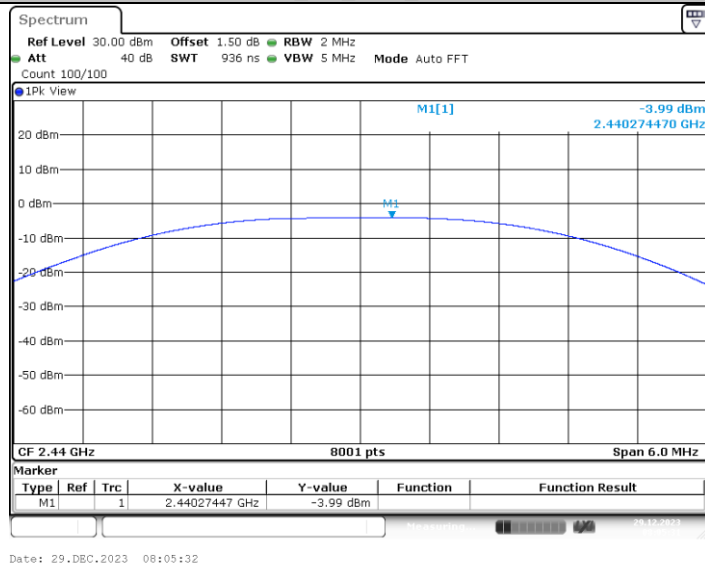

BLE_2M_Ant1_2440

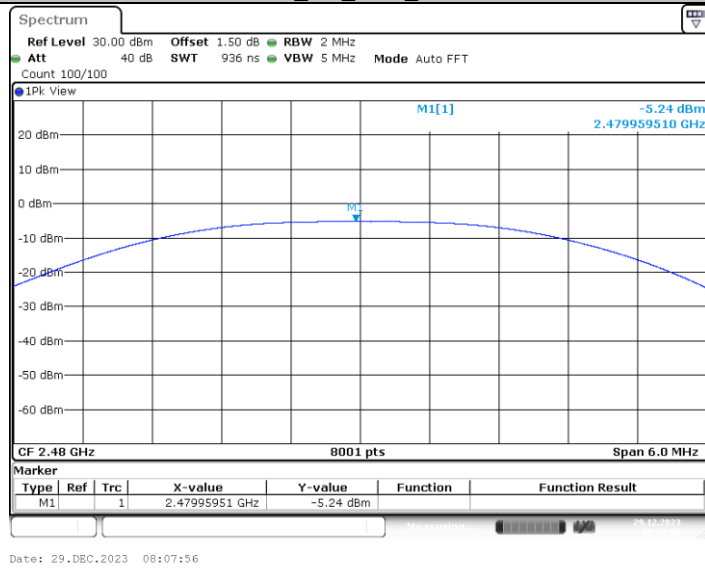

BLE_2M_Ant1_2480




3.7. Power Spectral Density

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e)

Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	8 dBm (in any 3 kHz)	2400~2483.5

Test Configuration

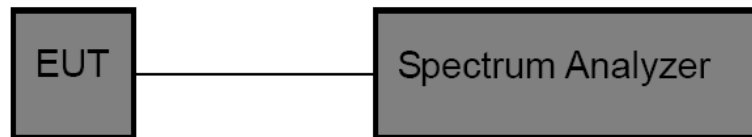

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to DTS channel center frequency.
Set the span to 1.5 times the DTS bandwidth.
Set the RBW to: 3 kHz.
Set the VBW to: 10 kHz.
Detector: peak.
Sweep time: auto.
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.4.

Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-19.96	≤8.00	PASS
		2440	-20.17	≤8.00	PASS
		2480	-21.06	≤8.00	PASS
BLE_2M	Ant1	2402	-20.46	≤8.00	PASS
		2440	-20.87	≤8.00	PASS
		2480	-21.89	≤8.00	PASS




Test plot as follows:

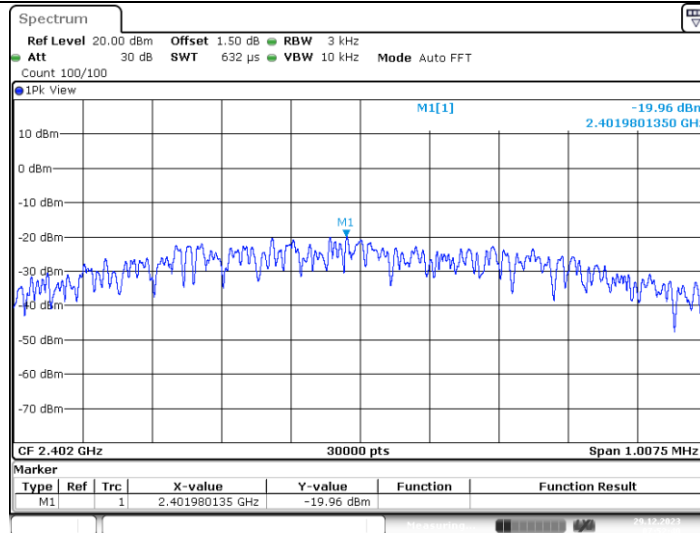


Date: 29.DEC.2023 07:52:39

BLE_1M_Ant1_2402

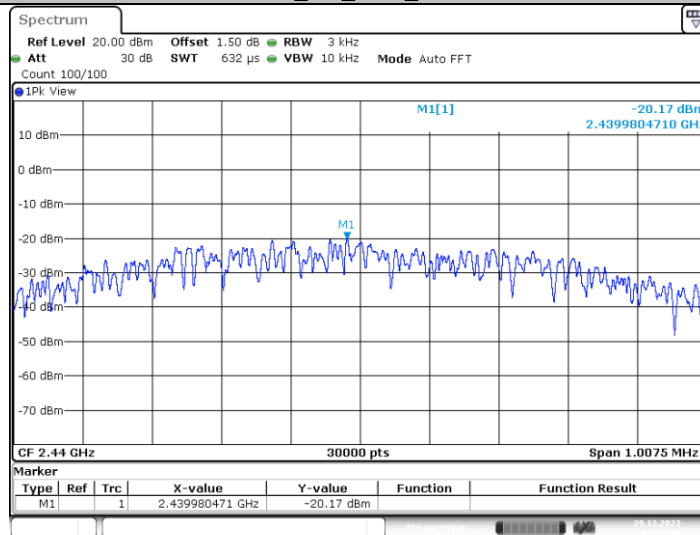

Date: 29.DEC.2023 07:56:00


BLE_1M_Ant1_2440

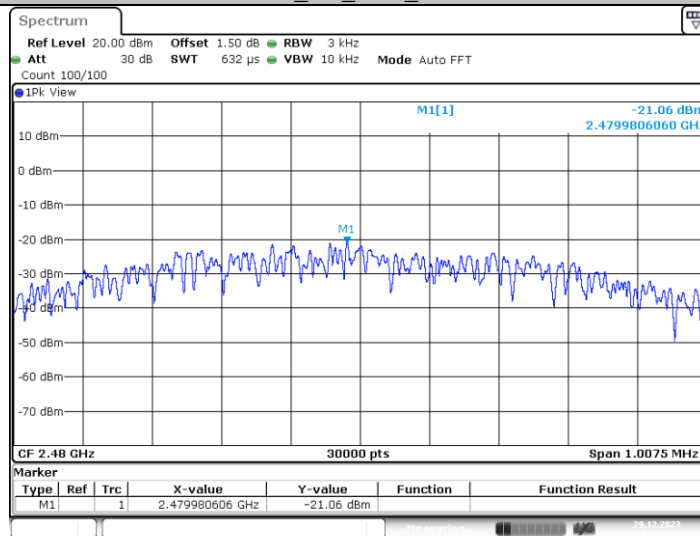


Date: 29.DEC.2023 07:58:54

BLE_1M_Ant1_2480




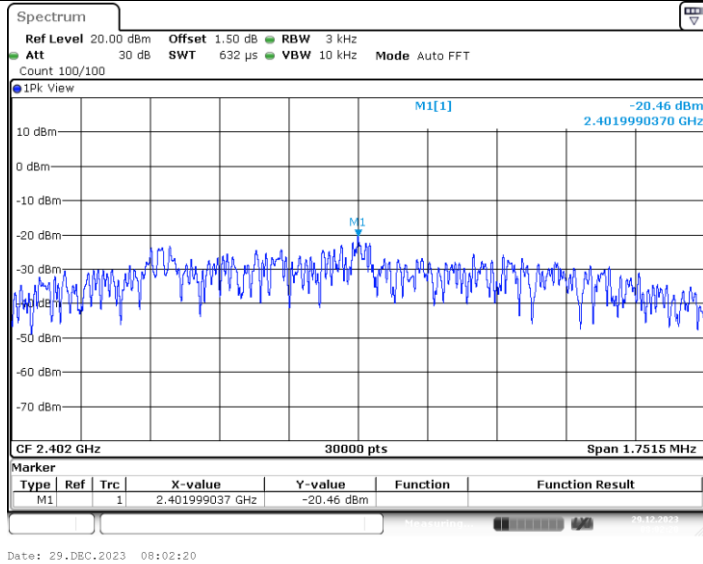

BLE_2M_Ant1_2402

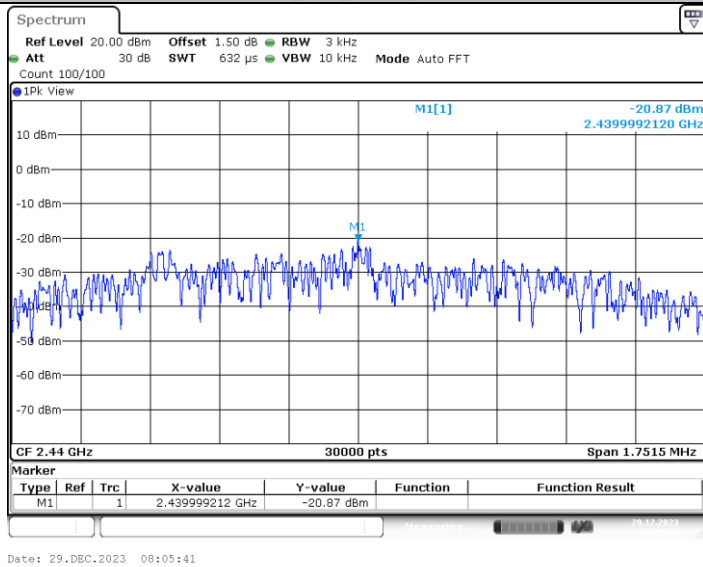

BLE_2M_Ant1_2440

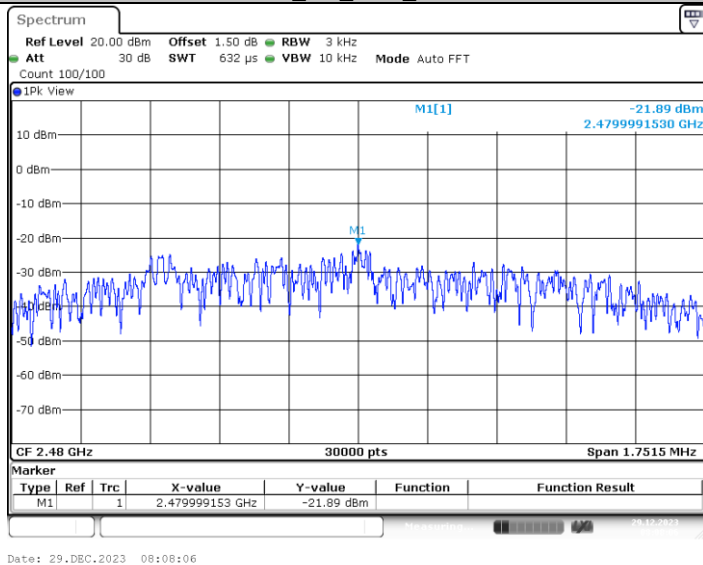

BLE_2M_Ant1_2480




3.8. Duty Cycle

Limit

None, for report purposes only.

Test Configuration

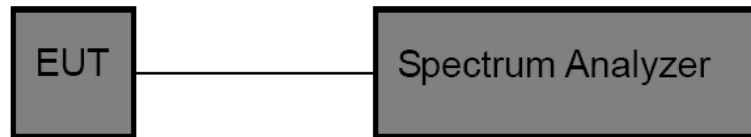

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to test channel center frequency.
Set the span to 0Hz.
Set the RBW to 10MHz.
Set the VBW to 10MHz.
Detector: Peak.
Sweep time: Auto.
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.4.

Test Result

Test Mode	Frequency (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)	1/T Minimum VBW (kHz)	Final Setting for VBW (kHz)
BLE_1M	2402	0.41	0.62	66.13	2.44	3
	2440	0.41	0.62	66.13	2.44	3
	2480	0.42	0.63	66.67	2.38	3
BLE_2M	2402	0.23	0.62	37.10	4.35	5
	2440	0.23	0.62	37.10	4.35	5
	2480	0.23	0.62	37.10	4.35	5




Test plot as follows:

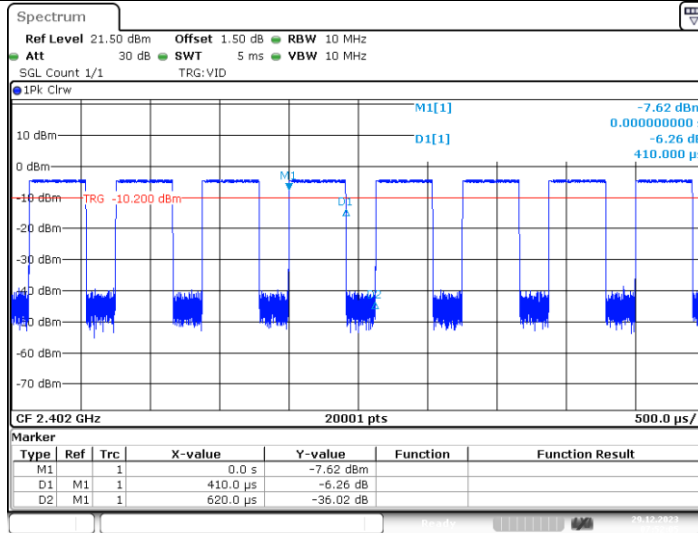


Date: 29.DEC.2023 07:52:04

BLE_1M_Ant1_2402

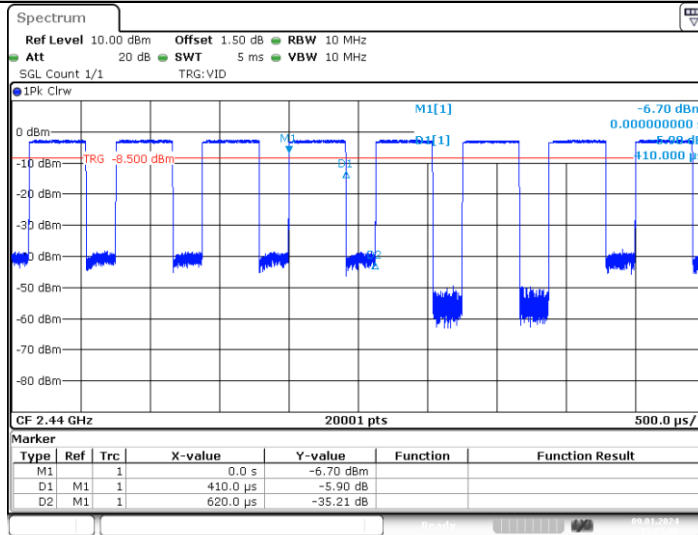

Date: 9.JAN.2024 15:21:08


BLE_1M_Ant1_2440

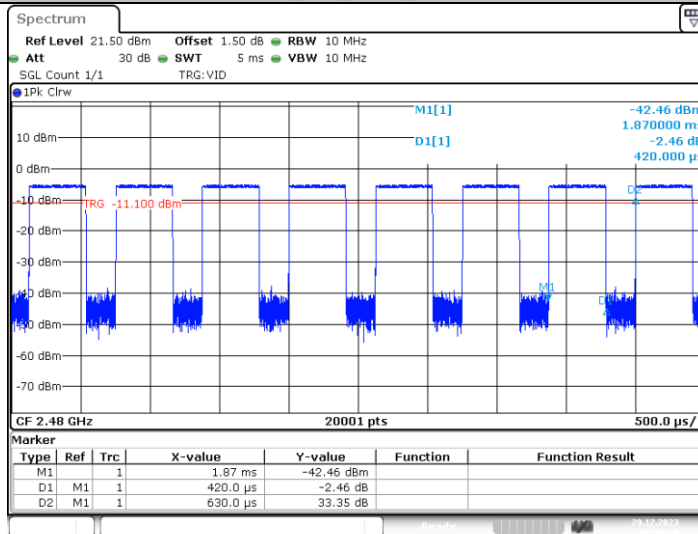

Date: 29.DEC.2023 07:58:21


BLE_1M_Ant1_2480



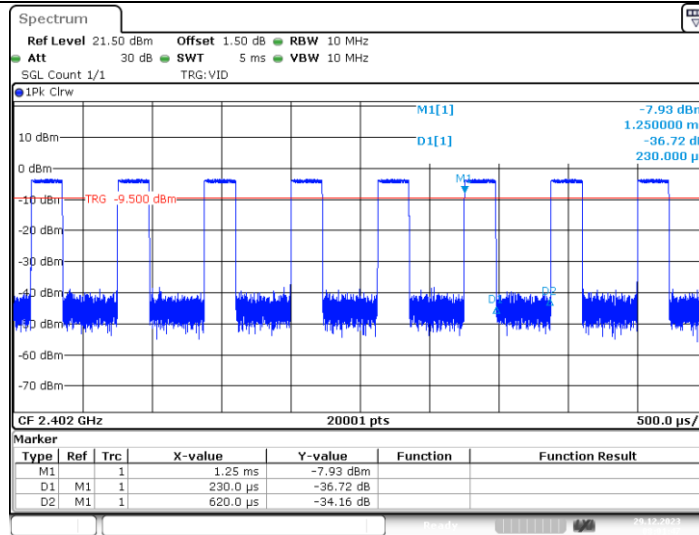


Date: 29.DEC.2023 08:01:46

BLE_2M_Ant1_2402

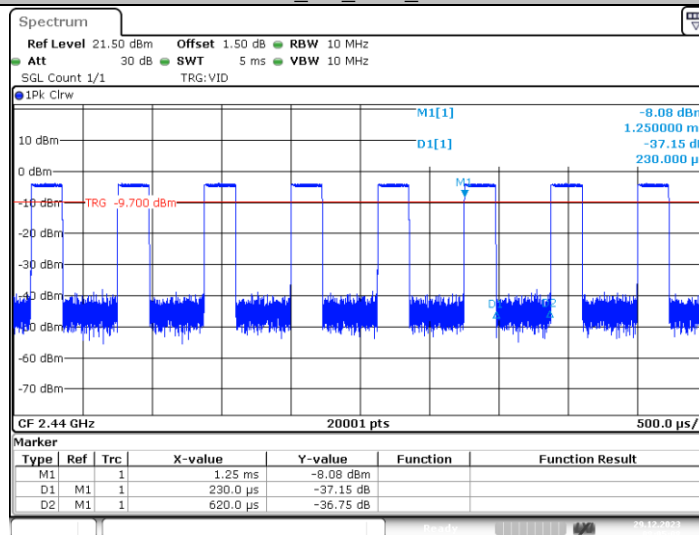

Date: 29.DEC.2023 08:05:08

BLE_2M_Ant1_2440

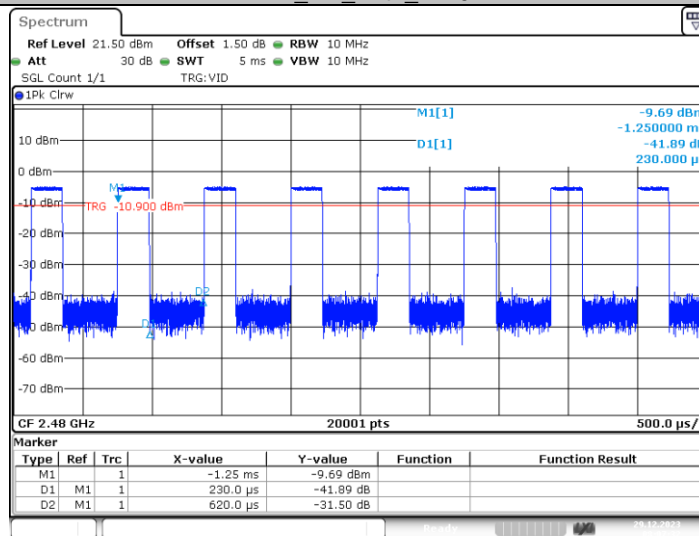

Date: 29.DEC.2023 08:07:32

BLE_2M_Ant1_2480





3.9. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END*****