







$\pi/4$ -DQPSK High Channel

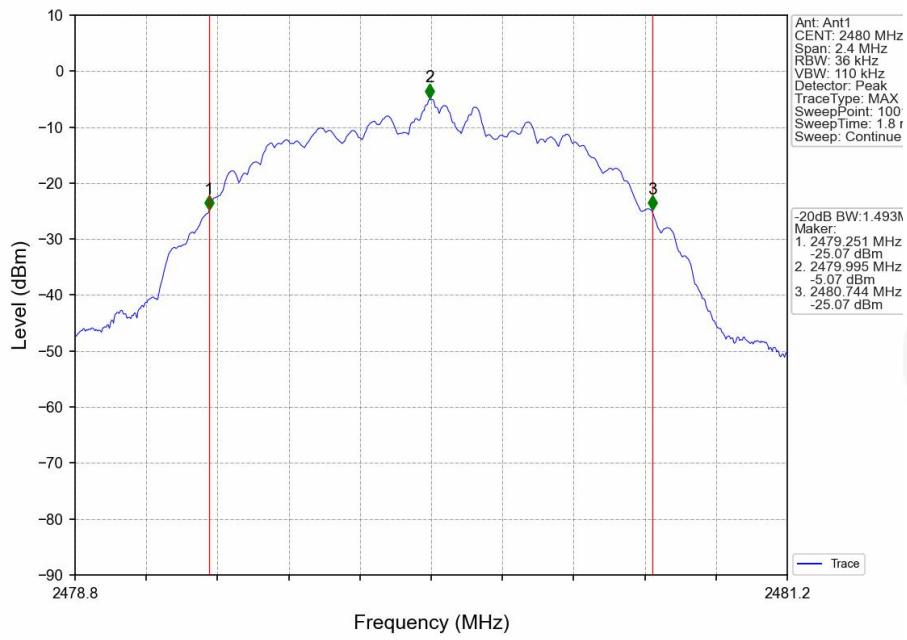


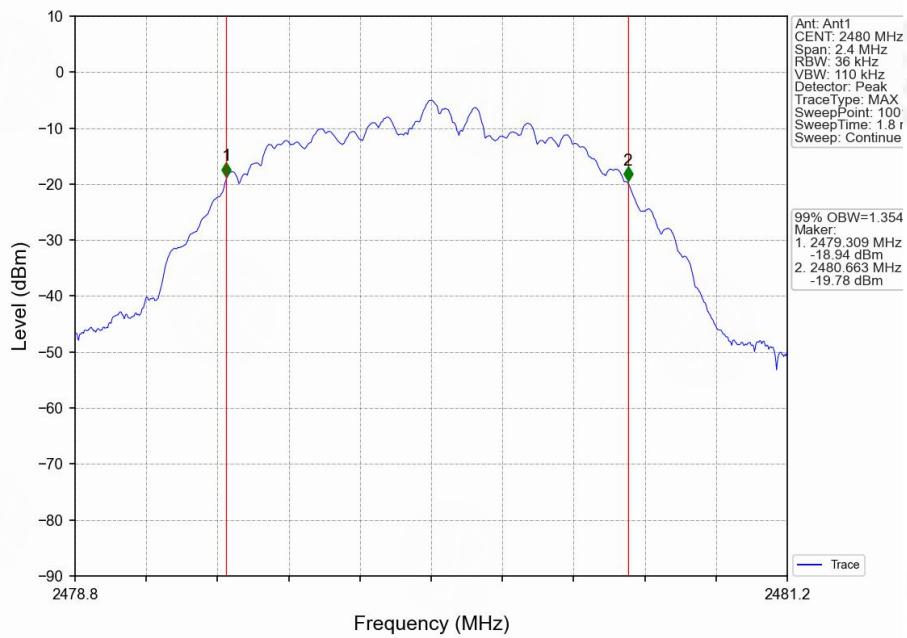


### 8-DPSK Low Channel

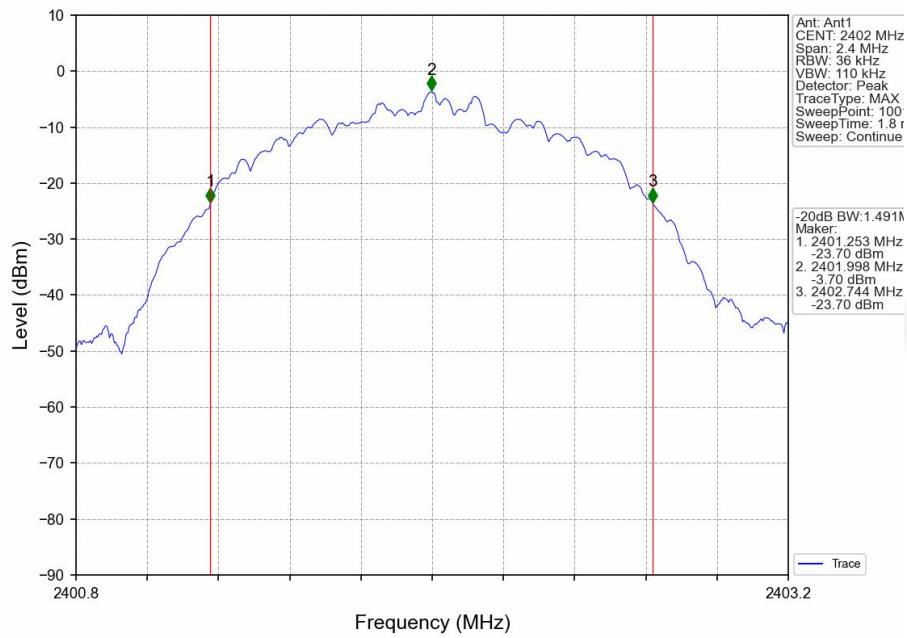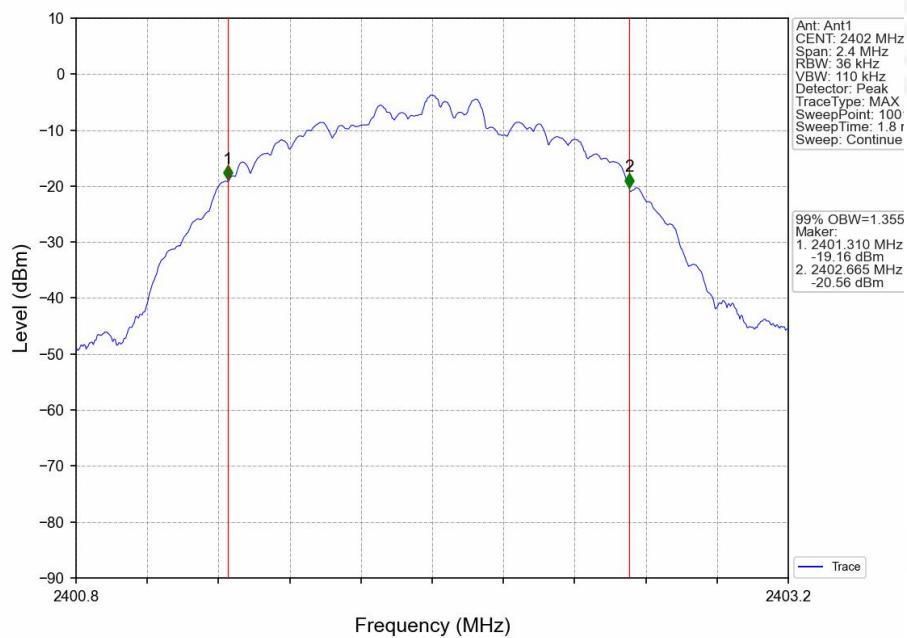





### 8-DPSK Middle Channel

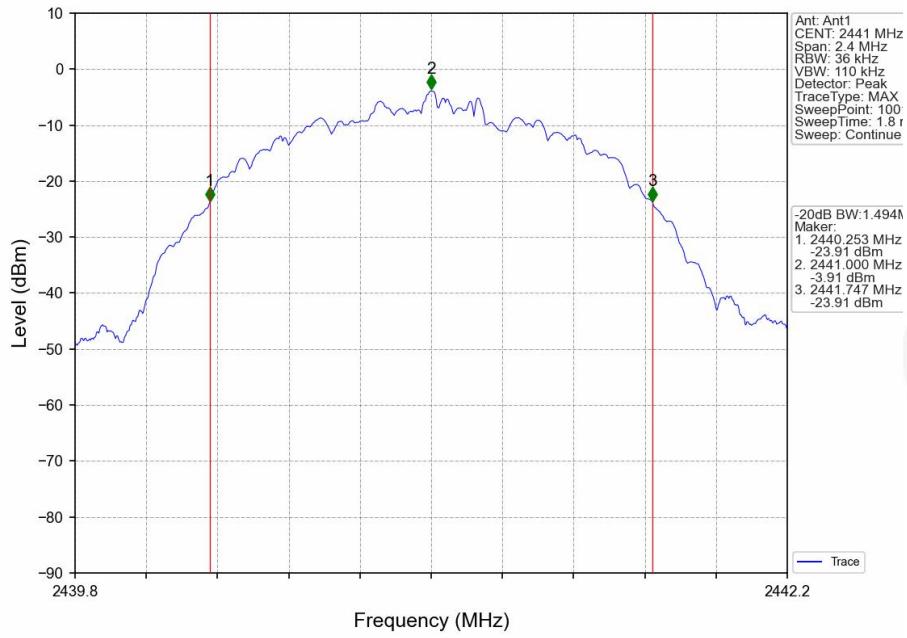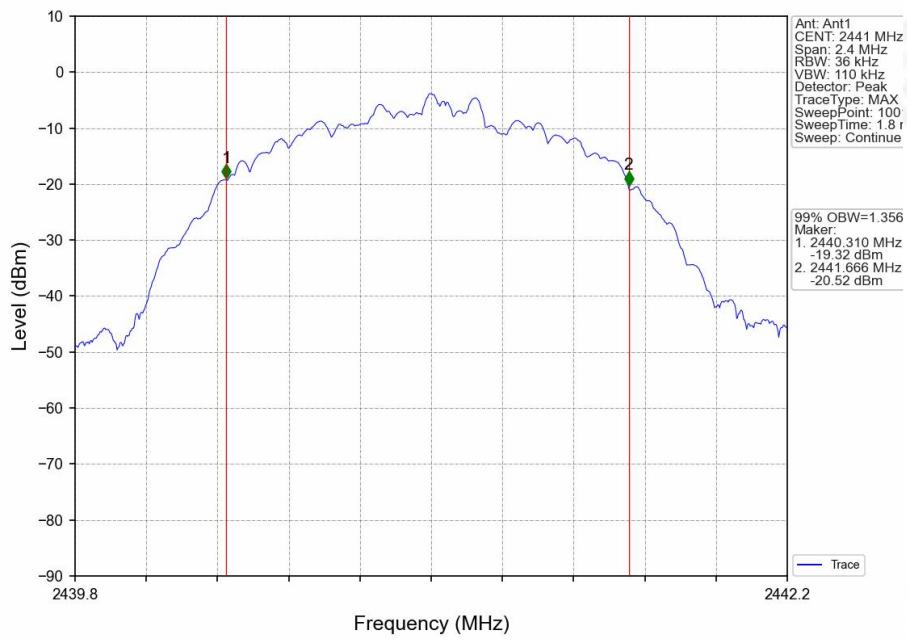



### 8-DPSK High Channel

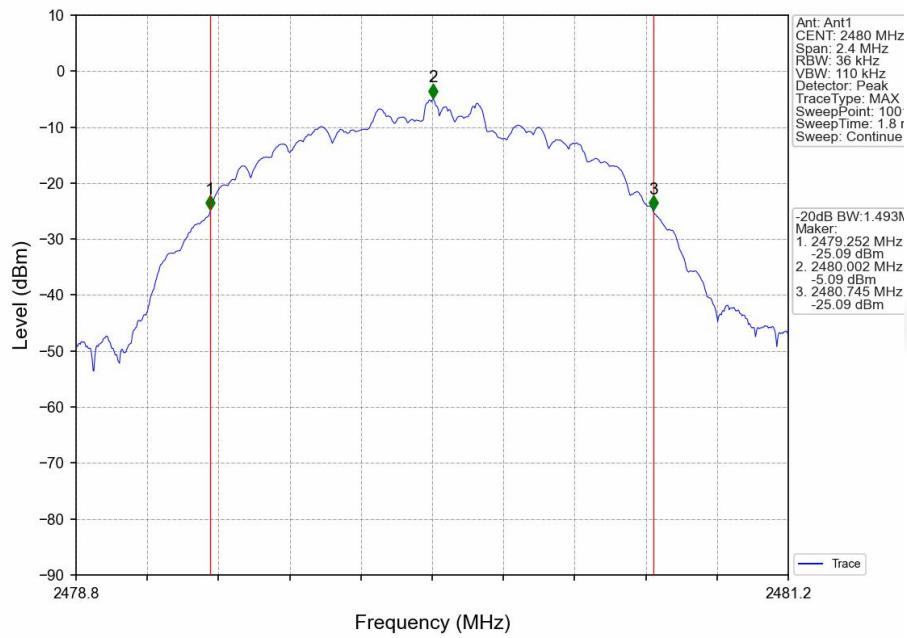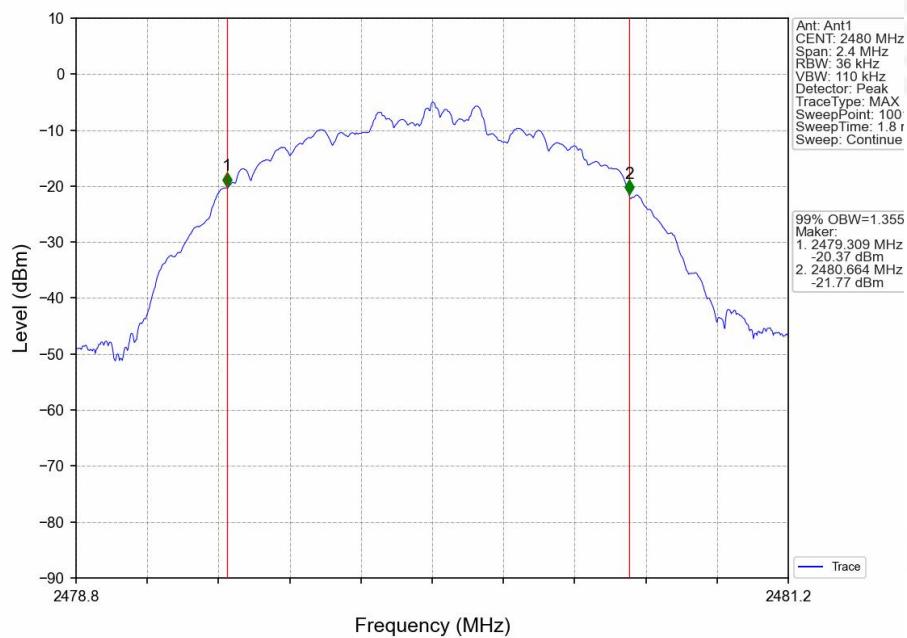



## 8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	GFSK:30 dBm $\pi/4$ -DQPSK & 8-DPSK:20.97 dBm

### 8.1 Block Diagram Of Test Setup



### 8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  OBW. VBW = OBW. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 8.4 DEVIATION FROM STANDARD

No deviation.

### 8.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	3.76	30.00	Pass
	Middle	3.52		
	Highest	2.50		
$\pi/4$ -DQPSK	Lowest	-0.30	21.00	Pass
	Middle	-0.49		
	Highest	-1.60		
8-DPSK	Lowest	-0.12	21.00	Pass
	Middle	-0.30		
	Highest	-1.42		


Shenzhen ZKT Technology Co., Ltd.

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China




Test plots

GFSK Low Channel

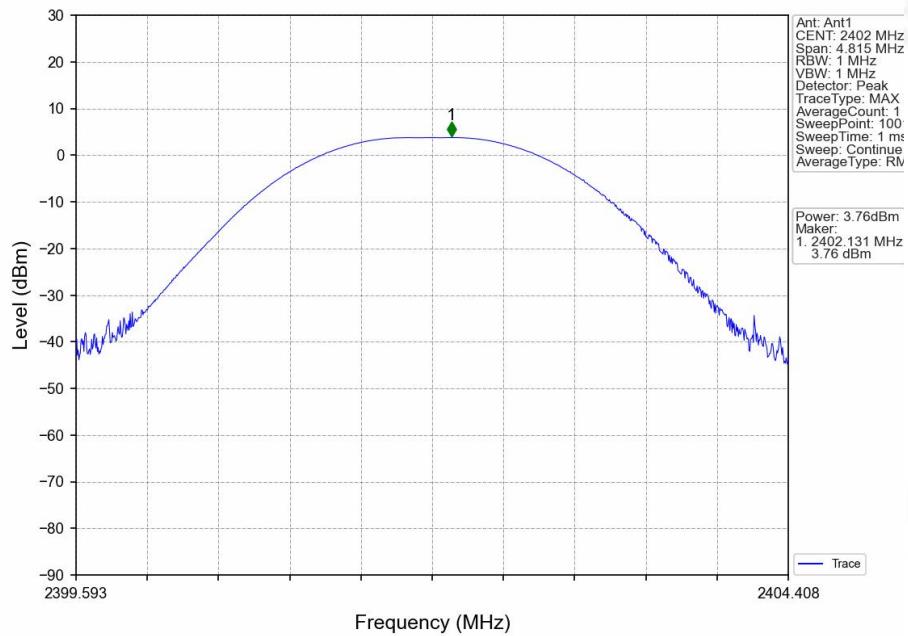


GFSK Middle Channel

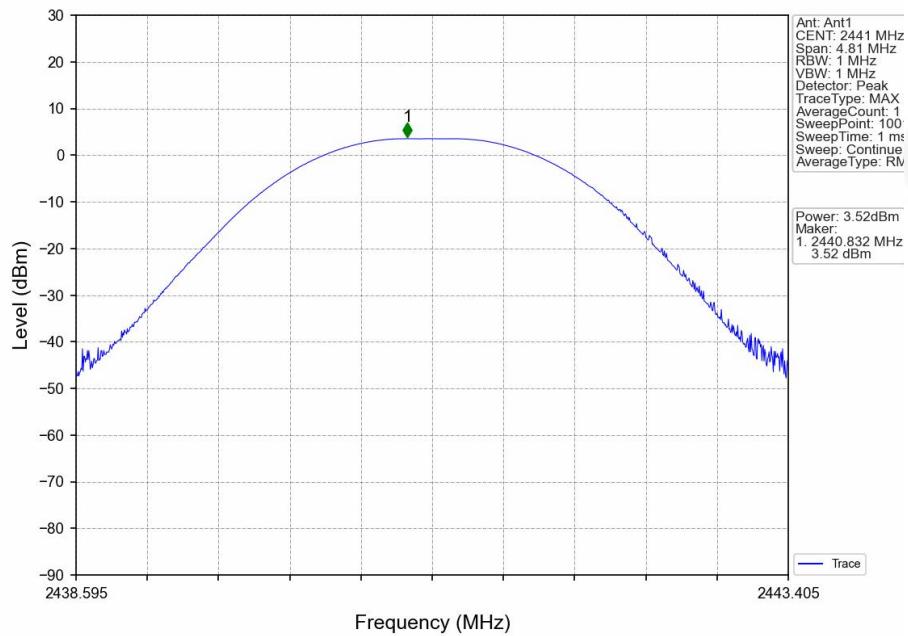




GFSK High Channel

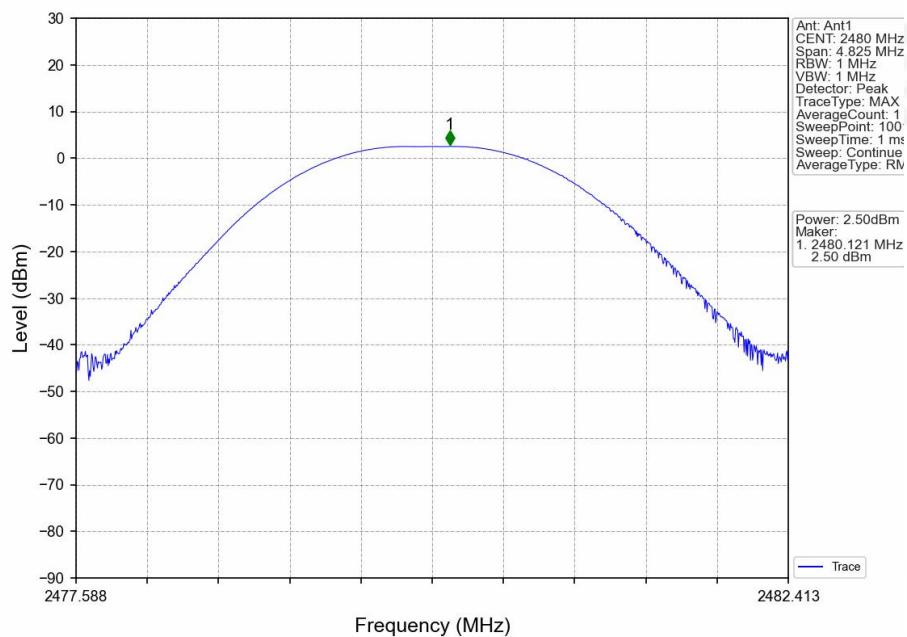




$\pi/4$ -DQPSK Low Channel

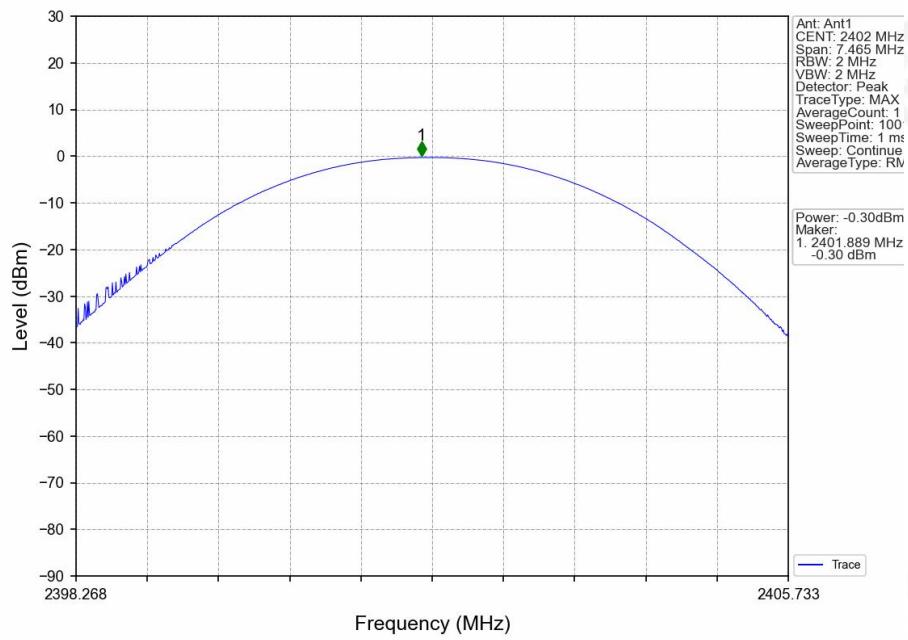


$\pi/4$ -DQPSK Middle Channel

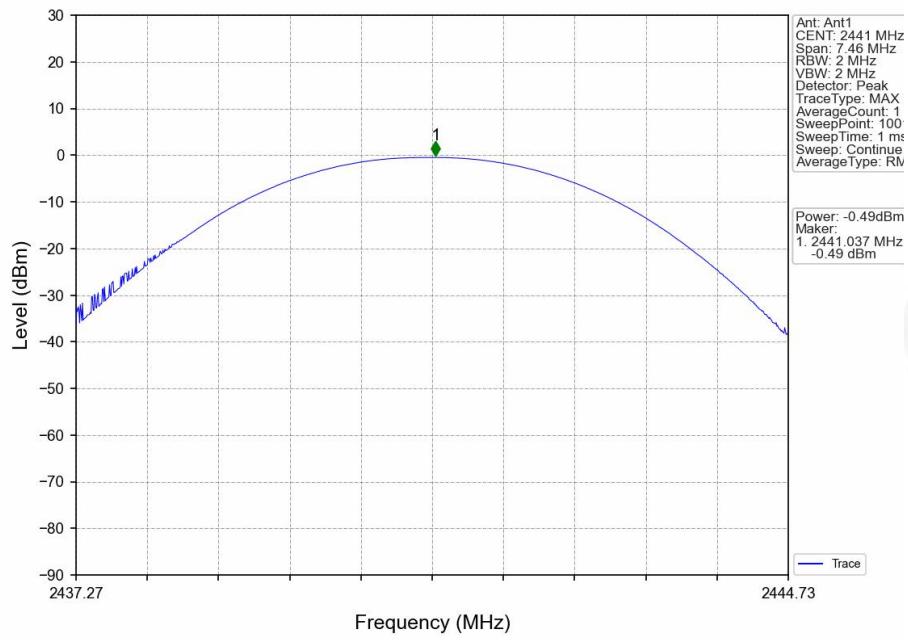




$\pi/4$ -DQPSK High Channel

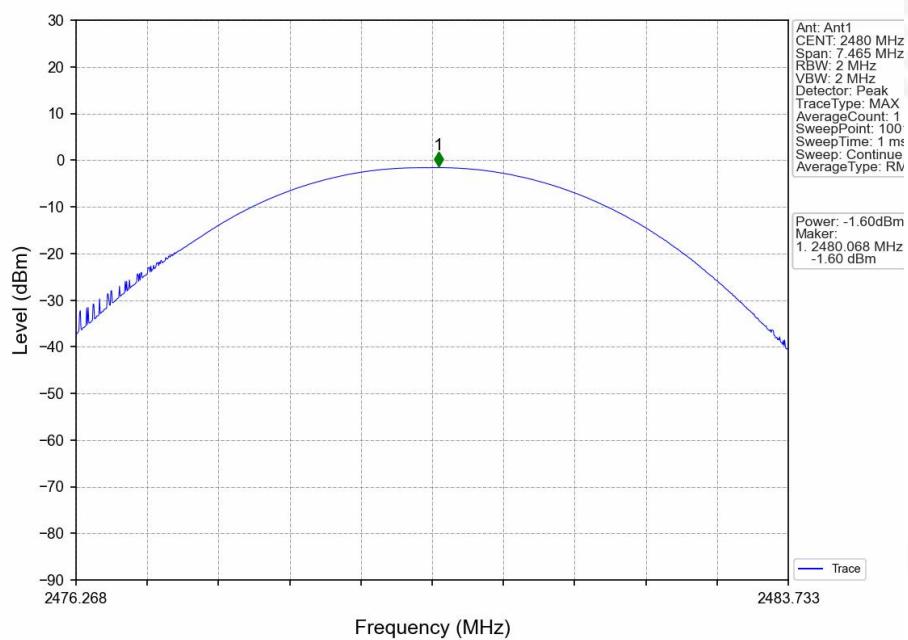




### 8-DPSK Low Channel

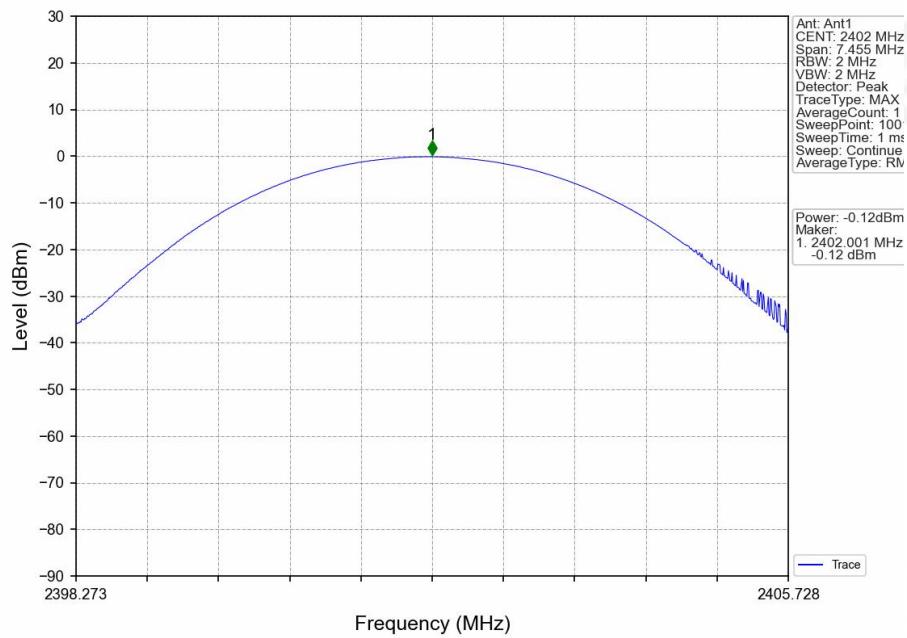


### 8-DPSK Middle Channel

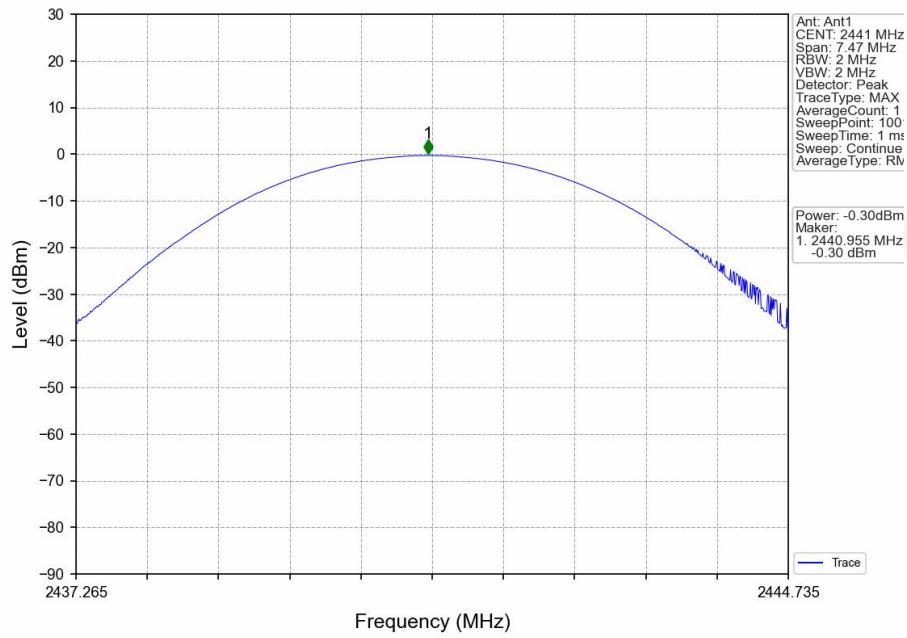



### 8-DPSK High Channel

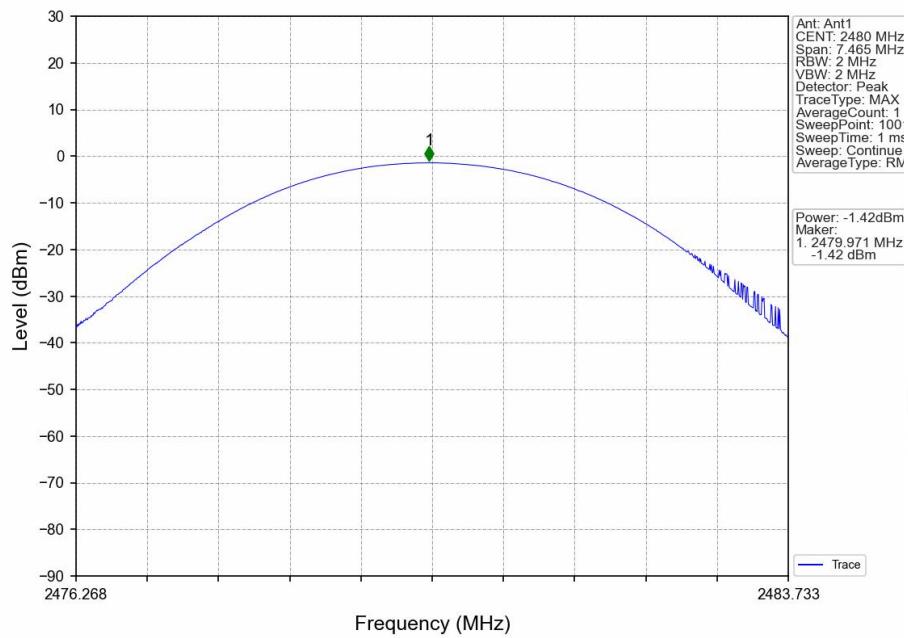



## 9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=330KHz, VBW=300KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

### 9.1 Test Setup



### 9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 9.3 DEVIATION FROM STANDARD

No deviation.




#### 9.4 Test Result


Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	>=0.965	PASS
$\pi/4$ -DQPSK	Low	0.996	>=0.995	PASS
8-DPSK	Low	1.003	>=0.996	PASS



### GFSK DH5

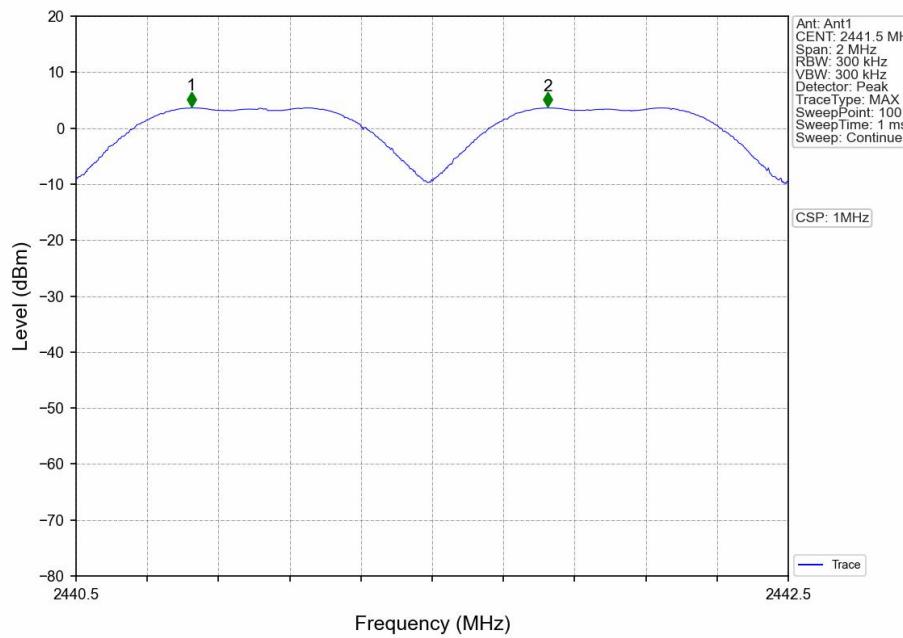


### GFSK 2DH5

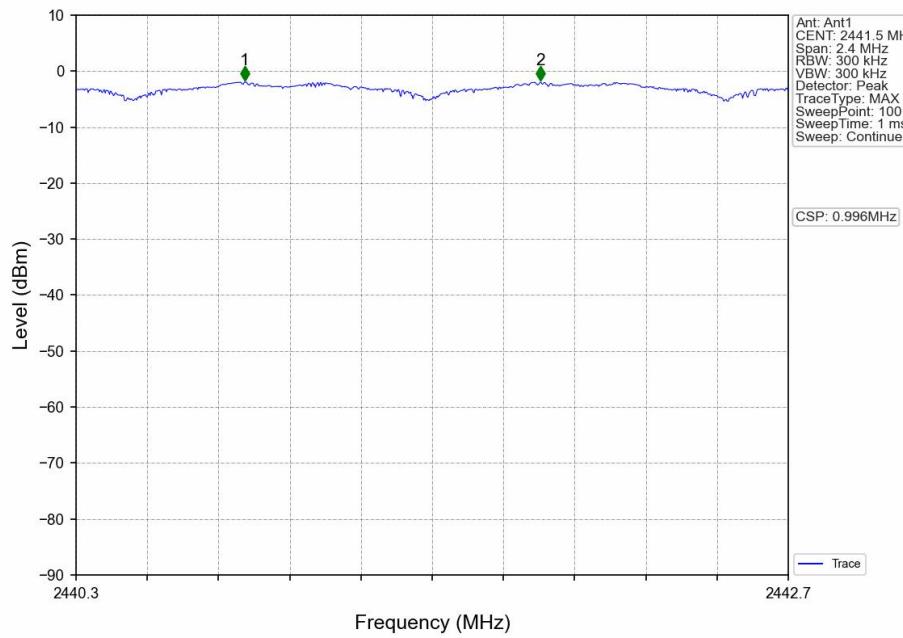



### 8DPSK 3DH5

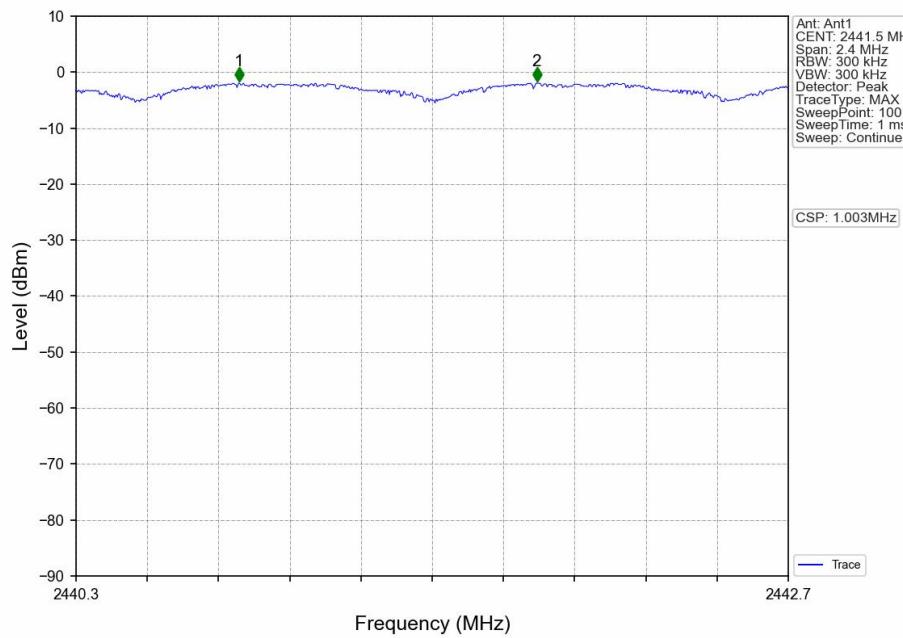



## 10. NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=300kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

### 10.1 Test Setup



### 10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


### 10.3 DEVIATION FROM STANDARD

No deviation.




## 10.4 Test Result

Test Plots:  
79 Channels in total  
GFSK

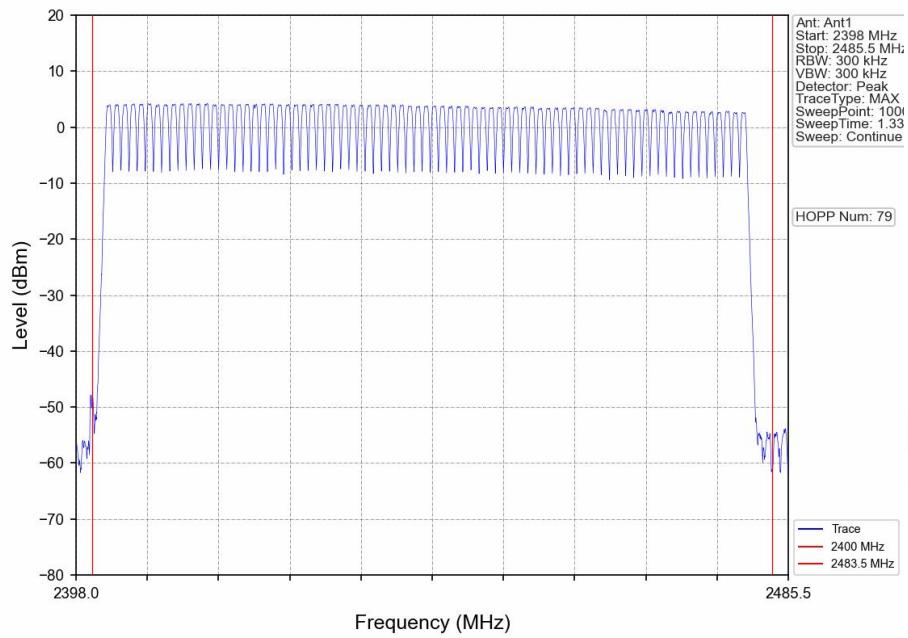




### $\pi/4$ -DQPSK

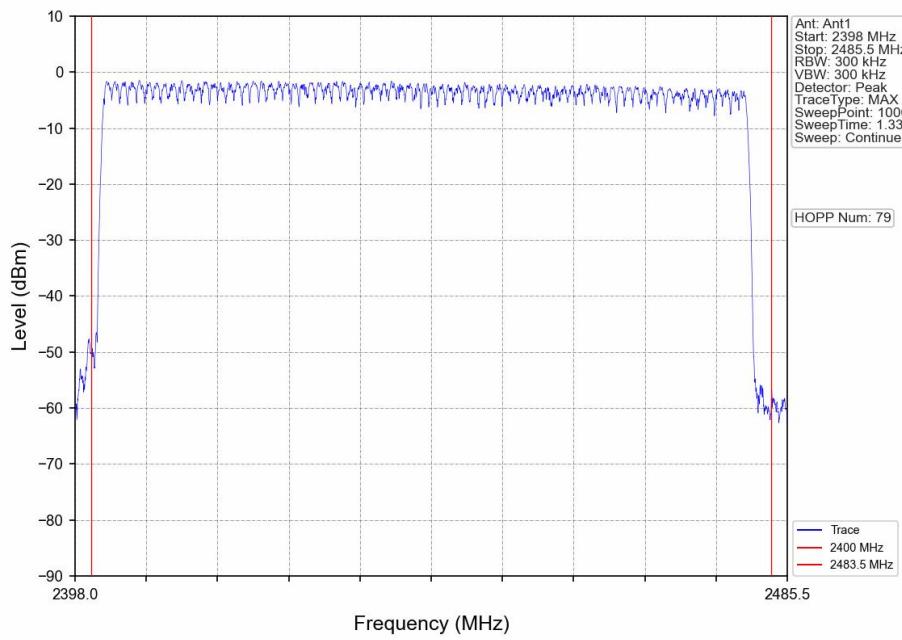

### 8-DPSK

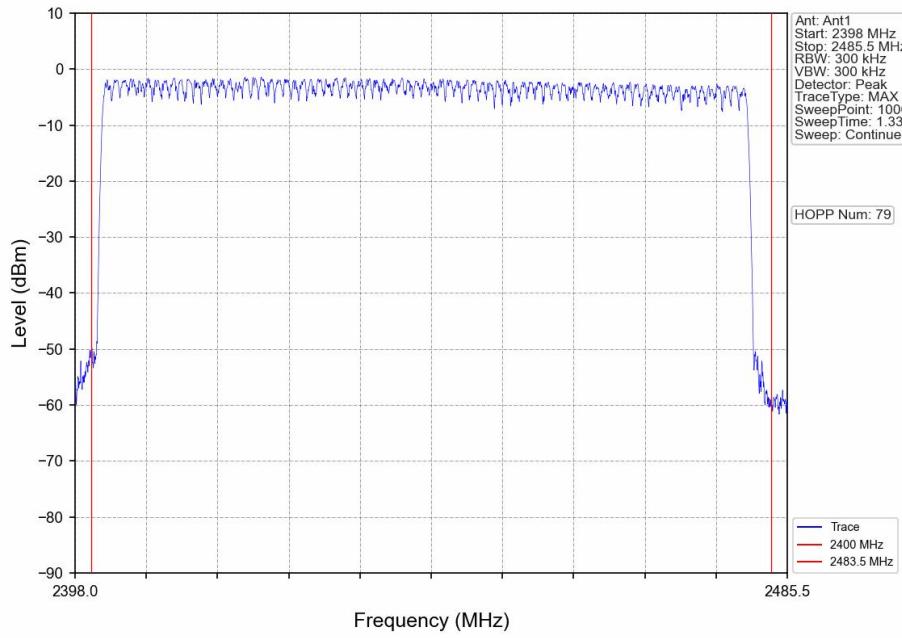



## 11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

### 11.1 Test Setup



### 11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 11.3 DEVIATION FROM STANDARD

No deviation.



#### 11.4 Test Result

##### GFSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1	122.24	400	Pass
2441MHz	DH3	262.40	400	Pass
2441MHz	DH5	307.84	400	Pass

##### Remarks:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot=0.382(ms)\*(1600/ (2\*79))\*31.6=122.24ms

CH:2441MHz time slot=1.64(ms)\*(1600/ (4\*79))\*31.6=262.40ms

CH:2441MHz time slot=2.886(ms)\*(1600/ (6\*79))\*31.6=307.84ms

##### $\pi/4$ -DQPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	2DH1	125.44	400	Pass
2441MHz	2DH3	263.04	400	Pass
2441MHz	2DH5	308.69	400	Pass

##### Remarks:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot=0.392(ms)\*(1600/ (2\*79))\*31.6=125.44ms

CH:2441MHz time slot=1.644(ms)\*(1600/ (4\*79))\*31.6=263.04ms

CH:2441MHz time slot=2.894(ms)\*(1600/ (6\*79))\*31.6=308.69ms

##### 8-DPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	3DH1	125.44	400	Pass
2441MHz	3DH3	263.04	400	Pass
2441MHz	3DH5	308.69	400	Pass

##### Remarks:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot=0.392(ms)\*(1600/ (2\*79))\*31.6=125.44ms


CH:2441MHz time slot=1.644(ms)\*(1600/ (4\*79))\*31.6=263.04ms

CH:2441MHz time slot=2.841(ms)\*(1600/ (6\*79))\*31.6=308.69ms




### Test Plots

#### GFSK DH1 2441MHz

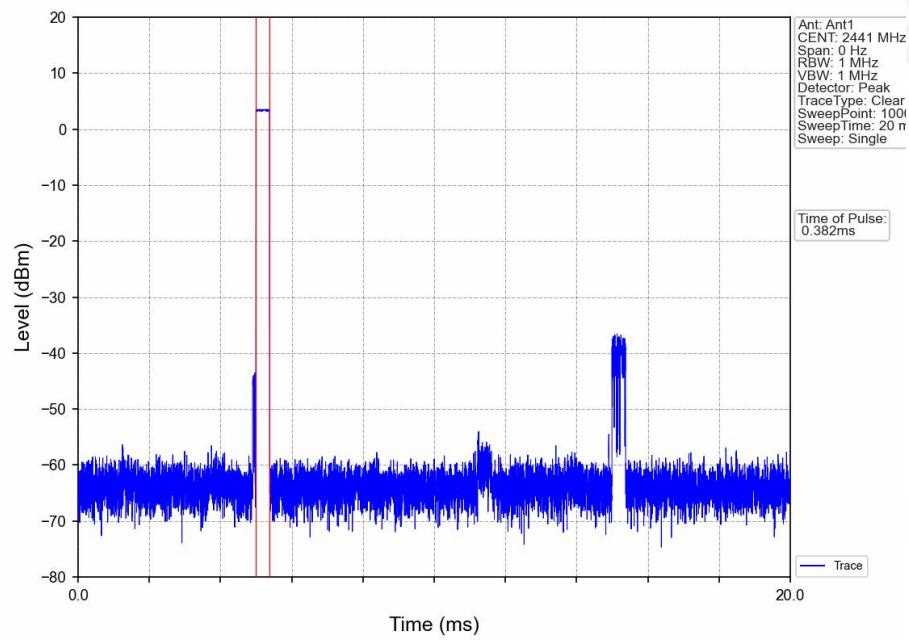


#### GFSK DH3 2441MHz

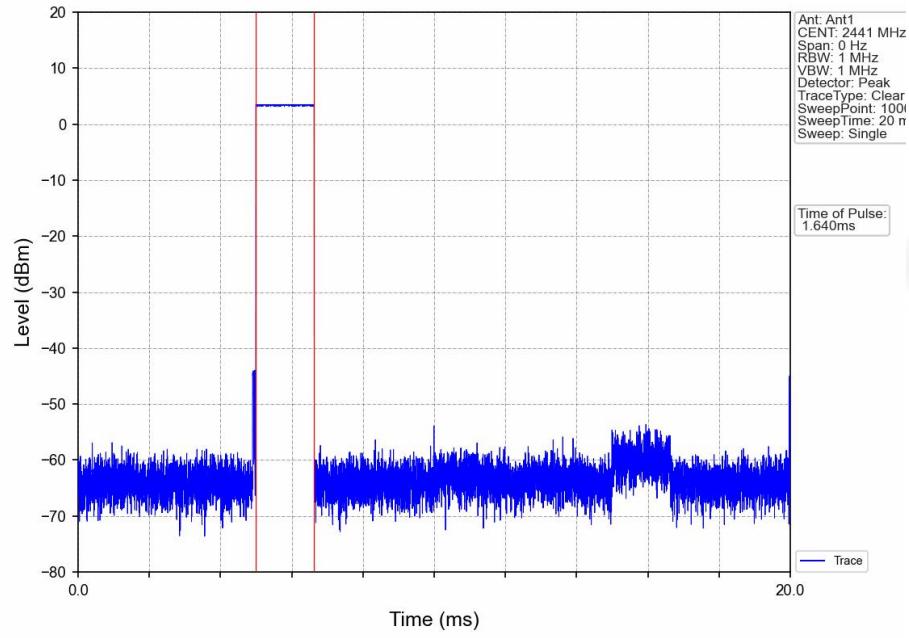




GFSK DH5 2441MHz

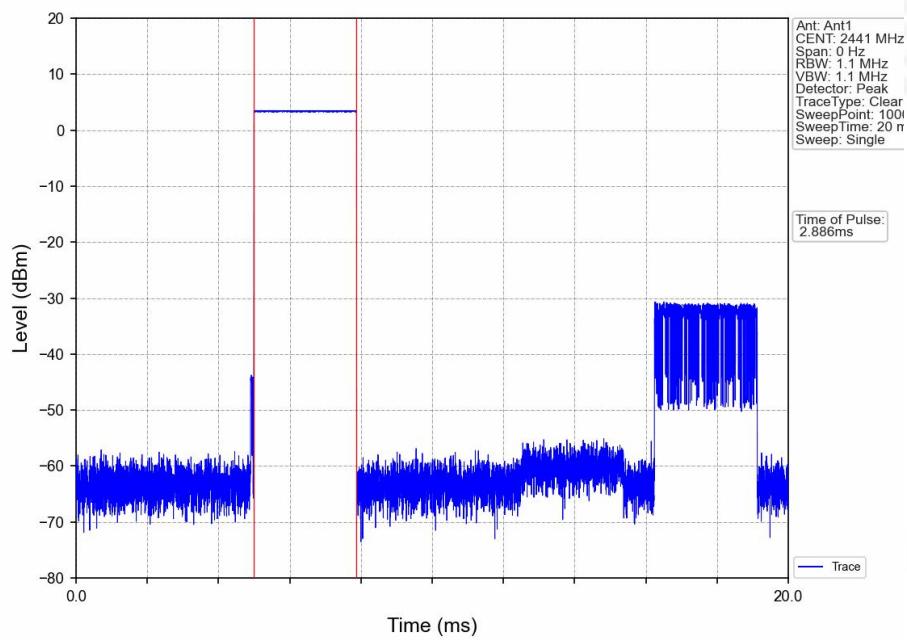




$\pi/4$ -DQPSK 2DH1 2441MHz

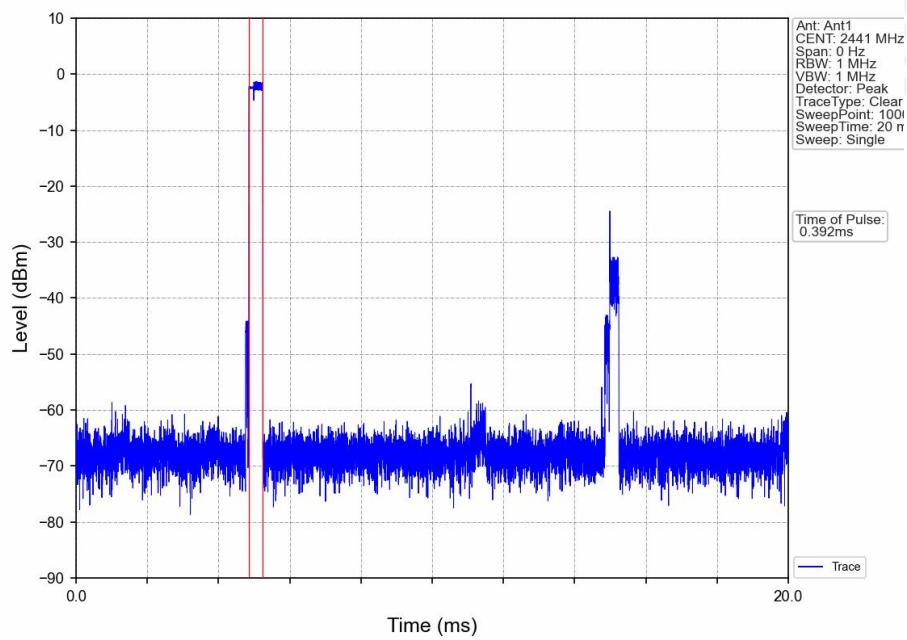


$\pi/4$ -DQPSK 2DH3 2441MHz

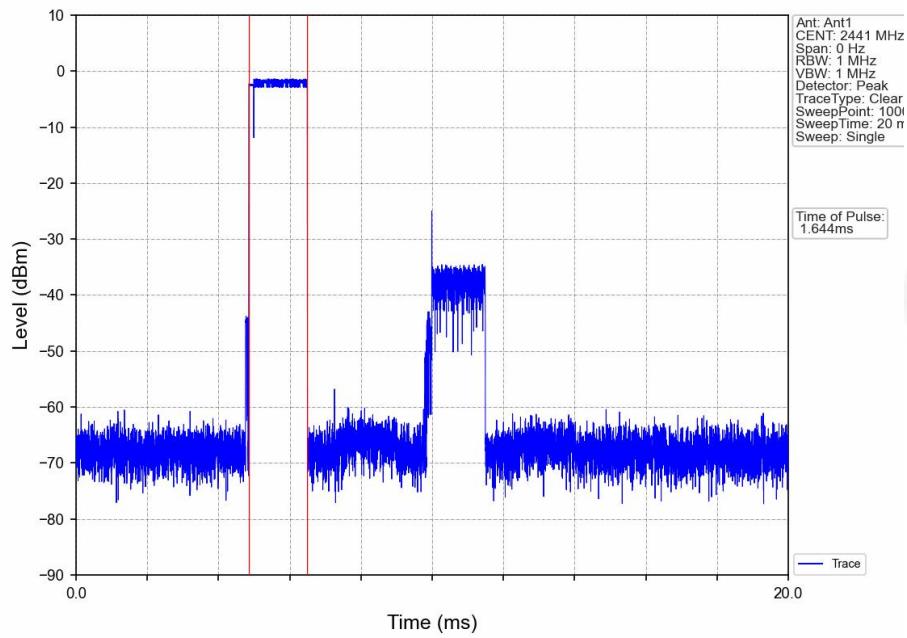




$\pi/4$ -DQPSK 2DH5 2441MHz

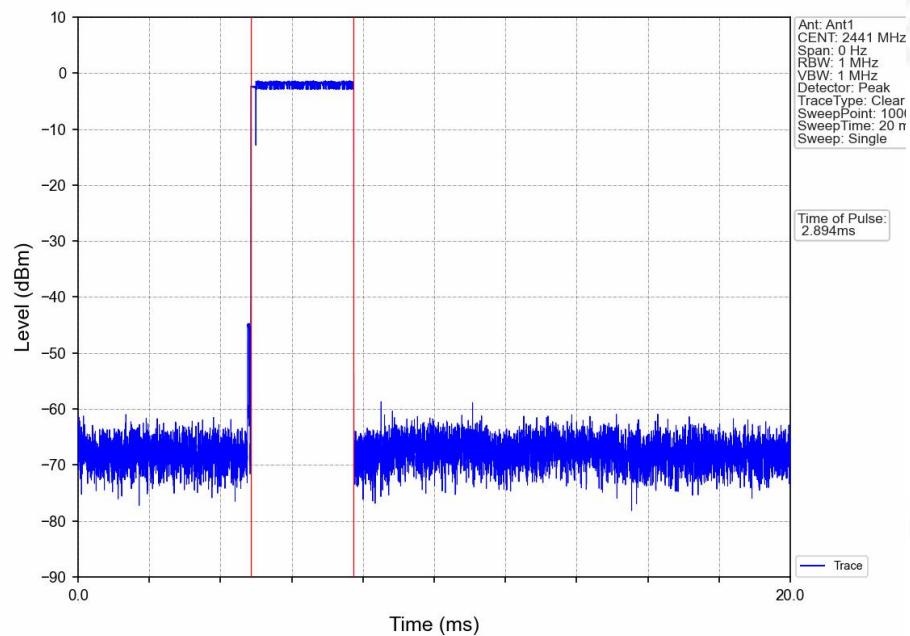




### 8-DPSK 3DH1 2441MHz

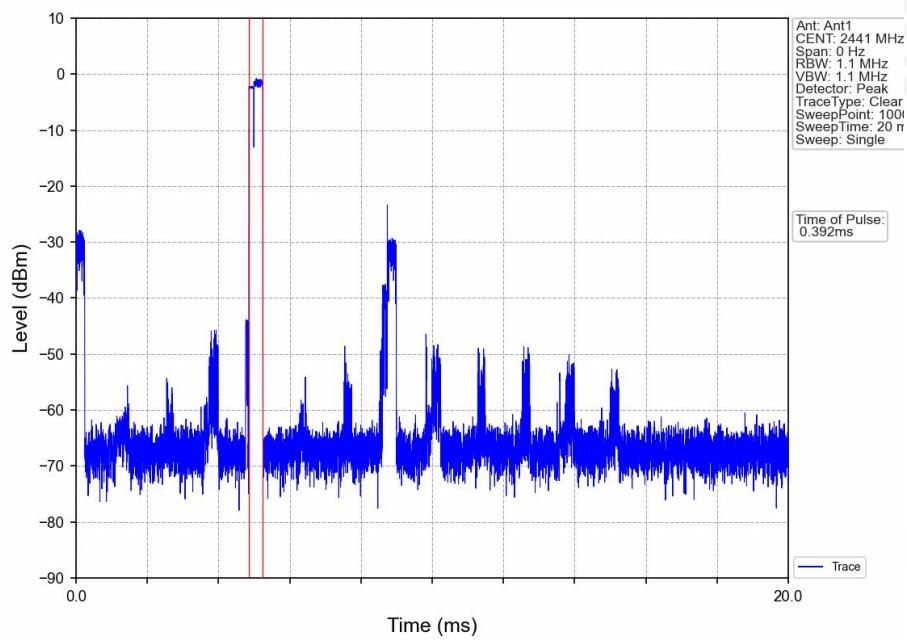


### 8-DPSK 3DH3 2441MHz

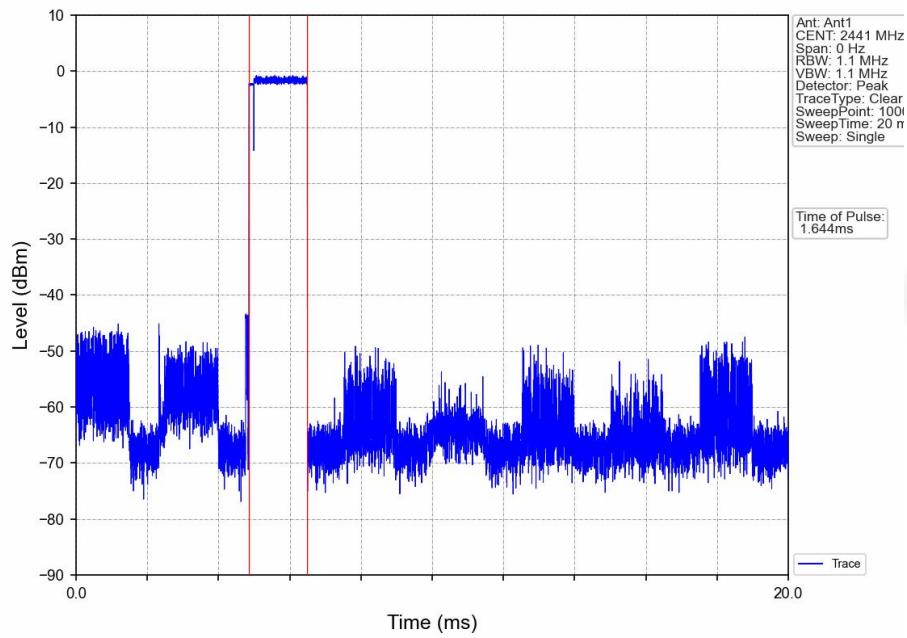



8-DPSK 3DH5 2441MHz

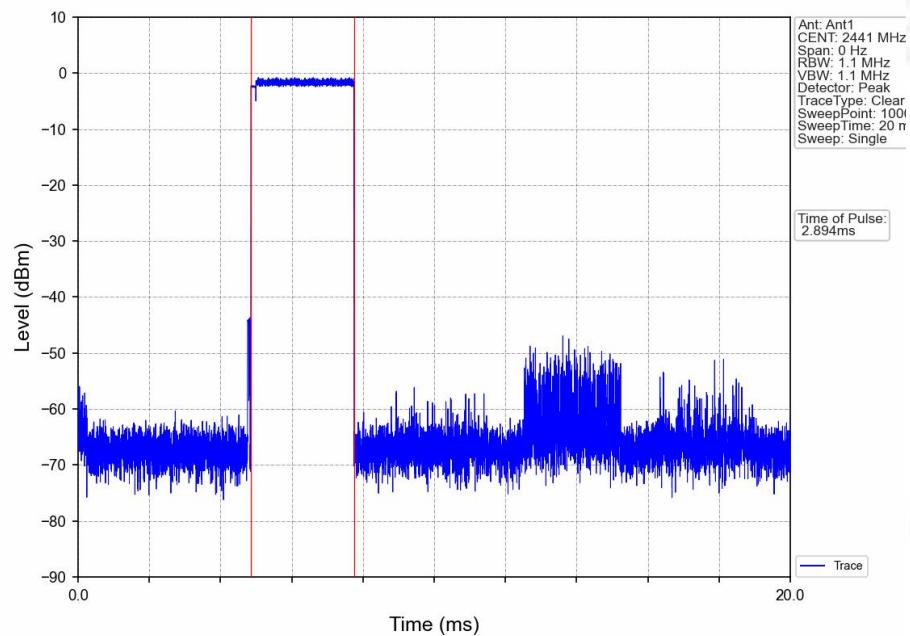



## 12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<p><b>EUT Antenna:</b></p> <p>The antenna is Integrating antenna, the best case gain of the antennas is 2 dBi, reference to the appendix II for details</p>	



### 13. Test Setup Photo

Reference to the appendix I for details.

### 14. EUT Constructional Details

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*