

承 认 书

SPECIFICATION FOR APPROVAL

Specifications Model/Description: Main antenna XN50-156M-BY Black FPC fourth generation
coaxial terminal line length L380MM F739-14LB-380 Xing Yuan Chuang (XYC)

Material code: _____

Manufacturer/Part number: F739-14B-380

supplier: Shenzhen Xing Yuan Chuang technology Co., LTD

零件性质 ☒ 一般的 (STANDARD) ☐ 特别的 _____ (指定的or SPECIAL)

料 件 承 认 项 目 《执行标准 (参考承认check list)》			
承认事项		技术确认栏/时间	
外观是否符合整机要求	☐	ID 工程师:	
确认电性能, pin定义, 功耗是否符合整机要求	☐	硬件工程师:	
确认物料是否符合整机EMC/SAFETY/RF要求	☐	EMC工程师:	
参考《物料承认check list》机构部分确认	☐	结构工程师:	
驱动等确认是否符合整机要求	☐	驱动工程师:	
Thermal 确认是否符合整机要求	☐	散热工程师:	
确认是否满足整机BIOS/EC要求	☐	SW工程师:	
确认是否满足整机的系统兼容性/可靠性测试	☐	DQA系统工程师:	
环保审查记录 (适用ROHS指令)	☐	环保工程师:	
确认供应商外观检验标准/关键工艺	☐	SQE工程师:	
确认是否符合客户要求	☐	项目经理 (PM) :	
FAI 全尺寸报告、CPK报告、包装方式 (package)、单体可靠性报告等。	☐	CE 工程师:	
样品附 ☒ 研发 ☐ 品质 ☐ 采购 ☒ 供应商 ☐ 客户 ☒ 组装厂			
IQC检验注意事项: 此实物承认样品只作为颜色、丝印、结构的核对检验使用; 来料尺寸检验按承认书中图纸标注的尺寸核对检验; 外观品质异常 (如划伤、异色点、缩水、凹凸印、断差等) 按六联品质提供的外观检验标准进行检验。			
版本	变更内容描述		变更日期
A	初版发行		02.19
拟制	审核		



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

规格承认书 Approval Sheet

客户名称 Customer	六联智能	日期 Data	2024/02/19
产品名称 Product	WiFi主天线	客户机型 Models	XN50-156M-BY
料号 P/N	F739-14B-380	客户料号 Customer P/N	
规格描述 Specifications	黑色FPC; RF0.81四代端子黑色同轴线; L=380mm		

供应商承认签印 Vender Approved By	客户承认签印 Customer Approved By
	
Checked By:	Checked By:
Audit By:	Audit By:
Approval By:	Approval By:

文件修订履历表

版本 Version	修订内容 Revise The Content	修订人 Revused	核准 Approval	修订日期 Date	备注 Note

地址: 深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen

Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com



Content		
NO.	Proect	Page NO.
1	Specification	4
2	WiFi Ant Test Information	5
3	Antenna Placement	6
4	Test Data	7~~12
5	Antenna Assembly	13
6	Notes	14
7	Inspection Standard	15
8	List Of Raw Materials	16
9	Sample Inspection Report	17
10	Packing Specification	18



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

Specification

1.1 Electrical Properties

Characteristics	Specifications
Working Band	2.4GWiFi; 5GWiFi; 6GWiFi
Antenna From	PIFA
Impedance	50 Ω
Polarization	Linear
Peak Effi	24%@2.4G; 30%@5G; 62%@6G
Peak Gain	-0.4dBi@2.4G; 3.3dBi@5G; 4.2dBi@6G

1.2 Physical Properties

Characteristics	Specifications
Operating Temp	-10°C ~ +60°C
Storage Temp	-10°C ~ +70°C
Humidity	10~95%RH

地址：深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen


Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

WiFi Ant Test Information

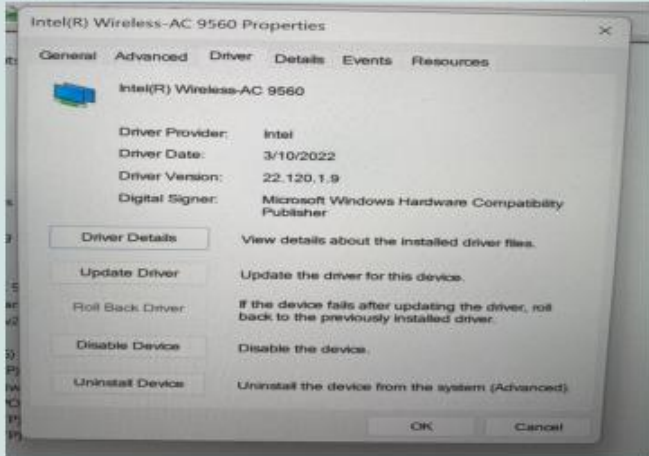Frequency	2. 4G (2402~2483) Mhz	5G (5150~5850) Mhz
Module information		
Driver version information		

地址：深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen


Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

Antenna Placement

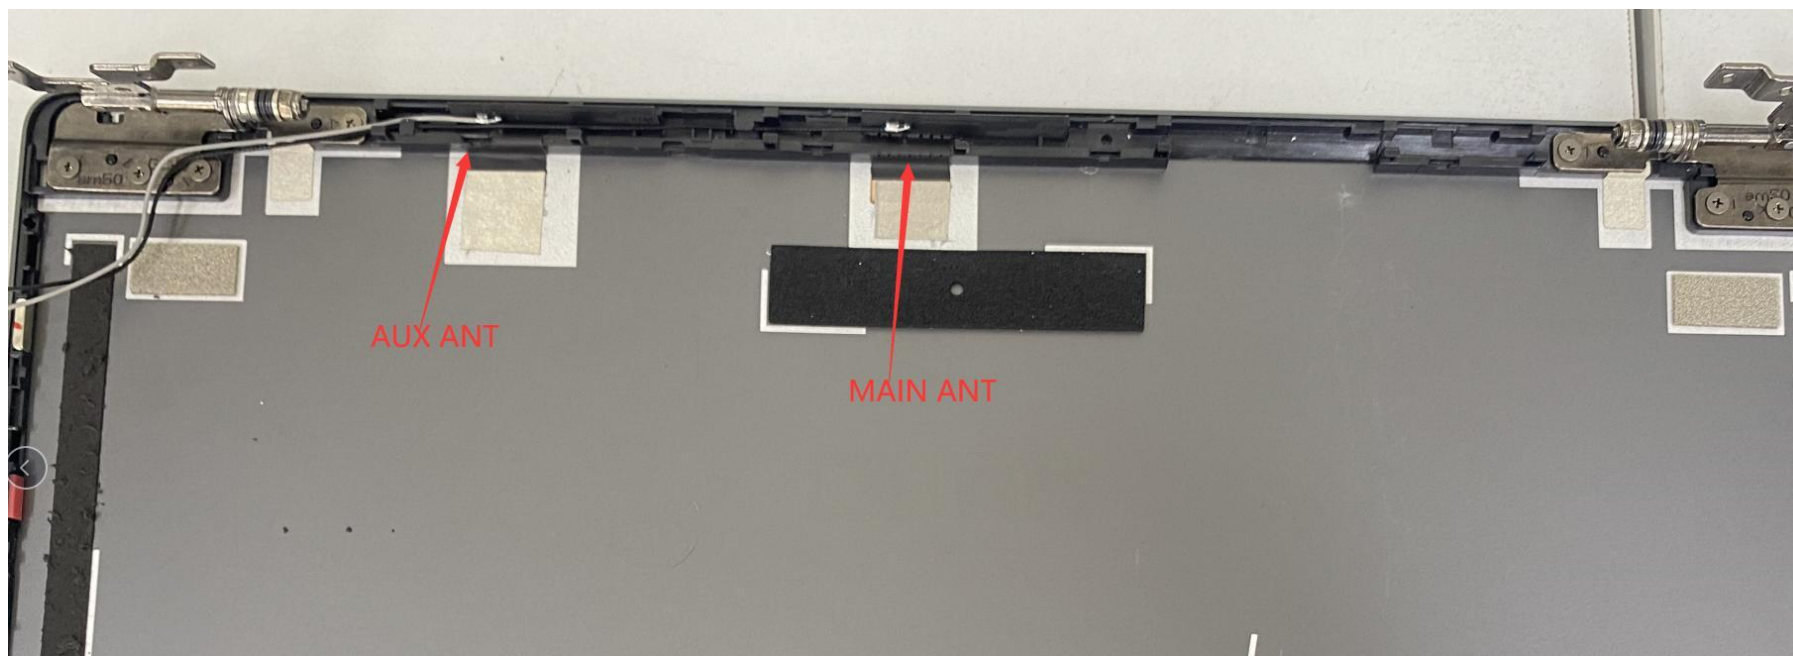



地址：深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen

Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com

Test Data

S11 Parameter-VSWR

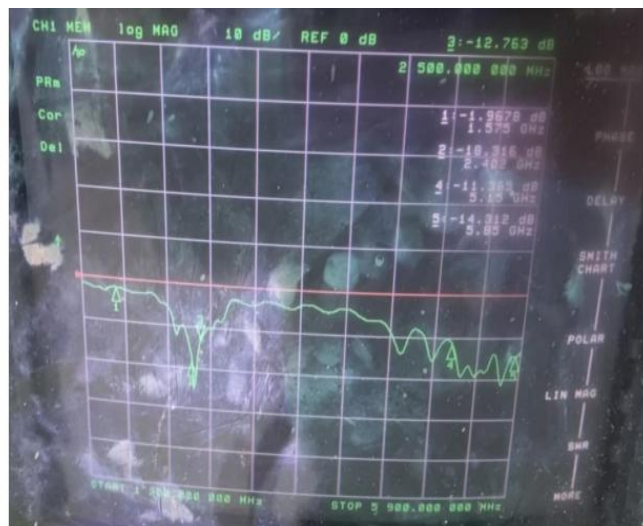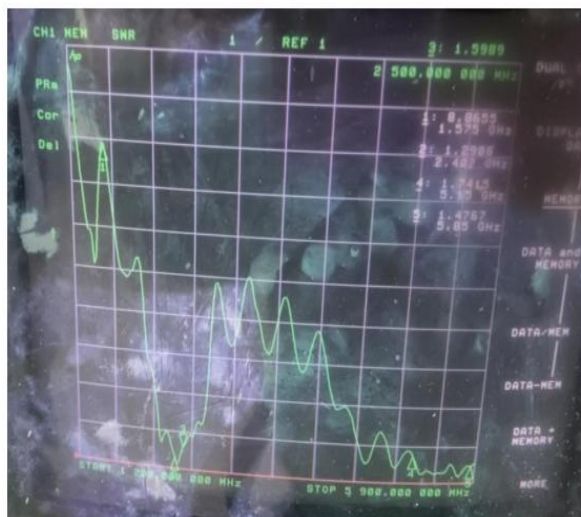

Frequency(MHZ)	2400	2500	5150	5850
VSWR	1.29	1.59	1.74	1.47
Return Loss(DB)	-18.31	-12.76	-11.36	-14.31

6

Efficiency Table (2.4G)

Passive Test For WIFI2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)
2400	18.41	-7.35	-0.46	-2.61	9.561	8.844	-0.46	-21.62
2410	18.06	-7.43	-0.95	-3.1	9.526	8.537	-0.95	-19.83
2420	18.23	-7.39	-0.9	-3.05	9.829	8.398	-0.9	-20.69
2430	19.13	-7.18	-0.82	-2.97	10.474	8.658	-0.82	-20.39
2440	20.38	-6.91	-0.66	-2.81	11.2	9.181	-0.66	-20.81
2450	20.32	-6.92	-0.91	-3.06	11.001	9.319	-0.91	-19.63
2460	21.26	-6.72	-1.11	-3.26	11.398	9.863	-1.11	-18.28
2470	22.7	-6.44	-1.13	-3.28	12.505	10.195	-1.13	-17.63
2480	23.78	-6.24	-1.15	-3.3	13.334	10.442	-1.15	-17.46
2490	24.35	-6.14	-1.07	-3.22	13.725	10.624	-1.07	-17.63
2500	23.23	-6.34	-1.49	-3.64	13.118	10.108	-1.49	-18.36

地址：深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen

Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

Efficiency Table (5G)

Passive Test For WIFI5G								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
5150	15.04	-8.23	-0.59	-2.74	9.043	5.997	-0.59	-18.47
5170	13.92	-8.56	-1.11	-3.26	8.059	5.858	-1.11	-20.16
5190	13.97	-8.55	-1.24	-3.39	7.963	6.005	-1.24	-22.93
5210	14.33	-8.44	-1.28	-3.43	8.188	6.145	-1.28	-27.94
5230	14.48	-8.39	-1.07	-3.22	8.34	6.143	-1.07	-29.63
5250	14.89	-8.27	-1.37	-3.52	8.644	6.248	-1.37	-26.64
5270	15.24	-8.17	-1.49	-3.64	8.646	6.596	-1.49	-21.43
5290	16.57	-7.81	-0.97	-3.12	9.352	7.217	-0.97	-20.03
5310	17.41	-7.59	-0.72	-2.87	9.727	7.681	-0.72	-21.17
5330	18.62	-7.3	-0.68	-2.83	10.635	7.983	-0.68	-19.07
5350	20.9	-6.8	-0.57	-2.72	12.013	8.883	-0.57	-22.13
5370	20.64	-6.85	-1.21	-3.36	11.848	8.791	-1.21	-20.47
5390	20.51	-6.88	-1.46	-3.61	11.67	8.836	-1.46	-21.11
5410	25.8	-5.88	-0.47	-2.62	14.823	10.978	-0.47	-21.2
5430	23.54	-6.28	-1.25	-3.4	13.658	9.883	-1.25	-21.95
5450	25.25	-5.98	-0.77	-2.92	14.906	10.347	-0.77	-23.19
5470	22.5	-6.48	-0.74	-2.89	13.743	8.757	-0.74	-23.64
5490	23.58	-6.27	-0.15	-2.3	14.264	9.317	-0.15	-20.03
5510	23.66	-6.26	-0.23	-2.38	13.875	9.783	-0.23	-18.3
5530	25.02	-6.02	0.57	-1.58	14.369	10.655	0.57	-18.97
5550	26.23	-5.81	0.96	-1.19	15.273	10.955	0.96	-21.75
5570	25.01	-6.02	1.39	-0.76	14.925	10.088	1.39	-21.36
5590	27.84	-5.55	2.58	0.43	16.958	10.885	2.58	-20.59
5610	26.39	-5.79	2.78	0.63	16.703	9.689	2.78	-18.67
5630	30.56	-5.15	3.39	1.24	19.548	11.012	3.39	-17.31
5650	26.5	-5.77	2.75	0.6	17.13	9.368	2.75	-20.03
5670	30.32	-5.18	2.67	0.52	19.243	11.081	2.67	-18.04
5690	25.04	-6.01	1.18	-0.97	15.827	9.212	1.18	-16.45
5710	26.61	-5.75	0.29	-1.86	16.707	9.906	0.29	-15.76
5730	24.88	-6.04	-1.23	-3.38	15.65	9.23	-1.23	-15.71
5750	24.3	-6.14	-1.85	-4	15.162	9.141	-1.85	-17.38
5770	26.02	-5.85	-1.5	-3.65	16.081	9.942	-1.5	-17.06
5790	25.08	-6.01	-0.87	-3.02	15.703	9.374	-0.87	-18.87
5810	25.37	-5.96	0.11	-2.04	16.095	9.274	0.11	-20.78
5830	23.37	-6.31	0.34	-1.81	15.053	8.316	0.34	-19.77
5850	23.26	-6.33	0.57	-1.58	15.162	8.099	0.57	-20.94

地址：深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen

Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com



Efficiency Table (6G)

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)
5925	43.44	-3.83	1.81	-1.4	29.902	13.538
5975	46.35	-3.5	2.18	-0.92	31.95	14.4
6025	46.89	-3.48	2.32	-0.59	32.158	14.732
6075	51.5	-2.9	2.75	0.14	35.322	16.178
6125	49.04	-3.1	2.71	-0.37	34.042	14.998
6175	53.97	-2.52	3.03	0.6	37.5	16.47
6225	55.22	-2.6	3.04	0.75	37.916	17.304
6275	54.75	-2.37	3.23	0.93	37.365	17.385
6325	53.4	-2.59	3.8	0.94	36.524	16.876
6375	54.46	-2.37	3.65	1.26	37.294	17.166
6425	61.51	-2.1	3.24	1.52	41.637	19.873
6475	57.93	-2.32	3.77	1.25	38.931	18.999
6525	54.14	-2.92	3.46	0.69	36.324	17.816
6575	61.31	-2.32	4	1.48	41.086	20.224
6625	58.6	-3.01	3.58	0.66	39.187	19.413
6675	62.01	-2.76	3.06	0.65	41.248	20.762
6725	57.21	-3.44	3.06	-0.24	38.11	19.1
6775	55.82	-3.39	3.17	-0.38	37.354	18.466
6825	56.64	-3.53	2.48	-0.92	38.078	18.562
6875	57.41	-3.34	3.05	-1.2	38.349	19.061
6925	58.36	-3.4	2.81	-1.34	38.508	19.852
6975	52.16	-3.49	3.51	-1.35	34.32	17.84
7025	55.04	-3.26	2.79	-1.08	36.312	18.728
7075	49.59	-3.47	4.23	-1.35	32.504	17.086
7125	56.9	-3.31	3.64	-1.08	36.577	20.323


地址：深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen


Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com

Radiation Pattern(2.4G)


2400.000MHz



2450.000MHz




2500.000MHz




Radiation Pattern(5G)


5150.000MHz



5490.000MHz




5850.000MHz




Radiation Pattern(6G)


5925.000MHz



6725.000MHz



7125.000MHz





WiFi Active Test Data

802.11b	Frequency	TRP		TIS	
	2412	CH1 11Mbps	9.85	CH1 11Mbps	-79.36
	2437	CH6 11Mbps	8.63	CH6 11Mbps	-79.58
	2467	CH11 11Mbps	8.38	CH11 11Mbps	-79.69
802.11a		TRP		TIS	
	5180	CH36 6Mbps	7.36	CH36 54Mbps	-68.36
	5300	CH60 6Mbps	7.1	CH60 54Mbps	-67.14
	5805	CH161 6Mbps	9.06	CH161 54Mbps	-69.36

BT Test

测试环境：开放空间(通道)

测试工具：蓝牙音响

测试距离：10/m

结果：播放音乐流畅，无杂音。



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

Throughput Test(2.4G)

上行	127M	下行	210M
图片	[ID] Interval Transfer Bandwidth [324] 17.0-18.0 sec 15.2 MBytes 127 Mbits/sec [ID] Interval Transfer Bandwidth [324] 18.0-19.0 sec 16.0 MBytes 135 Mbits/sec [ID] Interval Transfer Bandwidth [324] 19.0-20.0 sec 14.5 MBytes 122 Mbits/sec [ID] Interval Transfer Bandwidth [324] 20.0-21.0 sec 15.9 MBytes 133 Mbits/sec [ID] Interval Transfer Bandwidth [324] 21.0-22.0 sec 14.4 MBytes 121 Mbits/sec [ID] Interval Transfer Bandwidth [324] 22.0-23.0 sec 15.4 MBytes 129 Mbits/sec [ID] Interval Transfer Bandwidth [324] 23.0-24.0 sec 14.8 MBytes 124 Mbits/sec [ID] Interval Transfer Bandwidth [324] 24.0-25.0 sec 15.9 MBytes 133 Mbits/sec [ID] Interval Transfer Bandwidth [324] 25.0-26.0 sec 17.0 MBytes 143 Mbits/sec [ID] Interval Transfer Bandwidth [324] 26.0-27.0 sec 14.6 MBytes 122 Mbits/sec [ID] Interval Transfer Bandwidth [324] 27.0-28.0 sec 16.1 MBytes 135 Mbits/sec [ID] Interval Transfer Bandwidth [324] 28.0-29.0 sec 15.5 MBytes 130 Mbits/sec [ID] Interval Transfer Bandwidth [324] 29.0-30.0 sec 15.9 MBytes 133 Mbits/sec [ID] Interval Transfer Bandwidth [324] 0.0-30.0 sec 454 MBytes 127 Mbits/sec	图片	[324] 18.0-19.0 sec 25.4 MBytes 213 Mbits/sec [ID] Interval Transfer Bandwidth [324] 19.0-20.0 sec 27.0 MBytes 227 Mbits/sec [ID] Interval Transfer Bandwidth [324] 20.0-21.0 sec 24.6 MBytes 207 Mbits/sec [ID] Interval Transfer Bandwidth [324] 21.0-22.0 sec 26.6 MBytes 223 Mbits/sec [ID] Interval Transfer Bandwidth [324] 22.0-23.0 sec 25.1 MBytes 211 Mbits/sec [ID] Interval Transfer Bandwidth [324] 23.0-24.0 sec 25.0 MBytes 209 Mbits/sec [ID] Interval Transfer Bandwidth [324] 24.0-25.0 sec 24.9 MBytes 209 Mbits/sec [ID] Interval Transfer Bandwidth [324] 25.0-26.0 sec 27.2 MBytes 228 Mbits/sec [ID] Interval Transfer Bandwidth [324] 26.0-27.0 sec 26.7 MBytes 224 Mbits/sec [ID] Interval Transfer Bandwidth [324] 27.0-28.0 sec 26.3 MBytes 220 Mbits/sec [ID] Interval Transfer Bandwidth [324] 28.0-29.0 sec 27.8 MBytes 233 Mbits/sec [ID] Interval Transfer Bandwidth [324] 29.0-30.0 sec 27.5 MBytes 231 Mbits/sec [ID] Interval Transfer Bandwidth [324] 0.0-30.0 sec 752 MBytes 210 Mbits/sec

Throughput Test(5G)

上行	577M	下行	573M
图片	[324] 18.0-19.0 sec 68.3 MBytes 573 Mbits/sec [ID] Interval Transfer Bandwidth [324] 19.0-20.0 sec 64.8 MBytes 544 Mbits/sec [ID] Interval Transfer Bandwidth [324] 20.0-21.0 sec 69.8 MBytes 586 Mbits/sec [ID] Interval Transfer Bandwidth [324] 21.0-22.0 sec 68.4 MBytes 574 Mbits/sec [ID] Interval Transfer Bandwidth [324] 22.0-23.0 sec 67.9 MBytes 570 Mbits/sec [ID] Interval Transfer Bandwidth [324] 23.0-24.0 sec 71.6 MBytes 600 Mbits/sec [ID] Interval Transfer Bandwidth [324] 24.0-25.0 sec 68.4 MBytes 574 Mbits/sec [ID] Interval Transfer Bandwidth [324] 25.0-26.0 sec 69.5 MBytes 583 Mbits/sec [ID] Interval Transfer Bandwidth [324] 26.0-27.0 sec 70.5 MBytes 592 Mbits/sec [ID] Interval Transfer Bandwidth [324] 27.0-28.0 sec 70.7 MBytes 593 Mbits/sec [ID] Interval Transfer Bandwidth [324] 28.0-29.0 sec 69.7 MBytes 585 Mbits/sec [ID] Interval Transfer Bandwidth [324] 29.0-30.0 sec 71.0 MBytes 596 Mbits/sec [ID] Interval Transfer Bandwidth [324] 0.0-30.0 sec 2.02 GBytes 577 Mbits/sec	图片	[ID] Interval Transfer Bandwidth [328] 18.0-19.0 sec 69.5 MBytes 583 Mbits/sec [ID] Interval Transfer Bandwidth [328] 19.0-20.0 sec 66.5 MBytes 558 Mbits/sec [ID] Interval Transfer Bandwidth [328] 20.0-21.0 sec 67.6 MBytes 567 Mbits/sec [ID] Interval Transfer Bandwidth [328] 21.0-22.0 sec 68.4 MBytes 573 Mbits/sec [ID] Interval Transfer Bandwidth [328] 22.0-23.0 sec 67.5 MBytes 566 Mbits/sec [ID] Interval Transfer Bandwidth [328] 23.0-24.0 sec 68.7 MBytes 576 Mbits/sec [ID] Interval Transfer Bandwidth [328] 24.0-25.0 sec 65.6 MBytes 551 Mbits/sec [ID] Interval Transfer Bandwidth [328] 25.0-26.0 sec 68.2 MBytes 572 Mbits/sec [ID] Interval Transfer Bandwidth [328] 26.0-27.0 sec 69.8 MBytes 585 Mbits/sec [ID] Interval Transfer Bandwidth [328] 27.0-28.0 sec 68.3 MBytes 573 Mbits/sec [ID] Interval Transfer Bandwidth [328] 28.0-29.0 sec 68.1 MBytes 571 Mbits/sec [ID] Interval Transfer Bandwidth [328] 29.0-30.0 sec 68.3 MBytes 573 Mbits/sec [ID] Interval Transfer Bandwidth [328] 0.0-30.0 sec 2.00 GBytes 573 Mbits/sec

地址：深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen

Tel: 0755-82103639

QQ: 487580356


Email: Stephdeng_Vis@126.com



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

Antenna Assembly

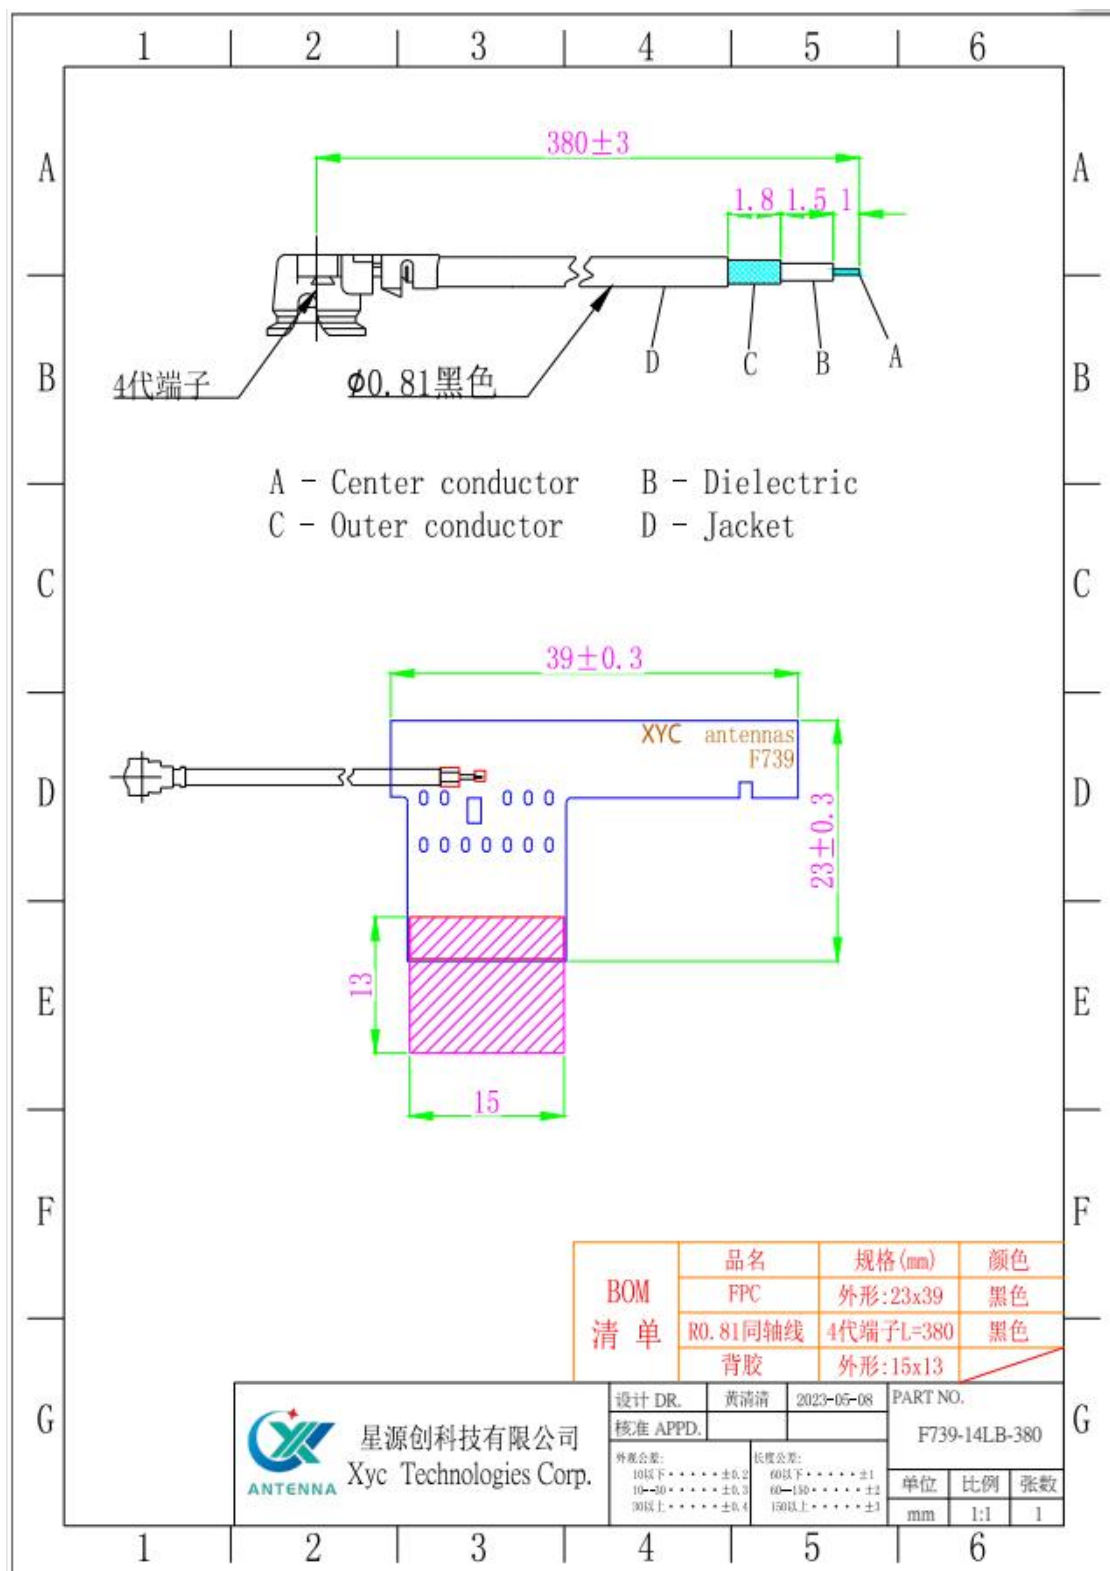


地址: 深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen

Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com

Notes

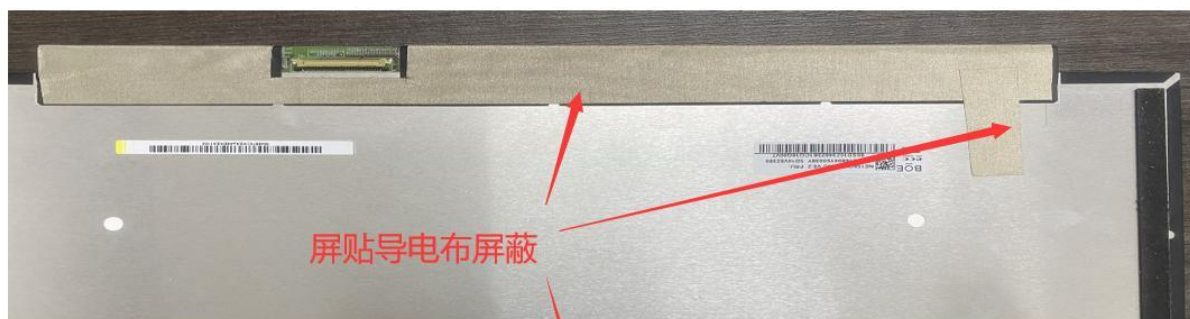

21





Inspection Standard

深圳市星源创科技有限公司	文件编码	XYC-WI-PZ-02	页号
	文件版本	A0	1 of 1
文件名称	抽样计划		

抽样水平对照表

特殊检查水平				一般检查水平			批量范围	样本字码	抽样数	0.65		1.0		1.5		2.5		4.0		6.0	
S-1	S-2	S-3	S-4	I	II	III				AC	RE	AC	RE	AC	RE	AC	RE	AC	RE	AC	RE
A	A	A	A	A	A	B	2---8	A	2	0	1	0	1	0	1	0	1	0	1	0	1
A	A	A	A	A	B	C	9---15	B	3	0	1	0	1	0	1	0	1	0	1	0	1
A	A	B	B	B	C	D	16---25	C	5	0	1	0	1	0	1	0	1	0	1	1	2
A	B	B	C	C	D	E	26---50	D	8	0	1	0	1	0	1	0	1	1	2	1	2
B	B	C	C	C	E	F	51---90	E	13	0	1	0	1	0	1	1	2	1	2	2	3
B	B	C	D	D	F	G	91---150	F	20	0	1	0	1	1	2	1	2	2	3	3	4
B	C	D	E	E	G	H	151---280	G	32	0	1	1	2	1	2	2	3	3	4	5	6
B	C	D	E	F	H	J	281---500	H	50	1	2	1	2	2	3	3	4	5	6	7	8
C	C	E	F	G	J	K	501---1200	J	80	1	2	2	3	3	4	5	6	7	8	10	11
C	D	E	G	H	K	L	1201---3200	K	125	2	3	3	4	5	6	7	8	10	11	14	15
C	D	F	G	J	L	M	3201---10000	L	200	3	4	5	6	7	8	10	11	14	15	21	22
C	D	F	H	K	M	N	10001---35000	M	315	5	6	7	8	10	11	14	15	21	22	21	22
D	E	G	J	L	N	P	35001---150000	N	500	7	8	10	11	14	15	21	22	21	22	21	22
D	E	G	J	M	P	Q	150001---500000	P	800	10	11	14	15	21	22	21	22	21	22	21	22
D	E	H	K	N	Q	R	500001and over	Q	1250	14	15	21	22	21	22	21	22	21	22	21	22
								R	2000	21	22	21	22	21	22	21	22	21	22	21	22

AC为合格项 RE为不合格项

地址：深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address:1506,Tangwei Business Building,Fuhai Street,Fuyong Town,Baoan District,Shenzhen

Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

List Of Raw Materials

环保零件检测报告统计清单

本公司兹保证本《环保零件检测报告》内所记载及附之所有资料皆属实，如有任何不实（包括但不限于料号与原始检测报告对照错误），致深圳英众世纪智能科技有限公司受有任何损害，愿对深圳英众世纪智能科技有限公司负完全之损害赔偿赔偿责任。

物料名称: WIFI+BT主天线 供应商料号: F739-14B-380
英众料号: 出具厂商:
拟 制: 法人代表:

NO	材料名称 Name	材料供应商 Material supplier	均质材料 Mfr Part Number	均质材料有害物质含量Hazardous Substances Concentration in Homogeneous Material(PPM)										卤素 HF		测试机构 Test Lab, organization	报告编号 Test Report Number	测试日期 Test Date (YY-MM-DD)	第三方检测报告插入 Insert a third party test report
				Cd	Pb	Hg	Cr6+	PBBs	PBDEs	DBP	BBP	DEHP	DIBP	氯 Cl	溴 Br				
				<100	<1000	<1000	<1000	<1000	<1000	<1000	<1000	<1000	<1000	<900	<900				
1	WIFI/ BT主 天线	星源创 (XYC)	FPC 基材	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	通标标准技术 服务有限公司广州分 公司	CANEC222 7194601 CANEC222 7194602	2022-12- 22	 CAN22-271946- 01_EC_F.PDF  CAN22-271946- 02_EC_F.PDF
			背胶9471	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND				
			文字 油墨	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND				
			防焊 油墨	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND				
			线材	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND				

地址: 深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen

Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

Sample Inspection Report



深圳市星源创科技有限公司 样品检验报告

客户	六联智能	品名规格	WIFI主天线	出货数量	5	抽样数量	2	
机型	XN50-156M-BY		料号	F739-14B-380		出货日期	2023/12/28	
检验标准	☒ 正常检验 ☐ 加严检验 ☐ 减量检验							
抽样方式	MIL-STD-105D (II) 单次抽样 接受限 AQL:CR: 0 Maj: 1.5 Min: 0.4							
质量允收水平			CR Acc	0	Maj ACC	0	Min ACC	0
			CR REJ	1	Maj REJ	1	Min REJ	1
项目	检验内容	检验要求	检验方法	检验结果				判定
				1	2	3	4	
尺寸检验	线总长	380±3	直尺	380	380			合格
	FPC外形	23±0.3	卡尺	23	22.9			合格
	FPC外形	39±0.3	卡尺	38.9	38.9			合格
项目	检验内容	检验要求	检验方法	缺陷描述	CR	Maj	Min	判定
外观检验	线外皮	外被有无刮伤现象	目视	无异常	0	0	0	合格
	焊盘加锡	无氧化、锡尖等现象	目视	无异常	0	0	0	合格
	IPEX	无缺料, 烈痕, 色差, 缩水, 烫伤, 无氧化、变色、变形脱线等不良现象	目视	无异常	0	0	0	合格
电气特性								
其它								
最终判定	☒ OK ☐ NG							

表格编号: XYC-WF-PZ-001

地址: 深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen


Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com



深圳星源创科技有限公司

Shen Zhen Xing Yuan Chuang Technology Co., Ltd

Packing Specification

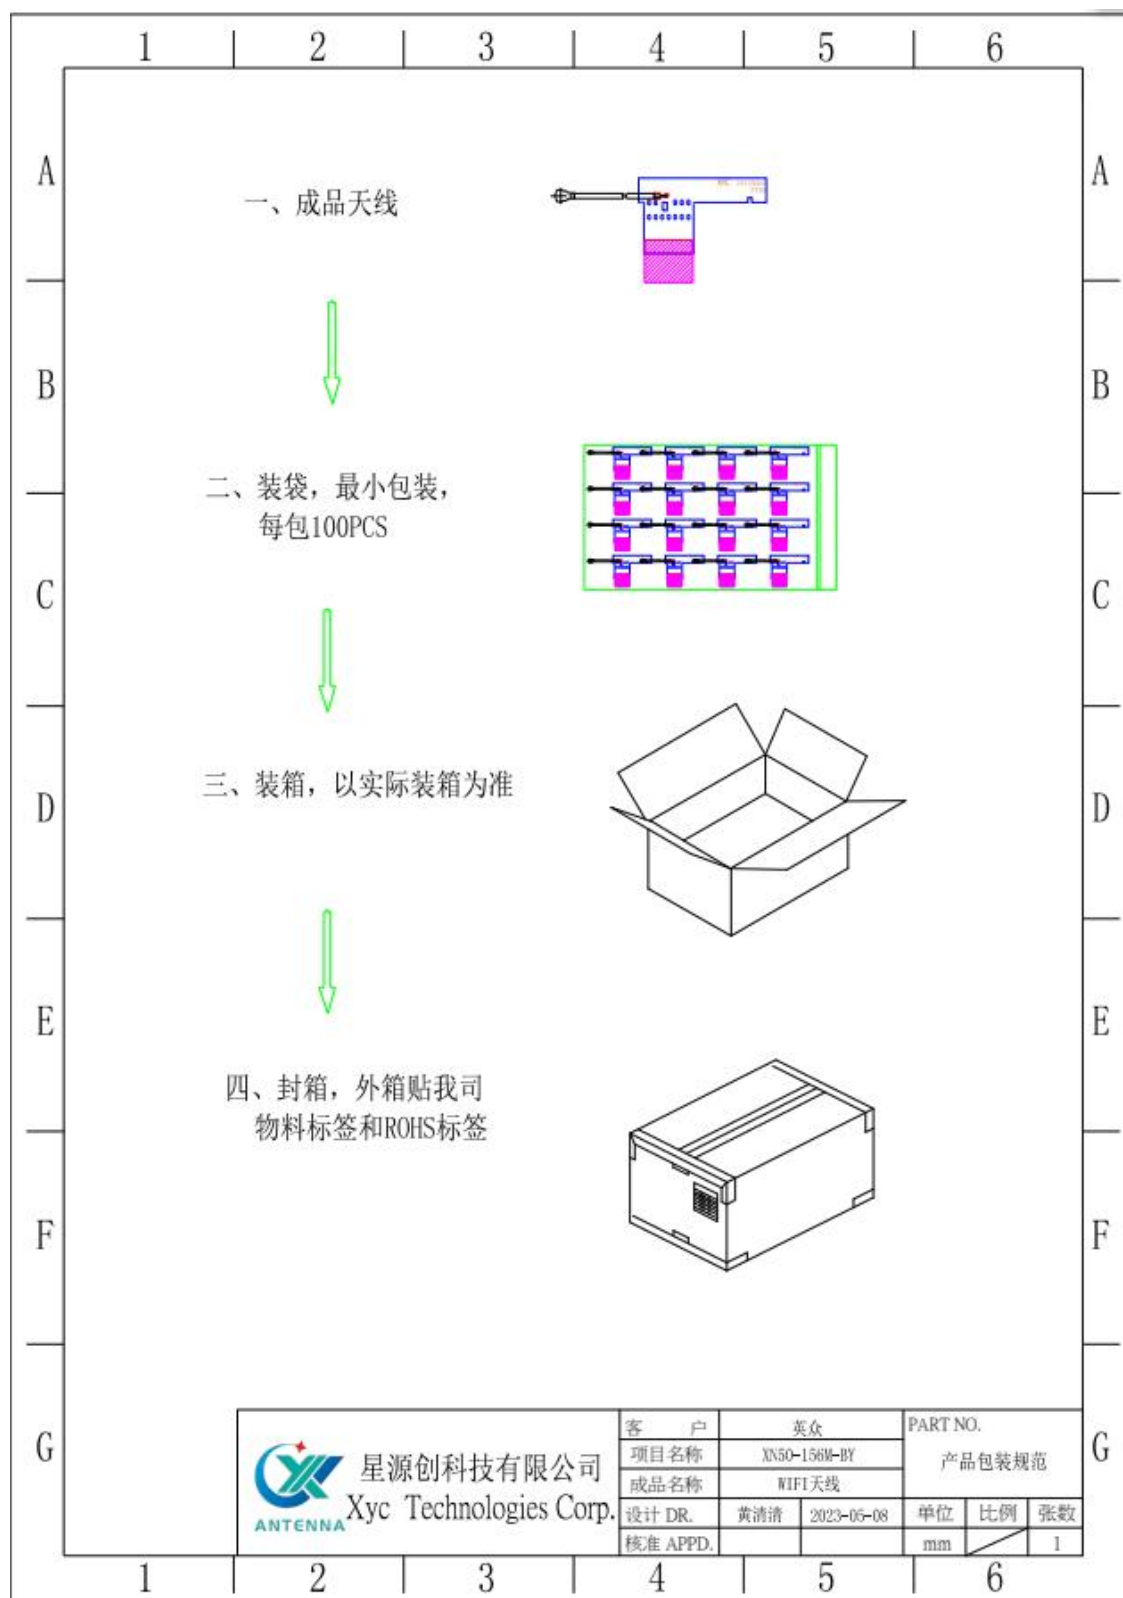

地址：深圳市宝安区福永镇福海街道塘尾股份商务大厦1506

Address: 1506, Tangwei Business Building, Fuhai Street, Fuyong Town, Baoan District, Shenzhen

Tel: 0755-82103639 QQ: 487580356 Email: Stephdeng_Vis@126.com