



SPECIFICATION FOR APPROVAL

# 承認書

<b>Customer Name</b>	顺盟
<b>Product name</b>	WIFI 天线/双频/38.5*12.5mm/异形/杨跃/ROHS
<b>Product number</b>	332-200000063
<b>Prepared By</b>	Tony-Men
<b>Checked By</b>	
<b>Approved By</b>	
<b>Apply Date</b>	2023年11月26日

CUSTOMER SIGNATURE		
Prepared By	Checked By	Approved By

PLEASE RETURN TO US ONE COPY OF "SPECIFICATION FOR APPROVAL" WITH YOUR APPROVED SIGNATURES.

# 深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

频率范围 Frequency range	2400 ~ 2500 MHz 5180 ~ 5240 MHz
增益 Gain	0.9dBi@2400 ~ 2500 MHz 2.0dBi@5180 ~ 5240 MHz
驻波比系数 VSWR	<2.0@2400 ~ 2500 MHz <2.3@5180 ~ 5240 MHz
输入阻抗 Input Impedance	50±5 (Ω)
极化方式 Polarization	垂直极化 Vertical Polarization
半功率波束 (3dB) HPW	180° H-plane 120° E-plane

# 深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

## Revision History

Date	Revision	Description of Changes
2023-11-26	RA	Measured with 2.4GHz/5.1GHZ antenna sample.

## 1 Technical Summary

This report summarizes the electrical results of the proposed antenna to support the 2.4GHz/5.8GHZ antenna program. We test the antenna with the latest version handset. And it seems to be acceptable.

## 2 General Description

### 2.1 Components/Part revisions

VSWR: Voltage Standing Wave Rate.

## 3 Mechanical Description

## 4 Electrical Performance

### 4.1 Set-up

#### 4.1.1 VSWR

VSWR measurements (S11) were performed using an Agilent 8753D Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

#### 4.1.2 Gain & Radiation Patterns

The gain of the antenna was measured in the Lxc's anechoic chamber. Coaxial chokes on the feed cable were used to mitigate surface currents. The chamber provides less than -30 dB reflectivity from 300 MHz through 6 GHz and an 18" diameter spherical quiet zone. The measurement results are calibrated using both dipole and leaky wave horn standards.




#### 4.1.3 Matching Circuit Description

No changed..

# 深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

## 5. Antenna - Radiation Pattern Test Data

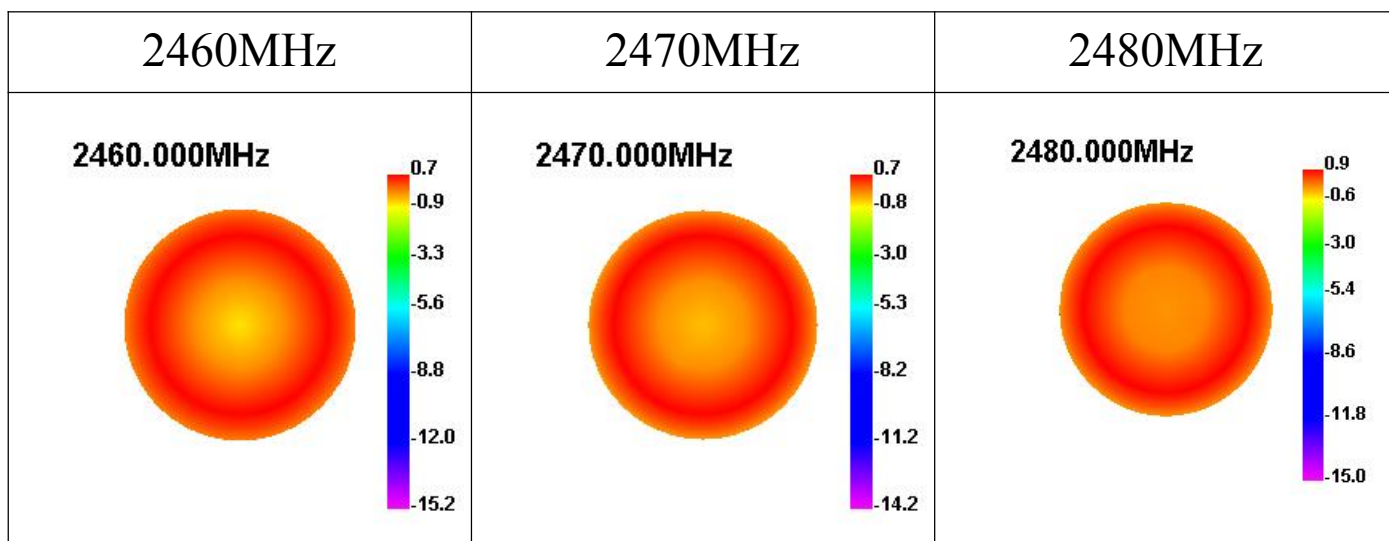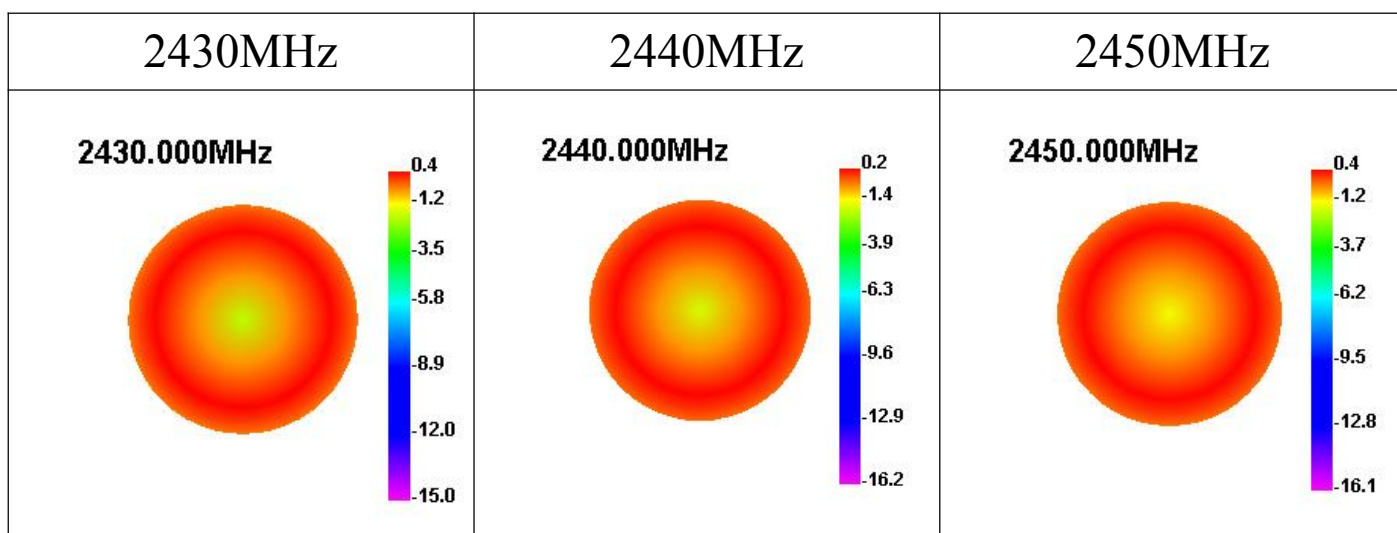
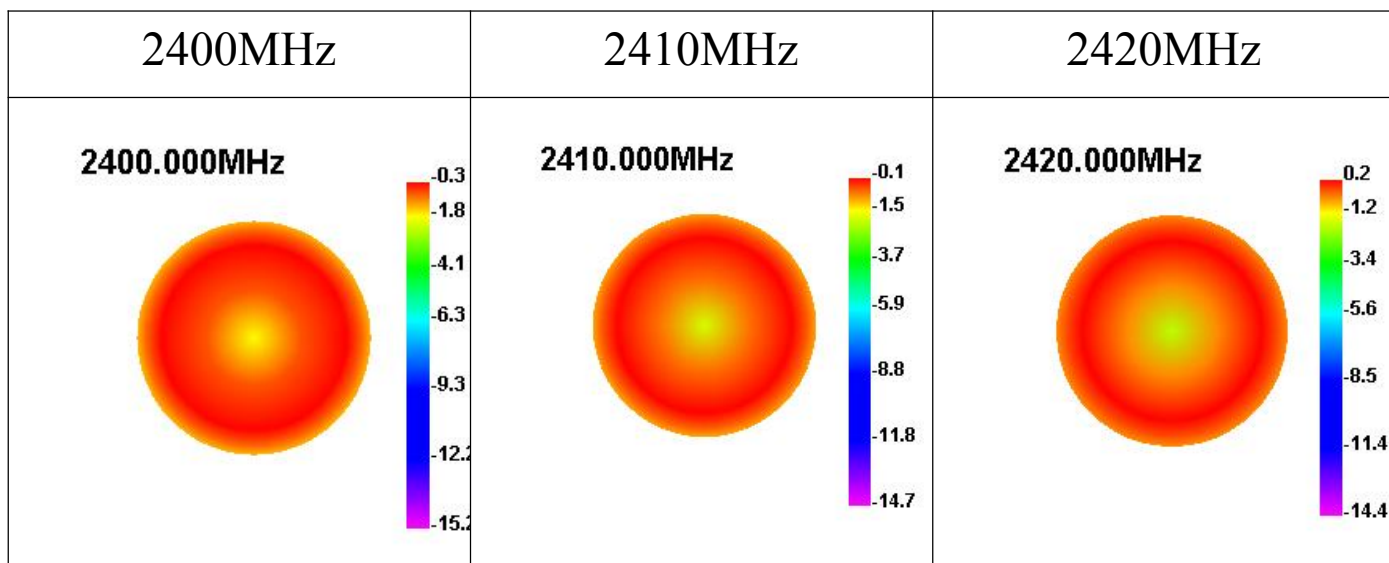


Shenzhen Yangyue Electronic Communication Technology Co., Ltd

地址: 东莞市虎门镇大宁社区浦江路2号创富赢家产业园A栋6楼

# 深圳市扬跃电子通信科技有限公司


Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

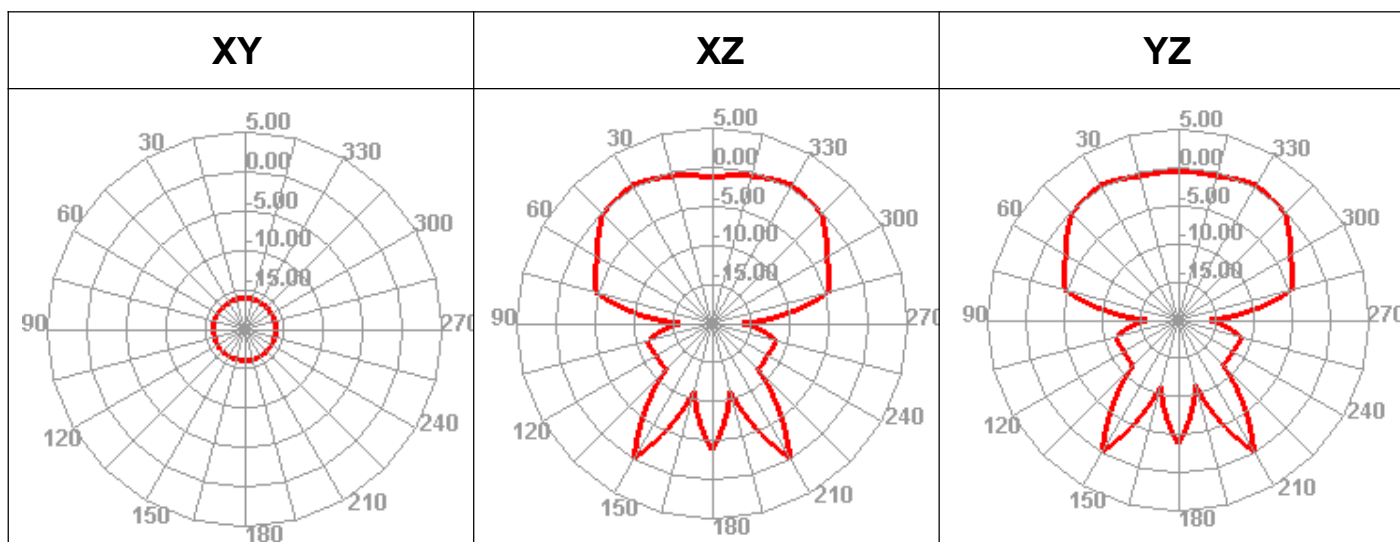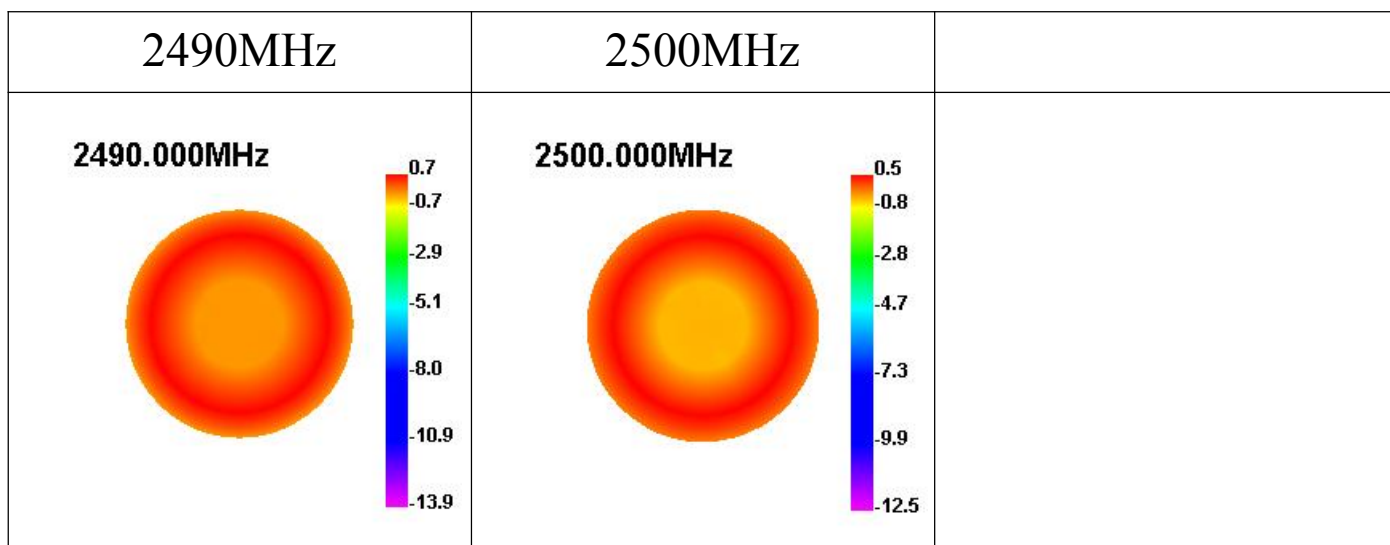

Freq (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Effi (%)	32.88	34.15	36.14	36.87	35.84	38.03	40.8	40.59	42.68	40.9	39.63
Gain (dBi)	-0.34	-0.08	0.25	0.35	0.21	0.44	0.73	0.72	0.95	0.73	0.47


# 深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

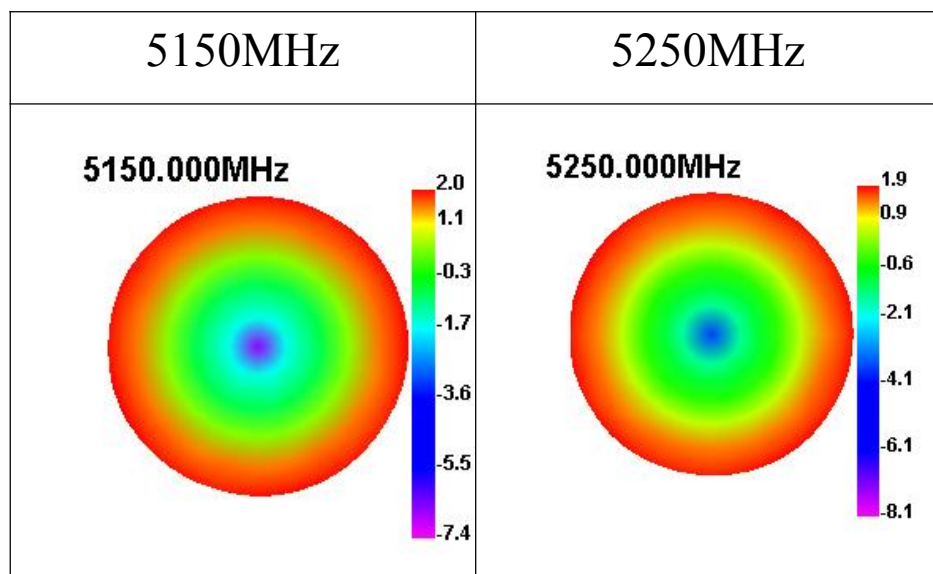

# 深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

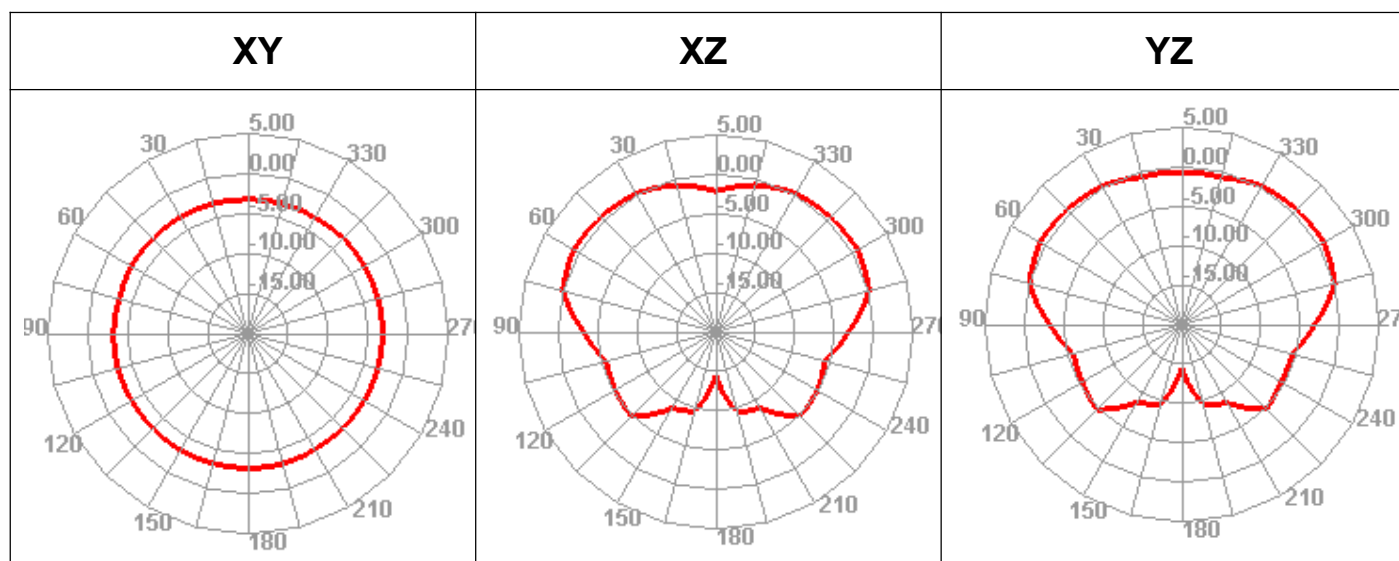

Freq	(MHz)	5150	5200	5250
Effi	(%)	80.94	75.39	77.21
Gain	(dBi)	2.05	1.67	1.87


# 深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

## 6.Plots

### VSWR

注：1 驻波系数的标准值

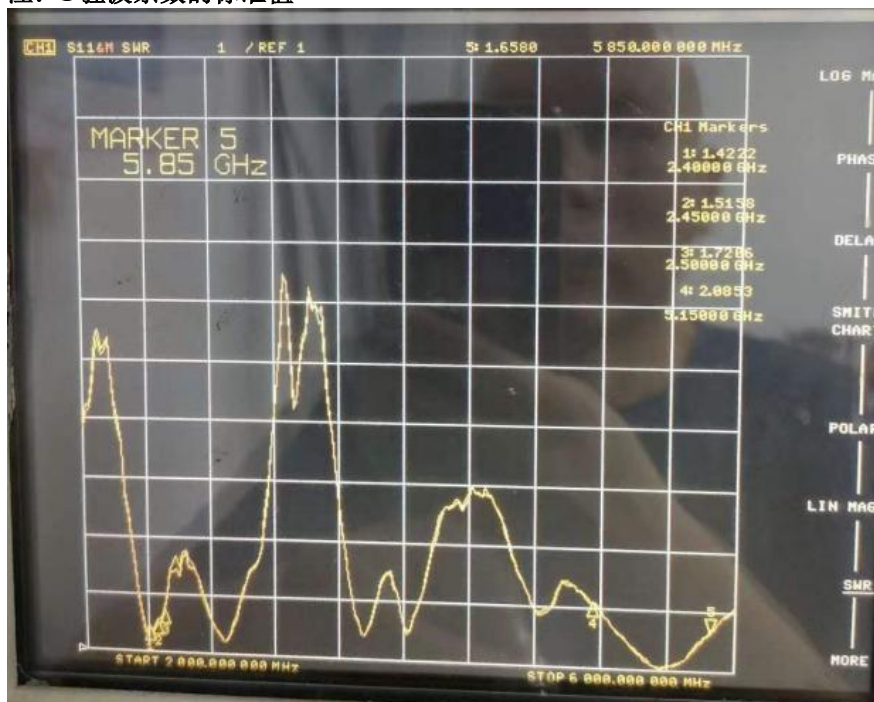

2 回损的标准值





# 深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.


## 3.史密斯图



# 深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

## 6.Mechanical drawing

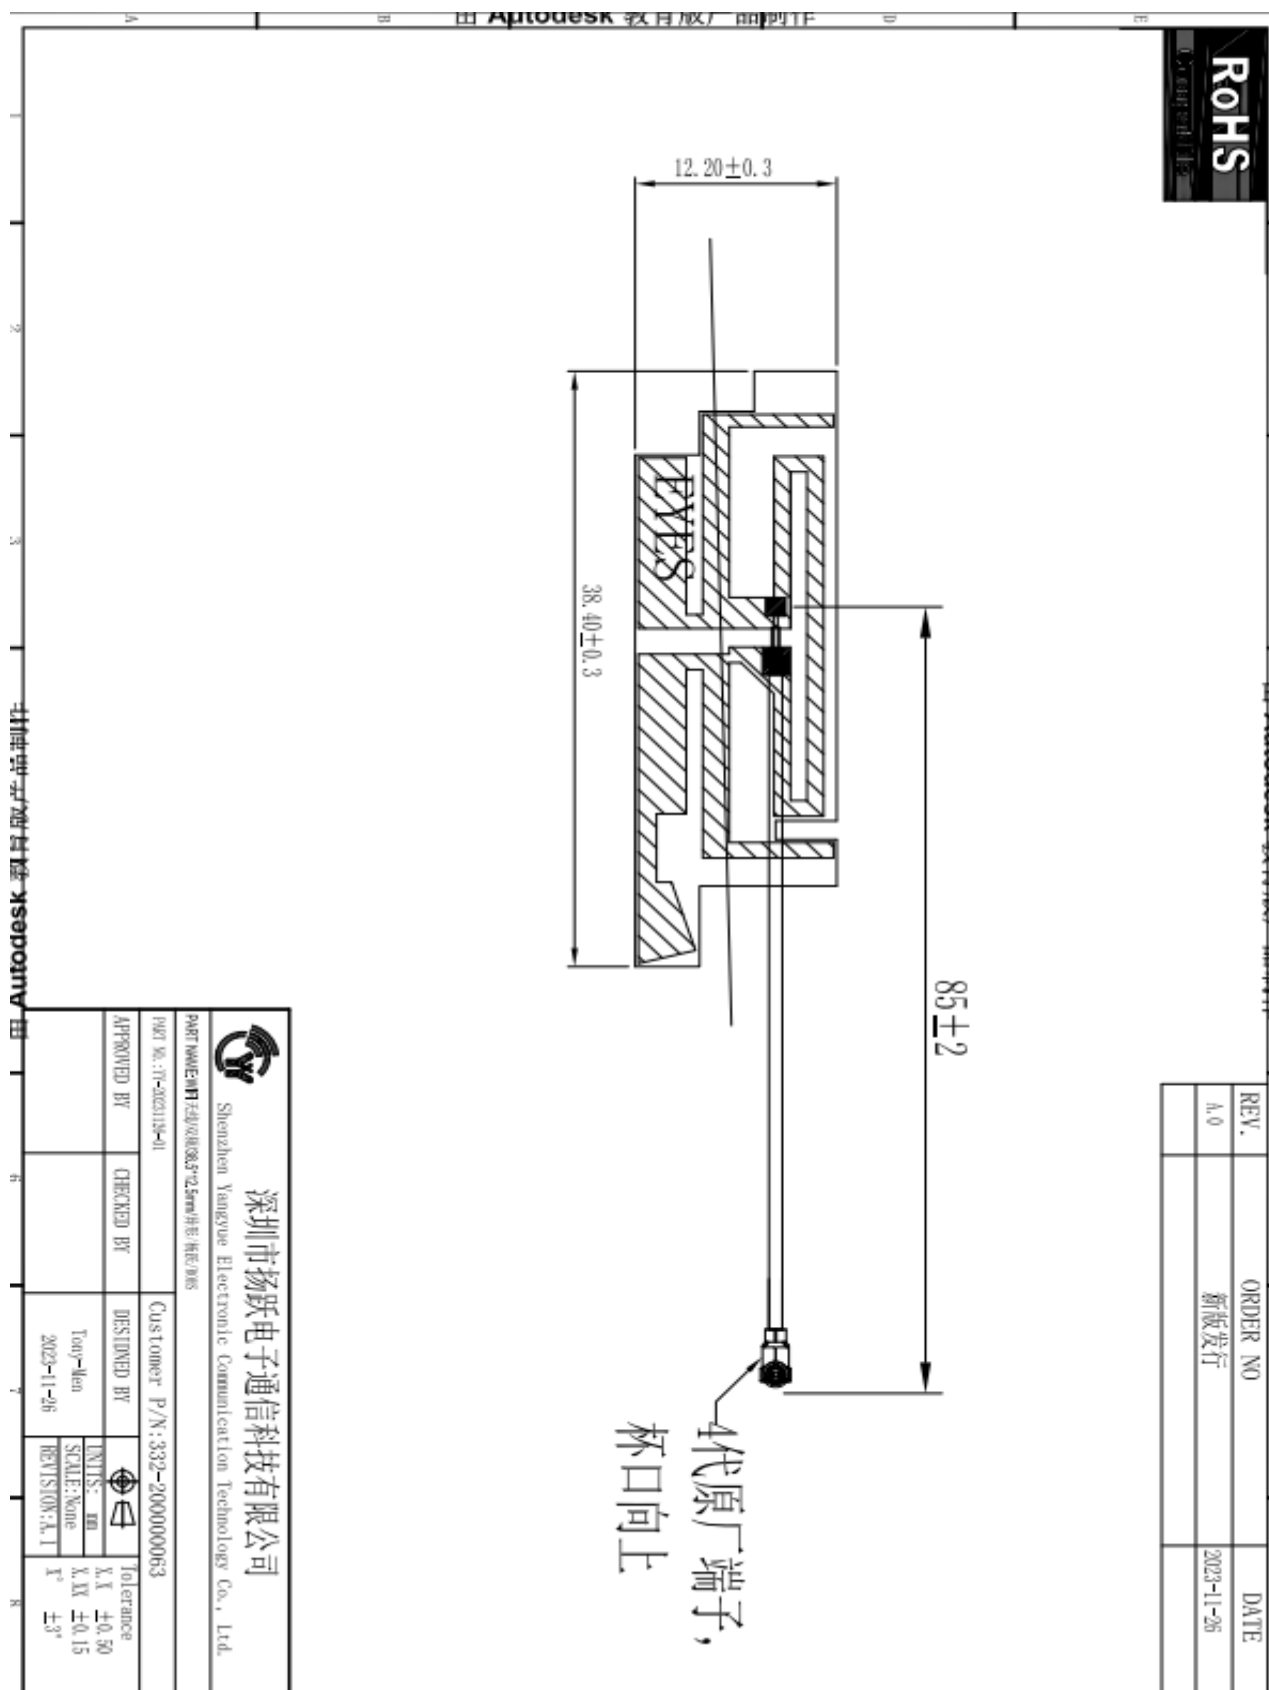

Shenzhen Yangyue Electronic Communication Technology Co., Ltd

地址: 东莞市虎门镇大宁社区浦江路2号创富赢家产业园A栋6楼

# 深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

## 7 Reliability tests

### 7.1 Test content

No	试验项目	试验方法	判定基准
1	盐水喷雾试验	把盐浓度 5%的溶液喷雾 24HR	不能有变色, 歪 (变形) 脱落等的缺点 腐蚀面积不能过大

### 7.2 Test results

NO	样品数	试验期间	实验结果	备注
1	10	24 小时	OK	技术等级为 9 级 腐蚀<0.4mm

## 8 Conclusion

以上数据表明此 2.4GHz/5.1GHZ 天线参数均已达标。性能以装机后的实际使用效果为准。

From the above test results, we can know the electrical performance of the antenna is seems good.

Shenzhen Yangyue Electronic Communication Technology Co., Ltd, look forward to your confirmation, thank you for your cooperation !