

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Furniture Power Distribution Unit

Model No.: YH-004

FCC ID: 2BEF5YH-004

Report No.: E04A24010302F00301

Issue Date: March 28, 2024

Prepared for

Dongguan Yihong Technology Co., LTD

**No. 1, Liyatang Industrial 2nd Road, Lincun, Tangxia Town, Dongguan
City, Guangdong Province**

Prepared by

Guangdong Global Testing Technology Co., Ltd.

**Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan
Lake Park, Dongguan city, Guangdong, People' s Republic of China,
523808**

**This report shall not be reproduced, except in full, without the written approval of
Guangdong Global Testing Technology Co., Ltd.**

VERIFICATION OF COMPLIANCE

Applicant:	Dongguan Yihong Technology Co., LTD No. 1, Liyatang Industrial 2nd Road, Lincun, Tangxia Town, Dongguan City, Guangdong Province
Manufacturer:	Dongguan Yihong Technology Co., LTD No. 1, Liyatang Industrial 2nd Road, Lincun, Tangxia Town, Dongguan City, Guangdong Province
Product Description:	Furniture Power Distribution Unit
Trade Mark:	/
Model Number:	YH-004

We hereby certify that:

The above equipment was tested by Guangdong Global Testing Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.209(2022).

Prepared By:



Jok Yang

Project Engineer

Checked By:



Alan He

Laboratory Leader

Approved By:



Shawn Wen

Laboratory Manager



Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	E04A24010302F00301

Table of Contents

1 GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 RELATED SUBMITTAL(S) / GRANT(S)	5
1.3 TEST METHODOLOGY	5
1.4 SPECIAL ACCESSORIES	5
1.5 EQUIPMENT MODIFICATIONS	5
1.6 TEST FACILITY	5
2 SYSTEM TEST CONFIGURATION.....	6
2.1 EUT CONFIGURATION	6
2.2 EUT EXERCISE	6
2.3 TEST PROCEDURE	6
2.4 CONFIGURATION OF TESTED SYSTEM.....	7
3 SUMMARY OF TEST RESULTS.....	7
4 TEST SYSTEM UNCERTAINTY.....	8
5 CONDUCTED EMISSIONS TEST	9
5.1 MEASUREMENT PROCEDURE	9
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
5.3 MEASUREMENT EQUIPMENT USED.....	9
5.4 CONDUCTED EMISSION LIMIT	9
5.5 MEASUREMENT RESULT	10
5.6 CONDUCTED MEASUREMENT PHOTO.....	13
6 RADIATED EMISSION TEST.....	14
6.1 MEASUREMENT PROCEDURE	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
6.3 MEASUREMENT EQUIPMENT USED.....	15
6.4 RADIATED EMISSION LIMIT	15
6.5 MEASUREMENT RESULT	17
6.6 RADIATED MEASUREMENT PHOTOS.....	23
7 20DB BANDWIDTH.....	24
7.1 20dB BANDWIDTH LIMIT	24
7.2 TEST INSTRUMENTS.....	24
7.3 TEST PROCEDURE	24
7.4 TEST SETUP.....	24
7.5 TEST RESULT	24
8 ANTENNA APPLICATION	26
8.1 ANTENNA REQUIREMENT	26
8.2 RESULT	26

1 General Information

1.1 Product Description

Characteristics	Description
Product Name	Furniture Power Distribution Unit
Model number	YH-004
Operation Mode	Wireless Charging
Input Rating	12A 120Vac 60Hz 1500W
Power Supply	120V/60Hz
Operating Frequency	110-205KHz
Wireless Charging Power	15W(Max)
Modulation Technique	FSK
Antenna Type	Coil Antenna
Software version	V1.0
Hardware version	V1.0
Sample receipt date	March 5, 2024

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: 2BEF5YH-004 filing to comply with the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

Name of Firm : Guangdong Global Testing Technology Co., Ltd.

Site Location : Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city, Guangdong, People's Republic of China, 523808.

2 System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

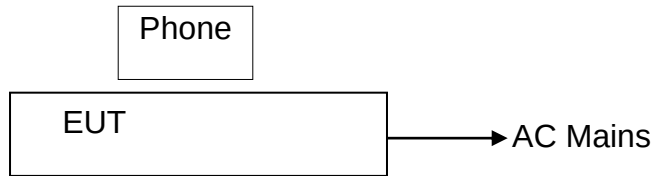


Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	Furniture Power Distribution Unit	/	YH-004	2BEF5YH-004	EUT
2.	Adapter	/	580245A087	N/A	Support Equipment
3.	phone	Apple	A2176	N/A	Support Equipment

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.209	Radiated Emission	Compliant
§2.1049	20dB Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

4 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
20dB Bandwidth	$\pm 9.2\text{ppm}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%

5 Conducted Emissions Test

5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.2 Test SET-UP (Block Diagram of Configuration)

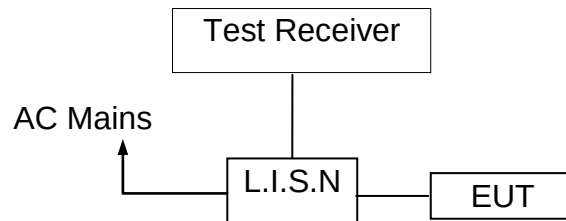

5.3 Measurement Equipment Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Shielded Room	CHENG YU	8m*5m*4m	N/A	2022/10/29	2025/10/28
EMI Test Receiver	Rohde & Schwarz	ESR3	102647	2023/09/18	2024/09/17
LISN/AMN	Rohde & Schwarz	ENV216	102843	2023/09/18	2024/09/17
NNLK 8129 RC	Schwarzbeck	NNLK 8129 RC	5046	2023/03/30	2024/03/29
Test Software	Farad	EZ-EMC (Ver. EMC-con-3A1 1+)	N/A	N/A	N/A

5.4 Conducted Emission Limit

Conducted Emission

Frequency(MHz)

Quasi-peak

Average

0.15-0.5

66-56

56-46

0.5-5.0

56

46

5.0-30.0

60

50


Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.5 Measurement Result


Operation Mode:	TX	Test Date :	2024/3/6
Frequency Range:	0.15MHz~30MHz	Temperature :	25.5℃
Test Result:	PASS	Humidity :	54 %RH
Test By:	Fink		

We pretested modes (Wireless Charging(15W), Wireless Charging (10W), Wireless Charging (7.5W) , Wireless Charging(5W)) for EUT. The worst test data see follow the table.

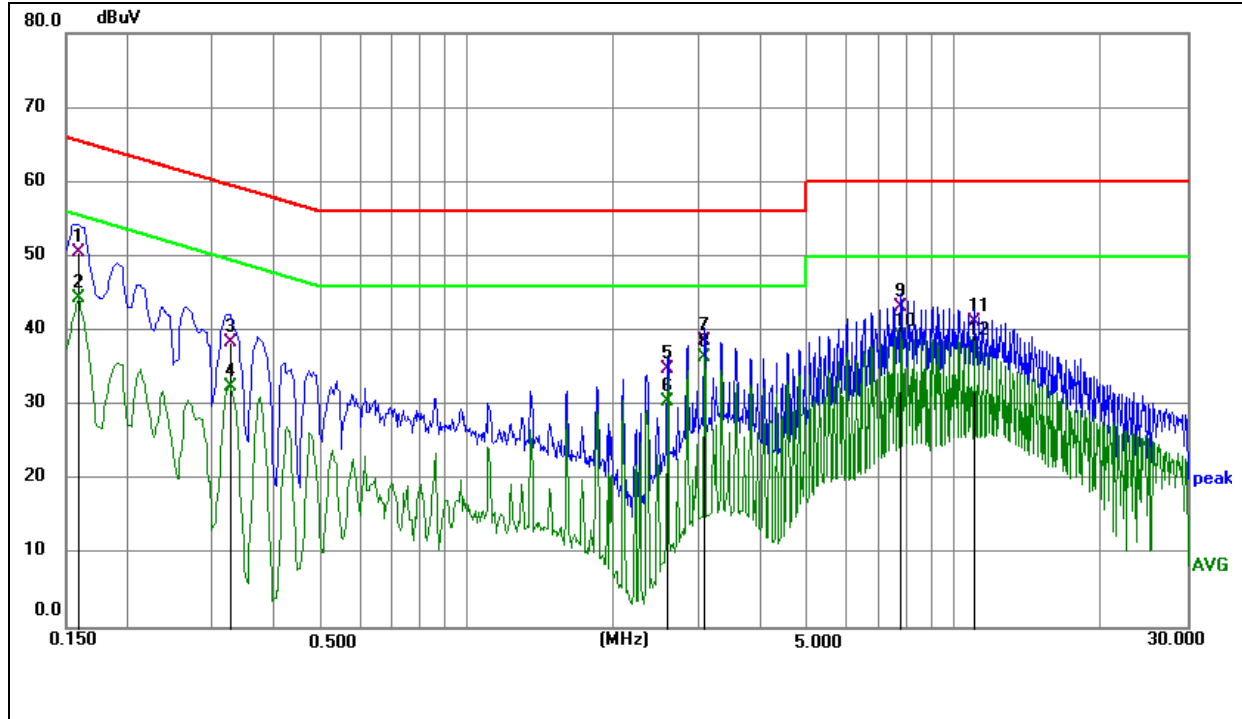Test mode: Wireless Charging 15W

Limit:	FCC Part 15 C Conduction	Phase:	L1
EUT:	Furniture Power Distribution Unit	Test Time:	2024/3/6
M/N.:	YH-004	Power Rating:	AC120V/60Hz
Mode:	Wireless Charging 15W	Test Engineer:	Fink

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1590	40.58	9.90	50.48	65.52	-15.04	QP	
2	0.1590	34.44	9.90	44.34	55.52	-11.18	AVG	
3	0.3255	28.41	9.91	38.32	59.57	-21.25	QP	
4	0.3255	22.64	9.91	32.55	49.57	-17.02	AVG	
5	2.5800	24.75	10.09	34.84	56.00	-21.16	QP	
6	2.5800	20.36	10.09	30.45	46.00	-15.55	AVG	
7	3.0705	28.63	10.07	38.70	56.00	-17.30	QP	
8	3.0705	26.29	10.07	36.36	46.00	-9.64	AVG	
9	7.7640	32.53	10.68	43.21	60.00	-16.79	QP	
10	7.7640	28.52	10.68	39.20	50.00	-10.80	AVG	
11	10.9725	30.30	10.99	41.29	60.00	-18.71	QP	
12	10.9725	26.99	10.99	37.98	50.00	-12.02	AVG	

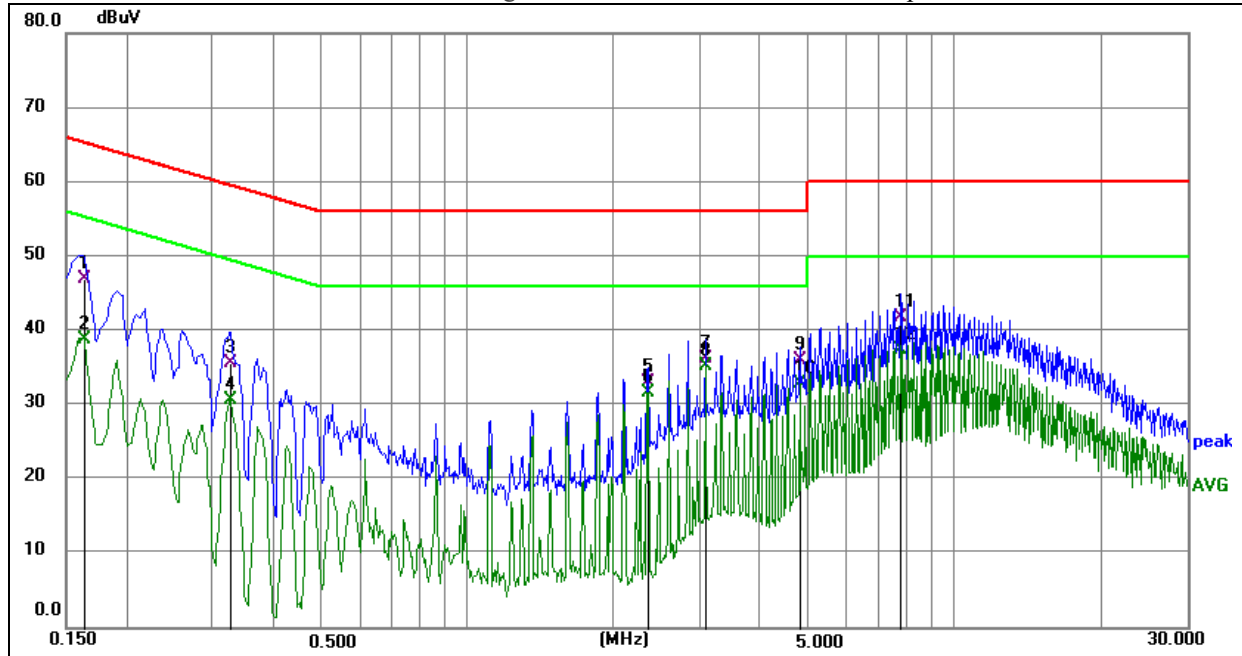


Limit: FCC Part 15 C Conduction
EUT: Furniture Power Distribution Unit
M/N.: YH-004
Mode: Wireless Charging 15W

Phase: N
Test Time: 2024/3/6
Power Rating: AC120V/60Hz
Test Engineer: Fink

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1635	36.97	9.96	46.93	65.28	-18.35	QP	
2	0.1635	28.93	9.96	38.89	55.28	-16.39	AVG	
3	0.3255	25.79	9.89	35.68	59.57	-23.89	QP	
4	0.3255	20.77	9.89	30.66	49.57	-18.91	AVG	
5	2.3460	22.95	10.19	33.14	56.00	-22.86	QP	
6	2.3460	21.54	10.19	31.73	46.00	-14.27	AVG	
7	3.0795	26.00	10.20	36.20	56.00	-19.80	QP	
8	3.0795	25.02	10.20	35.22	46.00	-10.78	AVG	
9	4.8075	25.82	10.28	36.10	56.00	-19.90	QP	
10	4.8075	22.49	10.28	32.77	46.00	-13.23	AVG	
11	7.7640	31.26	10.61	41.87	60.00	-18.13	QP	
12	7.7640	26.81	10.61	37.42	50.00	-12.58	AVG	

5.6 Conducted Measurement Photo

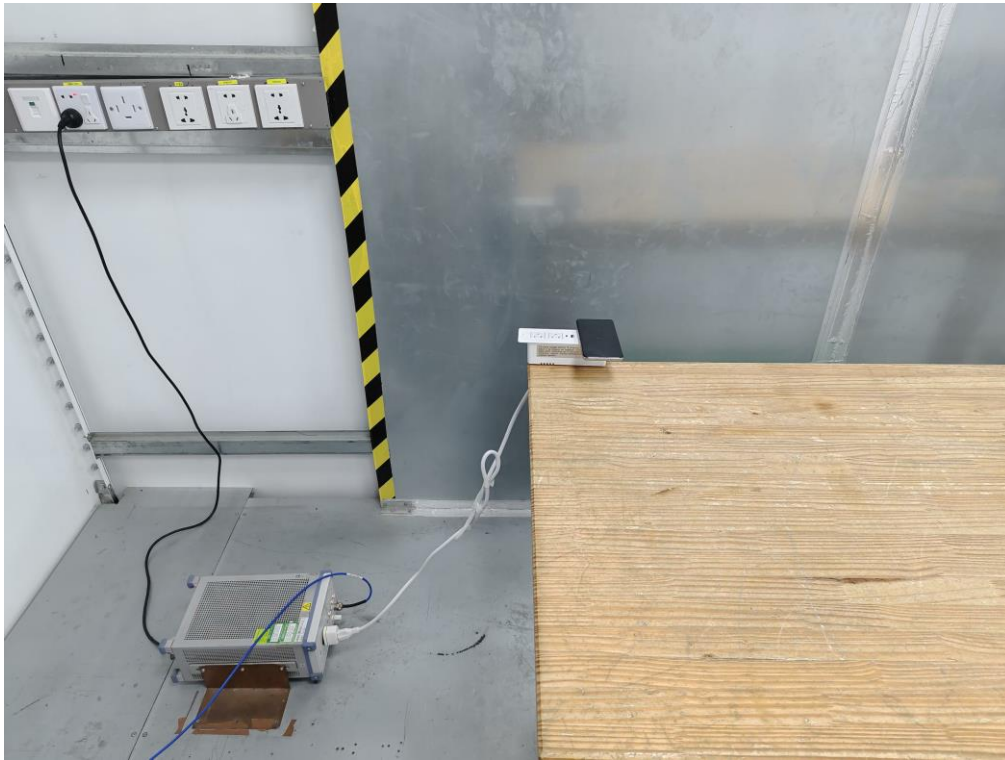


6 Radiated Emission Test

6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

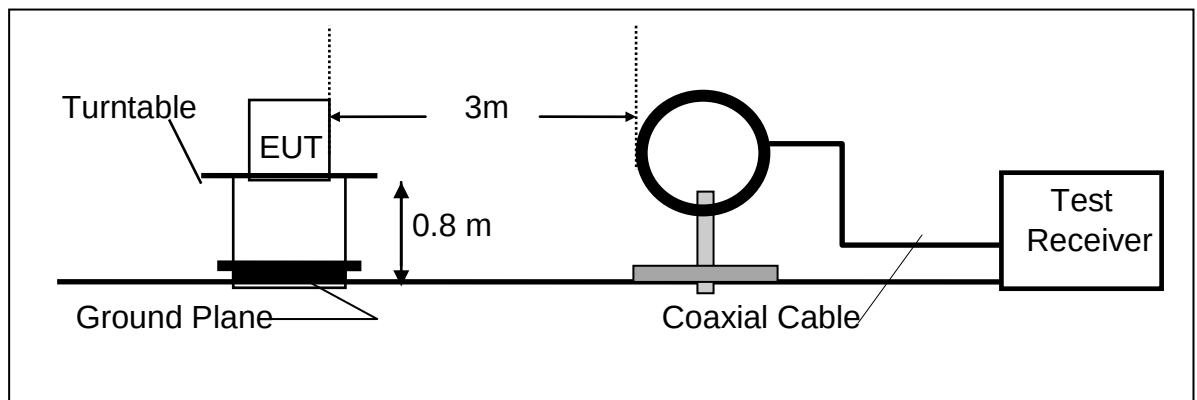

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

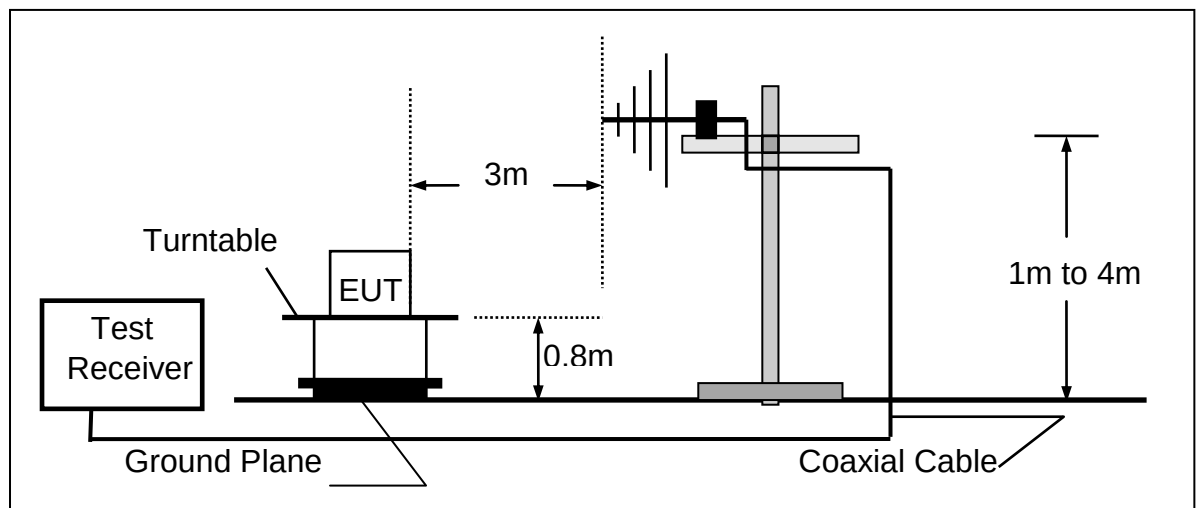

6.3 Measurement Equipment Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2146	2022/08/30	2025/08/29
EMI Test Receiver	Rohde & Schwarz	ESCI3	101409	2023/09/18	2024/09/17
Spectrum Analyzer	KEYSIGHT	N9020A	MY51283932	2023/09/18	2024/09/17
Pre-Amplifier	HzEMC	HPA-9K0130	HYP A21001	2023/09/18	2024/09/17
Biconilog Antenna	Schwarzbeck	VULB 9168	01315	2022/10/10	2025/10/09
Biconilog Antenna	ETS	3142E	00243646	2022/03/23	2025/03/22
Loop Antenna	ETS	6502	243668	2022/03/30	2025/03/29
Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A	N/A

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	$2400 / F(\text{KHz})$	300m	$10000 * 2400/F(\text{KHz})$	$20\log 2400/F(\text{KHz}) + 80$
0.490 – 1.705	$24000 / F(\text{KHz})$	30m	$100 * 24000/F(\text{KHz})$	$20\log 24000/F(\text{KHz}) + 40$
1.705 – 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 – 88.0	100	3m	100	$20\log 100$
88.0 – 216.0	150	3m	150	$20\log 150$
216.0 – 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$


15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark: 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.


6.5 Measurement Result

We pretested modes (Wireless Charging(15W), Wireless Charging (10W), Wireless Charging (7.5W), Wireless Charging(5W)) for EUT. The worst mode (Wireless Charging (15W)) test data see follow the table.

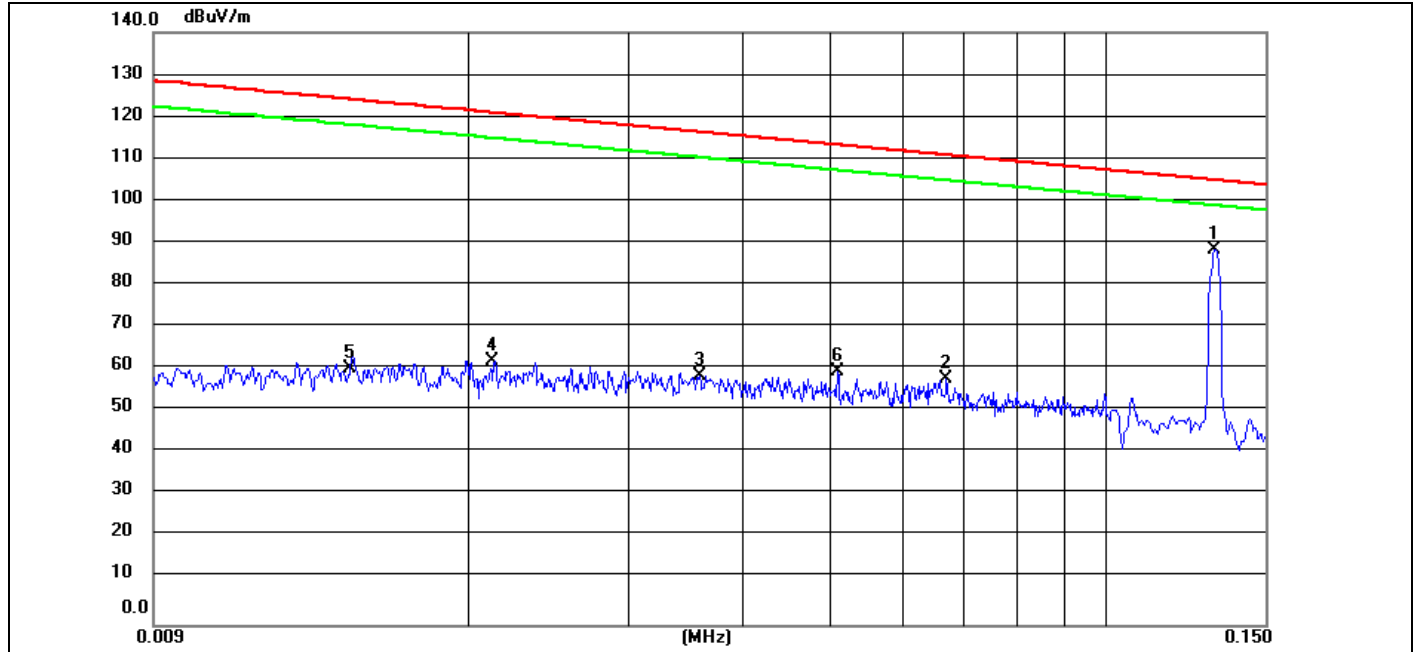

Limit:	FCC Part 15C 3m Radiation	Antenna:	coaxial
EUT:	Furniture Power Distribution Unit	Temperature:	24.3°C
M/N.:	YH-004	Humidity:	53.2%RH
Mode:	Wireless Charging 15W	Power Rating:	AC 120V/60Hz
Test Engineer:	Vier	Test Time:	2024/3/6

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dB/m	dB	Detector
1	*	0.1317	69.23	19.64	88.87	105.21	-16.34	peak
2		0.0668	38.42	19.69	58.11	111.10	-52.99	peak
3		0.0358	39.07	20.08	59.15	116.51	-57.36	peak
4		0.0212	42.13	20.27	62.40	121.06	-58.66	peak
5		0.0148	40.45	20.36	60.81	124.18	-63.37	peak
6		0.0507	40.09	19.93	60.02	113.49	-53.47	peak

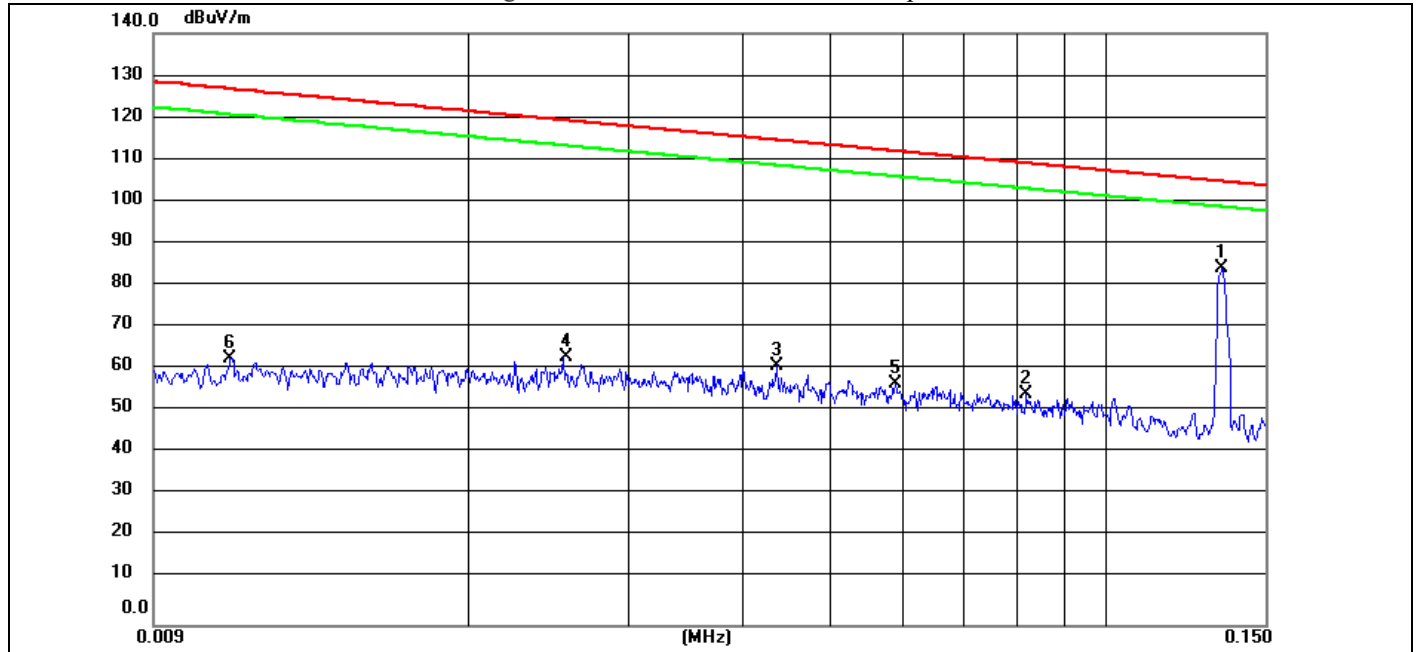

Limit: FCC Part 15C 3m Radiation
EUT: Furniture Power Distribution Unit
M/N.: YH-004
Mode: Wireless Charging 15W
Test Engineer: Vier

Antenna: coplanar
Temperature: 24.3°C
Humidity: 53.2%RH
Power Rating: AC 120V/60Hz
Test Time: 2024/3/6

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dB/m	dB	
1	*	0.1344	64.97	19.64	84.61	105.03	-20.42	peak
2		0.0820	35.10	19.70	54.80	109.32	-54.52	peak
3		0.0434	41.40	20.01	61.41	114.84	-53.43	peak
4		0.0253	43.16	20.21	63.37	119.53	-56.16	peak
5		0.0587	37.53	19.81	57.34	112.22	-54.88	peak
6		0.0110	42.75	20.42	63.17	126.76	-63.59	peak


Note: (1) All

Readings are Peak Value.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) The average measurement was not performed when the peak measured data under the limit of average detection.


(4) EUT lying on the table position is the worst case result in the report.

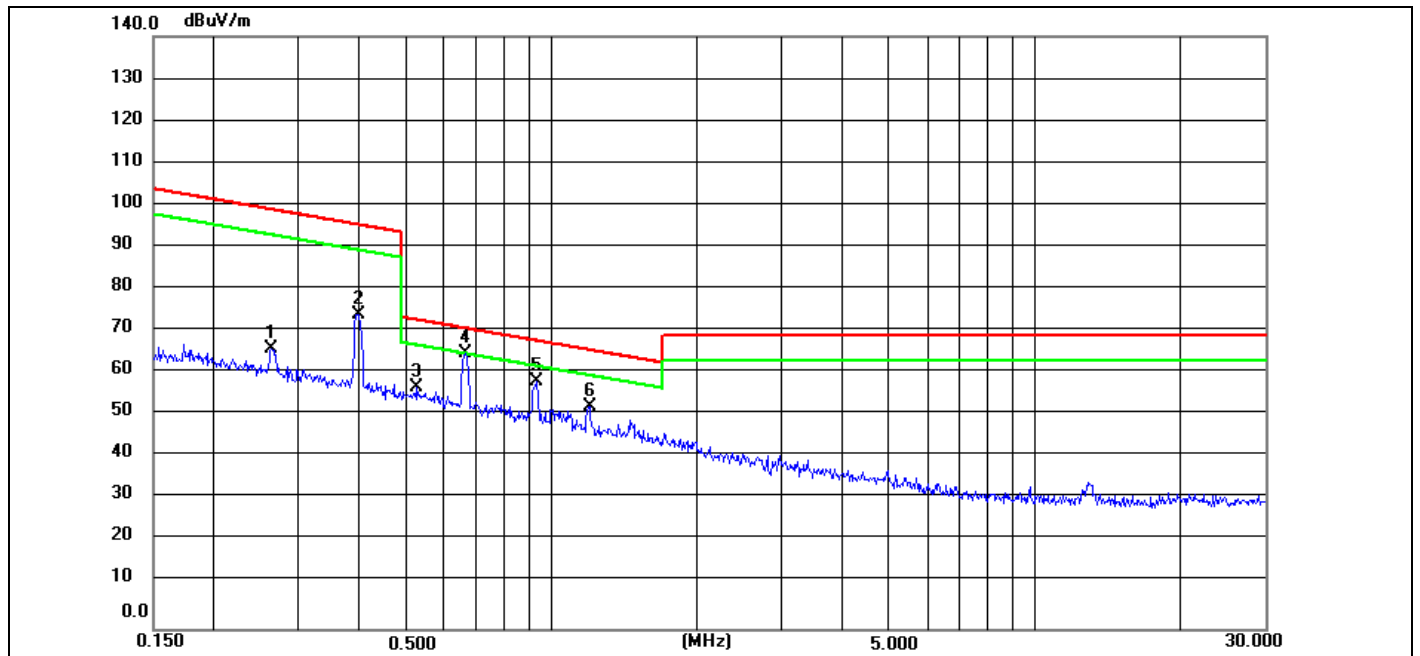

Limit: FCC Part 15C 3m Radiation
EUT: Fumiture Power Distribion Unit
M/N.: YH-004
Mode: Wireless Charging 15W
Test Engineer: Vier

Antenna: coaxial
Temperature: 24.3°C
Humidity: 53.2%RH
Power Rating: AC 120V/60Hz
Test Time: 2023/12/6

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dB/m	dB	
1		0.2630	46.59	19.63	66.22	99.20	-32.98	peak
2		0.3976	54.89	19.61	74.50	95.61	-21.11	peak
3		0.5265	37.62	19.58	57.20	73.18	-15.98	peak
4	*	0.6647	45.79	19.54	65.33	71.16	-5.83	peak
5		0.9331	39.26	19.46	58.72	68.22	-9.50	peak
6		1.1970	33.38	19.46	52.84	66.06	-13.22	peak

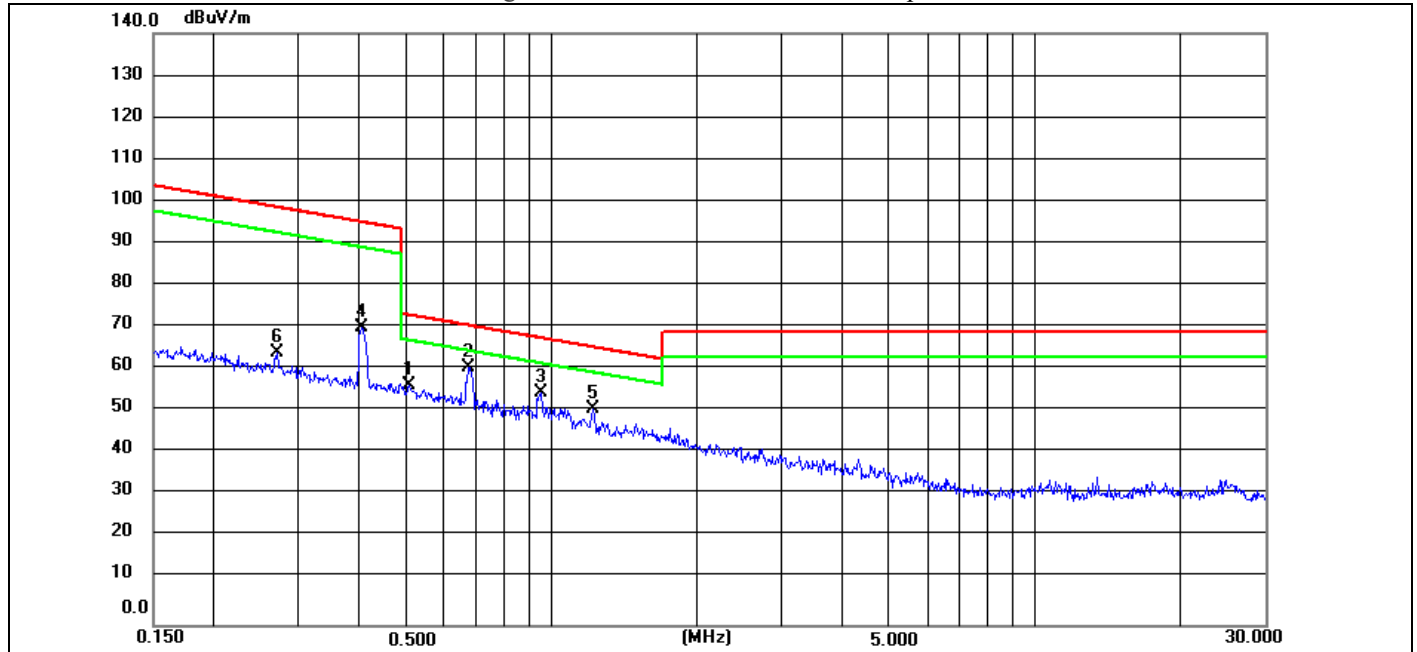


Limit: FCC Part 15C 3m Radiation
EUT: Fumiture Power Distribution Unit
M/N.: YH-004
Mode: Wireless Charging 15W
Test Engineer: Vier

Antenna: coplanar
Temperature: 24.3°C
Humidity: 53.2%RH
Power Rating: AC 120V/60Hz
Test Time: 2023/12/6

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.5073	37.34	19.59	56.93	73.50	-16.57	peak
2	*	0.6718	41.60	19.54	61.14	71.07	-9.93	peak
3		0.9531	35.53	19.46	54.99	68.04	-13.05	peak
4		0.4040	51.04	19.61	70.65	95.48	-24.83	peak
5		1.2161	31.80	19.46	51.26	65.93	-14.67	peak
6		0.2700	44.82	19.63	64.45	98.97	-34.52	peak


- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) EUT lying on the table position is the worst case result in the report.

We pretested modes (Wireless Charging(15W), Wireless Charging (10W), Wireless Charging (7.5W), Wireless Charging(5W)) for EUT. The worst test data (Wireless Charging(15W+5W+2.5W)) see follow the table.

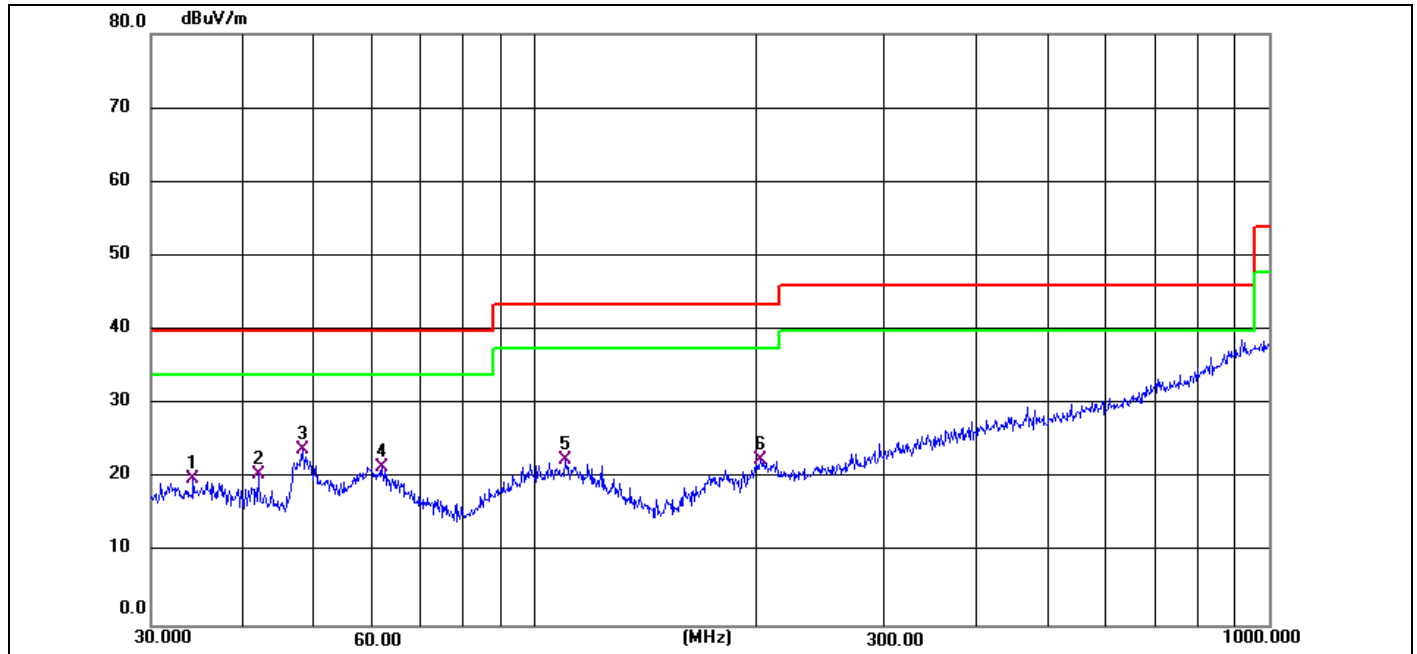

Limit:	FCC Part 15C 3m Radiation	Antenna:	Horizontal
EUT:	Furniture Power Distribution Unit	Temperature:	24.3°C
M/N.:	YH-004	Humidity:	54%RH
Mode:	Wireless Charging 15W	Power Rating:	AC 120V/60Hz
Test Engineer:	Big	Test Time:	2024/3/6

No .	Frequenc y (MHz)	Reading Level(dBuV)	Correct Factor(dB/m)	Measure- ment(dBuV/m)	Limit (dBuV/m)	Over (dB)	Detect or	Comment
1	34.2760	26.97	-7.15	19.82	40.00	-20.18	QP	
2	42.0065	29.95	-9.44	20.51	40.00	-19.49	QP	
3	48.3316	33.00	-9.22	23.78	40.00	-16.22	QP	
4	61.9950	27.10	-5.58	21.52	40.00	-18.48	QP	
5	110.1816	27.06	-4.51	22.55	43.50	-20.95	QP	
6	202.8103	27.49	-5.00	22.49	43.50	-21.01	QP	

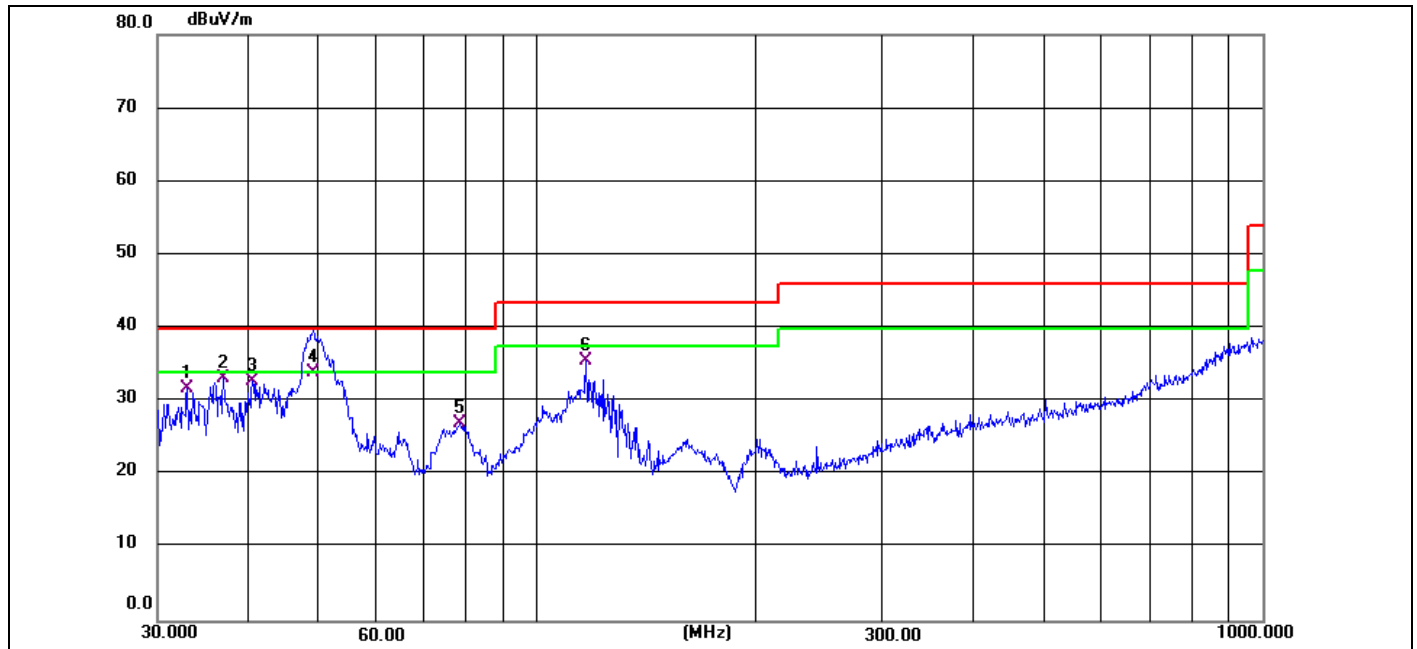

Limit: FCC Part 15C 3m Radiation
EUT: Furniture Power Distribution Unit
M/N.: YH-004
Mode: Wireless Charging 15W
Test Engineer: Big

Antenna: Vertical
Temperature: 24.3°C
Humidity: 54%RH
Power Rating: AC 120V/60Hz
Test Time: 2024/3/6


No .	Frequenc y (MHz)	Reading Level(dBuV)	Correct Factor(dB/m)	Measure- ment(dBuV/m)	Limit (dBuV/m)	Over (dB)	Detect or	Comment
1	32.9791	39.06	-7.29	31.77	40.00	-8.23	QP	
2	37.0250	41.21	-8.05	33.16	40.00	-6.84	QP	
3	40.5591	42.28	-9.48	32.80	40.00	-7.20	QP	
4	49.1865	43.20	-9.20	34.00	40.00	-6.00	QP	
5	78.4133	37.73	-10.68	27.05	40.00	-12.95	QP	
6	116.9494	40.76	-5.23	35.53	43.50	-7.97	QP	

6.6 Radiated Measurement Photos

9kHz-30MHz



30MHz-1GHz

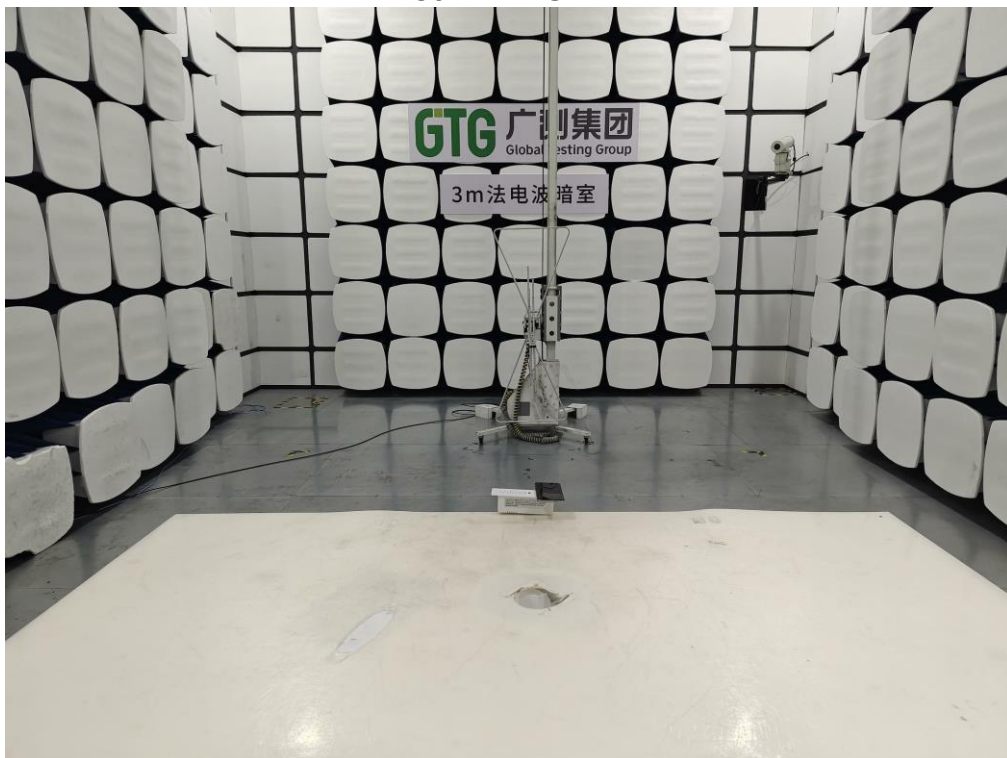

7 20db Bandwidth

7.1 20dB Bandwidth Limit

None: for reporting purposed only.


7.2 Test Instruments

Refer a test equipment and calibration data table in this test report.

7.3 Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1KHz RBW and 3KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

7.4 Test Setup




7.5 Test Result

phone charging

Frequency (KHz)	20dB Bandwidth (KHz)	Results
127.62	2.695	PASS

20 dB Bandwidth Test plot

phone charging

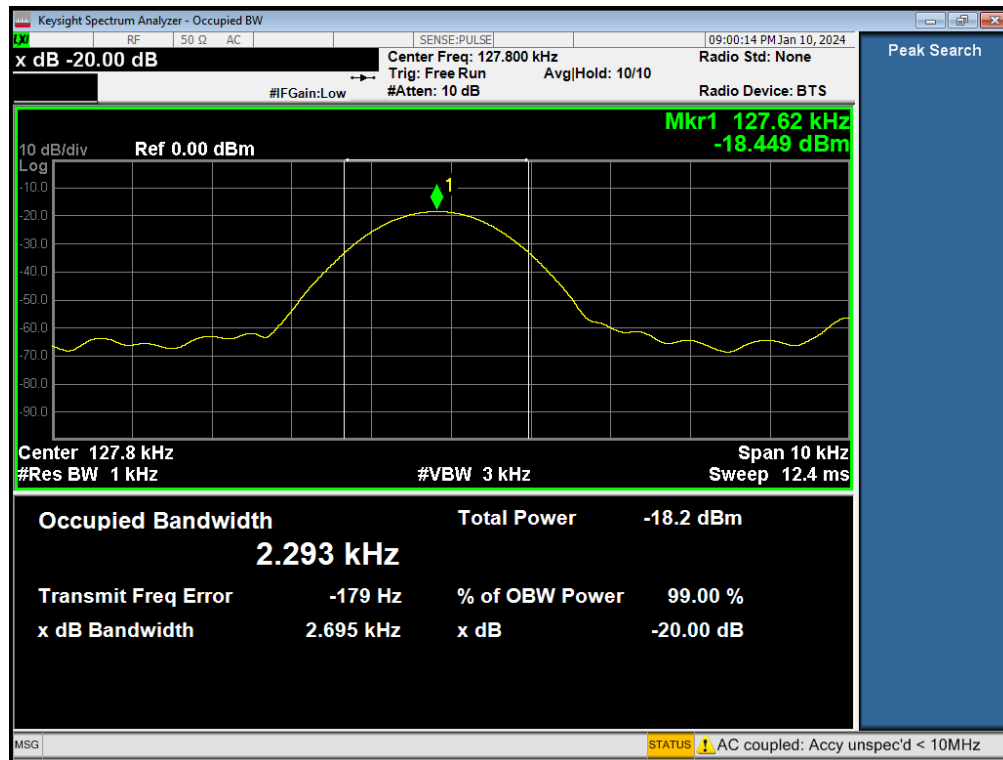

8 Antenna Application

8.1 Antenna requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


8.2 Result



The EUT's antenna, permanent attached antenna, used an Induction coil and integrated on PCB, The antenna's gain meets the requirement.


APPENDIX (Photos of EUT)

External

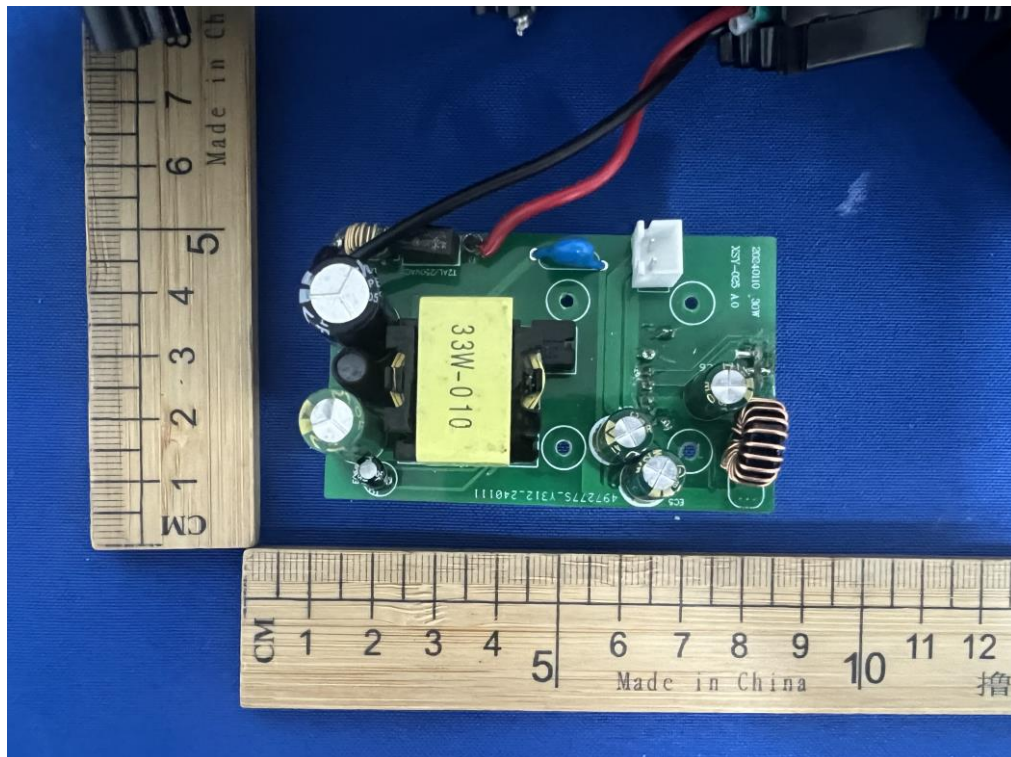

Internal

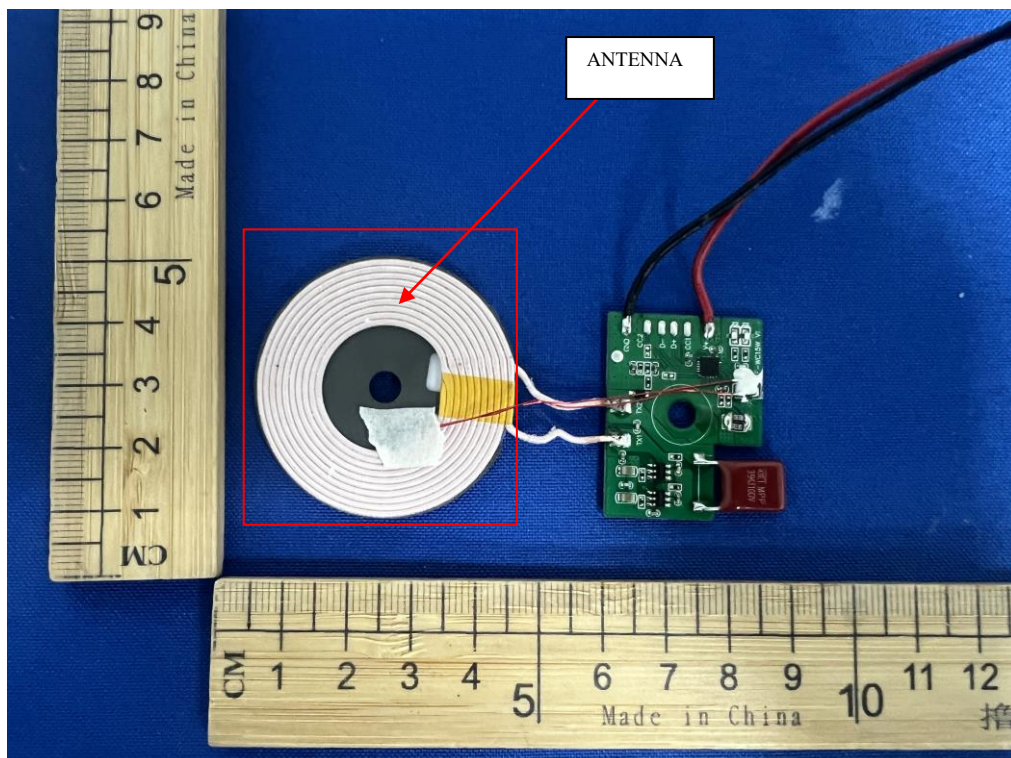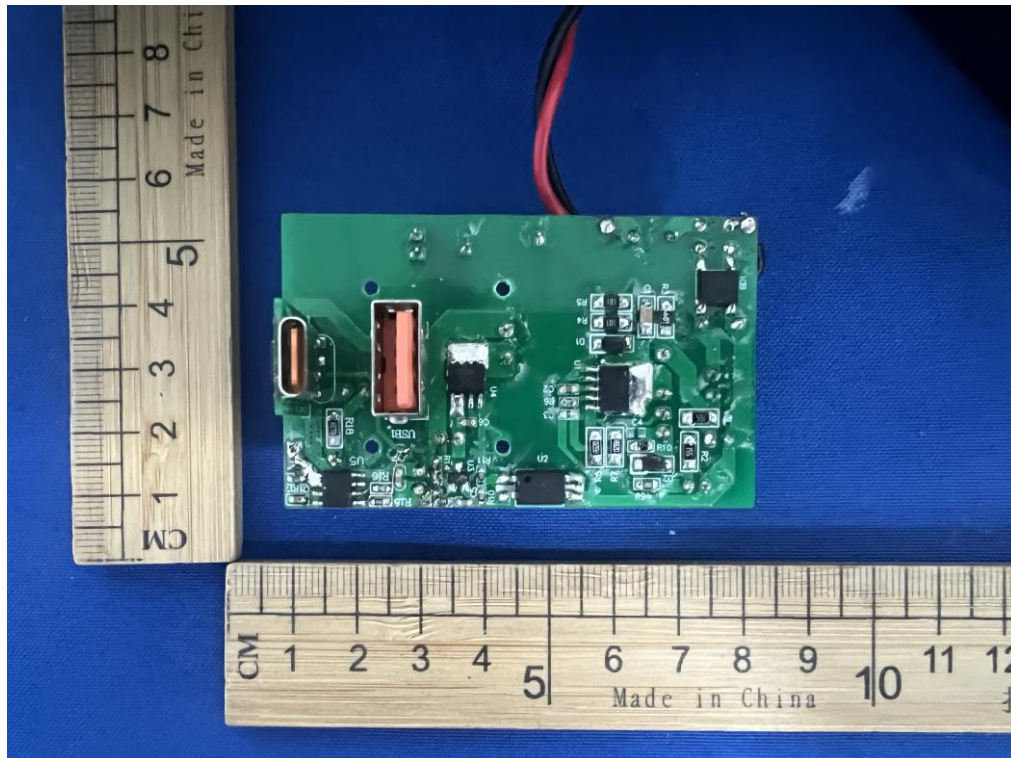

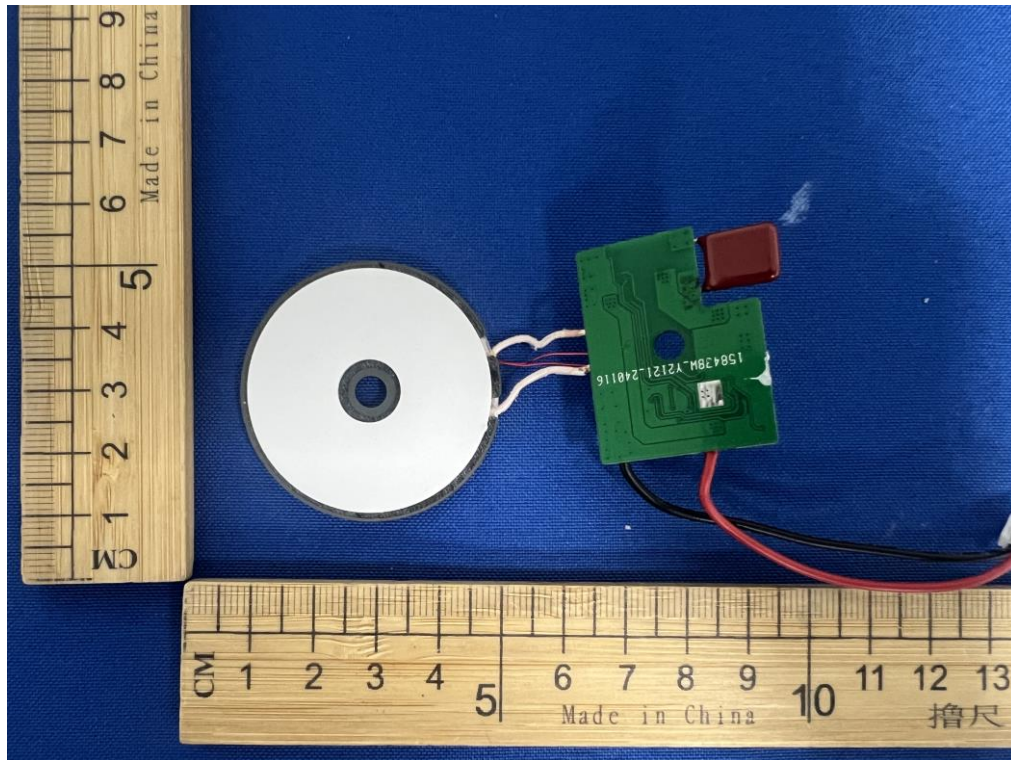

--- END OF REPORT---