



FCC Part 15C Test Report

FCC ID: 2BEJO-JX2121WI

Applicant: Haining Xingtong Zhaoming Co., Ltd

Address: #202, 2F, No.25 Shangyu Road Haining Zhejiang China 314400

Manufacturer: Haining Xingtong Zhaoming Co., Ltd

Address: #202, 2F, No.25 Shangyu Road Haining Zhejiang China 314400

EUT: energy meter

Trade Mark: WAMARIN

Model Number: JX2121-WI
JX2161-ZB, JX4121-WI, JX4161-ZB, JX7321-WI, JX7361-ZB

Date of Receipt: Jan. 12, 2024

Test Date: Jan. 12, 2024 - Jan. 25, 2024

Date of Report: Jan. 25, 2024

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20240125055E

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



| Table of Contents | Page |
|--|-------------|
| 1 . SUMMARY OF TEST RESULTS | 4 |
| 1.1 MEASUREMENT UNCERTAINTY | 4 |
| 2 . GENERAL INFORMATION | 5 |
| 2.1 GENERAL DESCRIPTION OF EUT | 5 |
| 2.2 DESCRIPTION OF TEST MODES | 6 |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 6 |
| 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) | 7 |
| 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING | 7 |
| 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS | 8 |
| 3 . EMC EMISSION TEST | 9 |
| 3.1 CONDUCTED EMISSION MEASUREMENT | 9 |
| 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS | 9 |
| 3.1.2 TEST PROCEDURE | 9 |
| 3.1.3 DEVIATION FROM TEST STANDARD | 9 |
| 3.1.4 TEST SETUP | 10 |
| 3.1.5 EUT OPERATING CONDITIONS | 10 |
| 3.1.6 TEST RESULTS | 10 |
| 3.2 RADIATED EMISSION MEASUREMENT | 13 |
| 3.2.1 RADIATED EMISSION LIMITS | 13 |
| 3.2.2 TEST PROCEDURE | 14 |
| 3.2.3 DEVIATION FROM TEST STANDARD | 14 |
| 3.2.4 TEST SETUP | 14 |
| 3.2.5 EUT OPERATING CONDITIONS | 15 |
| 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ) | 16 |
| 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ) | 17 |
| 3.2.8 TEST RESULTS (1GHZ~25GHZ) | 19 |
| 3.3 RADIATED BAND EMISSION MEASUREMENT | 23 |
| 3.3.1 TEST REQUIREMENT: | 23 |
| 3.3.2 TEST PROCEDURE | 23 |
| 3.3.3 DEVIATION FROM TEST STANDARD | 23 |
| 3.3.4 TEST SETUP | 24 |
| 3.3.5 EUT OPERATING CONDITIONS | 24 |
| 3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT | 29 |
| 3.4.1 APPLICABLE STANDARD | 29 |
| 3.4.2 TEST PROCEDURE | 29 |
| 3.4.3 DEVIATION FROM STANDARD | 29 |
| 3.4.4 TEST SETUP | 29 |



| Table of Contents | Page |
|--|-------------|
| 3.4.5 EUT OPERATION CONDITIONS | 29 |
| 3.4.6 TEST RESULTS | 29 |
| 4 . AVERAGE OUTPUT POWER | 33 |
| 4.1 APPLIED PROCEDURES / LIMIT | 33 |
| 4.1.1 TEST PROCEDURE | 33 |
| 4.1.2 DEVIATION FROM STANDARD | 33 |
| 4.1.3 TEST SETUP | 33 |
| 4.1.4 EUT OPERATION CONDITIONS | 33 |
| 4.1.5 TEST RESULTS | 34 |
| 5 . POWER SPECTRAL DENSITY TEST | 37 |
| 5.1 APPLIED PROCEDURES / LIMIT | 37 |
| 5.1.1 TEST PROCEDURE | 37 |
| 5.1.2 DEVIATION FROM STANDARD | 37 |
| 5.1.3 TEST SETUP | 37 |
| 5.1.4 EUT OPERATION CONDITIONS | 37 |
| 5.1.5 TEST RESULTS | 38 |
| 6 . 6DB BANDWIDTH TEST | 41 |
| 6.1 APPLIED PROCEDURES / LIMIT | 41 |
| 6.1.1 TEST PROCEDURE | 41 |
| 6.1.2 DEVIATION FROM STANDARD | 41 |
| 6.1.3 TEST SETUP | 41 |
| 6.1.4 EUT OPERATION CONDITIONS | 41 |
| 6.1.5 TEST RESULTS | 42 |
| 7 . ANTENNA REQUIREMENT | 45 |
| 7.1 STANDARD REQUIREMENT | 45 |
| 7.2 EUT ANTENNA | 45 |
| 8 . TEST SEUUP PHOTO | 45 |
| 9 . EUT PHOTO | 45 |



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C | | | |
|---------------------------------|--|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| 15.207 | Conducted Emission | PASS | |
| 15.205, 15.209, 15.247(d) | Radiated Spurious Emission | PASS | |
| 15.205, 15.247(d) | Band Edge Emission& Conducted Spurious Emissions | PASS | |
| 15.247(b) | Average Output Power | PASS | |
| 15.247(a)(2) | 6dB Bandwidth | PASS | |
| 15.247(e) | Power Spectral Density | PASS | |
| 15.203 | Antenna Requirement | PASS | |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

| No. | Item | Uncertainty |
|-----|------------------------------|-------------------------|
| 1 | Conducted Emission Test | $\pm 2.56\text{dB}$ |
| 2 | RF power,conducted | $\pm 0.42\text{dB}$ |
| 3 | Spurious emissions,conducted | $\pm 2.76\text{dB}$ |
| 4 | All emissions,radiated(<1G) | $\pm 3.65\text{dB}$ |
| 5 | All emissions,radiated(>1G) | $\pm 4.89\text{dB}$ |
| 6 | Temperature | $\pm 0.5^\circ\text{C}$ |
| 7 | Humidity | $\pm 2\%$ |
| 8 | 6dB Bandwidth | $\pm 0.2\text{MHz}$ |



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

| | |
|------------------------|---|
| Product Name: | energy meter |
| Trademark | WAMARIN |
| Model No.: | JX2121-WI JX2161-ZB, JX4121-WI, JX4161-ZB, JX7321-WI, JX7361-ZB |
| Model Difference | The product's different for model number and appearance color. |
| Operation Frequency: | 2412~2462 MHz for 802.11b/g/nHT20 2422~2452 MHz for 802.11nHT40 |
| Channel numbers: | 11 Channels for 802.11b/g/n(HT20) 7 channels for 802.11nHT40 |
| Channel separation: | 5MHz |
| Modulation technology: | 802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20/40): OFDM(QPSK, BPSK, 16-QAM, 64-QAM) |
| Rate of Transmitter | 802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 150Mbps |
| Antenna Type: | Internal Antenna |
| Antenna gain: | 1.37dBi |
| Power supply: | AC 110-240V~50/60Hz |

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.

2. Channel List(802.11b/g/nHT20)

| Channel | Frequency (GHz) | Channel | Frequency (GHz) |
|---------|-----------------|---------|-----------------|
| 01 | 2.412 | 07 | 2.442 |
| 02 | 2.417 | 08 | 2.447 |
| 03 | 2.422 | 09 | 2.452 |
| 04 | 2.427 | 10 | 2.457 |
| 05 | 2.432 | 11 | 2.462 |
| 06 | 2.437 | | |

Channel List(802.11nHT40)

| Channel | Frequency (GHz) | Channel | Frequency (GHz) |
|---------|-----------------|---------|-----------------|
| 03 | 2.422 | 07 | 2.442 |
| 04 | 2.427 | 08 | 2.447 |
| 05 | 2.432 | 09 | 2.452 |
| 06 | 2.437 | | |



2.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Table with 2 columns: Pretest Mode / Final Test Mode and Description. It lists various test modes (Mode 1-5) for conducted and radiated emissions, including channel configurations like 802.11b, 802.11g, 802.11nHT20, and 802.11nHT40.


Note: 1. The measurements are performed at the highest, middle, lowest available channels. 2. During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test





2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Table with 5 columns: Item, Equipment, Model/Type No., Series No., Note. Row 1: E-1, energy meter, JX2121-WI, N/A, EUT.

Table with 5 columns: Item, Shielded Type, Ferrite Core, Length, Note.

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Table titled 'Max output power Setting' with columns for Test software Version, Mode, Data Rate, and Power Setting of Software across different test programs (802.11b, 802.11g, 802.11n HT20, 802.11n HT40).

**2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS**

Radiation test, Band-edge test and 6db bandwidth test equipment

| Item | Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|----------------------------------|-----------------|-----------|------------|------------------|------------------|
| 1 | Spectrum Analyzer (9kHz-26.5GHz) | Agilent | E4408B | MY50140780 | Nov. 04, 2023 | Nov. 03, 2024 |
| 2 | Test Receiver (9kHz-7GHz) | R&S | ESRP7 | 101393 | Nov. 04, 2023 | Nov. 03, 2024 |
| 3 | Bilog Antenna (30MHz-1GHz) | R&S | VULB9162 | 00306 | Nov. 04, 2023 | Nov. 03, 2024 |
| 4 | Horn Antenna (1GHz-18GHz) | Schwarzbeck | BBHA9120D | 02139 | Nov. 04, 2023 | Nov. 03, 2024 |
| 5 | Horn Antenna (18GHz-40GHz) | A.H. Systems | SAS-574 | 588 | Nov. 04, 2023 | Nov. 03, 2024 |
| 6 | Amplifier (9KHz-6GHz) | Schwarzbeck | BBV9743B | 00153 | Nov. 04, 2023 | Nov. 03, 2024 |
| 7 | Amplifier (1GHz-18GHz) | EMEC | EM01G8GA | 00270 | Nov. 04, 2023 | Nov. 03, 2024 |
| 8 | Amplifier (18GHz-40GHz) | Quanjuda | DLE-161 | 97 | Nov. 04, 2023 | Nov. 03, 2024 |
| 9 | Loop Antenna (9KHz-30MHz) | Schwarzbeck | FMZB1519B | 00014 | Nov. 04, 2023 | Nov. 03, 2024 |
| 10 | RF cables1 (9kHz-1GHz) | ChengYu | 966 | 004 | Nov. 04, 2023 | Nov. 03, 2024 |
| 11 | RF cables2 (1GHz-40GHz) | ChengYu | 966 | 003 | Nov. 04, 2023 | Nov. 03, 2024 |
| 12 | Antenna connector | Florida RF Labs | N/A | RF 01# | Nov. 04, 2023 | Nov. 03, 2024 |
| 13 | Power probe | KEYSIGHT | U2021XA | MY55210018 | Nov. 04, 2023 | Nov. 03, 2024 |
| 14 | Signal Analyzer 9kHz-26.5GHz | Agilent | N9020A | MY55370280 | Nov. 04, 2023 | Nov. 03, 2024 |
| 15 | Test Receiver 20kHz-40GHz | R&S | ESU 40 | 100376 | Nov. 04, 2023 | Nov. 03, 2024 |
| 16 | D.C. Power Supply | LongWei | PS-305D | 010964729 | Nov. 04, 2023 | Nov. 03, 2024 |

Conduction Test equipment

| Item | Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1 | 843 Shielded Room | ChengYu | 843 Room | 843 | Sep. 20, 2022 | Sep. 19, 2025 |
| 2 | EMI Receiver | R&S | ESR | 101421 | Nov. 04, 2023 | Nov. 03, 2024 |
| 3 | LISN | R&S | ENV216 | 102417 | Nov. 04, 2023 | Nov. 03, 2024 |
| 4 | 843 Cable 1# | ChengYu | CE Cable | 001 | Nov. 04, 2023 | Nov. 03, 2024 |

Other

| Item | Name | Manufacturer | Model | Software version |
|------|------------------------------|--------------|---------|------------------|
| 1 | EMC Conduction Test System | FALA | EZ_EMCC | EMC-CON 3A1.1 |
| 2 | EMC radiation test system | FALA | EZ_EMCC | FA-03A2 |
| 3 | RF test system | MAIWEI | MTS8310 | 2.0.0.0 |
| 4 | RF communication test system | MAIWEI | MTS8200 | 2.0.0.0 |



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Limit (dBuV) | | Standard |
|-----------------|--------------|-----------|----------|
| | Quasi-peak | Average | |
| 0.15 -0.50 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 56.00 | 46.00 | FCC |
| 5.0 -30.0 | 60.00 | 50.00 | FCC |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

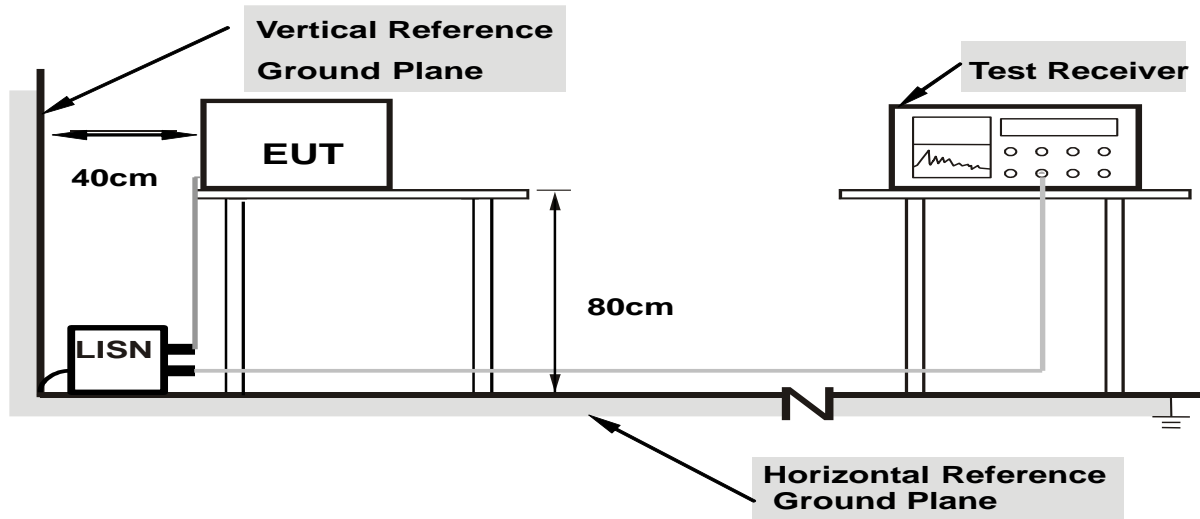

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



| | | | |
|----------------|--------------|--------------------|--------|
| Temperature: | 25 °C | Relative Humidity: | 54% |
| Pressure: | 1010hPa | Phase : | L |
| Test Voltage : | AC 120V/60Hz | Test Mode: | Mode 5 |

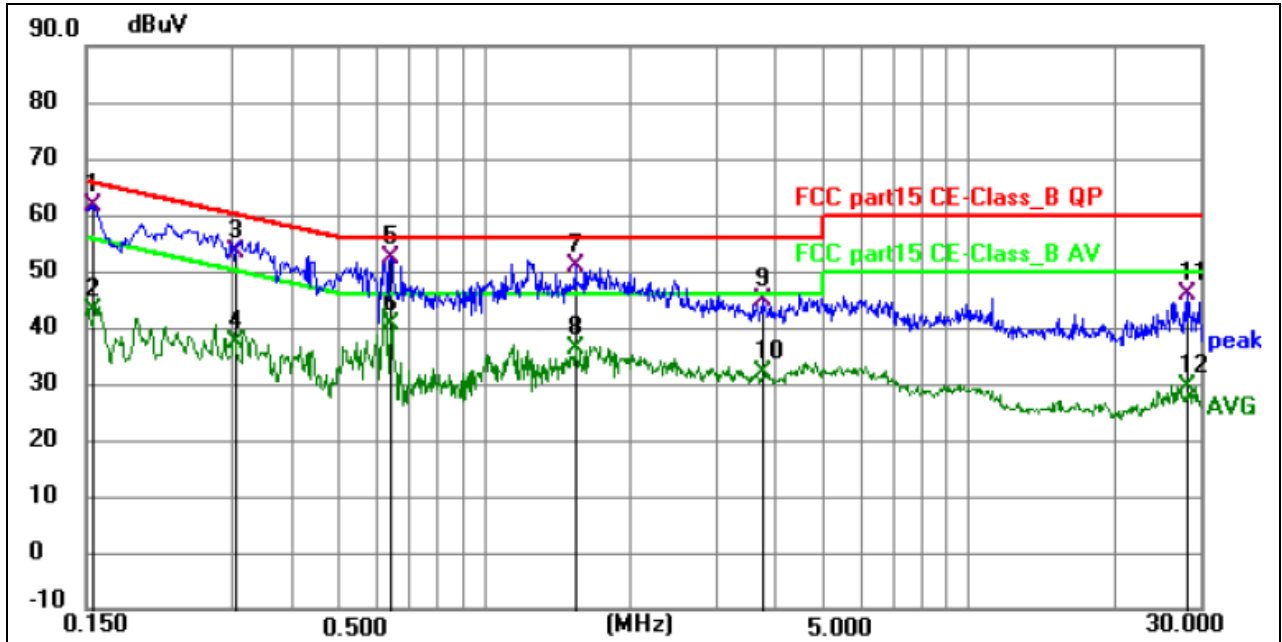


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1 | 0.1564 | 51.23 | 10.42 | 61.65 | 65.65 | -4.00 | QP | P | |
| 2 | 0.1564 | 32.50 | 10.42 | 42.92 | 55.65 | -12.73 | AVG | P | |
| 3 | 0.3066 | 44.32 | 9.04 | 53.36 | 60.06 | -6.70 | QP | P | |
| 4 | 0.3066 | 28.43 | 9.04 | 37.47 | 50.06 | -12.59 | AVG | P | |
| 5 * | 0.6403 | 43.03 | 9.41 | 52.44 | 56.00 | -3.56 | QP | P | |
| 6 | 0.6403 | 31.05 | 9.41 | 40.46 | 46.00 | -5.54 | AVG | P | |
| 7 | 1.5360 | 41.17 | 9.67 | 50.84 | 56.00 | -5.16 | QP | P | |
| 8 | 1.5360 | 26.68 | 9.67 | 36.35 | 46.00 | -9.65 | AVG | P | |
| 9 | 3.7545 | 34.92 | 9.82 | 44.74 | 56.00 | -11.26 | QP | P | |
| 10 | 3.7545 | 21.97 | 9.82 | 31.79 | 46.00 | -14.21 | AVG | P | |
| 11 | 28.1715 | 34.66 | 11.07 | 45.73 | 60.00 | -14.27 | QP | P | |
| 12 | 28.1715 | 18.33 | 11.07 | 29.40 | 50.00 | -20.60 | AVG | P | |



| | | | |
|----------------|--------------|--------------------|--------|
| Temperature: | 25 °C | Relative Humidity: | 54% |
| Pressure: | 1010hPa | Phase : | N |
| Test Voltage : | AC 120V/60Hz | Test Mode: | Mode 5 |

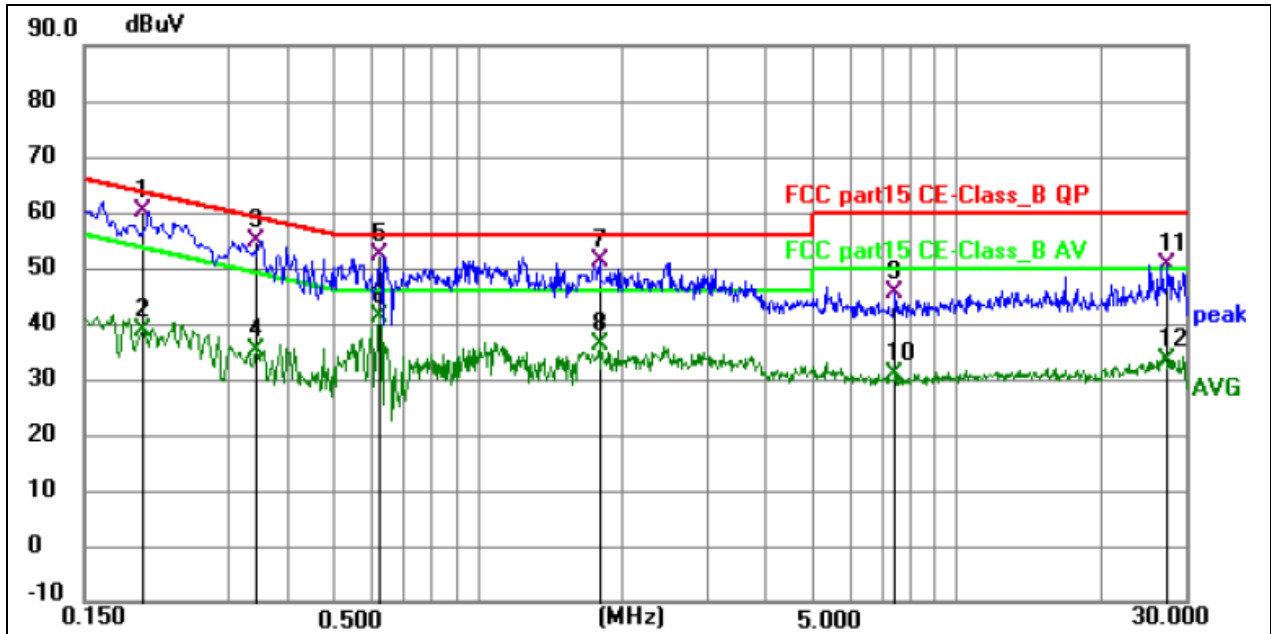

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1 * | 0.1995 | 51.12 | 8.90 | 60.02 | 63.63 | -3.61 | QP | P | |
| 2 | 0.1995 | 29.77 | 8.90 | 38.67 | 53.63 | -14.96 | AVG | P | |
| 3 | 0.3435 | 45.63 | 9.17 | 54.80 | 59.12 | -4.32 | QP | P | |
| 4 | 0.3435 | 25.96 | 9.17 | 35.13 | 49.12 | -13.99 | AVG | P | |
| 5 | 0.6225 | 42.92 | 9.30 | 52.22 | 56.00 | -3.78 | QP | P | |
| 6 | 0.6225 | 32.03 | 9.30 | 41.33 | 46.00 | -4.67 | AVG | P | |
| 7 | 1.7970 | 41.51 | 9.83 | 51.34 | 56.00 | -4.66 | QP | P | |
| 8 | 1.7970 | 26.50 | 9.83 | 36.33 | 46.00 | -9.67 | AVG | P | |
| 9 | 7.4443 | 35.45 | 10.15 | 45.60 | 60.00 | -14.40 | QP | P | |
| 10 | 7.4443 | 20.83 | 10.15 | 30.98 | 50.00 | -19.02 | AVG | P | |
| 11 | 27.4560 | 39.32 | 11.18 | 50.50 | 60.00 | -9.50 | QP | P | |
| 12 | 27.4560 | 22.38 | 11.18 | 33.56 | 50.00 | -16.44 | AVG | P | |



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) | |
|-----------------|------------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 25GHz |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 0.8 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

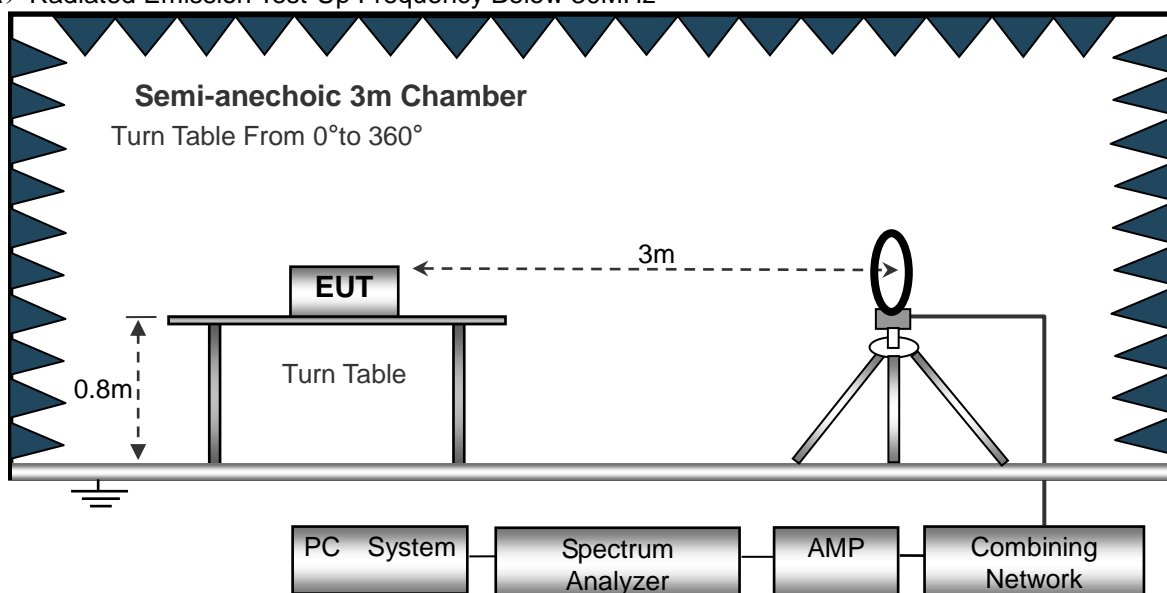

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

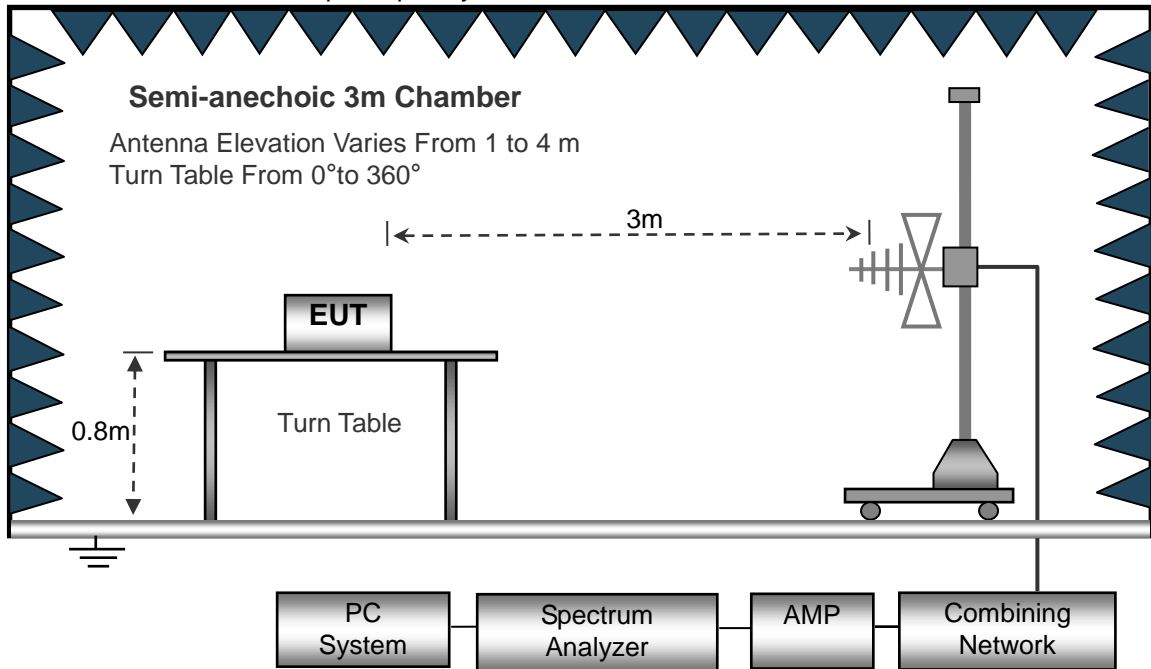

(C) Radiated Emission Test-Up Frequency Above 1GHz

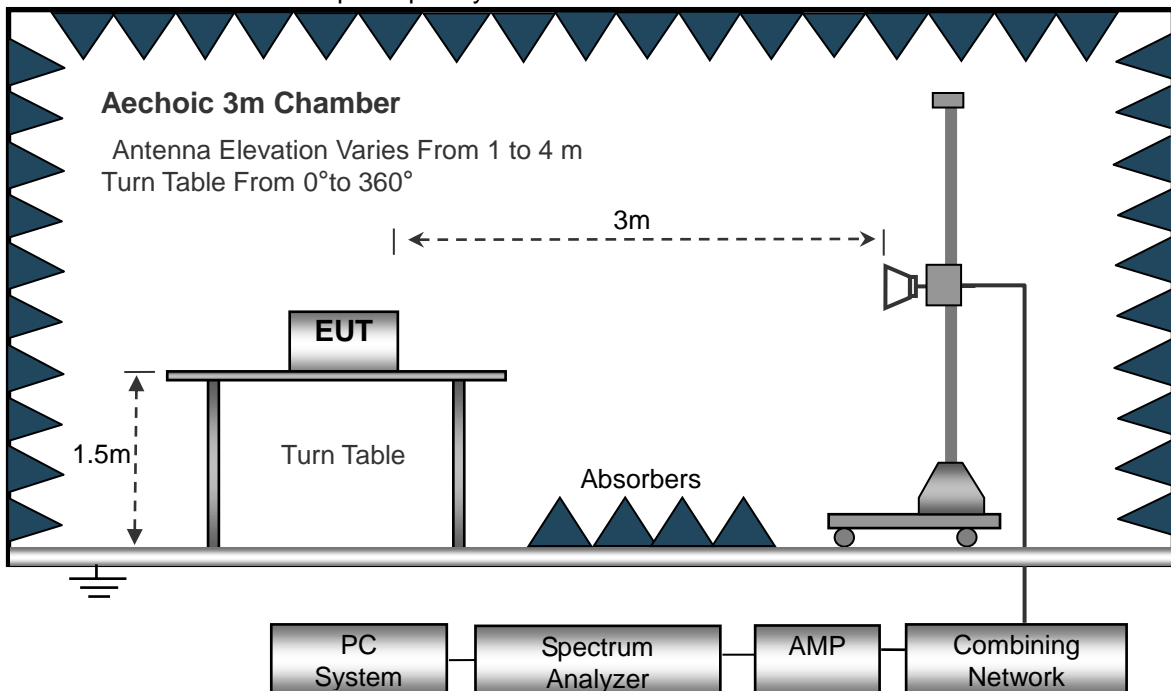

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

| | | | |
|--------------|----------|--------------------|--------------|
| Temperature: | 20°C | Relative Humidity: | 48% |
| Pressure: | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Mode 5 | Polarization : | -- |

| Freq. (MHz) | Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | State P/F |
|----------------|---------------------|-------------------|----------------|--------------|
| -- | -- | -- | -- | PASS |
| -- | -- | -- | -- | PASS |

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

| | | | |
|----------------|--------------|--------------------|------------|
| Temperature: | 26°C | Relative Humidity: | 54% |
| Pressure: | 1010 hPa | Polarization : | Horizontal |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Mode 5 | | |

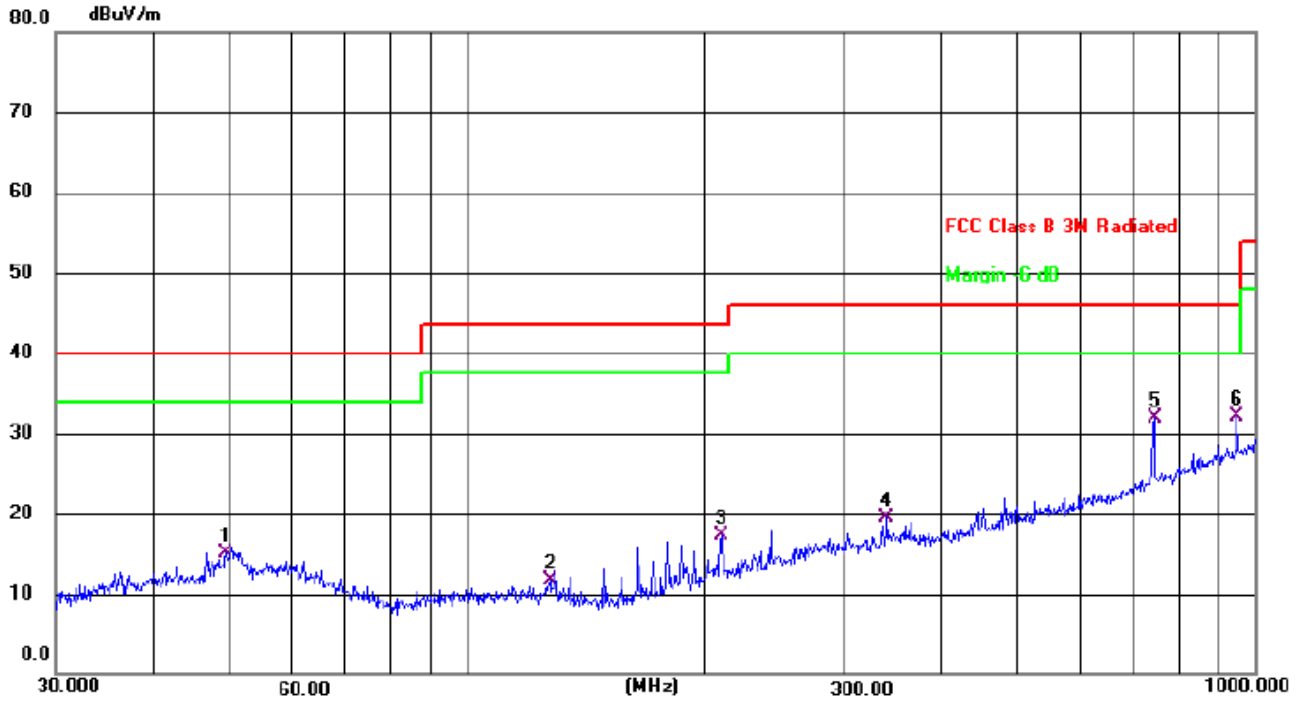

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Margin dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|--------------|----------|
| 1 | | 49.3594 | 28.32 | -13.25 | 15.07 | 40.00 | -24.93 | QP |
| 2 | | 127.2176 | 28.51 | -16.81 | 11.70 | 43.50 | -31.80 | QP |
| 3 | | 210.0482 | 31.61 | -14.34 | 17.27 | 43.50 | -26.23 | QP |
| 4 | | 340.7817 | 30.22 | -10.75 | 19.47 | 46.00 | -26.53 | QP |
| 5 | | 744.8661 | 34.99 | -3.15 | 31.84 | 46.00 | -14.16 | QP |
| 6 | * | 948.7610 | 31.83 | 0.20 | 32.03 | 46.00 | -13.97 | QP |


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



| | | | |
|----------------|--------------|--------------------|----------|
| Temperature: | 26°C | Relative Humidity: | 54% |
| Pressure: | 1010 hPa | Polarization : | Vertical |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Mode 5 | | |

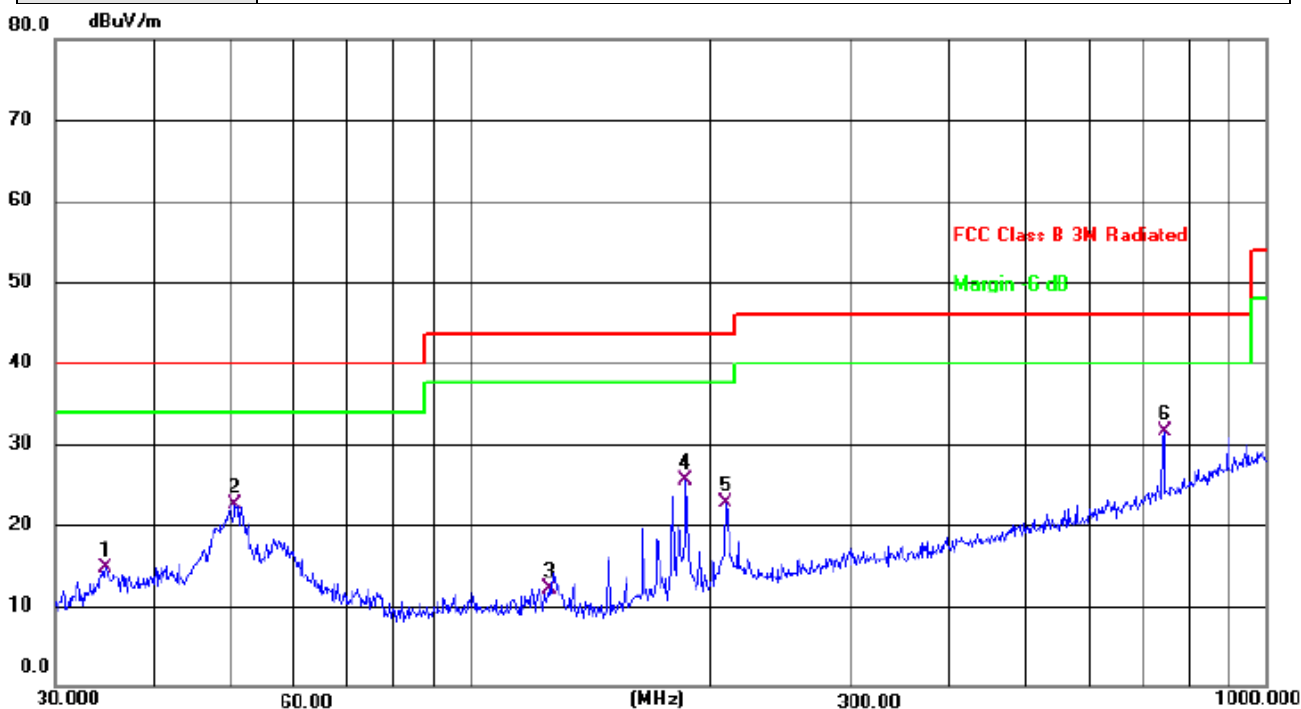

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Margin dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|--------------|----------|
| 1 | | 34.7602 | 29.70 | -15.00 | 14.70 | 40.00 | -25.30 | QP |
| 2 | | 50.5860 | 35.68 | -13.18 | 22.50 | 40.00 | -17.50 | QP |
| 3 | | 125.4457 | 28.86 | -16.74 | 12.12 | 43.50 | -31.38 | QP |
| 4 | | 186.4409 | 41.06 | -15.53 | 25.53 | 43.50 | -17.97 | QP |
| 5 | | 209.3129 | 37.01 | -14.36 | 22.65 | 43.50 | -20.85 | QP |
| 6 | * | 744.8661 | 34.68 | -3.15 | 31.53 | 46.00 | -14.47 | QP |

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

802.11b

| Polar (H/V) | Frequency | Meter Reading | Pre- amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | | | |
| V | 4824 | 67.15 | 50.65 | 6.88 | 31.29 | 54.67 | 74 | -19.33 | PK |
| V | 4824 | 55.35 | 50.65 | 6.88 | 31.29 | 42.87 | 54 | -11.13 | AV |
| V | 7236 | 66.57 | 49.98 | 7.16 | 36.63 | 60.38 | 74 | -13.62 | PK |
| V | 7236 | 46.12 | 49.98 | 7.16 | 36.63 | 39.93 | 54 | -14.07 | AV |
| V | 16087 | 48.99 | 51.53 | 11.34 | 41.52 | 50.32 | 74 | -23.68 | PK |
| H | 4824 | 66.24 | 50.65 | 6.88 | 31.29 | 53.76 | 74 | -20.24 | PK |
| H | 4824 | 55.38 | 50.65 | 6.88 | 31.29 | 42.9 | 54 | -11.1 | AV |
| H | 7236 | 69.23 | 49.98 | 7.16 | 36.63 | 63.04 | 74 | -10.96 | PK |
| H | 7236 | 45.57 | 49.98 | 7.16 | 36.63 | 39.38 | 54 | -14.62 | AV |
| H | 16087 | 48.46 | 51.53 | 11.34 | 41.52 | 49.79 | 74 | -24.21 | PK |
| operation frequency:2437 | | | | | | | | | |
| V | 4874 | 67.28 | 50.67 | 6.89 | 31.38 | 54.88 | 74 | -19.12 | PK |
| V | 4874 | 55.26 | 50.67 | 6.89 | 31.38 | 42.86 | 54 | -11.14 | AV |
| V | 7311 | 69.67 | 50.02 | 7.24 | 36.63 | 63.52 | 74 | -10.48 | PK |
| V | 7311 | 46.25 | 50.02 | 7.24 | 36.63 | 40.1 | 54 | -13.9 | AV |
| V | 16087 | 48.64 | 51.53 | 11.34 | 41.52 | 49.97 | 74 | -24.03 | PK |
| H | 4874 | 66.31 | 50.67 | 6.89 | 31.38 | 53.91 | 74 | -20.09 | PK |
| H | 4874 | 55.69 | 50.67 | 6.89 | 31.38 | 43.29 | 54 | -10.71 | AV |
| H | 7311 | 69.25 | 50.02 | 7.24 | 36.63 | 63.1 | 74 | -10.9 | PK |
| H | 7311 | 47.23 | 50.02 | 7.24 | 36.63 | 41.08 | 54 | -12.92 | AV |
| H | 16087 | 48.74 | 51.53 | 11.34 | 41.52 | 50.07 | 74 | -23.93 | PK |
| operation frequency:2462 | | | | | | | | | |
| V | 4924 | 68.32 | 50.79 | 6.83 | 31.36 | 55.75 | 74 | -18.25 | PK |
| V | 4924 | 55.88 | 50.79 | 6.83 | 31.36 | 43.16 | 54 | -10.84 | AV |
| V | 7386 | 69.45 | 50.11 | 7.25 | 36.58 | 62.99 | 74 | -11.01 | PK |
| V | 7386 | 46.66 | 50.11 | 7.25 | 36.58 | 40.14 | 54 | -13.86 | AV |
| V | 16087 | 49.21 | 51.53 | 11.34 | 41.52 | 50.57 | 74 | -23.43 | PK |
| H | 4924 | 67.37 | 50.79 | 6.83 | 31.36 | 55.06 | 74 | -18.94 | PK |
| H | 4924 | 55.66 | 50.79 | 6.83 | 31.36 | 42.68 | 54 | -11.32 | AV |
| H | 7386 | 67.25 | 50.11 | 7.25 | 36.58 | 61.11 | 74 | -12.89 | PK |
| H | 7386 | 48.93 | 50.11 | 7.25 | 36.58 | 41.94 | 54 | -12.06 | AV |
| H | 16087 | 49.85 | 51.53 | 11.34 | 41.52 | 50.47 | 74 | -23.53 | PK |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | | | |
| V | 4824 | 67.66 | 50.65 | 6.88 | 31.29 | 55.18 | 74 | -18.82 | PK |
| V | 4824 | 55.48 | 50.65 | 6.88 | 31.29 | 43 | 54 | -11 | AV |
| V | 7236 | 66.52 | 49.98 | 7.16 | 36.63 | 60.33 | 74 | -13.67 | PK |
| V | 7236 | 46.51 | 49.98 | 7.16 | 36.63 | 40.32 | 54 | -13.68 | AV |
| V | 16087 | 49.89 | 51.53 | 11.34 | 41.52 | 51.22 | 74 | -22.78 | PK |
| H | 4824 | 69.68 | 50.65 | 6.88 | 31.29 | 57.2 | 74 | -16.8 | PK |
| H | 4824 | 52.16 | 50.65 | 6.88 | 31.29 | 39.68 | 54 | -14.32 | AV |
| H | 7236 | 66.48 | 49.98 | 7.16 | 36.63 | 60.29 | 74 | -13.71 | PK |
| H | 7236 | 47.34 | 49.98 | 7.16 | 36.63 | 41.15 | 54 | -12.85 | AV |
| H | 16087 | 47.59 | 51.53 | 11.34 | 41.52 | 48.92 | 74 | -25.08 | PK |
| operation frequency:2437 | | | | | | | | | |
| V | 4874 | 67.52 | 50.67 | 6.89 | 31.38 | 55.12 | 74 | -18.88 | PK |
| V | 4874 | 55.56 | 50.67 | 6.89 | 31.38 | 43.16 | 54 | -10.84 | AV |
| V | 7311 | 66.38 | 50.02 | 7.24 | 36.63 | 60.23 | 74 | -13.77 | PK |
| V | 7311 | 46.24 | 50.02 | 7.24 | 36.63 | 40.09 | 54 | -13.91 | AV |
| V | 16087 | 48.33 | 51.53 | 11.34 | 41.52 | 49.66 | 74 | -24.34 | PK |
| H | 4874 | 66.74 | 50.67 | 6.89 | 31.38 | 54.34 | 74 | -19.66 | PK |
| H | 4874 | 55.46 | 50.67 | 6.89 | 31.38 | 43.06 | 54 | -10.94 | AV |
| H | 7311 | 65.38 | 50.02 | 7.24 | 36.63 | 59.23 | 74 | -14.77 | PK |
| H | 7311 | 47.74 | 50.02 | 7.24 | 36.63 | 41.59 | 54 | -12.41 | AV |
| H | 16087 | 48.69 | 51.53 | 11.34 | 41.52 | 50.02 | 74 | -23.98 | PK |
| operation frequency:2462 | | | | | | | | | |
| V | 4924 | 67.83 | 50.79 | 6.83 | 31.36 | 55.23 | 74 | -18.77 | PK |
| V | 4924 | 55.88 | 50.79 | 6.83 | 31.36 | 43.28 | 54 | -10.72 | AV |
| V | 7386 | 66.14 | 50.11 | 7.25 | 36.58 | 59.86 | 74 | -14.14 | PK |
| V | 7386 | 47.32 | 50.11 | 7.25 | 36.58 | 41.04 | 54 | -12.96 | AV |
| V | 16087 | 46.39 | 51.53 | 11.34 | 41.52 | 47.72 | 74 | -26.28 | PK |
| H | 4924 | 66.47 | 50.79 | 6.83 | 31.36 | 53.87 | 74 | -20.13 | PK |
| H | 4924 | 54.63 | 50.79 | 6.83 | 31.36 | 42.03 | 54 | -11.97 | AV |
| H | 7386 | 65.55 | 50.11 | 7.25 | 36.58 | 59.27 | 74 | -14.73 | PK |
| H | 7386 | 45.56 | 50.11 | 7.25 | 36.58 | 39.28 | 54 | -14.72 | AV |
| H | 16087 | 47.88 | 51.53 | 11.34 | 41.52 | 49.21 | 74 | -24.79 | PK |

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBUV) | (dB) | (dB) | (dB/m) | (dBUV/m) | (dBUV/m) | (dB) | |
| operation frequency:2412 | | | | | | | | | |
| V | 4824 | 66.94 | 50.65 | 6.88 | 31.29 | 54.46 | 74 | -19.54 | PK |
| V | 4824 | 55.35 | 50.65 | 6.88 | 31.29 | 42.87 | 54 | -11.13 | AV |
| V | 7236 | 66.53 | 49.98 | 7.16 | 36.63 | 60.34 | 74 | -13.66 | PK |
| V | 7236 | 46.87 | 49.98 | 7.16 | 36.63 | 40.68 | 54 | -13.32 | AV |
| V | 16087 | 46.85 | 51.53 | 11.34 | 41.52 | 48.18 | 74 | -25.82 | PK |
| H | 4824 | 66.19 | 50.65 | 6.88 | 31.29 | 53.71 | 74 | -20.29 | PK |
| H | 4824 | 55.35 | 50.65 | 6.88 | 31.29 | 42.87 | 54 | -11.13 | AV |
| H | 7236 | 64.54 | 49.98 | 7.16 | 36.63 | 58.35 | 74 | -15.65 | PK |
| H | 7236 | 47.24 | 49.98 | 7.16 | 36.63 | 41.05 | 54 | -12.95 | AV |
| H | 16087 | 47.63 | 51.53 | 11.34 | 41.52 | 48.96 | 74 | -25.04 | PK |
| operation frequency:2437 | | | | | | | | | |
| V | 4874 | 66.18 | 50.67 | 6.89 | 31.38 | 53.78 | 74 | -20.22 | PK |
| V | 4874 | 54.64 | 50.67 | 6.89 | 31.38 | 42.24 | 54 | -11.76 | AV |
| V | 7311 | 65.63 | 50.02 | 7.24 | 36.63 | 59.48 | 74 | -14.52 | PK |
| V | 7311 | 47.38 | 50.02 | 7.24 | 36.63 | 41.23 | 54 | -12.77 | AV |
| V | 16087 | 47.14 | 51.53 | 11.34 | 41.52 | 48.47 | 74 | -25.53 | PK |
| H | 4874 | 65.49 | 50.67 | 6.89 | 31.38 | 53.09 | 74 | -20.91 | PK |
| H | 4874 | 53.85 | 50.67 | 6.89 | 31.38 | 41.45 | 54 | -12.55 | AV |
| H | 7311 | 65.25 | 50.02 | 7.24 | 36.63 | 59.1 | 74 | -14.9 | PK |
| H | 7311 | 46.19 | 50.02 | 7.24 | 36.63 | 40.04 | 54 | -13.96 | AV |
| H | 16087 | 46.62 | 51.53 | 11.34 | 41.52 | 47.95 | 74 | -26.05 | PK |
| operation frequency:2462 | | | | | | | | | |
| V | 4924 | 67.63 | 50.79 | 6.83 | 31.36 | 55.03 | 74 | -18.97 | PK |
| V | 4924 | 54.24 | 50.79 | 6.83 | 31.36 | 41.64 | 54 | -12.36 | AV |
| V | 7386 | 64.88 | 50.11 | 7.25 | 36.58 | 58.6 | 74 | -15.4 | PK |
| V | 7386 | 46.13 | 50.11 | 7.25 | 36.58 | 39.85 | 54 | -14.15 | AV |
| V | 16087 | 48.64 | 51.53 | 11.34 | 41.52 | 49.97 | 74 | -24.03 | PK |
| H | 4924 | 67.48 | 50.79 | 6.83 | 31.36 | 54.88 | 74 | -19.12 | PK |
| H | 4924 | 54.93 | 50.79 | 6.83 | 31.36 | 42.33 | 54 | -11.67 | AV |
| H | 7386 | 65.98 | 50.11 | 7.25 | 36.58 | 59.7 | 74 | -14.3 | PK |
| H | 7386 | 47.25 | 50.11 | 7.25 | 36.58 | 40.97 | 54 | -13.03 | AV |
| H | 16087 | 47.61 | 51.53 | 11.34 | 41.52 | 48.94 | 74 | -25.06 | PK |

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBUV) | (dB) | (dB) | (dB/m) | (dBUV/m) | (dBUV/m) | (dB) | |
| operation frequency:2422 | | | | | | | | | |
| V | 4844 | 66.23 | 50.67 | 6.89 | 31.32 | 53.77 | 74 | -20.23 | PK |
| V | 4844 | 55.98 | 50.67 | 6.89 | 31.32 | 43.52 | 54 | -10.48 | AV |
| V | 7266 | 66.84 | 50.01 | 7.15 | 36.62 | 60.6 | 74 | -13.4 | PK |
| V | 7266 | 46.26 | 50.01 | 7.15 | 36.62 | 40.02 | 54 | -13.98 | AV |
| V | 16087 | 46.67 | 51.53 | 11.34 | 41.52 | 48 | 74 | -26 | PK |
| H | 4844 | 66.26 | 50.67 | 6.89 | 31.32 | 53.8 | 74 | -20.2 | PK |
| H | 4844 | 55.95 | 50.67 | 6.89 | 31.32 | 43.49 | 54 | -10.51 | AV |
| H | 7266 | 64.27 | 50.01 | 7.15 | 36.62 | 58.03 | 74 | -15.97 | PK |
| H | 7266 | 47.53 | 50.01 | 7.15 | 36.62 | 41.29 | 54 | -12.71 | AV |
| H | 16087 | 47.94 | 51.53 | 11.34 | 41.52 | 49.27 | 74 | -24.73 | PK |
| operation frequency:2437 | | | | | | | | | |
| V | 4874 | 66.66 | 50.67 | 6.89 | 31.38 | 54.26 | 74 | -19.74 | PK |
| V | 4874 | 54.78 | 50.67 | 6.89 | 31.38 | 42.38 | 54 | -11.62 | AV |
| V | 7311 | 65.45 | 50.02 | 7.24 | 36.63 | 59.3 | 74 | -14.7 | PK |
| V | 7311 | 46.89 | 50.02 | 7.24 | 36.63 | 40.74 | 54 | -13.26 | AV |
| V | 16087 | 47.53 | 51.53 | 11.34 | 41.52 | 48.86 | 74 | -25.14 | PK |
| H | 4874 | 65.44 | 50.67 | 6.89 | 31.38 | 53.04 | 74 | -20.96 | PK |
| H | 4874 | 53.83 | 50.67 | 6.89 | 31.38 | 41.43 | 54 | -12.57 | AV |
| H | 7311 | 65.88 | 50.02 | 7.24 | 36.63 | 59.73 | 74 | -14.27 | PK |
| H | 7311 | 47.25 | 50.02 | 7.24 | 36.63 | 41.1 | 54 | -12.9 | AV |
| H | 16087 | 46.36 | 51.53 | 11.34 | 41.52 | 47.69 | 74 | -26.31 | PK |
| operation frequency:2452 | | | | | | | | | |
| V | 4904 | 67.24 | 50.76 | 6.81 | 31.31 | 54.6 | 74 | -19.4 | PK |
| V | 4904 | 54.67 | 50.76 | 6.81 | 31.31 | 42.03 | 54 | -11.97 | AV |
| V | 7356 | 64.96 | 50.08 | 7.21 | 36.52 | 58.61 | 74 | -15.39 | PK |
| V | 7356 | 47.25 | 50.08 | 7.21 | 36.52 | 40.9 | 54 | -13.1 | AV |
| V | 16087 | 48.13 | 51.53 | 11.34 | 41.52 | 49.46 | 74 | -24.54 | PK |
| H | 4904 | 67.54 | 50.76 | 6.81 | 31.31 | 54.9 | 74 | -19.1 | PK |
| H | 4904 | 54.88 | 50.76 | 6.81 | 31.31 | 42.24 | 54 | -11.76 | AV |
| H | 7356 | 65.86 | 50.08 | 7.21 | 36.52 | 59.51 | 74 | -14.49 | PK |
| H | 7356 | 46.64 | 50.08 | 7.21 | 36.52 | 40.29 | 54 | -13.71 | AV |
| H | 16087 | 47.98 | 51.53 | 11.34 | 41.52 | 49.31 | 74 | -24.69 | PK |

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) | |
|-----------------|------------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 2300MHz |
| Stop Frequency | 2520 |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

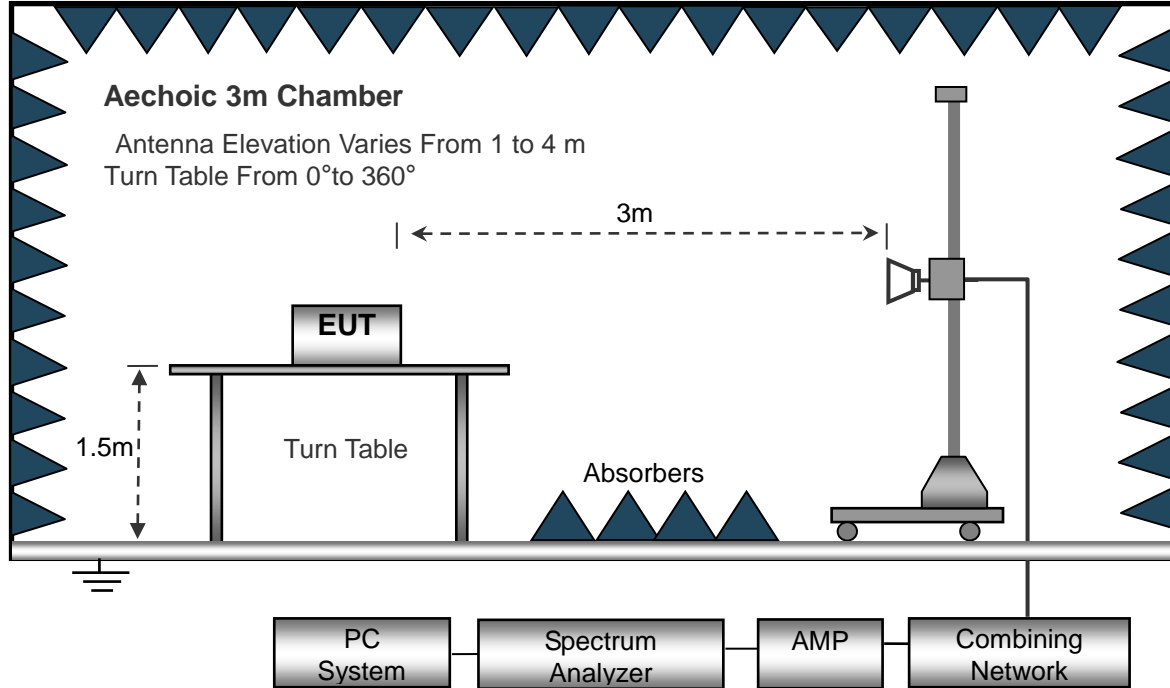

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.3.6 TEST RESULT**

802.11b

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | | | |
| V | 2390 | 76.66 | 52.12 | 2.73 | 27.38 | 54.65 | 74 | -19.35 | PK |
| V | 2390 | 65.18 | 52.12 | 2.73 | 27.38 | 43.17 | 54 | -10.83 | AV |
| V | 2400 | 76.84 | 52.16 | 2.78 | 27.41 | 54.87 | 74 | -19.13 | PK |
| V | 2400 | 64.33 | 52.16 | 2.78 | 27.41 | 42.36 | 54 | -11.64 | AV |
| H | 2390 | 76.88 | 52.12 | 2.73 | 27.38 | 54.87 | 74 | -19.13 | PK |
| H | 2390 | 65.96 | 52.12 | 2.73 | 27.38 | 43.95 | 54 | -10.05 | AV |
| H | 2400 | 76.64 | 52.16 | 2.78 | 27.41 | 54.67 | 74 | -19.33 | PK |
| H | 2400 | 65.85 | 52.16 | 2.78 | 27.41 | 43.88 | 54 | -10.12 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2462 | | | | | | | | | |
| V | 2483.5 | 76.66 | 52.23 | 2.86 | 27.44 | 54.73 | 74 | -19.27 | PK |
| V | 2483.5 | 65.27 | 52.23 | 2.86 | 27.44 | 43.34 | 54 | -10.66 | AV |
| V | 2500 | 76.66 | 52.26 | 2.88 | 27.49 | 54.77 | 74 | -19.23 | PK |
| V | 2500 | 64.64 | 52.26 | 2.88 | 27.49 | 42.75 | 54 | -11.25 | AV |
| H | 2483.5 | 76.52 | 52.23 | 2.86 | 27.44 | 54.59 | 74 | -19.41 | PK |
| H | 2483.5 | 65.79 | 52.23 | 2.86 | 27.44 | 43.86 | 54 | -10.14 | AV |
| H | 2500 | 76.35 | 52.26 | 2.88 | 27.49 | 54.46 | 74 | -19.54 | PK |
| H | 2500 | 65.29 | 52.26 | 2.88 | 27.49 | 43.4 | 54 | -10.6 | AV |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | | | |
| V | 2390 | 76.26 | 52.12 | 2.73 | 27.38 | 54.25 | 74 | -19.75 | PK |
| V | 2390 | 65.47 | 52.12 | 2.73 | 27.38 | 43.46 | 54 | -10.54 | AV |
| V | 2400 | 76.64 | 52.16 | 2.78 | 27.41 | 54.67 | 74 | -19.33 | PK |
| V | 2400 | 64.33 | 52.16 | 2.78 | 27.41 | 42.36 | 54 | -11.64 | AV |
| H | 2390 | 76.28 | 52.12 | 2.73 | 27.38 | 54.27 | 74 | -19.73 | PK |
| H | 2390 | 65.16 | 52.12 | 2.73 | 27.38 | 43.15 | 54 | -10.85 | AV |
| H | 2400 | 76.27 | 52.16 | 2.78 | 27.41 | 54.3 | 74 | -19.7 | PK |
| H | 2400 | 65.16 | 52.16 | 2.78 | 27.41 | 43.19 | 54 | -10.81 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2462 | | | | | | | | | |
| V | 2483.5 | 76.24 | 52.23 | 2.86 | 27.44 | 54.31 | 74 | -19.69 | PK |
| V | 2483.5 | 65.28 | 52.23 | 2.86 | 27.44 | 43.35 | 54 | -10.65 | AV |
| V | 2500 | 76.64 | 52.26 | 2.88 | 27.49 | 54.75 | 74 | -19.25 | PK |
| V | 2500 | 65.89 | 52.26 | 2.88 | 27.49 | 44 | 54 | -10 | AV |
| H | 2483.5 | 76.85 | 52.23 | 2.86 | 27.44 | 54.92 | 74 | -19.08 | PK |
| H | 2483.5 | 65.83 | 52.23 | 2.86 | 27.44 | 43.9 | 54 | -10.1 | AV |
| H | 2500 | 76.47 | 52.26 | 2.88 | 27.49 | 54.58 | 74 | -19.42 | PK |
| H | 2500 | 65.65 | 52.26 | 2.88 | 27.49 | 43.76 | 54 | -10.24 | AV |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | | | |
| V | 2390 | 76.26 | 52.12 | 2.73 | 27.38 | 54.25 | 74 | -19.75 | PK |
| V | 2390 | 65.85 | 52.12 | 2.73 | 27.38 | 43.84 | 54 | -10.16 | AV |
| V | 2400 | 77.34 | 52.16 | 2.78 | 27.41 | 55.37 | 74 | -18.63 | PK |
| V | 2400 | 65.53 | 52.16 | 2.78 | 27.41 | 43.56 | 54 | -10.44 | AV |
| H | 2390 | 77.24 | 52.12 | 2.73 | 27.38 | 55.23 | 74 | -18.77 | PK |
| H | 2390 | 65.59 | 52.12 | 2.73 | 27.38 | 43.58 | 54 | -10.42 | AV |
| H | 2400 | 76.23 | 52.16 | 2.78 | 27.41 | 54.26 | 74 | -19.74 | PK |
| H | 2400 | 65.68 | 52.16 | 2.78 | 27.41 | 43.71 | 54 | -10.29 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2462 | | | | | | | | | |
| V | 2483.5 | 77.83 | 52.23 | 2.86 | 27.44 | 55.9 | 74 | -18.1 | PK |
| V | 2483.5 | 65.24 | 52.23 | 2.86 | 27.44 | 43.31 | 54 | -10.69 | AV |
| V | 2500 | 76.28 | 52.26 | 2.88 | 27.49 | 54.39 | 74 | -19.61 | PK |
| V | 2500 | 65.25 | 52.26 | 2.88 | 27.49 | 43.36 | 54 | -10.64 | AV |
| H | 2483.5 | 77.53 | 52.23 | 2.86 | 27.44 | 55.6 | 74 | -18.4 | PK |
| H | 2483.5 | 65.84 | 52.23 | 2.86 | 27.44 | 43.91 | 54 | -10.09 | AV |
| H | 2500 | 76.58 | 52.26 | 2.88 | 27.49 | 54.69 | 74 | -19.31 | PK |
| H | 2500 | 66.93 | 52.26 | 2.88 | 27.49 | 45.04 | 54 | -8.96 | AV |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2422 | | | | | | | | | |
| V | 2390 | 76.28 | 52.12 | 2.73 | 27.38 | 54.27 | 74 | -19.73 | PK |
| V | 2390 | 65.69 | 52.12 | 2.73 | 27.38 | 43.68 | 54 | -10.32 | AV |
| V | 2400 | 77.87 | 52.16 | 2.78 | 27.41 | 55.9 | 74 | -18.1 | PK |
| V | 2400 | 65.64 | 52.16 | 2.78 | 27.41 | 43.67 | 54 | -10.33 | AV |
| H | 2390 | 77.19 | 52.12 | 2.73 | 27.38 | 55.18 | 74 | -18.82 | PK |
| H | 2390 | 65.62 | 52.12 | 2.73 | 27.38 | 43.61 | 54 | -10.39 | AV |
| H | 2400 | 76.41 | 52.16 | 2.78 | 27.41 | 54.44 | 74 | -19.56 | PK |
| H | 2400 | 65.86 | 52.16 | 2.78 | 27.41 | 43.89 | 54 | -10.11 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2452 | | | | | | | | | |
| V | 2483.5 | 77.63 | 52.23 | 2.86 | 27.44 | 55.7 | 74 | -18.3 | PK |
| V | 2483.5 | 65.88 | 52.23 | 2.86 | 27.44 | 43.95 | 54 | -10.05 | AV |
| V | 2500 | 76.25 | 52.26 | 2.88 | 27.49 | 54.36 | 74 | -19.64 | PK |
| V | 2500 | 65.86 | 52.26 | 2.88 | 27.49 | 43.97 | 54 | -10.03 | AV |
| H | 2483.5 | 77.75 | 52.23 | 2.86 | 27.44 | 55.82 | 74 | -18.18 | PK |
| H | 2483.5 | 65.83 | 52.23 | 2.86 | 27.44 | 43.9 | 54 | -10.1 | AV |
| H | 2500 | 76.17 | 52.26 | 2.88 | 27.49 | 54.28 | 74 | -19.72 | PK |
| H | 2500 | 66.46 | 52.26 | 2.88 | 27.49 | 44.57 | 54 | -9.43 | AV |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (d) |
| Test Method: | KDB558074 D0115.247 Meas Guidance v05r02 |

3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.4.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

Set the RBW = 100KHz.

Set the VBW = 300KHz.

Sweep time = auto couple.

Detector function = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

3.4.3 DEVIATION FROM STANDARD

No deviation.

3.4.4 TEST SETUP





3.4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.4.6 TEST RESULTS





For Conducted
802.11b

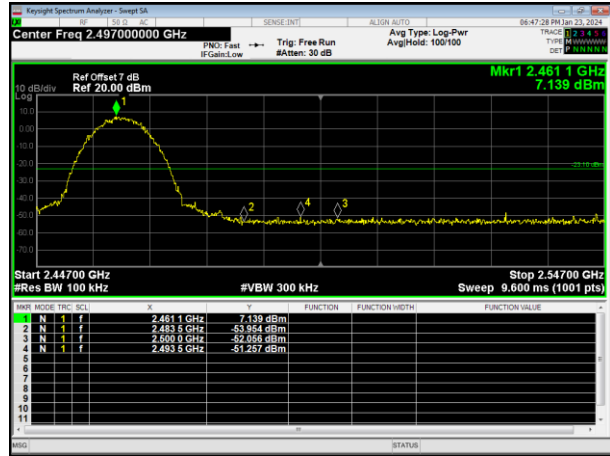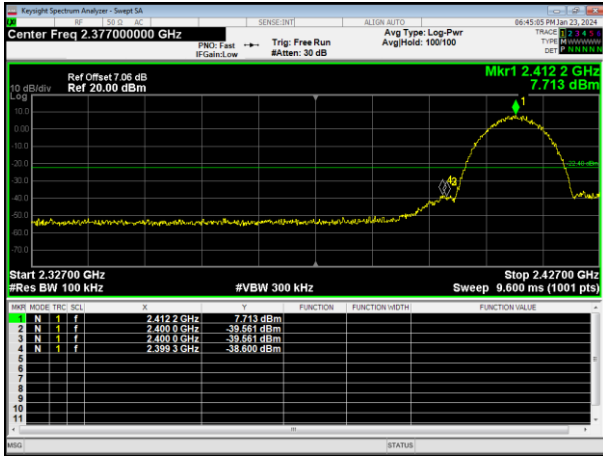

802.11g

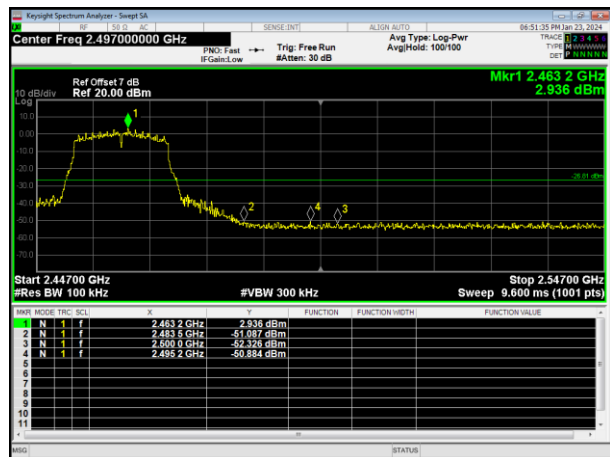
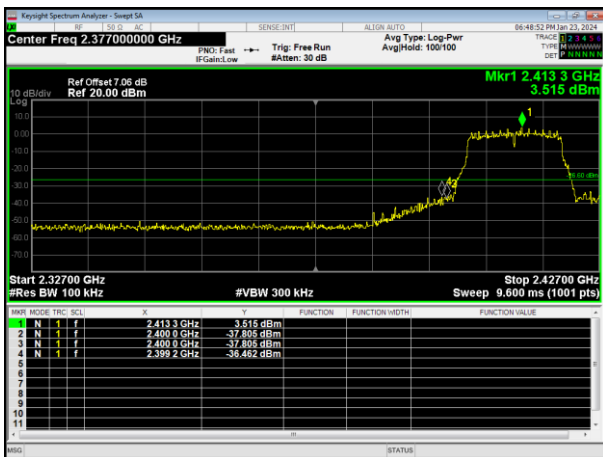


802.11n HT20

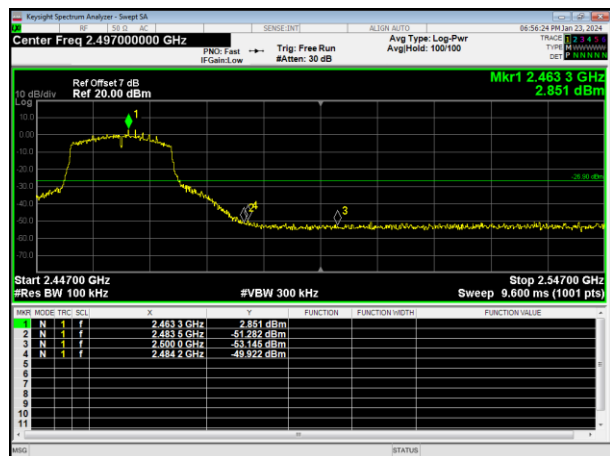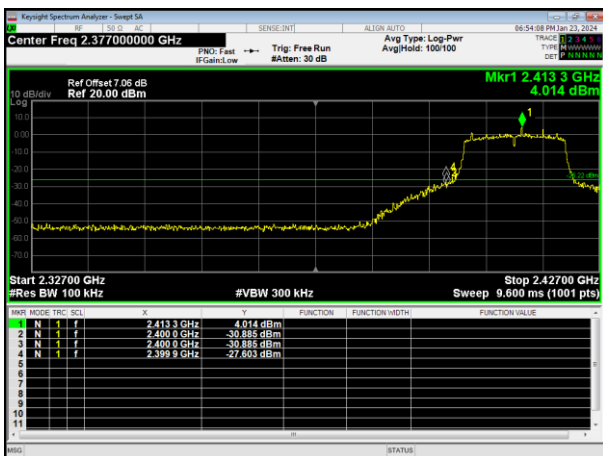



802.11n HT40

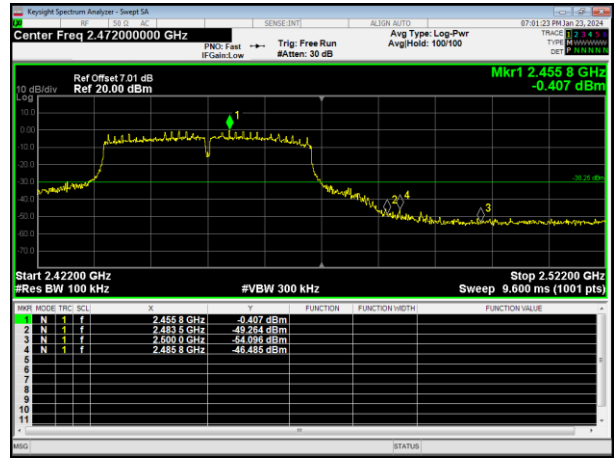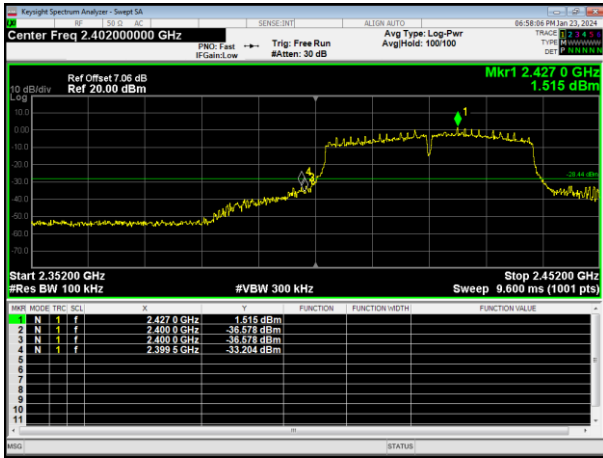




For Conducted


During the test, pre-scan the all modulation, and found the 802.11b mode which it is worse case.

Test channel: Lowest channel

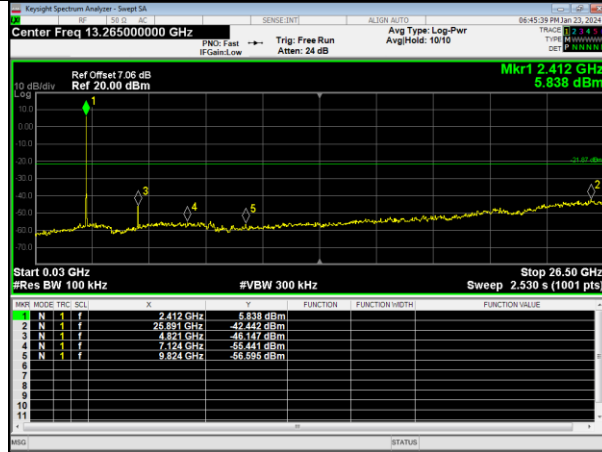


0.03GHz~26.5GHz

Test channel: Middle channel

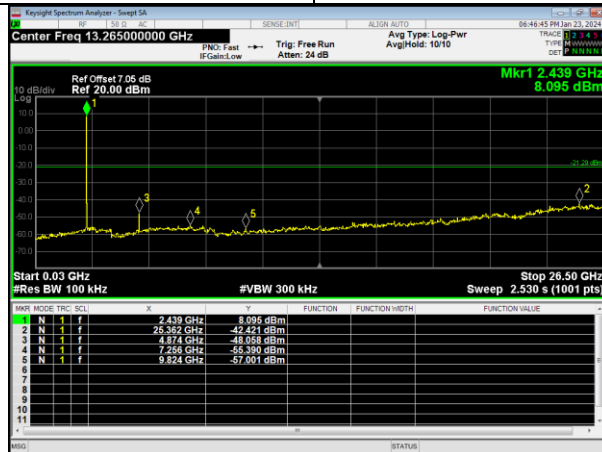

0.03GHz~26.5GHz

Test channel: Highest channel

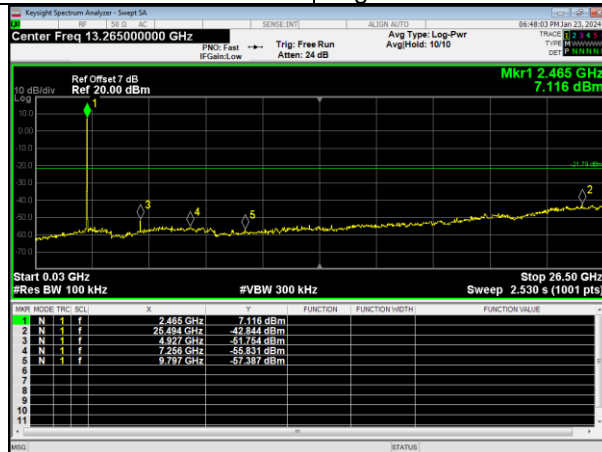

0.03GHz~26.5GHz



4. AVERAGE OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|----------------------|-----------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247 (b)(3) | Average Output Power | 1 watt or 30dBm | 2400-2483.5 | PASS |


4.1.1 TEST PROCEDURE

- a.The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b.Set span to at least 1.5 times the OBW.
- c.Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- d.Set VBW ≥ [3 × RBW].
- e.Number of points in sweep ≥ [2 × span / RBW]. (This gives bin-to-bin spacing ≤ RBW / 2, so that narrowband signals are not lost between frequency bins.)
- f.Sweep time = auto.
- g.Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h.If transmit duty cycle < 98%, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle ≥ 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- i.Trace average at least 100 traces in power averaging (rms) mode.
- j.Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

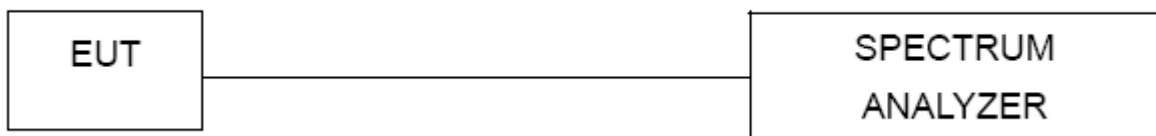

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS

| | | | |
|--------------|----------|--------------------|--------------|
| Temperature: | 25 °C | Relative Humidity: | 60% |
| Pressure: | 1012 hPa | Test Voltage : | AC 120V/60Hz |


| Mode | Test Channel | Average Output Power (dBm) | LIMIT (dBm) |
|--------------|--------------|----------------------------|-------------|
| 802.11b | Low | 16.448 | 30.00 |
| | Middle | 16.731 | 30.00 |
| | High | 15.321 | 30.00 |
| 802.11g | Low | 12.934 | 30.00 |
| | Middle | 13.361 | 30.00 |
| | High | 12.156 | 30.00 |
| 802.11n HT20 | Low | 14.121 | 30.00 |
| | Middle | 14.514 | 30.00 |
| | High | 12.896 | 30.00 |
| 802.11n HT40 | Low | 13.565 | 30.00 |
| | Middle | 13.705 | 30.00 |
| | High | 13.011 | 30.00 |




802.11b

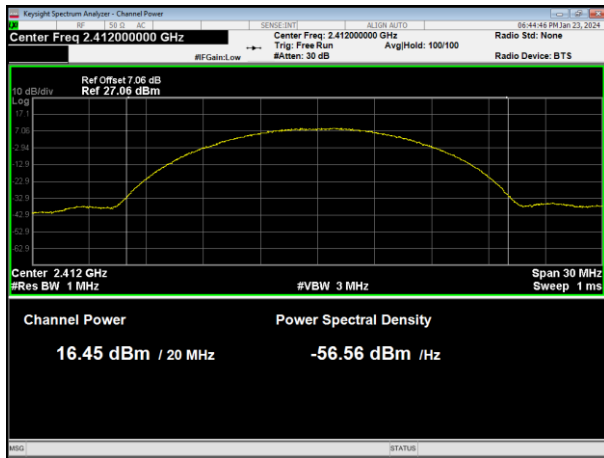


802.11g

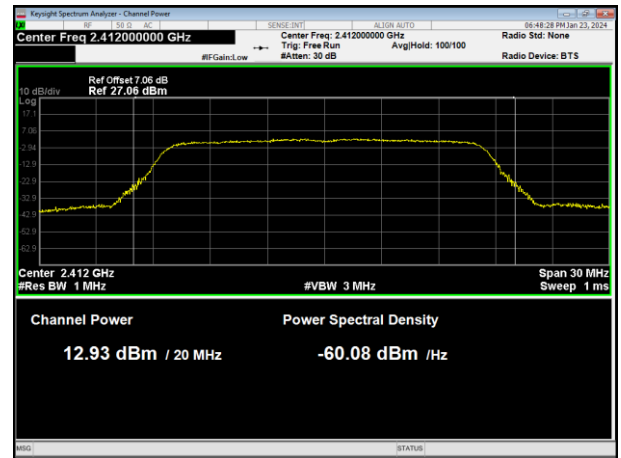


2412MHz

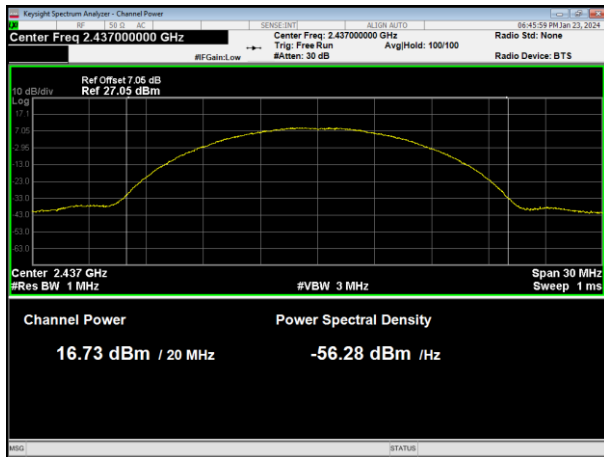


2412MHz

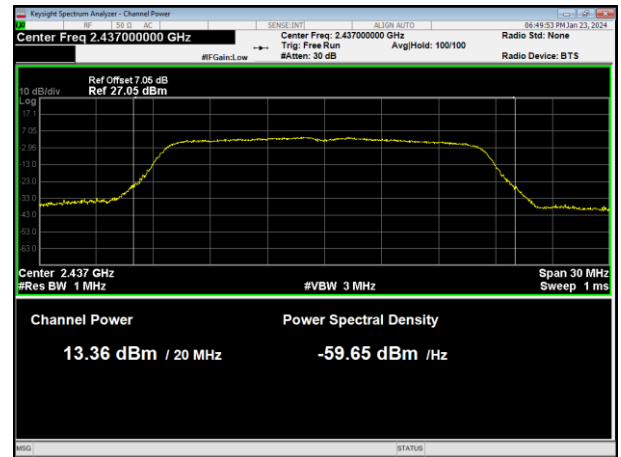

2437MHz

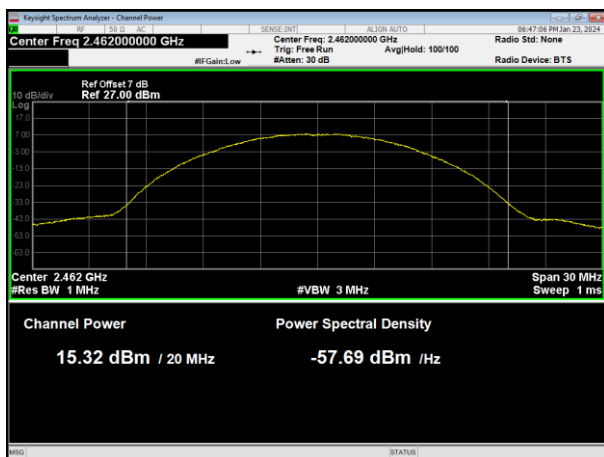


2437MHz

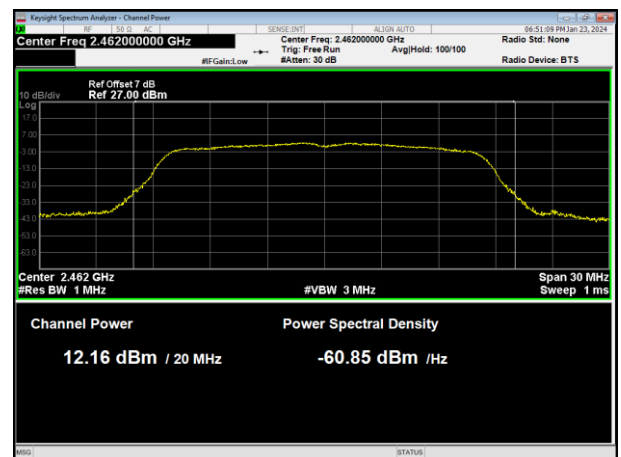

2462MHz

2462MHz

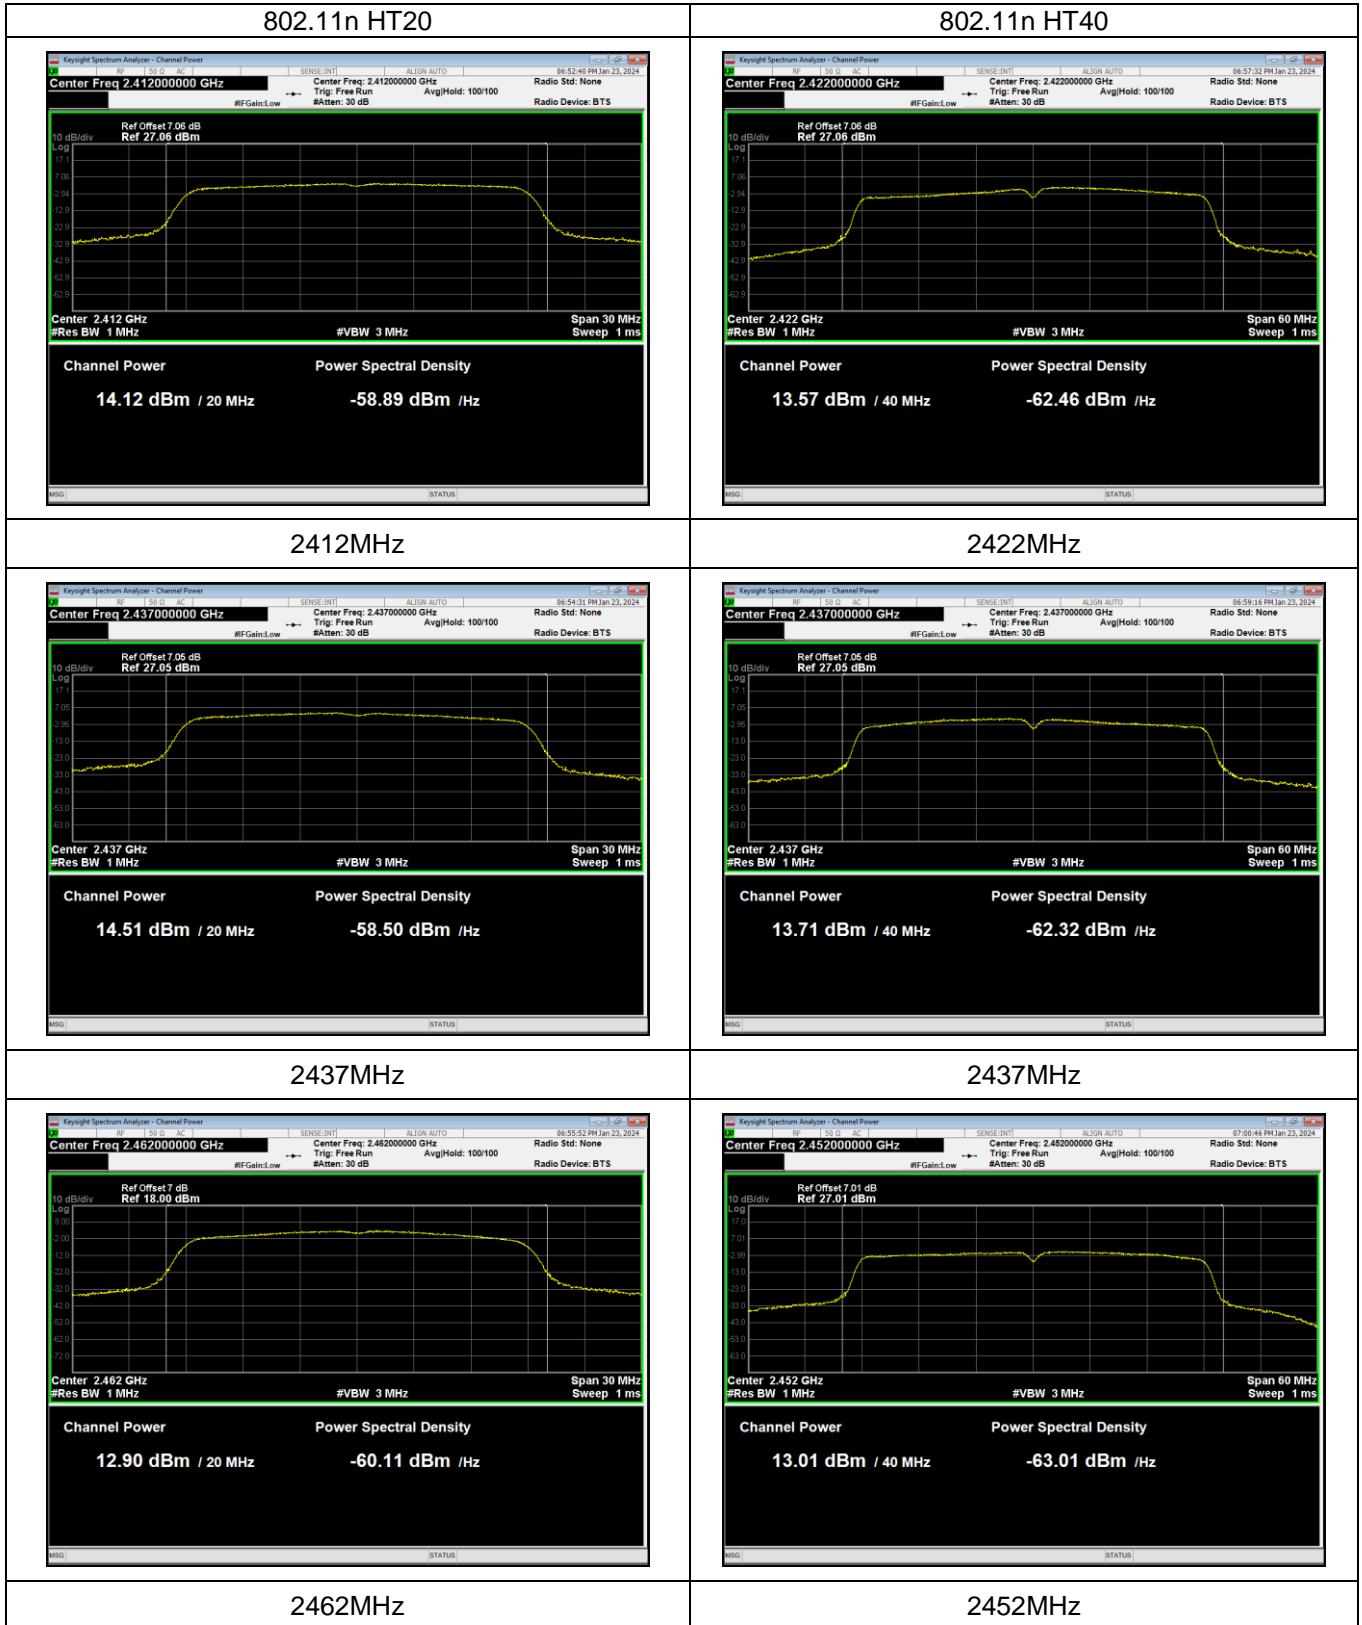



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|------------------------|---------------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247 | Power Spectral Density | 8 dBm (in any 3KHz) | 2400-2483.5 | PASS |

| Spectrum Parameters | Setting |
|---------------------|--|
| Attenuation | Auto |
| Span Frequency | = the frequency band of operation |
| RB | RBW ≥ 3kHz |
| VB | VBW ≥ 3RBW |
| Detector | power averaging (rms) or sample detector (when rms not available). |
| Trace | Max Hold |
| Sweep Time | Auto |

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP




5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


**5.1.5 TEST RESULTS**

| Mode | Test Channel | Reading Level (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|-----------|--------------|--------------------------|------------------|--------|
| 802.11b | Low | -15.7 | 8 | PASS |
| | Middle | -15.349 | 8 | PASS |
| | High | -16.409 | 8 | PASS |
| 802.11g | Low | -20.146 | 8 | PASS |
| | Middle | -19.341 | 8 | PASS |
| | High | -20.293 | 8 | PASS |
| 802.11n20 | Low | -20.281 | 8 | PASS |
| | Middle | -19.718 | 8 | PASS |
| | High | -20.421 | 8 | PASS |
| 802.11n40 | Low | -20.813 | 8 | PASS |
| | Middle | -21.195 | 8 | PASS |
| | High | -21.037 | 8 | PASS |

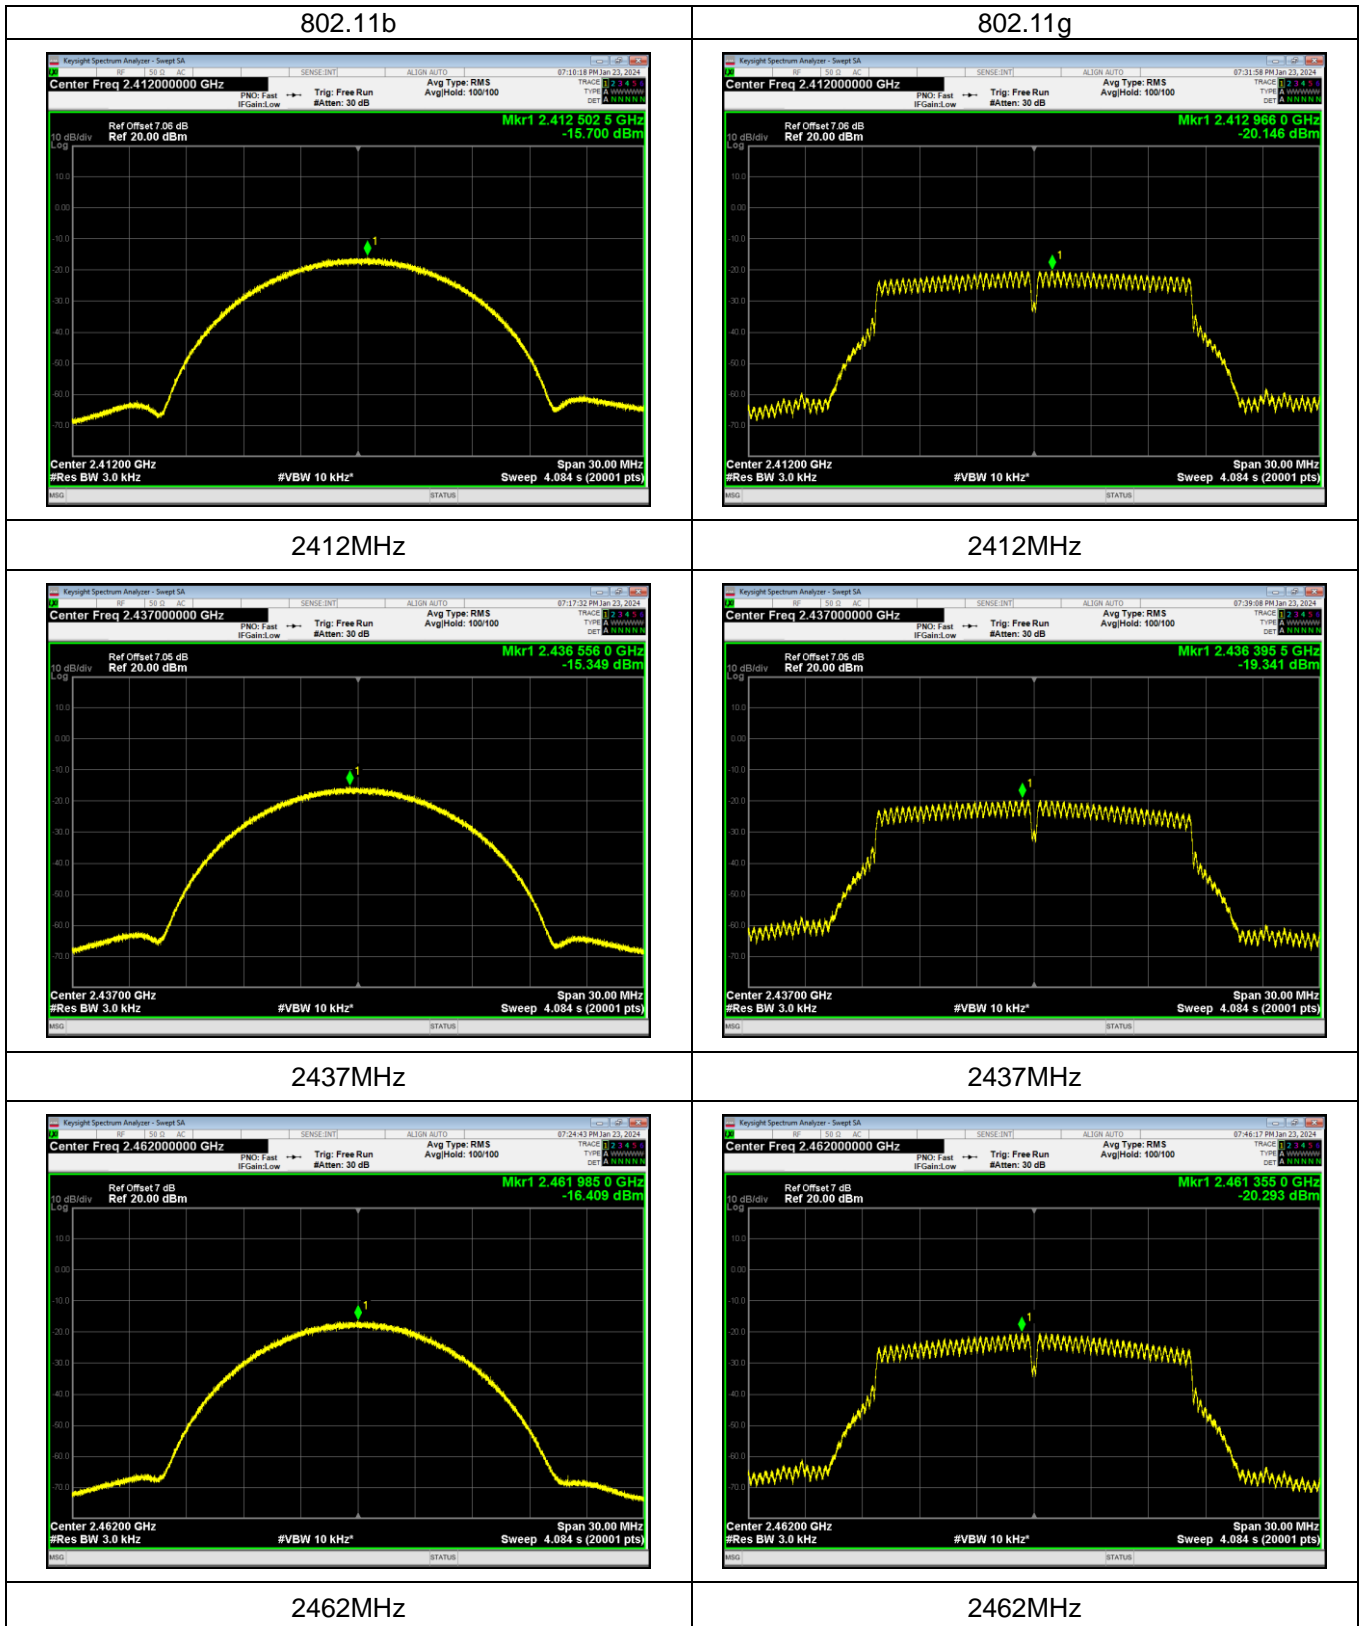





802.11n HT20

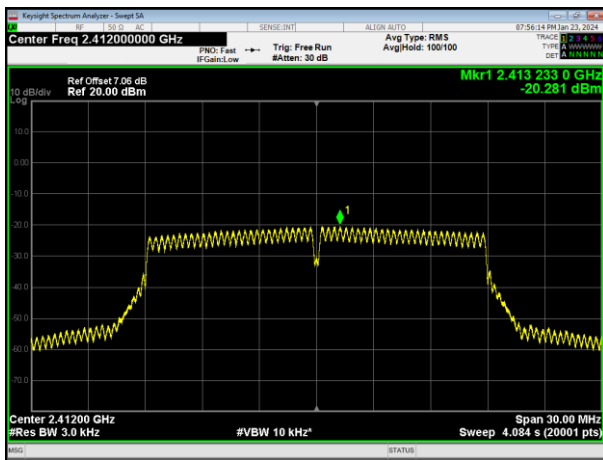


802.11n HT40

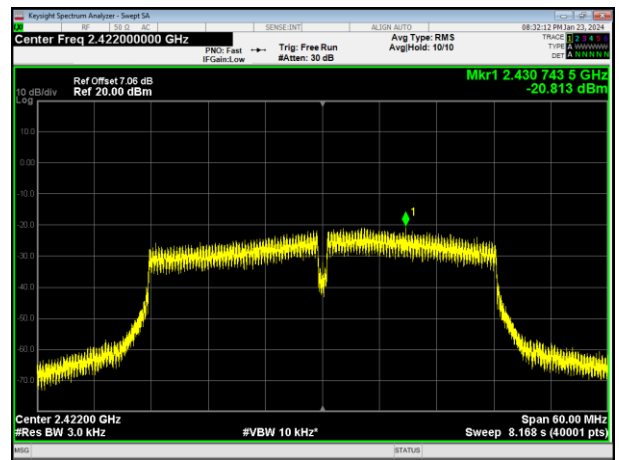


2412MHz

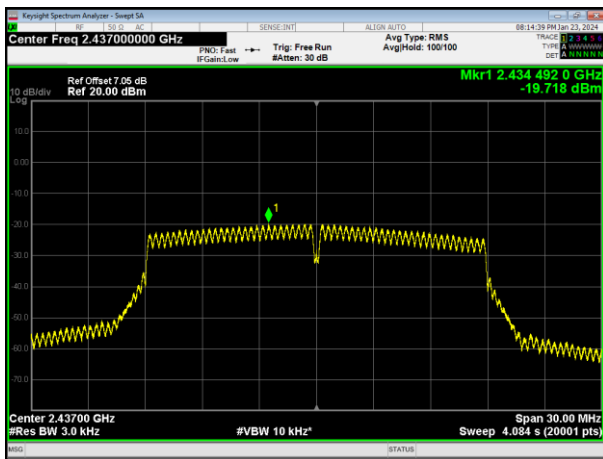


2422MHz

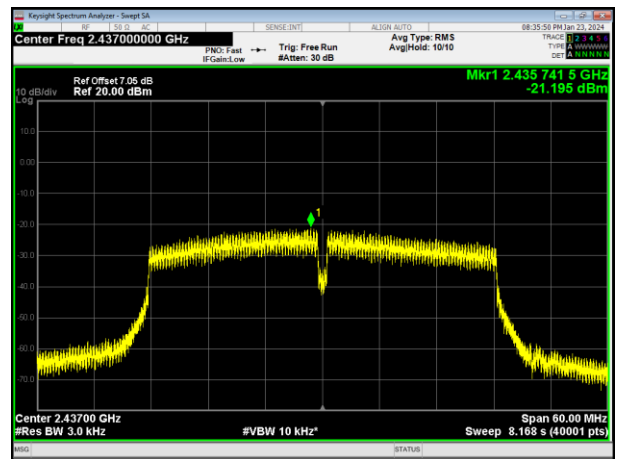

2437MHz

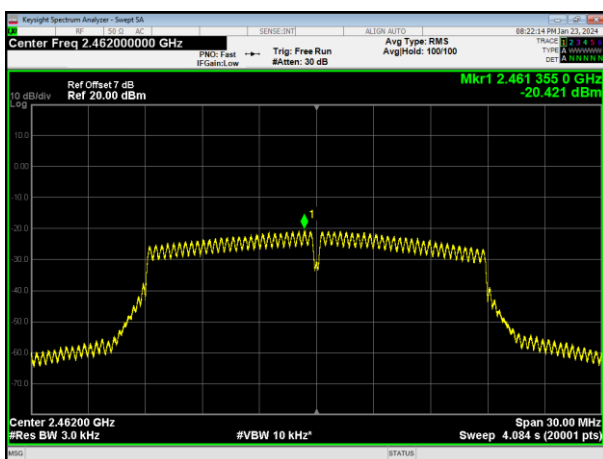

2437MHz

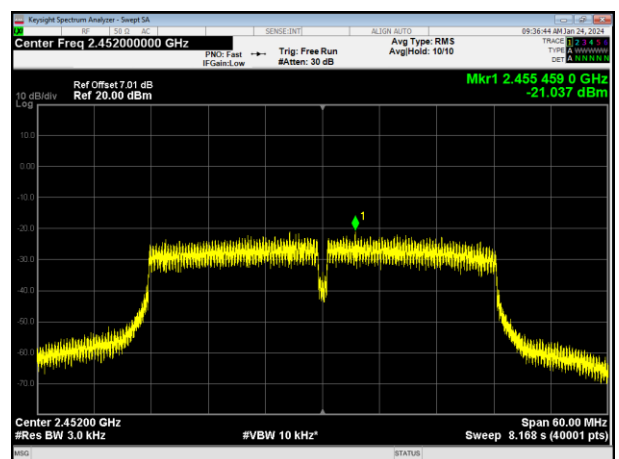

2462MHz

2452MHz



6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|-----------|---|----------------------|--------|
| Section | Test Item | Limit | Frequency Range(MHz) | Result |
| 15.247(a)(2) | Bandwidth | $\geq 500\text{KHz}$ (6dB bandwidth) | 2400-2483.5 | PASS |


6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) \geq RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

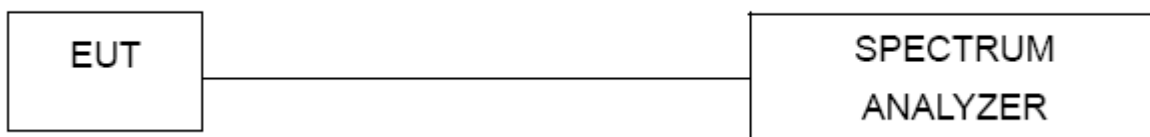

6.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**


| | Test Channel | 6dB Bandwidth (MHz) | Limit (MHz) | Result |
|--------------|--------------|---------------------|-------------|--------|
| 802.11b | Low | 8.672 | 0.5 | Pass |
| | Middle | 7.373 | 0.5 | Pass |
| | High | 7.532 | 0.5 | Pass |
| 802.11g | Low | 16.38 | 0.5 | Pass |
| | Middle | 15.691 | 0.5 | Pass |
| | High | 15.095 | 0.5 | Pass |
| 802.11n HT20 | Low | 14.808 | 0.5 | Pass |
| | Middle | 15.053 | 0.5 | Pass |
| | High | 14.952 | 0.5 | Pass |
| 802.11n HT40 | Low | 35.037 | 0.5 | Pass |
| | Middle | 35.067 | 0.5 | Pass |
| | High | 35.043 | 0.5 | Pass |




802.11b

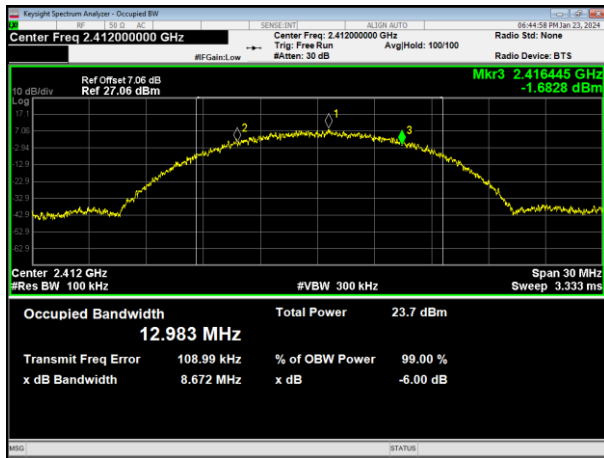


802.11g

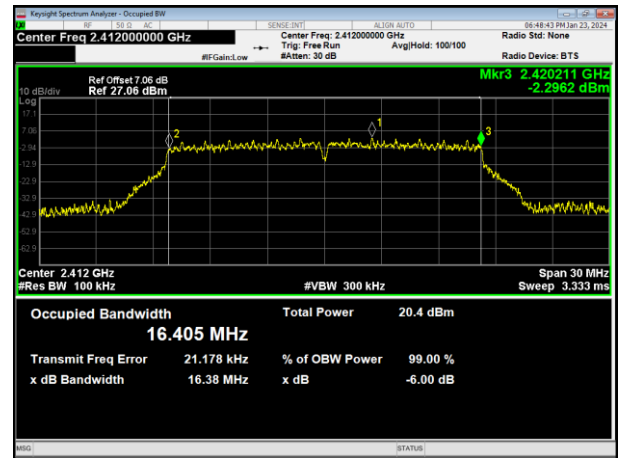


2412MHz

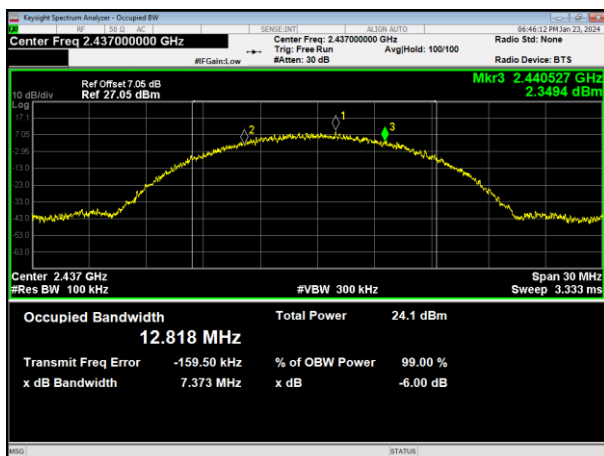


2412MHz

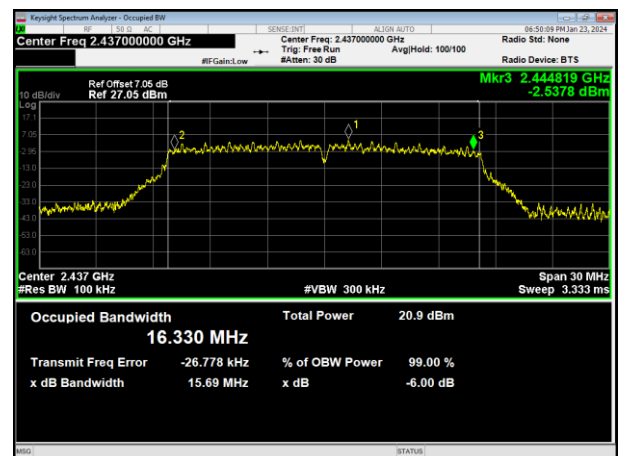

2437MHz

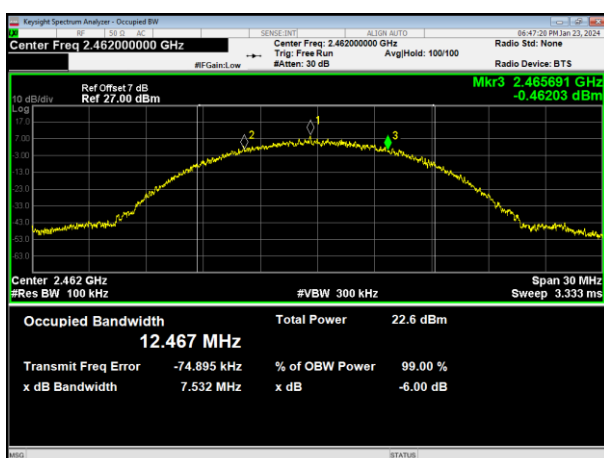

2437MHz

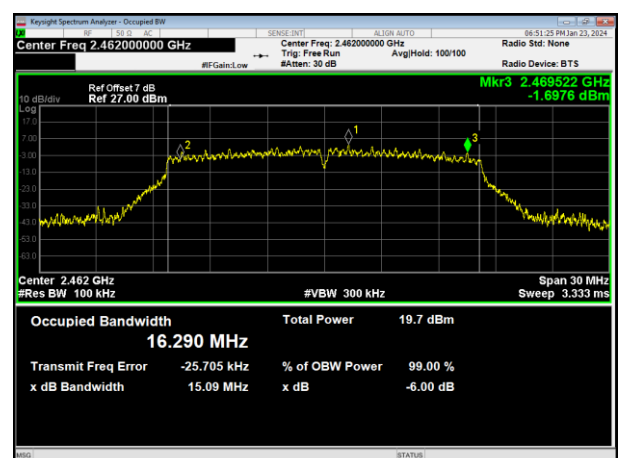


2462MHz


2462MHz




802.11n HT20

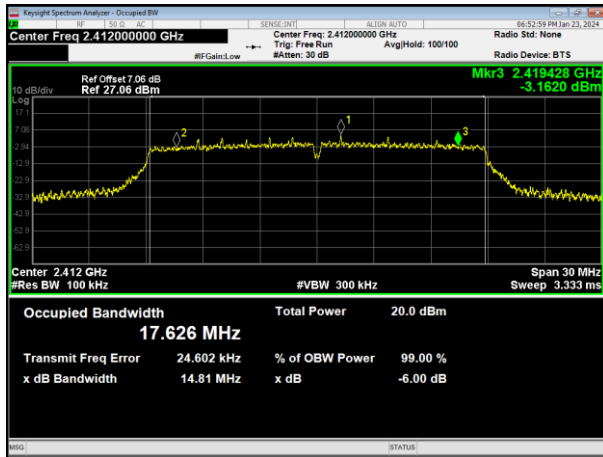


802.11n HT40

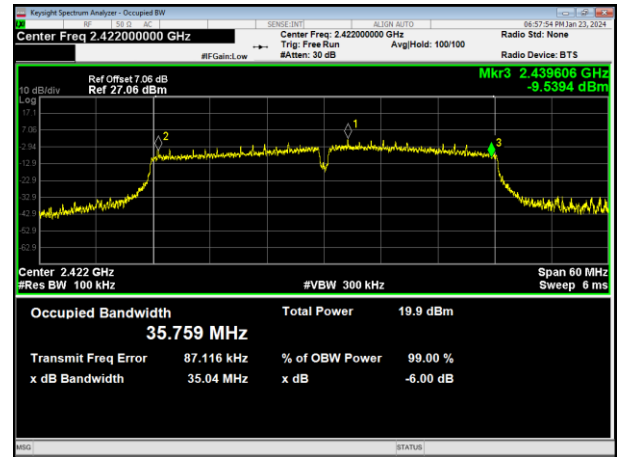


2412MHz

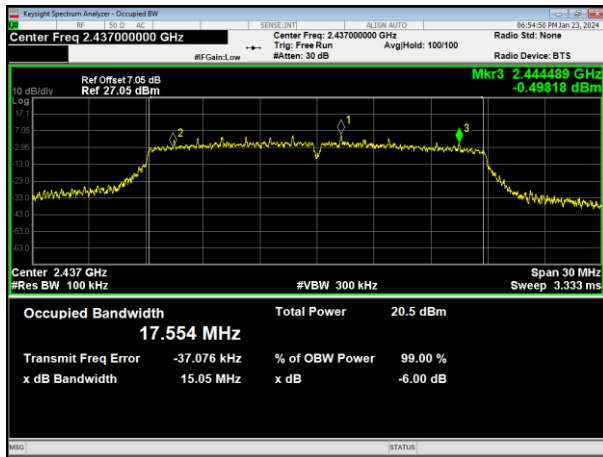


2422MHz

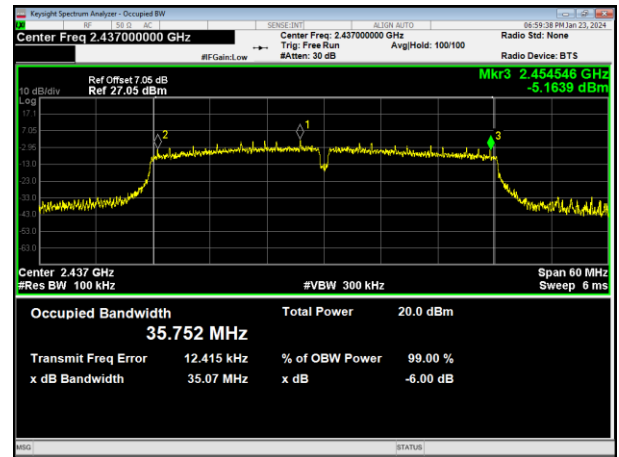

2437MHz

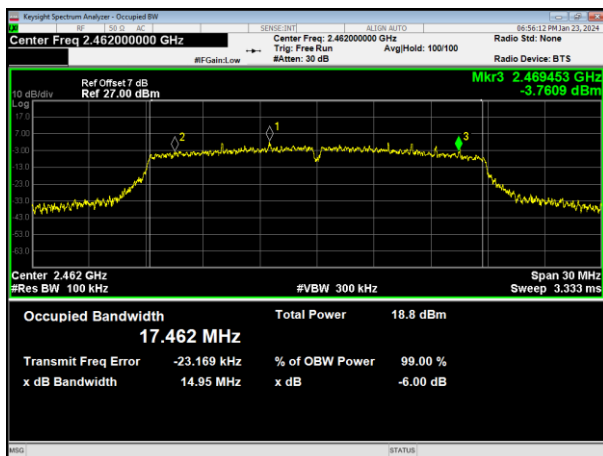

2437MHz

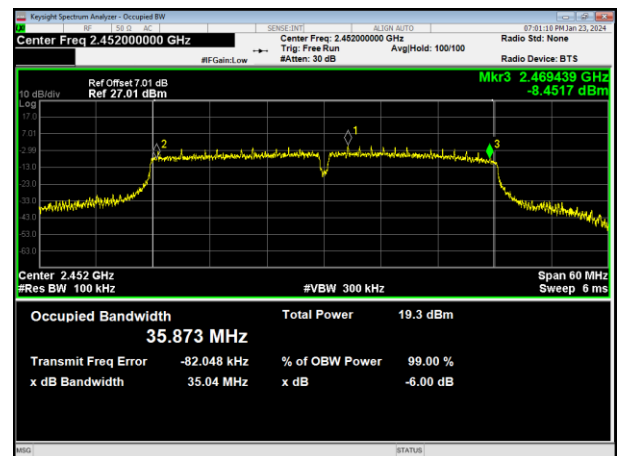

2462MHz

2452MHz



7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is Internal Antenna, It comply with the standard requirement.

8. TEST SEUUP PHOTO

Reference to the appendix I for details.

9. EUT PHOTO

Reference to the appendix II for details.

******* END OF REPORT *******