

FCC Test Report

Report No.: AGC16235240101FE01

FCC ID 2BEJV-PMR-171

APPLICATION PURPOSE Original Equipment

PRODUCT DESIGNATION: Ultra-Portable Transceiver

BRAND NAME : GUOHETEC

MODEL NAME: PMR-171

APPLICANT: Chongqing Guohe Electronic Technology Co.,Ltd.

DATE OF ISSUE : Jan. 25, 2024

STANDARD(S) : FCC Part 15 Subpart B

REPORT VERSION: V1.0

Attestation of Global Conce (Shenzhen) Co., Ltd



Page 2 of 41

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 25, 2024	Valid	Initial Release







TABLE OF CONTENTS

General Information Product Information	
2.1 Product Technical Description	5
2.2 Auxiliary Surrounding Description	6
2.2 Test Methodology	7
2.3 Definition of Device Classification	7
2.3 Description of Test Modes	8
3. Test Environment	g
3.1 Address of The Test Laboratory	9
3.2 Test Facility	9
3.3 Environmental Conditions	10
3.4 Measurement Uncertainty	10
3.5 List of Equipment Used	11
4. Summary Of Test Results 5. Radiated Emission Measurements	12 13
5.1 Provisions Applicable	13
5.2 Measurement Setup	13
5.3 Measurement Procedure	14
5.4 Measurement Result	16
6. Conducted Emission Measurements	32
6.1 PROVISIONS APPLICABLE	32
6.2 MEASUREMENT SETUP	32
6.3 Measurement Procedure	33
6.4 Measurement Result	33
7. Antenna Conducted Power For Receivers	34
7.1 Provisions Applicable	32
7.2 Measurement Setup	32
7.3 Measurement Procedure	34
7.4 Measurement Result	35
8. Scanning Receivers And Frequency Converters Used With Scanning Receivers	39
8.1 Provisions Applicable	39
8.2 Measurement Setup	39
8.3 Measurement Procedure	39
8.4 Measurement Result	40
Appendix I: Photographs of Test Setup	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/





1. General Information

Chongqing Guohe Electronic Technology Co.,Ltd.	
15F, Unit 1, Building 12, No.2 Gangan 2nd Road, Jiangbei District, Chongqing	
Chongqing Guohe Electronic Technology Co.,Ltd.	
15F, Unit 1, Building 12, No.2 Gangan 2nd Road, Jiangbei District, Chongqing	
Chongqing Guohe Electronic Technology Co.,Ltd.	
15F, Unit 1, Building 12, No.2 Gangan 2nd Road, Jiangbei District, Chongqing	
Ultra-Portable Transceiver	
GUOHETEC	
PMR-171	
N/A	
N/A	
Jan. 09, 2024	
Jan. 09, 2024~Jan. 25, 2024	
No any deviation from the test method	
Normal	
Pass	
AGCTR-ER-FCC-SDOC V1.0	

Prepared By	Bibo Zhang	
	Bibo Zhang (Project Engineer)	Jan. 25, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Jan. 25, 2024
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Jan. 25, 2024



Page 5 of 41

2. Product Information

2.1 Product Technical Description

Housing Type	Plastic and metal	
RX Frequency Range	Rx:100kHz~1GHz (Scanning Receiver)	
Equipment Type	Table-Top	
Hardware Version	V3.0	
Software Version	V3.4.6	
Power Supply	DC 13.8V,6A by DC Line/ DC 14.2V,5Ah by Battery	

I/O Port Information (⊠Applicable □Not Applicable)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
Antenna Port	1	N/A	1
Hand microphone Port	1	0.8m unshielded	1
Earphone Port	1	N/A	N/A
Battery warehouse interface	1	N/A	N/A
DC Power Port	1	0.8m unshielded	1
HOST USB Port	1	N/A	N/A
USB Port	1	N/A	N/A
Audio output interface	1	N/A	N/A
ACC Port	1	N/A	N/A
RS232 Serial port.	1	N/A	N/A



Page 6 of 41

2.2 Auxiliary Surrounding Description

The Following Peripheral Devices and Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

No	. Equipment	Model No.	Manufacturer	Specification Information	Cable
1	50ohm Load	N/A	Amphenol	DC-3G, Max.50W	N/A

Equipment	Manufacturer	Model Name	Specification	Data Cable	Power Cable
Hand microphone	N/A	N/A	N/A	-	0.8m Unshielded
Battery	N/A	N/A	DC 14.2V 5AH	-	-
DC Power Line	N/A	N/A	N/A	N/A	0.5m Unshielded
USB Cable	N/A	N/A	N/A	N/A	1.0m Unshielded



Page 7 of 41

2.2 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2.3 Definition of Device Classification

Unintentional radiator:

A device which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment.

Class B Digital Device:

A digital device which is marketed for use by the general public or in a residential environment.

Note:

A manufacturer may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.



Page 8 of 41

2.3 Description of Test Modes

No.	Test Mode	Remark
1	Scanning mode by DC 13.8V of DC Line	Worst
2	Scanning stopped/Receiving at low channel of 100kHz to 1GHz by DC 13.8V	
3	Scanning stopped/Receiving at middle channel of 100kHz to 1GHz by DC 13.8V	
4	Scanning stopped/Receiving at high channel of 100kHz to 1GHz by DC 13.8V	
5	Scanning mode by DC 14.2V,5Ah of Battery	Worst
6	Scanning stopped/Receiving at low channel of 100kHz to 1GHz by DC 14.2V,5Ah	
7	Scanning stopped/Receiving at middle channel of 100kHz to 1GHz by DC 14.2V,5Ah	
8	Scanning stopped/Receiving at high channel of 100kHz to 1GHz by DC 14.2V,5Ah	

Note: Only the result of the worst case was recorded in the report.



Page 9 of 41

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 10 of 41

3.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$



Page 11 of 41

3.5 List of Equipment Used

• R	adiated Emission	on					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023/02/18	2024/02/17
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023/06/03	2024/06/02
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023/05/11	2025/05/10
\boxtimes	AGC-EM-E029	Horn Antenna	ETS	3117	00034609	2023/03/23	2024/03/22
\boxtimes	AGC-EM-E096	Pre-amplifier	ETS	3117-PA	00246148	2022/08/04	2024/08/03
\boxtimes	AGC-EM-S003	Test Software	FARA	V.RA-03A	N/A	N/A	N/A
\boxtimes	AGC-EM-S004	Test Software	Tonscend	4.0.0.0	N/A	N/A	N/A

• RI	RF Conducted Measurement								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E002	RF Communication Test Set	HP	8920B	US35010161	2023/06/02	2024/06/01		
\boxtimes	AGC-ER-E086	Spectrum Analyzer	KEYSIGHT	N9020A	MY53300860	2023/06/01	2024/05/31		
	AGC-EM-A007	30dB Attenuator	N/A	58-30-33	N/A	2023/06/01	2024/05/31		



Page 12 of 41

4. Summary Of Test Results

Item	FCC Rules	Description Of Test	Class/Severity	Result
1	§15.107	Radiated Emission	Class B	Pass
2	§15.109	Conducted Emission	Class B	Not applicable
3	§15.111	Antenna Conducted Power for Receivers	/	Pass
4	§15.121(b)	Scanning receivers and frequency converters used with scanning receivers	/	Pass

NOTE: The device under test is a DC power supply device, and the conducted disturbance test is not applicable.




5. Radiated Emission Measurements

5.1 Provisions Applicable


FCC CFR Title 47 Part 15 Subpart B Section 15.109:

Frequency Range	Frequency Range Class B Limit (dBuV/m @3m)		Value
30MHz-88MHz	40.00	50.00	Quasi-peak
88MHz-216MHz	43.50	53.50	Quasi-peak
216MHz-960MHz	46.00	56.00	Quasi-peak
960MHz-1GHz	54.00	64.00	Quasi-peak
Above 1GHz	54.00	60.00	Average
Above IGHZ	74.00	80.00	Peak

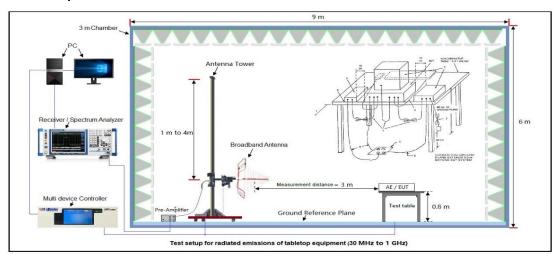5.2 Measurement Setup



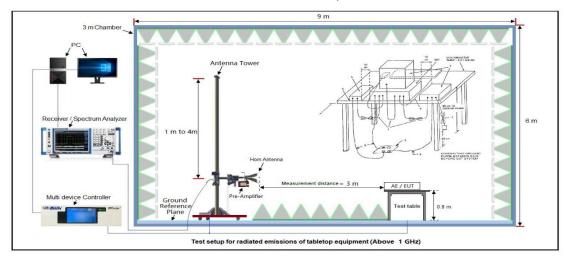Radiated Emission Measurements Test Setup for 30MHz to 1GHz



Radiated Emission Measurements Test Setup for above 1GHz



Report No.: AGC16235240101FE01 Page 14 of 41

5.3 Measurement Procedure

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received power by AC 120V/60Hz.
- 5. The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6. The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7. The test mode(s) were scanned during the test:
- 8. Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 10. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 11. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 12. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 13. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 14. The test data of the worst case condition (mode 1) was reported on the following Data page.




Page 15 of 41

EMI Test Receiver Setup:


During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
Above I GHZ	1MHz	10 Hz	/	Ave.






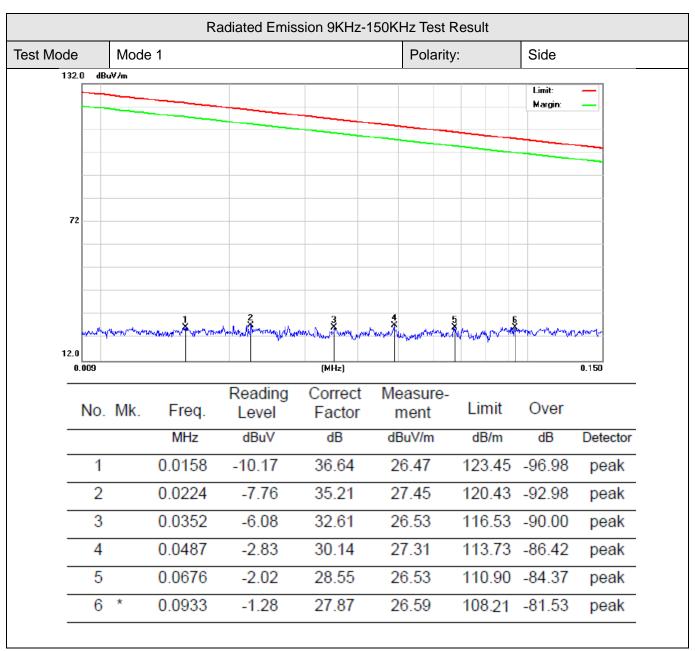
5.4 Measurement Result




RESULT: PASS







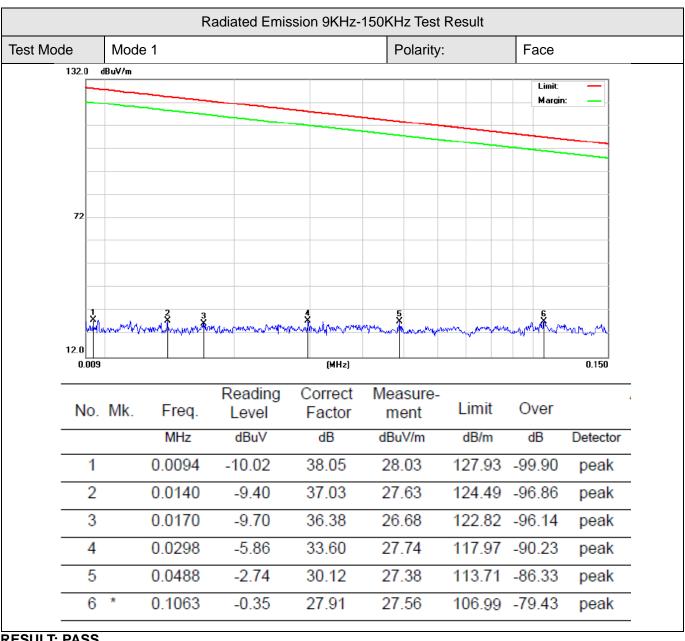

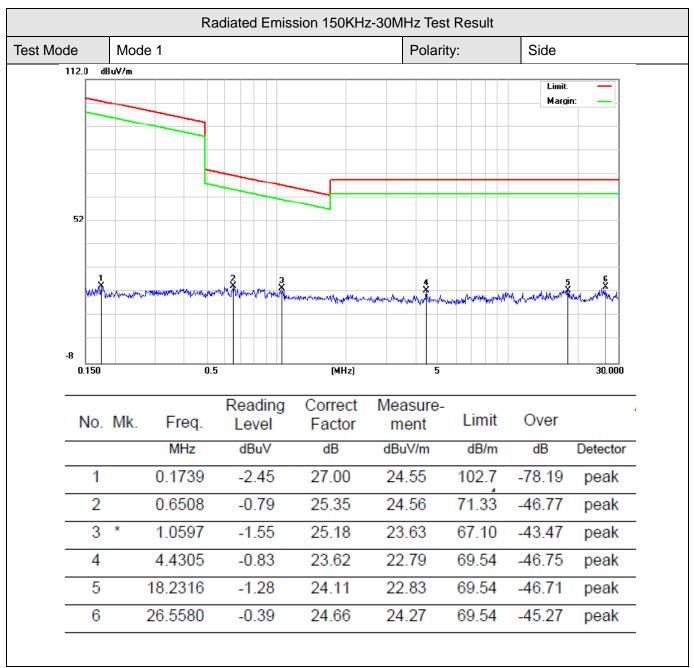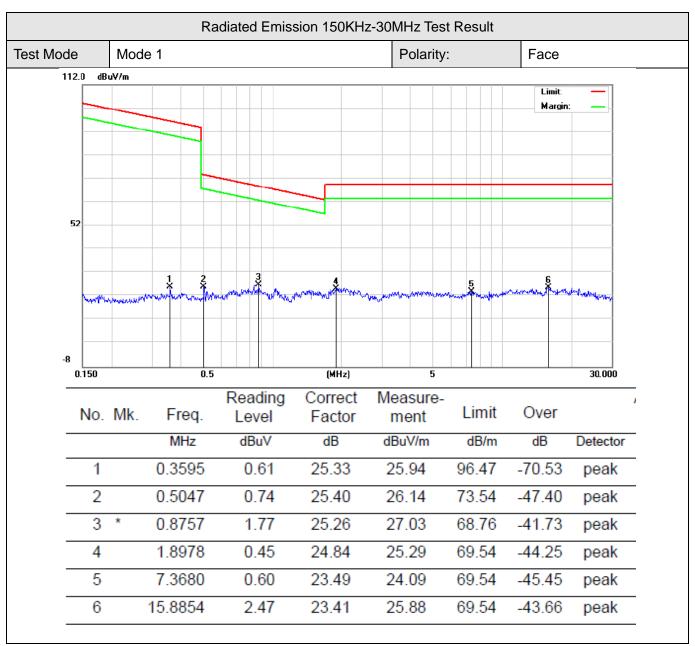







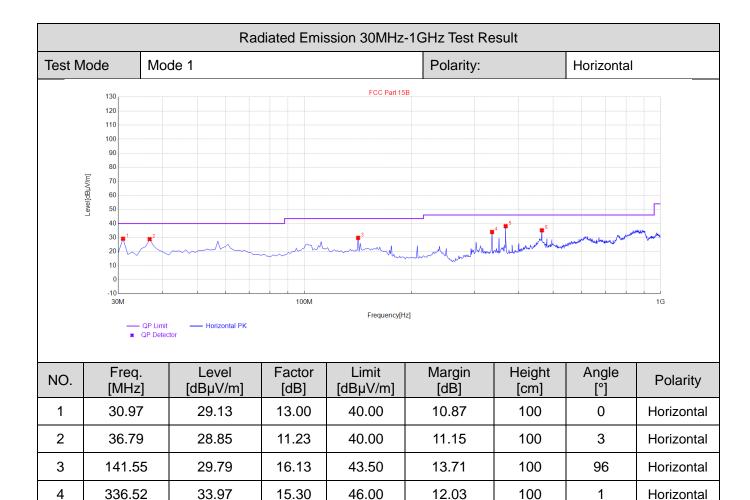












46.00

46.00

7.90

10.83

100

100

30

191

Horizontal

Horizontal

RESULT: PASS

5

6

367.56


464.56

38.10

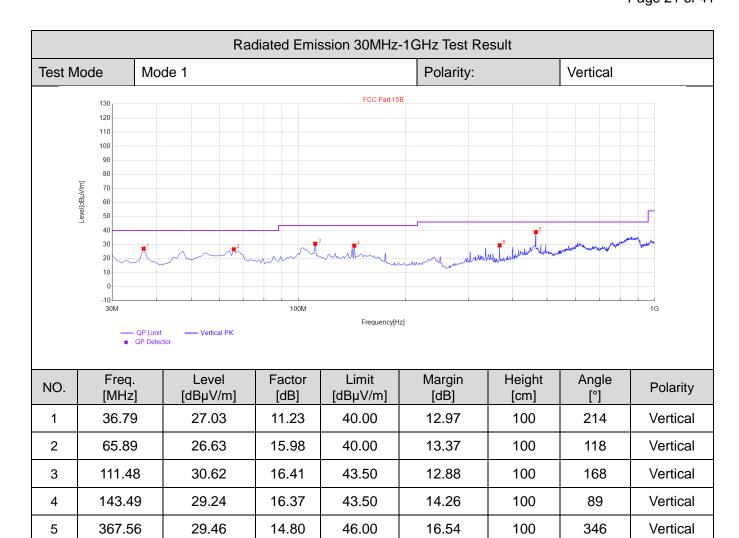
35.17

14.80

23.62







46.00

7.10

100

181

Vertical

RESULT: PASS


464.56

6

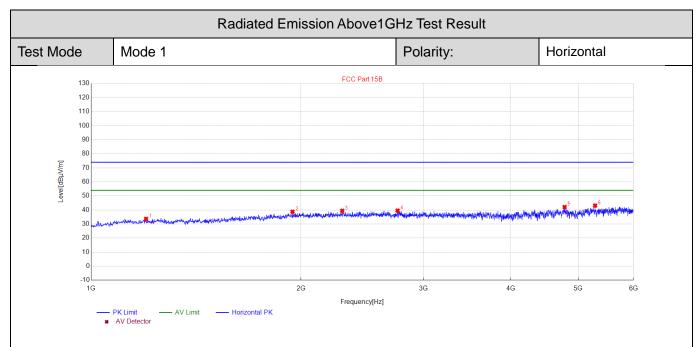
Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

38.90


23.62









Final	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1199.0398	33.68	-18.02	74.00	40.32	100	190	Horizontal
2	1945.189	38.75	-13.86	74.00	35.25	100	340	Horizontal
3	2292.2585	39.43	-12.70	74.00	34.57	100	30	Horizontal
4	2752.3505	39.56	-12.08	74.00	34.44	100	210	Horizontal
5	4778.7558	42.09	-7.82	74.00	31.91	100	60	Horizontal
6	5284.857	43.15	-7.26	74.00	30.85	100	120	Horizontal






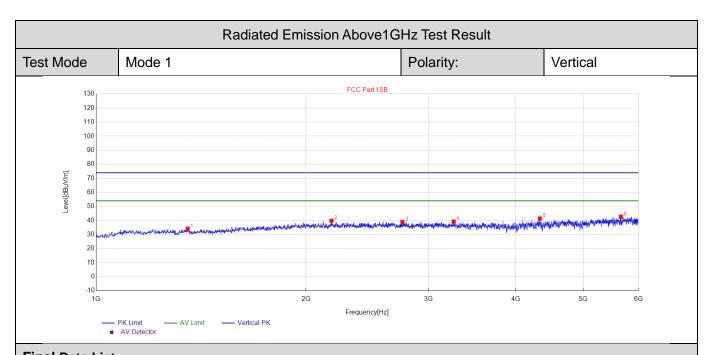


Final	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1353.0706	34.06	-17.78	74.00	39.94	100	330	Vertical
2	2176.2352	39.79	-12.98	74.00	34.21	100	130	Vertical
3	2750.3501	38.95	-12.08	74.00	35.05	100	30	Vertical
4	3258.4517	39.24	-11.28	74.00	34.76	100	50	Vertical
5	4331.6663	41.40	-8.58	74.00	32.60	100	180	Vertical
6	5661.9324	42.64	-6.40	74.00	31.36	100	90	Vertical







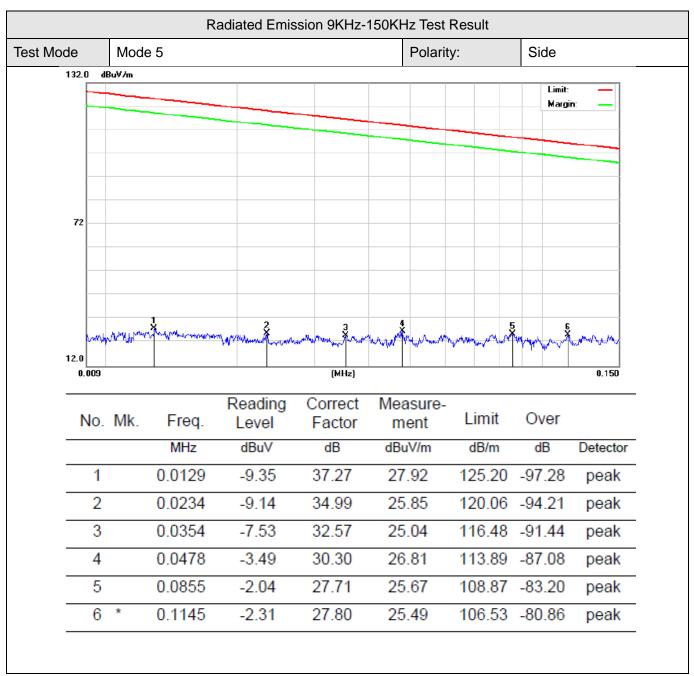

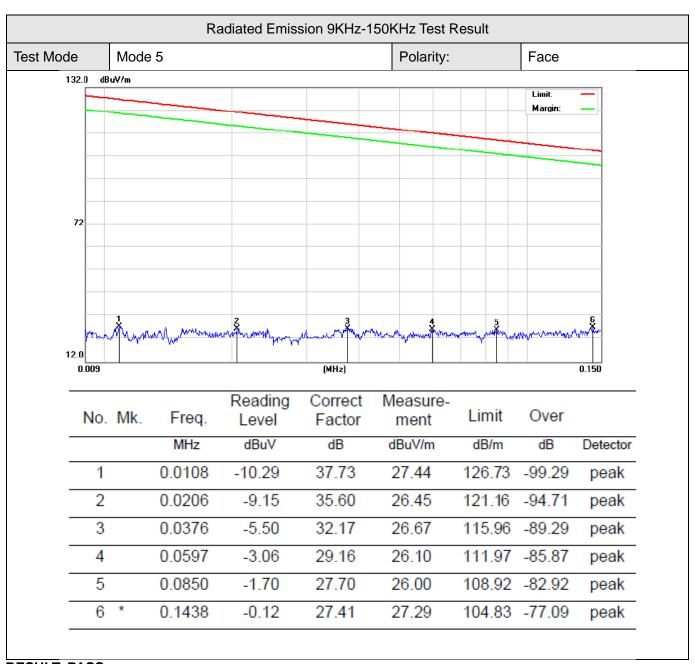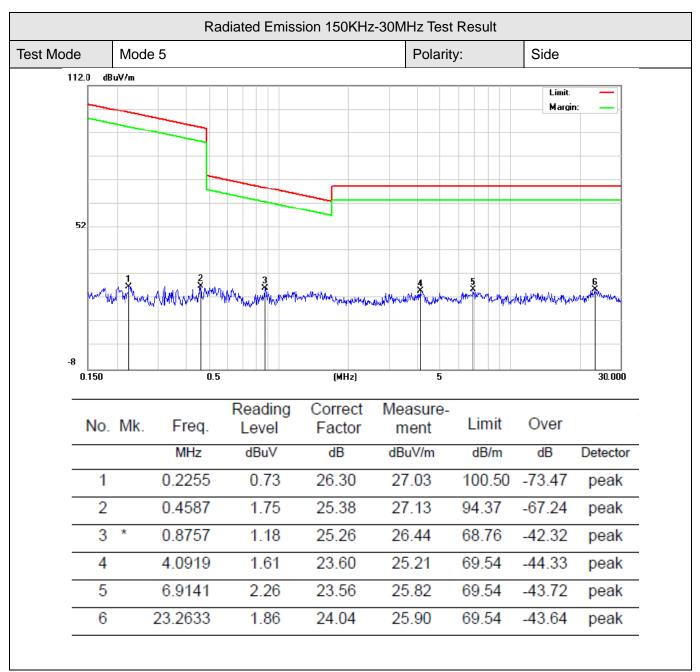







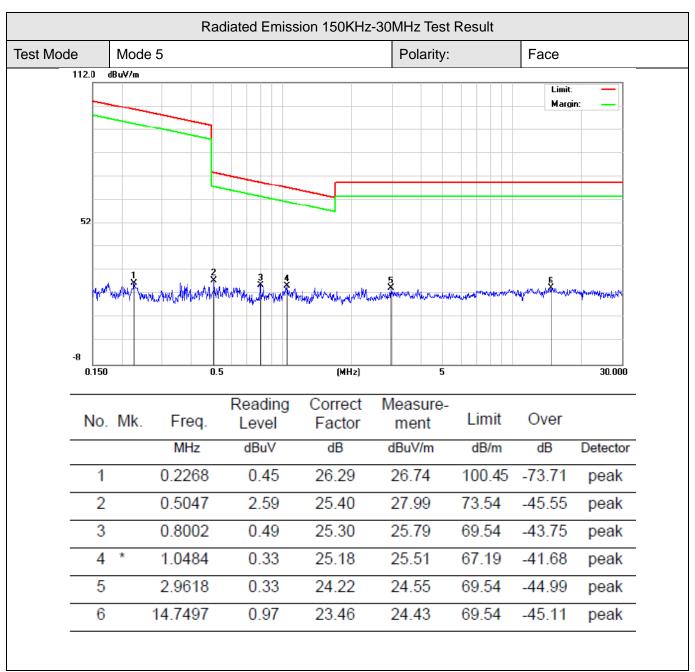







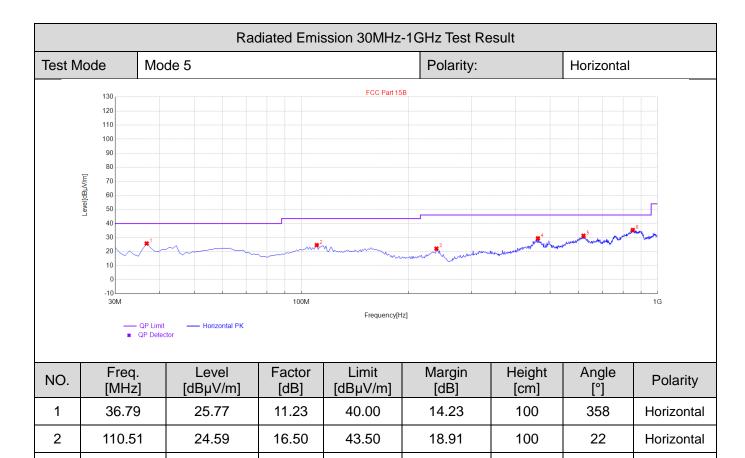












46.00

46.00

46.00

46.00

23.93

16.59

14.71

10.61

100

100

100

100

266

320

63

26

Horizontal

Horizontal

Horizontal

Horizontal

RESULT: PASS

239.52

461.65

619.76

852.56

22.07

29.41

31.29

35.39

16.00

24.36

25.90


29.77

3

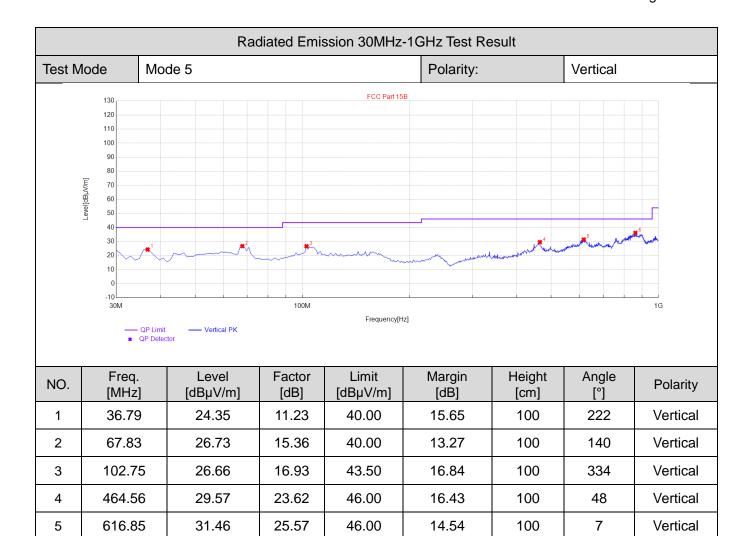
4

5

6







46.00

9.84

100

164

Vertical


RESULT: PASS

6

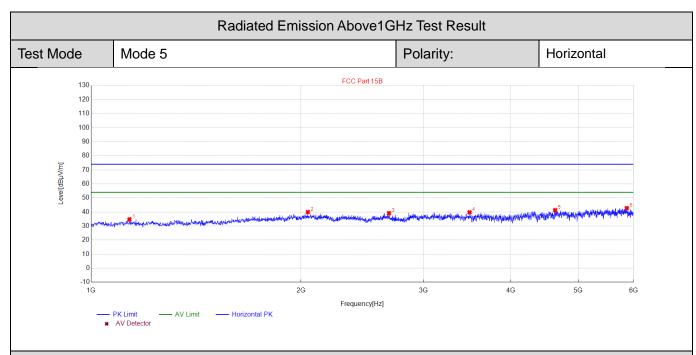
861.29

36.16


29.97








Final	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1135.027	34.80	-18.12	74.00	39.20	100	220	Horizontal
2	2046.2092	39.93	-13.30	74.00	34.07	100	280	Horizontal
3	2675.3351	39.17	-12.12	74.00	34.83	100	40	Horizontal
4	3490.4981	39.77	-10.67	74.00	34.23	100	40	Horizontal
5	4630.7261	41.28	-7.85	74.00	32.72	100	200	Horizontal
6	5868.9738	42.74	-5.79	74.00	31.26	100	230	Horizontal





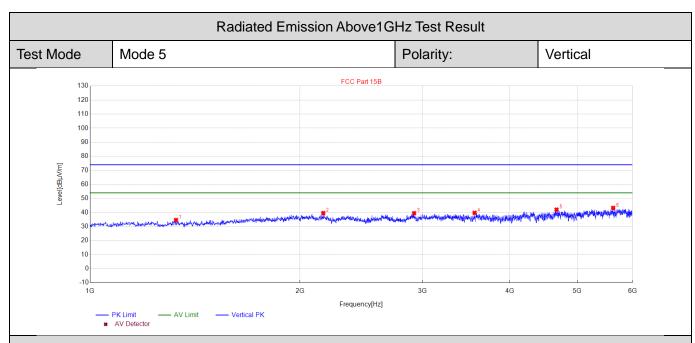

Final	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1328.0656	34.63	-17.82	74.00	39.37	100	140	Vertical
2	2160.232	39.59	-13.02	74.00	34.41	100	150	Vertical
3	2916.3833	39.51	-12.01	74.00	34.49	100	320	Vertical
4	3561.5123	39.75	-10.56	74.00	34.25	100	20	Vertical
5	4668.7337	42.03	-7.84	74.00	31.97	100	200	Vertical
6	5628.9258	43.25	-6.50	74.00	30.75	100	270	Vertical

Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain, Margin= Limit-Measurement.
- 2. The "Factor" value can be calculated automatically by software of measurement system.



Page 32 of 41

6. Conducted Emission Measurements

6.1 PROVISIONS APPLICABLE

FCC CFR Title 47 Part 15 Subpart B Section 15.107:


For Class B Limits:

Francisco	Maximum RF	Line Voltage	
Frequency	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

For Class A Limits:

Fraguency	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	79	66			
500kHz~30MHz	73	60			

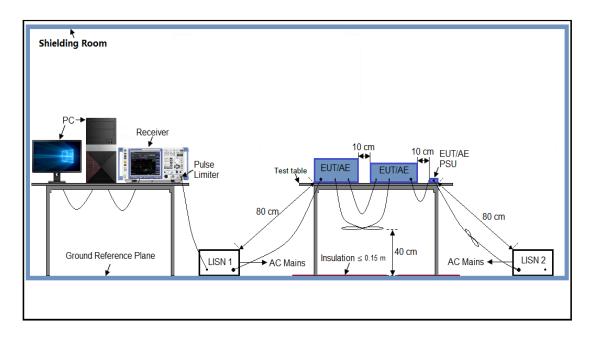6.2 MEASUREMENT SETUP





Page 33 of 41

6.3 Measurement Procedure

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipment received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.

6.4 Measurement Result

Note: Not applicable.



Page 34 of 41


7. Antenna Conducted Power For Receivers

7.1 Provisions Applicable

The antenna conducted power of the receiver as defined in §15.111 shall not exceed the values given in the following tables

Frequency Range	9 KHz to 2GHz
Limit	2.0 nW (-57 dBm)

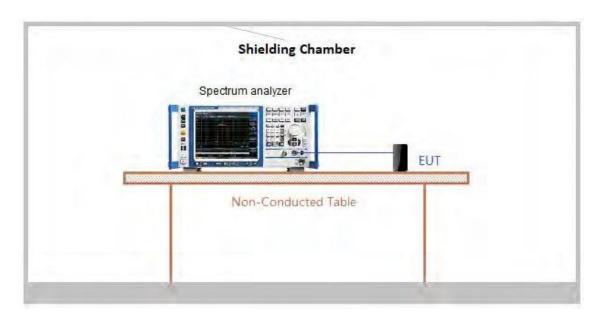7.2 Measurement Setup




7.3 Measurement Procedure

1. The receiver antenna terminal connected to a spectrum analyzer.

2. Receiver set as follow:

Frequency range	RBW (kHz)	VBW (kHz)
9 kHz ~ 150 kHz	1	3
150 kHz ~ 30 MHz	10	30
30 MHz ~ 1000 MHz	100	300
1000 MHz ~ 3000 MHz	1000	3000

3. The test data of the worst case condition (mode 1) was reported on the following Data page.





7.4 Measurement Result

The test data of the worst case condition (mode 1) was reported on the following Data page:

Test Graphs of Antenna Conducted Power for Receivers Frequency Start Freq 9.000 kHz Avg Type: Log-Pwr Avg|Hold:>100/100 Trig: Free Run TYPE **Auto Tune** Mkr1 9.470 kHz -78.041 dBm Ref -37.00 dBm 10 dB/div Center Freq 79.500 kHz Start Freq 9.000 kHz Stop Freq 150 000 kHz CF Step 14.100 kHz <u>Auto</u> Mar Freq Offset 0 Hz Stop 150.00 kHz Sweep 136.0 ms (30000 pts) Start 9.00 kHz #Res BW 1.0 kHz **#VBW** 3.0 kHz

Frequency Avg Type: Log-Pw Avg|Hold>100/100 Start Freq 150.000 kHz Trig: Free Run Auto Tune Mkr1 150.0 kHz -81.517 dBm Ref -37.00 dBm Center Frea 15.075000 MHz Start Freq 150.000 kHz Stop Frea 30.000000 MHz CF Step 2.985000 MHz Auto Freq Offset 0 Hz

Test_Graph_RX_FrequencyRange_9kHz-150kHz

Any report having not been signed by authorized approver, of having been authorized authorized authorized approver, of having been authorized authorized authorized authorized by the bednead of the standard authorized by the bednead of the bednead of the standard authorized by the bednead of the bednead


Test_Graph_RX_FrequencyRange_150kHz-30MHz

#VBW 30 kHz

Stop 30.00 MHz Sweep 286.0 ms (30000 pts)

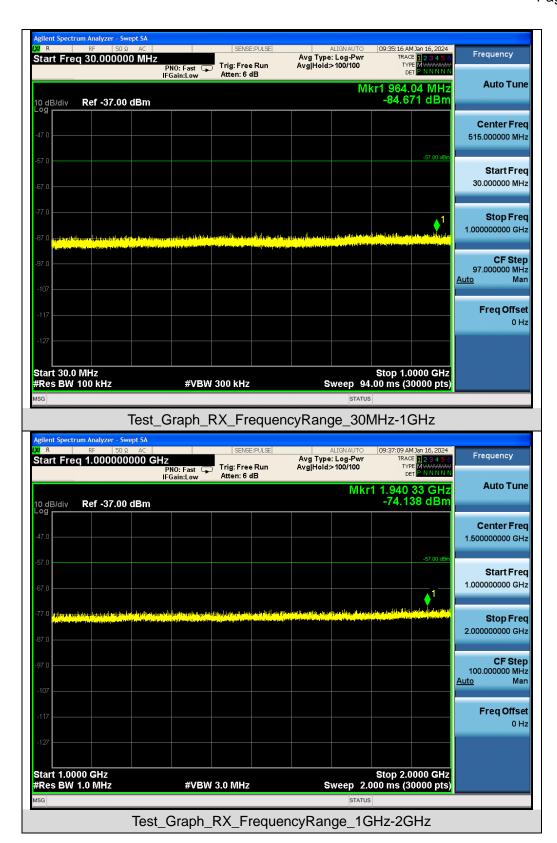
Start 150 kHz





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






The test data of the worst case condition (mode 5) was reported on the following Data page:

Test Graphs of Antenna Conducted Power for Receivers

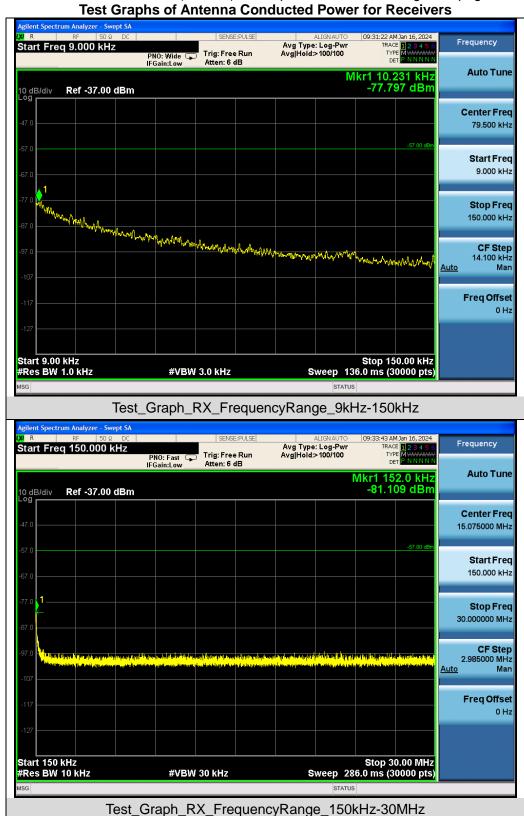



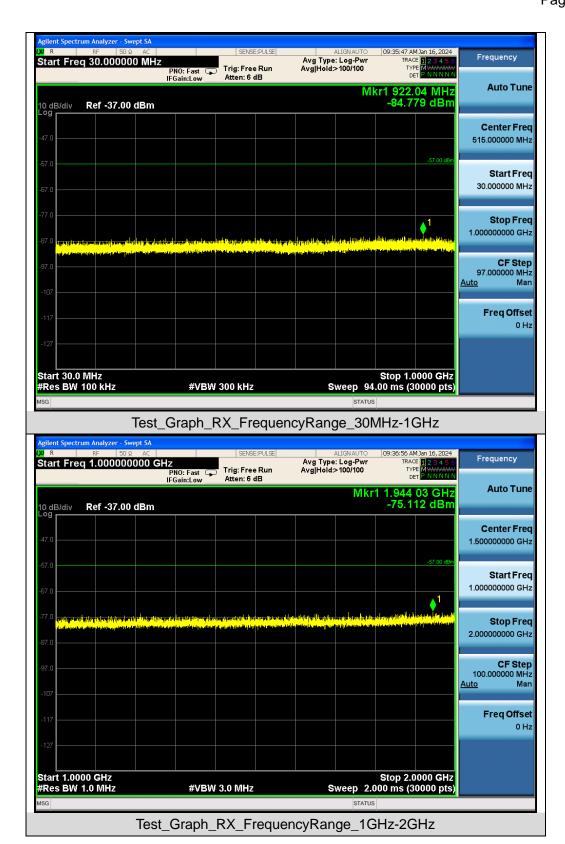

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



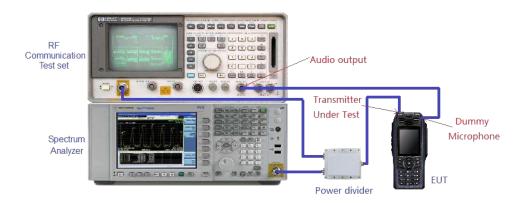
Page 39 of 41

8. Scanning Receivers And Frequency Converters Used With Scanning Receivers

8.1 Provisions Applicable

Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

8.2 Measurement Setup



8.3 Measurement Procedure

- 1) Connected the EUT as shown in the above block diagram.
- 2) Apply a RF signal to the receiver input port at lowest, middle and highest channel frequencies of receiver operation band.
- 3) Adjust the audio output level of the receiver to it's rated value with the distortion less than 10%.
- 4) Adjust the RF Signal Generator Output Power to produce 12 dB SINAD without the audio output power dropping by more than 3 dB. This output level of the RF SG at each channel frequency is the sensitivity of the receiver.
- 5) Select the lowest or worse-case sensitivity level for all of the bands as the reference sensitivity.
- 6) Adjust the RF Signal Generator output to a level of +60 dB above the reference sensitivity obtained in step 5) and its frequency to the frequency points in the cellular band.
- 7) Set the Receiver squelch to threshold, the signal required to open the squelch must be lower than the reference sensitivity level.
- 8) Set the receiver in a scanning mode and allow it to scan through it's complete receiving range.
- 9) If the receiver unsquelched or stopped on any frequency, receiving at this frequency, then adjust the signal generator output level until 12 dB SINAD is produced, this level is the spurious value and the difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38dB.
- 10) Repeat above procedure at the frequencies 824.5, 836.0, and 848.5 MHz for the mobile band, and 869.1, 881.5, and 893.5MHz for the cellular base band.



Page 40 of 41

8.4 Measurement Result

Not applicable

Since the scanning operating frequency is 100 kHz-1GHz, the influence of the public mobile frequency band cannot be received, so it is ignored and not evaluated



Page 41 of 41

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC16235240101AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC16235240101AP02

----END OF REPORT-----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.