



EMC TEST REPORT

Product Name: OneScreen Beacon

FCC ID: 2BEW9-BB1-N

Trade mark: OneScreen

Model No.: OneScreen BB1-N

S/N: /

Report No.: CTB240318021E

Applicant: NZS Inc. DBA OneScreen

Address: 12335 World Trade Drive, Suite 9, San Diego, CA 92128

Manufacturer: NZS Inc. DBA OneScreen

Address: 12335 World Trade Drive, Suite 9, San Diego, CA 92128

Prepared by: Shenzhen CTB Testing Technology Co., Ltd.

Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt: Mar. 08, 2024

Date of Test(s): Mar. 08, 2024 to Mar. 18, 2024

Date of Issue: Mar. 18, 2024

Test Standard(s): CFR47, FCC Part 15 Subpart B, ANSI C63.4: 2014

Test Result: Pass

In the configuration tested, the EUT complied with the standards specified above.

Compiled by:

Reviewed by:

Approved by:



Michael Niu

Bin Mei

Rita Xiao

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "★" indicates the testing items were fulfilled by subcontracted lab. "×" indicates the items are not in CNAS accreditation scope.

Table of Contents

1.	Description of version	3
2.	Test summary.....	4
3.	Measurement uncertainty.....	5
4.	General information.....	6
4.1	Description of EUT.....	6
4.2	Description of accessory device	6
4.3	Test conditions	6
4.4	Block diagram of EUT configuration	6
4.5	Operating condition of EUT	6
5.	List of Test and Measurement Instruments	7
6.	Conducted Emission	8
4.6	Limit.....	8
4.7	Test setup	8
4.8	EMI test receiver setup	8
4.9	Test procedure	8
7.	Radiated emissions.....	10
5.2	Limit.....	10
5.3	Test setup	10
5.4	EMI test receiver setup and spectrum analyzer setup	11
5.5	Test procedure	11
5.6	Corrected Amplitude & Margin Calculation	11
5.7	Test results	12
8.	Photographs of test setup	15

1. Description of version

Report No.	Issue Date	Description	Approved
CTB240318021E	Mar. 18, 2024	Original	Valid

2. Test summary

Test procedures according to the technical standards:

Standard	Test Item	Test Result
§15.107	Conducted Emission	N/A
§15.109	Radiated Emission	PASS

3. Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

Test Item	Frequency	Expanded Uncertainty (U_{Lab})
Conducted Emission	150 kHz to 30 MHz	± 3.1 dB
Radiated Emission	30 MHz to 1000 MHz	± 4.1 dB
Radiated Emission	1000 MHz to 6000 MHz	± 4.8 dB

4. General information

4.1 Description of EUT

Product name	OneScreen Beacon
Trade mark	OneScreen
Model No.	OneScreen BB1-N
Serial Model No.	N/A
Model Difference	N/A
Power Supply	lithium battery: DC 3.0V
Configuration	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor-standing
The highest frequency of the internal sources of the EUT	<input type="checkbox"/> below 1.705 MHz, the measurement shall only be made up to 30 MHz. <input type="checkbox"/> between 1.705 MHz and 108 MHz, the measurement shall only be made up to 1 GHz. <input type="checkbox"/> between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. <input type="checkbox"/> between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. <input checked="" type="checkbox"/> above 1 GHz, the measurement shall be made up to 5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Note: The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.


4.2 Description of accessory device

No.	Device Type	Brand	Model	Specification	Note
/	/	/	/	/	/

4.3 Test conditions

Temperature: 15-25°C
 Relative Humidity: 30-60 %
 Atmospheric pressure: 800hPa-1060hPa

4.4 Block diagram of EUT configuration

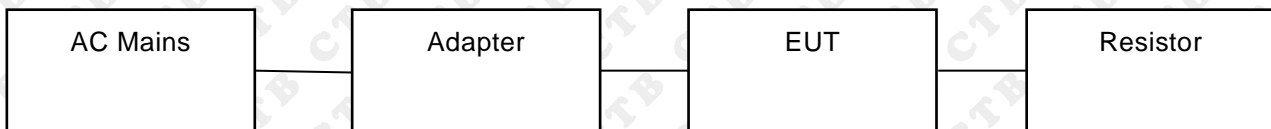

4.5 Operating condition of EUT

Operating condition	RFID	Working	Test Voltage	/
Note: This test covers all possible operating modes of the device, only the worst data are list in report. The worst data are shows (*) is the nearest standard limit which were recorded in this report.				

5. List of Test and Measurement Instruments

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	966 Chamber	C/ R/ T	966	/	2024/8/11
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2026/7/07
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2024/7/07
4	Amplifier	Agilent	8449B	3008A01838	2024/7/04
5	Amplifier	HP	8447E	2945A02747	2024/7/04
6	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2024/7/04
7	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024/7/04
8	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024/7/04
9	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024/7/04
10	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024/7/04
11	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. Conducted Emission

4.6 Limit

Except for Class A devices:


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency.

For Class A devices:

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	79	66
0.5-30	73	60

4.7 Test setup

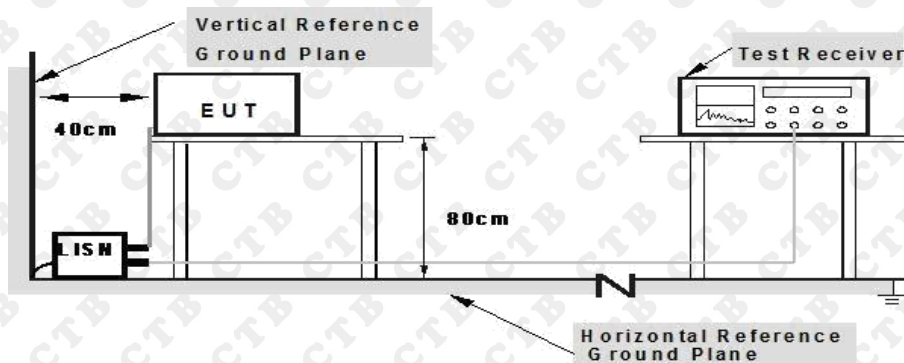

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

The setup of EUT is according with ANSI C63.4 measurement procedure. Specification used with FCC Part 15 limits.

4.8 EMI test receiver setup

Frequency Range	9kHz-30MHz
Resolution Bandwidth	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)

4.9 Test procedure

1. Measurement was performed in shielded room, and instruments used were followed clause 4 of ANSI C63.4.
2. Detailed test procedure was following clause 7 of ANSI C63.4.
3. Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.



N/A

NOTE: This EUT is powered by DC power only, this test item is not applicable.

7. Radiated emissions

5.2 Limit

Except for Class A devices (at 3m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

For Class A devices (at 10m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	90	39
88-216	150	43.5
216-960	210	46.4
Above 960	300	49.5

5.3 Test setup

Radiated Emission Test Set-Up Frequency Below 1 GHz

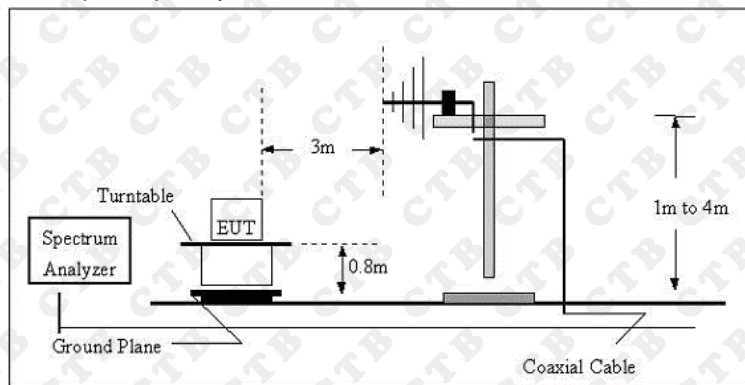

Radiated Emission Test Set-Up Frequency Above 1GHz

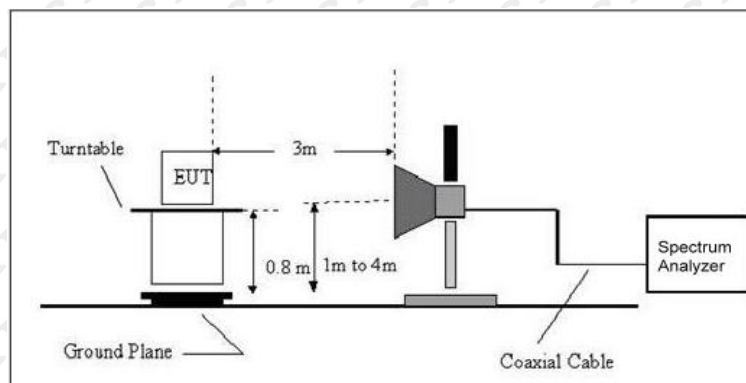

The radiated tests were performed in 3 meter Chamber test site, using the setup accordance with the ANSI C63.4:2014.

5.4 EMI test receiver setup and spectrum analyzer setup

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz-1000MHz	100kHz	300kHz	120kHz	QP
Above 1GHz	1MHz	3MHz	/	PK
	1MHz	10Hz	/	AVG

5.5 Test procedure

1. The measurement was performed in a semi-anechoic chamber, and instruments used were followed clause 4 of ANSI C63.4
2. Detailed test procedure was following clause 8 of ANSI C63.4.

5.6 Corrected Amplitude & Margin Calculation

1. The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$


2. The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

5.7 Test results

Below 1GHz Test Results:


Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode:	RFID

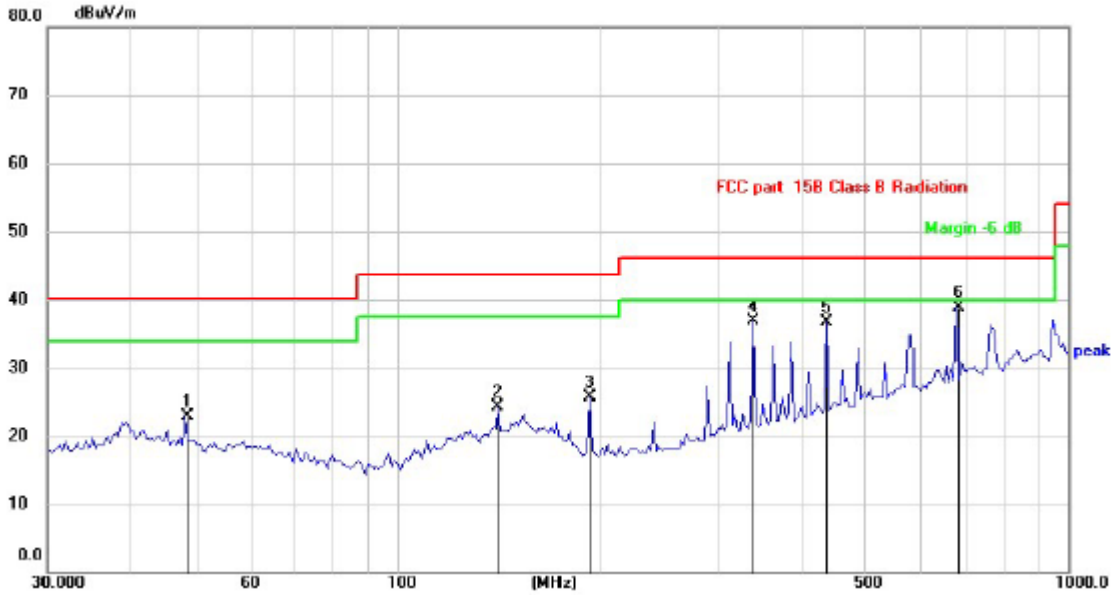

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dB/m	Over dB	Detector
1	48.1626	29.12	-6.30	22.82	40.00	-17.18	QP
2	141.5777	28.59	-4.20	24.39	43.50	-19.11	QP
3	194.1128	33.20	-7.53	25.67	43.50	-17.83	QP
4	340.1847	40.55	-3.70	36.85	46.00	-9.15	QP
5	438.6554	37.94	-1.30	36.64	46.00	-9.36	QP
6 *	679.9600	34.77	4.17	38.94	46.00	-7.06	QP

Note: Result=Reading+Factor
Over Limit=Result-Limit

Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode:	RFID

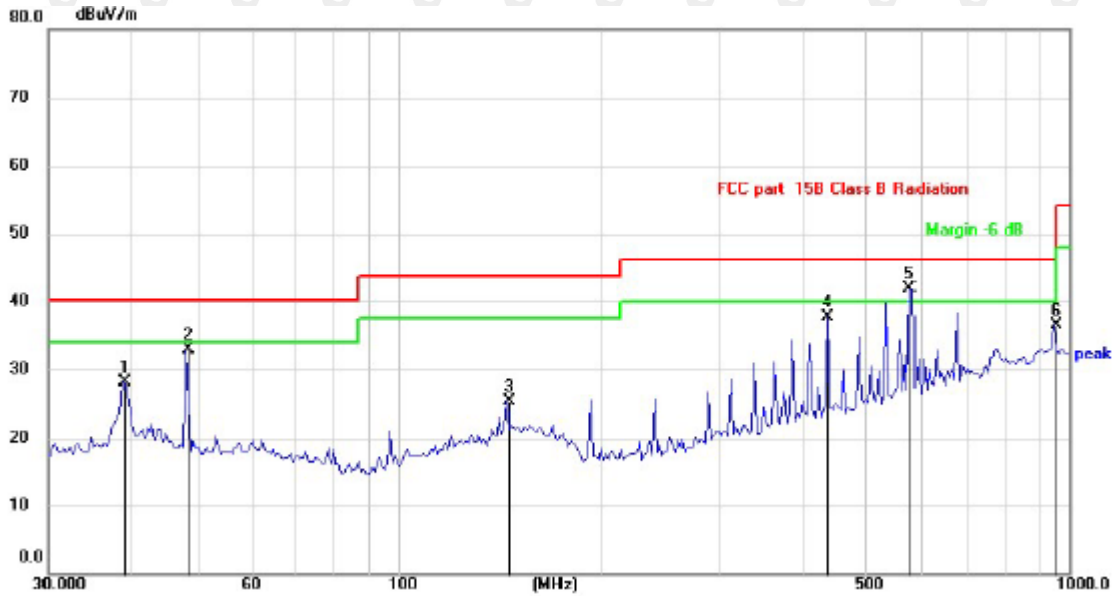

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dB/m	Over dB	Detector
1	38.6839	33.24	-5.12	28.12	40.00	-11.88	QP
2	48.1626	39.20	-6.30	32.90	40.00	-7.10	QP
3	145.3506	28.99	-3.74	25.25	43.50	-18.25	QP
4	438.6554	38.98	-1.30	37.68	46.00	-8.32	QP
5 *	580.7026	39.82	2.13	41.95	46.00	-4.05	QP
6	948.7610	29.13	7.36	36.49	46.00	-9.51	QP

Note: Result=Reading+Factor
Over Limit=Result-Limit

Above 1 GHz Test Results:

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2402	108.47	-5.84	102.63	N/A	N/A	peak
2402	92.57	-5.84	86.73	N/A	N/A	AVG
4804	58.30	-3.64	54.66	74	-19.34	peak
4804	49.33	-3.64	45.69	54	-8.31	AVG
7206	59.46	-0.95	58.51	74	-15.49	peak
7206	49.34	-0.95	48.39	54	-5.61	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2402	110.94	-5.84	105.10	N/A	N/A	peak
2402	92.74	-5.84	86.90	N/A	N/A	AVG
4804	58.56	-3.64	54.92	74	-19.08	peak
4804	47.04	-3.64	43.40	54	-10.60	AVG
7206	60.13	-0.95	59.18	74	-14.82	peak
7206	49.64	-0.95	48.69	54	-5.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

8. Photographs of test setup
RE

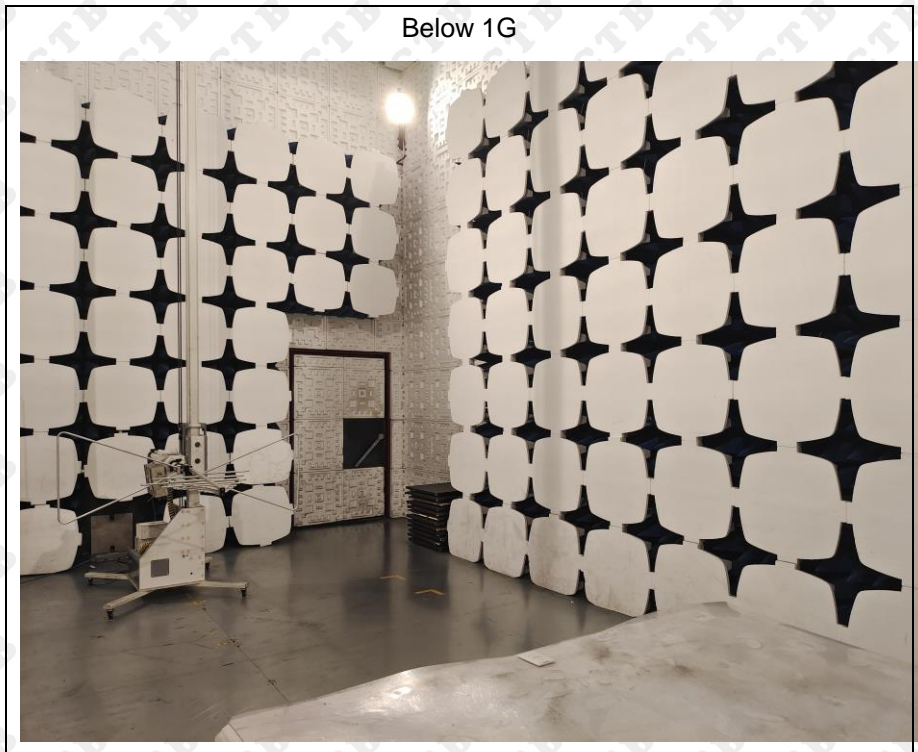

End of report