


# TEST REPORT

**Applicant:** Glimpse LLC  
**Address:** 101a Clay Street #144, San Francisco, CA 94111, USA  
**Equipment Type:** 10 inch WiFi Digital Photo Frame, 10 inch WiFi Digital Photo Calendar  
**Model Name:** 100-FRM (refer to section 2.3)  
**Brand Name:** Skylight  
**FCC ID:** 2BF8S-100-1  
**ISED Number:** 26595-1001  
**HVIN:** 100-1  
**Test Standard:** 47 CFR Part 15 Subpart E  
RSS-247 Issue 3  
(refer to section 3.1)  
**Sample Arrival Date:** Jul. 11, 2024  
**Test Date:** Jul. 30, 2024  
**Date of Issue:** Aug. 19, 2024

**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Li Ganming**Checked by:** Ye Hongji**Approved by:** Sunny Zou

(Technical Director)

**Revision History**

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Aug. 19, 2024</u>	<u>Initial Issue</u>

**TABLE OF CONTENTS**

1	GENERAL INFORMATION .....	4
1.1	Test Laboratory .....	4
1.2	Test Location.....	4
2	PRODUCT INFORMATION.....	5
2.1	Applicant Information.....	5
2.2	Manufacturer Information .....	5
2.3	General Description for Equipment under Test (EUT) .....	5
2.4	Technical Information .....	5
3	SUMMARY OF TEST RESULTS.....	6
3.1	Test Standards .....	6
3.2	Test Verdict .....	6
3.3	Measurement Uncertainty .....	6
4	GENERAL TEST CONFIGURATIONS.....	7
4.1	Test Environments .....	7
4.2	Test Equipment List.....	7
4.3	Test Software List.....	7
4.4	Description of Test Setup .....	8
5	TEST ITEMS.....	9
5.1	DFS .....	9
ANNEX A	TEST RESULT .....	19
A.1	CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME.....	19
A.2	NON-OCCUPANCY PERIOD .....	19
ANNEX B	TEST SETUP PHOTOS .....	20
ANNEX C	EUT EXTERNAL PHOTOS .....	20

ANNEX D EUT INTERNAL PHOTOS ..... 20

# 1 GENERAL INFORMATION

## 1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China <input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Glimpse LLC
Address	101a Clay Street #144, San Francisco, CA 94111, USA

### 2.2 Manufacturer Information

Manufacturer	Glimpse LLC
Address	101a Clay Street #144, San Francisco, CA 94111, USA

### 2.3 General Description for Equipment under Test (EUT)

EUT Name	10 inch WiFi Digital Photo Frame, 10 inch WiFi Digital Photo Calendar
Model Name Under Test	100-FRM
Series Model Name	100-CAL
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in colors. (this information provided by the applicant)
Serial Number	HVN46PHZG000013
Hardware Version	AY7230A_MB_V3_A
Software Version	AY7230A_rk3326s_10_classic_EVT002_20240620064000
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

### 2.4 Technical Information

Network and Wireless connectivity	Bluetooth BLE WIFI 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac and 802.11ax
-----------------------------------	---------------------------------------------------------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	5250 MHz to 5350 MHz, 5470 MHz to 5725 MHz
Product Type	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Maximum Output Power	5250 MHz to 5350 MHz: 61.94 mW 5470 MHz to 5725 MHz: 62.09 mW
Antenna Type	FPC Antenna
Antenna Gain	5250 MHz to 5350 MHz: 3.5 dBi 5470 MHz to 5725 MHz: 2.3 dBi

Note: This device (Client) is without radar detection, then the manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user. And the device doesn't have Ad Hoc mode on DFS frequency band.

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E	Unlicensed National Information Infrastructure Devices
2	RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
3	KDB Publication 905462 D02v02	UNII DFS Compliance Procedures New Rules
4	KDB Publication 905462 D03v01r02	UNII Clients Without Radar Detection New Rules
5	KDB Publication 789033 D02v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

#### 3.2 Test Verdict

No.	Description	FCC Part No.	RSS Part No.	Verdict	Remark
1	Channel Move Time	15.407	RSS-247, 6.3	--	Note
2	Channel Closing Transmission Time	15.407	RSS-247, 6.3	--	Note
3	Non- Occupancy Period	15.407	RSS-247, 6.3	--	Note

Note: The RF module (Model Name: FCS960K-NL) installed in the EUT is electronically and mechanically identical to the original certified module in the test report No. R2404A0429-R3V1 (FCC ID: XMR2024FCS960KNL) & No. R2404A0430-R3V1 (ISED Number: 10224A-24FCS960KNL), which issued by Eurofins TA Technology (Shanghai) Co., Ltd. on Jun. 19, 2024. All test items please refer to the report No. R2404A0429-R3V1 (FCC ID: XMR2024FCS960KNL) & No. R2404A0430-R3V1 (ISED Number: 10224A-24FCS960KNL), which issued by Eurofins TA Technology (Shanghai) Co., Ltd. on Jun. 19, 2024.

#### 3.3 Measurement Uncertainty

Note: The Measurement Uncertainty please refer to the Report No. R2404A0429-R3V1 (FCC ID: XMR2024FCS960KNL) & No. R2404A0430-R3V1 (ISED Number: 10224A-24FCS960KNL) issued by Eurofins TA Technology (Shanghai) Co., Ltd. on Jun. 19, 2024.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	Note	
Atmospheric Pressure	Note	
Temperature	NT (Normal Temperature)	Note
Working Voltage of the EUT	NV (Normal Voltage)	Note

Note: The extreme test conditions please refer to the Report No. R2404A0429-R3V1 (FCC ID: XMR2024FCS960KNL) & No. R2404A0430-R3V1 (ISED Number: 10224A-24FCS960KNL) issued by Eurofins TA Technology (Shanghai) Co., Ltd. on Jun. 19, 2024.

### 4.2 Test Equipment List

Note: The Test Equipment List please refer to the Report No. R2404A0429-R3V1 (FCC ID: XMR2024FCS960KNL) & No. R2404A0430-R3V1 (ISED Number: 10224A-24FCS960KNL) issued by Eurofins TA Technology (Shanghai) Co., Ltd. on Jun. 19, 2024.


### 4.3 Test Software List

Note: The Test Software List please refer to the Report No. R2404A0429-R3V1 (FCC ID: XMR2024FCS960KNL) & No. R2404A0430-R3V1 (ISED Number: 10224A-24FCS960KNL) issued by Eurofins TA Technology (Shanghai) Co., Ltd. on Jun. 19, 2024.

## 4.4 Description of Test Setup

### 4.4.1 Conducted Test Setup Configuration

Client without Radar Detection Mode

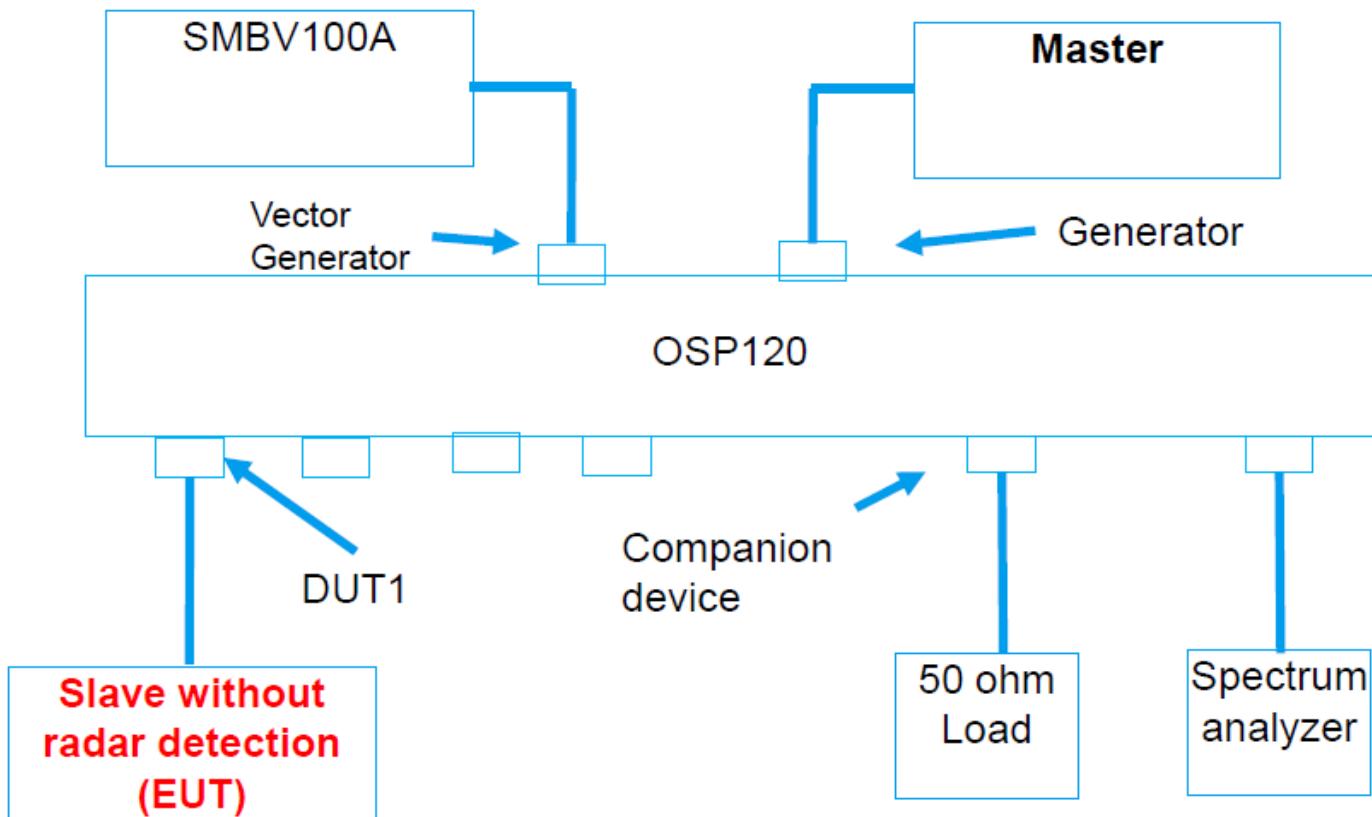

The UUT is a U-NII Device operating in Client mode without radar detection. The radar test signals are injected into the Master Device.

(Diagram 1)

## 5 TEST ITEMS

### 5.1 DFS

#### 5.1.1 U-NII DFS Rule Requirements

##### 5.1.1.1 Working Mode and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

#### APPLICABILITY OF DFS REQUIREMENTS PRIOR TO USE A CHANNEL

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

#### APPLICABILITY OF DFS REQUIREMENTS DURING NORMAL OPERATION

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓
U-NII Detection Bandwidth	✓	Not required	✓

### 5.1.2 Test Limits and Radar Signal Parameters

#### Detection Threshold Values

#### DFS DETECTION THRESHOLDS FOR MASTER DEVICES AND CLIENT DEVICES WITH RADAR DETECTION

Maximum Transmit Power	Value (See Note <sup>1 &amp; 2</sup> )
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note <sup>1</sup>: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note <sup>2</sup>: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

#### DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note <sup>1</sup> .
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Note <sup>1&amp;2</sup> .
U-NII Detection Bandwidth	100% of the UNII transmission power bandwidth. See Note <sup>3</sup> .

Note <sup>1</sup>: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

Note <sup>2</sup>: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note <sup>3</sup>: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Parameters of DFS Test Signals

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

**SHORT PULSE RADAR TEST WAVEFORMS**

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note	See Note
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	Roundup $\left\lceil \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

**LONG PULSE RADAR TEST WAVEFORM**

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

**FREQUENCY HOPPING RADAR TEST WAVEFORM**

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

### 5.1.2.1 Test Setup


See 4.4 for test setup description for the radiated test. The photo of test setup please refer to ANNEX B.

### 5.1.2.2 Test Procedure

#### DFS MEASUREMENT SYSTEM:

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating Subsystem and (2) the Traffic Monitoring Subsystem. The control PC is necessary for generating the Radar waveforms in Table 6, 7 and 8. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Conducted setup configuration of ADT DFS Measurement System

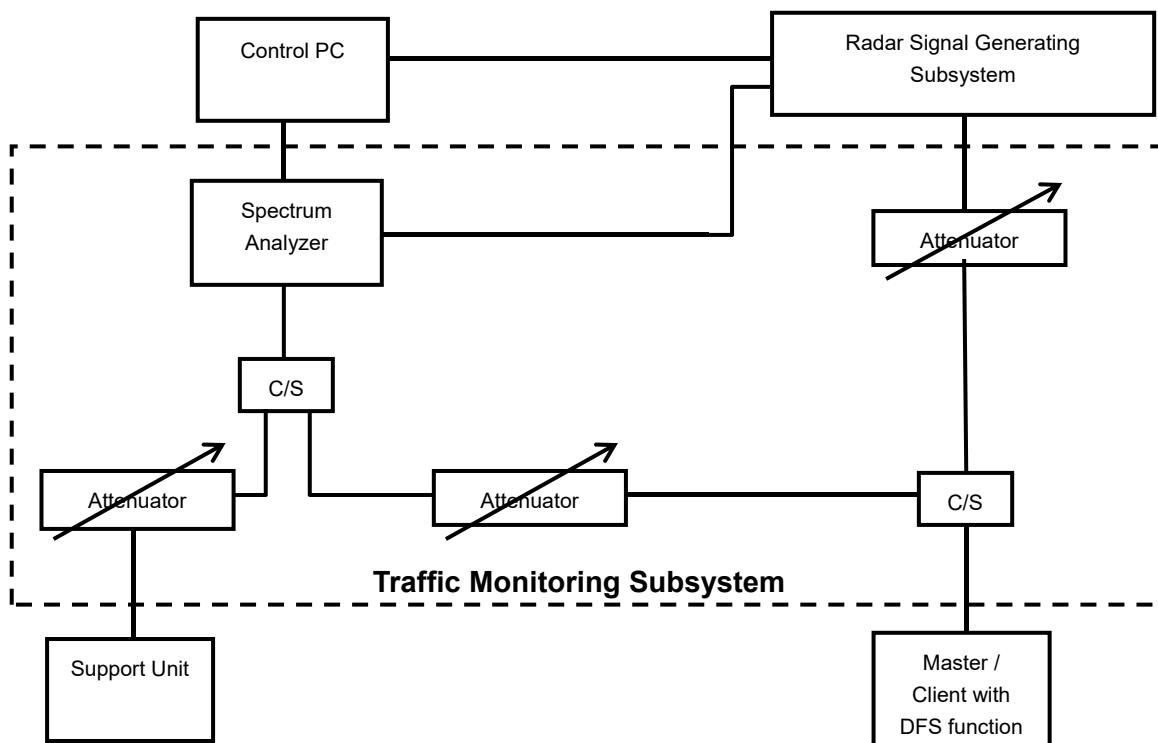




The test transmission will always be from the Master Device to the Client Device. While the Client device is set up to associate with the Master device and play the MPEG file (6  $\frac{1}{2}$  Magic Hours) from Master device, the designated MPEG test file and instructions are located at: <http://ntiacsd.ntia.doc.gov/dfs/>.

#### CALIBRATION OF DFS DETECTION THRESHOLD LEVEL:


The measured channel is 5500 MHz in 20MHz Bandwidth and 5530MHz in 80MHz Bandwidth. The radar signal was the same as transmitted channels, and injected into the antenna port of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time. The Master antenna gain is 2.28dBi and required detection threshold is -58.72 dBm = (-62 +1 +2.28) dBm. The calibrated conducted detection threshold level is set to -58.72 dBm.

## Conducted setup configuration of Calibration of DFS Detection Threshold Level

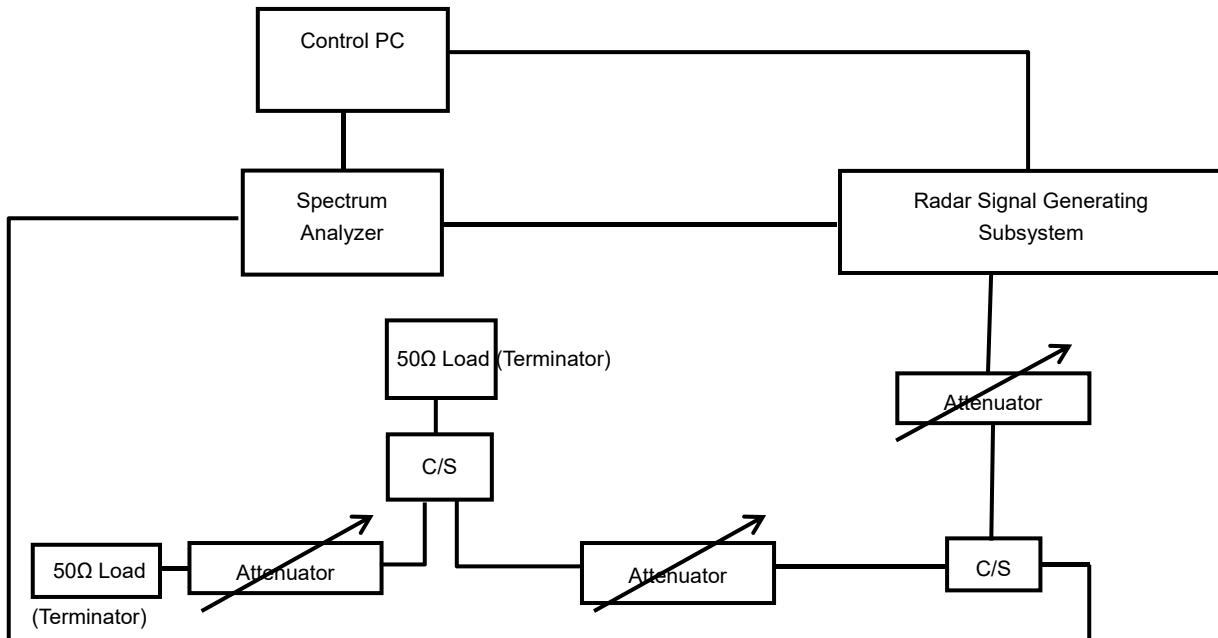


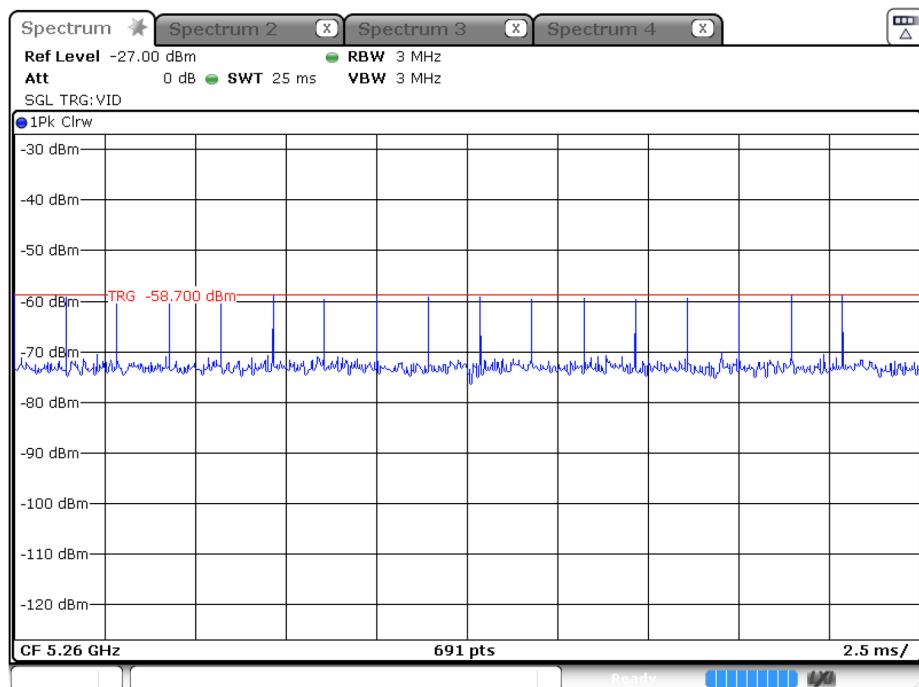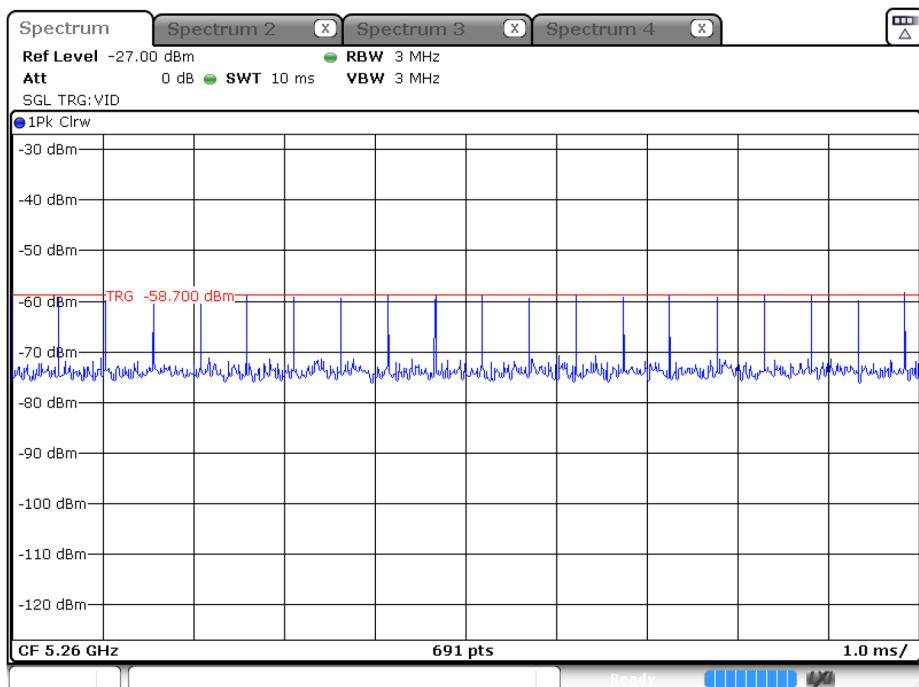**Radar Waveform Calibration Result****Radar Type 0 Calibration Plot (5260MHz)****Radar Type 1 test A Calibration Plot (5260MHz)**


## Radar Type 1 test B Calibration Plot (5260MHz)

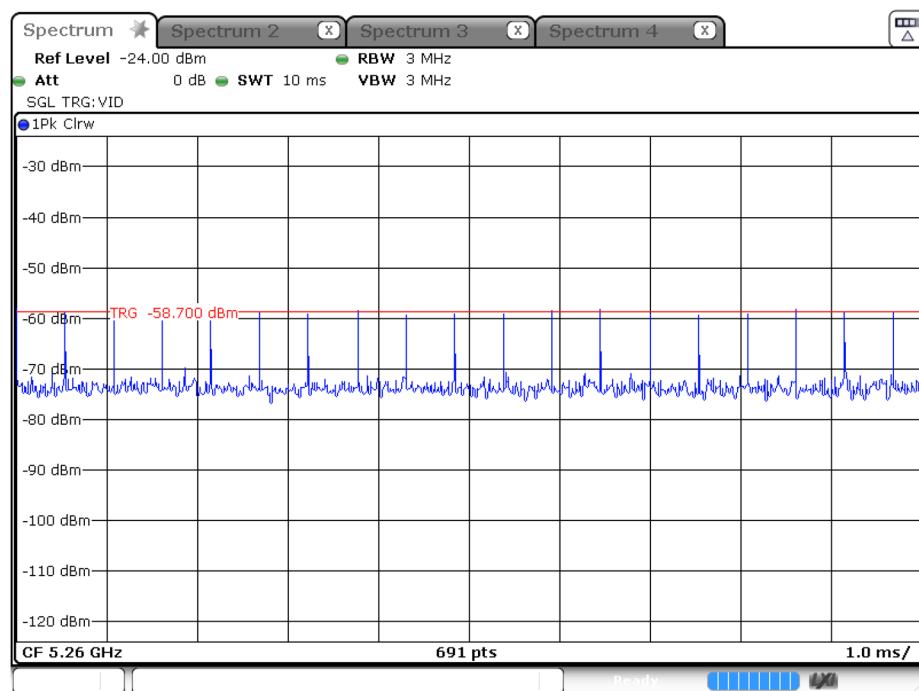


## Radar Type 2 Calibration Plot (5260MHz)

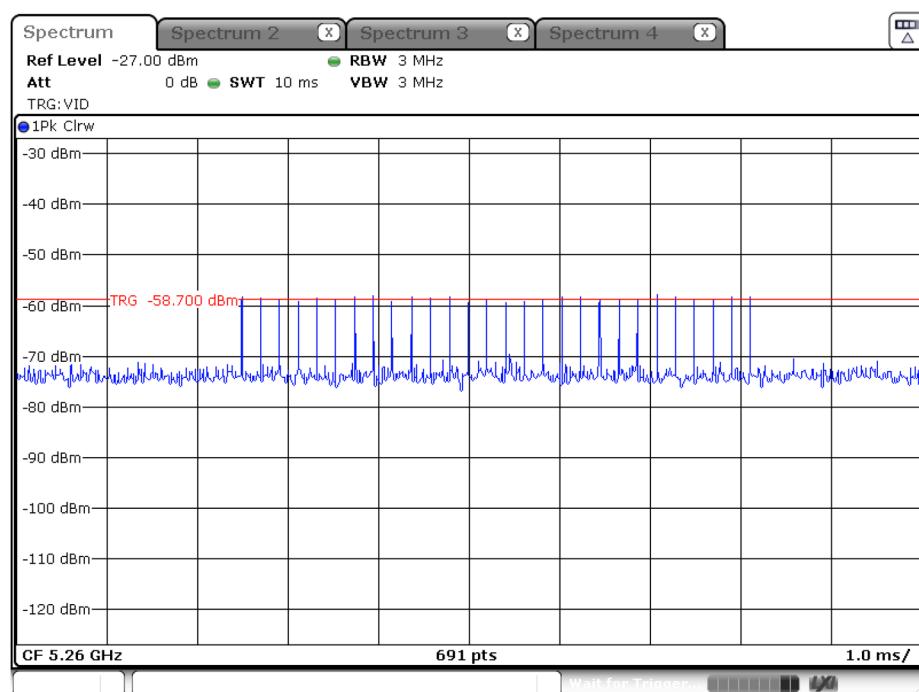


## Radar Type 3 Calibration Plot (5260MHz)

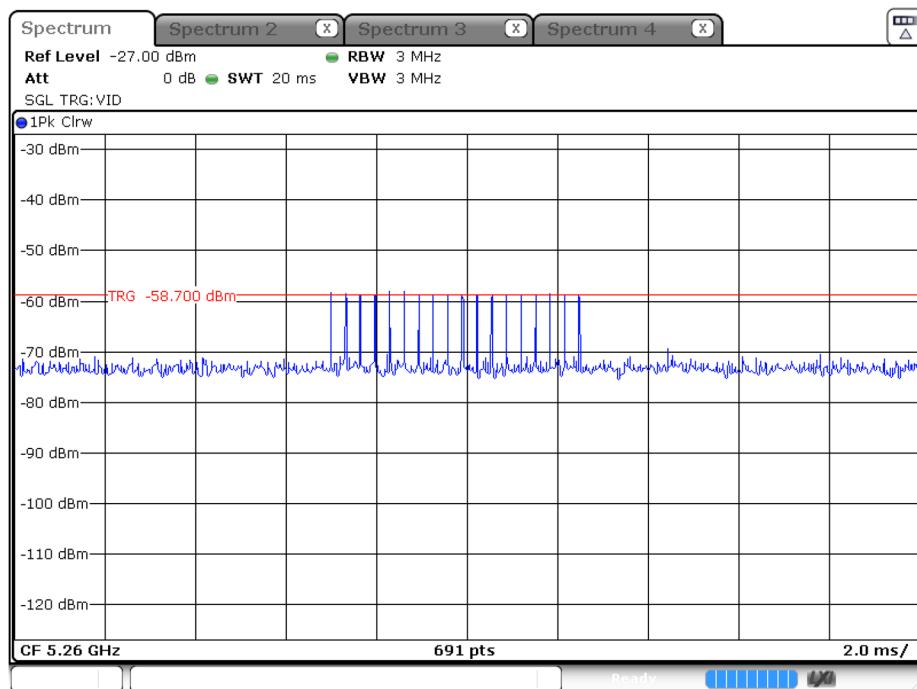


## Radar Type 4 Calibration Plot (5260MHz)

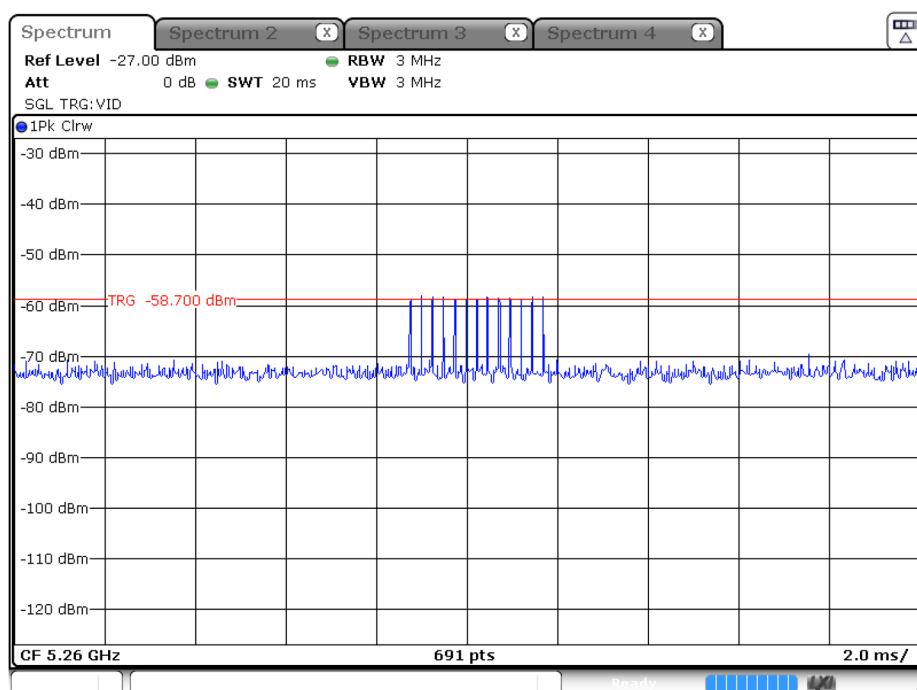

## Radar Type 5 Calibration Plot (5260MHz)

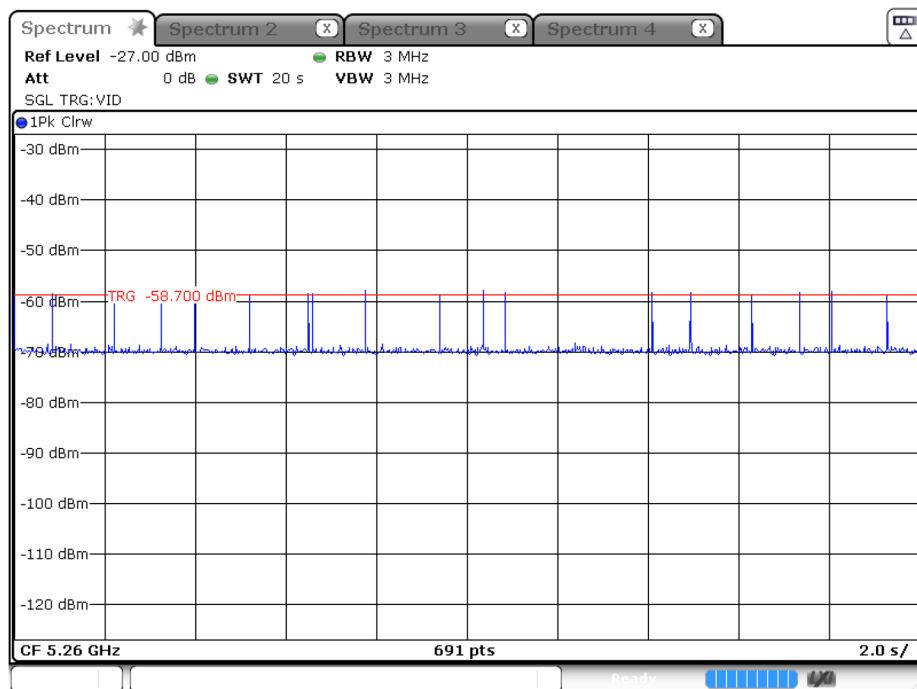

## Radar Type 6 Calibration Plot (5260MHz)

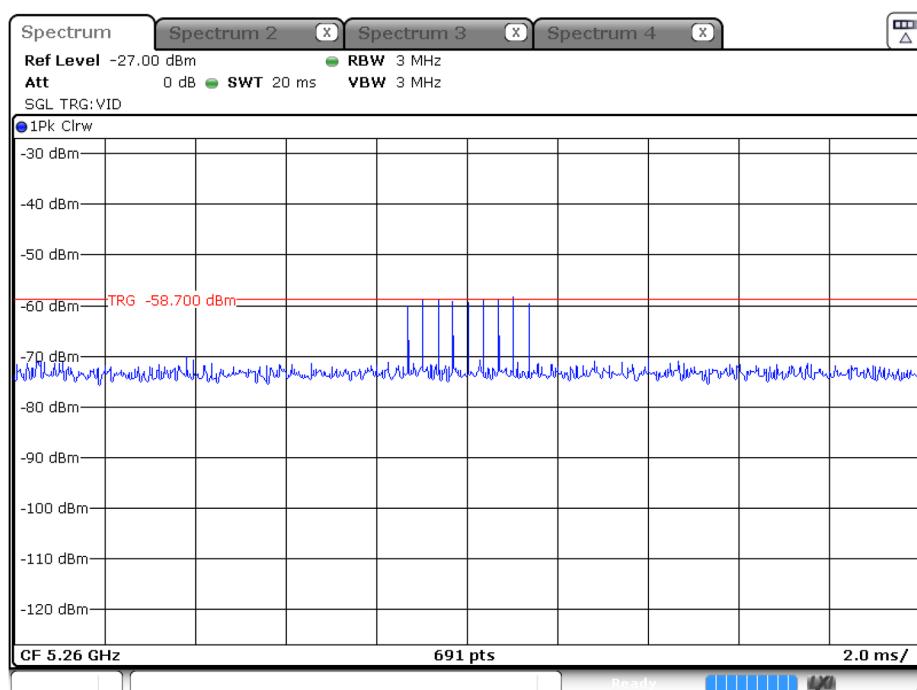

### 5.1.2.3 Test Result

Please refer to ANNEX A.

## **ANNEX A TEST RESULT**

### **A.1 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME**

Note: Not applicable.

### **A.2 NON-OCCUPANCY PERIOD**

Note: Not applicable.

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-SZ2470547-AR-1.PDF".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ2470547-AW-1.PDF".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-SZ2470547-AI-1.PDF".

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--