

FCC Test Report

Applicant : Shanghai Jianrong Intelligent Information
Technology Co., Ltd.

Address : Room 201, Unit 6, No. 159, Tianzhou Road,
Xuhui District, Shanghai, China

Product Name : D5_Data Collector

Report Date : Apr. 26, 2024

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	8
1.4. Operation State	8
1.5. Environmental Conditions	10
1.6. Test Equipment List	11
1.7. Measurement Uncertainty	12
1.8. Description of Test Facility	12
1.9. Disclaimer	13
2. Summary of Test	14
2.1. Summary of test result	14
3. Conducted Output Power Test	16
3.1. Test Standard and Limit	16
3.2. Test Setup	16
3.3. Test Procedure	16
3.4. Test Data	16
4. Peak-Average Ratio	17
4.1. Test Standard and Limit	17
4.2. Test Setup	17
4.3. Test Procedure	17
4.4. Test Data	17
5. Modulation Characteristic	18
6. 99% Occupied Bandwidth & 26 dB Bandwidth	19
6.1. Test Standard and Limit	19
6.2. Test Setup	19
6.3. Test Procedure	19
6.4. Test Data	19
7. Conducted Spurious Emission	20
7.1. Test Standard and Limit	20
7.2. Test Setup	20
7.3. Test Procedure	20
7.4. Test Data	21
8. Band Edge	22
8.1. Test Standard and Limit	22
8.2. Test Setup	23
8.3. Test Procedure	23
8.4. Test Data	23



9. Radiated Spurious Emission.....	24
9.1. Test Standard and Limit.....	24
9.2. Test Setup.....	24
9.3. Test Procedure.....	25
9.4. Test Data.....	26
10. ERP and EIRP.....	46
10.1. Test Standard and Limit.....	46
10.2. Test Setup.....	46
10.3. Test Procedure.....	46
10.4. Test Data.....	48
11. Frequency stability VS Voltage measurement.....	57
11.1. Test Standard and Limit.....	57
11.2. Test Setup.....	57
11.3. Test Procedure.....	57
11.4. Test Data.....	57
12. Frequency stability VS Temperature measurement.....	58
12.1. Test Standard and Limit.....	58
12.2. Test Setup.....	58
12.3. Test Procedure.....	58
12.4. Test Data.....	58
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	59
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	59
APPENDIX III -- INTERNAL PHOTOGRAPH.....	59



TEST REPORT

Applicant : Shanghai Jianrong Intelligent Information Technology Co., Ltd.

Manufacturer : Shanghai Jianrong Intelligent Information Technology Co., Ltd.

Product Name : D5_Data Collector

Test Model No. : D5

Reference Model No. : D5pro, H8, H10, H10pro, H11, H11pro, H12, H12pro, R60, R60pro, R70, R70pro, UC12, UC12pro, UC13, UC13pro, HC8, HC8pro, iHand60pro, DP0041, DP0041pro, PCR500, PCR500pro, GEOMATE FC3

Trade Mark : N/A

Rating(s) : Input: 5V \Rightarrow 3A, 9V \Rightarrow 2A
Capacity: Lithium-ion: DC 3.8V, 9000mAh

Test Standard(s) : **FCC PART 2, FCC Part 22(H), FCC Part 24(E), FCC Part 27(C)**

Test Method(s) : **ANSI C63.26-2015**
KDB 971168 D01 Power Meas License Digital Systems v03r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 22, FCC Part 24, FCC Part 27 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Feb. 22, 2024

Date of Test :

Feb. 22, 2024 to Mar. 30, 2024

Prepared by :

Ella Liang

(Ella Liang)

Approved & Authorized Signer :

Edward Pan

(Edward Pan)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Apr. 26, 2024



1. General Information

1.1. Client Information

Applicant	:	Shanghai Jianrong Intelligent Information Technology Co., Ltd.
Address	:	Room 201, Unit 6, No. 159, Tianzhou Road, Xuhui District, Shanghai, China
Manufacturer	:	Shanghai Jianrong Intelligent Information Technology Co., Ltd.
Address	:	Room 201, Unit 6, No. 159, Tianzhou Road, Xuhui District, Shanghai, China
Factory	:	SHENZHEN 3NOD ELECTRONICS CO., LTD
Address	:	2F, No.74 , Yangchong Road, Tangxiachong Community, Yanluo Street, Bao'an District, Shenzhen

1.2. Description of Device (EUT)

Product Name	:	D5_Data Collector
Test Model No.	:	D5
Reference Model No.	:	D5pro, H8, H10, H10pro, H11, H11pro, H12, H12pro, R60, R60pro, R70, R70pro, UC12, UC12pro, UC13, UC13pro, HC8, HC8pro, iHand60pro, DP0041, DP0041pro, PCR500, PCR500pro, GEOMATE FC3 (Note: All examples are the same except for colors, local reserved interfaces, and names. Therefore, we prepared "D5" for testing purposes only.)
Trade Mark	:	N/A
Test Power Supply	:	DC 5V from adapter input AC 120V/60Hz; DC 3.8V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	Manufacturer: Shenzhen ABP Technology Co., Ltd. Model No.: QC0181A Input: 100-240V~ 50-60Hz 0.5A Max Output: 5.0V== 3.0A 15.0W/ 9.0V== 2.0A 18.0W/ 12.0V== 1.5A 18.0W
RF Specification		
Support Band	:	<input checked="" type="checkbox"/> FDD Band 2 <input checked="" type="checkbox"/> FDD Band 4 <input checked="" type="checkbox"/> FDD Band 5 <input checked="" type="checkbox"/> FDD Band 7 <input checked="" type="checkbox"/> FDD Band 12 <input checked="" type="checkbox"/> FDD Band 13 <input type="checkbox"/> FDD Band 14 <input checked="" type="checkbox"/> FDD Band 17 <input type="checkbox"/> FDD Band 25 <input type="checkbox"/> FDD Band 26 <input checked="" type="checkbox"/> TDD Band 38 <input checked="" type="checkbox"/> TDD Band 41 <input type="checkbox"/> FDD Band 66 <input type="checkbox"/> FDD Band 71



Transmit Frequency	:	FDD Band 2: 1850.7 MHz – 1909.3 MHz FDD Band 4: 1710.7 MHz – 1754.3 MHz FDD Band 5: 824.7 MHz – 848.3 MHz FDD Band 7: 2502.5 MHz – 2567.5 MHz FDD Band 12: 699.7 MHz – 715.3 MHz FDD Band 13: 779.5 MHz – 784.5 MHz FDD Band 17: 706.5 MHz – 713.5 MHz TDD Band 38: 2572.5 MHz – 2617.5 MHz TDD Band 41: 2498.5 MHz – 2687.5 MHz
Receive Frequency	:	FDD Band 2: 1930.7 MHz – 1989.3 MHz FDD Band 4: 2110.7 MHz – 2154.3 MHz FDD Band 5: 869.7 MHz – 893.3 MHz FDD Band 7: 2622.5 MHz – 2687.5 MHz FDD Band 12: 729.7 MHz – 745.3 MHz FDD Band 13: 748.5 MHz – 753.5 MHz FDD Band 17: 736.5 MHz – 743.5 MHz TDD Band 38: 2572.5 MHz – 2617.5 MHz TDD Band 41: 2498.5 MHz – 2687.5 MHz
Modulation Type	:	QPSK, 16QAM
Power Class	:	Class 3
Antenna Type	:	FPC Antenna
Antenna Gain(Peak):		FDD Band 2: 0.88dBi FDD Band 4: 0.88dBi FDD Band 5: 0.88dBi FDD Band 7: 0.88dBi FDD Band 12: 0.88dBi FDD Band 13: 0.88dBi FDD Band 17: 0.88dBi TDD Band 38: 0.88dBi TDD Band 41: 0.88dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
--	--

1.4. Operation State

Test frequency list:

Band	Frequency (MHz)					
FDD Band 2	Test Frequency ID	Bandwidth [MHz]	N_{UL}	Frequency of Uplink [MHz]	N_{DL}	Frequency of Downlink [MHz]
	Low Range	1.4	18607	1850.7	607	1930.7
		3	18615	1851.5	615	1931.5
		5	18625	1852.5	625	1932.5
		10	18650	1855	650	1935
		15 ^[1]	18675	1857.5	675	1937.5
	Mid Range	20 ^[1]	18700	1860	700	1940
		1.4/3/5/10/15 ^[1] /20 ^[1]	18900	1880	900	1960
	High Range	1.4	19193	1909.3	1193	1989.3
		3	19185	1908.5	1185	1988.5
		5	19175	1907.5	1175	1987.5
		10	19150	1905	1150	1985
		15 ^[1]	19125	1902.5	1125	1982.5
	20 ^[1]	19100	1900	1100	1980	
FDD Band 4	Test Frequency ID	Bandwidth [MHz]	N_{UL}	Frequency of Uplink [MHz]	N_{DL}	Frequency of Downlink [MHz]
	Low Range	1.4	19957	1710.7	1957	2110.7
		3	19965	1711.5	1965	2111.5
		5	19975	1712.5	1975	2112.5
		10	20000	1715	2000	2115
		15	20025	1717.5	2025	2117.5
	Mid Range	20	20050	1720	2050	2120
		1.4/3/5/10/15/20	20175	1732.5	2175	2132.5
	High Range	1.4	20393	1754.3	2393	2154.3
		3	20385	1753.5	2385	2153.5
		5	20375	1752.5	2375	2152.5
		10	20350	1750	2350	2150
		15	20325	1747.5	2325	2147.5
	20	20300	1745	2300	2145	
FDD Band 5	Test Frequency ID	Bandwidth [MHz]	N_{UL}	Frequency of Uplink [MHz]	N_{DL}	Frequency of Downlink [MHz]
	Low Range	1.4	20407	824.7	2407	869.7
		3	20415	825.5	2415	870.5
		5	20425	826.5	2425	871.5
		10 ^[1]	20450	829	2450	874
	Mid Range	1.4/3/5/10 ^[1]	20525	836.5	2525	881.5
		1.4	20643	848.3	2643	893.3
	High Range	3	20635	847.5	2635	892.5
		5	20625	846.5	2625	891.5
		10 ^[1]	20600	844	2600	889



	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
FDD Band 7	Low Range	5	20775	2502.5	2775	2622.5
		10	20800	2505	2800	2625
		15	20825	2507.5	2825	2627.5
		20 [1]	20850	2510	2850	2630
	Mid Range	5/10/15	21100	2535	3100	2655
		20 [1]				
	High Range	5	21425	2567.5	3425	2687.5
		10	21400	2565	3400	2685
		15	21375	2562.5	3375	2682.5
		20 [1]	21350	2560	3350	2680
FDD Band 12	Low Range	1.4	23017	699.7	5017	729.7
		3	23025	700.5	5025	730.5
		5 [1]	23035	701.5	5035	731.5
		10 [1]	23060	704	5060	734
	Mid Range	1.4/3	23095	707.5	5095	737.5
		5 [1]/10 [1]				
	High Range	1.4	23173	715.3	5173	745.3
		3	23165	714.5	5165	744.5
		5 [1]	23155	713.5	5155	743.5
		10 [1]	23130	711	5130	741
FDD Band 13	Low Range	5 [1]	23205	779.5	5205	748.5
		10 [1]	23230	782	5230	751
	Mid Range	5 [1]/10 [1]	23230	782	5230	751
		5 [1]	23255	784.5	5255	753.5
	High Range	10 [1]	23230	782	5230	751
		5 [1]	23255	784.5	5255	753.5
FDD Band 17	Low Range	5 [1]	23755	706.5	5755	736.5
		10 [1]	23780	709	5780	739
	Mid Range	5 [1]/10 [1]	23790	710	5790	740
		5 [1]	23825	713.5	5825	743.5
	High Range	10 [1]	23800	711	5800	741
		5 [1]	23825	713.5	5825	743.5



TDD Band 38	Test Frequency ID	Bandwidth [MHz]	EARFCN	Frequency (UL and DL) [MHz]
	Low Range		5	37775
		10	37800	2575
		15	37825	2577.5
		20	37850	2580
Mid Range	5/10/15/20	38000	2595	
High Range		5	38225	2617.5
		10	38200	2615
		15	38175	2612.5
		20	38150	2610

TDD Band 41	Test Frequency ID	Bandwidth [MHz]	EARFCN	Frequency (UL and DL) [MHz]
	Low Range		5	39675
		10	39700	2501
		15	39725	2503.5
		20	39750	2506
Mid Range	5/10/15/20	40620	2593	
High Range		5	41565	2687.5
		10	41540	2685
		15	41515	2682.5
		20	41490	2680

1.5. Environmental Conditions

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa



1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Preamplifier	SKET Electronic	LNPA-0118G-4 5	SKET-PA-002	Oct. 12, 2023	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 12, 2023	1 Year
3.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
5.	Pre-amplifier	SONOMA	310N	186860	Oct. 12, 2023	1 Year
6.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
7.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 12, 2023	1 Year
8.	DC Power Supply	LW	TPR-6420D	374470	Oct. 20, 2023	1 Year
9.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 16, 2023	1 Year
10.	Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	167336	Feb. 04, 2023	1 Year
11.	High-Pass Filter	CDKMV	ZHPF-BM1100 -4000-0730	B2015094550	Oct. 20, 2023	1 Year
12.	High-Pass Filter	CDKMV	ZHPF-M3.5 -18G-3834	1307006523	Oct. 20, 2023	1 Year
13.	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	Oct. 16, 2022	3 Year
14.	Double Ridged Horn Antenna	Chengyi Electronics Co., Ltd.	GTH-0118	351600	Nov. 02, 2022	2 Year
15.	Signal Generator	Anritsu	MG3690A	MY48180749	Oct. 12, 2023	1 Year



1.7. Measurement Uncertainty

Parameter	Uncertainty
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.



1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Summary of Test

2.1. Summary of test result

Description of Test	FCC Rules	Requirements	Result
Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(b) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h)	N/A	Compliance
Peak-Average Ratio	Part 22.913 Part 24.232 Part 27.50	≤13dB	Compliance
Modulation Characteristics	§ 2.1047	Digital modulation	N/A
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049	OBW: No limit EBW: No limit	Compliance
Conducted Spurious Emission	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m)	≤ -13dBm(LTE Band5) ≤ -13dBm(LTE Band2) Refer to clause 7.1 for LTE Band13 ≤ -13dBm(LTE Band12,17) ≤ -13dBm(LTE Band4) ≤ -25dBm(LTE Band7,38,41)	Compliance
Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m)	≤ -13dBm (LTE Band5) ≤ -13dBm (LTE Band2) Refer to clause 8.1 for LTE Band13 ≤ -13dBm (LTE Band12,17) ≤ -13dBm (LTE Band4) Refer to clause 8.1 for LTE Band7,38, 41)	Compliance
Frequency stability VS. temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54	≤ ±2.5ppm	Compliance



Frequency stability VS. voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54	$\leq \pm 2.5\text{ppm}$	Compliance
ERP and EIRP	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h)	ERP \leq 7W(LTE Band 5) EIRP \leq 2W(LTE Band 2) ERP \leq 3W(LTE Band 13) ERP \leq 3W(LTE Band 12,17) EIRP \leq 1W(LTE Band 4) EIRP \leq 2W(LTE Band 7,38,41)	Compliance
Radiated Spurious Emission	Part 2.1053 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m)	$\leq -13\text{dBm}$ (LTE Band5) $\leq -13\text{dBm}$ (LTE Band2) Refer to clause 9.1 for LTE Band13 $\leq -13\text{dBm}$ (LTE Band12,17) $\leq -13\text{dBm}$ (LTE Band4) $\leq -25\text{dBm}$ (LTE Band7,38,41)	Compliance

Note:

1. "N/A" is an abbreviation for Not Applicable.
2. Testing was performed by configuring EUT to maximum output power status, the declared output power class for different




3. Conducted Output Power Test

3.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h)
Limit:	N/A

3.2. Test Setup

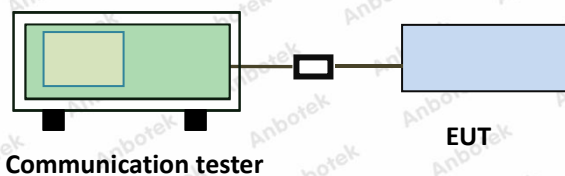

3.3. Test Procedure

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

3.4. Test Data

Pass

Please refer to Appendix A of the Appendix Test Data.




4. Peak-Average Ratio

4.1. Test Standard and Limit

Applicable Standard:	Part 22.913 Part 24.232 Part 27.50
Limit:	≤13dB

4.2. Test Setup

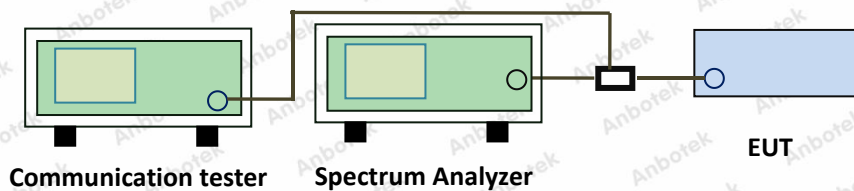

4.3. Test Procedure

According with KDB 971168 D01 Section 5.7:

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed.
 - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
 - ii. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

4.4. Test Data

Pass

Please refer to Appendix B of the Appendix Test Data.



5. Modulation Characteristic

According to FCC § 2.1047, Part 22H, Part 24E, Part 27C there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.




6. 99% Occupied Bandwidth & 26 dB Bandwidth

6.1. Test Standard and Limit

Applicable Standard:	Part 2.1049
Limit:	N/A

6.2. Test Setup

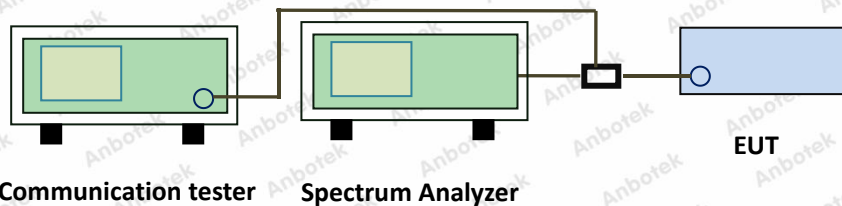

6.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Center Frequency= Carrier frequency, RBW=1% to 5% of anticipated OBW, VBW= 3 * RBW, Detector=Peak, Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and -26dB bandwidth.

6.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.




7. Conducted Spurious Emission

7.1. Test Standard and Limit

Applicable Standard:	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m)
Limit:	$\leq -13\text{dBm}$ (LTE Band 5) $\leq -13\text{dBm}$ (LTE Band 2) $\leq -13\text{dBm}$ (LTE Band 12,17) $\leq -13\text{dBm}$ (LTE Band 4) $\leq -25\text{dBm}$ (LTE Band 7,38,41) For LTE Band 13: (1) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB; (2) For operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz. The limit of emissions is equal to -40 dBm.

7.2. Test Setup

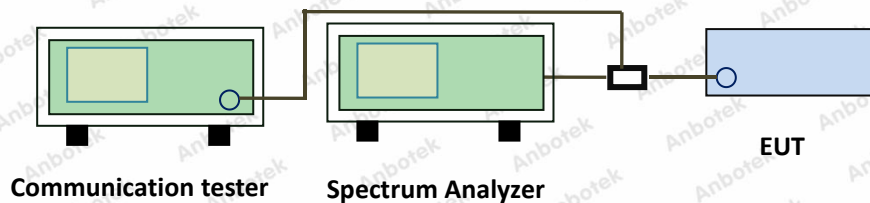

7.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
 Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=Peak, Sweep time= Auto
 Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto
 Scan frequency range up to 10th harmonic.
4. Record the test plot.



7.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.




8. Band Edge

8.1. Test Standard and Limit

Applicable Standard:	<p>Part 2.1051 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m)</p>
Limit:	<p> $\leq -13\text{dBm}$ (LTE Band 5) $\leq -13\text{dBm}$ (LTE Band 2) $\leq -13\text{dBm}$ (LTE Band 12,17) $\leq -13\text{dBm}$ (LTE Band 4) </p> <p>For LTE Band 13:</p> <p>(1) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;</p> <p>(2) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.</p> <p>For LTE Band 7, 38, 41:</p> <p>For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.</p>



8.2. Test Setup

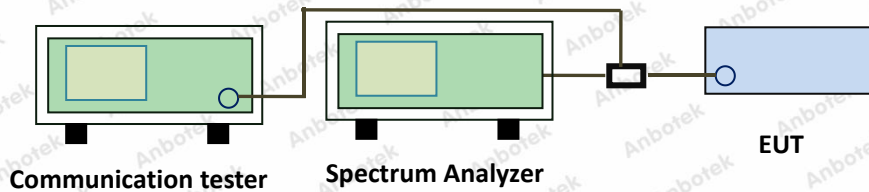

8.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:
RBW=3KHZ, VBW = 10KHZ, Sweep time= Auto
5. Record the test plot.

8.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




9. Radiated Spurious Emission

9.1. Test Standard and Limit

Applicable Standard:	Part 2.1053 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m)
Limit:	$\leq -13\text{dBm}$ (LTE Band 5) $\leq -13\text{dBm}$ (LTE Band 2) $\leq -13\text{dBm}$ (LTE Band 12, 17) $\leq -13\text{dBm}$ (LTE Band 4) $\leq -25\text{dBm}$ (LTE Band 7, 38, 41) For LTE Band 13: (1) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB; (2) For operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz. The limit of emissions is equal to -40 dBm.

9.2. Test Setup

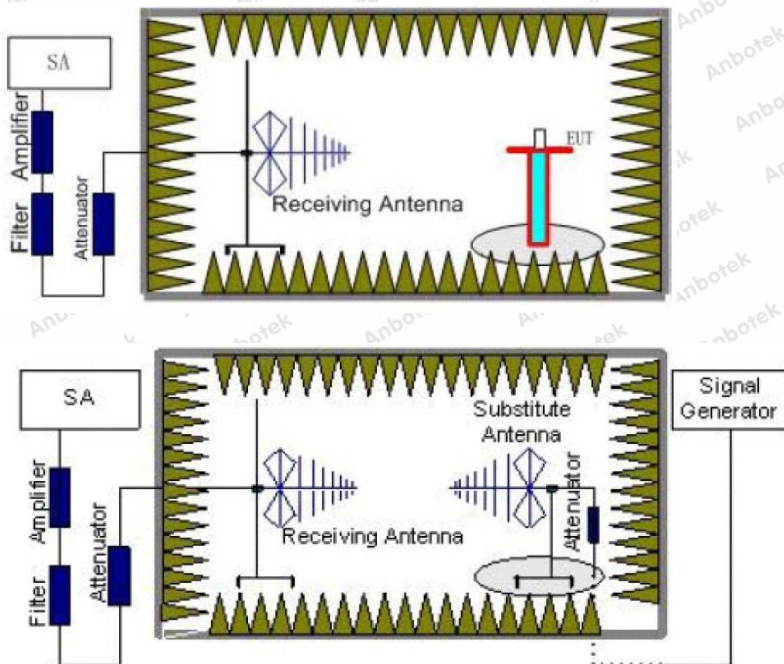

9.3. Test Procedure

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.



12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

P_e = equivalent emission power in dBm

P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$

If necessary, the antenna gain can be calculated from calibrated antenna factor information

14. Provide the complete measurement results as a part of the test report.

9.4. Test Data

Pass

Please to see the following pages

Note: All mode are tested, and the report only shows the worst mode of QPSK.



LTE Band 2								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	3701.40	Vertical	-49.09	13.21	-35.88	-13.00	PASS
		5552.10	V	-56.21	16.61	-39.60		
		7402.80	V	-58.62	18.03	-40.59		
		3701.40	Horizontal	-50.25	13.21	-37.04		
		5552.10	H	-57.30	16.61	-40.69		
		7402.80	H	-59.55	18.03	-41.52		
	Mid	3760.00	Vertical	-47.37	12.36	-35.01	-13.00	PASS
		5640.00	V	-55.81	17.03	-38.78		
		7520.00	V	-57.67	17.85	-39.82		
		3760.00	Horizontal	-48.34	12.36	-35.98		
		5640.00	H	-56.86	17.03	-39.83		
		7520.00	H	-58.55	17.85	-40.70		
	High	3818.60	Vertical	-46.30	12.78	-33.52	-13.00	PASS
		5727.90	V	-55.29	17.86	-37.43		
		7637.20	V	-57.10	18.56	-38.54		
		3818.60	Horizontal	-48.24	12.78	-35.46		
		5727.90	H	-57.20	17.86	-39.34		
		7637.20	H	-58.84	18.56	-40.28		
3MHz	Low	3703.00	Vertical	-45.34	12.78	-32.56	-13.00	PASS
		5554.50	V	-51.40	16.69	-34.71		
		7406.00	V	-54.74	18.18	-36.56		
		3703.00	Horizontal	-45.89	12.78	-33.11		
		5554.50	H	-53.24	16.69	-36.55		
		7406.00	H	-57.00	18.18	-38.82		
	Mid	3760.00	Vertical	-42.69	12.79	-29.90	-13.00	PASS
		5640.00	V	-48.93	16.72	-32.21		
		7520.00	V	-52.05	18.22	-33.83		
		3760.00	Horizontal	-43.68	12.79	-30.89		
		5640.00	H	-51.72	16.72	-35.00		
		7520.00	H	-55.26	18.22	-37.04		
High	3817.00	Vertical	-40.40	12.93	-27.47	-13.00	PASS	
	5725.50	V	-47.46	17.01	-30.45			



		7634.00	V	-51.09	18.41	-32.68		
		3817.00	Horizontal	-41.49	12.93	-28.56		
		5725.50	H	-50.24	17.01	-33.23	-13.00	PASS
		7634.00	H	-52.33	18.41	-33.92		

5MHz	Low	3705.00	Vertical	-38.11	13.25	-24.86		
		5557.50	V	-43.07	16.59	-26.48	-13.00	PASS
		7410.00	V	-47.83	18.12	-29.71		
		3705.00	Horizontal	-43.80	13.25	-30.55		
		5557.50	H	-53.36	16.59	-36.77	-13.00	PASS
		7410.00	H	-53.78	18.12	-35.66		
	Mid	3760.00	Vertical	-38.45	12.31	-26.14		
		5640.00	V	-45.99	17.14	-28.85	-13.00	PASS
		7520.00	V	-49.72	17.96	-31.76		
		3760.00	Horizontal	-45.81	12.31	-33.50		
		5640.00	H	-55.91	17.14	-38.77	-13.00	PASS
		7520.00	H	-55.15	17.96	-37.19		
	High	3815.00	Vertical	-42.13	12.77	-29.36		
		5722.50	V	-48.96	17.82	-31.14	-13.00	PASS
		7630.00	V	-52.32	18.59	-33.73		
		3815.00	Horizontal	-48.58	12.77	-35.81		
		5722.50	H	-58.73	17.82	-40.91	-13.00	PASS
		7630.00	H	-57.41	18.59	-38.82		
10MHz	Low	3710.00	Vertical	-39.80	12.59	-27.21		
		5565.00	V	-46.59	16.61	-29.98	-13.00	PASS
		7420.00	V	-50.69	18.35	-32.34		
		3710.00	Horizontal	-51.68	12.59	-39.09		
		5565.00	H	-59.76	16.61	-43.15	-13.00	PASS
		7420.00	H	-59.75	18.35	-41.40		
	Mid	3760.00	Vertical	-42.46	12.71	-29.75		
		5640.00	V	-48.76	16.65	-32.11	-13.00	PASS
		7520.00	V	-53.17	18.27	-34.90		
		3760.00	Horizontal	-53.47	12.71	-40.76		
		5640.00	H	-62.30	16.65	-45.65	-13.00	PASS
		7520.00	H	-61.64	18.27	-43.37		
High	3810.00	Vertical	-43.61	12.91	-30.70	-13.00	PASS	



		5715.00	V	-51.46	17.23	-34.23		PASS
		7620.00	V	-55.95	18.59	-37.36		
		3810.00	Horizontal	-51.65	12.91	-38.74		
		5715.00	H	-61.70	17.23	-44.47		
		7620.00	H	-60.39	18.59	-41.80		
15MHz	Low	3715.00	Vertical	-42.19	13.21	-28.98	-13.00	PASS
		5572.50	V	-49.32	16.65	-32.67		
		7430.00	V	-53.98	18.29	-35.69		
		3715.00	Horizontal	-53.58	13.21	-40.37		
		5572.50	H	-62.66	16.65	-46.01		
		7430.00	H	-61.40	18.29	-43.11		
	Mid	3760.00	Vertical	-42.60	12.39	-30.21	-13.00	PASS
		5640.00	V	-51.00	17.18	-33.82		
		7520.00	V	-54.76	17.99	-36.77		
		3760.00	Horizontal	-51.21	12.39	-38.82		
		5640.00	H	-61.58	17.18	-44.40		
		7520.00	H	-60.19	17.99	-42.20		
	High	3805.00	Vertical	-41.79	12.86	-28.93	-13.00	PASS
		5707.50	V	-49.32	17.89	-31.43		
		7610.00	V	-53.09	18.69	-34.40		
		3805.00	Horizontal	-53.71	12.86	-40.85		
		5707.50	H	-65.58	17.89	-47.69		
		7610.00	H	-64.27	18.69	-45.58		
20MHz	Low	3720.00	Vertical	-43.51	12.57	-30.94	-13.00	PASS
		5580.00	V	-50.31	16.59	-33.72		
		7440.00	V	-54.80	18.67	-36.13		
		3720.00	Horizontal	-53.86	12.57	-41.29		
		5580.00	H	-64.70	16.59	-48.11		
		7440.00	H	-64.60	18.67	-45.93		
	Mid	3760.00	Vertical	-44.03	12.76	-31.27	-13.00	PASS
		5640.00	V	-50.72	16.69	-34.03		
		7520.00	V	-54.80	18.38	-36.42		
		3760.00	Horizontal	-54.34	12.76	-41.58		
		5640.00	H	-65.04	16.69	-48.35		
		7520.00	H	-64.53	18.38	-46.15		
High	3800.00	Vertical	-42.77	12.97	-29.80	-13.00	PASS	



		5700.00	V	-49.25	17.19	-32.06		PASS
		7600.00	V	-53.28	18.28	-35.00		
		3800.00	Horizontal	-54.86	12.97	-41.89		
		5700.00	H	-65.83	17.19	-48.64		
		7600.00	H	-64.68	18.28	-46.40		

LTE Band 4								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission			Limit (dBm)	Result	
			Polarization	reading (dBm)	factor (dB)			Level (dBm)
1.4MHz	Low	3421.40	Vertical	-46.31	12.89	-33.42	-13.00	PASS
		5132.10	V	-54.72	15.86	-38.86		
		6842.80	V	-57.32	18.92	-38.40		
		3421.40	Horizontal	-47.66	12.89	-34.77		
		5132.10	H	-55.99	15.86	-40.13		
		6842.80	H	-58.40	18.92	-39.48		
	Mid	3465.00	Vertical	-44.89	12.49	-32.40	-13.00	PASS
		5197.50	V	-53.61	15.71	-37.90		
		6930.00	V	-55.76	18.26	-37.50		
		3465.00	Horizontal	-46.02	12.49	-33.53		
		5197.50	H	-54.83	15.71	-39.12		
		6930.00	H	-56.79	18.26	-38.53		
	High	3508.60	Vertical	-43.68	13.01	-30.67	-13.00	PASS
		5262.90	V	-52.21	15.89	-36.32		
		7017.20	V	-54.67	18.67	-36.00		
		3508.60	Horizontal	-45.12	13.01	-32.11		
		5262.90	H	-53.66	15.89	-37.77		
		7017.20	H	-55.91	18.67	-37.24		
3MHz	Low	3423.00	Vertical	-45.58	12.74	-32.84	-13.00	PASS
		5134.50	V	-53.94	15.68	-38.26		
		6846.00	V	-56.51	18.59	-37.92		
		3423.00	Horizontal	-46.58	12.74	-33.84		
		5134.50	H	-56.18	15.68	-40.50		
		6846.00	H	-57.91	18.59	-39.32		
	Mid	3465.00	Vertical	-47.60	12.49	-35.11	-13.00	PASS
		5197.50	V	-56.42	15.89	-40.53		



		6930.00	V	-58.33	18.66	-39.67	-13.00	PASS	
		3465.00	Horizontal	-50.69	12.49	-38.20			
		5197.50	H	-59.46	15.89	-43.57			
		6930.00	H	-61.55	18.66	-42.89			
	High	3507.00	Vertical	-50.08	13.44	-36.64	-13.00	PASS	
		5260.50	V	-57.81	15.89	-41.92			
		7014.00	V	-59.38	18.39	-40.99			
		3507.00	Horizontal	-53.75	13.44	-40.31			
		5260.50	H	-61.84	15.89	-45.95			
		7014.00	H	-63.01	18.39	-44.62			
	5MHz	Low	3425.00	Vertical	-46.72	12.87	-33.85	-13.00	PASS
			5137.50	V	-55.72	15.85	-39.87		
			6850.00	V	-57.14	18.93	-38.21		
			3425.00	Horizontal	-52.07	12.87	-39.20		
5137.50			H	-62.85	15.85	-47.00			
6850.00			H	-62.66	18.93	-43.73			
Mid		3465.00	Vertical	-47.16	12.47	-34.69	-13.00	PASS	
		5197.50	V	-54.78	15.7	-39.08			
		6930.00	V	-57.24	18.29	-38.95			
		3465.00	Horizontal	-52.65	12.47	-40.18			
		5197.50	H	-61.91	15.7	-46.21			
		6930.00	H	-61.81	18.29	-43.52			
High		3505.00	Vertical	-46.77	13.29	-33.48	-13.00	PASS	
		5257.50	V	-56.04	15.86	-40.18			
		7010.00	V	-56.54	18.63	-37.91			
		3505.00	Horizontal	-52.68	13.29	-39.39			
		5257.50	H	-61.33	15.86	-45.47			
		7010.00	H	-61.52	18.63	-42.89			
10MHz	Low	3430.00	Vertical	-44.07	12.72	-31.35	-13.00	PASS	
		5145.00	V	-57.09	15.61	-41.48			
		6860.00	V	-55.74	18.62	-37.12			
		3430.00	Horizontal	-52.37	12.72	-39.65			
	Mid	5145.00	H	-61.32	15.61	-45.71	-13.00	PASS	
		6860.00	H	-61.72	18.62	-43.10			
		3465.00	Vertical	-43.95	12.41	-31.54			
		5197.50	V	-57.58	15.92	-41.66			



		6930.00	V	-56.28	18.63	-37.65		PASS				
		3465.00	Horizontal	-52.27	12.41	-39.86						
		5197.50	H	-61.80	15.92	-45.88						
		6930.00	H	-61.89	18.63	-43.26						
	High		3500.00	Vertical	-45.21	13.41	-31.80		PASS			
			5250.00	V	-57.49	15.59	-41.90					
				7000.00	V	-56.19	18.31	-37.88		PASS		
				3500.00	Horizontal	-53.47	13.41	-40.06				
				5250.00	H	-61.66	15.59	-46.07				
				7000.00	H	-61.73	18.31	-43.42				
	15MHz	Low	3435.00	Vertical	-45.38	12.89	-32.49		PASS			
			5152.50	V	-57.06	15.86	-41.20					
6870.00			V	-57.38	18.95	-38.43						
3435.00			Horizontal	-51.25	12.89	-38.36						
5152.50			H	-63.53	15.86	-47.67						
6870.00			H	-59.41	18.95	-40.46						
Mid			3465.00	Vertical	-47.76	12.49	-35.27		PASS			
			5197.50	V	-54.32	15.73	-38.59					
				6930.00	V	-59.20	18.31			-40.89		PASS
				3465.00	Horizontal	-48.69	12.49			-36.20		
				5197.50	H	-65.15	15.73			-49.42		
				6930.00	H	-57.11	18.31			-38.80		
High			3495.00	Vertical	-50.63	13.32	-37.31		PASS			
			5242.50	V	-52.61	15.88	-36.73					
				6990.00	V	-57.77	18.65			-39.12		PASS
				3495.00	Horizontal	-47.60	13.32			-34.28		
				5242.50	H	-61.58	15.88			-45.70		
				6990.00	H	-56.52	18.65			-37.87		
20MHz	Low	3440.00	Vertical	-47.10	12.74	-34.36		PASS				
		5160.00	V	-51.71	15.65	-36.06						
		6880.00	V	-57.19	18.64	-38.55						
		3440.00	Horizontal	-48.96	12.74	-36.22						
			5160.00	H	-62.89	15.65	-47.24		PASS			
			6880.00	H	-56.96	18.64	-38.32					
		Mid	3465.00	Vertical	-47.29	12.44	-34.85				PASS	
			5197.50	V	-52.22	15.93	-36.29					



		6930.00	V	-57.41	18.64	-38.77	-13.00	PASS	
		3465.00	Horizontal	-48.97	12.44	-36.53			
		5197.50	H	-63.48	15.93	-47.55			
		6930.00	H	-60.10	18.64	-41.46			
	High		3490.00	Vertical	-50.30	13.43	-36.87	-13.00	PASS
			5235.00	V	-53.55	15.61	-37.94		
			6980.00	V	-58.61	18.34	-40.27	-13.00	PASS
			3490.00	Horizontal	-51.38	13.43	-37.95		
			5235.00	H	-63.52	15.61	-47.91		
			6980.00	H	-61.09	18.34	-42.75		

LTE Band 5								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	1649.40	Vertical	-42.82	7.29	-35.53	-13.00	PASS
		2474.10	V	-52.53	9.41	-43.12		
		3298.80	V	-56.33	12.69	-43.64		
		1649.40	Horizontal	-46.04	7.29	-38.75		
		2474.10	H	-56.32	9.41	-46.91		
		3298.80	H	-59.78	12.69	-47.09		
	Mid	1673.00	Vertical	-41.90	7.32	-34.58	-13.00	PASS
		2509.50	V	-51.61	9.39	-42.22		
		3346.00	V	-55.38	12.78	-42.60		
		1673.00	Horizontal	-45.09	7.32	-37.77		
		2509.50	H	-55.38	9.39	-45.99		
		3346.00	H	-59.00	12.78	-46.22		
	High	1696.60	Vertical	-40.82	7.33	-33.49	-13.00	PASS
		2544.90	V	-50.79	9.46	-41.33		
		3393.20	V	-54.47	12.71	-41.76		
		1696.60	Horizontal	-41.30	7.33	-33.97		
		2544.90	H	-50.35	9.46	-40.89		
		3393.20	H	-55.25	12.71	-42.54		
3MHz	Low	1651.00	Vertical	-38.87	7.36	-31.51	-13.00	PASS
		2476.50	V	-48.98	9.51	-39.47		
		3302.00	V	-52.90	12.72	-40.18		



5MHz		1651.00	Horizontal	-40.03	7.36	-32.67	-13.00	PASS		
		2476.50	H	-49.17	9.51	-39.66				
		3302.00	H	-54.22	12.72	-41.50				
	Mid		1673.00	Vertical	-37.94	7.41	-30.53	-13.00	PASS	
			2509.50	V	-48.07	9.52	-38.55			
			3346.00	V	-52.05	12.73	-39.32			
				1673.00	Horizontal	-38.33	7.41	-30.92	-13.00	PASS
				2509.50	H	-47.77	9.52	-38.25		
				3346.00	H	-52.89	12.73	-40.16		
	High		1695.00	Vertical	-35.90	7.52	-28.38	-13.00	PASS	
			2542.50	V	-46.06	9.46	-36.60			
			3390.00	V	-50.27	12.81	-37.46			
				1695.00	Horizontal	-36.84	7.52	-29.32	-13.00	PASS
				2542.50	H	-46.21	9.46	-36.75		
				3390.00	H	-51.69	12.81	-38.88		
	10MHz	Low	1653.00	Vertical	-32.01	7.61	-24.40	-13.00	PASS	
			2479.50	V	-43.62	9.49	-34.13			
			3306.00	V	-47.06	12.86	-34.20			
1653.00			Horizontal	-37.89	7.61	-30.28				
2479.50			H	-47.14	9.49	-37.65				
3306.00			H	-52.50	12.86	-39.64				
Mid			1673.00	Vertical	-32.84	7.72	-25.12	-13.00	PASS	
			2509.50	V	-44.34	9.53	-34.81			
			3346.00	V	-47.67	12.84	-34.83			
				1673.00	Horizontal	-38.15	7.72	-30.43	-13.00	PASS
				2509.50	H	-47.30	9.53	-37.77		
				3346.00	H	-52.60	12.84	-39.76		
High			1693.00	Vertical	-33.79	7.79	-26.00	-13.00	PASS	
			2539.50	V	-45.14	9.53	-35.61			
			3386.00	V	-48.48	12.89	-35.59			
				1693.00	Horizontal	-36.57	7.79	-28.78	-13.00	PASS
				2539.50	H	-45.75	9.53	-36.22		
				3386.00	H	-51.33	12.89	-38.44		
Low		1658.00	Vertical	-32.69	7.81	-24.88	-13.00	PASS		
		2487.00	V	-44.22	9.56	-34.66				
		3316.00	V	-47.69	12.91	-34.78				



		1658.00	Horizontal	-37.87	7.81	-30.06	-13.00	PASS	
		2487.00	H	-46.98	9.56	-37.42			
		3316.00	H	-52.37	12.91	-39.46			
	Mid		1673.00	Vertical	-33.67	7.83	-25.84	-13.00	PASS
			2509.50	V	-45.15	9.59	-35.56		
			3346.00	V	-48.57	12.94	-35.63		
			1673.00	Horizontal	-38.08	7.83	-30.25	-13.00	PASS
			2509.50	H	-47.16	9.59	-37.57		
			3346.00	H	-52.55	12.94	-39.61		
	High		1688.00	Vertical	-33.96	7.89	-26.07	-13.00	PASS
			2532.00	V	-45.39	9.62	-35.77		
			3376.00	V	-48.79	12.96	-35.83		
			1688.00	Horizontal	-38.32	7.89	-30.43	-13.00	PASS
			2532.00	H	-47.36	9.62	-37.74		
			3376.00	H	-52.71	12.96	-39.75		

LTE Band 7								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission			Limit (dBm)	Result	
			Polarization	reading (dBm)	factor (dB)			Level (dBm)
5MHz	Low	5005.00	Vertical	-55.62	15.62	-40.00	-25.00	PASS
		7507.50	V	-58.26	17.86	-40.40		
		10010.00	V	-65.85	23.84	-42.01		
		5005.00	Horizontal	-57.27	15.62	-41.65		
		7507.50	H	-60.29	17.86	-42.43		
		10010.00	H	-67.04	23.84	-43.20		
	Mid	5070.00	Vertical	-54.82	15.66	-39.16	-25.00	PASS
		7605.00	V	-57.04	17.87	-39.17		
		10140.00	V	-64.86	23.88	-40.98		
		5070.00	Horizontal	-55.04	15.66	-39.38		
		7605.00	H	-58.37	17.87	-40.50		
		10140.00	H	-65.79	23.88	-41.91		
	High	5135.00	Vertical	-52.5	15.69	-36.81	-25.00	PASS
		7702.50	V	-54.91	17.88	-37.03		
		10270.00	V	-62.86	23.91	-38.95		
5135.00		Horizontal	-53.51	15.69	-37.82			



10MHz		7702.50	H	-56.91	17.88	-39.03			
		10270.00	H	-64.57	23.91	-40.66			
	Low		5010.00	Vertical	-51.46	15.71	-35.75	-25.00	PASS
			7515.00	V	-54.05	17.92	-36.13		
		10020.00	V	-62.12	23.94	-38.18			
		5010.00	Horizontal	-54.41	15.71	-38.70			
		7515.00	H	-57.78	17.92	-39.86			
		10020.00	H	-65.31	23.94	-41.37			
	Mid		5070.00	Vertical	-52.07	15.66	-36.41	-25.00	PASS
			7605.00	V	-54.62	17.87	-36.75		
		10140.00	V	-62.65	23.88	-38.77			
		5070.00	Horizontal	-55.43	15.66	-39.77			
		7605.00	H	-58.6	17.87	-40.73			
		10140.00	H	-66.07	23.88	-42.19			
	High		5130.00	Vertical	-53.29	15.79	-37.50	-25.00	PASS
			7695.00	V	-55.72	17.98	-37.74		
		10260.00	V	-63.73	24.02	-39.71			
		5130.00	Horizontal	-56.26	15.79	-40.47			
7695.00		H	-59.37	17.98	-41.39				
10260.00		H	-66.77	24.02	-42.75				
15MHz	Low	5015.00	Vertical	-49.55	15.81	-33.74	-25.00	PASS	
		7522.50	V	-56.88	17.96	-38.92			
		10030.00	V	-60.50	24.11	-36.39			
		5015.00	Horizontal	-56.04	15.81	-40.23			
		7522.50	H	-55.33	17.96	-37.37			
		10030.00	H	-66.52	24.11	-42.41			
	Mid		5070.00	Vertical	-50.06	15.66	-34.40	-25.00	PASS
			7605.00	V	-51.53	17.87	-33.66		
		10140.00	V	-59.98	23.88	-36.10			
		5070.00	Horizontal	-57.70	15.66	-42.04			
		7605.00	H	-60.14	17.87	-42.27			
		10140.00	H	-67.25	23.88	-43.37			
	High		5125.00	Vertical	-49.18	15.88	-33.30	-25.00	PASS
			7687.50	V	-52.78	18.03	-34.75		
		10250.00	V	-61.29	24.16	-37.13			
		5125.00	Horizontal	-53.34	15.88	-37.46			



20MHz		7687.50	H	-56.62	18.03	-38.59			
		10250.00	H	-64.78	24.16	-40.62			
	Low		5020.00	Vertical	-51.28	16.03	-35.25	-25.00	PASS
			7530.00	V	-57.84	18.11	-39.73		
			10040.00	V	-60.81	24.19	-36.62		
		Horizontal	5020.00	-53.95	16.03	-37.92			
			7530.00	H	-53.90	18.11	-35.79		
			10040.00	H	-64.79	24.19	-40.60		
	Mid		5070.00	Vertical	-49.79	15.66	-34.13	-25.00	PASS
			7605.00	V	-51.31	17.87	-33.44		
			10140.00	V	-59.85	23.88	-35.97		
		Horizontal	5070.00	-56.52	15.66	-40.86			
			7605.00	H	-58.38	17.87	-40.51		
			10140.00	H	-65.86	23.88	-41.98		
	High		5120.00	Vertical	-49.13	16.15	-32.98	-25.00	PASS
			7680.00	V	-52.87	18.19	-34.68		
			10240.00	V	-61.31	24.26	-37.05		
		Horizontal	5120.00	-55.03	16.15	-38.88			
			7680.00	H	-57.61	18.19	-39.42		
			10240.00	H	-65.98	24.26	-41.72		

LTE Band 12									
Bandwidth	Channel	Frequency (MHz)	Spurious Emission			Limit (dBm)	Result		
			Polarization	reading (dBm)	factor (dB)			Level (dBm)	
1.4MHz	Low	1399.40	Vertical	-39.81	4.21	-35.60	-13.00	PASS	
		2099.10	V	-48.32	9.12	-39.20			
		2798.80	V	-51.66	11.36	-40.30			
		Horizontal	1399.40	-41.36	4.21	-37.15			
			2099.10	H	-49.78	9.12			-40.66
			2798.80	H	-52.90	11.36			-41.54
	Mid		1415.00	Vertical	-38.70	4.26	-34.44	-13.00	PASS
			2122.50	V	-47.26	9.15	-38.11		
		Horizontal	2830.00	-50.66	11.39	-39.27			
			1415.00	-39.99	4.26	-35.73			
2122.50	H	-48.66	9.15	-39.51					



	High	2830.00	H	-51.84	11.39	-40.45	-13.00	PASS
		1430.60	Vertical	-36.75	4.29	-32.46		
		2145.90	V	-45.42	9.11	-36.31		
		2861.20	V	-48.87	11.31	-37.56		
		1430.60	Horizontal	-39.33	4.29	-35.04		
		2145.90	H	-47.97	9.11	-38.86		
	Low	2861.20	H	-51.21	11.31	-39.90	-13.00	PASS
		1401.00	Vertical	-35.50	4.32	-31.18		
		2101.50	V	-41.84	9.16	-32.68		
		2802.00	V	-46.27	11.35	-34.92		
		1401.00	Horizontal	-36.22	4.32	-31.90		
		2101.50	H	-44.30	9.16	-35.14		
3MHz	Mid	2802.00	H	-49.30	11.35	-37.95	-13.00	PASS
		1415.00	Vertical	-31.89	4.26	-27.63		
		2122.50	V	-38.49	9.15	-29.34		
		2830.00	V	-42.66	11.39	-31.27		
		1415.00	Horizontal	-33.20	4.26	-28.94		
		2122.50	H	-42.22	9.15	-33.07		
	High	2830.00	H	-46.96	11.39	-35.57	-13.00	PASS
		1429.00	Vertical	-28.80	4.42	-24.38		
		2143.50	V	-36.23	9.25	-26.98		
		2858.00	V	-41.19	11.46	-29.73		
		1429.00	Horizontal	-30.25	4.42	-25.83		
		2143.50	H	-39.95	9.25	-30.70		
5MHz	Low	2858.00	H	-42.86	11.46	-31.40	-13.00	PASS
		1403.00	Vertical	-25.02	4.13	-20.89		
		2104.50	V	-30.75	9.06	-21.69		
		2806.00	V	-37.03	11.27	-25.76		
		1403.00	Horizontal	-32.61	4.13	-28.48		
		2104.50	H	-44.48	9.06	-35.42		
	Mid	2806.00	H	-44.99	11.27	-33.72	-13.00	PASS
		1415.00	Vertical	-26.85	4.26	-22.59		
		2122.50	V	-34.00	9.15	-24.85		
		2830.00	V	-39.88	11.39	-28.49		
		1415.00	Horizontal	-36.68	4.26	-32.42	-13.00	PASS
		2122.50	H	-47.25	9.15	-38.10		



High		2830.00	H	-47.15	11.39	-35.76	-13.00	PASS
		1427.00	Vertical	-31.11	4.22	-26.89		
		2140.50	V	-37.07	9.16	-27.91		
		2854.00	V	-42.45	11.32	-31.13	-13.00	PASS
		1427.00	Horizontal	-39.72	4.22	-35.50		
		2140.50	H	-50.12	9.16	-40.96		
	2854.00	H	-49.26	11.32	-37.94	-13.00	PASS	
Low		1408.00	Vertical	-28.32	4.29			-24.03
		2112.00	V	-35.56	9.19			-26.37
		2816.00	V	-40.62	11.35			-29.27
		1408.00	Horizontal	-44.16	4.29			-39.87
		2112.00	H	-53.14	9.19			-43.95
		2816.00	H	-52.73	11.35	-41.38		
Mid		1415.00	Vertical	-31.68	4.26	-27.42	-13.00	PASS
		2122.50	V	-38.36	9.15	-29.21		
		2830.00	V	-44.08	11.39	-32.69		
		1415.00	Horizontal	-46.37	4.26	-42.11	-13.00	PASS
		2122.50	H	-56.43	9.15	-47.28		
		2830.00	H	-55.40	11.39	-44.01		
High		1422.00	Vertical	-33.04	4.36	-28.68	-13.00	PASS
		2133.00	V	-41.31	9.27	-32.04		
		2844.00	V	-47.37	11.39	-35.98		
		1422.00	Horizontal	-43.77	4.36	-39.41	-13.00	PASS
		2133.00	H	-54.98	9.27	-45.71		
		2844.00	H	-53.31	11.39	-41.92		

LTE Band 13								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission			Limit (dBm)	Result	
			Polarization	reading (dBm)	factor (dB)			Level (dBm)
5MHz	Low	1559.00	Vertical	-59.42	4.98	-54.44	-40.00	PASS
		2338.50	V	-49.08	9.12	-39.96		
		3118.00	V	-53.12	12.46	-40.66		
		1559.00	Horizontal	-60.61	4.98	-55.63	-40.00	PASS
		2338.50	H	-50.20	9.12	-41.08		
		3118.00	H	-54.07	12.46	-41.61		



	Mid	1564.00	Vertical	-58.58	5.03	-53.55	-40.00	PASS	
		2346.00	V	-48.31	9.19	-39.12	-13.00		
		3128.00	V	-52.34	12.47	-39.87			
		1564.00	Horizontal	-59.57	5.03	-54.54	-40.00		PASS
		2346.00	H	-49.39	9.19	-40.20	-13.00		
		3128.00	H	-53.24	12.47	-40.77			
	High	1569.00	Vertical	-57.11	5.09	-52.02	-40.00	PASS	
		2353.50	V	-46.95	9.22	-37.73	-13.00		
		3138.00	V	-51.08	12.53	-38.55			
		1569.00	Horizontal	-59.10	5.09	-54.01	-40.00		PASS
		2353.50	H	-48.92	9.22	-39.70	-13.00		
		3138.00	H	-52.87	12.53	-40.34			
10MHz	Mid	1564.00	Vertical	-56.07	5.03	-51.04	-40.00	PASS	
		2346.00	V	-44.13	9.19	-34.94	-13.00		
		3128.00	V	-48.99	12.47	-36.52			
		1564.00	Horizontal	-56.63	5.03	-51.60	-40.00		PASS
		2346.00	H	-46.03	9.19	-36.84	-13.00		
		3128.00	H	-51.31	12.47	-38.84			

LTE Band 17										
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result		
			Polarization	reading (dBm)	factor (dB)	Level (dBm)				
5MHz	Low	1413.00	Vertical	-39.88	4.26	-35.62	-13.00	PASS		
		2119.50	V	-48.19	8.72	-39.47				
		2826.00	V	-51.87	11.36	-40.51				
		1413.00	Horizontal	-41.23	4.26	-36.97			-13.00	PASS
		2119.50	H	-49.45	8.72	-40.73				
		2826.00	H	-52.94	11.36	-41.58				
	Mid	1420.00	Vertical	-38.82	4.21	-34.61	-13.00	PASS		
		2130.00	V	-47.78	9.26	-38.52				
		2840.00	V	-51.00	11.38	-39.62				
		1420.00	Horizontal	-39.95	4.21	-35.74			-13.00	PASS
		2130.00	H	-48.99	9.26	-39.73				
		2840.00	H	-52.01	11.38	-40.63				
High	1427.00	Vertical	-37.15	4.26	-32.89	-13.00	PASS			



		2140.50	V	-46.08	9.13	-36.95		PASS	
		2854.00	V	-49.48	11.35	-38.13			
		1427.00	Horizontal	-39.40	4.26	-35.14			
		2140.50	H	-48.29	9.13	-39.16			
		2854.00	H	-51.50	11.35	-40.15			
	10MHz	Low	1418.00	Vertical	-35.91	4.13	-31.78	-13.00	PASS
			2127.00	V	-43.03	9.23	-33.80		
			2836.00	V	-47.68	11.85	-35.83		
			1418.00	Horizontal	-36.54	4.13	-32.41		
			2127.00	H	-45.16	9.23	-35.93		
2836.00			H	-50.31	11.85	-38.46			
Mid		1420.00	Vertical	-32.91	4.21	-28.70	-13.00	PASS	
		2130.00	V	-40.15	9.26	-30.89			
		2840.00	V	-44.04	11.38	-32.66			
		1420.00	Horizontal	-34.05	4.21	-29.84			
		2130.00	H	-43.39	9.26	-34.13			
		2840.00	H	-47.77	11.38	-36.39			
High		1422.00	Vertical	-30.06	4.18	-25.88	-13.00	PASS	
		2133.00	V	-38.08	9.24	-28.84			
		2844.00	V	-43.14	11.82	-31.32			
		1422.00	Horizontal	-31.32	4.18	-27.14			
		2133.00	H	-41.31	9.24	-32.07			
		2844.00	H	-44.58	11.82	-32.76			

LTE Band 38

Bandwidth	Channel	Frequency (MHz)	Spurious Emission			Limit (dBm)	Result	
			Polarization	reading (dBm)	factor (dB)			Level (dBm)
5MHz	Low	5145.00	Vertical	-55.33	15.71	-39.62	-25.00	PASS
		7717.50	V	-58.12	17.88	-40.24		
		10290.00	V	-62.13	24.11	-38.02		
		5145.00	Horizontal	-56.89	15.71	-41.18		
		7717.50	H	-59.59	17.88	-41.71		
		10290.00	H	-63.38	24.11	-39.27		
	Mid	5190.00	Vertical	-54.14	15.69	-38.45	-25.00	PASS
		7785.00	V	-57.04	17.90	-39.14		



		10380.00	V	-61.91	24.93	-36.98		PASS	
		5190.00	Horizontal	-55.44	15.69	-39.75			
		7785.00	H	-58.45	17.90	-40.55			
		10380.00	H	-63.1	24.93	-38.17			
	High		5235.00	Vertical	-52.18	15.73	-36.45	-25.00	PASS
			7852.50	V	-55.28	17.96	-37.32		
			10470.00	V	-59.45	24.20	-35.25		
			5235.00	Horizontal	-54.78	15.73	-39.05		
			7852.50	H	-57.85	17.96	-39.89		
			10470.00	H	-61.81	24.20	-37.61		
	10MHz	Low	5150.00	Vertical	-50.92	15.76	-35.16	-25.00	PASS
			7725.00	V	-51.56	17.90	-33.66		
10300.00			V	-56.68	24.09	-32.59			
			5150.00	Horizontal	-51.65	15.76	-35.89		
			7725.00	H	-54.04	17.90	-36.14		
10300.00			H	-59.74	24.09	-35.65			
Mid			5190.00	Vertical	-47.28	15.69	-31.59	-25.00	PASS
			7785.00	V	-48.19	17.90	-30.29		
			10380.00	V	-53.84	24.93	-28.91		
			5190.00	Horizontal	-48.6	15.69	-32.91		
			7785.00	H	-51.95	17.90	-34.05		
			10380.00	H	-58.18	24.93	-33.25		
High			5230.00	Vertical	-44.12	15.80	-28.32	-25.00	PASS
			7845.00	V	-48.26	17.98	-30.28		
			10460.00	V	-52.97	24.15	-28.82		
			5230.00	Horizontal	-46.26	15.80	-30.46		
			7845.00	H	-50.17	17.98	-32.19		
			10460.00	H	-54.12	24.15	-29.97		
15MHz	Low	5155.00	Vertical	-47.40	15.76	-31.64	-25.00	PASS	
		7732.50	V	-46.28	17.96	-28.32			
		10310.00	V	-53.51	24.92	-28.59			
			5155.00	Horizontal	-54.32	15.76			-38.56
			7732.50	H	-58.86	17.96			-40.90
		10310.00	H	-62.91	24.92	-37.99			
	Mid		5190.00	Vertical	-49.00	15.69	-33.31	-25.00	PASS
			7785.00	V	-51.38	17.90	-33.48		



20MHz	High	10380.00	V	-53.99	24.93	-29.06	-25.00	PASS			
		5190.00	Horizontal	-52.58	15.69	-36.89					
		7785.00	H	-54.65	17.90	-36.75					
		10380.00	H	-60.24	24.93	-35.31					
	High	5225.00	Vertical	-44.31	15.75	-28.56	-25.00	PASS			
		7837.50	V	-48.39	17.94	-30.45					
		10450.00	V	-53.08	24.11	-28.97					
		5225.00	Horizontal	-49.32	15.75	-33.57					
		7837.50	H	-53.01	17.94	-35.07					
		10450.00	H	-56.27	24.11	-32.16					
	Low	5160.00	Vertical	-44.39	15.64	-28.75	-25.00	PASS			
		7740.00	V	-44.61	17.85	-26.76					
		10320.00	V	-53.03	24.87	-28.16					
		5160.00	Horizontal	-58.61	15.64	-42.97					
		7740.00	H	-61.76	17.85	-43.91					
		10320.00	H	-66.33	24.87	-41.46					
		Mid	5190.00	Vertical	-52.42	15.69			-36.73	-25.00	PASS
			7785.00	V	-54.24	17.90			-36.34		
			10380.00	V	-57.43	24.93			-32.50		
			5190.00	Horizontal	-54.83	15.69			-39.14		
			7785.00	H	-58.01	17.90			-40.11		
			10380.00	H	-62.89	24.93			-37.96		
	High	5220.00	Vertical	-45.53	15.70	-29.83	-25.00	PASS			
		7830.00	V	-51.18	17.88	-33.30					
10440.00		V	-56.28	24.00	-32.28						
5220.00		Horizontal	-46.55	15.70	-30.85						
7830.00		H	-51.37	17.88	-33.49						
10440.00		H	-54.05	24.00	-30.05						

LTE Band 41								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission			Limit (dBm)	Result	
			Polarization	reading (dBm)	factor (dB)			Level (dBm)
5MHz	Low	4997.00	Vertical	-55.22	15.64	-39.58	-25.00	PASS
		7495.50	V	-58.07	17.82	-40.25		
		9994.00	V	-61.18	23.83	-37.35		



10MHz		4997.00	Horizontal	-56.76	15.64	-41.12	-25.00	PASS	
		7495.50	H	-59.52	17.82	-41.70			
		9994.00	H	-62.41	23.83	-38.58			
	Mid		5186.00	Vertical	-54.11	15.69	-38.42	-25.00	PASS
			7779.00	V	-57.12	17.96	-39.16		
			10372.00	V	-60.53	24.20	-36.33		
			5186.00	Horizontal	-55.4	15.69	-39.71	-25.00	PASS
			7779.00	H	-58.52	17.96	-40.56		
			10372.00	H	-61.69	24.20	-37.49		
	High		5375.00	Vertical	-52.41	15.96	-36.45	-25.00	PASS
			8062.50	V	-56	18.64	-37.36		
			10750.00	V	-58.91	24.29	-34.62		
			5375.00	Horizontal	-54.98	15.96	-39.02	-25.00	PASS
			8062.50	H	-58.55	18.64	-39.91		
			10750.00	H	-61.23	24.29	-36.94		
	15MHz	Low	5002.00	Vertical	-50.83	15.65	-35.18	-25.00	PASS
			7503.00	V	-51.58	17.83	-33.75		
			10004.00	V	-55.84	23.85	-31.99		
5002.00			Horizontal	-51.55	15.65	-35.90			
7503.00			H	-54.04	17.83	-36.21			
10004.00			H	-58.85	23.85	-35.00			
Mid			5186.00	Vertical	-47.34	15.69	-31.65	-25.00	PASS
			7779.00	V	-48.38	17.96	-30.42		
			10372.00	V	-52.56	24.20	-28.36		
			5186.00	Horizontal	-48.65	15.69	-32.96	-25.00	PASS
			7779.00	H	-52.11	17.96	-34.15		
			10372.00	H	-56.83	24.20	-32.63		
High			5370.00	Vertical	-44.22	15.80	-28.42	-25.00	PASS
			8055.00	V	-49.05	18.64	-30.41		
			10740.00	V	-52.57	24.29	-28.28		
			5370.00	Horizontal	-46.35	15.80	-30.55	-25.00	PASS
			8055.00	H	-50.95	18.64	-32.31		
			10740.00	H	-53.69	24.29	-29.40		
15MHz	Low	5007.00	Vertical	-47.38	15.67	-31.71	-25.00	PASS	
		7510.50	V	-46.32	17.84	-28.48			
		10014.00	V	-51.89	23.85	-28.04			



20MHz		5007.00	Horizontal	-54.21	15.67	-38.54	-25.00	PASS		
		7510.50	H	-58.75	17.84	-40.91				
		10014.00	H	-61.16	23.85	-37.31				
	Mid		5186.00	Vertical	-49.03	15.69	-33.34	-25.00	PASS	
			7779.00	V	-51.53	17.96	-33.57			
			10372.00	V	-52.71	24.20	-28.51			
			5186.00	Horizontal	-52.57	15.69	-36.88	-25.00	PASS	
			7779.00	H	-54.77	17.96	-36.81			
			10372.00	H	-58.86	24.20	-34.66			
	High		5365.00	Vertical	-44.17	15.51	-28.66	-25.00	PASS	
			8047.50	V	-49.24	18.66	-30.58			
			10730.00	V	-52.72	24.30	-28.42			
			5365.00	Horizontal	-49.13	15.51	-33.62	-25.00	PASS	
			8047.50	H	-53.82	18.66	-35.16			
			10730.00	H	-55.86	24.30	-31.56			
	Low		5012.00	Vertical	-44.53	15.67	-28.86	-25.00	PASS	
			7518.00	V	-44.78	17.84	-26.94			
			10024.00	V	-51.47	23.86	-27.61			
			5012.00	Horizontal	-58.56	15.67	-42.89			
			7518.00	H	-61.72	17.84	-43.88			
			10024.00	H	-64.59	23.86	-40.73			
		Mid		5186.00	Vertical	-52.40	15.69	-36.71	-25.00	PASS
				7779.00	V	-54.35	17.96	-36.39		
				10372.00	V	-56.11	24.20	-31.91		
			5186.00	Horizontal	-54.79	15.69	-39.10	-25.00	PASS	
			7779.00	H	-58.08	17.96	-40.12			
			10372.00	H	-61.48	24.20	-37.28			
High		5360.00	Vertical	-45.90	15.98	-29.92	-25.00	PASS		
		8040.00	V	-52.05	18.65	-33.40				
		10720.00	V	-56.03	24.34	-31.69				
		5360.00	Horizontal	-46.91	15.98	-30.93	-25.00	PASS		
		8040.00	H	-52.25	18.65	-33.60				
		10720.00	H	-53.82	24.34	-29.48				




10. ERP and EIRP

10.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 24.232(b) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h)
Limit:	ERP ≤ 7W(38.45dBm) (LTE Band 5) EIRP ≤ 2W(33.00dBm) (LTE Band 2) ERP ≤ 3W(34.77dBm) (LTE Band 13) ERP ≤ 3W(34.77dBm) (LTE Band 12,17) EIRP ≤ 1W(30.00dBm) (LTE Band 4) EIRP ≤ 2W(33.00dBm) (LTE Band 7,38,41)

10.2. Test Setup

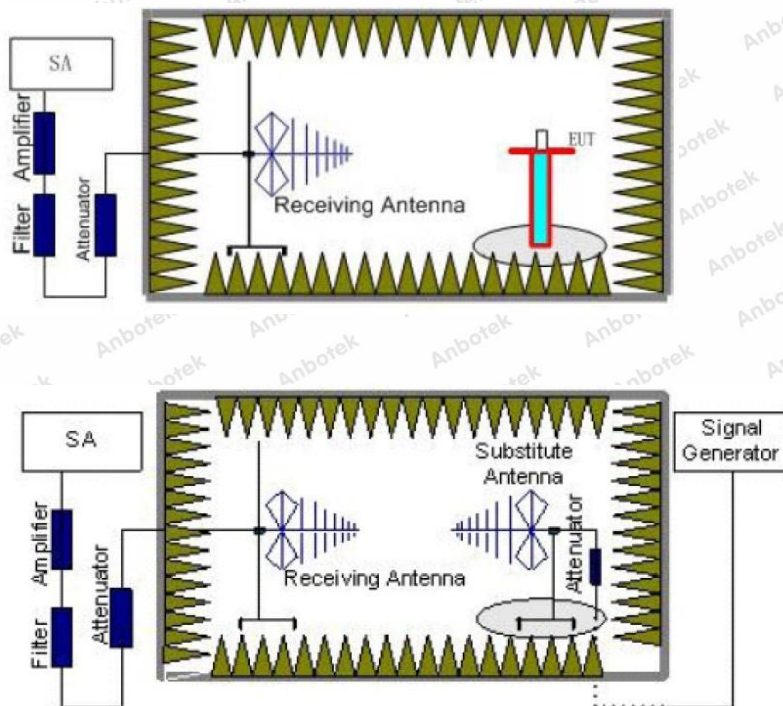

10.3. Test Procedure

1. Place the EUT in the center of the turntable.

- a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the



reference ground plane

- b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$Pe = Ps(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$



where

Pe = equivalent emission power in dBm

Ps = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

gain (dBd) = gain (dBi) – 2.15 dB.

If necessary, the antenna gain can be calculated from calibrated antenna factor information

14. Provide the complete measurement results as a part of the test report.

10.4. Test Data

Pass

Please to see the following pages



LTE Band 2						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	23.12	20.27	33.00	PASS
		Mid	23.56	20.14		
		High	23.67	20.42		
	16QAM	Low	16.98	14.84		PASS
		Mid	17.65	15.34		
		High	17.44	15.94		
3MHz	QPSK	Low	22.37	18.84	33.00	PASS
		Mid	23.08	20.10		
		High	22.86	19.84		
	16QAM	Low	18.99	16.91		PASS
		Mid	18.76	16.39		
		High	17.53	16.41		
5MHz	QPSK	Low	25.65	21.97	33.00	PASS
		Mid	26.04	21.55		
		High	26.69	21.99		
	16QAM	Low	19.82	16.46		PASS
		Mid	20.06	16.81		
		High	19.71	17.26		
10MHz	QPSK	Low	25.53	22.24	33.00	PASS
		Mid	25.92	21.84		
		High	26.54	22.58		
	16QAM	Low	19.68	16.89		PASS
		Mid	19.94	17.45		
		High	19.59	17.71		
15MHz	QPSK	Low	24.46	20.56	33.00	PASS
		Mid	25.13	21.58		
		High	25.35	21.72		
	16QAM	Low	21.34	18.70		PASS
		Mid	20.75	18.22		
		High	19.40	17.95		
20MHz	QPSK	Low	25.03	21.08	33.00	PASS
		Mid	26.00	22.26		
		High	26.24	22.27		



16QAM	Low	22.17	19.83	PASS
	Mid	21.46	18.79	
	High	20.07	18.24	

LTE Band 4						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	23.27	21.22	30.00	PASS
		Mid	23.99	21.83		
		High	24.23	21.47		
	16QAM	Low	18.71	17.87		PASS
		Mid	19.31	18.56		
		High	19.31	18.47		
3MHz	QPSK	Low	24.12	21.22	30.00	PASS
		Mid	23.82	21.34		
		High	23.59	21.16		
	16QAM	Low	19.29	18.75		PASS
		Mid	19.74	17.52		
		High	19.91	18.89		
5MHz	QPSK	Low	25.35	22.30	30.00	PASS
		Mid	25.68	22.87		
		High	25.86	22.58		
	16QAM	Low	20.26	18.63		PASS
		Mid	20.67	20.39		
		High	20.44	19.06		
10MHz	QPSK	Low	24.45	21.98	30.00	PASS
		Mid	24.96	22.52		
		High	25.16	22.17		
	16QAM	Low	19.59	18.47		PASS
		Mid	20.09	19.09		
		High	19.95	18.91		
15MHz	QPSK	Low	25.37	21.87	30.00	PASS
		Mid	24.84	21.96		
		High	24.57	21.83		
	16QAM	Low	20.22	19.21		PASS
		Mid	20.56	18.62		



		High	20.59	19.24		
20MHz	QPSK	Low	25.48	21.98	30.00	PASS
		Mid	25.31	22.17		
		High	24.97	21.94		
	16QAM	Low	20.18	19.36		PASS
Mid		21.01	18.48			
High		21.09	19.57			

LTE Band 5						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	22.64	21.37	38.45	PASS
		Mid	23.11	21.67		
		High	23.07	21.65		
	16QAM	Low	20.00	18.74		PASS
		Mid	20.11	19.34		
		High	20.18	19.00		
3MHz	QPSK	Low	24.35	20.63	38.45	PASS
		Mid	23.88	20.88		
		High	23.22	20.60		
	16QAM	Low	19.84	19.63		PASS
		Mid	20.10	18.98		
		High	20.17	18.70		
5MHz	QPSK	Low	23.71	21.04	38.45	PASS
		Mid	23.44	21.30		
		High	22.81	20.86		
	16QAM	Low	20.75	19.67		PASS
		Mid	20.54	19.91		
		High	20.45	19.74		
10MHz	QPSK	Low	23.60	21.08	38.45	PASS
		Mid	23.34	21.33		
		High	22.74	20.88		
	16QAM	Low	20.76	19.14		PASS
		Mid	20.96	19.78		
		High	21.10	19.48		



LTE Band 7						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	22.88	20.25	33.00	PASS
		Mid	23.29	20.06		
		High	23.06	20.04		
	16QAM	Low	17.78	15.75		PASS
		Mid	18.21	15.96		
		High	18.09	16.45		
10MHz	QPSK	Low	22.51	19.14	33.00	PASS
		Mid	22.66	19.86		
		High	22.50	19.63		
	16QAM	Low	18.97	17.08		PASS
		Mid	18.80	16.54		
		High	18.80	17.19		
15MHz	QPSK	Low	24.95	21.63	33.00	PASS
		Mid	25.67	21.42		
		High	25.48	21.30		
	16QAM	Low	20.05	17.05		PASS
		Mid	20.14	17.14		
		High	19.90	17.51		
20MHz	QPSK	Low	24.83	21.85	33.00	PASS
		Mid	25.36	21.55		
		High	25.23	21.67		
	16QAM	Low	19.19	16.82		PASS
		Mid	19.81	17.43		
		High	19.44	17.56		



LTE Band 12						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	22.74	20.03	34.77	PASS
		Mid	22.97	19.90		
		High	23.24	20.10		
	16QAM	Low	17.50	15.41		PASS
		Mid	17.93	15.81		
		High	17.93	16.28		
3MHz	QPSK	Low	22.09	18.81	34.77	PASS
		Mid	22.55	19.86		
		High	22.55	19.61		
	16QAM	Low	19.22	17.17		PASS
		Mid	18.87	16.70		
		High	18.01	16.68		
5MHz	QPSK	Low	24.90	21.48	34.77	PASS
		Mid	25.08	21.10		
		High	25.81	21.44		
	16QAM	Low	19.92	16.79		PASS
		Mid	19.98	17.06		
		High	19.86	17.40		
10MHz	QPSK	Low	24.79	21.71	34.77	PASS
		Mid	24.98	21.34		
		High	25.68	21.94		
	16QAM	Low	19.80	17.16		PASS
		Mid	19.88	17.60		
		High	19.76	17.78		



LTE Band 13						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	22.92	21.03	34.77	PASS
		Mid	23.28	20.94		
		High	23.35	21.17		
	16QAM	Low	17.28	16.04		PASS
		Mid	17.85	16.53		
		High	17.63	17.05		
10MHz	QPSK	Mid	22.23	19.72	34.77	PASS
	16QAM	Mid	22.84	20.90		

LTE Band 17						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	24.34	21.93	34.77	PASS
		Mid	24.97	21.40		
		High	23.97	22.88		
	16QAM	Low	17.44	16.78		PASS
		Mid	18.23	17.35		
		High	18.00	17.39		
10MHz	QPSK	Low	24.16	20.42	34.77	PASS
		Mid	24.77	20.80		
		High	23.80	20.39		
	16QAM	Low	17.60	17.06		PASS
		Mid	18.37	17.52		
		High	18.12	17.48		

LTE Band 38						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	23.72	20.83	33.00	PASS
		Mid	24.21	20.65		
		High	24.41	20.97		
	16QAM	Low	16.32	14.30		PASS
		Mid	17.09	14.86		



		High	16.91	15.57		
10MHz	QPSK	Low	22.82	19.11	33.00	PASS
		Mid	23.63	20.60		
		High	23.44	20.27		
	16QAM	Low	18.75	16.78		PASS
		Mid	18.42	16.13		
		High	17.02	16.14		
15MHz	QPSK	Low	26.77	22.87	33.00	PASS
		Mid	27.20	22.35		
		High	28.04	22.86		
	16QAM	Low	19.74	16.25		PASS
		Mid	19.99	16.63		
		High	19.64	17.16		
20MHz	QPSK	Low	26.62	23.21	33.00	PASS
		Mid	27.05	22.69		
		High	27.86	23.57		
	16QAM	Low	19.57	16.77		PASS
		Mid	19.85	17.40		
		High	19.50	17.70		

LTE Band 41						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	23.63	20.70	33.00	PASS
		Mid	24.12	20.56		
		High	24.31	20.89		
	16QAM	Low	16.37	14.28		PASS
		Mid	17.13	14.88		
		High	16.95	15.59		
10MHz	QPSK	Low	22.74	19.01	33.00	PASS
		Mid	23.55	20.51		
		High	23.36	20.20		
	16QAM	Low	18.75	16.72		PASS
		Mid	18.44	16.12		
		High	17.06	16.14		
15MHz	QPSK	Low	26.62	22.71	33.00	PASS



	16QAM	Mid	27.05	22.23	33.00	PASS
		High	27.88	22.74		
		Low	19.72	16.20		
		Mid	19.98	16.62		
		High	19.63	17.15		
20MHz	QPSK	Low	26.47	23.03	33.00	PASS
		Mid	26.90	22.56		
		High	27.70	23.44		
	16QAM	Low	19.56	16.71		PASS
		Mid	19.84	17.37		
		High	19.50	17.68		




11. Frequency stability VS Voltage measurement

11.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54
Limit:	$\leq \pm 2.5\text{ppm}$

11.2. Test Setup

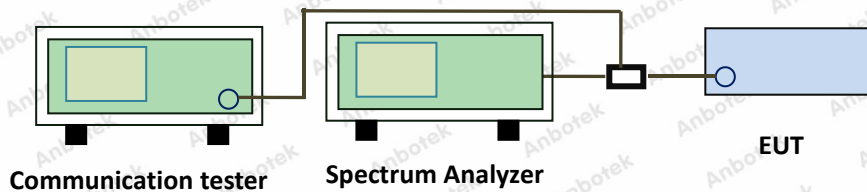

11.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C.
4. The power supply voltage to the EUT was varied $\pm 15\%$ of the nominal value measured at the input to the EUT.
5. Record the maximum frequency change.

11.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.




12. Frequency stability VS Temperature measurement

12.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54
Limit:	$\leq \pm 2.5\text{ppm}$

12.2. Test Setup

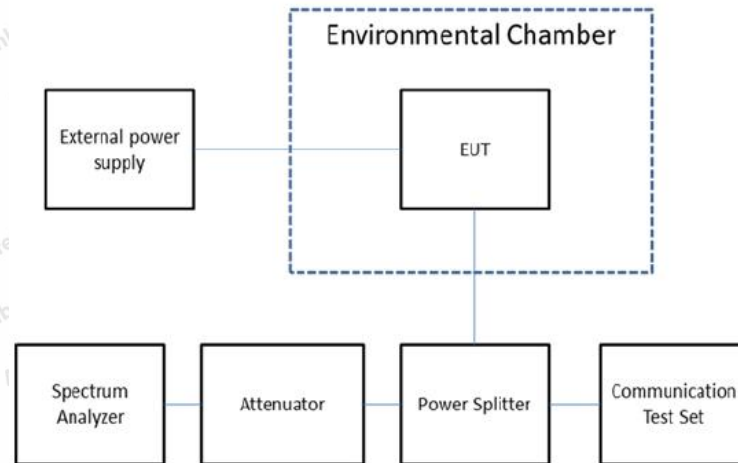

12.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

12.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_Licensed

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

