

Test Report

Report No.: MTi240326015-01E1

Date of issue: 2024-07-11

Applicant: Zhonghui Chuangzhi (Fuyang) Technology Co., Ltd

Product name: Robot Wireless Recharger

Model(s): HY01

FCC ID: 2BFQW-HY01

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.cn>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1 General Description	5
1.1 Description of the EUT	5
1.2 Description of test modes	5
1.3 Environmental Conditions	7
1.4 Description of support units	7
1.5 Measurement uncertainty	7
2 Summary of Test Result	8
3 Test Facilities and accreditations	9
3.1 Test laboratory	9
4 List of test equipment	10
5 Evaluation Results (Evaluation)	11
5.1 Antenna requirement	11
6 Radio Spectrum Matter Test Results (RF)	11
6.1 Conducted Emission at AC power line	11
6.2 Occupied Bandwidth	16
6.3 Field strength of fundamental	19
6.4 Band edge emissions (Radiated)	21
6.5 Emissions in frequency bands (below 1GHz)	24
6.6 Emissions in frequency bands (above 1GHz)	28
Photographs of the test setup	33
Photographs of the EUT	34

Test Result Certification	
Applicant:	Zhonghui Chuangzhi (Fuyang) Technology Co., Ltd
Address:	Building A12, Drone Industrial Park, Intersection of Lixin Road and Ruixiang Road, Yingquan District, Fuyang City, Anhui Province
Manufacturer:	Zhonghui Chuangzhi (Fuyang) Technology Co., Ltd
Address:	Building A12, Drone Industrial Park, Intersection of Lixin Road and Ruixiang Road, Yingquan District, Fuyang City, Anhui Province
Product description	
Product name:	Robot Wireless Recharger
Trademark:	ZONECHARGE
Model name:	HY01
Series Model(s):	N/A
Standards:	47 CFR Part 15.249
Test Method:	ANSI C63.10-2013
Date of Test	
Date of test:	2024-04-12 to 2024-07-11
Test result:	Pass

Test Engineer	:	Letter. Lan.
		(Letter Lan)
Reviewed By	:	David. Lee
		(David Lee)
Approved By	:	Leon Chen
		(Leon Chen)



1 General Description

1.1 Description of the EUT

Product name:	Robot Wireless Recharger
Model name:	HY01
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Input: AC 100-240V Output: 780W
Accessories:	N/A
Hardware version:	V0.0.1
Software version:	V0.0.1
Test sample(s) number:	MTi240326015-01S1001
RF specification	
Operating frequency range:	2402-2462MHz
Channel number:	16
Modulation type:	GFSK
Antenna(s) type:	Monopole
Antenna(s) gain:	6.05dBi

1.2 Description of test modes

No.	Emission test modes
Mode1	TX

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2442
1	2406	11	2446
2	2410	12	2450
3	2414	13	2454
4	2418	14	2458
5	2422	15	2462
6	2426	/	/
7	2430	/	/
8	2434	/	/
9	2438	/	/

Test Channel List**Operation Band: 2.4G**

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
1	2402	2434	2462

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software: Keying fixed frequency

For power setting, refer to below table.

Mode	2402MHz	2434MHz	2462MHz
TX	default	default	default

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
/	/	/	/
Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.249	47 CFR Part 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15.249	47 CFR 15.207(a)	Pass
3	Occupied Bandwidth	47 CFR Part 15.249	47 CFR 15.215(c)	Pass
4	Field strength of fundamental	47 CFR Part 15.249	47 CFR 15.249(a) 47 CFR 15.249(b)(1)	Pass
5	Band edge emissions (Radiated)	47 CFR Part 15.249	47 CFR 15.249(d)	Pass
6	Emissions in frequency bands (below 1GHz)	47 CFR Part 15.249	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)	Pass
7	Emissions in frequency bands (above 1GHz)	47 CFR Part 15.249	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)	Pass

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093



4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2024-03-20	2025-03-19
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2024-03-21	2025-03-20
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2024-03-20	2025-03-19
Occupied Bandwidth						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2024-03-20	2025-03-19
2	ESG Series Analog Signal Generator	Agilent	E4421B	GB40051240	2024-03-21	2025-03-20
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2024-03-21	2025-03-20
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2024-03-21	2025-03-20
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2024-03-21	2025-03-20
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2024-03-21	2025-03-20
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2024-03-20	2025-03-19
9	DC Power Supply	Agilent	E3632A	MY40027695	2024-03-21	2025-03-20
Field strength of fundamental Band edge emissions (Radiated) Emissions in frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	2278	2023-06-17	2025-06-16
3	Amplifier	Agilent	8449B	3008A01120	2024-03-20	2025-03-19
4	MXA signal analyzer	Agilent	N9020A	MY54440859	2024-03-21	2025-03-20
5	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
6	Horn antenna	Schwarzbeck	BBHA 9170	00987	2023-06-17	2025-06-16
7	Pre-amplifier	Space-Dtronics	EWLAN1840 G	210405001	2024-03-21	2025-03-20
Emissions in frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03-23	2025-03-22
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2024-03-20	2025-03-19

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

6 Radio Spectrum Matter Test Results (RF)

6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50


*Decreases with the logarithm of the frequency.

| Test Method: | ANSI C63.10-2013 section 6.2 | | |
| Procedure: | Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices | | |

6.1.1 E.U.T. Operation:

Operating Environment:			
Temperature:	22.9 °C	Humidity:	21.8 %
Pre test mode:	Mode1		
Final test mode:	Mode1		


6.1.2 Test Setup Diagram:

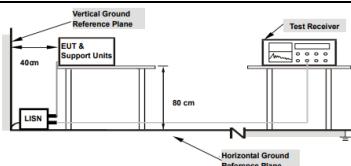



6.1.3 Test Data:


Mode1 / Line / CH: L/ 120V

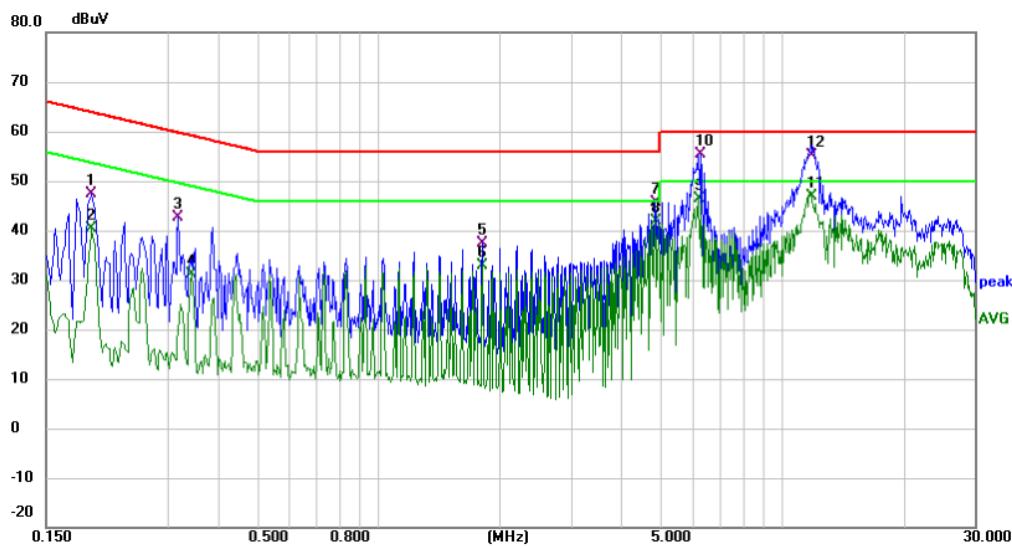

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment	dBuV	dB	
1	0.1940	36.14	11.14	47.28	63.86	-16.58	-	QP
2	0.1940	29.14	11.14	40.28	53.86	-13.58	-	AVG
3	0.3180	31.92	10.75	42.67	59.76	-17.09	-	QP
4	0.3420	20.48	10.75	31.23	49.15	-17.92	-	AVG
5	1.8100	26.62	10.78	37.40	56.00	-18.60	-	QP
6	1.8100	22.02	10.78	32.80	46.00	-13.20	-	AVG
7	4.8460	34.77	10.88	45.65	56.00	-10.35	-	QP
8	4.8460	31.06	10.88	41.94	46.00	-4.06	-	AVG
9	6.2060	35.40	10.93	46.33	50.00	-3.67	-	AVG
10	6.2740	44.48	10.95	55.43	60.00	-4.57	-	QP
11	*	11.7660	35.55	11.25	46.80	50.00	-3.20	AVG
12		11.8300	43.85	11.25	55.10	60.00	-4.90	QP




Mode1 / Line: Neutral /CH: L/ 120V

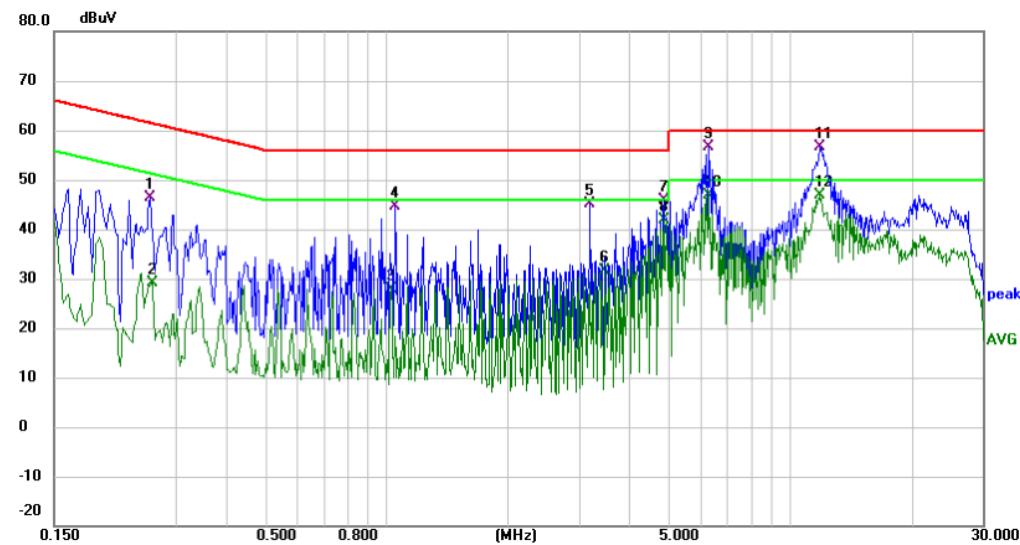

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2580	35.09	11.25	46.34	61.50	-15.16	QP	
2		0.2620	18.50	10.73	29.23	51.37	-22.14	AVG	
3		1.0300	17.10	10.74	27.84	46.00	-18.16	AVG	
4		1.0500	33.99	10.74	44.73	56.00	-11.27	QP	
5		3.1900	34.21	10.81	45.02	56.00	-10.98	QP	
6		3.4780	20.70	10.81	31.51	46.00	-14.49	AVG	
7		4.8500	35.07	10.86	45.93	56.00	-10.07	QP	
8		4.8500	30.97	10.86	41.83	46.00	-4.17	AVG	
9		6.2660	44.97	11.56	56.53	60.00	-3.47	QP	
10	*	6.2660	35.38	11.56	46.94	50.00	-3.06	AVG	
11		11.8180	45.27	11.24	56.51	60.00	-3.49	QP	
12		11.8180	35.67	11.24	46.91	50.00	-3.09	AVG	




Mode1 / Line / CH: L/ 220V

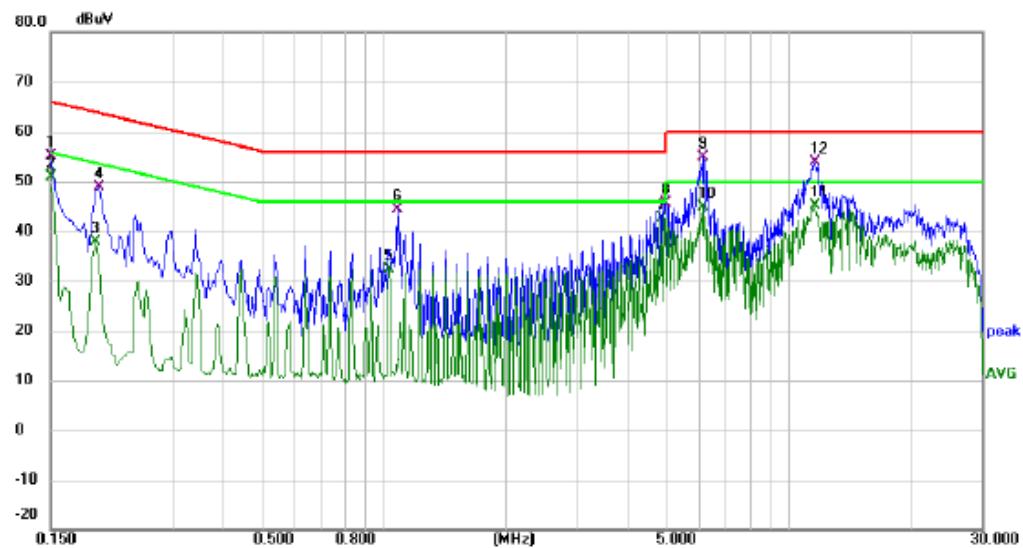

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment	dBuV	dB	
		MHz	dBuV	dB	dBuV	dB	Detector	
1	1	0.1500	44.10	11.07	55.17	66.00	-10.83	QP
2	2	0.1500	39.71	11.07	50.78	56.00	-5.22	AVG
3	3	0.1940	26.75	11.14	37.89	53.86	-15.97	AVG
4	4	0.1980	37.84	11.16	49.00	63.69	-14.69	QP
5	5	1.0300	21.69	10.76	32.45	46.00	-13.55	AVG
6	6	1.0820	33.64	10.76	44.40	56.00	-11.60	QP
7	*	4.8580	31.77	10.88	42.65	46.00	-3.35	AVG
8	8	4.9540	34.71	10.88	45.59	56.00	-10.41	QP
9	9	6.1340	43.84	10.93	54.77	60.00	-5.23	QP
10	10	6.1340	33.90	10.93	44.83	50.00	-5.17	AVG
11	11	11.5260	33.78	11.24	45.02	50.00	-4.98	AVG
12	12	11.5780	42.74	11.24	53.98	60.00	-6.02	QP



Mode1 / Line: Neutral /CH: L/ 220V

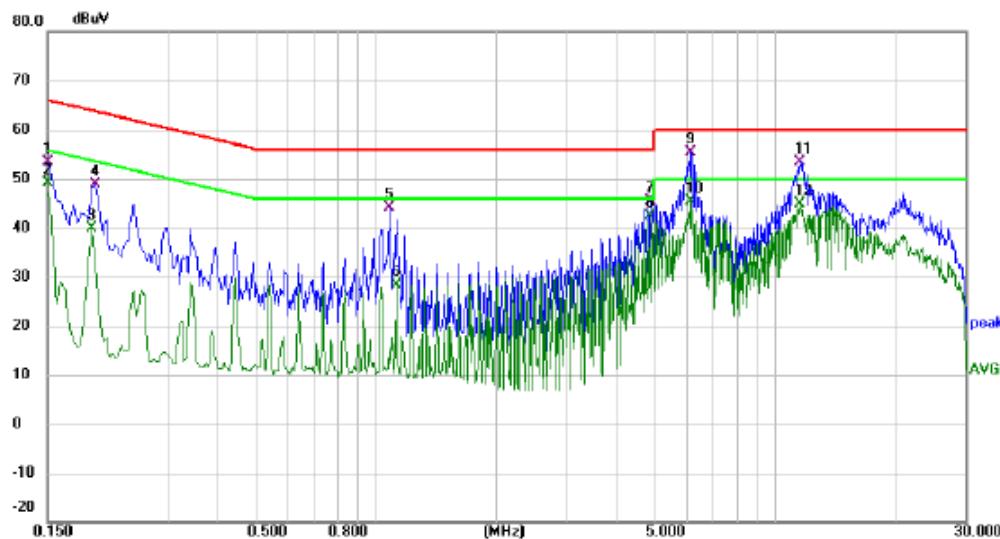

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dBuV	dB		
1	0.1500	42.38	11.04	53.42	66.00	-12.58	QP	
2	0.1500	37.98	11.04	49.02	56.00	-6.98	AVG	
3	0.1940	28.64	11.12	39.76	53.86	-14.10	AVG	
4	0.1980	37.81	11.14	48.95	63.69	-14.74	QP	
5	1.0859	33.38	10.74	44.12	56.00	-11.88	QP	
6	1.1300	17.67	10.74	28.41	46.00	-17.59	AVG	
7	4.8580	34.52	10.86	45.38	56.00	-10.62	QP	
8 *	4.8580	31.60	10.86	42.46	46.00	-3.54	AVG	
9	6.1340	43.91	11.48	55.39	60.00	-4.61	QP	
10	6.1340	33.84	11.48	45.32	50.00	-4.68	AVG	
11	11.5219	42.27	11.23	53.50	60.00	-6.50	QP	
12	11.5219	33.72	11.23	44.95	50.00	-5.05	AVG	

6.2 Occupied Bandwidth


Test Requirement:	47 CFR 15.215(c)
Test Limit:	Refer to 47 CFR 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	ANSI C63.10-2013, section 6.9.2
Procedure:	<p>a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Steps a) through c) might require iteration to adjust within the specified tolerances.</p> <p>e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.</p> <p>f) Set detection mode to peak and trace mode to max hold.</p> <p>g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p> <p>h) Determine the “-xx dB down amplitude” using [(reference value) – xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument.</p> <p>i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).</p> <p>j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.</p> <p>k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).</p>



6.2.1 E.U.T. Operation:

Operating Environment:			
Temperature:	22.4 °C	Humidity:	34.8 %
Pre test mode:	Mode1		Atmospheric Pressure: 99 kPa
Final test mode:	Mode1		


6.2.2 Test Setup Diagram:

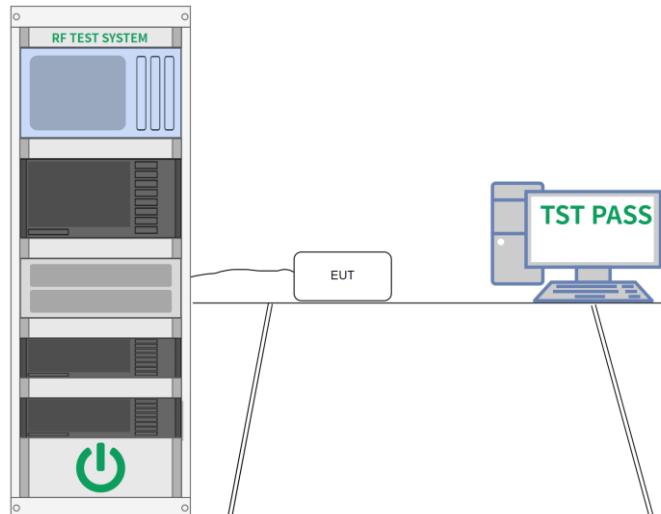

6.2.3 Test Data:


Frequency (MHz)	20dB bandwidth (MHz)
2402	1.163
2434	1.056
2462	1.059

Test plots

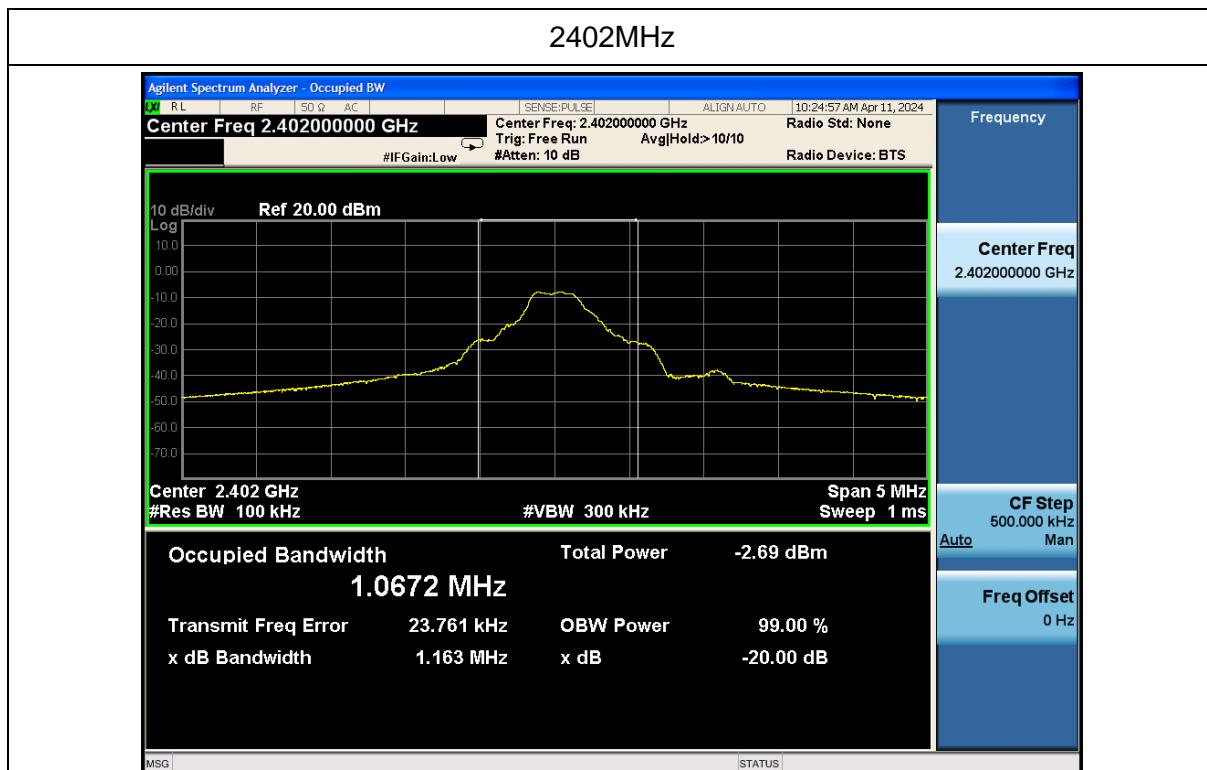




2434MHz

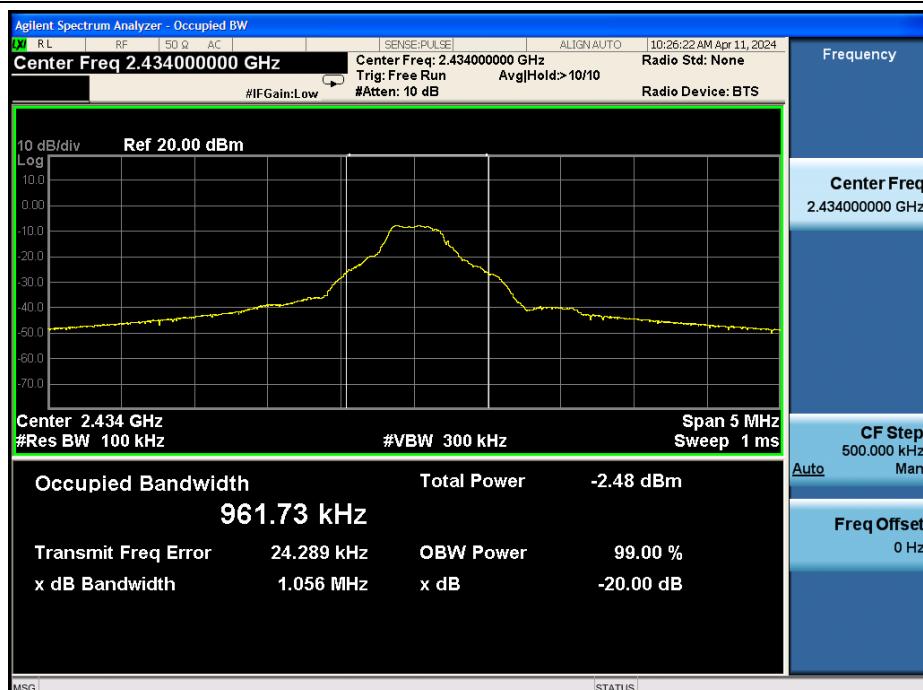

2462MHz

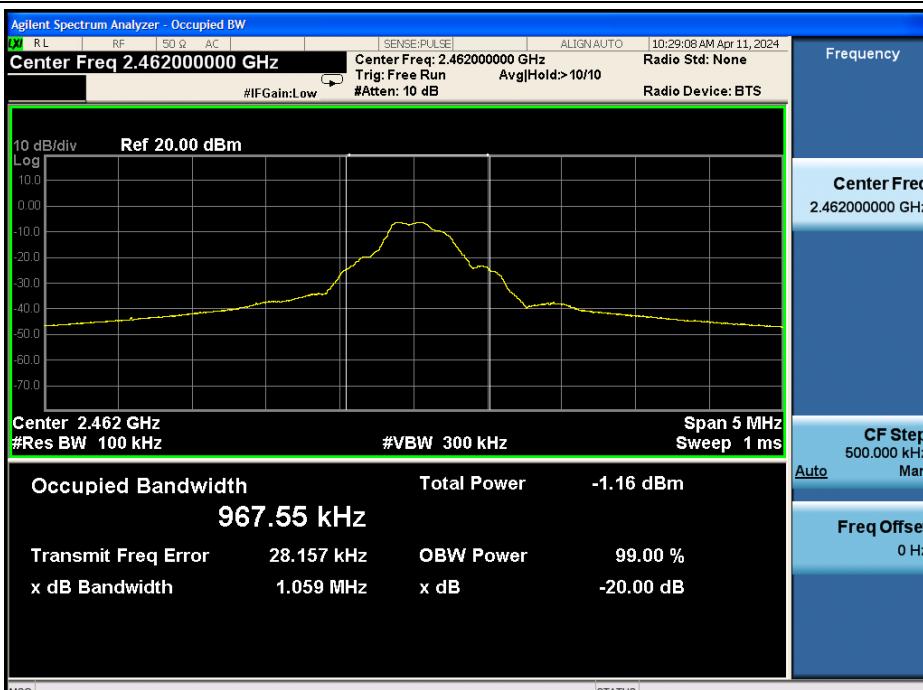




6.3 Field strength of fundamental

	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
Test Requirement:	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
	5725-5875 MHz	50	500
	24.0-24.25 GHz	250	2500
	The field strength of emissions in this band shall not exceed 2500 millivolts/meter.		
Test Method:	ANSI C63.10-2013 section 6.6		
Procedure:	ANSI C63.10-2013 section 6.6		

6.3.1 E.U.T. Operation:

Operating Environment:			
Temperature:	15.5 °C	Humidity:	47.3 %
Pre test mode:	Mode1		
Final test mode:	Mode1		

6.3.2 Test Setup Diagram:

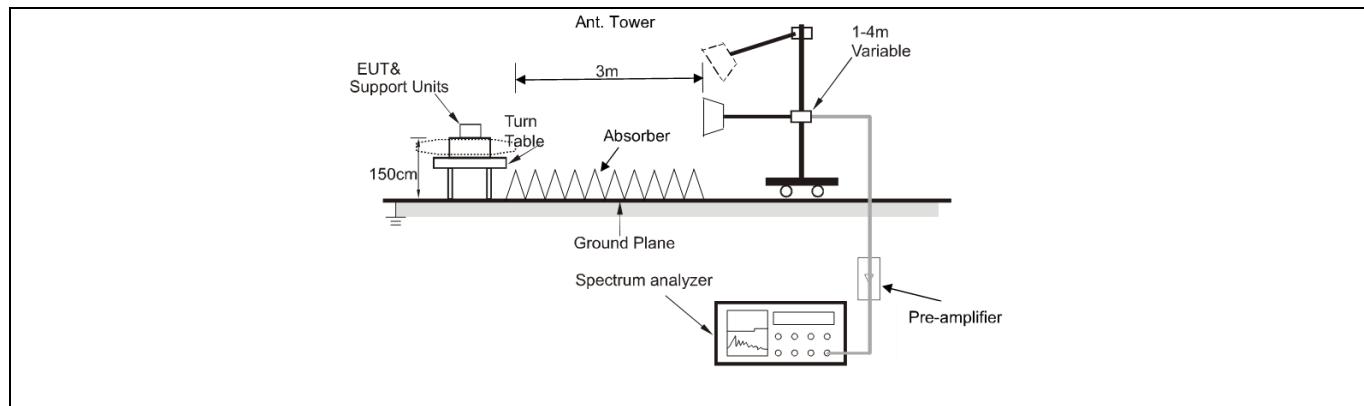

6.3.3 Test Data:

Frequency (MHz)	Ant. Polarization	Emission level dB μ V/m	Limits dB μ V/m	Detector	Result
2402	H	85.08	114		PK
2402	H	84.03	94	AV	PASS
2402	V	75.63	114	PK	PASS
2402	V	74.54	94	AV	PASS

Frequency (MHz)	Ant. Polarization	Emission level dB μ V/m	Limits dB μ V/m	Detector	Result
2434	H	86.92	114		PK
2434	H	85.97	94	AV	PASS
2434	V	75.00	114	PK	PASS
2434	V	73.97	94	AV	PASS

Frequency (MHz)	Ant. Polarization	Emission level dB μ V/m	Limits dB μ V/m	Detector	Result
2462	H	84.85	114		PK
2462	H	83.66	94	AV	PASS
2462	V	74.64	114	PK	PASS
2462	V	71.57	94	AV	PASS




6.4 Band edge emissions (Radiated)

Test Requirement:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.		
Test Limit:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.		
		Frequency (MHz)	Field strength (microvolts/meter)
		0.009-0.490	2400/F(kHz)
		0.490-1.705	24000/F(kHz)
		1.705-30.0	30
		30-88	100 **
		88-216	150 **
		216-960	200 **
		Above 960	500
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>			
Test Method:	ANSI C63.10-2013 section 6.6.4		
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.4.1 E.U.T. Operation:

Operating Environment:			
Temperature:	22.4 °C	Humidity:	34.8 %
Pre test mode:	Mode1		
Final test mode:	Mode1		

6.4.2 Test Setup Diagram:

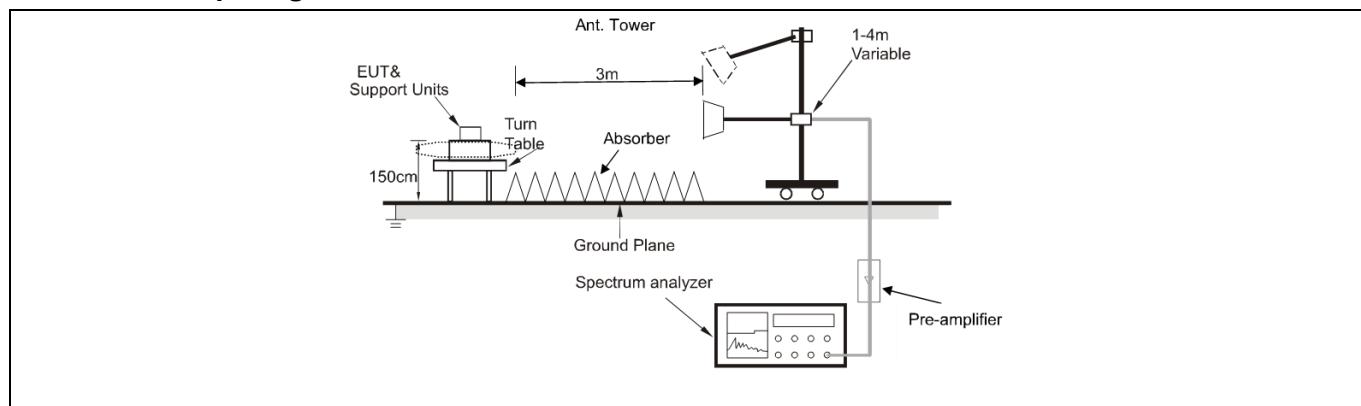



6.4.3 Test Data:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.20	-12.92	39.28	74.00	-34.72	peak
2		2310.000	42.01	-12.92	29.09	54.00	-24.91	AVG
3		2390.000	64.79	-12.49	52.30	74.00	-21.70	peak
4		2390.000	42.60	-12.49	30.11	54.00	-23.89	AVG
5	*	2400.000	81.46	-12.44	69.02	74.00	-4.98	peak
6		2400.000	53.66	-12.44	41.22	54.00	-12.78	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.36	-12.92	39.44	74.00	-34.56	peak
2		2310.000	41.97	-12.92	29.05	54.00	-24.95	AVG
3		2390.000	54.16	-12.49	41.67	74.00	-32.33	peak
4		2390.000	41.74	-12.49	29.25	54.00	-24.75	AVG
5	*	2400.000	71.38	-12.44	58.94	74.00	-15.06	peak
6		2400.000	45.13	-12.44	32.69	54.00	-21.31	AVG



Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	53.70	-12.50	41.20	74.00	-32.80	peak
2	*	2483.500	42.49	-12.50	29.99	54.00	-24.01	AVG
3		2500.000	52.44	-12.41	40.03	74.00	-33.97	peak
4		2500.000	42.21	-12.41	29.80	54.00	-24.20	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	52.58	-12.50	40.08	74.00	-33.92	peak
2	*	2483.500	42.37	-12.50	29.87	54.00	-24.13	AVG
3		2500.000	52.33	-12.41	39.92	74.00	-34.08	peak
4		2500.000	42.22	-12.41	29.81	54.00	-24.19	AVG



6.5 Emissions in frequency bands (below 1GHz)

Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)		
Test Limit:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
		Field strength of fundamental frequency (millivolts/meter)	Field strength of harmonics (microvolts/meter)
		902-928 MHz	50
		2400-2483.5 MHz	50
		5725-5875 MHz	50
		24.0-24.25 GHz	2500
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.			
		Frequency (MHz)	Field strength (microvolts/meter)
		0.009-0.490	2400/F(kHz)
		0.490-1.705	24000/F(kHz)
		1.705-30.0	30
		30-88	100 **
		88-216	150 **
		216-960	200 **
		Above 960	500
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.			
Test Method:	ANSI C63.10-2013 section 6.5		
Procedure:	ANSI C63.10-2013 section 6.5		


6.5.1 E.U.T. Operation:

Operating Environment:



Temperature:	22.4 °C	Humidity:	34.8 %	Atmospheric Pressure:	99 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				


6.5.2 Test Setup Diagram:

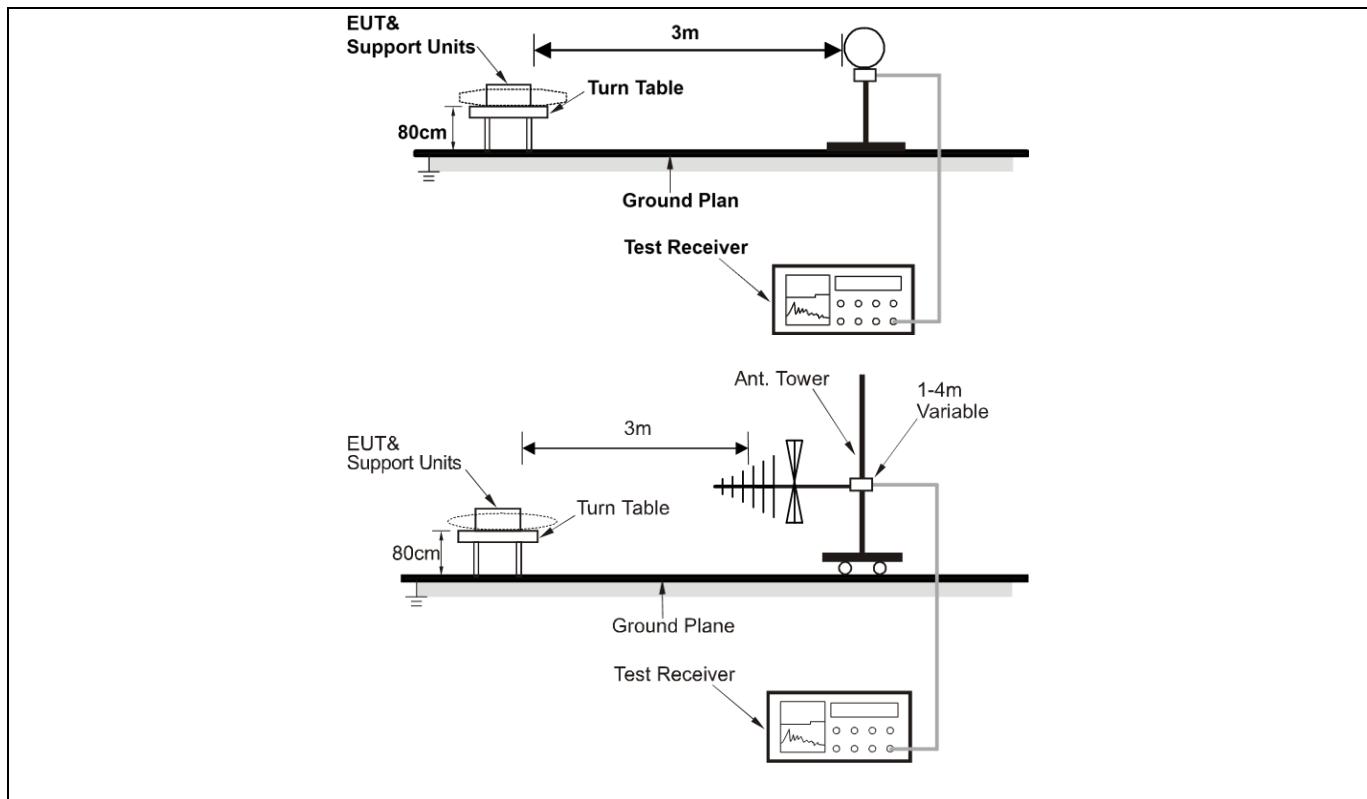



6.5.3 Test Data:


Mode1 / Polarization: Horizontal / CH: L

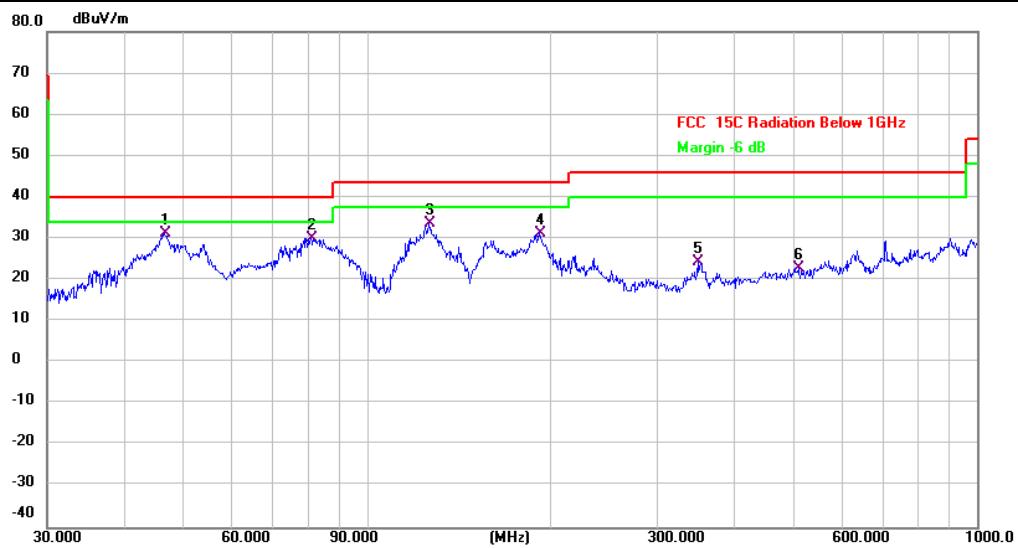

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	46.6664	38.60	-7.35	31.25	40.00	-8.75	QP	
2		80.9275	42.80	-12.73	30.07	40.00	-9.93	QP	
3		126.3286	45.45	-11.89	33.56	43.50	-9.94	QP	
4		192.4186	41.09	-9.80	31.29	43.50	-12.21	QP	
5		349.2500	28.82	-4.61	24.21	46.00	-21.79	QP	
6		510.0436	26.26	-3.32	22.94	46.00	-23.06	QP	



Mode1 / Polarization: Vertical / CH: L

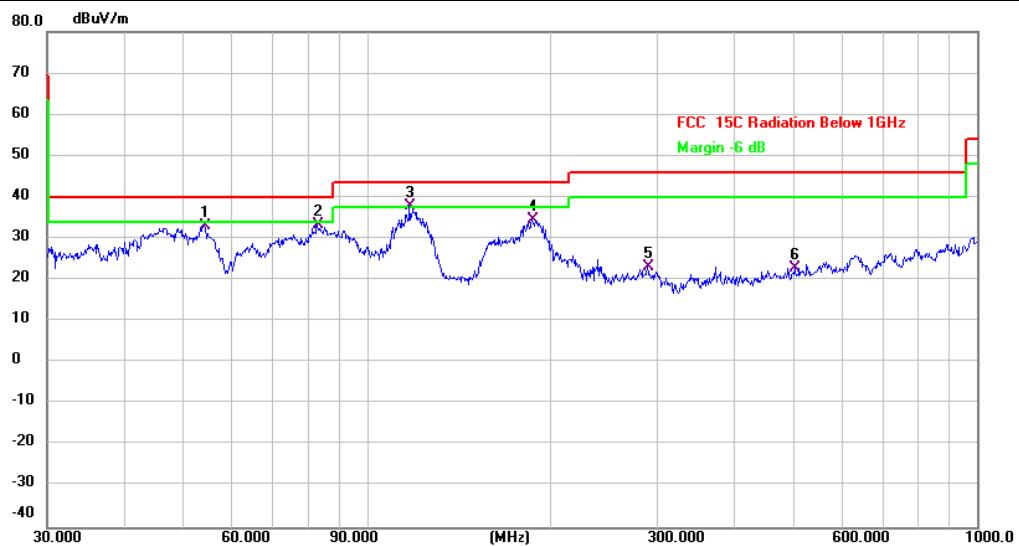

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		54.2610	40.91	-7.76	33.15	40.00	-6.85	QP	
2		82.9385	45.75	-12.40	33.35	40.00	-6.65	QP	
3	*	117.3603	46.31	-8.36	37.95	43.50	-5.55	QP	
4		187.0958	44.62	-10.13	34.49	43.50	-9.01	QP	
5		289.0021	28.50	-5.40	23.10	46.00	-22.90	QP	
6		502.9395	26.36	-3.46	22.90	46.00	-23.10	QP	



6.6 Emissions in frequency bands (above 1GHz)

Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)		
Test Limit:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
		Field strength of fundamental frequency (millivolts/meter)	Field strength of harmonics (microvolts/meter)
		902-928 MHz	50
		2400-2483.5 MHz	50
		5725-5875 MHz	50
		24.0-24.25 GHz	2500
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.			
		Frequency (MHz)	Field strength (microvolts/meter)
		0.009-0.490	2400/F(kHz)
		0.490-1.705	24000/F(kHz)
		1.705-30.0	30
		30-88	100 **
		88-216	150 **
		216-960	200 **
		Above 960	500
Measurement distance (meters)			
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.			
Test Method:	ANSI C63.10-2013 section 6.6		
Procedure:	ANSI C63.10-2013 section 6.6		


6.6.1 E.U.T. Operation:

Operating Environment:			
Temperature:	22.4 °C	Humidity:	34.8 %



Pre test mode:	Mode1
Final test mode:	Mode1

6.6.2 Test Setup Diagram:

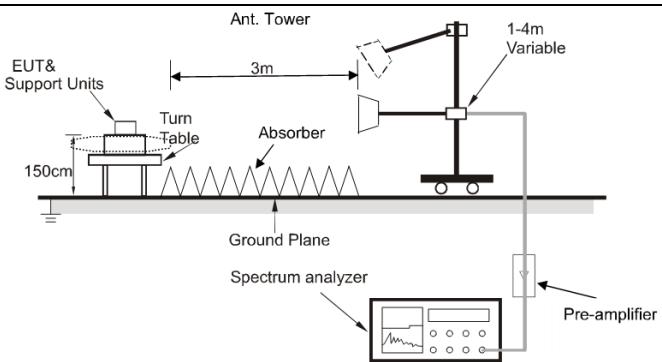



6.6.3 Test Data:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1		4804.000	55.67	-7.70	47.97	74.00	-26.03	peak
2		4804.000	49.06	-7.70	41.36	54.00	-12.64	AVG
3		7206.000	47.03	0.84	47.87	74.00	-26.13	peak
4		7206.000	40.81	0.84	41.65	54.00	-12.35	AVG
5		9608.000	48.20	1.81	50.01	74.00	-23.99	peak
6	*	9608.000	42.40	1.81	44.21	54.00	-9.79	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1		4804.000	54.79	-7.70	47.09	74.00	-26.91	peak
2		4804.000	48.82	-7.70	41.12	54.00	-12.88	AVG
3		7206.000	48.54	0.84	49.38	74.00	-24.62	peak
4		7206.000	42.41	0.84	43.25	54.00	-10.75	AVG
5		9608.000	47.53	1.81	49.34	74.00	-24.66	peak
6	*	9608.000	41.45	1.81	43.26	54.00	-10.74	AVG



Mode1 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4868.000	63.63	-7.83	55.80	74.00	-18.20	peak
2	*	4868.000	57.19	-7.83	49.36	54.00	-4.64	AVG
3		7302.000	46.74	0.47	47.21	74.00	-26.79	peak
4		7302.000	40.85	0.47	41.32	54.00	-12.68	AVG
5		9736.000	46.68	2.37	49.05	74.00	-24.95	peak
6		9736.000	40.86	2.37	43.23	54.00	-10.77	AVG

Mode1 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4867.000	50.19	-7.83	42.36	54.00	-11.64	AVG
2		4868.000	56.50	-7.83	48.67	74.00	-25.33	peak
3		7302.000	46.89	0.47	47.36	74.00	-26.64	peak
4		7302.000	40.88	0.47	41.35	54.00	-12.65	AVG
5		9736.000	50.14	2.37	52.51	74.00	-21.49	peak
6	*	9736.000	43.78	2.37	46.15	54.00	-7.85	AVG



Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	56.51	-7.83	48.68	74.00	-25.32	peak
2		4924.000	50.19	-7.83	42.36	54.00	-11.64	AVG
3		7386.000	46.33	0.86	47.19	74.00	-26.81	peak
4		7386.000	40.39	0.86	41.25	54.00	-12.75	AVG
5		9848.000	46.97	2.14	49.11	74.00	-24.89	peak
6	*	9848.000	41.48	2.14	43.62	54.00	-10.38	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	51.32	-7.83	43.49	74.00	-30.51	peak
2		4924.000	45.28	-7.83	37.45	54.00	-16.55	AVG
3		7386.000	46.84	0.86	47.70	74.00	-26.30	peak
4		7386.000	40.52	0.86	41.38	54.00	-12.62	AVG
5		9848.000	47.57	2.14	49.71	74.00	-24.29	peak
6	*	9848.000	41.12	2.14	43.26	54.00	-10.74	AVG

Photographs of the test setup

Refer to Appendix - Test Setup Photos

Photographs of the EUT

Refer to Appendix - EUT Photos

----End of Report----