
FCC Test Report

Report No: WD-RF-R-240108-B0

Product Name : Daylight

Model Name : DC1

FCC ID : 2BFTUDC1

Applicant : Daylight Computer Co.

Received Date : Mar. 20, 2024

Tested Date : Apr. 15, 2024 ~ Jun. 28, 2024

Applicable Standard : 47 CFR FCC Part 15, Subpart C (Section 15.247)
KDB 558074 D01 DTS Meas. Guidance v05
ANSI C63.10 : 2013



Wendell Industrial Co., Ltd

Wendell EMC & RF Laboratory

Caution:

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

This report must not be used to claim product endorsement by TAF or any agency of the government.
The test report shall not be reproduced without the written approval of Wendell Industrial Co., Ltd..

Test Report

Issued Date: June 28, 2024

Project No.: 24Q031903

Product Name	Daylight
Trade Name	Daylight Computer Co.
Model Name	DC1
FCC ID	2BFTUDC1
Applicant	Daylight Computer Co.
Manufacturer	Daylight Computer Co.
EUT Rated Voltage	5Vdc/3A or 9Vdc/3A or 12Vdc/2.5A
EUT Test Voltage	AC 120V / 60Hz
EUT Supports Radios Application	WLAN 802.11a/b/g WLAN 802.11n (HT20/HT40) WLAN 802.11ac(VHT20/40/80/160) and ax(HE20/40/80/160) Bluetooth BR/EDR/LE
Applicable Standard	47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 DTS Meas. Guidance v05 ANSI C63.10 : 2013
Output Power	-0.86 dBm
Test Result	Complied

Documented :


(Specialist / Emma Lu)

Technical Engineer :


(Section Manager / Jack Chang)

Approved :


(Project Manager / Gary Wu)

Table of Contents

Document Revision History	5
Summary of Test Result	6
1 Generation Information	7
1.1 Applicant	7
1.2 Manufacturer	7
1.3 Description of Equipment under Test	7
1.4 Test Mode Applicability And Tested Channel Detail	10
1.5 Configuration of Tested System	12
1.6 EUT Exercise Software	12
1.7 Tested System Details	13
1.8 Test Facility	14
1.9 Measurement Uncertainty	15
1.10 List of Test Equipment	16
2 Test Result	20
2.1 Antenna Requirement	20
2.1.1 Applicable Standard	20
2.1.2 Antenna Connected Construction	20
2.1.3 Antenna Gain	20
2.2 Peak Output Power Measurement	21
2.2.1 Limit	21
2.2.2 Test Setup	21
2.2.3 Test Procedure	21
2.2.4 Test Result	22
2.3 6dB Bandwidth Measurement	23
2.3.1 Limit	23
2.3.2 Test Setup	23
2.3.3 Test Procedure	23
2.3.4 Test Result	24
2.4 Power Spectral Density Measurement	26
2.4.1 Limit	26
2.4.2 Test Setup	26
2.4.3 Test Procedure	26
2.4.4 Test Result	27
2.5 Conducted Band Edges and Spurious Emission Measurement	29
2.5.1 Limit	29
2.5.2 Test Setup	29
2.5.3 Test Procedure	29
2.5.4 Test Result	30
2.6 Radiated Band Edges and Spurious Emission Measurement	36
2.6.1 Limit	36
2.6.2 Test Setup	37
2.6.3 Test Procedure	38
2.6.4 Duty Cycle	40
2.6.5 Test Result of Radiated Band Edge Measurement	40
2.6.6 Test Result of Radiated Spurious Emission Measurement	49
2.7 AC Conducted Emissions Measurement	64
2.7.1 Limit	64

2.7.2	Test Setup.....	64
2.7.3	Test Procedure.....	65
2.7.4	Test Result	66

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

Document Revision History

Report No.	Issue date	Description
WD-RF-R-240108-B0	June 28, 2024	Initial report

Summary of Test Result

Ref. Std. Clause	Test Items	Result
15.203 15.247(C)	Antenna Requirement	Pass
15.247(b)	Peak Output Power	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(e)	Power Spectral Density	Pass
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	Pass
15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass
15.207	AC Conducted Emission	Pass

1 Generation Information

1.1 Applicant

Daylight Computer Co.
4431 Caren St., Fremont, CA 94538 USA

1.2 Manufacturer

Daylight Computer Co.
4431 Caren St., Fremont, CA 94538 USA

1.3 Description of Equipment under Test

Product Name	Daylight
Model No.	DC1
FCC ID	2BFTUDC1
Frequency Range	2402 ~ 2480 MHz
Number of Channels	40CH
Channel separation	2 MHz
Type of Modulation	GFSK(1、2 Mbps、500 kbps(S=2)、125kbps(S=8))
Antenna Information	Refer to the table “Antenna List”
EUT Supports Radios Application	WLAN 802.11a/b/g WLAN 802.11n (HT20/HT40) WLAN 802.11ac(VHT20/40/80/160) and ax(HE20/40/80/160) Bluetooth BR/EDR/LE
EUT Rated Voltage	5Vdc/3A or 9Vdc/3A or 12Vdc/2.5A
EUT Test Voltage	AC 120V / 60Hz

Antenna List

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	InnoComm Mobile Technology Corp.	Jagar	PIFA Antenna	2.6 dBi for 2.4GHz

Remark: The antenna of EUT is conforming to FCC 15.203

Channel List

Channel	Frequency (MHz)						
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

Test Frequencies in each operating band

Frequency range over which the device operates in each operating band (Note 1)	Number of test frequencies required	Location of test frequencies inside the operating frequency range (Note 1,2)
≤ 1 MHz	1	near center
> 1 MHz and ≤ 10 MHz	2	1 near high end, 1 near low end
> 10 MHz	3	1 near high end, 1 near center, and 1 near low end

Note 1: The frequency range over which the device operates in a given operating band is the difference between the highest and lowest frequencies on which the device can be tuned within that given operating band. The frequency range can be smaller than or equal to the operating band, but cannot be greater than the operating band.

Note 2: In the third column of table 1, “near” means as close as possible to or at the center / low end / high end of the frequency range over which the device operates.

Firmware / Software Version

1	Product Name	Daylight
2	Model No.	DC1
3	Test SW Version	CMD Ver 10.0.22631.3447
4	RF power setting in TEST SW	<input checked="" type="checkbox"/> RF power setting was not able to alter during testing. <input type="checkbox"/> RF power setting was able to alter during testing. (See the following table)

Parameters of test software setting

Type of Modulation	Channel	Frequency (MHz)	Set Value
GFSK(1Mbps)	00	2402	DEF
	19	2440	DEF
	39	2480	DEF
GFSK(2Mbps)	00	2402	DEF
	19	2440	DEF
	39	2480	DEF
GFSK(500kbps, S=2)	00	2402	DEF
	19	2440	DEF
	39	2480	DEF
GFSK(125kbps, S=8)	00	2402	DEF
	19	2440	DEF
	39	2480	DEF

1.4 Test Mode Applicability And Tested Channel Detail

1. This device is a Daylight with a built-in Wi-Fi and Bluetooth transceiver.
2. These tests were performed on a sample of equipment to demonstrate compliance with 47 CFR FCC Part 15, Subpart C (Section 15.247).
3. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.
4. The EUT has been pre-tested under the following : Battery Mode, USB Mode_ Cable1, USB Mode_ Cable2. USB Mode_ Cable1 was the worst case for final test. After laboratory evaluation, the worst mode must be found by pre-test results of radiation 30M-1GHz and AC power conduction.
5. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is recorded in the report:

EUT Configure Mode	RE < 1G	RE ≥ 1G	ACM	ACP	Description
--	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Transmit BLE
--	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Normal Link

Note : RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

ACM: Antenna Port Conducted Measurement

ACP: AC Power Line Conducted Emission

Following channel(s) was (were) selected for the final test as listed below:

Radiated Spurious Emission Measurement(Below 1GHz):

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	19	GFSK	1

Radiated Spurious Emission Measurement(Above 1GHz):

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	0, 19, 39	GFSK	1

Radiated Band Edge Emission Measurement(Above 1GHz):

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	0, 39	GFSK	1

Peak Output Power, 6dB Bandwidth, Power Spectral Density, Conducted Spurious Emission:

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	0, 19, 39	GFSK	1

Conducted Band Edges:


EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	0, 39	GFSK	1

AC Conducted Emission:


EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	19	GFSK	1

1.5 Configuration of Tested System

Radiation

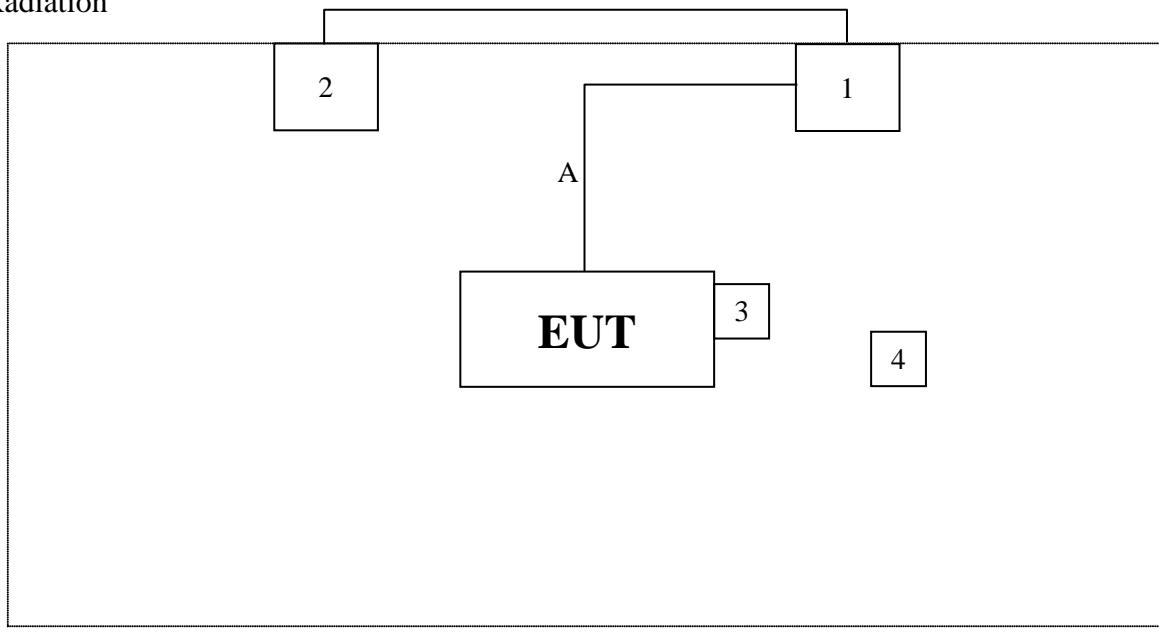

AC Conduction

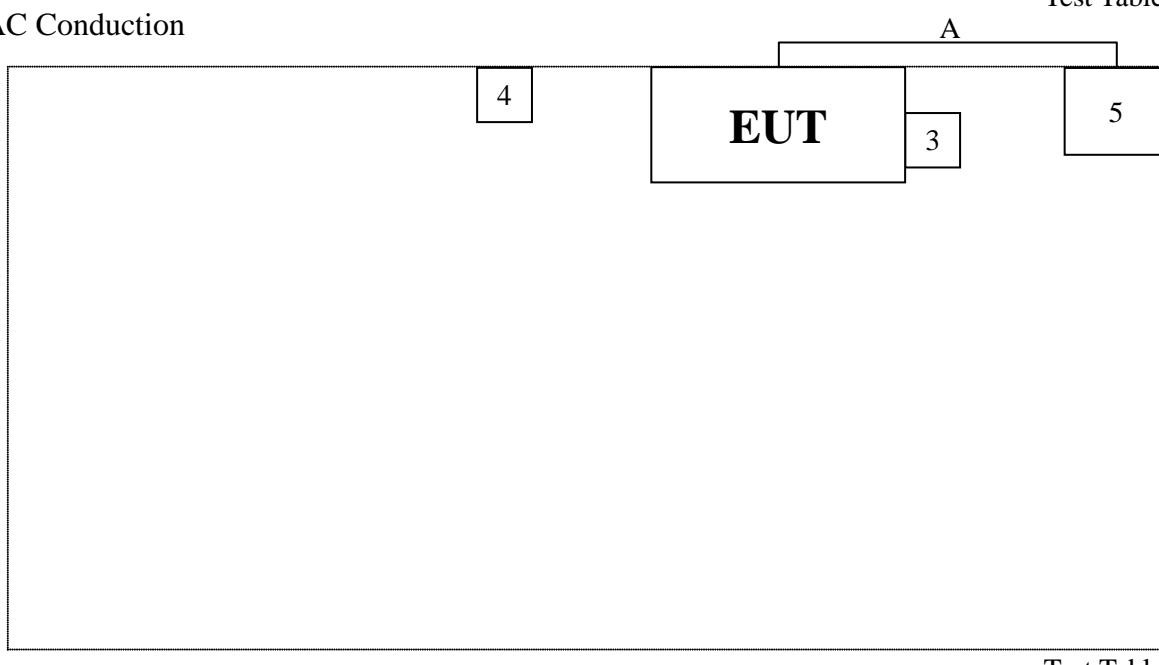

Test Table

1.6 EUT Exercise Software

1. Setup the EUT as shown in Section 1.5
2. Execute software “CMD Ver 10.0.22631.3447”.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous transmit.
5. Verify that the EUT works properly.

1.7 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Trademark	Model No.	Serial No.	Power Cord
1	Notebook PC	acer	N17W3	NXVJ7TA00302301D496600	N/A
2	Adapter	Acer	W15-045N4A	KP045H00694601969PH05	Non-shielded, 1 Core, 1.6m
3	SD Card& Micro SD Card	ADATA	MSC-2	N/A	N/A
4	STANDARD MR05 STYLUS PEN WHITE FOR TJG01	WACOM	CP-913E-01B-2	N/A	N/A
	FELT NIB PEN REFILLS BLACK FOR TJG01				
5	Adapter	amazonbasics	B087MFDTL4 CAN	N/A	N/A
A	USB Cable (USB Mode_Cable1)	Walta Electronic Co. Ltd	U10-W101-00001	N/A	Non-shielded, Non-Core, 1m
	USB Cable (USB Mode_Cable2)	N/A	N/A	N/A	Non-shielded, Non-Core, 1m

The EUT uses following adapter

Trade Name	amazonbasics
Model No.	B087MFDTL4
Input Power	AC 100-240V~, 50/60Hz, max. 1.5A
Output Power	DC 5V/3A, 9V/3A, 15V/3A, 20V/3A
Power Line	N/A

Accessories :

No.	Product	Trademark	Model No.	Power Cord
4	STANDARD MR05 STYLUS PEN WHITE FOR TJG01	WACOM	CP-913E-01B-2	N/A
	FELT NIB PEN REFILLS BLACK FOR TJG01			
A	USB Cable (USB Mode_Cable1)	Walta Electronic Co. Ltd	U10-W101-00001	Non-shielded, Non-Core, 1m

1.8 Test Facility

Items	Required (IEC 60068-1)
Temperature (°C)	15-35
Humidity (% RH)	25-75
Barometric pressure (mbar)	860-1060

Description: Accredited by TAF
Accredited Number: 2965

Issued by: Wendell Industrial Co., Ltd

Company Address: 6F/6F-1, No.188, Baoqiao Rd., Xindian Dist.,
New Taipei City 23145, Taiwan R.O.C

Test Lab: Wendell EMC & RF Laboratory

Lab Address: 5F-1, No.188, Baoqiao Rd., Xindian Dist.,
New Taipei City 23145, Taiwan R.O.C

Test Location: No. 119, Wugong 3rd Rd., Wugu Dist.,
New Taipei City 248, Taiwan (R.O.C.)

Designation Number: TW0025

Test Firm Registration Number: 665221

1.9 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence (level based on a coverage factor K=2)

Measurement Project	Condition	Expended Uncertainty
AC Conducted Emission	0.150 ~ 30 MHz	± 2.64 dB
Radiated Emission	0.009 ~ 30 MHz	± 3.7 dB
	30 ~ 1000 MHz	± 3.9 dB
	1000 ~ 18000 MHz	± 4.5 dB
	18000 ~ 40000 MHz	± 4.3 dB
RF Power, Conducted	Conducted Measuring	± 0.75 dB
Occupied Bandwidth	Conducted Measuring	± 2.4 %
Power Density	Conducted Measuring	± 1.2 dB
Duty Cycle and Dwell Time	Conducted Measuring	± 0.9 %
Conducted Unwanted Emission Strength	Conducted Measuring	± 1.4 dB
DC Power Supply	--	± 2.0 %
Temperature	--	± 0.55 °C
Humidity	--	± 3.1 %

Note: Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

1.10 List of Test Equipment

For Conducted measurements / W08-Conducted Measurement

Equipment		Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	Spectrum analyzer	Keysight	N9010A	SG50420005	2023/08/08	2024/08/07
✓	Wideband Peak Power Meter	Anritsu	ML2495A	1733007	2023/09/07	2024/09/06
✓	Pulse Power Sensor + Precision Adaptor	Anritsu	MA2411B	1726022	2023/09/07	2024/09/06
	Temperature Chamber	TAICHY	MHK-225LK	1061121	2024/04/19	2025/04/18
	Wireless Connectivity Tester	R&S	CMW270	101307	2023/05/29	2024/05/28
✓	Attenuator	MVE	MVE2211-10	CT-9-056	2022/08/10	2024/08/09
	Attenuator	MVE	MVE2211-20	CT-9-057	2022/08/10	2024/08/09
	Attenuator	MVE	MVE2211-30	CT-9-058	2022/08/10	2024/08/09
	Power Divider	MVE	MVE8546	170826003	2022/08/10	2024/08/09
	Power Splitter	MVE	MVE8547	170302047	2022/08/11	2024/08/10
	DC Power Supply	GW INSTEK	GPC-3060D	GER817636	2023/08/11	2024/08/10

Remark:

1. The equipments are calibrated every one year.
2. The Attenuator/ Divider/ Splitter are calibrated every two year.
3. The test instruments marked with “✓” are used to measure the final test results.

For AC Conduction measurements / W08-CE

Equipment		Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	EMI Test Receiver	R&S	ESR3	102309	2023/06/19	2024/06/18
✓	2-Line V-Network LISN	R&S	ENV216	101185	2023/06/16	2024/06/15
✓	LISN	SCHWARZBECK	NSLK 8127RC	05028	2023/06/16	2024/06/15
✓	Transient Limiter	EM Electronics Corporation	EM-7600	857	2023/06/17	2024/06/16
✓	50ohm Cable	EMCI	EMCCFD300-BM-BM-5000	170612	2023/06/17	2024/06/16
✓	50 ohm terminal impedance	HUBER+SUHNER	50 ohm terminal impedance	CT-1-109-1	2023/06/16	2024/06/15

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.EMC-CON 3A1

For Radiated measurements / W08-996-2

Equipment		Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	EMI Receiver	Keysight	N9038A	MY51210173	2023/08/18	2024/08/17
✓	Spectrum Analyzer	Keysight	N9010A	MY52220228	2023/08/18	2024/08/17
✓	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	00033	2024/05/02	2025/05/01
✓	TRILOG super broad Antenna	Schwarzbeck	VULB 9168	VULB 9168-700 & 20E03	2023/07/31	2024/07/30
✓	Horn Antenna	Schwarzbeck	BBHA 9120D	01767	2023/08/17	2024/08/16
✓	Horn Antenna	Schwarzbeck	BBHA 9170	703	2023/08/21	2024/08/20
✓	Pre-Amplifier	EM	EMC330	060774	2023/08/22	2024/08/21
✓	Pre-Amplifier	EMEC	EM01G18G	060648	2023/08/22	2024/08/21
✓	Pre-Amplifier	JPT	JPA0118-55-303K	1910001800055003	2023/08/22	2024/08/21
✓	Pre-Amplifier	EMCI	EMC184045SE	980515	2023/08/22	2024/08/21
✓	Cable	EMEC	EM-CB400	105060103	2023/08/22	2024/08/21
✓	Cable	EMEC	EM-CB400	105060102	2023/08/22	2024/08/21
✓	Cable	EMEC	EM-CB400	105060101	2023/08/22	2024/08/21
✓	RF Cable	HUBER+SUHNER	SF102	MY2752/2	2023/08/22	2024/08/21
✓	RF Cable	MVE	280280.LL266.1200	B60028C	2023/08/22	2024/08/21
✓	RF Cable	EMCI	EMC102-KM-KM-600	190646	2023/08/22	2024/08/21
✓	RF Cable	MVE	140140.LL404.700	B90014C	2023/08/22	2024/08/21
✓	RF Cable	MVE	140140.LL404.300	B90006C	2023/08/22	2024/08/21
✓	RF Filter	EMEC	BRF-2400-2500	002	2022/08/17	2024/08/16
	RF Filter	EMEC	BRF-5150-5350	104	2022/08/17	2024/08/16
	RF Filter	EMEC	BRF-5470-5725	092	2022/08/17	2024/08/16
	RF Filter	EMEC	BRF-5725-5875	091	2022/08/17	2024/08/16
✓	RF Filter	EMEC	HPF-2800	002	2022/08/17	2024/08/16
	RF Filter	EMEC	HPF-5850	059	2022/08/17	2024/08/16
	SMA Notch Filter	MVE	MFN-902.928.S1	190604001	2022/08/17	2024/08/16

Remark:

1. The equipments are calibrated every one year.
2. The Filter calibrated every two year.
3. The test instruments marked with “✓” are used to measure the final test results.
4. Test Software version: FARAD EZ-EMC Ver.WD-03A1-1

2 Test Result

2.1 Antenna Requirement

2.1.1 Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

An intentional radiator shall be designed to ensure that no antenna other than as furnished by the responsible party shall be used with the device. If transmitting antennas of directional gain greater than 6dBi are using the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi, for compliance to FCC 47CFR 15.247 (c) requirements.

2.1.2 Antenna Connected Construction

Non-standard antenna connector is used.

2.1.3 Antenna Gain


No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	InnoComm Mobile Technology Corp.	Jagar	PIFA Antenna	2.6 dBi for 2.4GHz

2.2 Peak Output Power Measurement

2.2.1 Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 1W. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

2.2.2 Test Setup



2.2.3 Test Procedure

1. Reference ANSI C63.10 : 2013 chapter 11.9.1.3
2. Enable the EUT transmit continuously.
3. Let EUT be connected to the power meter, and record the max. reading.
4. Measurement using a gated RF average power meter, since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

2.2.4 Test Result

Protocol	Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
1 Mbps	00	2402	-0.90	≤ 30	Pass
	19	2440	-0.92	≤ 30	Pass
	39	2480	-0.97	≤ 30	Pass
2 Mbps	00	2402	-1.04	≤ 30	Pass
	19	2440	-1.12	≤ 30	Pass
	39	2480	-1.13	≤ 30	Pass
500kbps,S=2	00	2402	-0.89	≤ 30	Pass
	19	2440	-0.90	≤ 30	Pass
	39	2480	-0.97	≤ 30	Pass
125kbps,S=8	00	2402	-0.86	≤ 30	Pass
	19	2440	-0.89	≤ 30	Pass
	39	2480	-0.92	≤ 30	Pass

Remark:

1. Peak Power = Reading value on power meter + cable loss
2. $10 \log(X/\text{mW}) = \text{dBm}$, $X=1$ watt (Limit)
1 watt = 30 dBm

2.3 6dB Bandwidth Measurement

2.3.1 Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Setup




2.3.3 Test Procedure


1. Reference ANSI C63.10 : 2013 chapter 11.8.2
2. Enable the EUT transmit continuously.
3. Spectrum analyzer set:
 - a) RBW = 100 kHz
 - b) VBW \geq 3 RBW
 - c) Detector = peak
 - d) Sweep time = auto couple
 - e) Trace mode = max hold.

2.3.4 Test Result

Protocol	Channel	Frequency (MHz)	6dB BW (kHz)	Limit (kHz)	Result
BLE 125kbps,S=8	00	2402	688.500	≥ 500	Pass
	19	2440	691.900		Pass
	39	2480	687.100		Pass

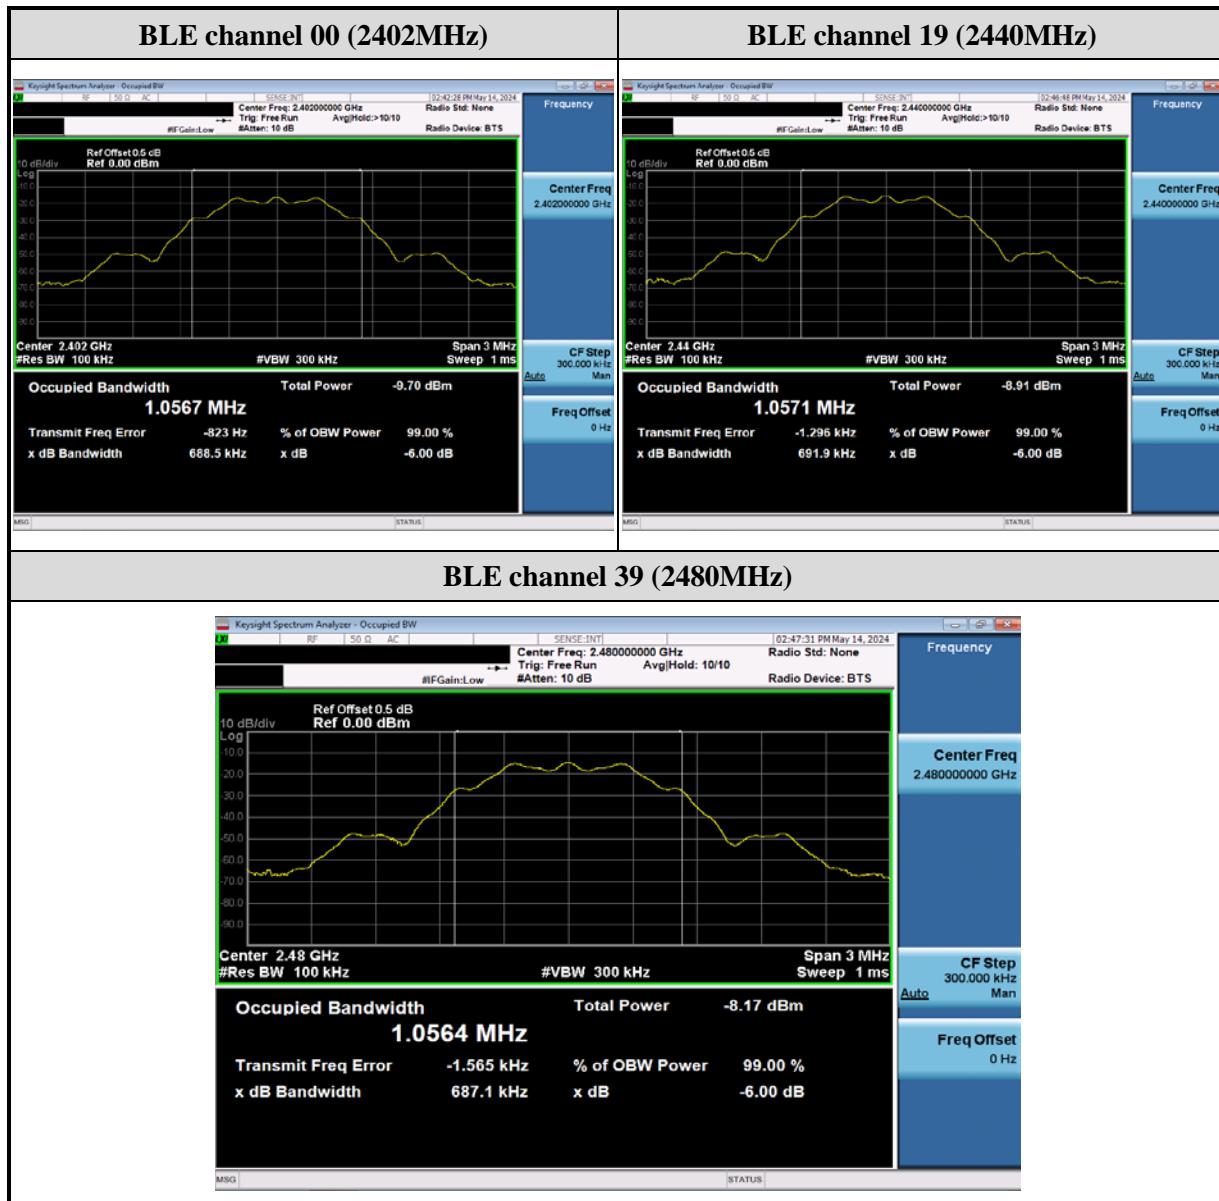

Protocol	Channel	Frequency (MHz)	6dB BW (kHz)	Limit (kHz)	Result
BLE 2Mbps	00	2402	1198.000	≥ 500	Pass
	19	2440	1237.000		Pass
	39	2480	1193.000		Pass

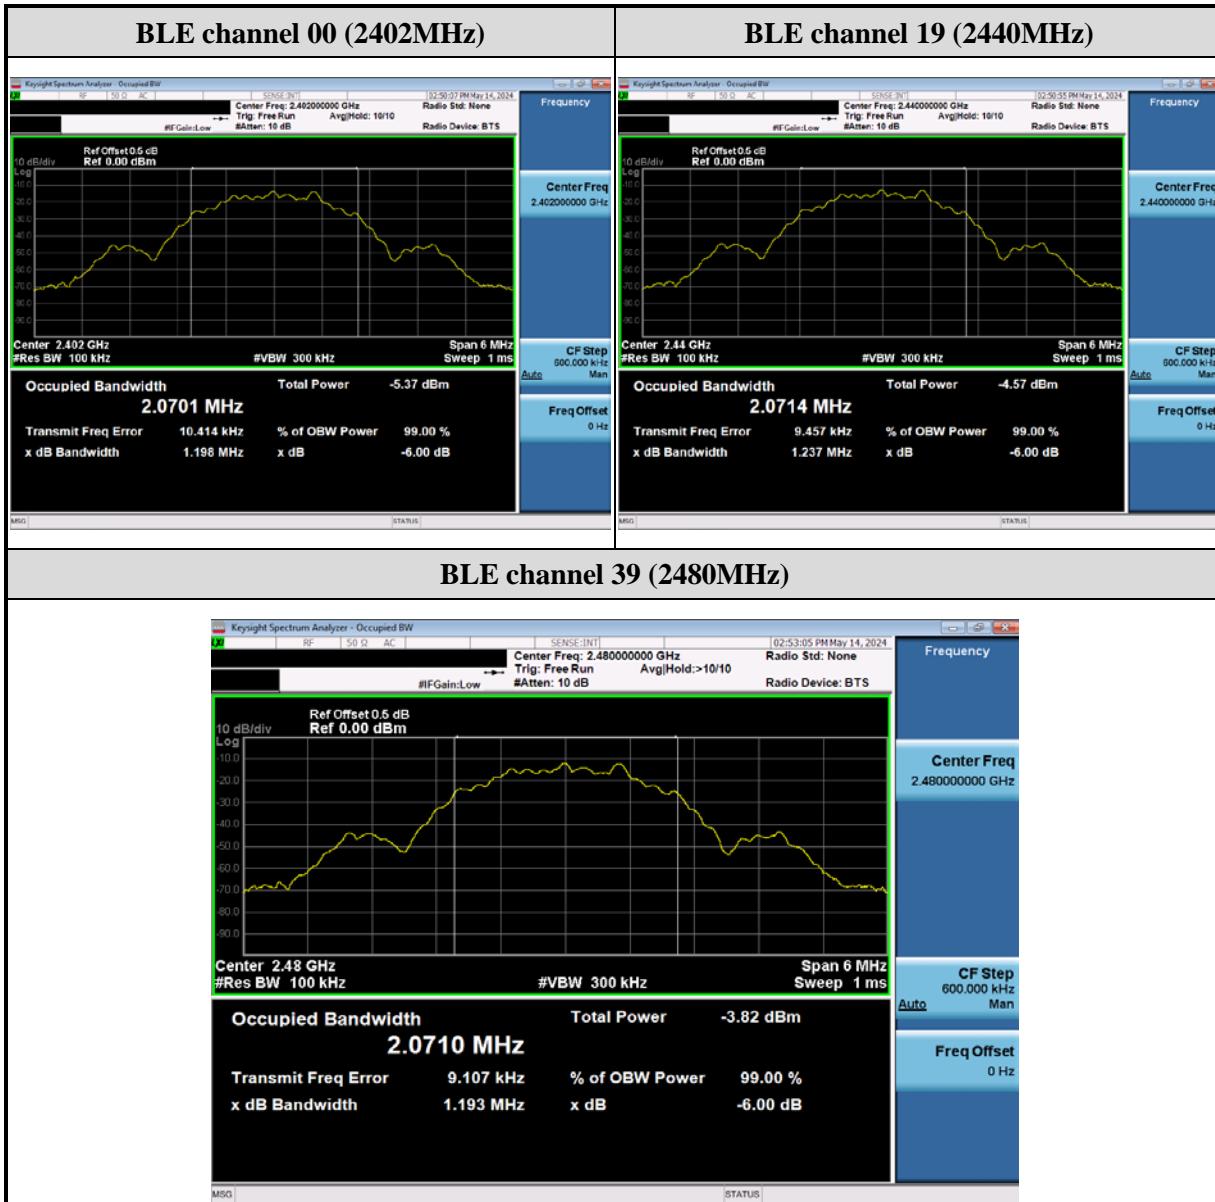


2.4 Power Spectral Density Measurement

2.4.1 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

2.4.2 Test Setup

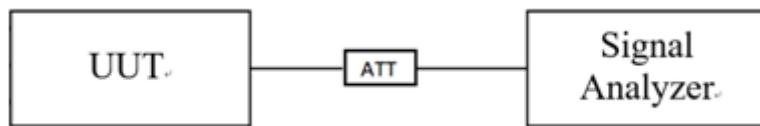

2.4.3 Test Procedure

1. Reference ANSI C63.10 : 2013 chapter 11.10.2
2. Enable the EUT transmit continuously.
3. Spectrum analyzer set:
 - a) RBW = 3 kHz ~ 100 kHz
 - b) VBW \geq 3 RBW
 - c) Span = 1.5 times DTS Channel 6dB Bandwidth
 - d) Detector = peak
 - e) Sweep time = auto couple
 - f) Trace mode = max hold.

2.4.4 Test Result


Protocol	Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Result
BLE 125kbps,S=8	00	2402	-18.909	≤ 8	Pass
	19	2440	-18.083		Pass
	39	2480	-17.257		Pass

Remark: PSD = Reading value on spectrum analyzer + cable loss



Protocol	Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Result
BLE 2Mbps	00	2402	-31.469	≤ 8	Pass
	19	2440	-30.568		Pass
	39	2480	-29.942		Pass

Remark: PSD = Reading value on spectrum analyzer + cable loss

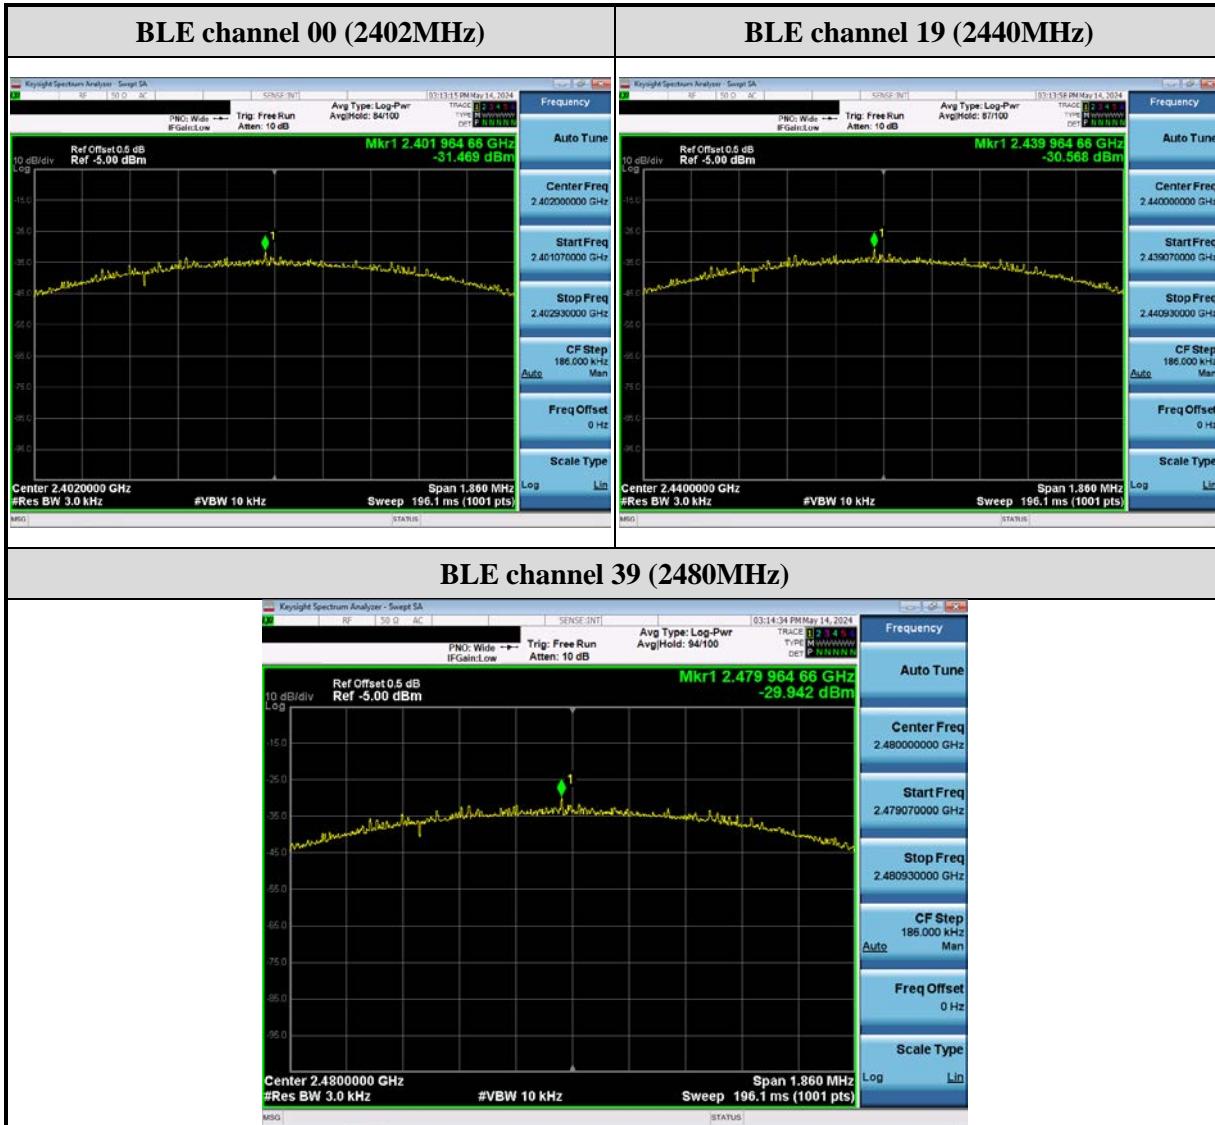

2.5 Conducted Band Edges and Spurious Emission Measurement

2.5.1 Limit

In any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in must also comply with the radiated emission limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB

2.5.2 Test Setup




2.5.3 Test Procedure

1. Reference ANSI C63.10 : 2013 chapter 6.10
2. Enable the EUT transmit continuously.
3. Spectrum analyzer set :
 - a) RBW = 100 kHz
 - b) VBW \geq 3 RBW
 - c) Detector = peak
 - d) Sweep time = auto couple
 - e) Trace mode = max hold.


2.5.4 Test Result



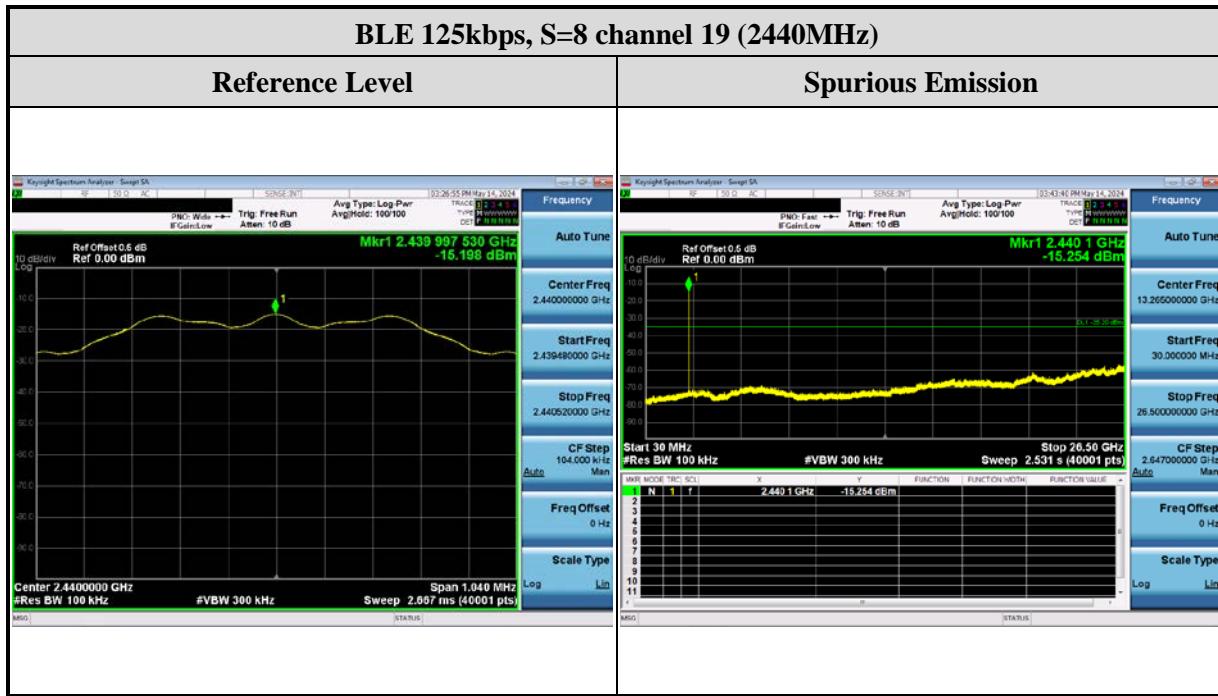





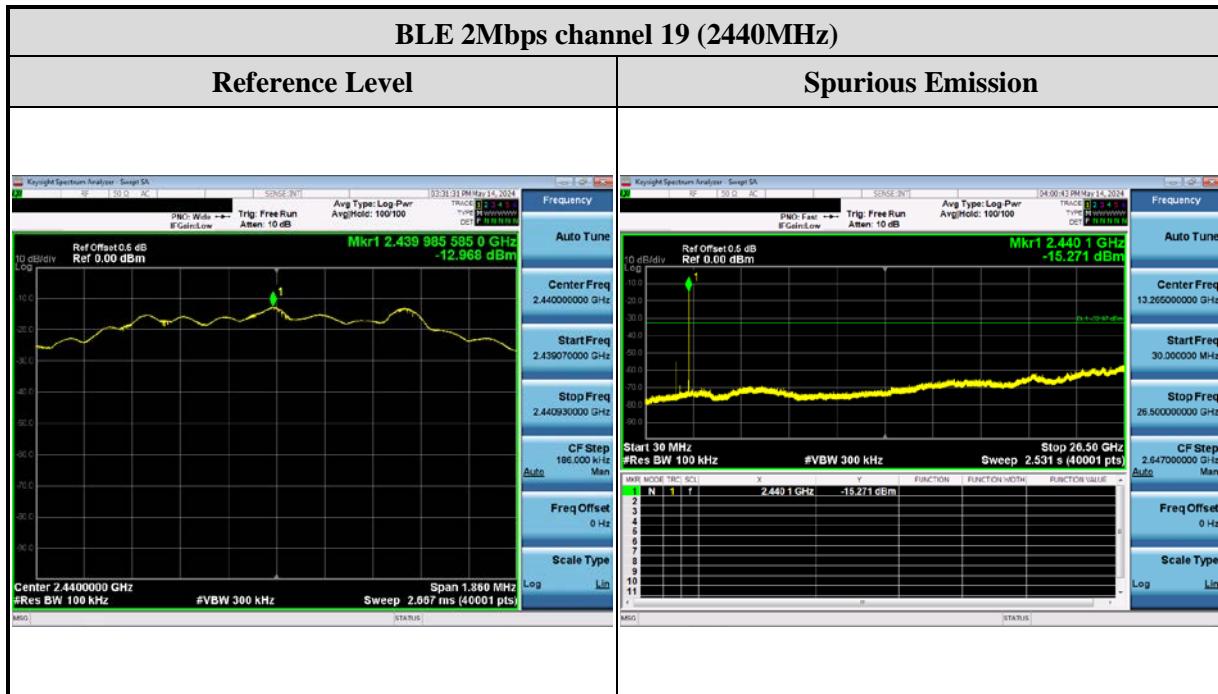



2.6 Radiated Band Edges and Spurious Emission Measurement

2.6.1 Limit


Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remarks:


1. RF Voltage (dBuV) = $20 \log_{10}$ RF Voltage(uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

2.6.2 Test Setup


Below 30MHz

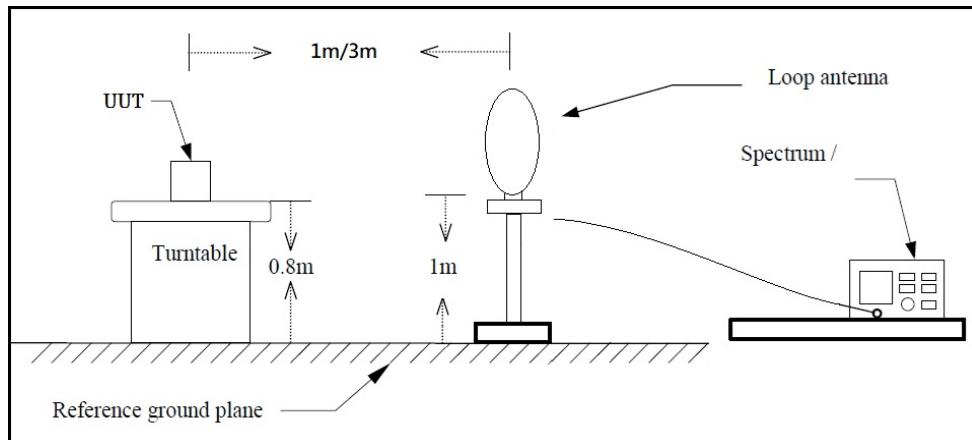

30MHz~1GHz

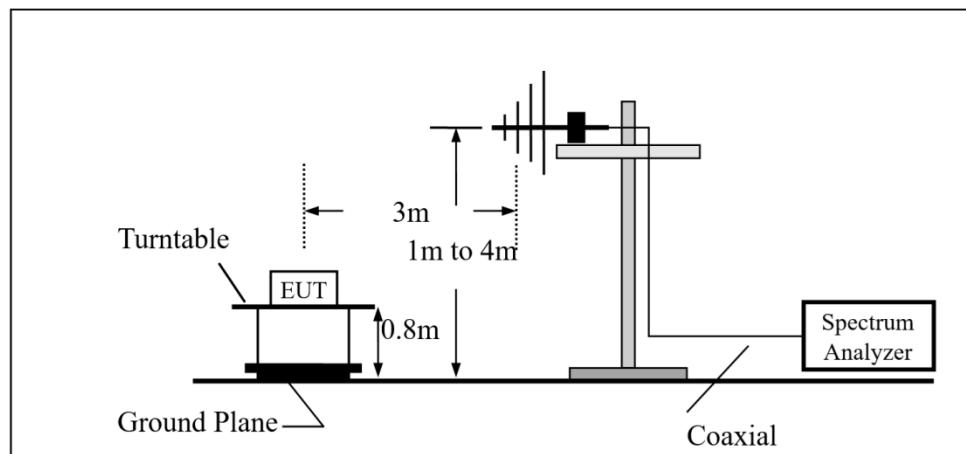

Above 1GHz

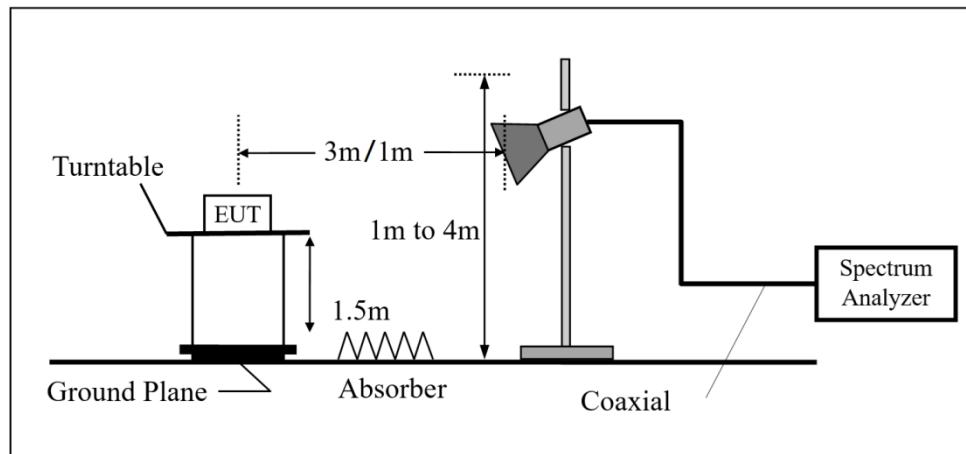

2.6.3 Test Procedure

The EUT was setup according to ANSI C63.10 : 2013 chapter 6.4, 6.5, 6.6 and tested according test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

- (1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meters chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (6) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

Remarks:

- (a) The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
- (b) The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
- (c) The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz(Duty cycle $> 98\%$) for Average detection (AV) at frequency above 1GHz.
- (d) All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission below 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

For Radiated emission Above 30MHz

- (7) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (8) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (9) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (10) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (11) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (12) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

2.6.4 Duty Cycle


Protocol	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
125kbps, S=8	2402	2.660	2.660	1.000	0.000	0.010
2Mbps	2402	1.115	1.883	0.592	2.276	0.897

2.6.5 Test Result of Radiated Band Edge Measurement

The following tables for radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X axis) were recorded in this report.

Test Frequency	
RF	BLE
Tx	CH00 (2402MHz) CH39 (2480MHz)

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/24
Test Channel :	CH00(2402MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

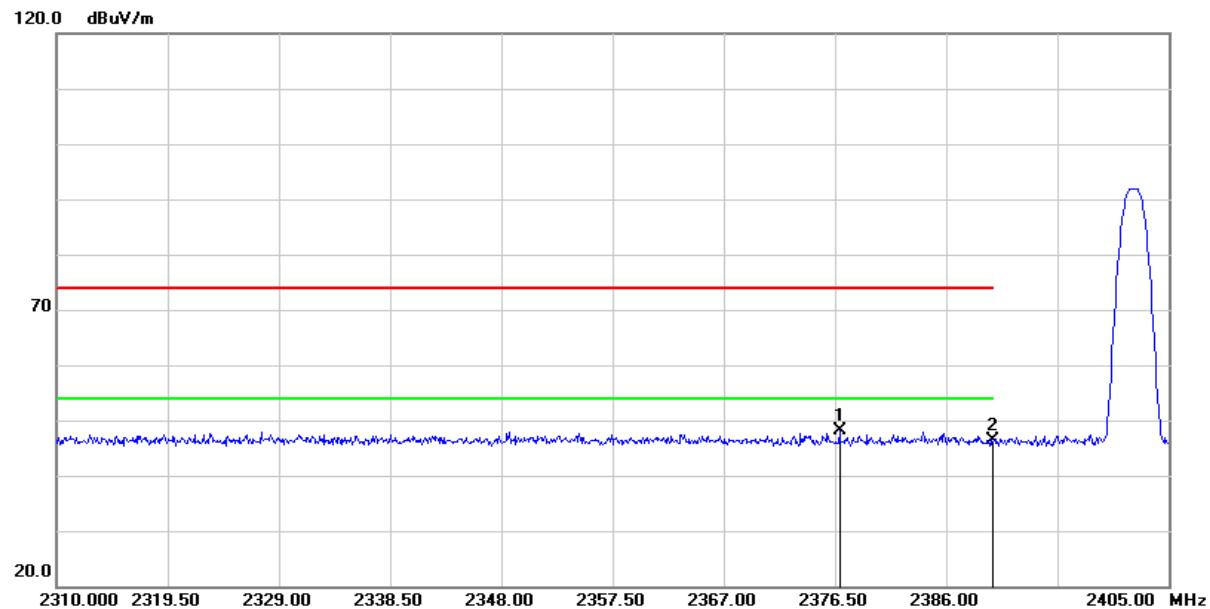


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.880	53.88	-5.70	48.18	74.00	-25.82	peak
2	2390.000	52.10	-5.69	46.41	74.00	-27.59	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/24
Test Channel :	CH00(2402MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

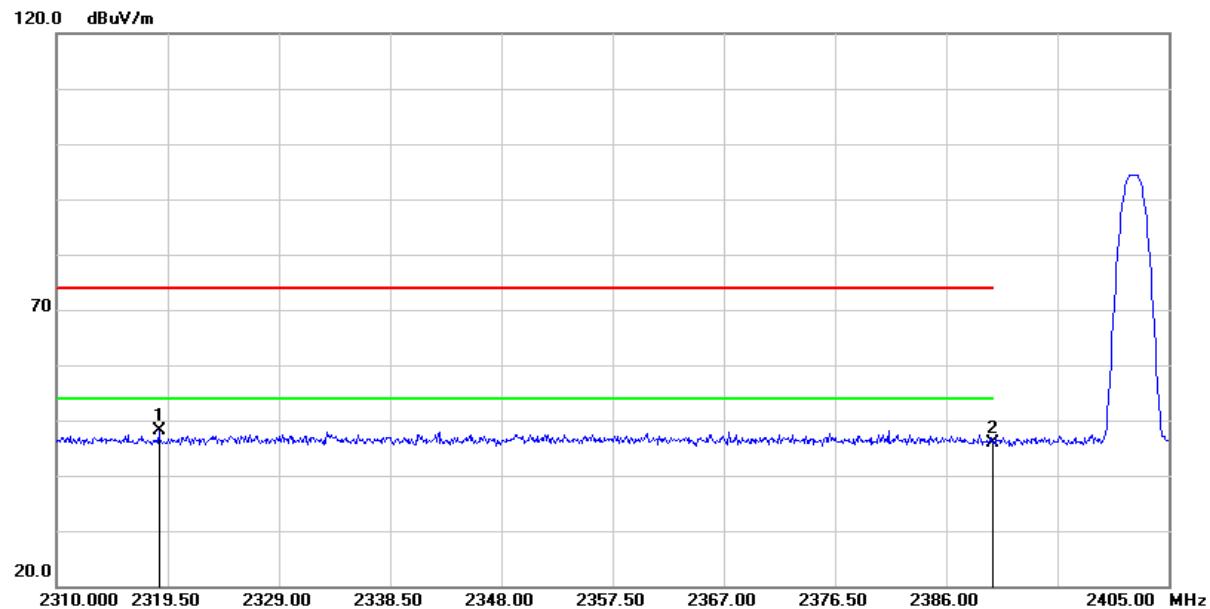


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2318.740	53.91	-5.76	48.15	74.00	-25.85	peak
2	2390.000	51.68	-5.69	45.99	74.00	-28.01	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/24
Test Channel :	CH39(2480MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

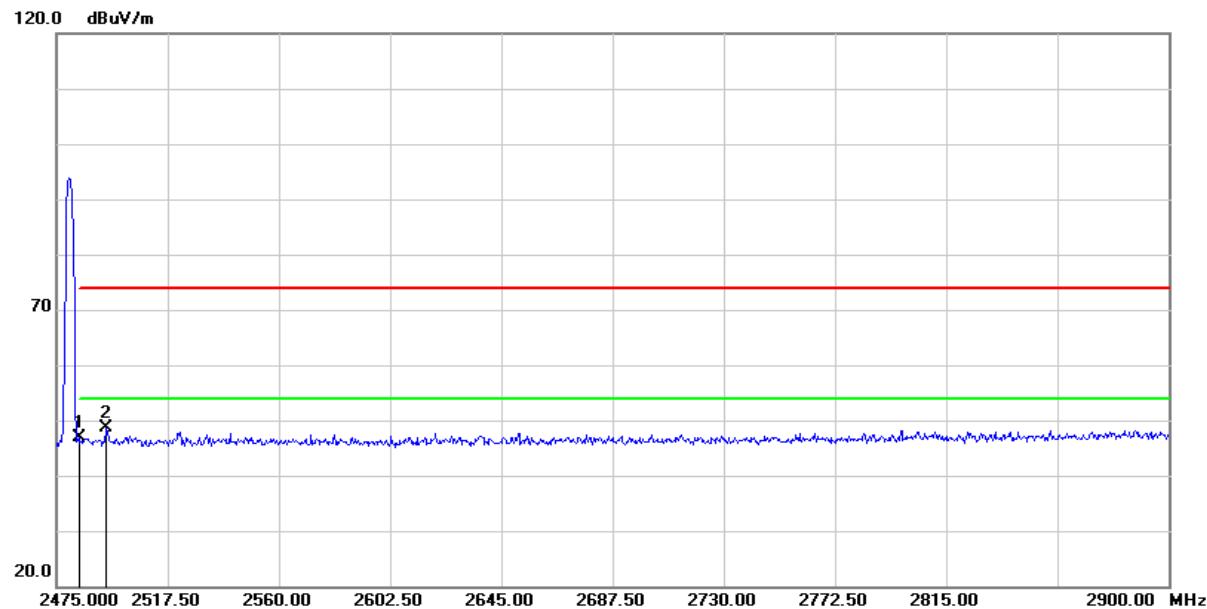


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.62	-5.81	46.81	74.00	-27.19	peak
2	2494.125	54.47	-5.81	48.66	74.00	-25.34	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/24
Test Channel :	CH39(2480MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

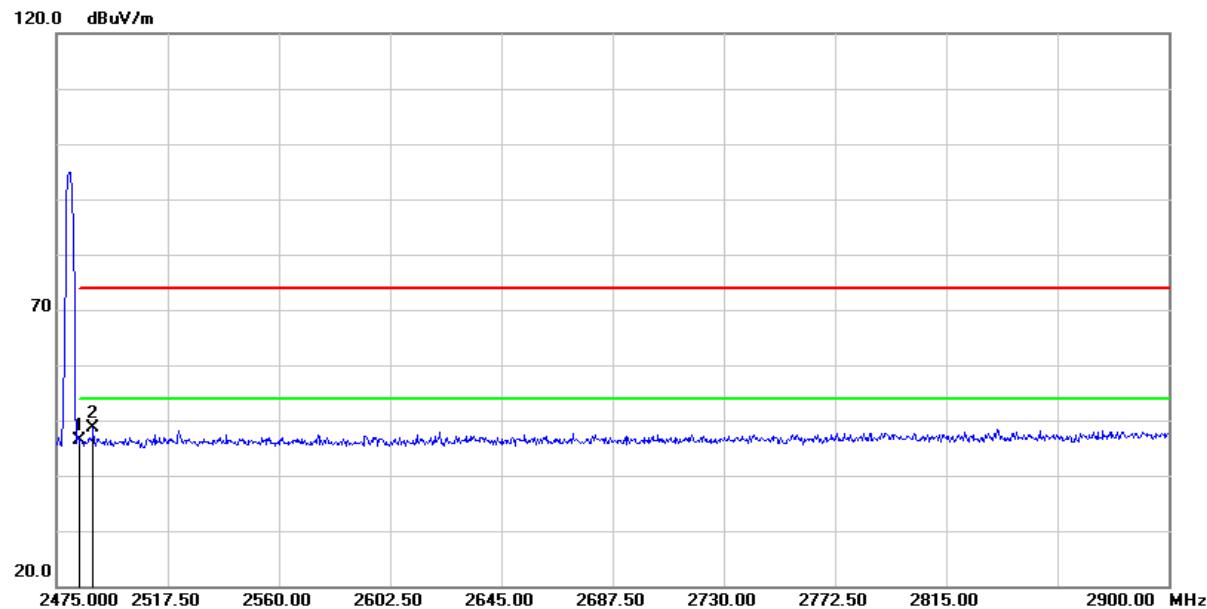


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.10	-5.81	46.29	74.00	-27.71	peak
2	2489.025	54.46	-5.80	48.66	74.00	-25.34	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/24
Test Channel :	CH00(2402MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

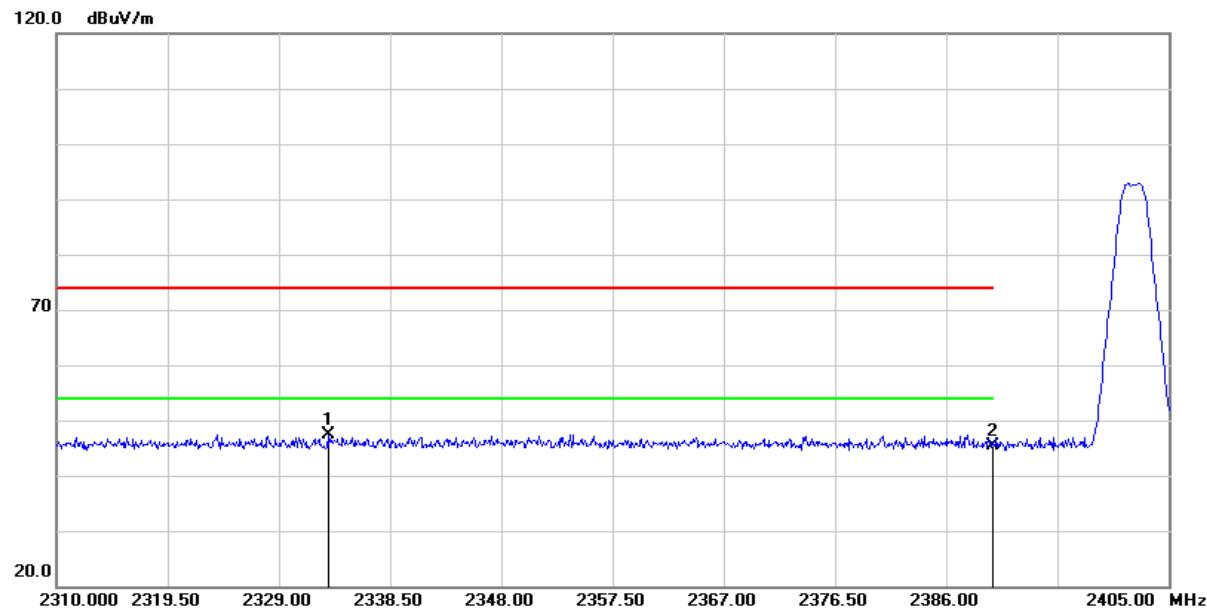


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2333.180	53.10	-5.73	47.37	74.00	-26.63	peak
2	2390.000	51.10	-5.69	45.41	74.00	-28.59	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/24
Test Channel :	CH00(2402MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

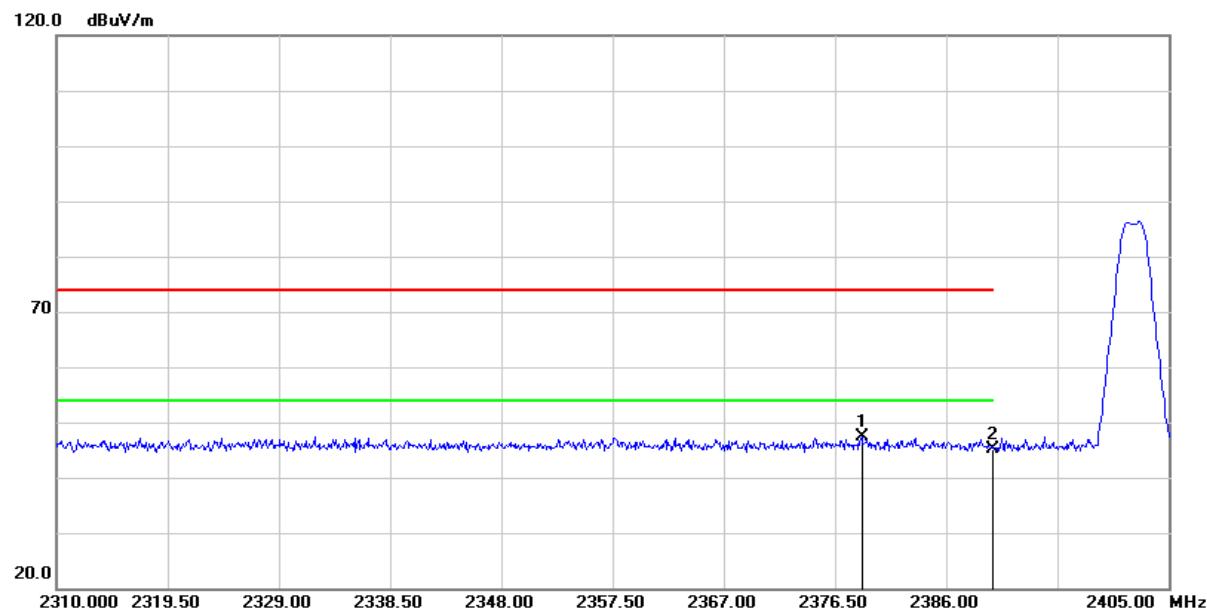


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.780	53.17	-5.70	47.47	74.00	-26.53	peak
2	2390.000	50.82	-5.69	45.13	74.00	-28.87	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/23
Test Channel :	CH39(2480MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

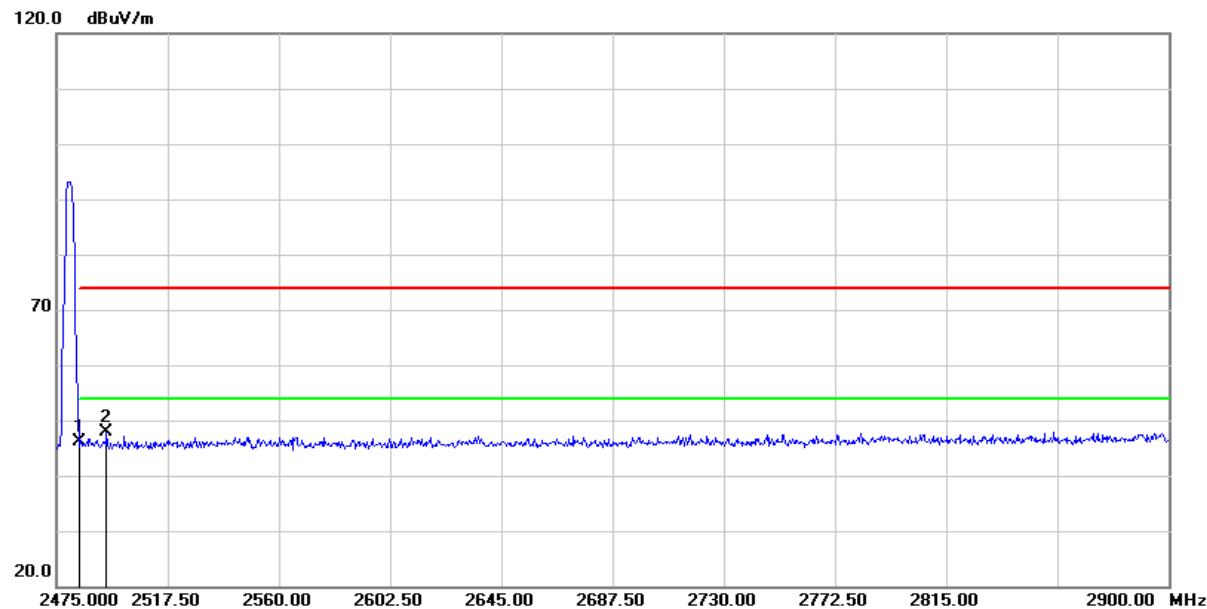


No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct Factor (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2483.500	51.94	-5.81	46.13	74.00	-27.87	peak
2	2494.125	53.71	-5.81	47.90	74.00	-26.10	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/23
Test Channel :	CH39(2480MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

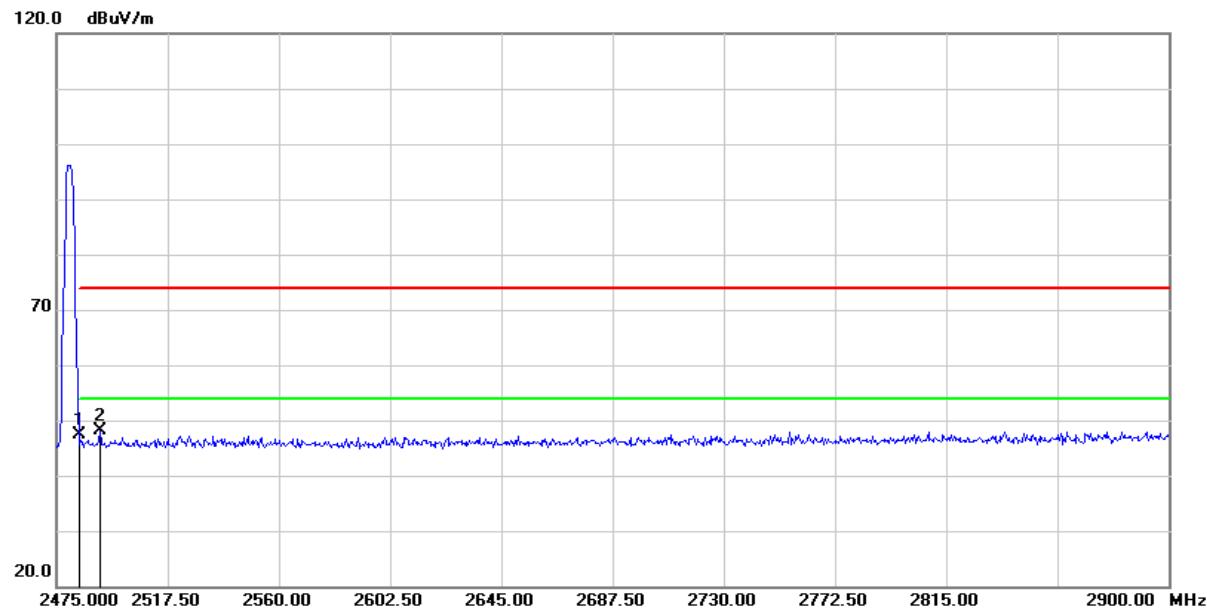

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.29	-5.81	47.48	74.00	-26.52	peak
2	2491.575	53.83	-5.80	48.03	74.00	-25.97	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.6.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 26.5GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

Test Frequency	
RF	BLE
Tx	CH00 (2402MHz) CH19 (2440MHz) CH39 (2480MHz)

Above 1GHz Data

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/23
Test Channel :	CH00(2402MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

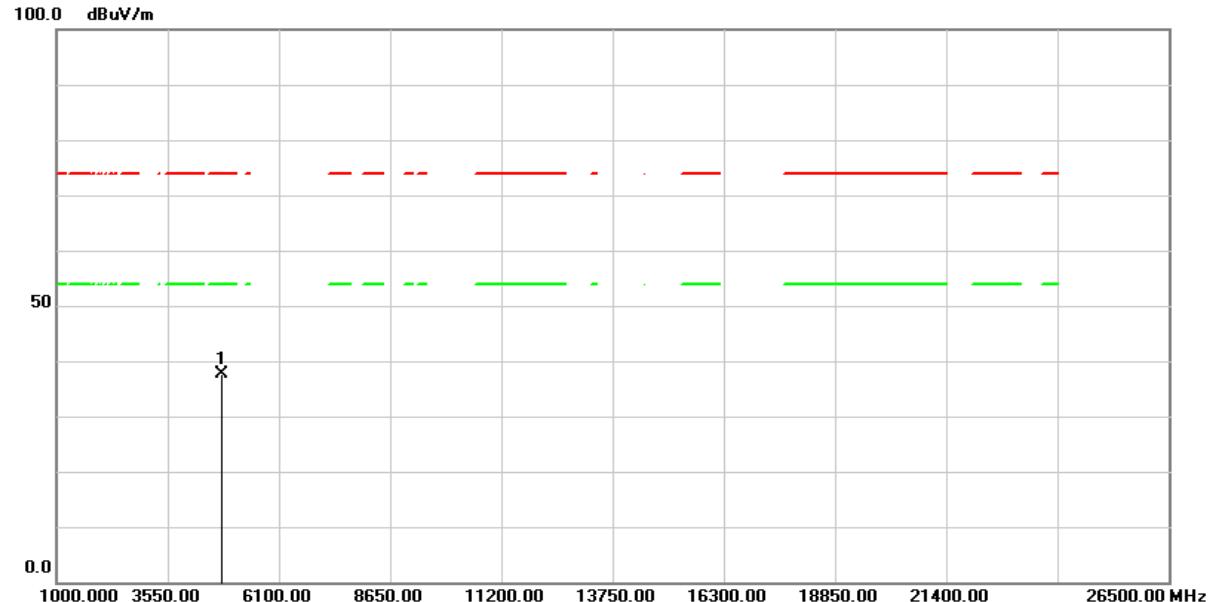


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	56.76	-19.02	37.74	74.00	-36.26	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/23
Test Channel :	CH00(2402MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

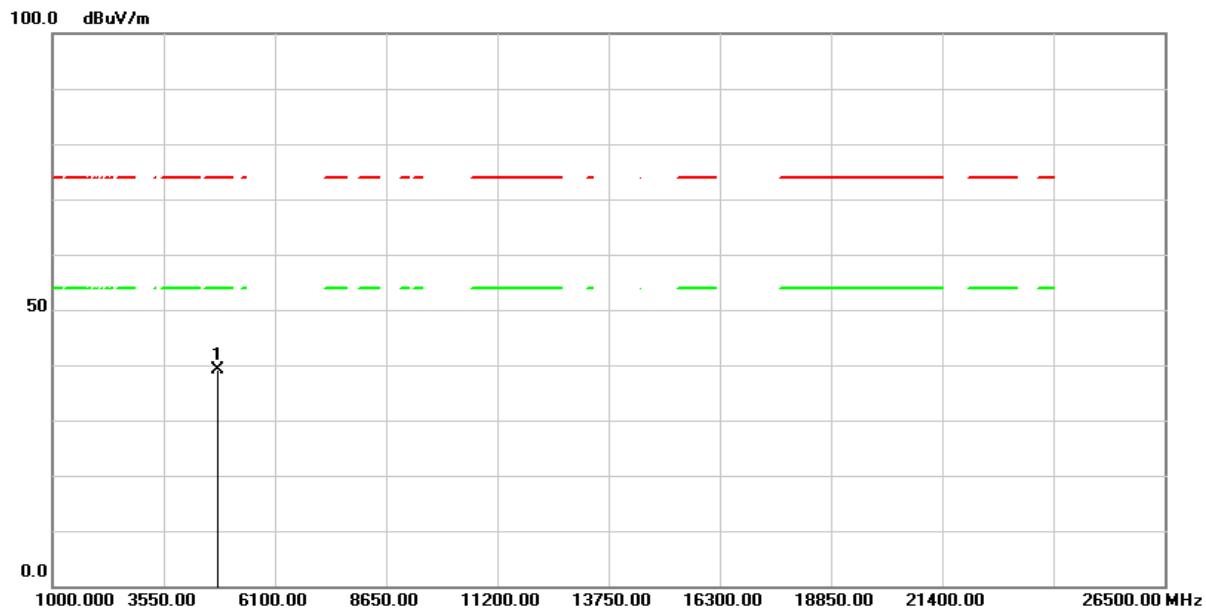


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	58.04	-19.02	39.02	74.00	-34.98	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/23
Test Channel :	CH19(2440MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

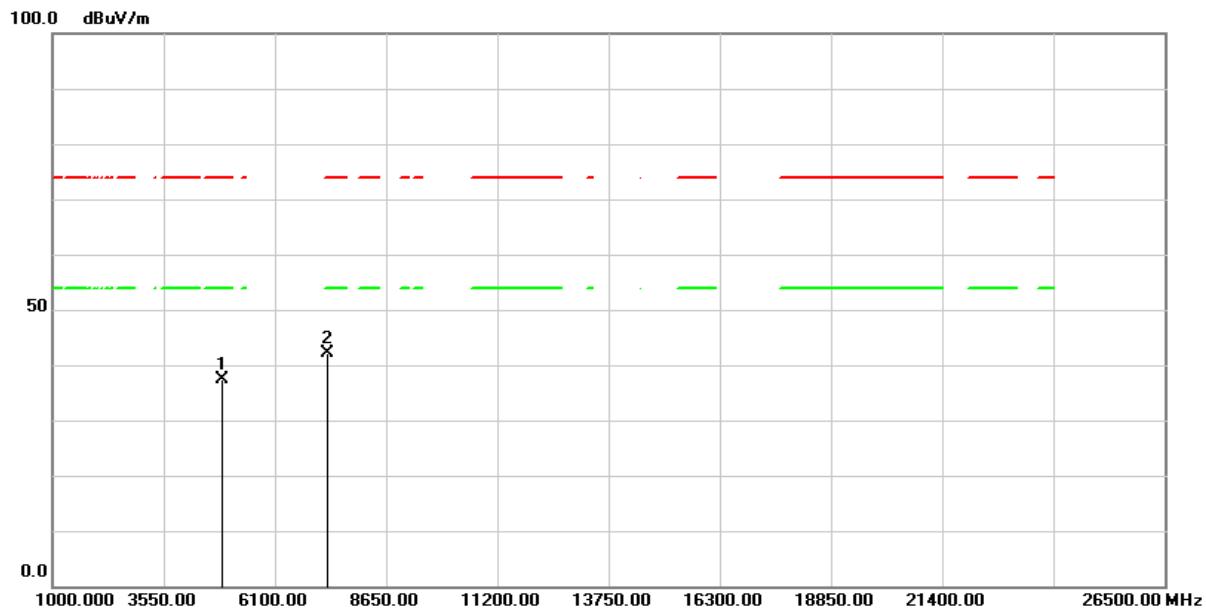


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	56.50	-19.01	37.49	74.00	-36.51	peak
2	7320.000	54.60	-12.50	42.10	74.00	-31.90	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/23
Test Channel :	CH19(2440MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

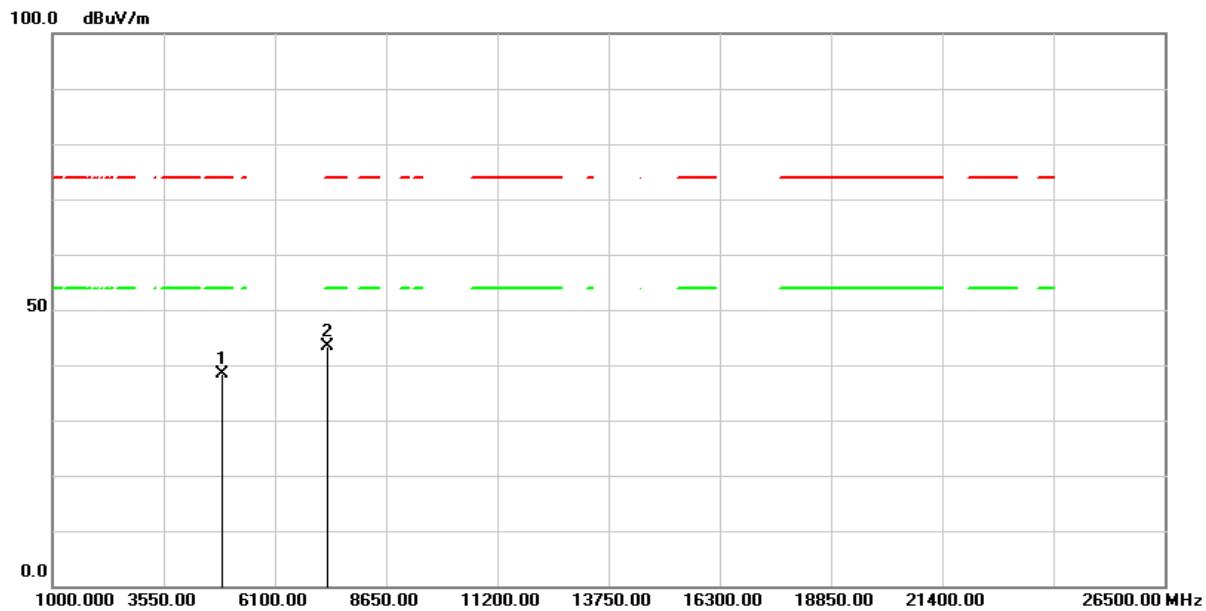


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	57.40	-19.01	38.39	74.00	-35.61	peak
2	7320.000	55.84	-12.50	43.34	74.00	-30.66	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/23
Test Channel :	CH39(2480MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

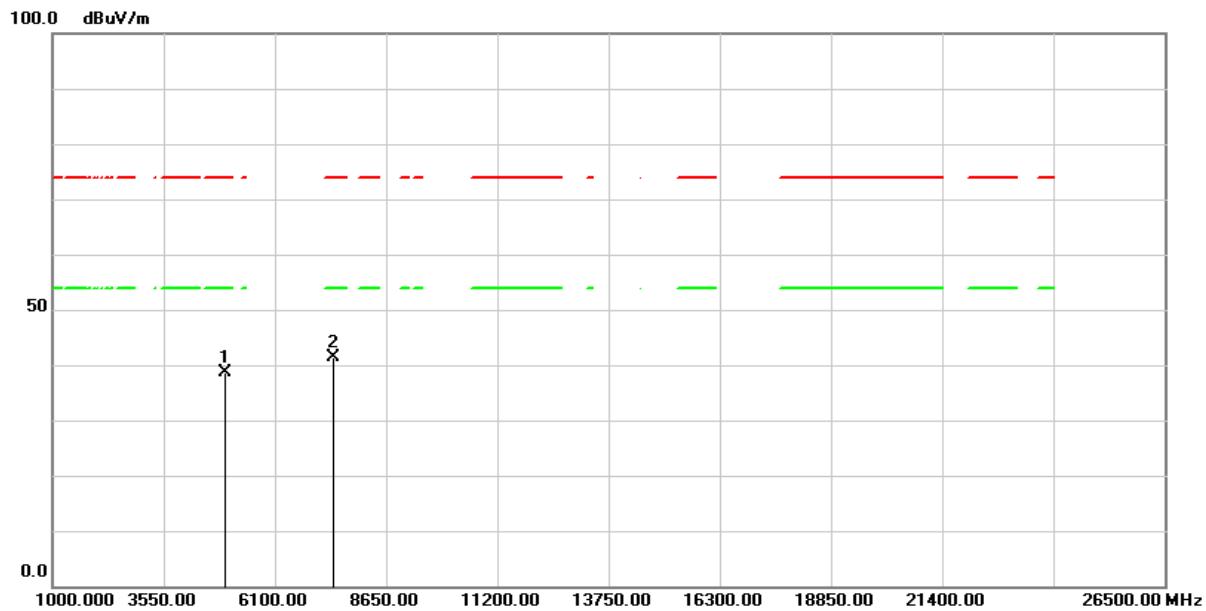


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	57.47	-18.93	38.54	74.00	-35.46	peak
2	7440.000	53.71	-12.27	41.44	74.00	-32.56	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/23
Test Channel :	CH39(2480MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

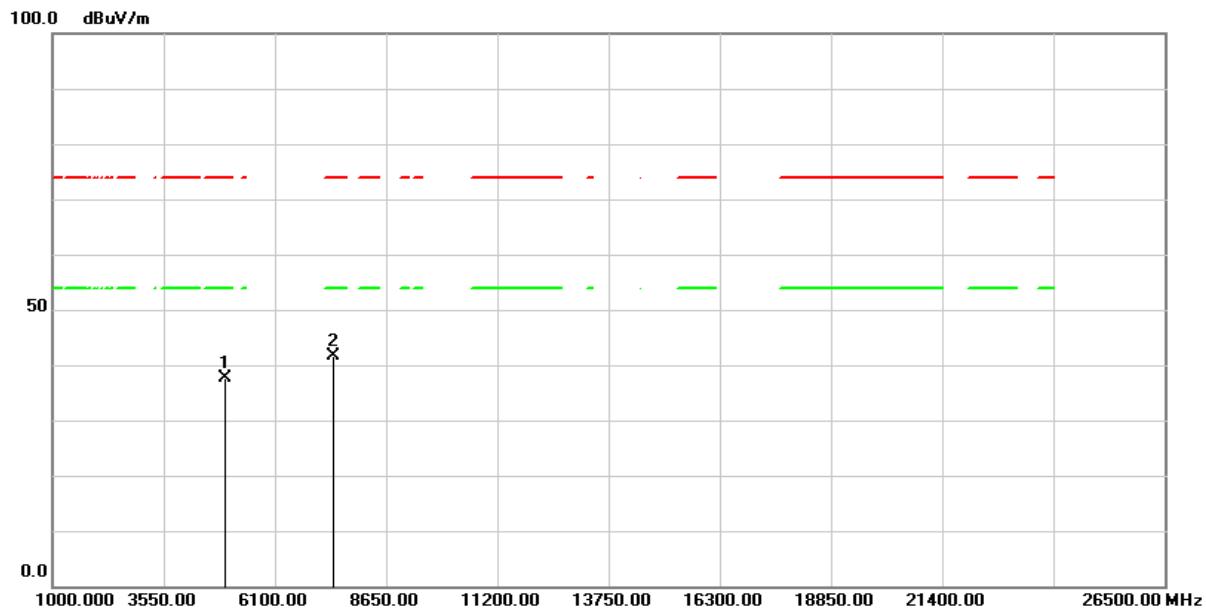


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.58	-18.93	37.65	74.00	-36.35	peak
2	7440.000	53.89	-12.27	41.62	74.00	-32.38	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/23
Test Channel :	CH00(2402MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

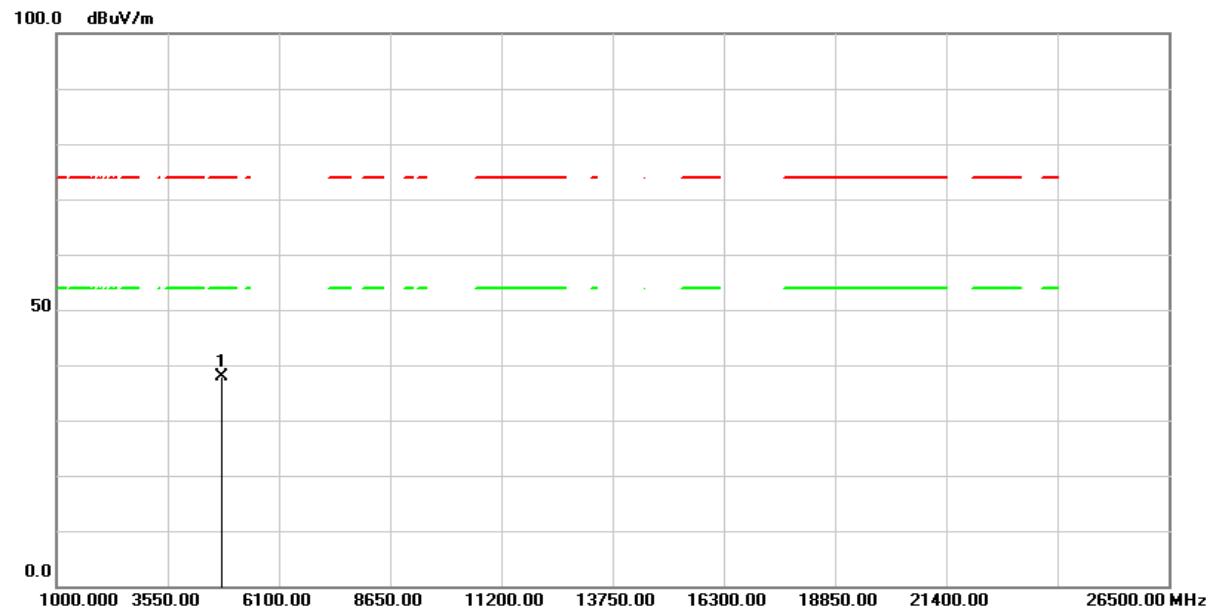


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	56.86	-19.02	37.84	74.00	-36.16	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/23
Test Channel :	CH00(2402MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

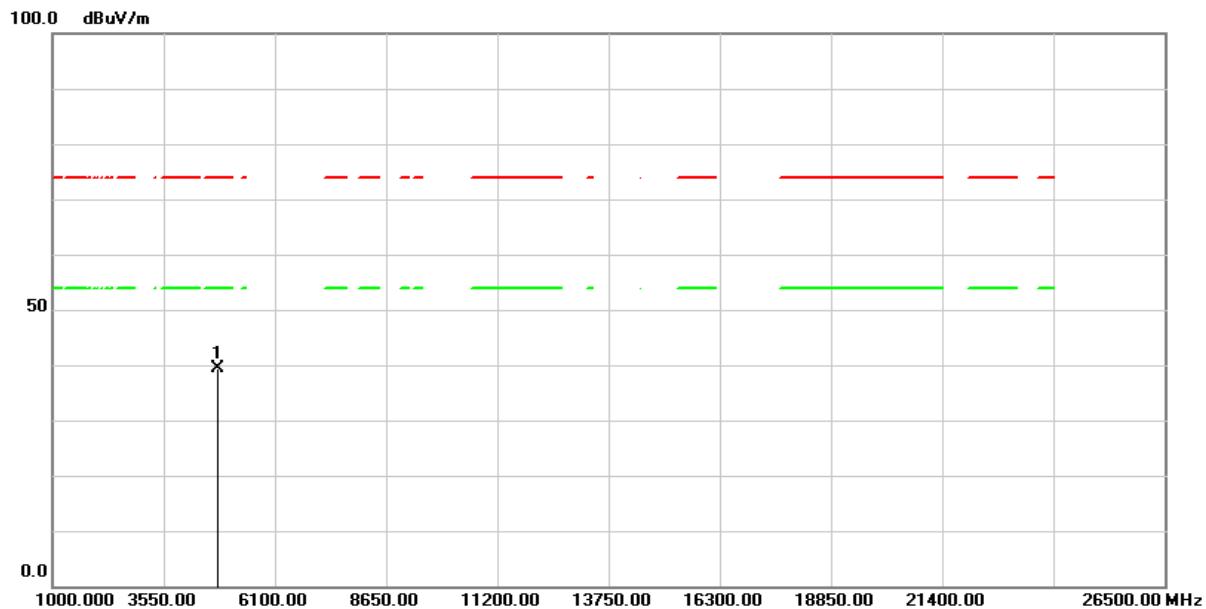


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	58.31	-19.02	39.29	74.00	-34.71	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/23
Test Channel :	CH19(2440MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

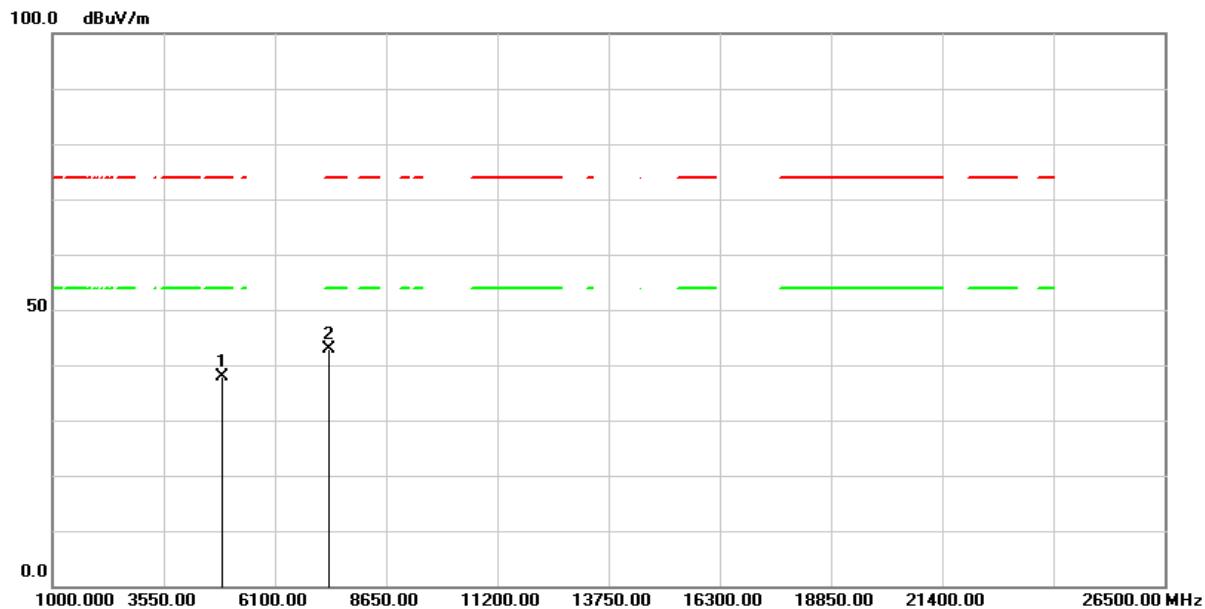


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	56.90	-19.01	37.89	74.00	-36.11	peak
2 *	7320.000	55.49	-12.50	42.99	74.00	-31.01	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/23
Test Channel :	CH19(2440MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

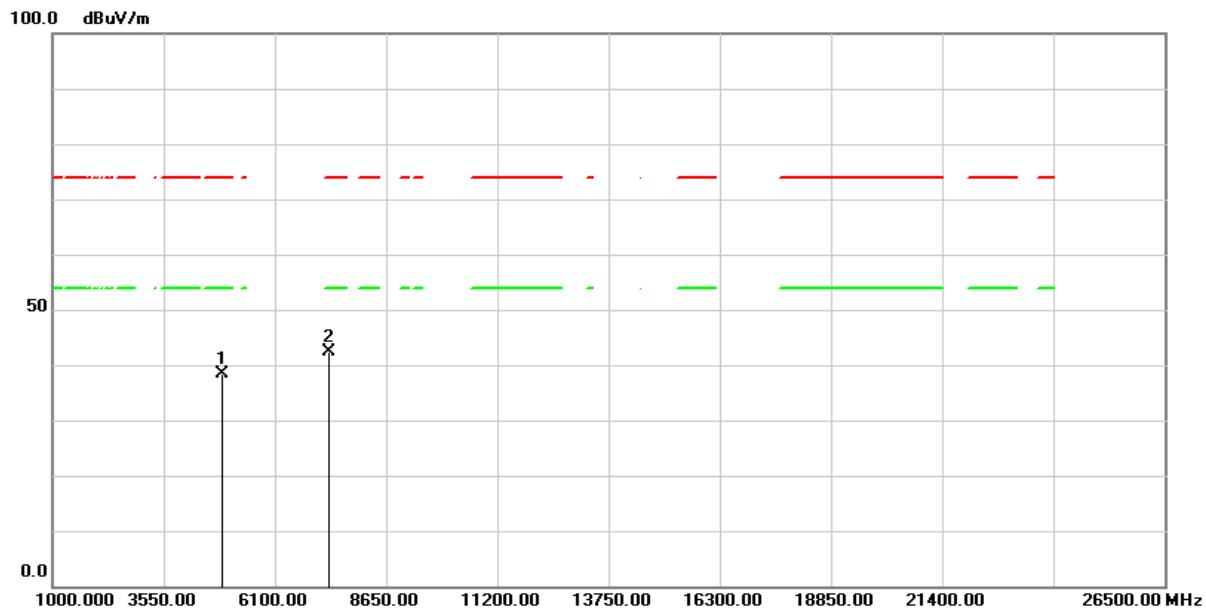


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	57.47	-19.01	38.46	74.00	-35.54	peak
2	7320.000	54.89	-12.50	42.39	74.00	-31.61	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/23
Test Channel :	CH39(2480MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

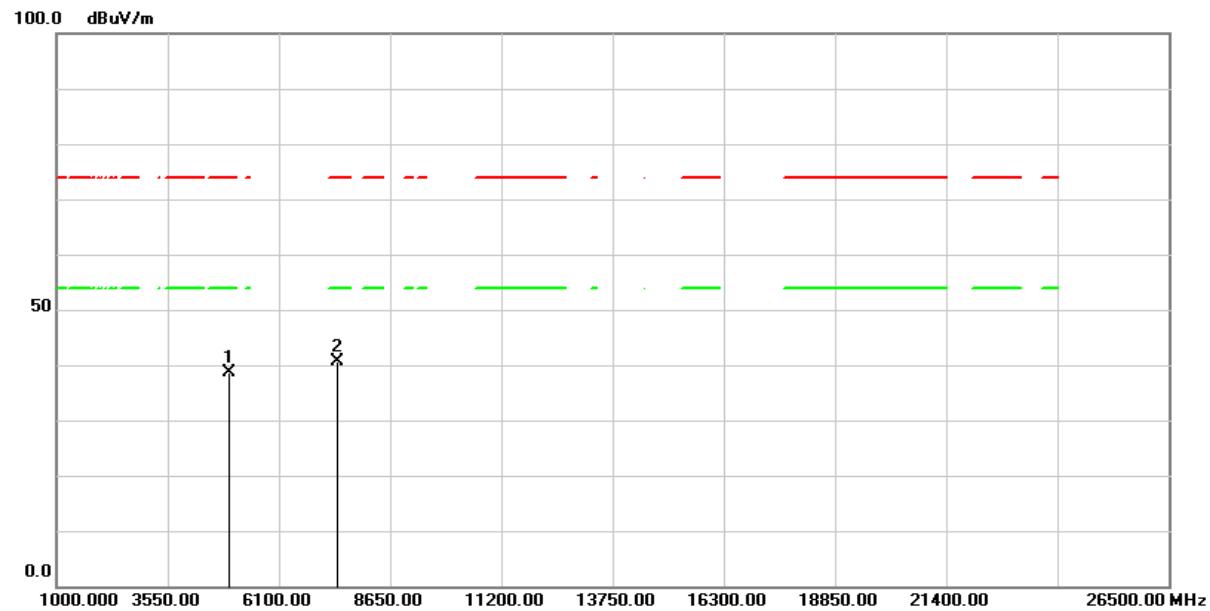


No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct Factor (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	4960.000	57.59	-18.93	38.66	74.00	-35.34	peak
2	7440.000	52.95	-12.27	40.68	74.00	-33.32	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(2Mbps)	Test Date :	2024/04/23
Test Channel :	CH39(2480MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

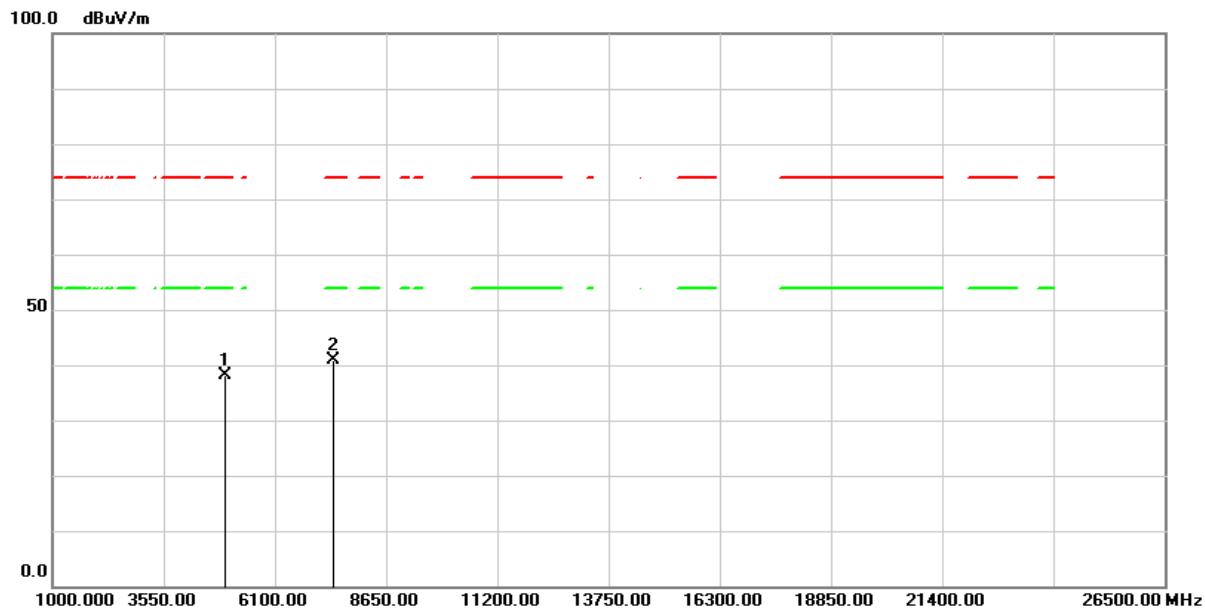


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	57.14	-18.93	38.21	74.00	-35.79	peak
2	7440.000	53.10	-12.27	40.83	74.00	-33.17	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Below 1GHz Data

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/23
Test Channel :	CH19(2440MHz)	Temperature :	20.7 °C
Polarization :	Horizontal	Relative Humidity :	56 %

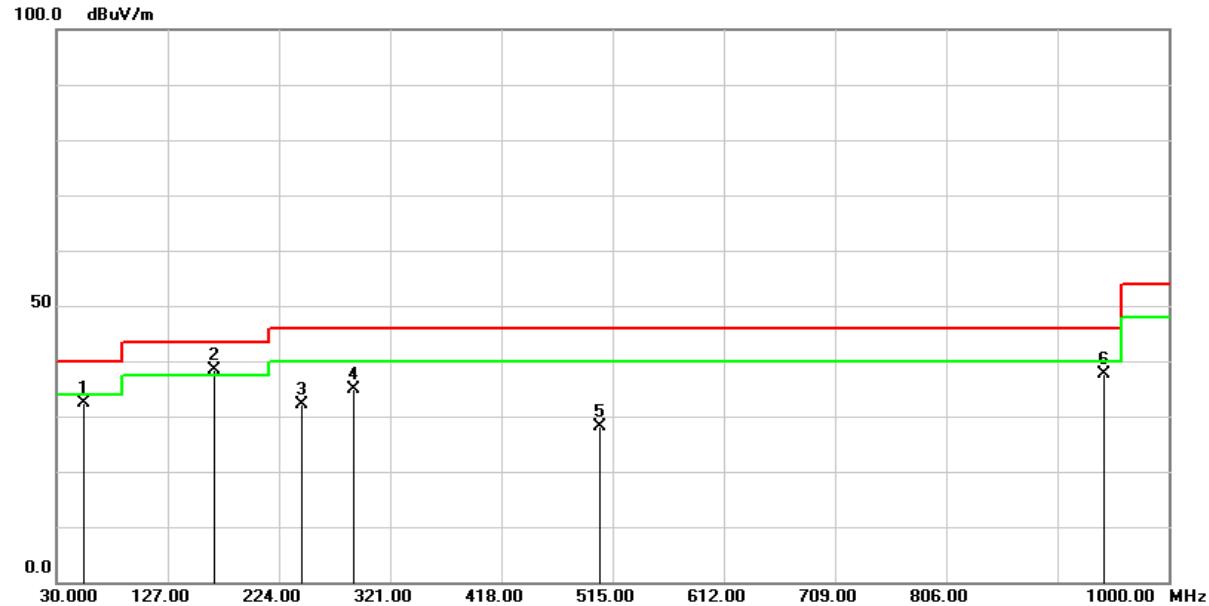


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	54.2500	43.00	-10.53	32.47	40.00	-7.53	QP
2	167.7400	49.57	-11.28	38.29	43.50	-5.21	QP
3	243.4000	44.34	-12.18	32.16	46.00	-13.84	QP
4	288.9900	45.24	-10.42	34.82	46.00	-11.18	QP
5	504.3300	32.67	-4.59	28.08	46.00	-17.92	QP
6	943.7400	33.24	4.50	37.74	46.00	-8.26	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit BLE(125kbps, S=8)	Test Date :	2024/04/23
Test Channel :	CH19(2440MHz)	Temperature :	20.7 °C
Polarization :	Vertical	Relative Humidity :	56 %

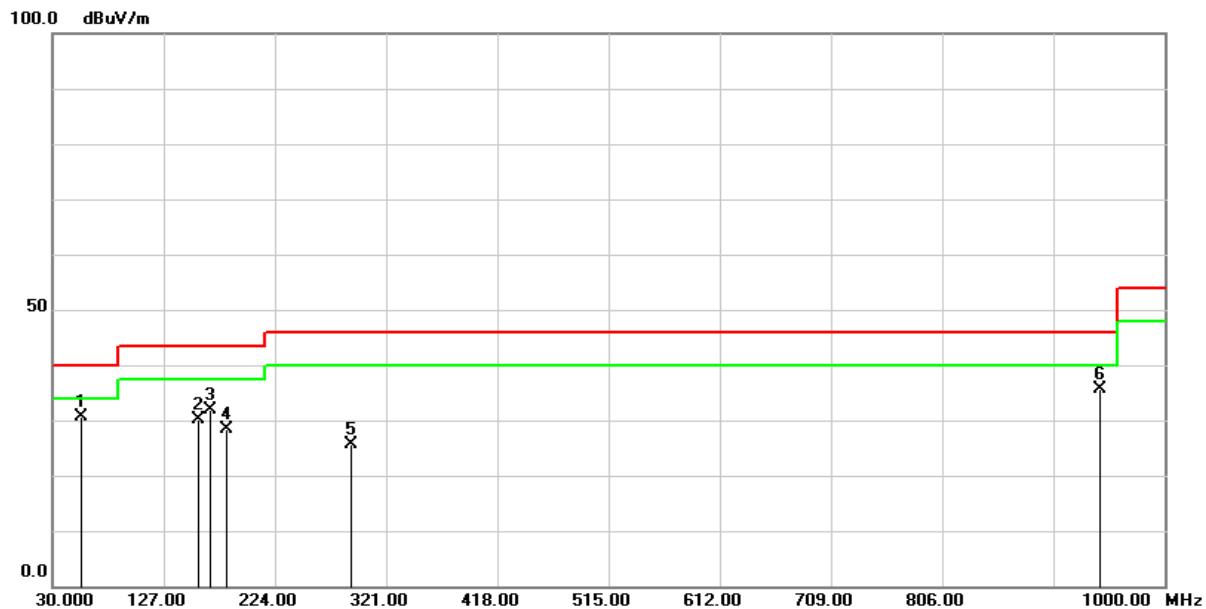

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	55.2200	41.47	-10.73	30.74	40.00	-9.26	QP
2	157.0700	41.14	-10.93	30.21	43.50	-13.29	QP
3	167.7400	43.16	-11.28	31.88	43.50	-11.62	QP
4	182.2900	40.96	-12.70	28.26	43.50	-15.24	QP
5	290.9300	36.15	-10.40	25.75	46.00	-20.25	QP
6	943.7400	31.18	4.50	35.68	46.00	-10.32	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.7 AC Conducted Emissions Measurement

2.7.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

*Decreases with the logarithm of the frequency

2.7.2 Test Setup

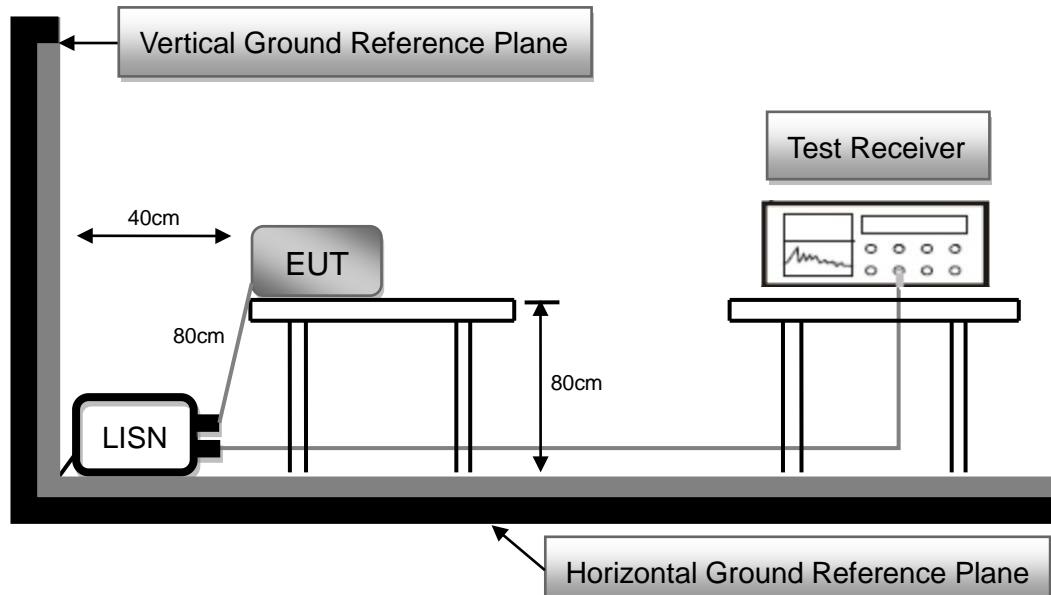


2.7.3 Test Procedure

1. Reference ANSI C63.10 : 2013 chapter 6.2
2. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
3. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
4. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
5. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
7. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
8. The EUT and cable configuration of the above highest emission levels were recorded. The Test Data of the worst case was recorded.

2.7.4 Test Result

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2024/06/28	Phase :	L
Temperature :	26.1°C	Humidity :	45 %

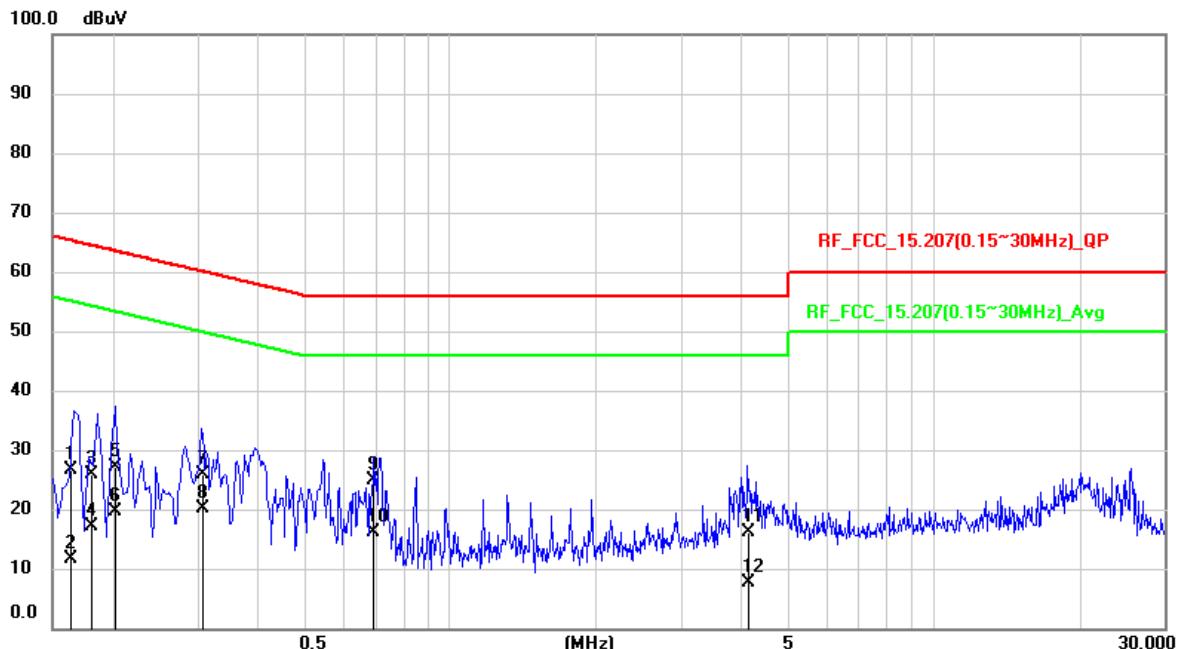


No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1626	16.67	9.84	26.51	65.33	-38.82	QP
2	0.1626	1.68	9.84	11.52	55.33	-43.81	AVG
3	0.1818	16.02	9.82	25.84	64.4	-38.56	QP
4	0.1818	7.32	9.82	17.14	54.4	-37.26	AVG
5	0.2026	17.3	9.82	27.12	63.5	-36.38	QP
6	0.2026	9.9	9.82	19.72	53.5	-33.78	AVG
7	0.3075	15.93	9.83	25.76	60.04	-34.28	QP
8	0.3075	10.21	9.83	20.04	50.04	-30	AVG
9	0.6961	15.1	9.85	24.95	56	-31.05	QP
10	0.6961	6.17	9.85	16.02	46	-29.98	AVG
11	4.1717	6.07	9.96	16.03	56	-39.97	QP
12	4.1717	-2.32	9.96	7.64	46	-38.36	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Result Value – Limit Value

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2024/06/28	Phase :	N
Temperature :	26.1°C	Humidity :	45 %

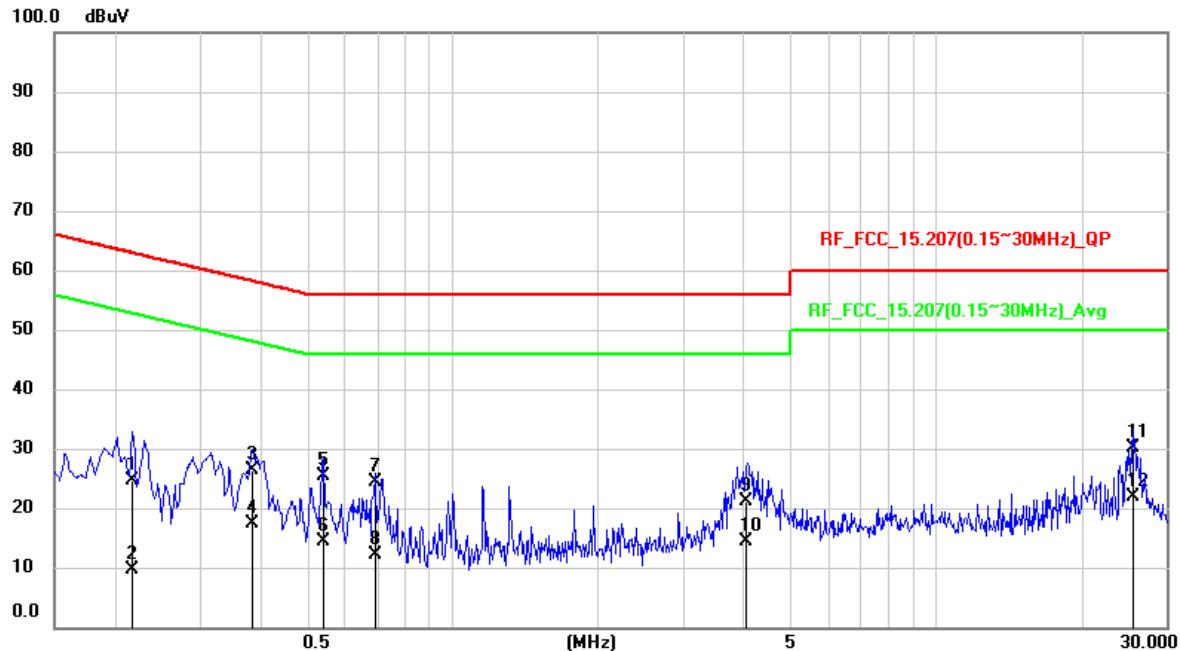

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2163	14.88	9.83	24.71	62.96	-38.25	QP
2	0.2163	-0.27	9.83	9.56	52.96	-43.4	AVG
3	0.3852	16.53	9.84	26.37	58.17	-31.8	QP
4	0.3852	7.63	9.84	17.47	48.17	-30.7	AVG
5	0.5404	15.6	9.84	25.44	56	-30.56	QP
6	0.5404	4.64	9.84	14.48	46	-31.52	AVG
7	0.6973	14.49	9.85	24.34	56	-31.66	QP
8	0.6973	2.32	9.85	12.17	46	-33.83	AVG
9	4.0623	11.08	9.95	21.03	56	-34.97	QP
10	4.0623	4.46	9.95	14.41	46	-31.59	AVG
11	25.6696	19.58	10.46	30.04	60	-29.96	QP
12	25.6696	11.38	10.46	21.84	50	-28.16	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Result Value – Limit Value

--- END ---