



FCC Test Report

Report No: FCS202404052W01

Issued for

Applicant:	Shenzhen Winmark Electronics Technology Co.,LTD.
Address:	401-601, 2Building, AiShang industrial park, NO.108 Honghu Road, Yanchuan Community, Yanluo Subdistrict, Bao'an District, Shenzhen City, Guangdong Province,China
Product Name:	CarPlay Box
Brand Name:	N/A
Model Name:	AB008
Series Model:	AB001、 AB002、 AB003、 AB004、 AB005、 AB006、 AB007、 AB009、 AB010、 AB011、 AB012、 AB013、 AB014、 AB015、 AB016、 AB017、 AB018、 AB019、 AB020、 AB021、 AB022、 AB023、 AB024、 AB025、 AB026、 AB027、 AB028、 AB029、 AB030
FCC ID:	2BFZK-AB008

Issued By: Flux Compliance Service Laboratory
Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Tel: 769-27280901 Fax:769-27280901 <http://www.fcs-lab.com>

TEST RESULT CERTIFICATION

Applicant's Name: Shenzhen Winmark Electronics Technology Co.,LTD.
Address.....: 401-601, 2Building, AiShang industrial park, NO.108 Honghu Road, Yanchuan Community, Yanluo Subdistrict, Bao'an District, Shenzhen City, Guangdong Province,China
Manufacture's Name: Shenzhen Winmark Electronics Technology Co.,LTD.
Address.....: 401-601, 2Building, AiShang industrial park, NO.108 Honghu Road, Yanchuan Community, Yanluo Subdistrict, Bao'an District, Shenzhen City, Guangdong Province,China

Product Description

Product Name: CarPlay Box
Brand Name: N/A
Model Name.....: AB008
Series Model: AB001、AB002、AB003、AB004、AB005、AB006、AB007、AB009、AB010、AB011、AB012、AB013、AB014、AB015、AB016、AB017、AB018、AB019、AB020、AB021、AB022、AB023、AB024、AB025、AB026、AB027、AB028、AB029、AB030
Test Standards: CFR 47 FCC Part15E section 15.407

ANSI C63.10-2013
Test Procedure.....: KDB 789033 D02 General UNII Test procedures New Rules 02

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test :

Date (s) of performance of tests : Apr 11, 2024 ~ May 13, 2024

Date of Issue..... : May 13, 2024

Test Result : Pass

Tested by

:

Scott Shen

(Scott Shen)

Reviewed by

:

Duke Qian

(Duke Qian)

Approved by

:

Jack Wang

(Jack Wang)





Table of contents

Revision History 4

1. SUMMARY OF TEST RESULTS 6

 1.1 TEST FACTORY 7

 1.2 MEASUREMENT UNCERTAINTY 7

2. GENERAL INFORMATION 8

 2.1 GENERAL DESCRIPTION OF THE EUT 8

 2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 10

 2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS 12

 2.4 EQUIPMENTS LIST Radiation Test equipment 13

3. 26dB Bandwidth, 6dB Bandwidth and 99% Bandwidth 14

 3.1 Limit 14

 3.2 Test Procedure 14

 3.3 3.3 Test setup 14

 3.4 Test results 15

 3.4 Original Test Data 16

4 CONDUCTED OUTPUT POWER 44

 4.1 limit 44

 4.2 test procedure 44

 4.3 TEST SETUP 44

 4.4 test results 45

5. POWER SPECTRAL DENSITY 46

 5.1 LIMIT 46

 5.2 TEST PROCEDURE 46

 5.3 TEST SETUP 47

 5.4 TEST RESULTS 47

 5.5 original test data 48

6. FREQUENCY STABILITY MEASUREMENT 62

 6.1 LIMIT 62

 6.2 TEST PROCEDURE 62

 6.3 TEST SETUP 62

 6.4 TEST RESULTS 63

7. Conducted spurious emission and Band edge 64

 7.1 LIMIT 64

 7.2 TEST PROCEDURE 64

 7.3 TEST SETUP 64

 7.4 TEST RESULTS 65



8. Duty Cycle91

 8.1 TEST REQUIREMENT91

 8.2 TEST PROCEDURE 91

 8.3 TEST SETUP 91

 8.4 TEST RESULTS92

9 RADIATED EMISSION MEASUREMENT 93

 9.1 RADIATED EMISSION LIMITS 93

 9.2 TEST PROCEDURE 94

 9.3 TESTSETUP 95

 9.4. TEST RESULTS97

10 CONDUCTED EMISSION TEST119

 10.1POWER LINE CONDUCTED EMISSION LIMITS119

 10.2 TEST PROCEDURE 120

 10.3 TEST SETUP 120

 10 .4 TEST RESULT 121

11. ANTENNA REQUIREMENT123

 11.1 STANDARD REQUIREMENT123

 11.2 RESULT 123



Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	May 13, 2024	FCS202404052W01	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Standard Section	Test Item	Judgment	Remark
FCC 15.407 (e)	6/26db Bandwidth and 99% Bandwidth	PASS	--
FCC 15.407 (a)	Maximum Conducted Output Power	PASS	--
FCC 15.407 (a)	Power Spectral Density	PASS	--
FCC 15.407 (g)	Frequency Stability Measurement	PASS	
FCC 15.407 (a) FCC 15.209 FCC 15.205	Emissions in restricted frequency bands	PASS	
FCC 15.407 (a) FCC 15.209 FCC 15.205	Band Edge Compliance	PASS	
FCC 15.207	Power Line Conducted Emission	PASS	
FCC 15.203	Antenna requirement	PASS	--

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.988 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated (<1G) 9KHz-30MHz	± 5.2 dB
6	All emissions, radiated (<1G) 30MHz-1000MHz	± 5.2 dB
7	All emissions, radiated 1GHz -18GHz	± 4.66 dB
8	All emissions, radiated 18GHz -40GHz	± 4.31 dB
9	PSD	± 1.24 dB
10	Occupied bandwidth	± 0.3 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	CarPlay Box
Trade Name	N/A
Model Name	AB008
Series Model	AB001、 AB002、 AB003、 AB004、 AB005、 AB006、 AB007、 AB009、 AB010、 AB011、 AB012、 AB013、 AB014、 AB015、 AB016、 AB017、 AB018、 AB019、 AB020、 AB021、 AB022、 AB023、 AB024、 AB025、 AB026、 AB027、 AB028、 AB029、 AB030
Model Difference	The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, Appearance shape, the materials of decorative accessories is same, the only difference is the model name.
Channel List	Please refer to the Note 2.
Operation frequency	IEEE 802.11a/n/ac(HT20): U-NII-1 5150MHz ~5250MHZ U-NII-3 5725MHZ-5850 MHz
Number of channel	5150MHz ~5250MHZ (7CH) 5725MHZ-5850 MHz (8CH)
Modulation:	OFDM
Power supply	DC 5V/0.5A
Battery	N/A
Hardware version number	V1.0
Software version number	V1.0
Sample type	mobile device
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

U-NII-1 (5.15-5.25GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	38	5190
40	5200	42	5210
44	5220	46	5230
48	5240		

U-NII-3 (5.725-5.85GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	151	5755
153	5765	155	5775
157	5785	159	5795
161	5805	165	5825


Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPC antenna	N/A	2.62	Antenna

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

Block diagram of EUT configuration for test



Test software: the QA tool

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

For 802.11a/n/ac(HT20)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
48	5240		

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	157	5785
165	5825		

For 802.11n/ac(HT40)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	46	5230

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
151	5755	159	5795



For 802.11ac(HT80)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210		

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
155	5775		

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	HW	N/A	N/A	This adapter is for testing only in report.

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2023.08.29	2024.08.28
Signal Analyzer	R&S	FSV40-N	FCS-E012	2023.08.29	2024.08.28
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2023.08.29	2024.08.28
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2023.08.29	2024.08.28
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2023.08.29	2024.08.28
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2023.08.29	2024.08.28
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2023.08.29	2024.08.28
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2023.08.29	2024.08.28
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2023.08.29	2024.08.28
Temperature & Humidity	HTC-1	victor	FCS-E005	2023.08.29	2024.08.28

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	FCS-E020	2023.08.29	2024.08.28
LISN	R&S	ENV216	FCS-E007	2023.08.29	2024.08.28
LISN	ETS	3810/2NM	FCS-E009	2023.08.29	2024.08.28
Temperature & Humidity	HTC-1	victor	FCS-E008	2023.08.29	2024.08.28

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2023.08.29	2024.08.28
Spectrum Analyzer	Agilent	E4447A	MY50180039	2023.08.29	2024.08.28
Spectrum Analyzer	R&S	FSV-40	101499	2023.08.29	2024.08.28

3. 26dB Bandwidth, 6dB Bandwidth and 99% Bandwidth

3.1 Limit


FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	26 dB Bandwidth	5150-5250
	26 dB Bandwidth	5250-5350
	26 dB Bandwidth	For FCC:5470-5725 For IC:5470-5600 5650-5725
	Minimum 500kHz 6dB Bandwidth	5725-5850

3.2 Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth: RBW=100kHz For 26dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6dB Bandwidth: VBW=300kHz For 26dB Bandwidth: >3RBW
Trace	Max hold
Sweep	Auto couple

(2) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26dB and 6dB relative to the maximum level measured in the fundamental emission.

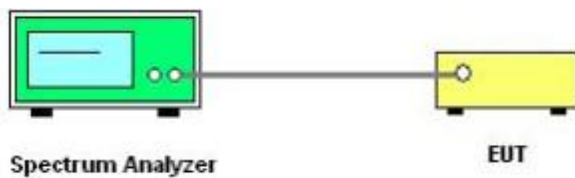

3.3 Test setup

3.4 Test results

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	20.30	20.20	19.88	16.391	16.395	16.386
	802.11n(HT20)	20.09	20.18	20.11	17.494	17.511	17.477
	802.11n(HT40)	40.76	/	40.84	35.862	/	35.906
	802.11ac(HT20)	20.13	20.06	20.05	17.496	17.493	17.516
	802.11ac(HT40)	41.31	/	41.08	35.806	/	35.837
	802.11ac(HT80)	81.15	/	/	75.641	/	/

Band	Operation mode	6 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-3	802.11a	14.69	13.85	14.62	16.295	16.339	16.443
	802.11n(HT20)	14.99	15.09	15.04	17.497	17.490	17.525
	802.11n(HT40)	33.84	/	35.04	35.875	/	35.910
	802.11ac(HT20)	15.01	15.07	12.94	17.497	17.479	17.516
	802.11ac(HT40)	33.84	/	35.07	35.839	/	35.866
	802.11ac(HT80)	75.16	/	/	75.680	/	/

3.4 Original Test Data


-26dB Bandwidth U-NII-1 11a Low CH 5180MHZ




U-NII-1 11a Middle CH 5200MHZ




U-NII-1 11a High CH 5240MHZ

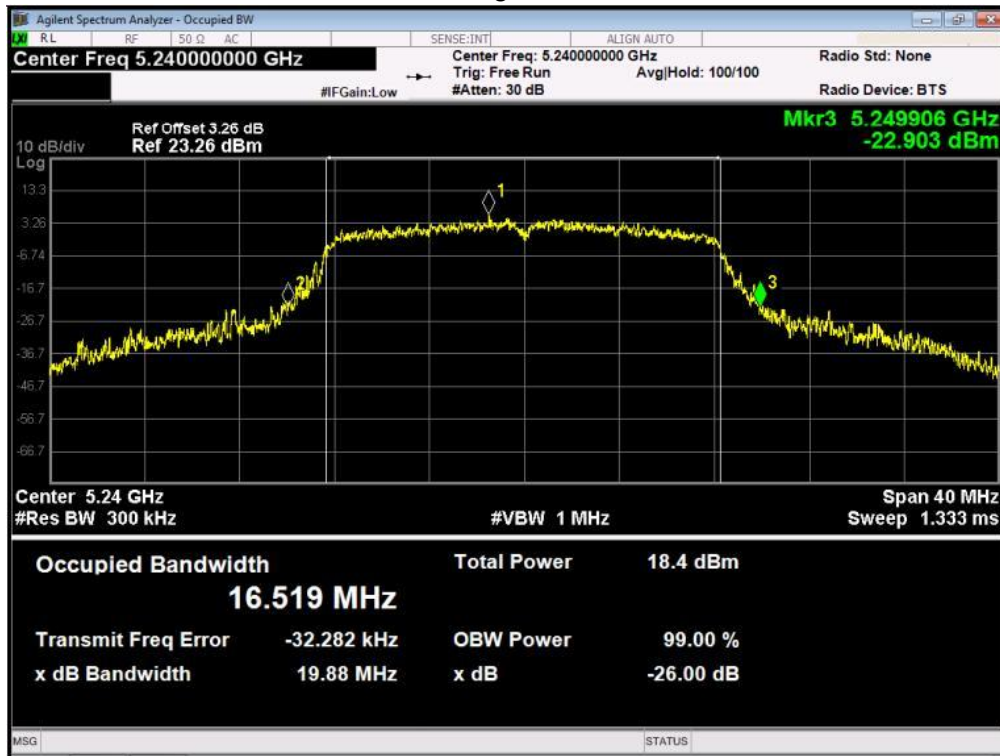


U-NII-1 11n(HT20) Low CH 5180MHZ

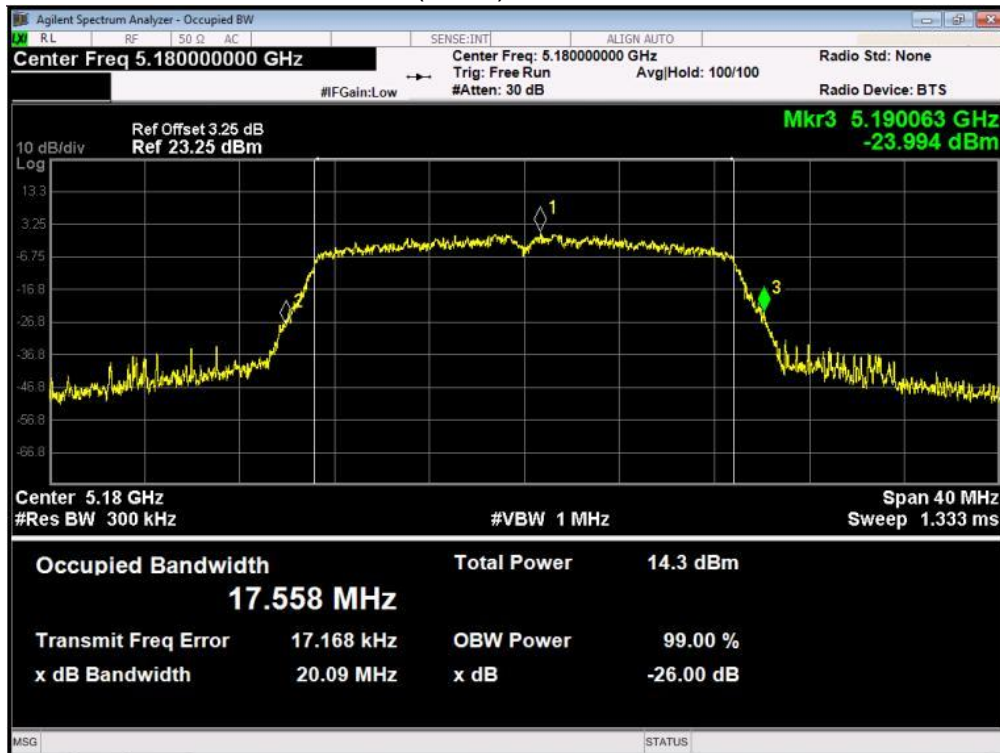


U-NII-1 11n(HT20) Middle CH 5200MHZ

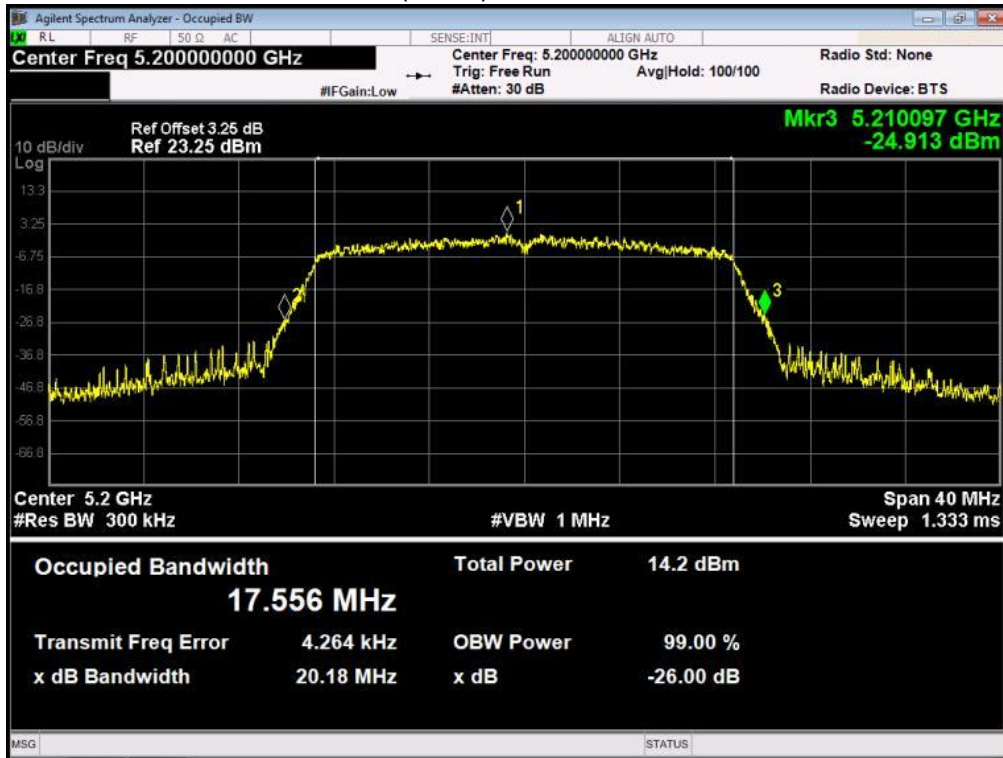


U-NII-1 11n(HT20)High CH 5240MHZ

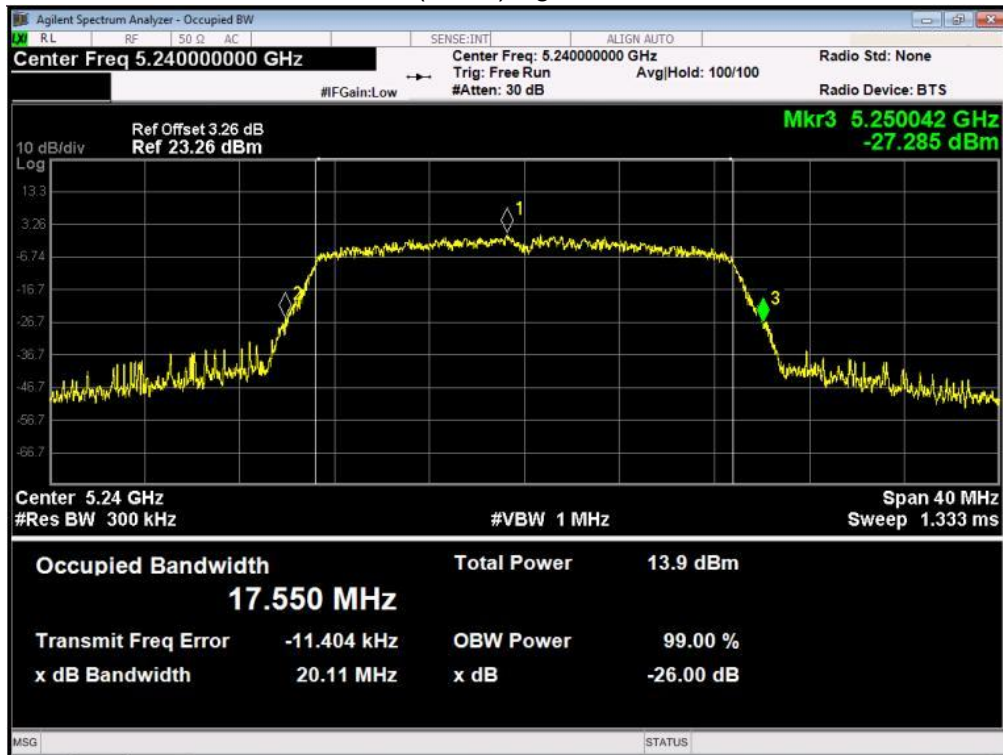


U-NII-1 11n(HT40) Low CH 5190MHZ

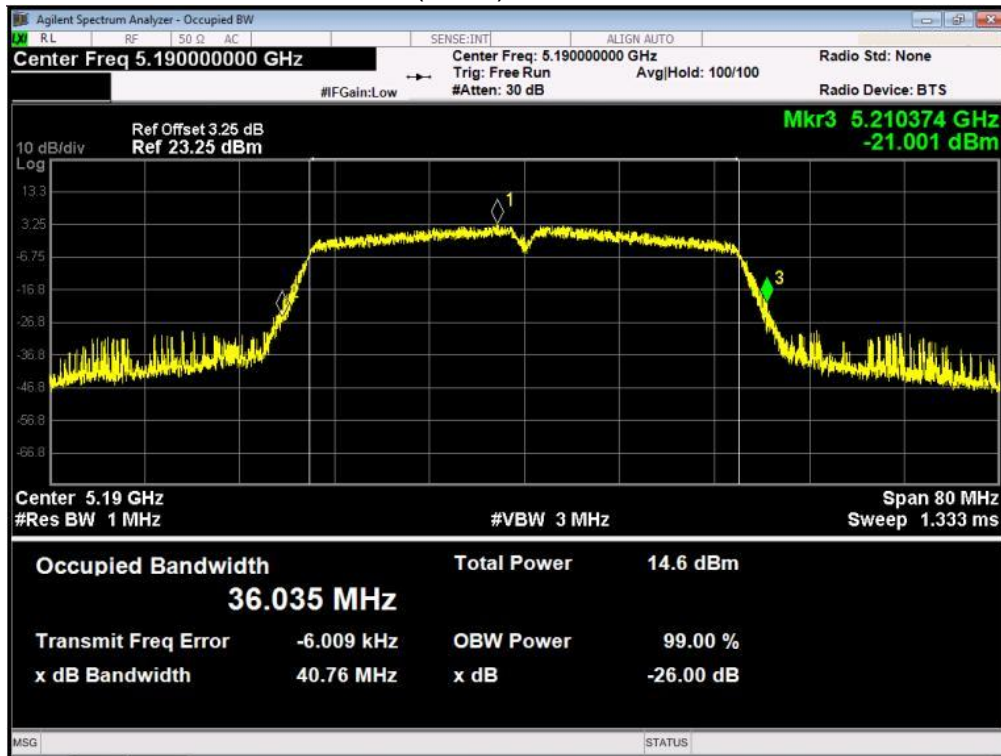


U-NII-1 11n(HT40) High CH 5230MHZ

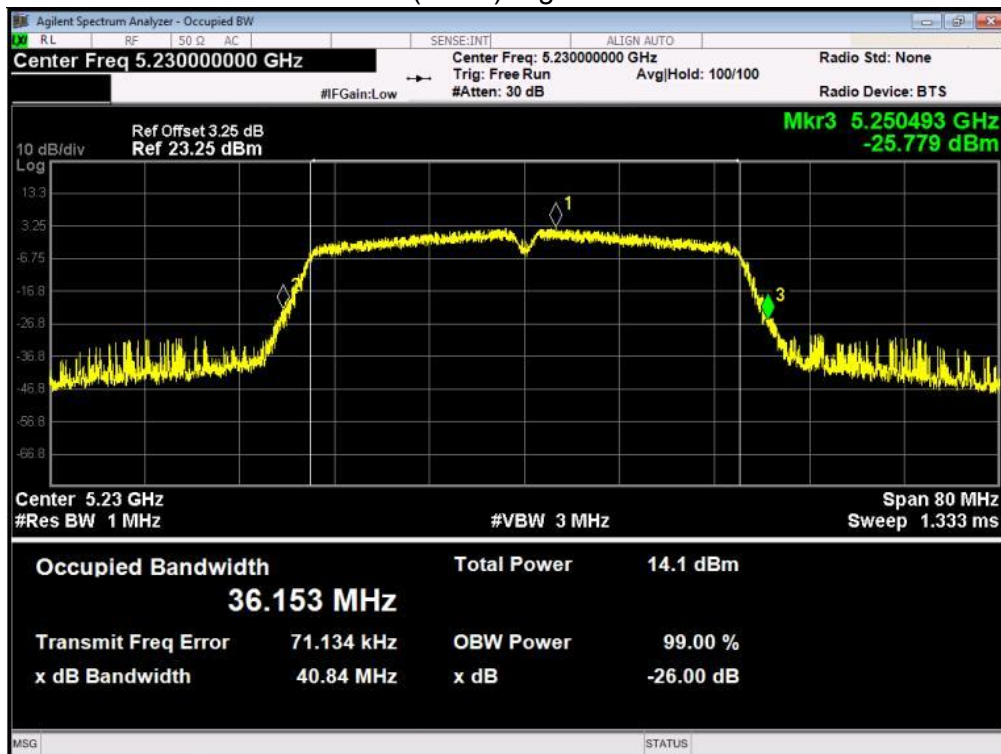

U-NII-1 ac(HT20) Low CH 5180MHZ

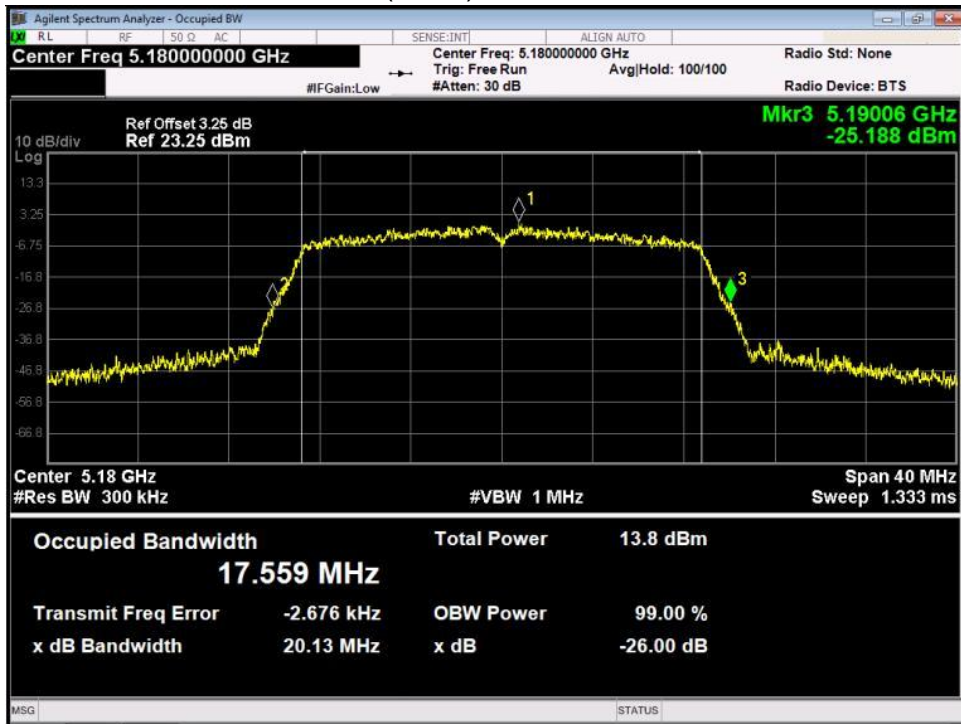


U-NII-1 ac(HT20) Middle CH 5200MHZ

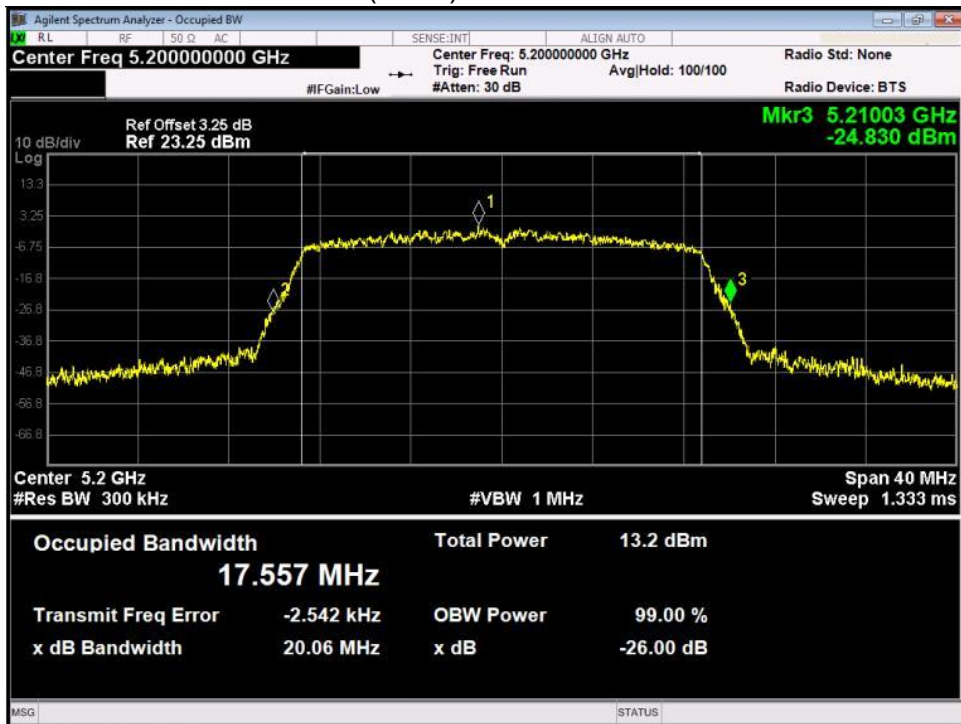


U-NII-1 ac(HT20)High CH 5240MHZ




U-NII-1 ac(HT40) Low CH 5190MHZ

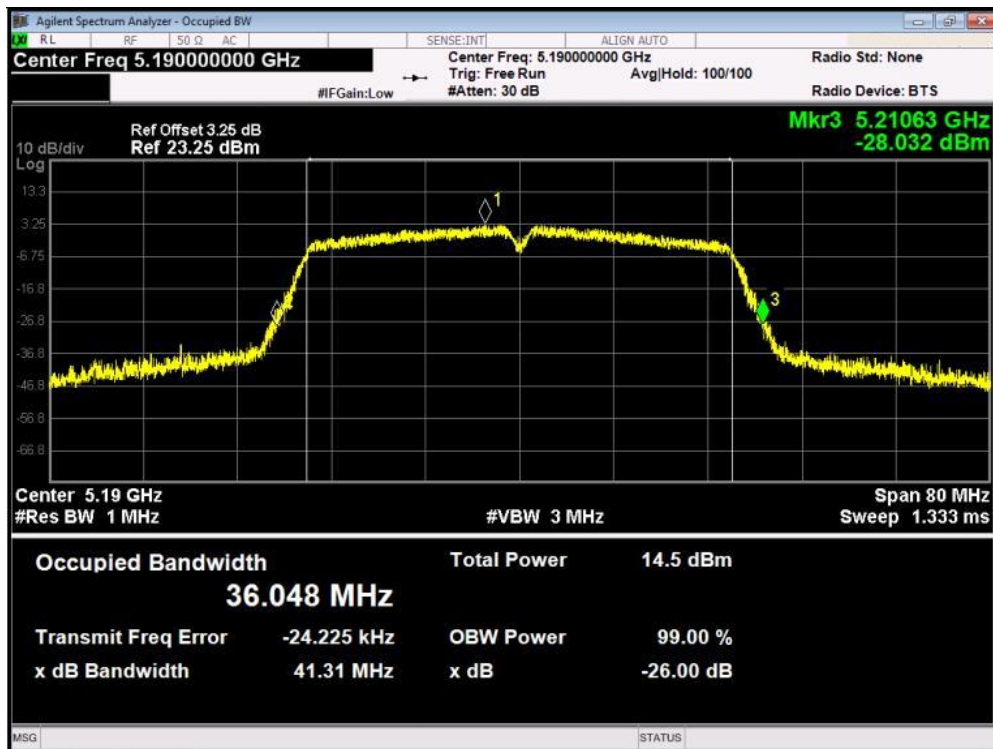

U-NII-1 ac(HT40) High CH 5230MHZ

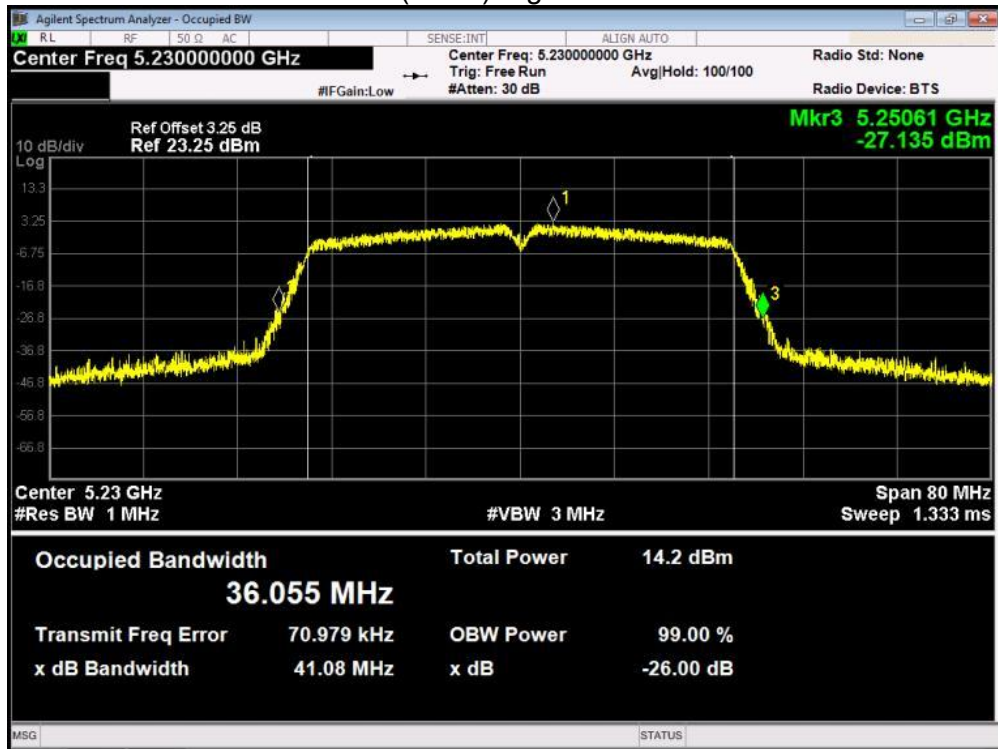

U-NII-1 ac(HT80) Low CH 5210MHZ

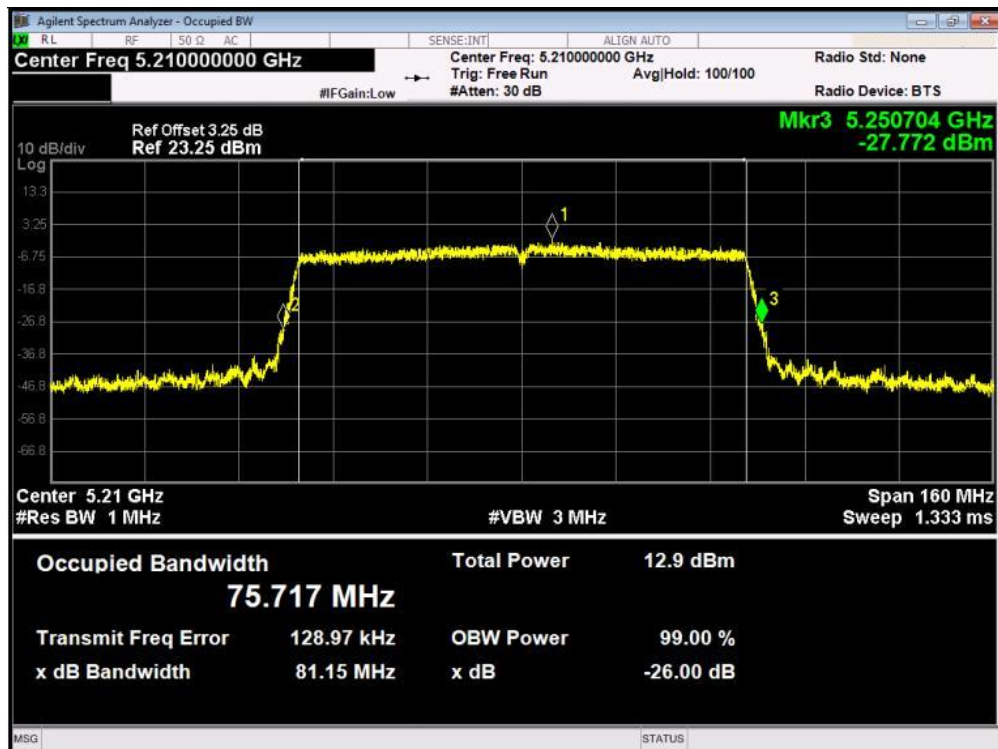


OBW
U-NII-1 11a Low CH 5180MHZ




U-NII-1 11a Middle CH 5200MHZ




U-NII-1 11a High CH 5240MHZ

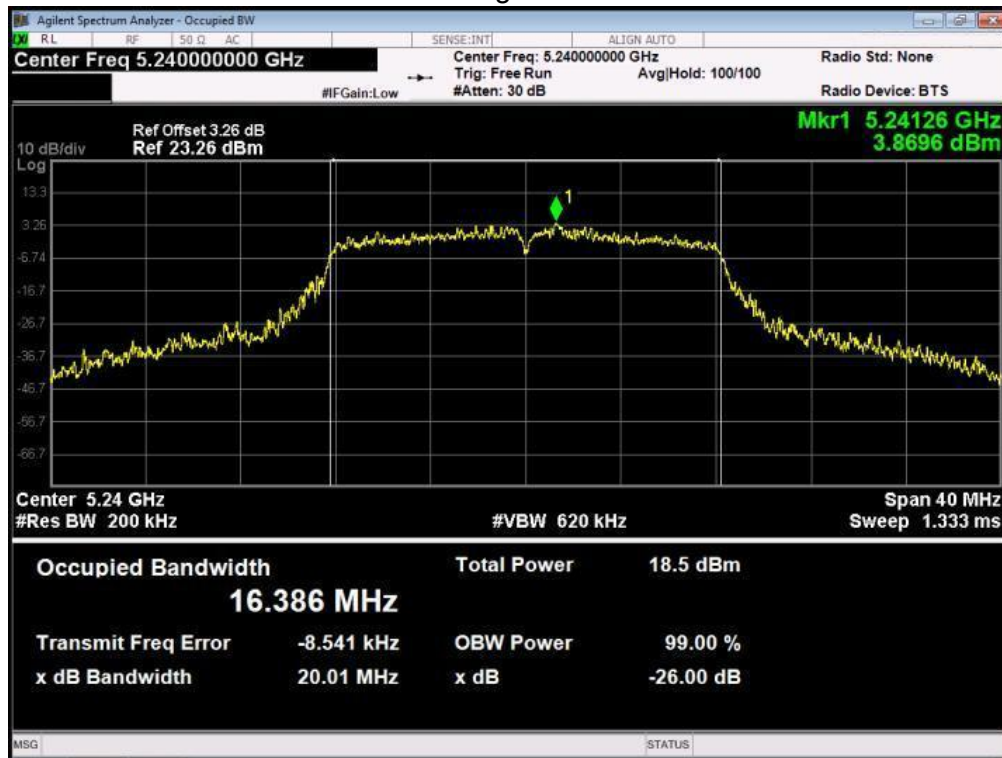

U-NII-1 11n(HT20) Low CH 5180MHZ

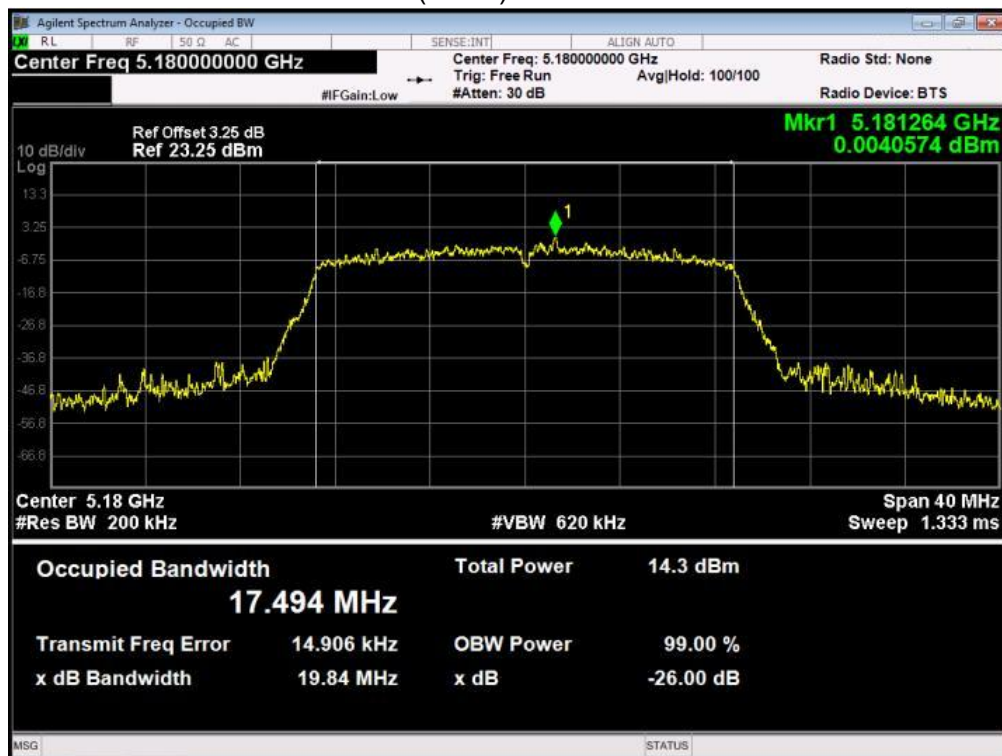

U-NII-1 11n(HT20) Middle CH 5200MHZ

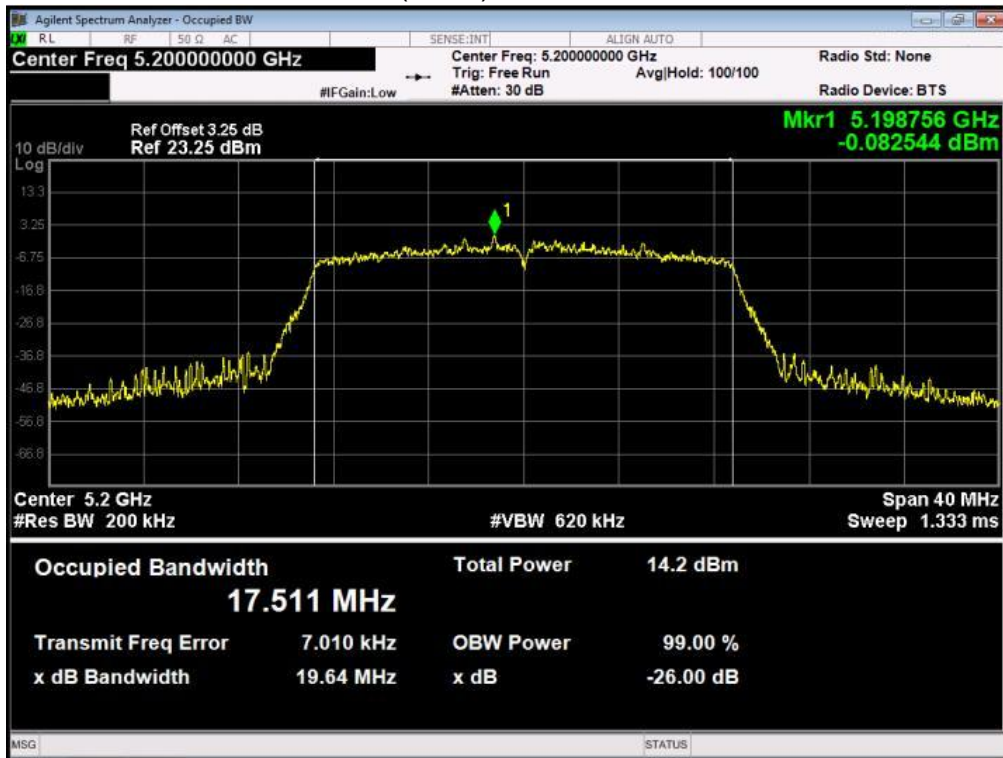

U-NII-1 11n(HT20)High CH 5240MHZ

