



# TEST REPORT


## FCC PART 15.247

Report Reference No.....: **CTL2404222091-WF**

Compiled by: Happy Guo  
( position+printed name+signature) (File administrators)

Tested by: Yapeng Jin  
( position+printed name+signature) (Test Engineer)

Approved by: Ivan Xie  
( position+printed name+signature) (Manager)

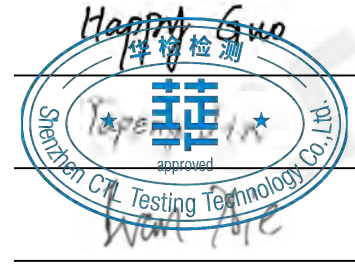

Product Name.....: Bluetooth module

Model/Type reference.....: CQ\_F20\_01

List Model(s).....: CQ\_F20

Trade Mark.....: N/A

FCC ID.....: **2BGTJ-CQ-F20**

Applicant's name.....: **Suzhou Chaoqiansi Information Technology Co., Ltd**

Address of applicant.....: Room 368, 3rd Floor, No. 80, Xihenggang Street, Yangcheng Lake Town, Xiangcheng District, Suzhou City

Test Firm.....: **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm.....: Zone A, 1st Floor, Warehouse 2, Baisha Logistics Company, No. 3011 Shahe West Road, Nanshan District, Shenzhen

Test specification.....:  
Standard.....: **FCC Part 15.247:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Date of receipt of test item.....: May 15, 2024

Date of Test Date.....: May 16, 2024 - May 28, 2024

Date of Issue.....: May 29, 2024

Result.....: **Pass**

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

<b>Test Report No. :</b>	<b>CTL2404222091-WF</b>	May 29, 2024 Date of issue
--------------------------	-------------------------	-------------------------------

Equipment under Test : Bluetooth module

Sample No : CTL2404222091

Model /Type : CQ\_F20\_01

Listed Models : CQ\_F20

**Applicant** : **Suzhou Chaoqiansi Information Technology Co., Ltd**

Address : Room 368, 3rd Floor, No. 80, Xihenggang Street,  
Yangcheng Lake Town, Xiangcheng District, Suzhou City

**Manufacturer** : **Suzhou Chaoqiansi Information Technology Co., Ltd**

Address : Room 368, 3rd Floor, No. 80, Xihenggang Street,  
Yangcheng Lake Town, Xiangcheng District, Suzhou City

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.



## Table of Contents

Page

<b>1. SUMMARY .....</b>	<b>5</b>
1.1. TEST STANDARDS .....	5
1.2. TEST DESCRIPTION .....	5
1.3. TEST FACILITY .....	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	6
1.5. EUT CONFIGURATION .....	7
<b>2. GENERAL INFORMATION .....</b>	<b>8</b>
2.1. ENVIRONMENTAL CONDITIONS .....	8
2.2. GENERAL DESCRIPTION OF EUT .....	8
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY .....	9
2.4. EQUIPMENTS USED DURING THE TEST .....	10
2.5. RELATED SUBMITTAL(S) / GRANT (S) .....	11
2.6. MODIFICATIONS .....	11
<b>3. TEST CONDITIONS AND RESULTS .....</b>	<b>12</b>
3.1. CONDUCTED EMISSIONS TEST .....	12
3.2. RADIATED EMISSIONS AND BAND EDGE .....	15
3.3. MAXIMUM CONDUCTED OUTPUT POWER .....	29
3.4. POWER SPECTRAL DENSITY .....	30
3.5. 6DB BANDWIDTH .....	31
3.6. OUT-OF-BAND EMISSIONS .....	32
3.7. ANTENNA REQUIREMENT .....	33
<b>4. TEST SETUP PHOTOS OF THE EUT .....</b>	<b>34</b>
<b>5. PHOTOS OF THE EUT .....</b>	<b>36</b>

# 1. SUMMARY

## 1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 v05r02](#): KDB558074 D01 15.247 Meas Guidance v05r02

## 1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co.,Ltd.

Zone A, 1st Floor, Warehouse 2, Baisha Logistics Company, No. 3011 Shahe West Road, Nanshan District, Shenzhen

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 32/EN 55032 requirements.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### IC Registration No.: 9618B

#### CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

#### FCC-Registration No.: 399832

#### Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

## 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power Radiated	±2.20 dB	(1)
Radiated Emission 9KHz~30MHz	±3.66dB	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
DTS Bandwidth	±1.9%	(1)
Maximum Conducted Output Power	± 1.18 dB	(1)

Maximum Power Spectral Density Level	$\pm 0.98$ dB	(1)
Band-edge	$\pm 1.21$ dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-7GHz: $\pm 1.09$ dB 7GHz-26.5GHz: $\pm 3.27$ dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 1.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

<input type="radio"/>	Notebook computer	Manufacturer :	Huawei Technologies Co Ltd
		Model No. :	KPL-W00
<input type="radio"/>	HUAWEI SuperCharge	Manufacturer :	Huawei Technologies Co Ltd.
		Model No. :	HW-200200CP1

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2. General Description of EUT

Product Name:	Bluetooth module
Model/Type reference:	CQ_F20_01
Power supply:	AC 120V/60Hz
<b>Bluetooth LE</b>	
Supported type:	Bluetooth Low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	PCB Antenna
Antenna gain:	-0.58dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.



## 2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 40 channels provided to the EUT and Channel 00/19/39 were selected for BLE test.

Test Modes	BLE 1M Continuous Transmitting	BLE 2M Continuous Transmitting
1	■	
2		■

### Operation Frequency List :

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
02	2404
03	2406
⋮	⋮
<b>19</b>	<b>2440</b>
⋮	⋮
37	2476
38	2478
<b>39</b>	<b>2480</b>

Note: The line display in grey were the channel selected for testing

## 2.4. Equipments Used during the Test

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2024/04/30	2025/04/29
	LISN	R&S	ESH2-Z5	860014/010	2024/04/30	2025/04/29
	Limitator	ROHDE & SCHWARZ	ESH3-Z2	100408	2024/04/30	2025/04/29
Software:						
Name of Software:				Version:		
ES-K1				V1.71		

Radiated Emissions and Band Edge					
Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Active Loop Antenna	Da Ze	ZN30900A	/	2024/04/30	2025/04/29
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/12/23	2024/12/22
Amplifier	Agilent	8449B	3008A02306	2024/04/30	2025/04/29
Amplifier	Brief&Smart	LNA-4018	2104197	2024/05/03	2025/05/02
EMI Test Receiver	R&S	ESCI	1166.5950.03	2024/04/30	2025/04/29
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/05/01	2025/04/30
Test software					
Name of Software			Version		
EZ_EMG(Below 1GHz)			V1.1.4.2		
EZ_EMG(Above 1GHz)			V1.1.4.2		

Maximum Peak Output Power & 20dB Bandwidth & Frequency Separation & Number of hopping frequency & Dwell Time & Out-of-band Emissions					
Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/05/01	2025/04/30
Temperature/Humidity Meter	Ji Yu	MC501	/	2024/05/04	2025/05/03
Test Software					
Name of Software			Version		
TST-PASS			V2.0		

## **2.5. Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## **2.6. Modifications**

No modifications were implemented to meet testing criteria.

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emissions Test


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

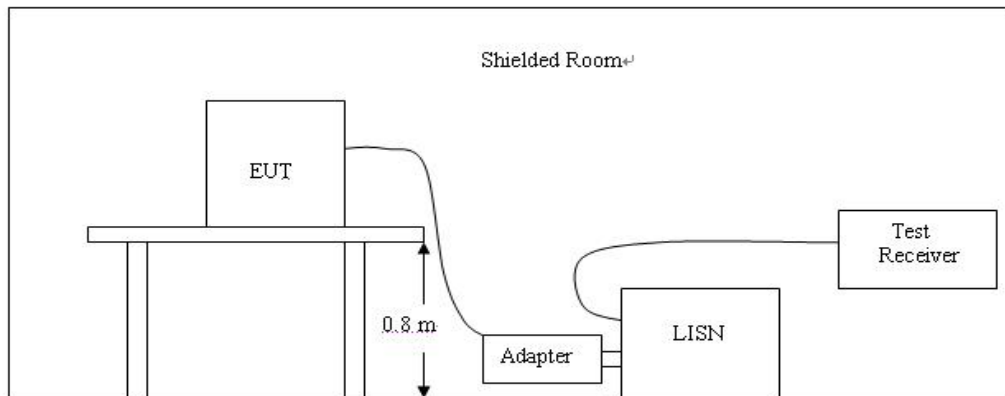

##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

**TEST RESULTS**

Remark: All modes were test at , only the worst result of Test mode 2 was reported as below:

Line:	L																																																								
<p><b>Shenzhen CTL Testing Technology Co., Ltd.</b></p> <p><b>Voltage Mains Test FCC PART 15 C</b></p> <p>EUT: CQ_F20_01                      Manufacturer: Suzhou Chaoqiansi Information Technology Co., Ltd                      Operating Condition: BLE2M 2402MHz                      Test Site: /                      Operator: JYP                      Test Specification: AC 120V/60Hz                      Comment: /                      Start of Test: 5/22/2024 / 7:47:35PM</p> <p><b>SCAN TABLE: "Voltage (9K-30M)FIN"</b>                      Short Description: 150K-30M Voltage</p>																																																									
<p>The figure is a spectrum plot with 'Level [dBµV]' on the y-axis (ranging from -10 to 70) and 'Frequency [Hz]' on the x-axis (logarithmic scale from 150k to 30M). There are four main traces: a red trace starting at ~65 dBµV at 150k Hz and ending at ~60 dBµV at 30M Hz; a blue trace starting at ~55 dBµV at 150k Hz and ending at ~50 dBµV at 30M Hz; a green trace fluctuating between 10 and 30 dBµV; and a magenta trace fluctuating between 5 and 20 dBµV. There are also dashed horizontal lines at 60, 50, 40, 30, 20, and 10 dBµV.</p>																																																									
<p>x x *MES CTL240522903_fin</p>																																																									
<p><b>MEASUREMENT RESULT: "CTL240522903_fin"</b></p> <p>5/22/2024 7:50PM</p> <table border="1"> <thead> <tr> <th>Frequency MHz</th> <th>Level dBµV</th> <th>Transd dB</th> <th>Limit dBµV</th> <th>Margin dB</th> <th>Detector</th> <th>Line</th> <th>PE</th> </tr> </thead> <tbody> <tr> <td>0.510000</td> <td>26.30</td> <td>10.0</td> <td>56</td> <td>29.7</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>3.691500</td> <td>24.40</td> <td>10.1</td> <td>56</td> <td>31.6</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>4.555500</td> <td>24.60</td> <td>10.1</td> <td>56</td> <td>31.4</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>4.623000</td> <td>24.40</td> <td>10.1</td> <td>56</td> <td>31.6</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>6.643500</td> <td>24.00</td> <td>10.3</td> <td>60</td> <td>36.0</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>7.035000</td> <td>24.40</td> <td>10.3</td> <td>60</td> <td>35.6</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> </tbody> </table>		Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	0.510000	26.30	10.0	56	29.7	QP	L1	GND	3.691500	24.40	10.1	56	31.6	QP	L1	GND	4.555500	24.60	10.1	56	31.4	QP	L1	GND	4.623000	24.40	10.1	56	31.6	QP	L1	GND	6.643500	24.00	10.3	60	36.0	QP	L1	GND	7.035000	24.40	10.3	60	35.6	QP	L1	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE																																																		
0.510000	26.30	10.0	56	29.7	QP	L1	GND																																																		
3.691500	24.40	10.1	56	31.6	QP	L1	GND																																																		
4.555500	24.60	10.1	56	31.4	QP	L1	GND																																																		
4.623000	24.40	10.1	56	31.6	QP	L1	GND																																																		
6.643500	24.00	10.3	60	36.0	QP	L1	GND																																																		
7.035000	24.40	10.3	60	35.6	QP	L1	GND																																																		
<p><b>MEASUREMENT RESULT: "CTL240522903_fin2"</b></p> <p>5/22/2024 7:50PM</p> <table border="1"> <thead> <tr> <th>Frequency MHz</th> <th>Level dBµV</th> <th>Transd dB</th> <th>Limit dBµV</th> <th>Margin dB</th> <th>Detector</th> <th>Line</th> <th>PE</th> </tr> </thead> <tbody> <tr> <td>2.031000</td> <td>19.00</td> <td>10.1</td> <td>46</td> <td>27.0</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>2.539500</td> <td>19.10</td> <td>10.1</td> <td>46</td> <td>26.9</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>3.727500</td> <td>17.80</td> <td>10.1</td> <td>46</td> <td>28.2</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>4.155000</td> <td>17.10</td> <td>10.1</td> <td>46</td> <td>28.9</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>4.560000</td> <td>16.90</td> <td>10.1</td> <td>46</td> <td>29.1</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>4.978500</td> <td>17.00</td> <td>10.1</td> <td>46</td> <td>29.0</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> </tbody> </table>		Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	2.031000	19.00	10.1	46	27.0	AV	L1	GND	2.539500	19.10	10.1	46	26.9	AV	L1	GND	3.727500	17.80	10.1	46	28.2	AV	L1	GND	4.155000	17.10	10.1	46	28.9	AV	L1	GND	4.560000	16.90	10.1	46	29.1	AV	L1	GND	4.978500	17.00	10.1	46	29.0	AV	L1	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE																																																		
2.031000	19.00	10.1	46	27.0	AV	L1	GND																																																		
2.539500	19.10	10.1	46	26.9	AV	L1	GND																																																		
3.727500	17.80	10.1	46	28.2	AV	L1	GND																																																		
4.155000	17.10	10.1	46	28.9	AV	L1	GND																																																		
4.560000	16.90	10.1	46	29.1	AV	L1	GND																																																		
4.978500	17.00	10.1	46	29.0	AV	L1	GND																																																		


Line:	N
-------	---

**Shenzhen CTL Testing Technology Co., Ltd.**

**Voltage Mains Test FCC PART 15 C**

EUT: CQ\_F20\_01  
 Manufacturer: Suzhou Chaoqiansi Information Technology Co., Ltd  
 Operating Condition: BLE2M 2402MHz  
 Test Site: /  
 Operator: JYP  
 Test Specification: AC 120V/60Hz  
 Comment: /  
 Start of Test: 5/22/2024 / 7:50:26PM

**SCAN TABLE: "Voltage (9K-30M) FIN"**  
 Short Description: 150K-30M Voltage

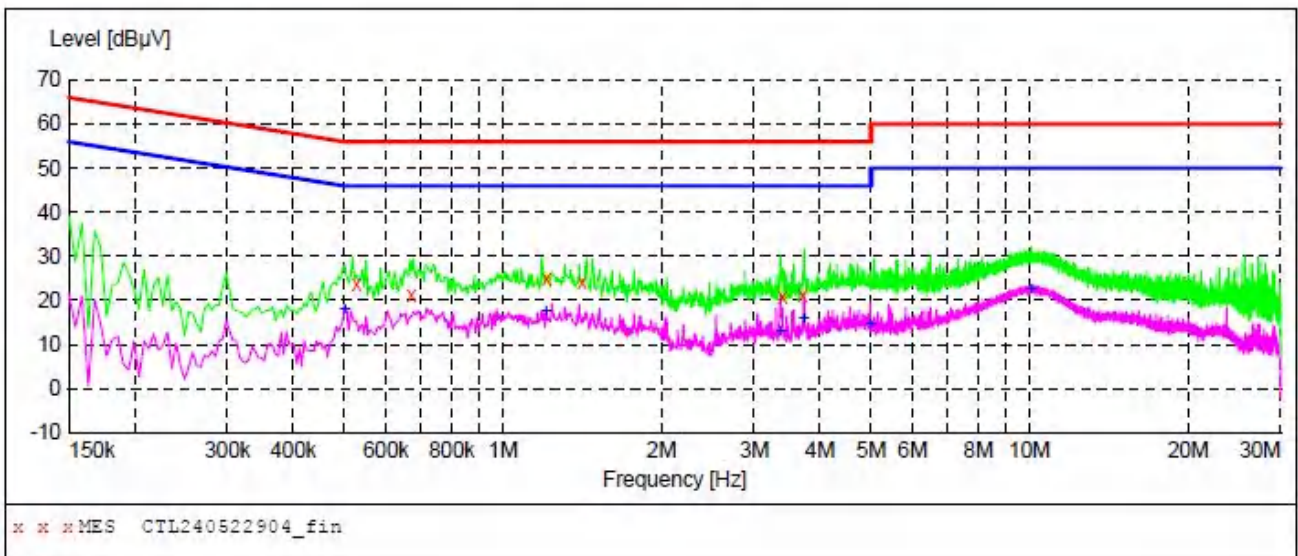

**MEASUREMENT RESULT: "CTL240522904\_fin"**

5/22/2024 7:52PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.528000	23.50	10.0	56	32.5	QP	N	GND
0.672000	21.30	10.0	56	34.7	QP	N	GND
1.212000	25.10	10.1	56	30.9	QP	N	GND
1.414500	24.00	10.1	56	32.0	QP	N	GND
3.394500	20.70	10.1	56	35.3	QP	N	GND
3.709500	21.10	10.1	56	34.9	QP	N	GND

**MEASUREMENT RESULT: "CTL240522904\_fin2"**

5/22/2024 7:52PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.501000	18.10	10.0	46	27.9	AV	N	GND
1.207500	17.50	10.1	46	28.5	AV	N	GND
3.367500	13.00	10.1	46	33.0	AV	N	GND
3.723000	16.00	10.1	46	30.0	AV	N	GND
4.978500	14.60	10.1	46	31.4	AV	N	GND
10.068000	22.50	10.7	50	27.5	AV	N	GND

### 3.2. Radiated Emissions and Band Edge

#### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

#### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

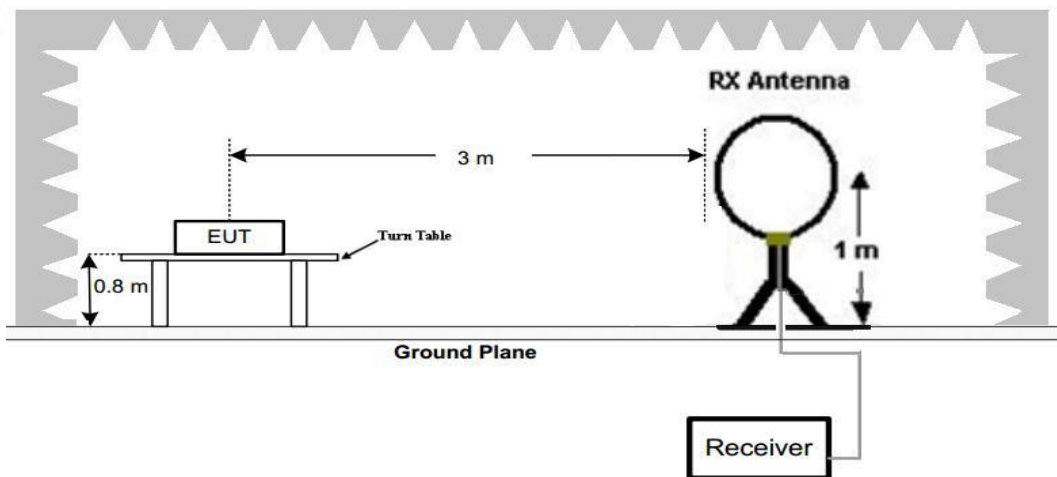

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

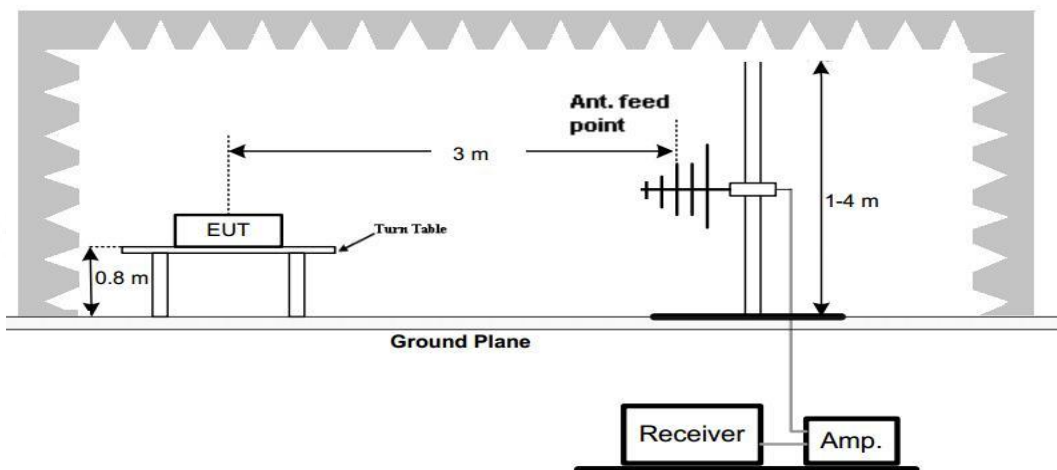

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

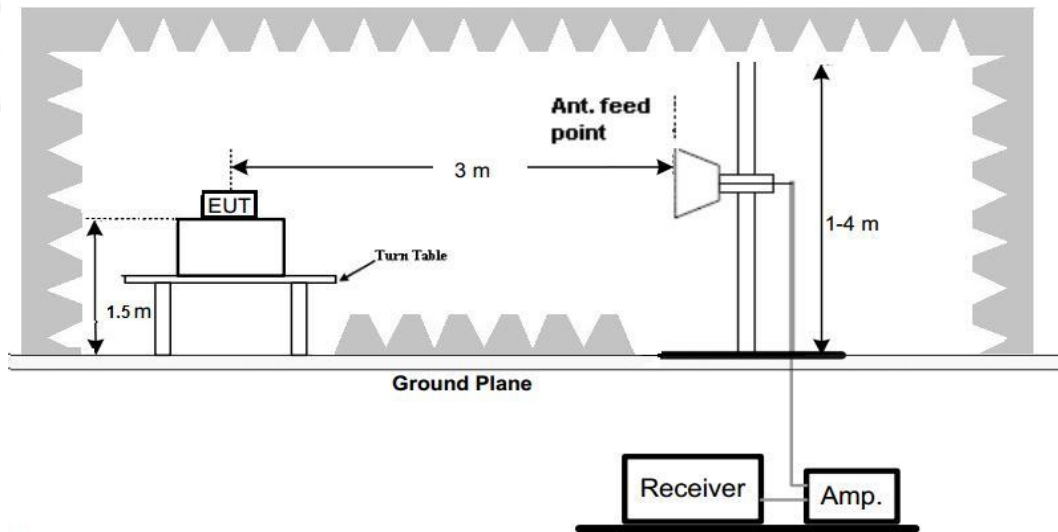

### Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

### TEST RESULTS

Remark:

1. We have tested low channel, middle channel, high channel of all modes. Only the low channel of test mode 2 was recorded..
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, Found the emission level are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.




For 30MHz-1GHz

Horizontal



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

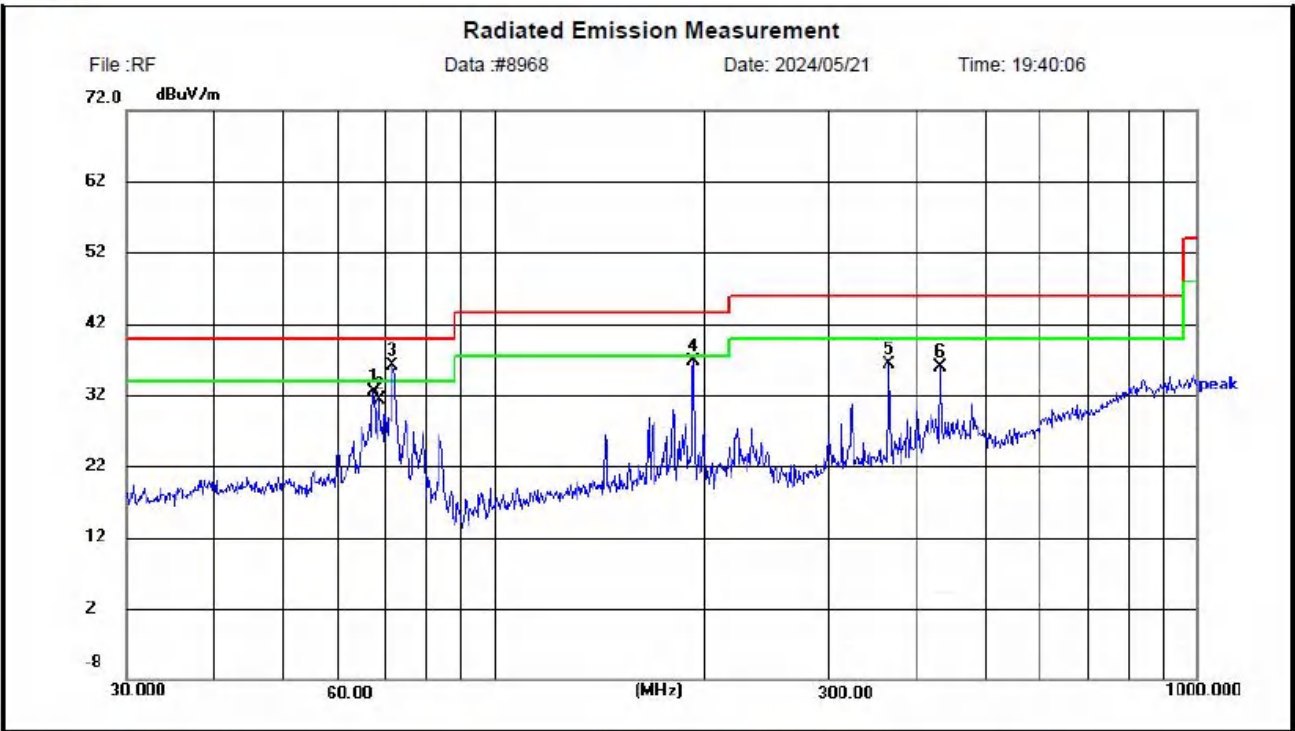

Site: LAB Chamber 2      Polarization: **Horizontal**      Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_30-1000MHz      Power:      Humidity: 50 %  
 EUT: /      Distance: 3m  
 M/N: CQ\_F20\_01  
 Mode: BLE2M 2402MHz  
 Note: Suzhou Chaoqiansi Information Technology Co., Ltd


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	67.3201	19.97	12.50	32.47	40.00	7.53	peak	100	324	P	
2	68.7514	19.14	12.08	31.22	40.00	8.78	peak	100	317	P	
3	72.0526	24.58	11.43	36.01	40.00	3.99	peak	100	313	P	
4	192.5029	25.22	11.44	36.66	43.50	6.84	peak	100	7	P	
5	366.6623	19.99	16.30	36.29	46.00	9.71	peak	100	262	P	
6	431.9772	17.73	18.10	35.83	46.00	10.17	peak	100	262	P	

Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

Radiated Emission Measurement

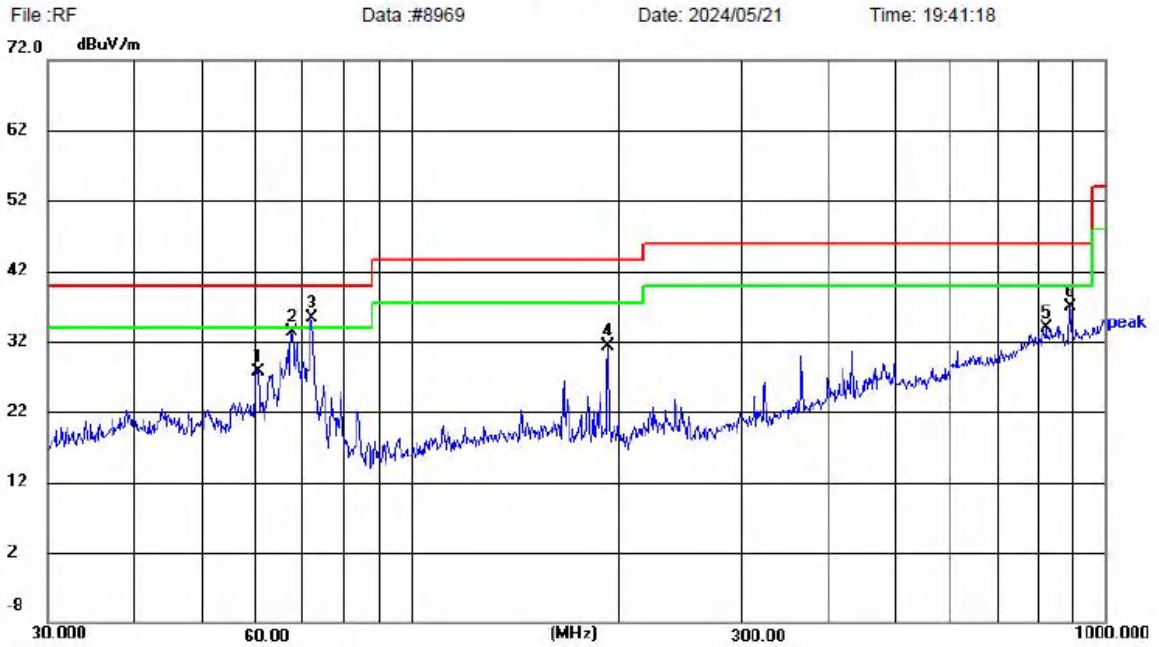

Site LAB Chamber 2  
Limit: FCC Part15 RE-Class C\_30-1000MHz  
EUT: /  
M/N: CQ\_F20\_01  
Mode: BLE2M 2402MHz  
Note: Suzhou Chaoqiansi Information Technology Co., Ltd

Polarization: **Vertical**  
Power:  
Distance: 3m


Temperature: 25(C)  
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	60.1482	13.79	13.97	27.76	40.00	12.24	peak	100	263	P	
2	67.4087	20.81	12.48	33.29	40.00	6.71	peak	100	252	P	
3	72.0528	23.91	11.44	35.35	40.00	4.65	peak	100	252	P	
4	192.5029	19.87	11.44	31.31	43.50	12.19	peak	100	20	P	
5	823.8743	8.05	25.90	33.95	46.00	12.05	peak	100	304	P	
6	889.9473	10.64	26.30	36.94	46.00	9.06	peak	100	8	P	

**For 1GHz-18GHz**

Note: All modes are tested, and only the worst mode above is captured (Test Mode 2).

**BLE Mode (above 1GHz)**

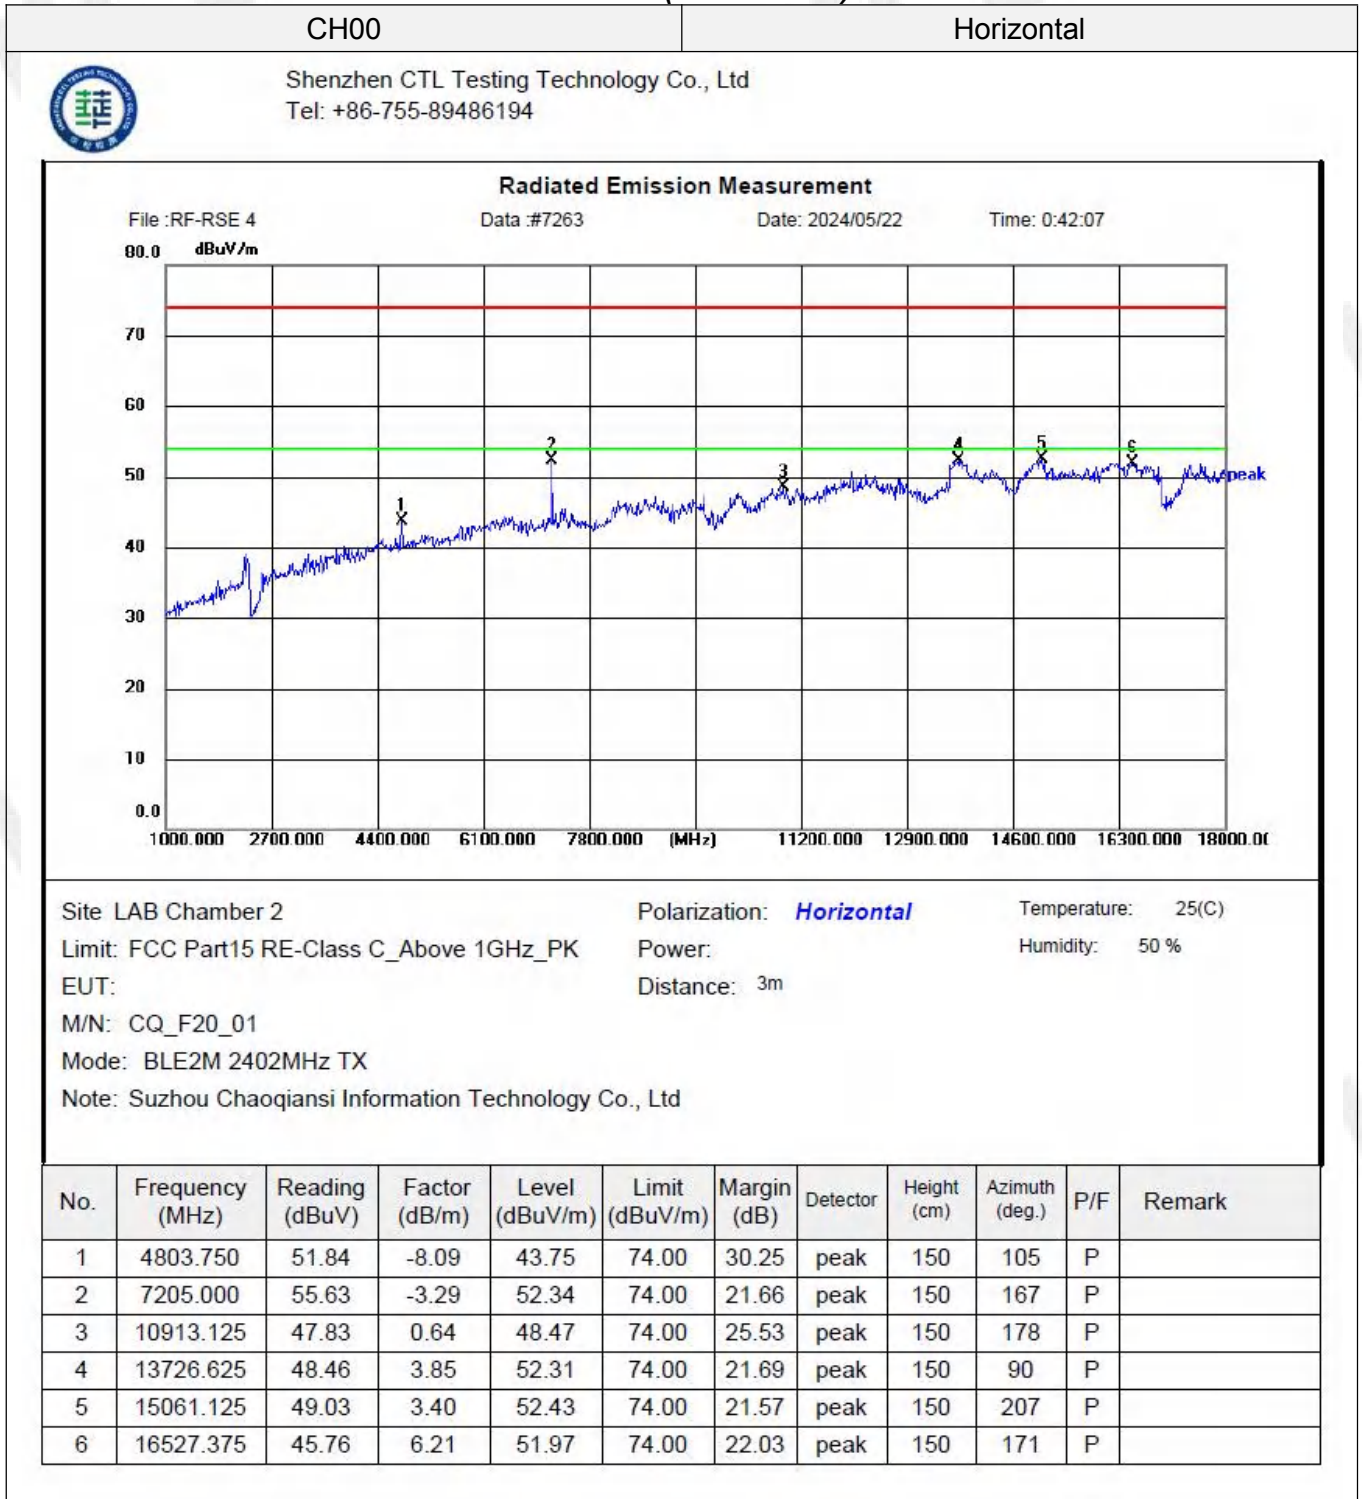

CH00

Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**


File :RF-RSE 4

Data :#7264

Date: 2024/05/22

Time: 0:43:19

80.0 dBuV/m

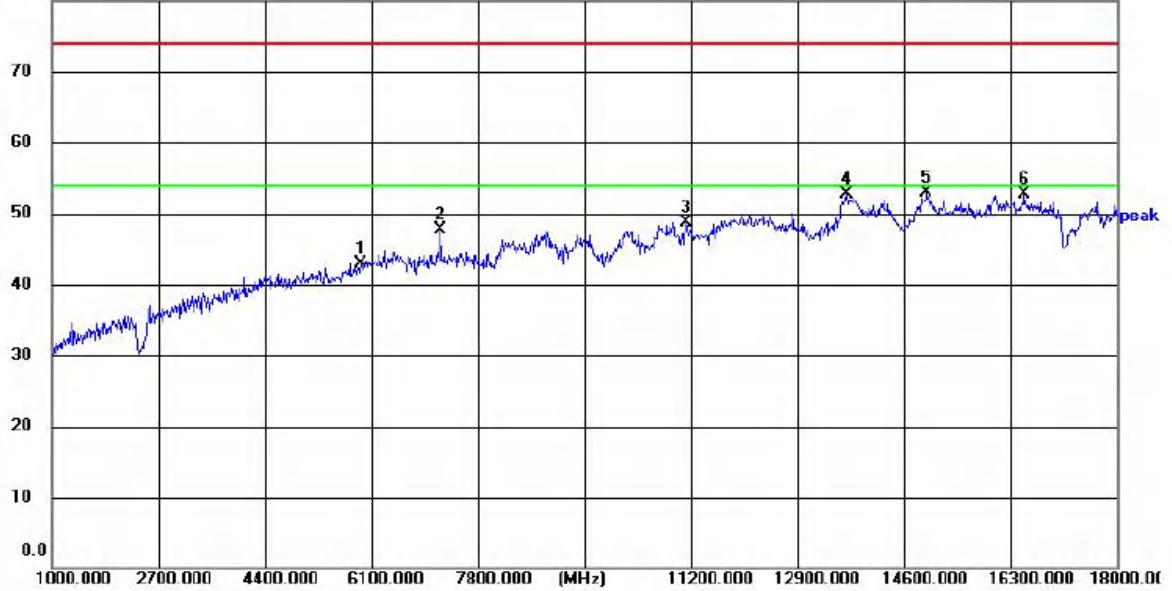

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: CQ\_F20\_01

Mode: BLE2M 2402MHz TX

Note: Suzhou Chaoqiansi Information Technology Co., Ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5938.500	48.83	-5.88	42.95	74.00	31.05	peak	150	354	P	
2	7205.000	50.96	-3.29	47.67	74.00	26.33	peak	150	255	P	
3	11127.750	47.95	0.79	48.74	74.00	25.26	peak	150	332	P	
4	13682.000	48.79	3.91	52.70	74.00	21.30	peak	150	358	P	
5	14961.250	49.70	3.26	52.96	74.00	21.04	peak	150	29	P	
6	16527.375	46.51	6.21	52.72	74.00	21.28	peak	150	161	P	

CH19

Horizontal



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**


File :RF-RSE 4

Data :#7261

Date: 2024/05/22

Time: 0:38:15

80.0 dBuV/m

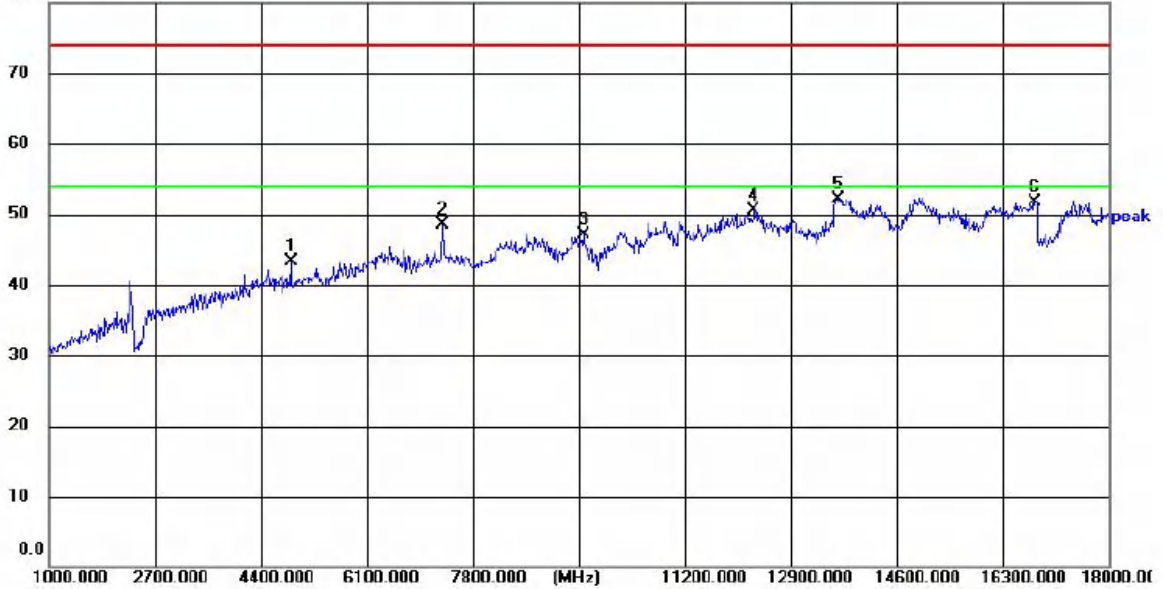

Site LAB Chamber 2

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: CQ\_F20\_01

Mode: BLE2M 2440MHz TX

Note: Suzhou Chaoqiansi Information Technology Co., Ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4880.250	51.35	-7.96	43.39	74.00	30.61	peak	150	94	P	
2	7317.625	51.44	-2.98	48.46	74.00	25.54	peak	150	25	P	
3	9568.000	46.74	0.38	47.12	74.00	26.88	peak	150	36	P	
4	12307.125	48.42	2.18	50.60	74.00	23.40	peak	150	330	P	
5	13660.750	48.21	3.93	52.14	74.00	21.86	peak	150	36	P	
6	16824.875	45.13	6.60	51.73	74.00	22.27	peak	150	330	P	

CH19

Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**


File :RF-RSE 4

Data #7262

Date: 2024/05/22

Time: 0:39:28

80.0 dBuV/m

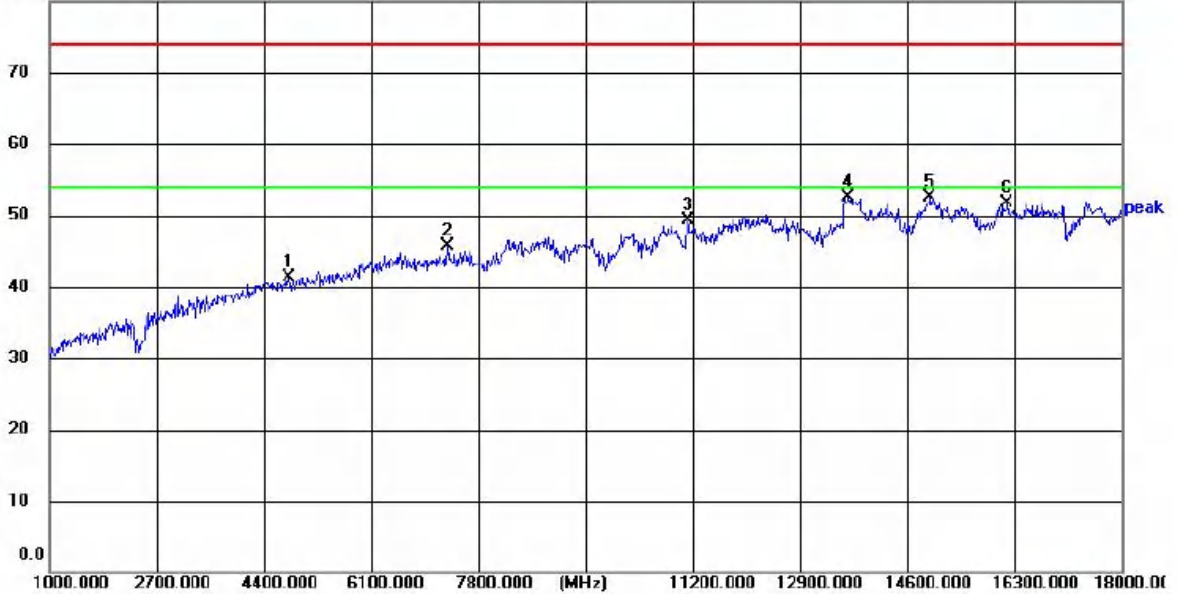

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: CQ\_F20\_01

Mode: BLE2M 2440MHz TX

Note: Suzhou Chaoqiansi Information Technology Co., Ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4791.000	49.36	-8.12	41.24	74.00	32.76	peak	150	94	P	
2	7317.625	48.60	-2.98	45.62	74.00	28.38	peak	150	43	P	
3	11125.625	48.57	0.79	49.36	74.00	24.64	peak	150	29	P	
4	13679.875	48.55	3.92	52.47	74.00	21.53	peak	150	190	P	
5	14965.500	49.20	3.26	52.46	74.00	21.54	peak	150	11	P	
6	16189.500	46.58	5.21	51.79	74.00	22.21	peak	150	197	P	


CH39

Horizontal




Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

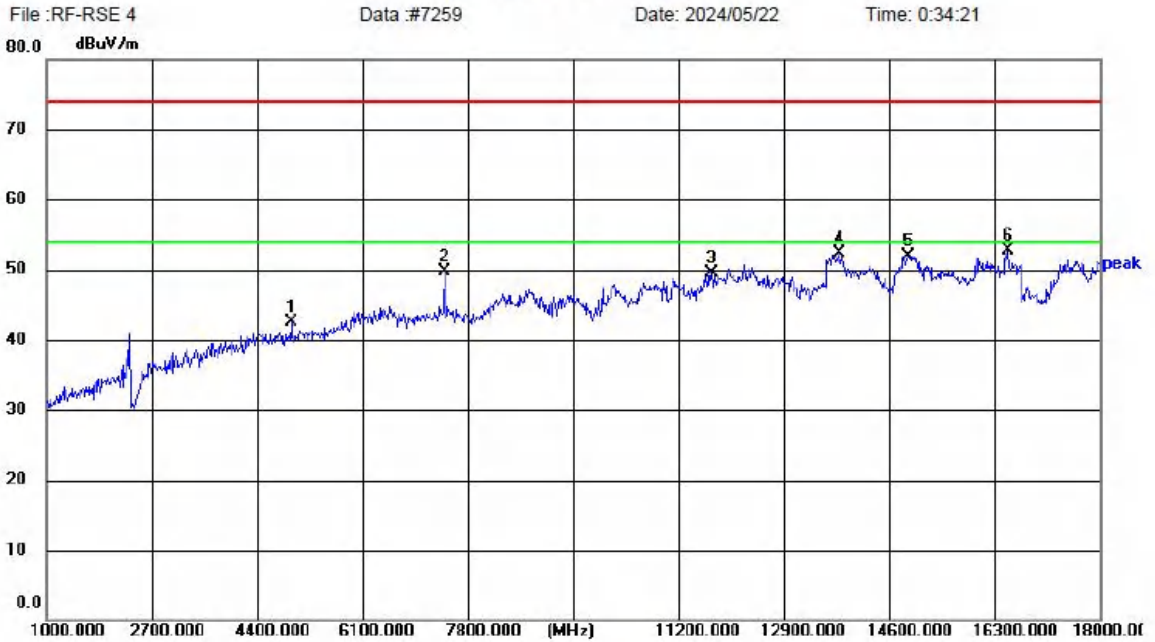

Site LAB Chamber 2      Polarization: *Horizontal*      Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK      Power:      Humidity: 50 %  
 EUT:      Distance: 3m  
 M/N: CQ\_F20\_01  
 Mode: BLE2M 2480MHz TX  
 Note: Suzhou Chaoqiansi Information Technology Co., Ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4958.875	50.33	-7.85	42.48	74.00	31.52	peak	150	130	P	
2	7438.750	52.44	-2.81	49.63	74.00	24.37	peak	150	17	P	
3	11729.125	47.95	1.47	49.42	74.00	24.58	peak	150	134	P	
4	13798.875	48.56	3.73	52.29	74.00	21.71	peak	150	39	P	
5	14914.500	48.76	3.18	51.94	74.00	22.06	peak	150	21	P	
6	16512.500	46.46	6.20	52.66	74.00	21.34	peak	150	339	P	

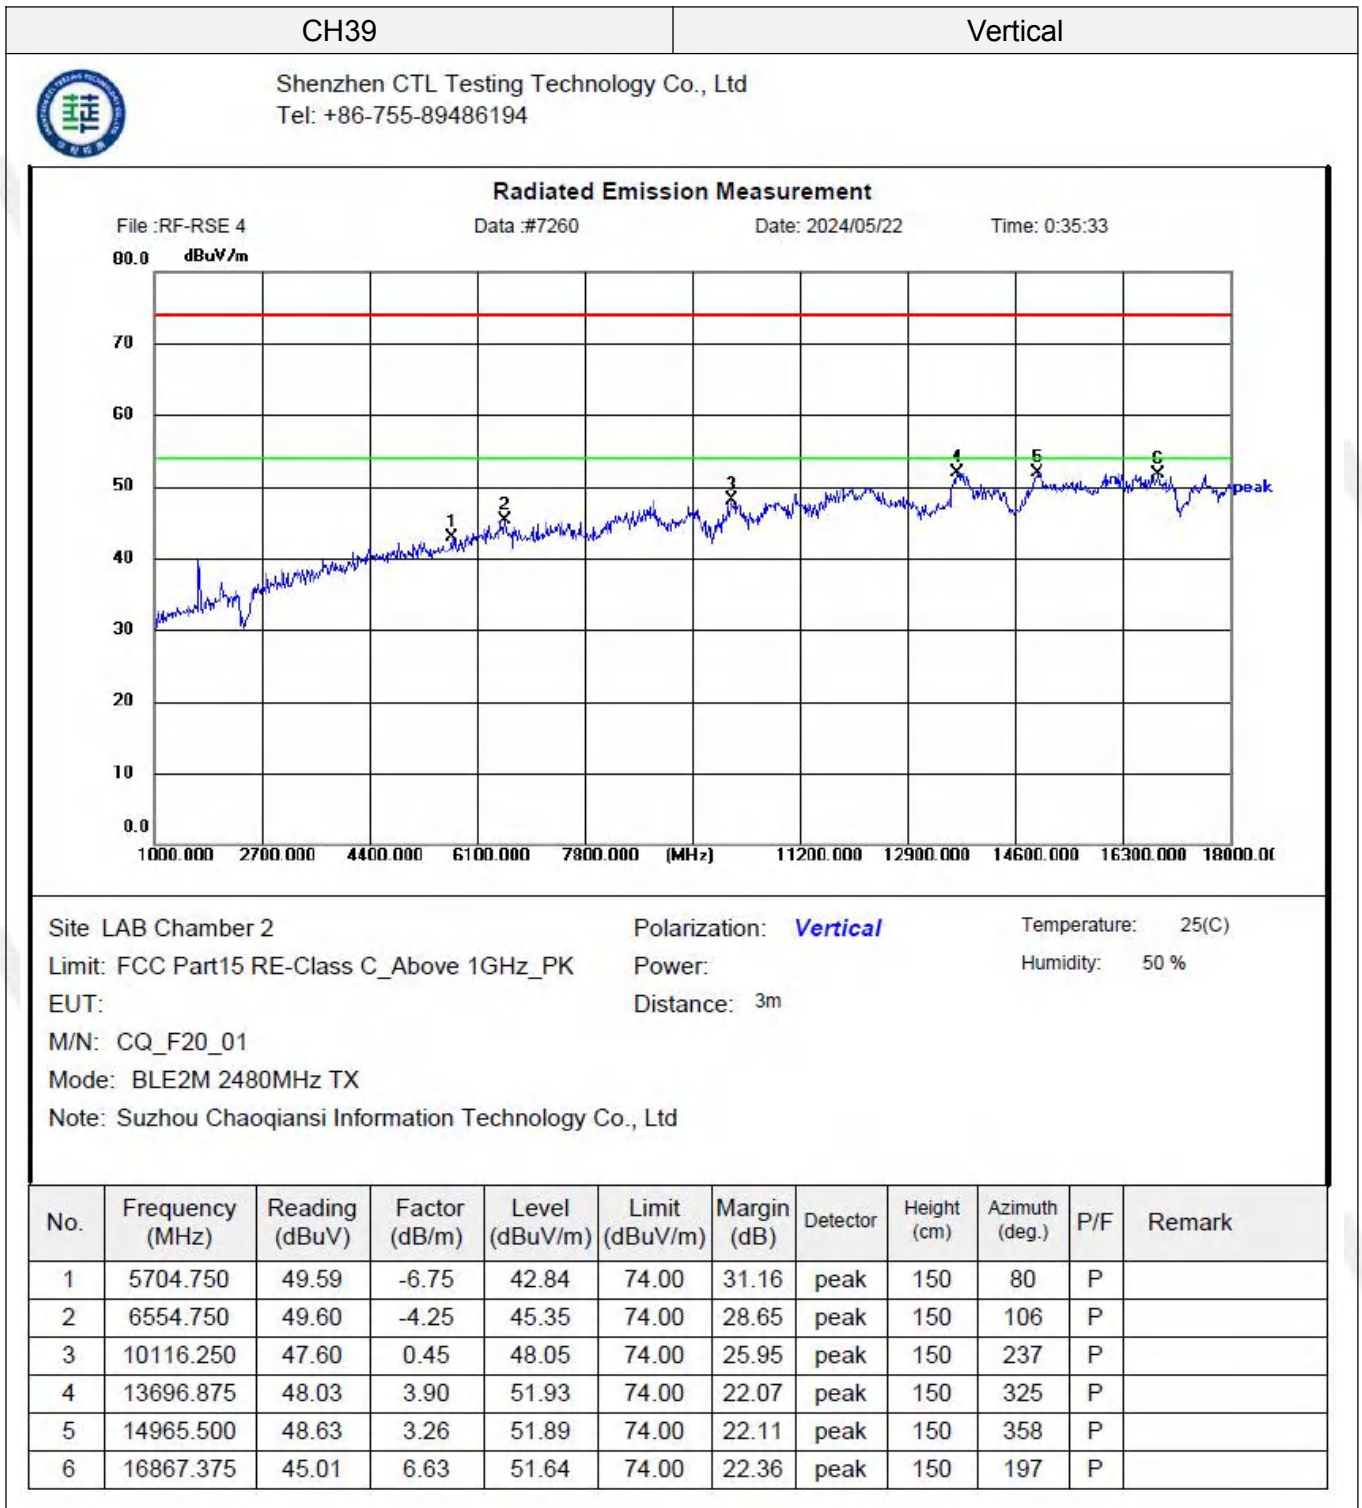


**REMARKS:**

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. PK detector measurement value is lower than the average limit. Therefore, there is no need to test AV detector measurements.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded in report.
7. 18GHz-26GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.



**Results of Band Edges Test (Radiated)**

Note: All models have been tested, only worse case Test mode 2 is reported.

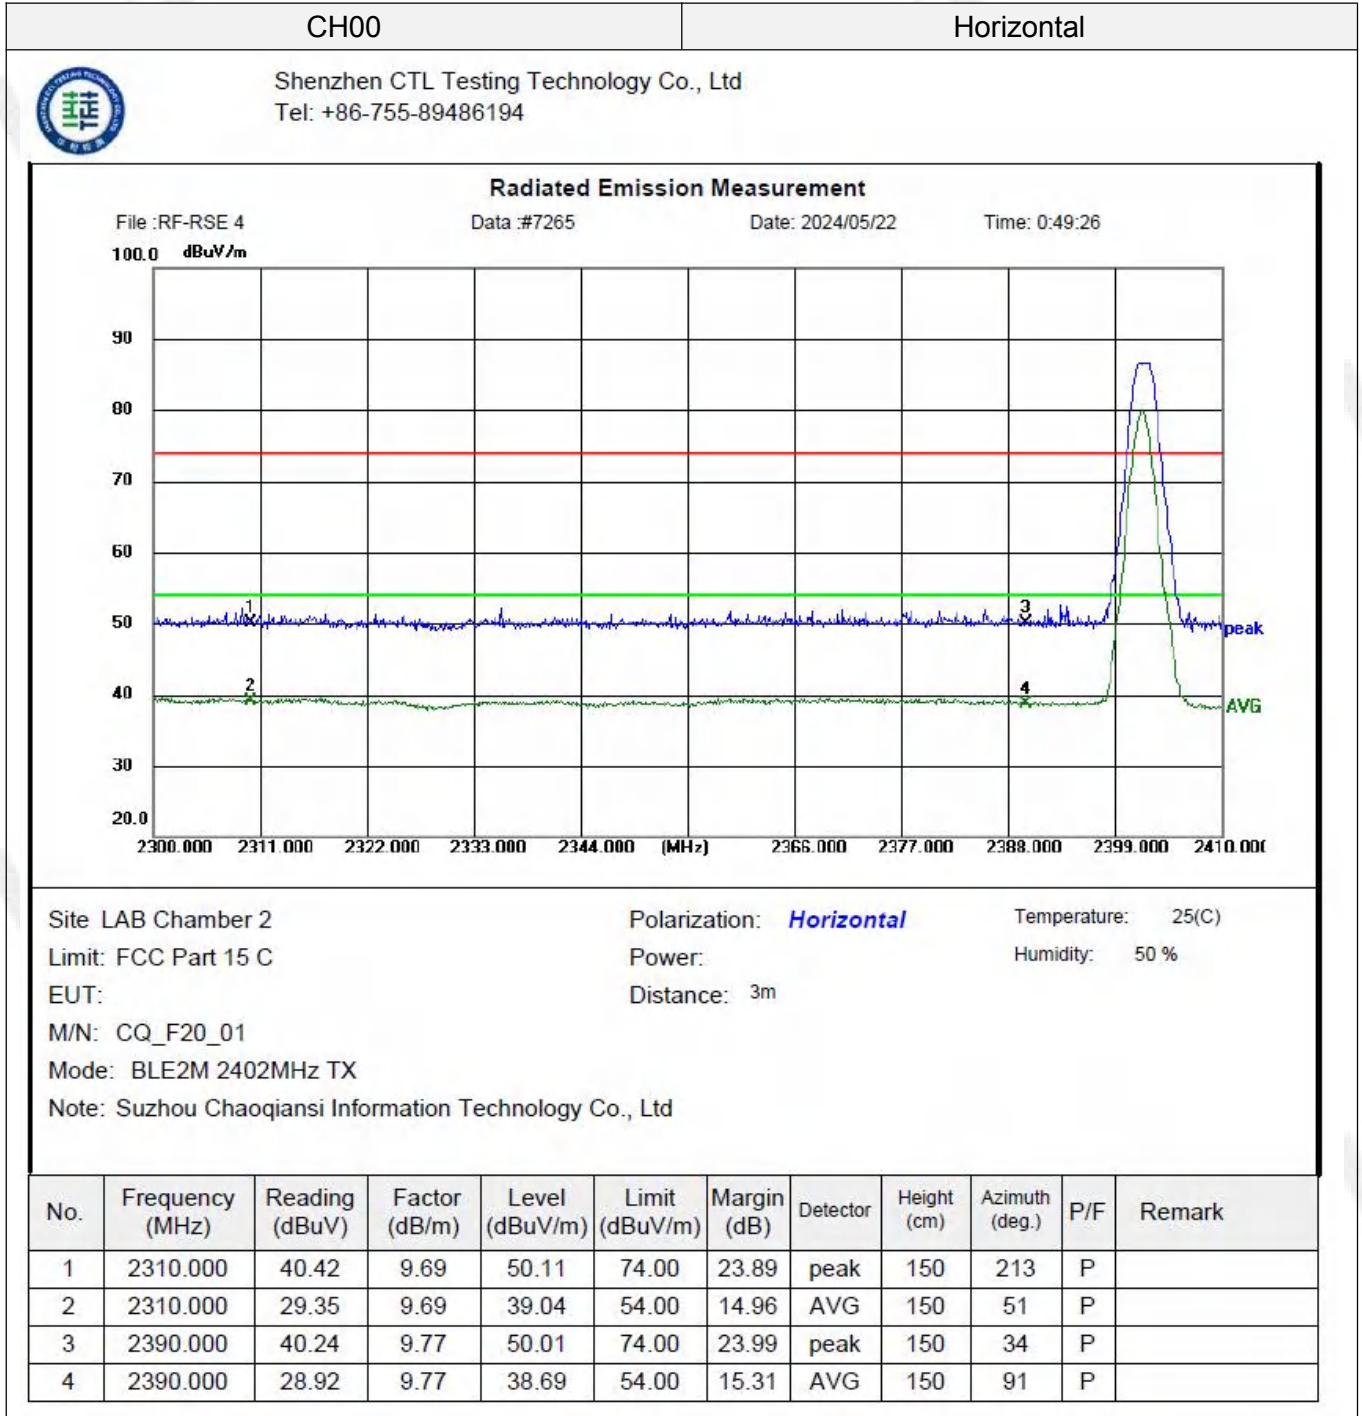

CH00

Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**


File :RF-RSE 4

Data :#7266

Date: 2024/05/22

Time: 0:50:39

100.0 dBuV/m

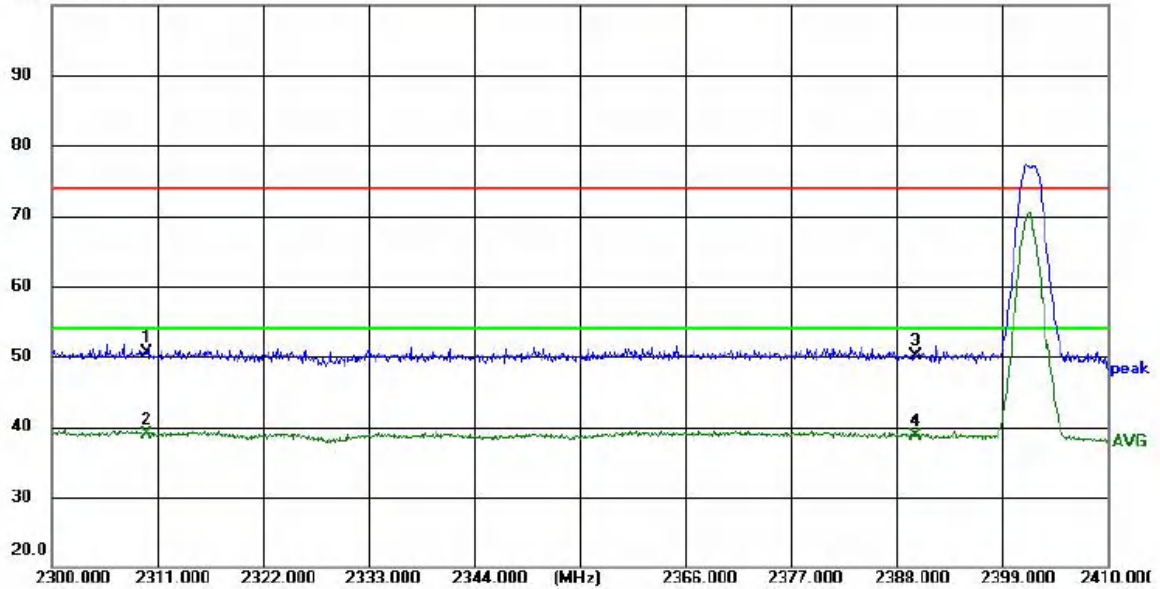

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part 15 C

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: CQ\_F20\_01

Mode: BLE2M 2402MHz TX

Note: Suzhou Chaoqiansi Information Technology Co., Ltd


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	40.87	9.69	50.56	74.00	23.44	peak	150	48	P	
2	2310.000	29.22	9.69	38.91	54.00	15.09	AVG	150	138	P	
3	2390.000	40.34	9.77	50.11	74.00	23.89	peak	150	342	P	
4	2390.000	28.90	9.77	38.67	54.00	15.33	AVG	150	342	P	

CH39

Horizontal



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

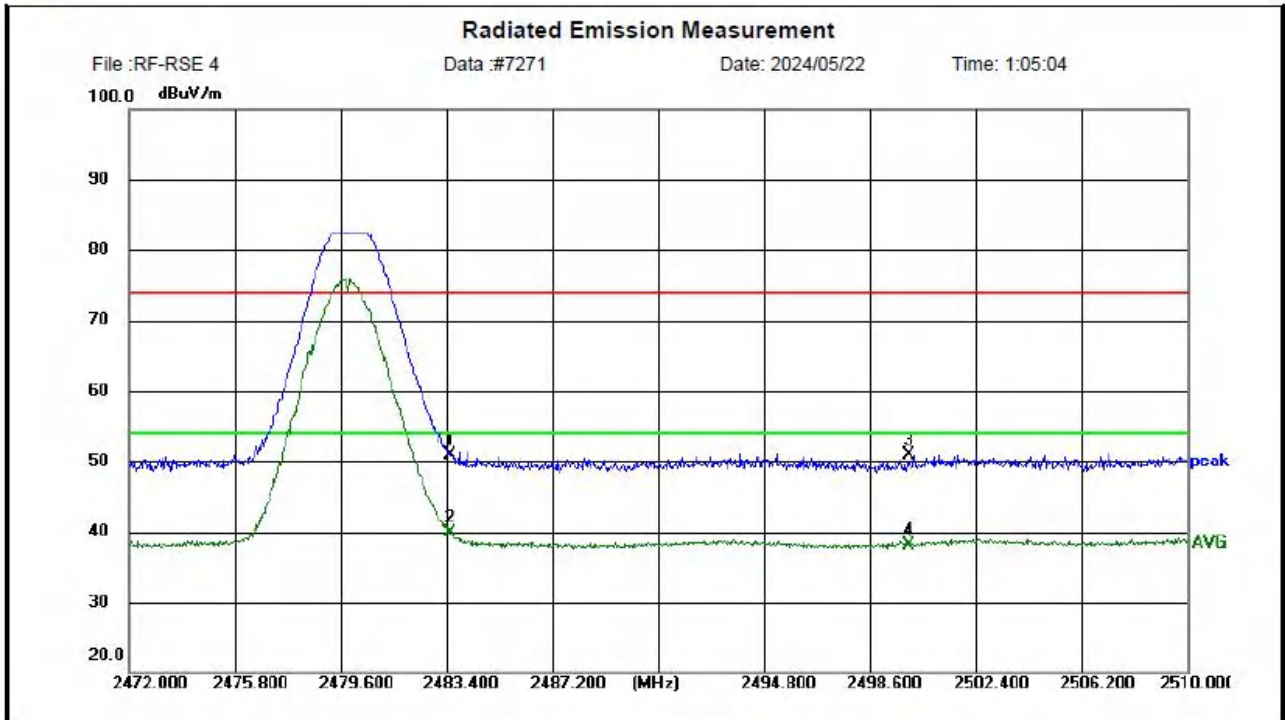

Site LAB Chamber 2  
Limit: FCC Part 15 C  
EUT:  
M/N: CQ\_F20\_01  
Mode: BLE2M 2480MHz TX  
Note: Suzhou Chaoqiansi Information Technology Co., Ltd

Polarization: **Horizontal**  
Power:  
Distance: 3m

Temperature: 25(C)  
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	40.92	9.93	50.85	74.00	23.15	peak	150	295	P	
2	2483.500	29.90	9.93	39.83	54.00	14.17	AVG	150	230	P	
3	2500.000	40.84	10.00	50.84	74.00	23.16	peak	150	205	P	
4	2500.000	28.17	10.00	38.17	54.00	15.83	AVG	150	17	P	

CH39


Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

File :RF-RSE 4      Data :#7272      Date: 2024/05/22      Time: 1:06:17

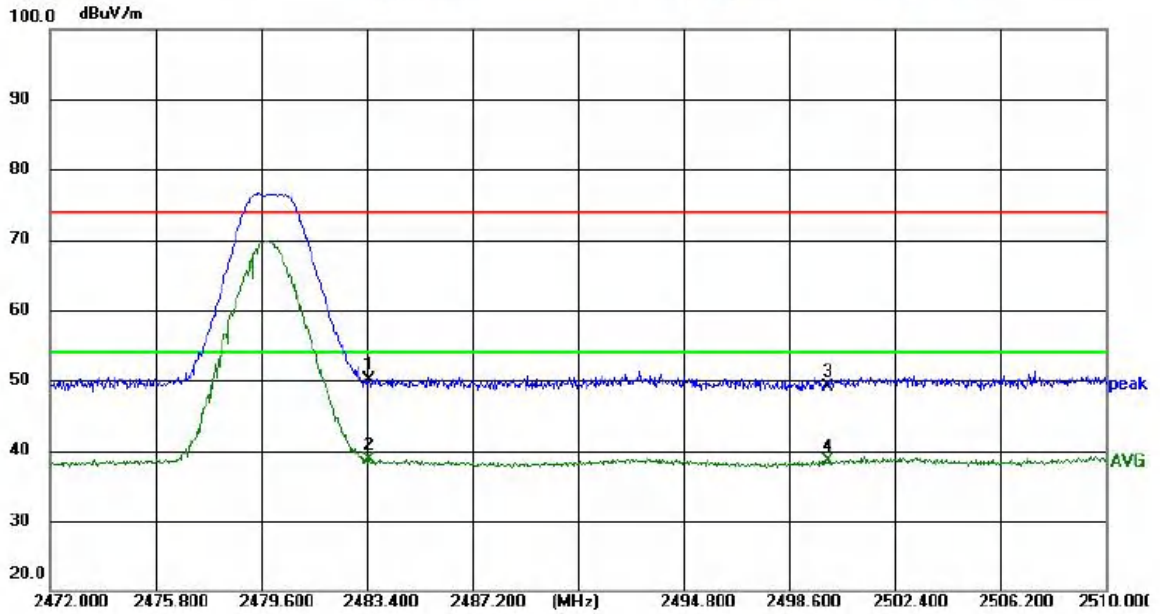

Site LAB Chamber 2      Polarization: **Vertical**      Temperature: 25(C)  
 Limit: FCC Part 15 C      Power:      Humidity: 50 %  
 EUT:      Distance: 3m  
 M/N: CQ\_F20\_01  
 Mode: BLE2M 2480MHz TX  
 Note: Suzhou Chaoqiansi Information Technology Co., Ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	40.21	9.93	50.14	74.00	23.86	peak	150	334	P	
2	2483.500	28.70	9.93	38.63	54.00	15.37	AVG	150	334	P	
3	2500.000	39.10	10.00	49.10	74.00	24.90	peak	150	244	P	
4	2500.000	28.46	10.00	38.46	54.00	15.54	AVG	150	163	P	

### 3.3. Maximum Conducted Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.

#### Test Configuration



#### Test Results

Raw data reference to Section 2 of document No. CTL2404222091-WF\_Appendix of BLE.

### 3.4. Power Spectral Density

#### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq$  3 kHz.
3. Set the VBW  $\geq$  3 $\times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

#### Test Configuration



#### Test Results

Raw data reference to Section 3 of document No. CTL2404222091-WF\_Appendix of BLE.

### 3.5. 6dB Bandwidth

#### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### Test Configuration



#### Test Results

Raw data reference to Section 1 of document No. CTL2404222091-WF\_Appendix of BLE.

### 3.6. Out-of-band Emissions

#### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

#### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.

#### Test Configuration



#### Test Results

Raw data reference to Section 4 of document No. CTL2404222091-WF\_Appendix of BLE.



### 3.7. Antenna Requirement

#### Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(b) (4):**


(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


#### Test Result:

The maximum gain of antenna was -0.58dBi.

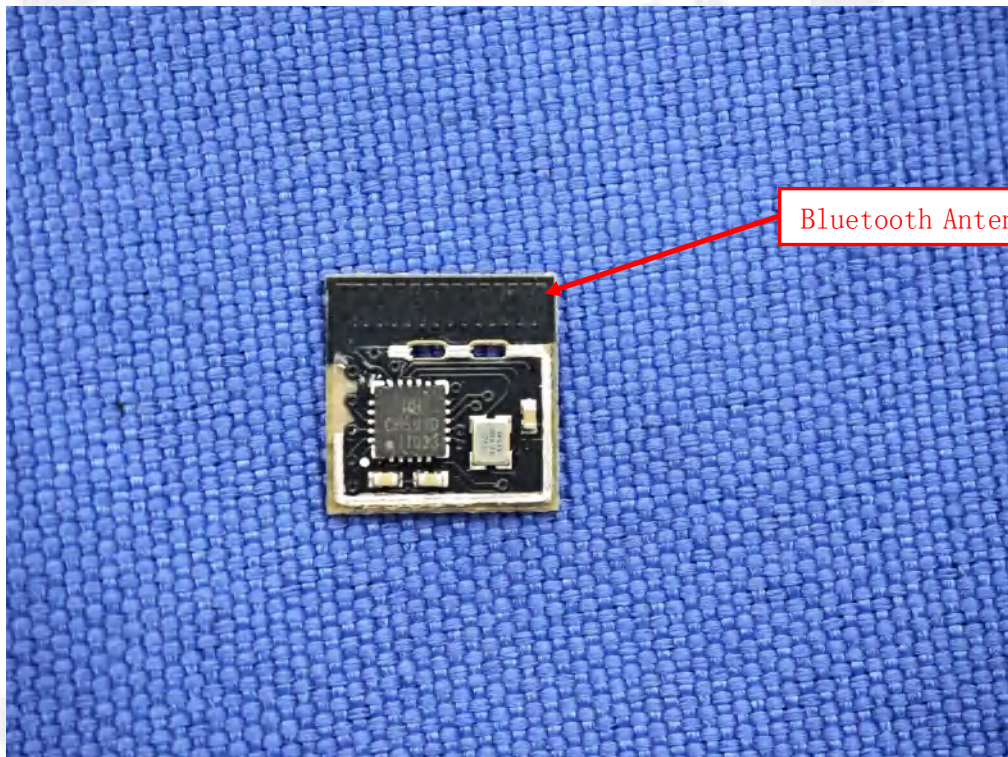



### 4. Test Setup Photos of the EUT

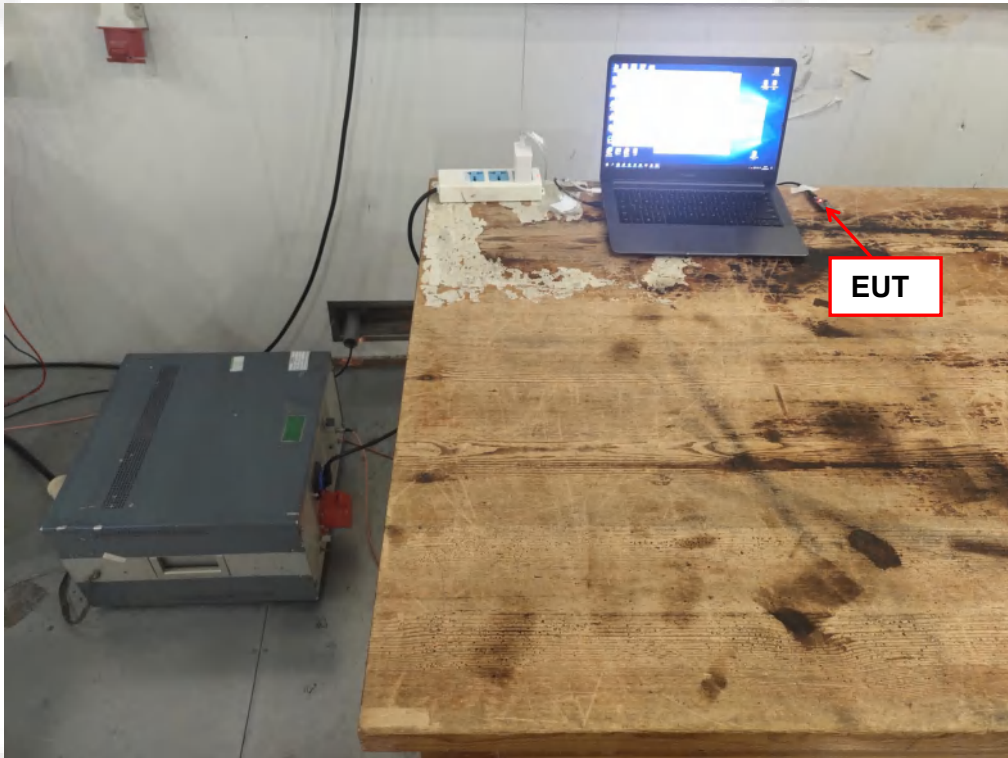


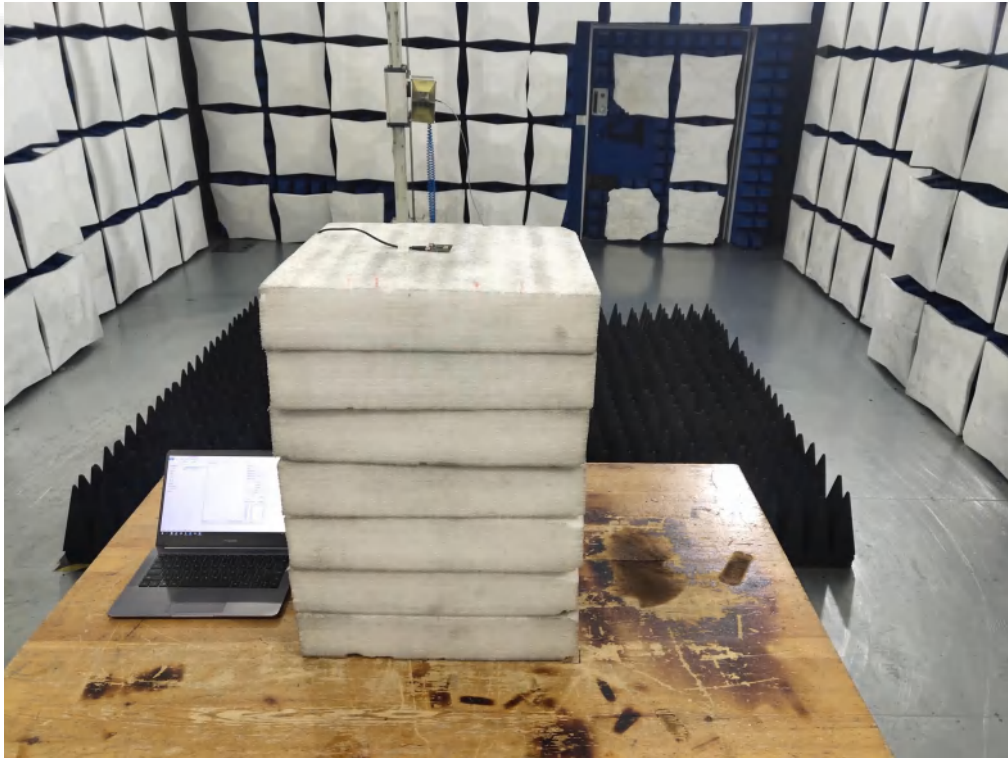




### 5. Photos of the EUT


External Photos of EUT

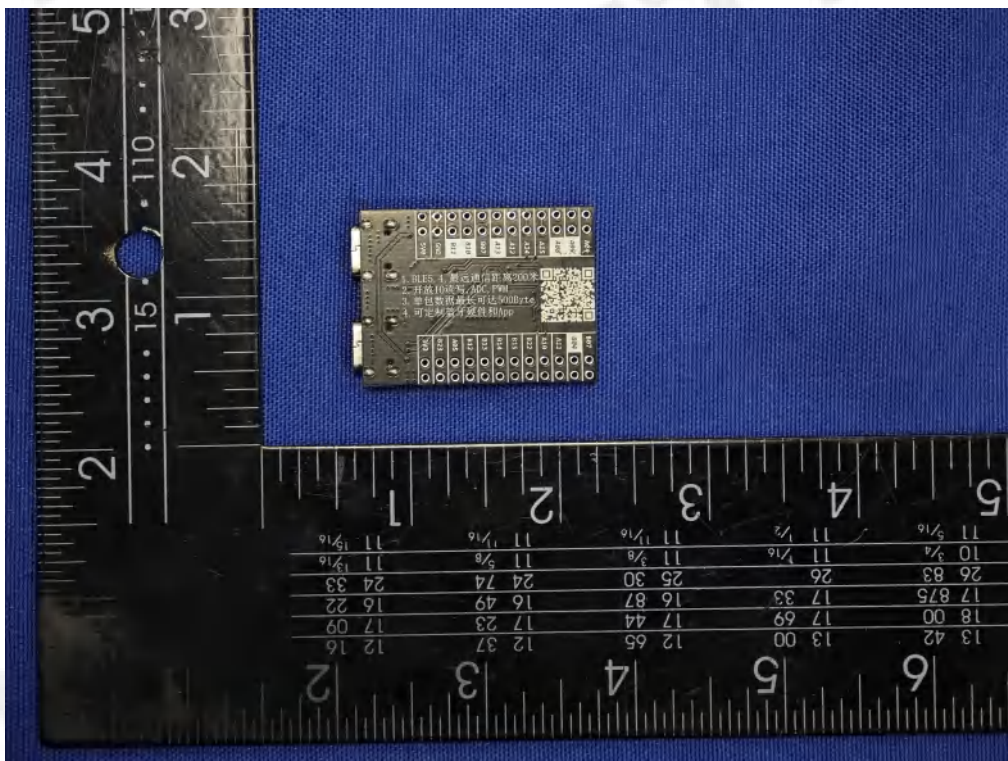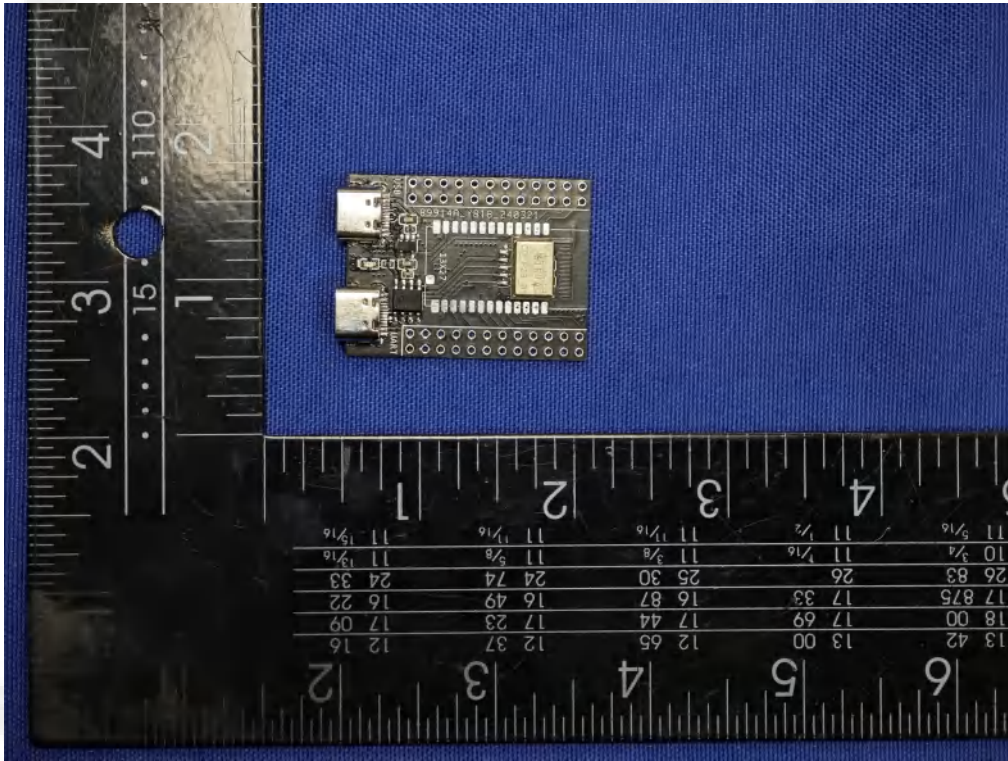

Internal Photos of EUT

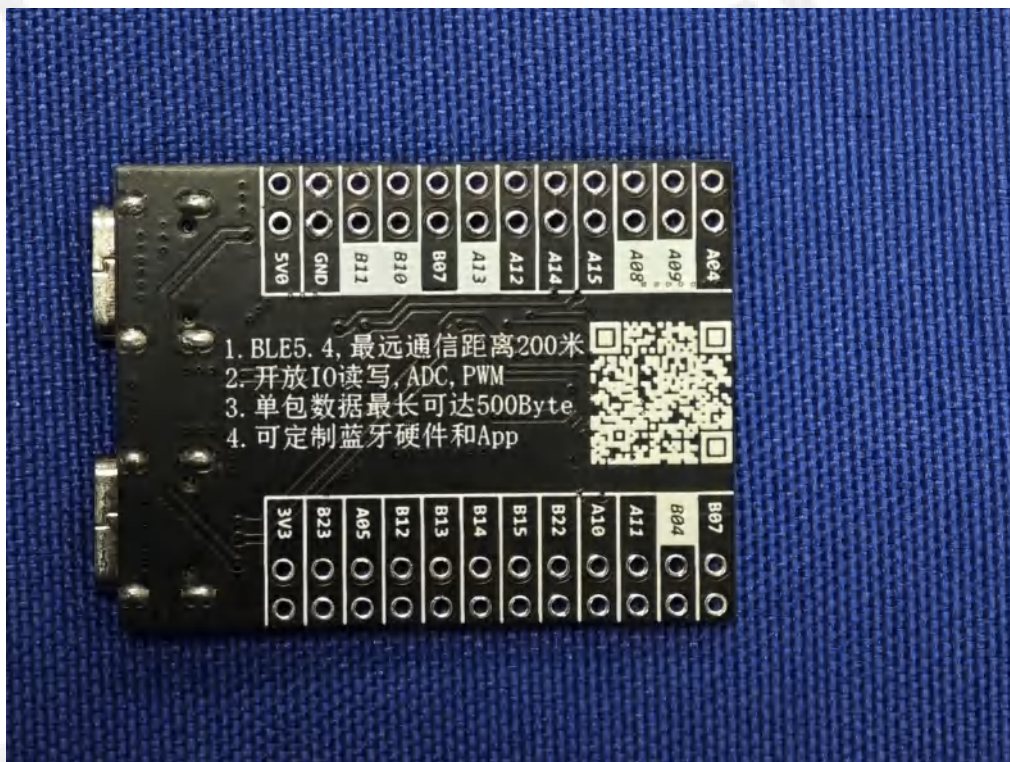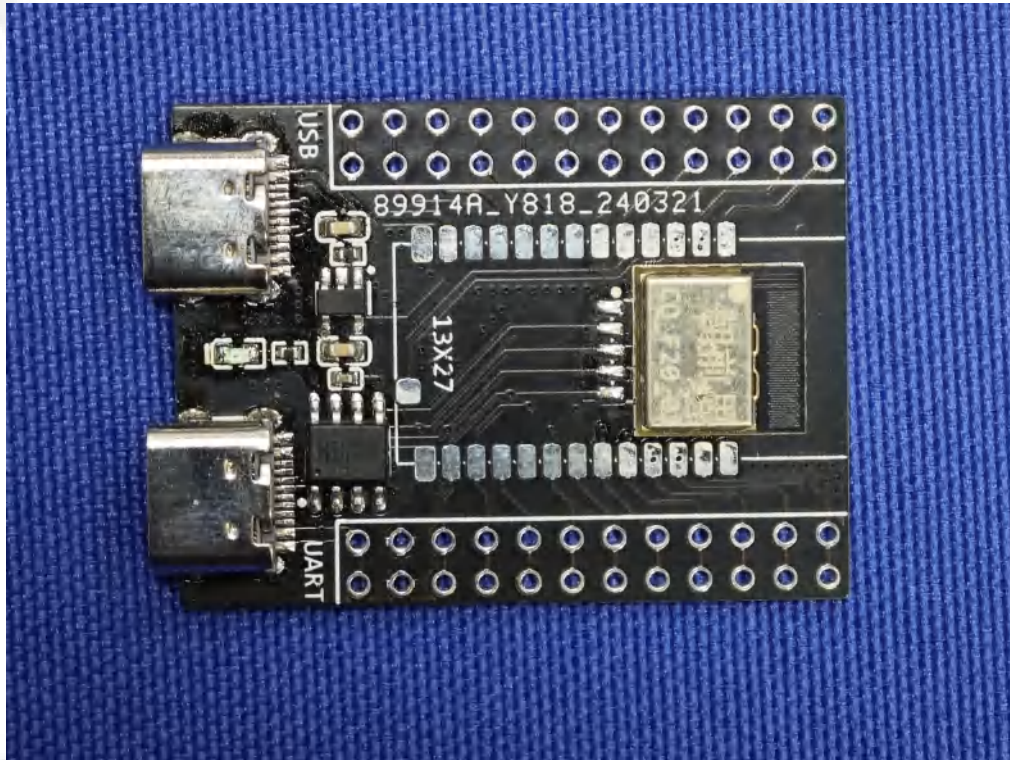

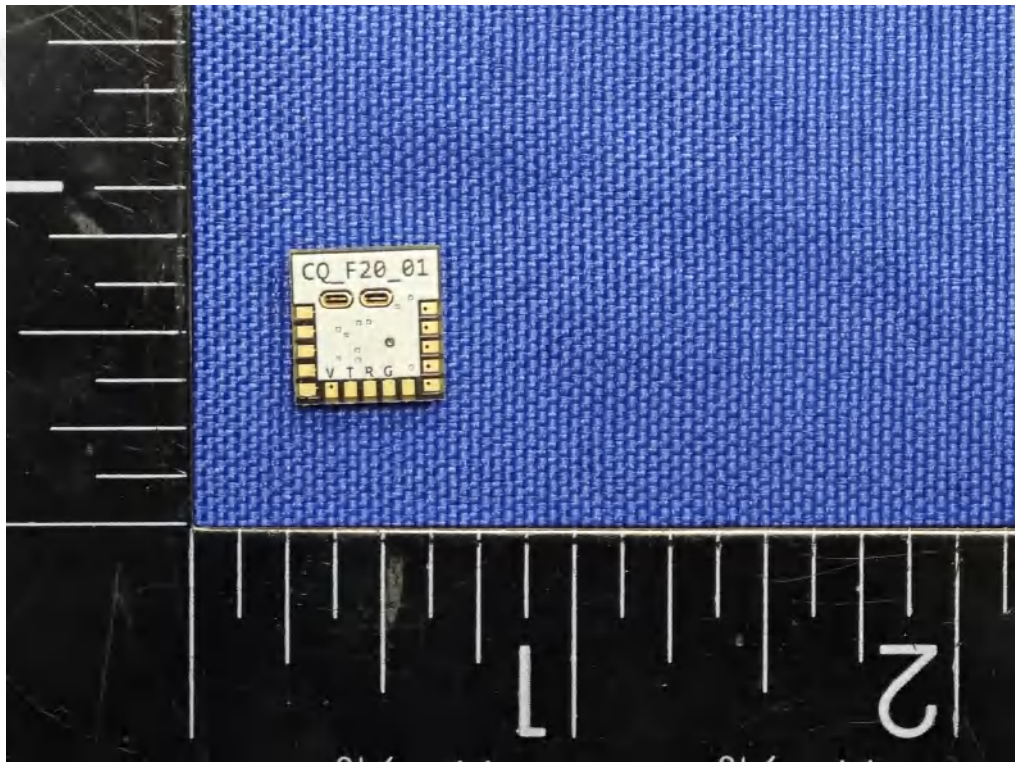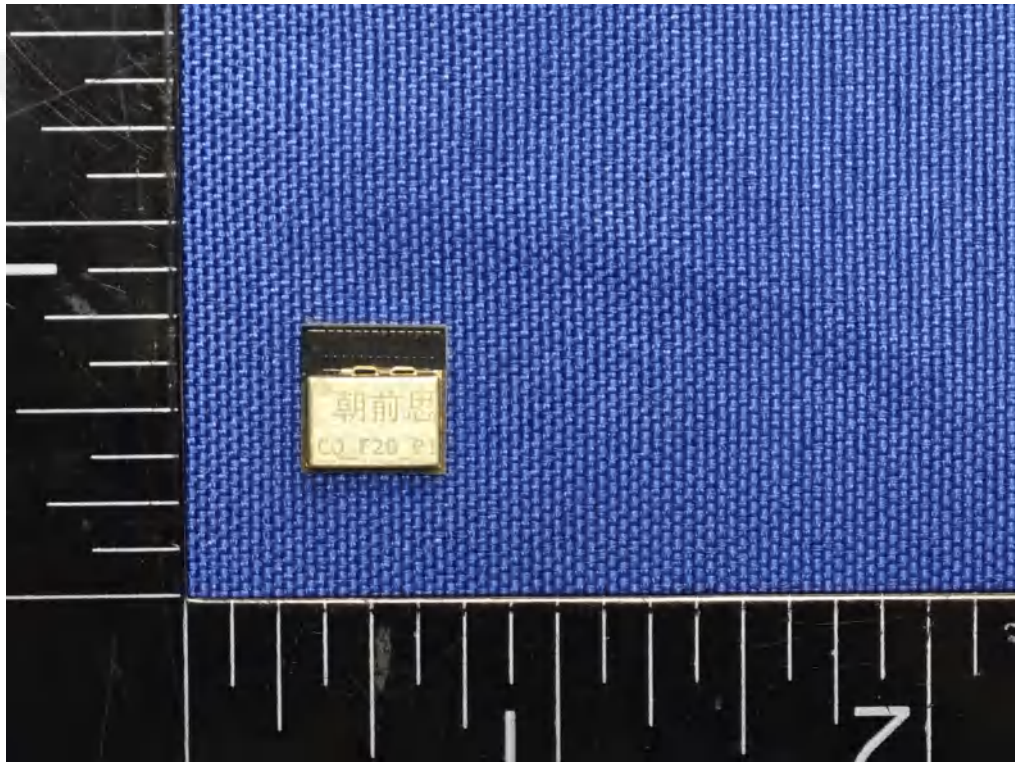

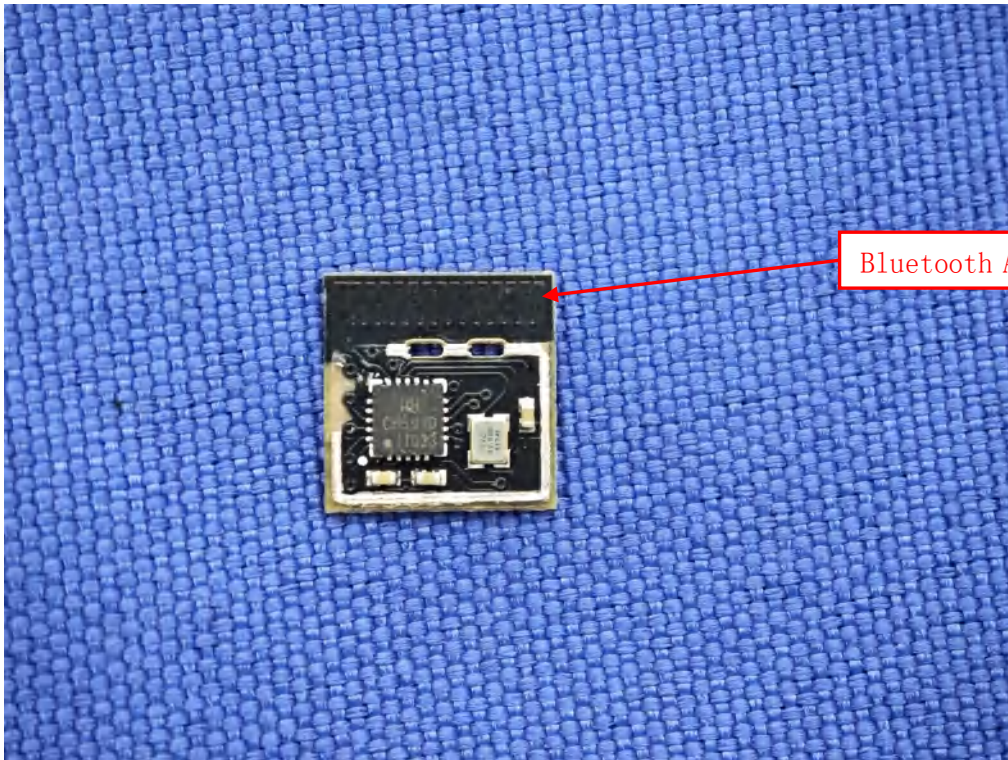

\*\*\*\*\* End of Report \*\*\*\*\*