



FCC TEST REPORT

FCC ID:2BH3D-CE650

Report Number..... : ZHT-240923051E

Date of Test..... : Sept. 23, 2024 to Sept. 30, 2024

Date of issue..... : Oct. 15, 2024

Test Result..... : PASS

Testing Laboratory..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name : SHENZHEN CHENGEN RESHI Technology Co.,LTD

Address : 619, Floor 6, Jinhuiqiu Building, Langshan Second Road, Gaoxin District, Science Park, Nanshan District, Shenzhen, Guangdong, China

Manufacturer's name : Dongguan Xingchengen Electronic Technology Co., Ltd

Address : Room 102, Building 1, No. 11 Zhongqian Road, Qingxi Town, Dongguan City, Guangdong Province

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test procedure..... : KDB558074 D01 15.247 Meas Guidance v05r02

Non-standard test method : N/A

This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.

Product name..... : Handheld thermal imager

Trademark : HDANIEE

Model/Type reference..... : CE650, CE635, CE625

Model Difference..... : CE650 is tested model, other models are derivative models . The models are identical in circuit, only different on the model names. So the test data of CE650 can represent the remaining models.

Ratings..... : Input: DC 5V or DC 3.7 V by battery



Testing procedure and testing location:

Testing Laboratory.....: Guangdong Zhonghan Testing Technology Co., Ltd.

Address.....: Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tested by (name + signature).....: Kevin Yang

Reviewer (name + signature).....: Baret Wu

Approved (name + signature).....: Levi Lee

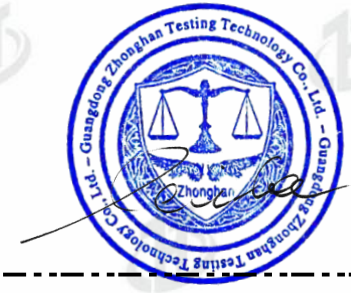


Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 TEST RESULTS	19
5. RADIATED BAND EMISSIONMEASUREMENT	24
5.1 TEST REQUIREMENT:	24
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM TEST STANDARD	24
5.4 TEST SETUP	25
5.5 EUT OPERATING CONDITIONS	25
5.6 TEST RESULT	26
6. POWER SPECTRAL DENSITY TEST	28
6.1 APPLIED PROCEDURES / LIMIT	28
6.2 TEST PROCEDURE	28
6.3 DEVIATION FROM STANDARD	28
6.4 TEST SETUP	28
6.5 EUT OPERATION CONDITIONS	29



6.6 TEST RESULT29

7. CHANNEL BANDWIDTH 30

7.1 APPLIED PROCEDURES / LIMIT 30

7.2 TEST PROCEDURE 30

7.3 DEVIATION FROM STANDARD 30

7.4 TEST SETUP30

7.5 EUT OPERATION CONDITIONS 30

7.6 TEST RESULT31

8. PEAK OUTPUT POWER TEST 32

8.1 APPLIED PROCEDURES/LIMIT 32

8.2 TEST PROCEDURE 32

8.3 DEVIATION FROM STANDARD 32

8.4 TEST SETUP32

8.5 EUT OPERATION CONDITIONS 32

8.6 TEST RESULT32

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION 33

9.1 APPLICABLE STANDARD 33

9.2 TEST PROCEDURE 33

9.3 DEVIATION FROM STANDARD 33

9.4 TEST SETUP 33

9.5 EUT OPERATION CONDITIONS 33

9.6 TEST RESULTS 33

10. ANTENNA REQUIREMENT 34

11. APPENDIX A 35

11.1 DUTY CYCLE 35

11.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER42

11.3 -6DB BANDWIDTH 43

11.4 OCCUPIED CHANNEL BANDWIDTH50

11.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL 57

11.6 BAND EDGE 64

11.7 CONDUCTED RF SPURIOUS EMISSION 73

12. TEST SETUP PHOTO 86

13. EUT CONSTRUCTIONAL DETAILS 86



1. VERSION

Report No.	Version	Description	Approved
ZHT-240923051E	Rev.01	Initial issue of report	Oct. 15, 2024

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add. : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District
Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % ·

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF conducted power	$\pm 0.16\text{dB}$
3	Conducted spurious emissions	$\pm 0.21\text{dB}$
4	All radiated emissions (9k-30MHz)	$\pm 4.68\text{dB}$
5	All radiated emissions (<1G)	$\pm 4.68\text{dB}$
6	All radiated emissions (>1G)	$\pm 4.89\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$
9	Occupied Bandwidth	$\pm 4.96\%$



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Handheld thermal imager
Test Model No.:	CE650
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11, /802.11n(HT40):7
Operation Frequency:	802.11b/802.11g /802.11n(HT20): 2412-2462MHz/802.11n(HT40): 2422-2452MHz
Channel separation:	5MHz
Modulation technology:	IEEE 802.11b: DQPSK/DBPSK/DSSS/CCK IEEE 802.11g: QPSK/BPSK/16QAM/64QAM/OFDM IEEE 802.11n: QPSK/BPSK/16QAM/64QAM/OFDM
Antenna Type:	FPC Antenna
Antenna gain:	3.51dBi
Power supply:	Input: DC 5V or DC 3.7 V by battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	X	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

Test channel	Frequency (MHz)
	802.11n(HT40)
Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode			
Remark: EUT use new battery during the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.				
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13.5Mbps



3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Adapter	N/A	HW-059200CHQ	N/A	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	May 10, 2024	May 09, 2025
2	Loop antenna	EMCI	LAP600	May 10, 2024	May 09, 2025
3	Amplifier	Schwarzbeck	BBV 9743 B	May 10, 2024	May 09, 2025
4	Amplifier	Schwarzbeck	BBV 9718 B	May 10, 2024	May 09, 2025
5	Bilog Antenna	Schwarzbeck	VULB9162	May 28, 2024	May 27, 2025
6	Horn Antenna	Schwarzbeck	BBHA9120D	May 16, 2024	May 15, 2025
7	Horn Antenna	A.H.SYSTEMS	SAS574	May 10, 2024	May 09, 2025
8	Amplifier	AEROFLEX	100KHz-40GHz	May 10, 2024	May 09, 2025
9	Spectrum Analyzer	R&S	FSV40	May 10, 2024	May 09, 2025
10	CDNE	Schwarzbeck	CDNE M2 + CDNE M3	May 10, 2024	May 09, 2025
11	966 Anechoic Chamber	EMToni	9m6m6m	Nov. 25, 2021	Nov. 24, 2024
12	Spectrum Analyzer	KEYSIGHT	N9020A	May 10, 2024	May 09, 2025
13	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	May 10, 2024	May 09, 2025
14	Single Generator	Agilent	N5182A	May 10, 2024	May 09, 2025
15	Power Sensor	MWRFtest	MW100-RFCB	May 10, 2024	May 09, 2025
16	Audio analyzer	R&S	UPL	May 10, 2024	May 09, 2025
17	Single Generator	R&S	SMB100A	May 10, 2024	May 09, 2025
18	Power Amplifier Shielding Room	EMToni	2m3m3m	Nov. 25, 2021	Nov. 24, 2024



Equipment	Manufacturer	Model	Last Cal.	Next Cal.
Receiver	R&S	ESCI	May 10, 2024	May 09, 2025
LISN	R&S	ENV216	May 10, 2024	May 09, 2025
ISN CAT 6	Schwarzbeck	NTFM 8158	May 10, 2024	May 09, 2025
ISN CAT 5	Schwarzbeck	CAT5 8158	May 10, 2024	May 09, 2025
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	May 10, 2024	May 09, 2025
Current Transformer Clamp	Schwarzbeck	SW 9605	May 10, 2024	May 09, 2025
CE Shielding Room	EMToni	9m4m3m	Nov. 25, 2021	Nov. 24, 2024



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:


(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

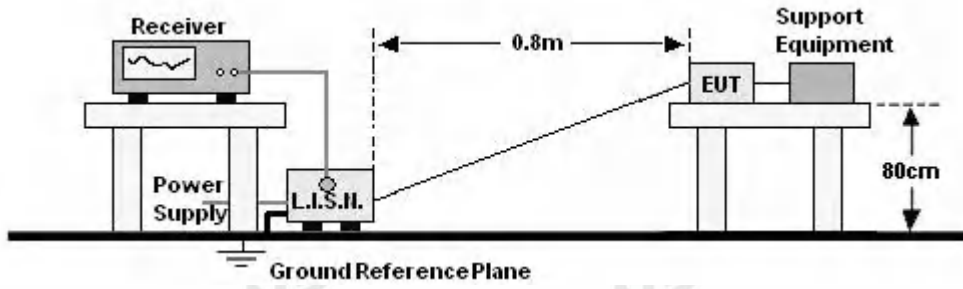


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test result

Temperature:	25.1°C	Relative Humidity :	54.2%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz		

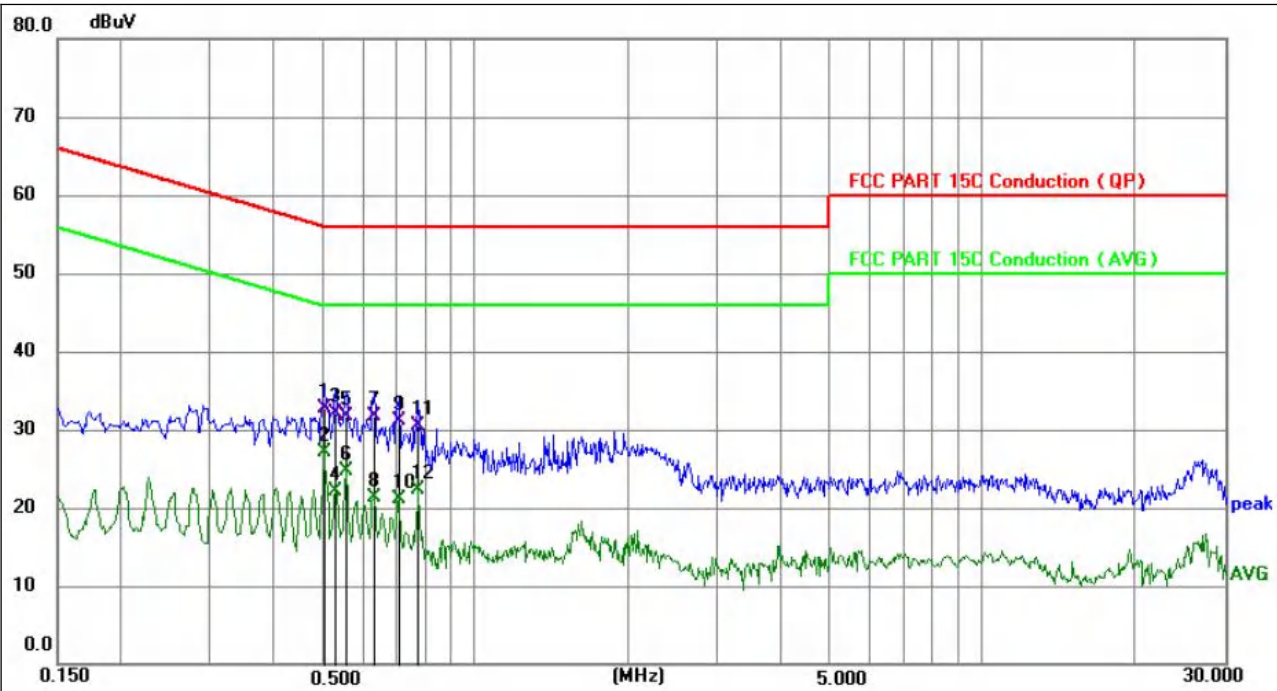


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.5010	22.73	10.02	32.75	56.00	-23.25	QP	P
2 *	0.5010	17.09	10.02	27.11	46.00	-18.89	AVG	P
3	0.5280	22.03	10.02	32.05	56.00	-23.95	QP	P
4	0.5280	12.16	10.02	22.18	46.00	-23.82	AVG	P
5	0.5550	21.71	10.02	31.73	56.00	-24.27	QP	P
6	0.5550	14.68	10.02	24.70	46.00	-21.30	AVG	P
7	0.6312	21.77	10.03	31.80	56.00	-24.20	QP	P
8	0.6312	11.35	10.03	21.38	46.00	-24.62	AVG	P
9	0.7046	20.98	10.04	31.02	56.00	-24.98	QP	P
10	0.7046	11.03	10.04	21.07	46.00	-24.93	AVG	P
11	0.7710	20.44	10.04	30.48	56.00	-25.52	QP	P
12	0.7710	12.23	10.04	22.27	46.00	-23.73	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11b mode (Middle Channel:2412MHz).



Temperature:	25.1°C	Relative Humidity :	54.2%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz		

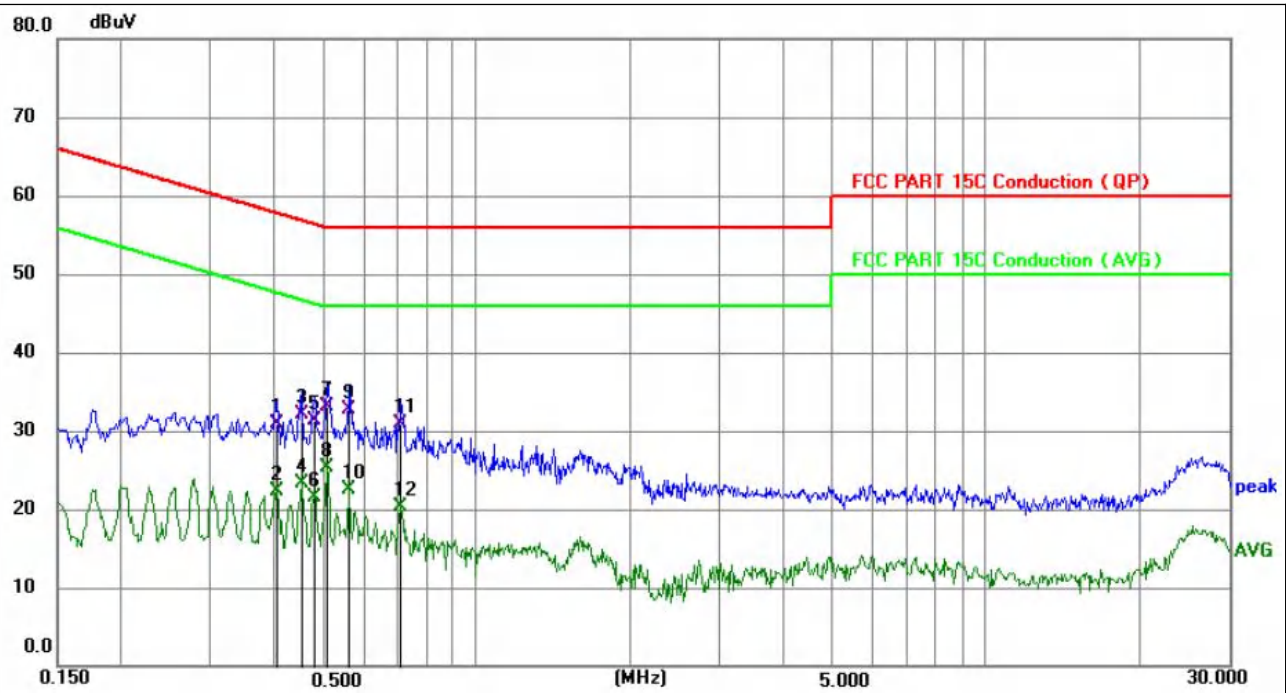

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4020	20.94	9.98	30.92	57.81	-26.89	QP	P
2	0.4020	12.24	9.98	22.22	47.81	-25.59	AVG	P
3	0.4515	22.01	10.01	32.02	56.85	-24.83	QP	P
4	0.4515	13.32	10.01	23.33	46.85	-23.52	AVG	P
5	0.4783	21.38	10.01	31.39	56.37	-24.98	QP	P
6	0.4783	11.56	10.01	21.57	46.37	-24.80	AVG	P
7	0.5070	23.15	10.02	33.17	56.00	-22.83	QP	P
8 *	0.5070	15.23	10.02	25.25	46.00	-20.75	AVG	P
9	0.5611	22.74	10.02	32.76	56.00	-23.24	QP	P
10	0.5611	12.58	10.02	22.60	46.00	-23.40	AVG	P
11	0.7080	20.80	10.04	30.84	56.00	-25.16	QP	P
12	0.7080	10.18	10.04	20.22	46.00	-25.78	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11b mode (Middle Channel:2412MHz).



Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoiccamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of available-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

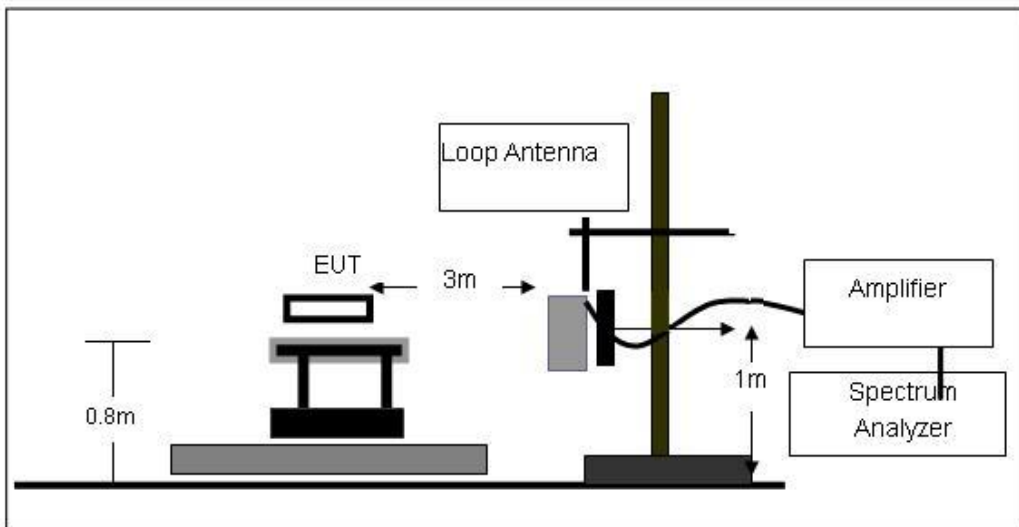

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

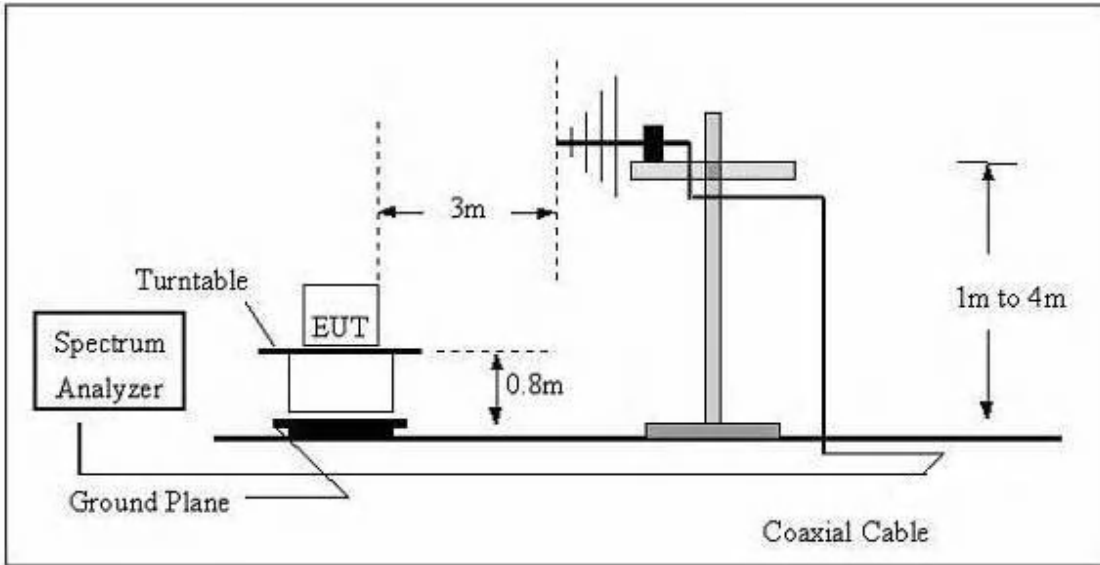

(C) Radiated Emission Test-Up Frequency Above 1GHz

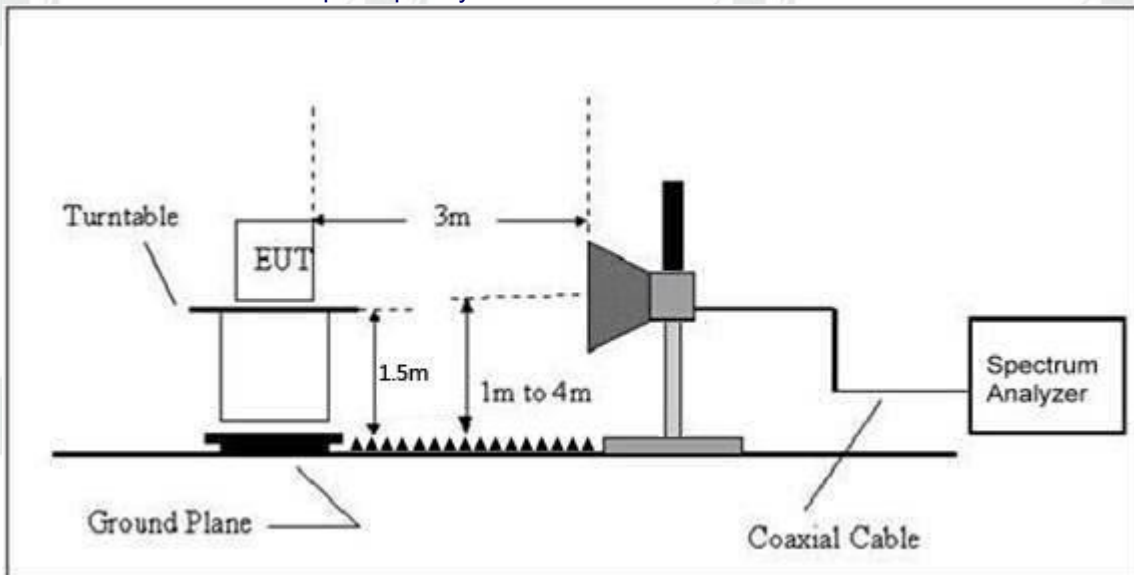

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature :	24.2°C	Relative Humidity :	53.1%
Pressure :	101kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		

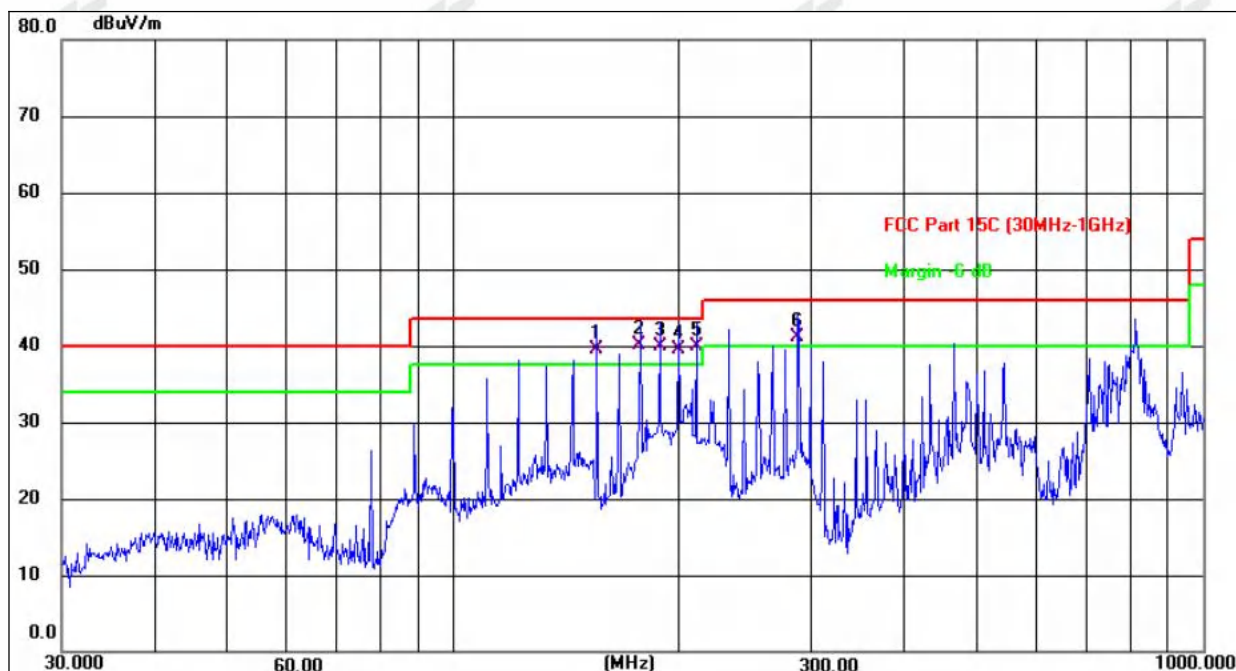

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	155.3642	53.14	-13.70	39.44	43.50	-4.06	QP
2 *	177.5089	52.59	-12.47	40.12	43.50	-3.38	QP
3 !	188.4122	51.62	-11.72	39.90	43.50	-3.60	QP
4 !	199.9855	50.49	-10.89	39.60	43.50	-3.90	QP
5 !	210.7860	50.46	-10.49	39.97	43.50	-3.53	QP
6 !	287.9904	49.44	-8.29	41.15	46.00	-4.85	QP



Temperature :	24.2°C	Relative Humidity :	53.1%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		

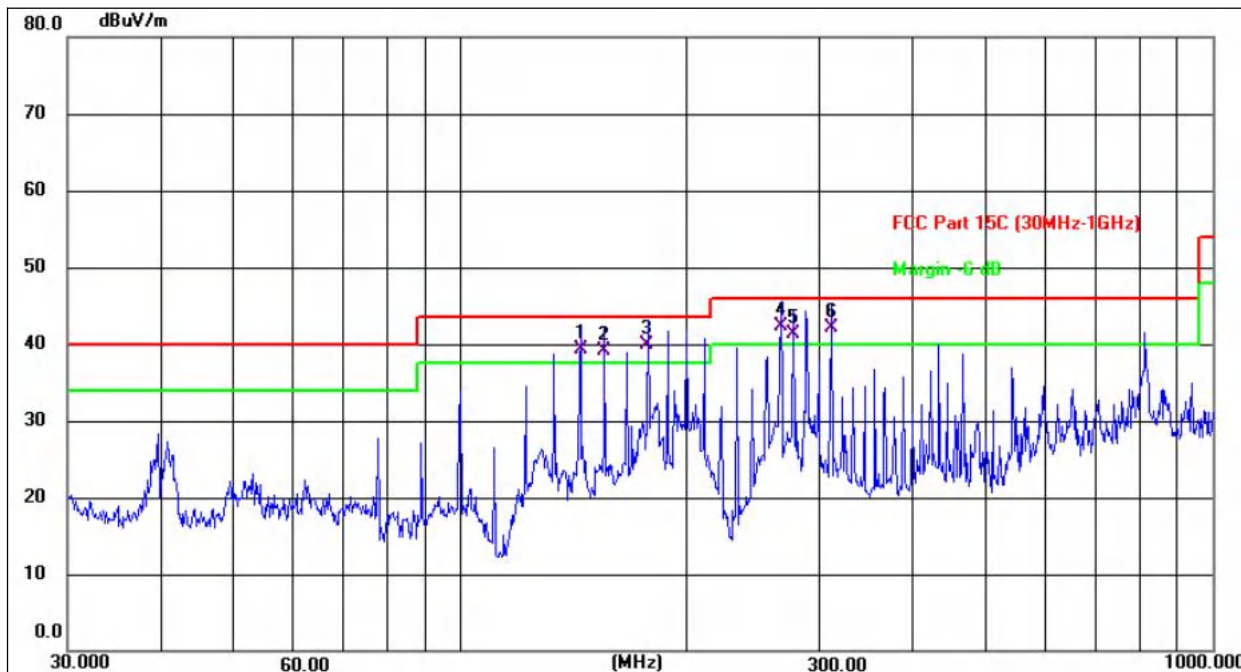

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	144.3344	53.09	-13.81	39.28	43.50	-4.22	QP
2 !	155.3642	52.79	-13.70	39.09	43.50	-4.41	QP
3 *	177.5089	52.33	-12.47	39.86	43.50	-3.64	QP
4 !	266.6090	51.05	-8.72	42.33	46.00	-3.67	QP
5 !	277.0935	49.86	-8.51	41.35	46.00	-4.65	QP
6 !	311.0865	49.87	-7.79	42.08	46.00	-3.92	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11b mode (Middle Channel:2412MHz).



1GHz~25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
802.11b									
Low Channel:2412MHz									
V	4824.00	57.86	30.55	5.77	24.66	57.74	74	-16.26	PK
V	4824.00	41.92	30.55	5.77	24.66	41.8	54	-12.2	AV
H	4824.00	59.03	30.33	6.32	24.55	59.57	74	-14.43	PK
H	4824.00	41.5	30.33	6.32	24.55	42.04	54	-11.96	AV
Middle Channel:2437MHz									
V	4874.00	57.09	30.55	5.77	24.66	56.97	74	-17.03	PK
V	4874.00	42.53	30.55	5.77	24.66	42.41	54	-11.59	AV
H	4874.00	59.57	30.33	6.32	24.55	60.11	74	-13.89	PK
H	4874.00	42.42	30.33	6.32	24.55	42.96	54	-11.04	AV
High Channel:2462MHz									
V	4924.00	56.25	30.55	5.77	24.66	56.13	74	-17.87	PK
V	4924.00	41.63	30.55	5.77	24.66	41.51	54	-12.49	AV
H	4924.00	56.27	30.33	6.32	24.55	56.81	74	-17.19	PK
H	4924.00	42.33	30.33	6.32	24.55	42.87	54	-11.13	AV
802.11g									
Low Channel:2412MHz									
V	4824.00	57.09	30.55	5.77	24.66	56.97	74	-17.03	PK
V	4824.00	41.89	30.55	5.77	24.66	41.77	54	-12.23	AV
H	4824.00	55.55	30.33	6.32	24.55	56.09	74	-17.91	PK
H	4824.00	41.48	30.33	6.32	24.55	42.02	54	-11.98	AV
Middle Channel:2437MHz									
V	4874.00	58.19	30.55	5.77	24.66	58.07	74	-15.93	PK
V	4874.00	41.22	30.55	5.77	24.66	41.1	54	-12.9	AV
H	4874.00	58.66	30.33	6.32	24.55	59.2	74	-14.8	PK
H	4874.00	43.9	30.33	6.32	24.55	44.44	54	-9.56	AV
High Channel:2462MHz									
V	4924.00	55.12	30.55	5.77	24.66	55	74	-19	PK
V	4924.00	42.29	30.55	5.77	24.66	42.17	54	-11.83	AV
H	4924.00	56.26	30.33	6.32	24.55	56.8	74	-17.2	PK
H	4924.00	42.32	30.33	6.32	24.55	42.86	54	-11.14	AV
802.11n 20									
Low Channel:2412MHz									
V	4824.00	55.07	30.55	5.77	24.66	54.95	74	-19.05	PK
V	4824.00	42.93	30.55	5.77	24.66	42.81	54	-11.19	AV
H	4824.00	58.39	30.33	6.32	24.55	58.93	74	-15.07	PK
H	4824.00	43.97	30.33	6.32	24.55	44.51	54	-9.49	AV
Middle Channel:2437MHz									
V	4874.00	55.38	30.55	5.77	24.66	55.26	74	-18.74	PK
V	4874.00	41.97	30.55	5.77	24.66	41.85	54	-12.15	AV
H	4874.00	59.25	30.33	6.32	24.55	59.79	74	-14.21	PK
H	4874.00	44.01	30.33	6.32	24.55	44.55	54	-9.45	AV
High Channel:2462MHz									
V	4924.00	59.2	30.55	5.77	24.66	59.08	74	-14.92	PK
V	4924.00	41.85	30.55	5.77	24.66	41.73	54	-12.27	AV
H	4924.00	58.88	30.33	6.32	24.55	59.42	74	-14.58	PK
H	4924.00	43.02	30.33	6.32	24.55	43.56	54	-10.44	AV
802.11n 40									
Low Channel:2422MHz									
V	4844.00	55.19	30.55	5.77	24.66	55.07	74	-18.93	PK



V	4924.00	41.42	30.55	5.77	24.66	41.3	54	-12.7	AV
H	4924.00	57.4	30.33	6.32	24.55	57.94	74	-16.06	PK
H	4924.00	41.65	30.33	6.32	24.55	42.19	54	-11.81	AV
Middle Channel:2437MHz									
V	4874.00	59.37	30.55	5.77	24.66	59.25	74	-14.75	PK
V	4874.00	41.74	30.55	5.77	24.66	41.62	54	-12.38	AV
H	4874.00	55.07	30.33	6.32	24.55	55.61	74	-18.39	PK
H	4874.00	43.94	30.33	6.32	24.55	44.48	54	-9.52	AV
High Channel:2452MHz									
V	4904.00	58.19	30.55	5.77	24.66	58.07	74	-15.93	PK
V	4904.00	42.97	30.55	5.77	24.66	42.85	54	-11.15	AV
H	4904.00	55.87	30.33	6.32	24.55	56.41	74	-17.59	PK
H	4904.00	44.34	30.33	6.32	24.55	44.88	54	-9.12	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel


Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

Radiated Emission Test-Up Frequency Above 1GHz

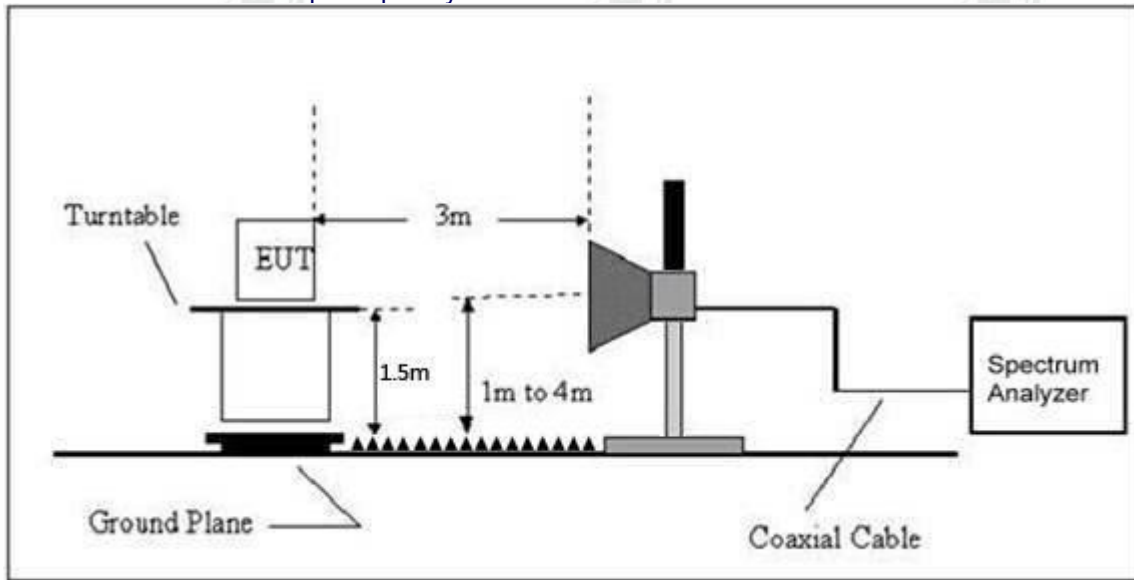

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type	Result
802.11b	Low Channel 2412MHz										
	H	2390.00	57.33	30.55	5.77	24.66	57.21	74	-16.79	PK	PASS
	H	2390.00	41.89	30.55	5.77	24.66	41.77	54	-12.23	AV	PASS
	H	2400.00	56.51	30.33	6.32	24.55	57.05	74	-16.95	PK	PASS
	H	2400.00	44.65	30.33	6.32	24.55	45.19	54	-8.81	AV	PASS
	V	2390.00	57.98	30.55	5.77	24.66	57.86	74	-16.14	PK	PASS
	V	2390.00	43.12	30.55	5.77	24.66	43	54	-11	AV	PASS
	V	2400.00	56.99	30.33	6.32	24.55	57.53	74	-16.47	PK	PASS
	V	2400.00	43.7	30.33	6.32	24.55	44.24	54	-9.76	AV	PASS
	High Channel 2462MHz										
	H	2483.50	58.48	30.55	5.77	24.66	58.36	74	-15.64	PK	PASS
	H	2483.50	41.29	30.55	5.77	24.66	41.17	54	-12.83	AV	PASS
	H	2500.00	56.14	30.33	6.32	24.55	56.68	74	-17.32	PK	PASS
	H	2500.00	42.52	30.33	6.32	24.55	43.06	54	-10.94	AV	PASS
	V	2483.50	59.66	30.55	5.77	24.66	59.54	74	-14.46	PK	PASS
	V	2483.50	41.52	30.55	5.77	24.66	41.4	54	-12.6	AV	PASS
V	2500.00	58.55	30.33	6.32	24.55	59.09	74	-14.91	PK	PASS	
V	2500.00	41.7	30.33	6.32	24.55	42.24	54	-11.76	AV	PASS	
802.11g	Low Channel 2412MHz										
	H	2390.00	55.46	30.55	5.77	24.66	55.34	74	-18.66	PK	PASS
	H	2390.00	41.7	30.55	5.77	24.66	41.58	54	-12.42	AV	PASS
	H	2400.00	56.77	30.33	6.32	24.55	57.31	74	-16.69	PK	PASS
	H	2400.00	43.22	30.33	6.32	24.55	43.76	54	-10.24	AV	PASS
	V	2390.00	55.51	30.55	5.77	24.66	55.39	74	-18.61	PK	PASS
	V	2390.00	42.33	30.55	5.77	24.66	42.21	54	-11.79	AV	PASS
	V	2400.00	59.18	30.33	6.32	24.55	59.72	74	-14.28	PK	PASS
	V	2400.00	42.44	30.33	6.32	24.55	42.98	54	-11.02	AV	PASS
	High Channel 2462MHz										
	H	2483.50	59.89	30.55	5.77	24.66	59.77	74	-14.23	PK	PASS
	H	2483.50	41.97	30.55	5.77	24.66	41.85	54	-12.15	AV	PASS
	H	2500.00	59.4	30.33	6.32	24.55	59.94	74	-14.06	PK	PASS
	H	2500.00	43.37	30.33	6.32	24.55	43.91	54	-10.09	AV	PASS
	V	2483.50	58.68	30.55	5.77	24.66	58.56	74	-15.44	PK	PASS
	V	2483.50	41.42	30.55	5.77	24.66	41.3	54	-12.7	AV	PASS
V	2500.00	55.41	30.33	6.32	24.55	55.95	74	-18.05	PK	PASS	
V	2500.00	41.29	30.33	6.32	24.55	41.83	54	-12.17	AV	PASS	
802.11n20	Low Channel 2412MHz										
	H	2390.00	56.17	30.55	5.77	24.66	56.05	74	-17.95	PK	PASS
	H	2390.00	41.35	30.55	5.77	24.66	41.23	54	-12.77	AV	PASS
	H	2400.00	57.45	30.33	6.32	24.55	57.99	74	-16.01	PK	PASS
	H	2400.00	44.81	30.33	6.32	24.55	45.35	54	-8.65	AV	PASS
	V	2390.00	56.22	30.55	5.77	24.66	56.1	74	-17.9	PK	PASS
	V	2390.00	41.06	30.55	5.77	24.66	40.94	54	-13.06	AV	PASS
	V	2400.00	58.94	30.33	6.32	24.55	59.48	74	-14.52	PK	PASS
	V	2400.00	41.97	30.33	6.32	24.55	42.51	54	-11.49	AV	PASS
	High Channel 2462MHz										
	H	2483.50	58.28	30.55	5.77	24.66	58.16	74	-15.84	PK	PASS
	H	2483.50	41	30.55	5.77	24.66	40.88	54	-13.12	AV	PASS
	H	2500.00	57.43	30.33	6.32	24.55	57.97	74	-16.03	PK	PASS
	H	2500.00	44.86	30.33	6.32	24.55	45.4	54	-8.6	AV	PASS
	V	2483.50	58.97	30.55	5.77	24.66	58.85	74	-15.15	PK	PASS



802.11n 40	V	2483.50	43.82	30.55	5.77	24.66	43.7	54	-10.3	AV	PASS
	V	2500.00	55.06	30.33	6.32	24.55	55.6	74	-18.4	PK	PASS
	V	2500.00	41.12	30.33	6.32	24.55	41.66	54	-12.34	AV	PASS
	Low Channel 2422MHz										
	H	2390.00	58.26	30.55	5.77	24.66	58.14	74	-15.86	PK	PASS
	H	2390.00	43.11	30.55	5.77	24.66	42.99	54	-11.01	AV	PASS
	H	2400.00	56.87	30.33	6.32	24.55	57.41	74	-16.59	PK	PASS
	H	2400.00	42.05	30.33	6.32	24.55	42.59	54	-11.41	AV	PASS
	V	2390.00	59.89	30.55	5.77	24.66	59.77	74	-14.23	PK	PASS
	V	2390.00	43.46	30.55	5.77	24.66	43.34	54	-10.66	AV	PASS
	V	2400.00	57.59	30.33	6.32	24.55	58.13	74	-15.87	PK	PASS
	V	2400.00	41.61	30.33	6.32	24.55	42.15	54	-11.85	AV	PASS
	High Channel 2452MHz										
	H	2483.50	59.79	30.55	5.77	24.66	59.67	74	-14.33	PK	PASS
	H	2483.50	41.59	30.55	5.77	24.66	41.47	54	-12.53	AV	PASS
	H	2500.00	55.24	30.33	6.32	24.55	55.78	74	-18.22	PK	PASS
	H	2500.00	42.99	30.33	6.32	24.55	43.53	54	-10.47	AV	PASS
	V	2483.50	58.23	30.55	5.77	24.66	58.11	74	-15.89	PK	PASS
	V	2483.50	41.06	30.55	5.77	24.66	40.94	54	-13.06	AV	PASS
	V	2500.00	58.78	30.33	6.32	24.55	59.32	74	-14.68	PK	PASS
V	2500.00	41.96	30.33	6.32	24.55	42.5	54	-11.5	AV	PASS	

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidanceev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

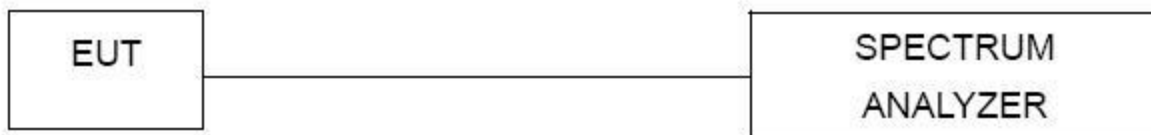



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

Temperature :	23.8°C	Relative Humidity :	53.6%
Pressure :	101kPa	Test Voltage :	DC 3.7V

Please refer to APPENDIX A



7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 xRBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	23.8°C	Relative Humidity :	53.6%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode		

Please refer to APPENDIX A

8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Temperature :	23.8°C	Relative Humidity :	53.6%
Pressure :	101kPa	Test Voltage :	DC 3.7V

Please refer to APPENDIX A



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidanceev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE


Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

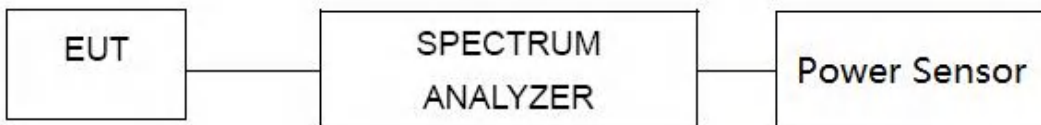

9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Please refer to APPENDIX A



10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(b)(4)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
EUT Antenna:	
The antenna is FPC Antenna, the best case gain of the antenna is 3.51dBi, reference to the appendix II for details	




11. APPENDIX A


11.1 DUTY CYCLE



Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
b	2412	Ant1	98.96	0	0.08
b	2437	Ant1	99.28	0	0.08
b	2462	Ant1	99.12	0	0.08
g	2412	Ant1	92.79	0.32	0.49
g	2437	Ant1	94.5	0.25	0.49
g	2462	Ant1	97.64	0.1	0.48
n20	2412	Ant1	94.15	0.26	0.52
n20	2437	Ant1	96.98	0.13	0.52
n20	2462	Ant1	93.66	0.28	0.52
n40	2422	Ant1	93.07	0.31	1.06
n40	2437	Ant1	85.45	0.68	1.06
n40	2452	Ant1	86.36	0.64	1.05



Test Graphs
Duty Cycle NVNT b 2412MHz Ant1

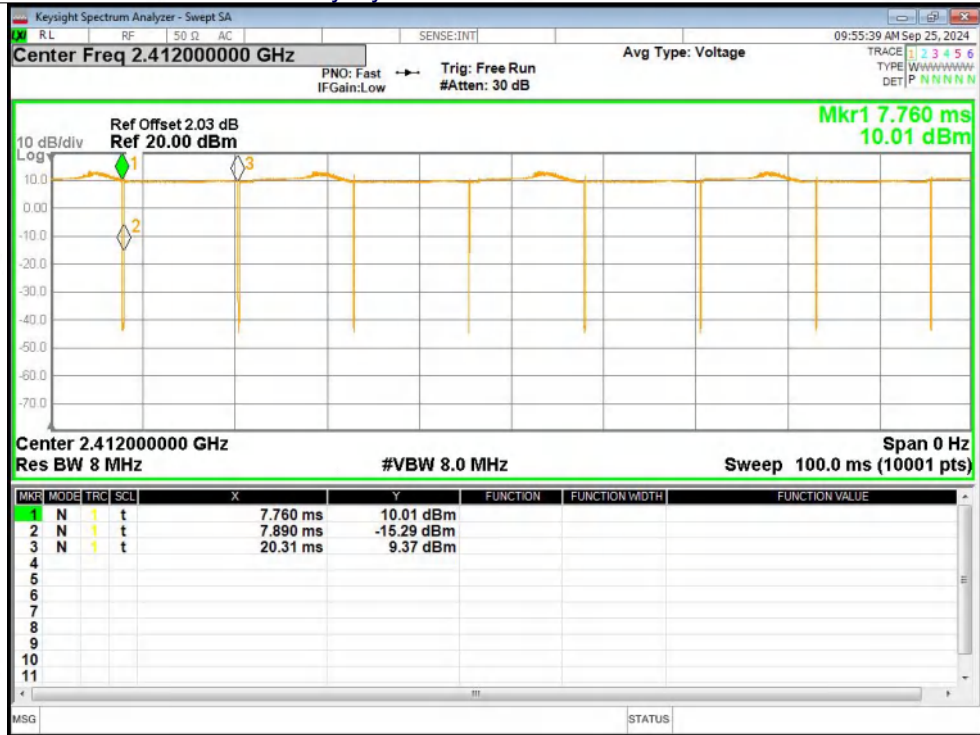


Duty Cycle NVNT b 2437MHz Ant1

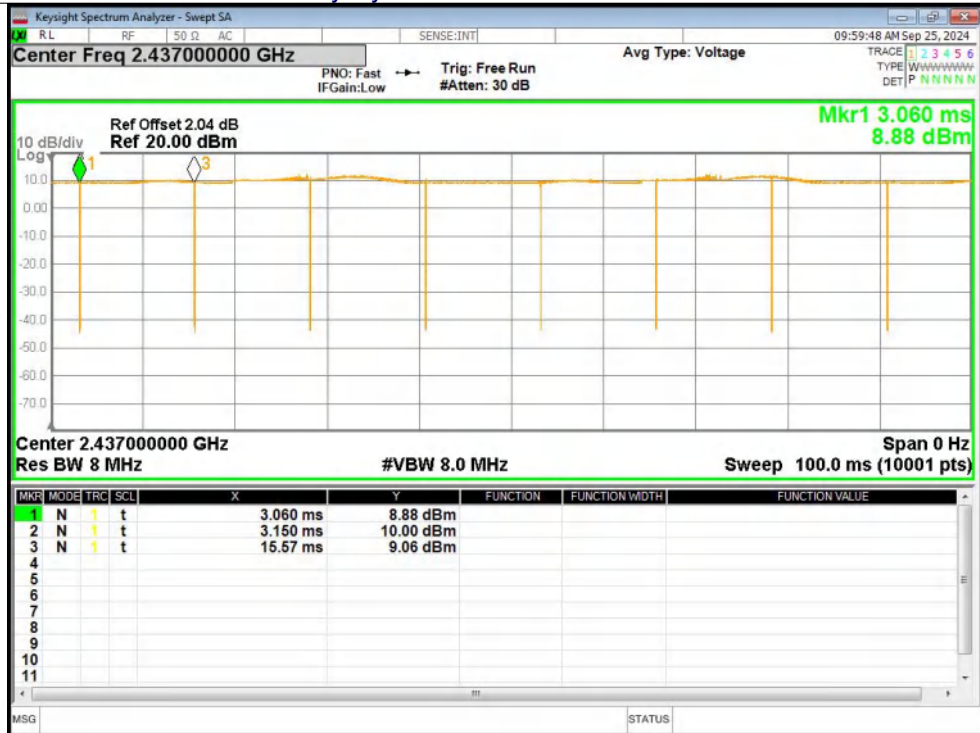

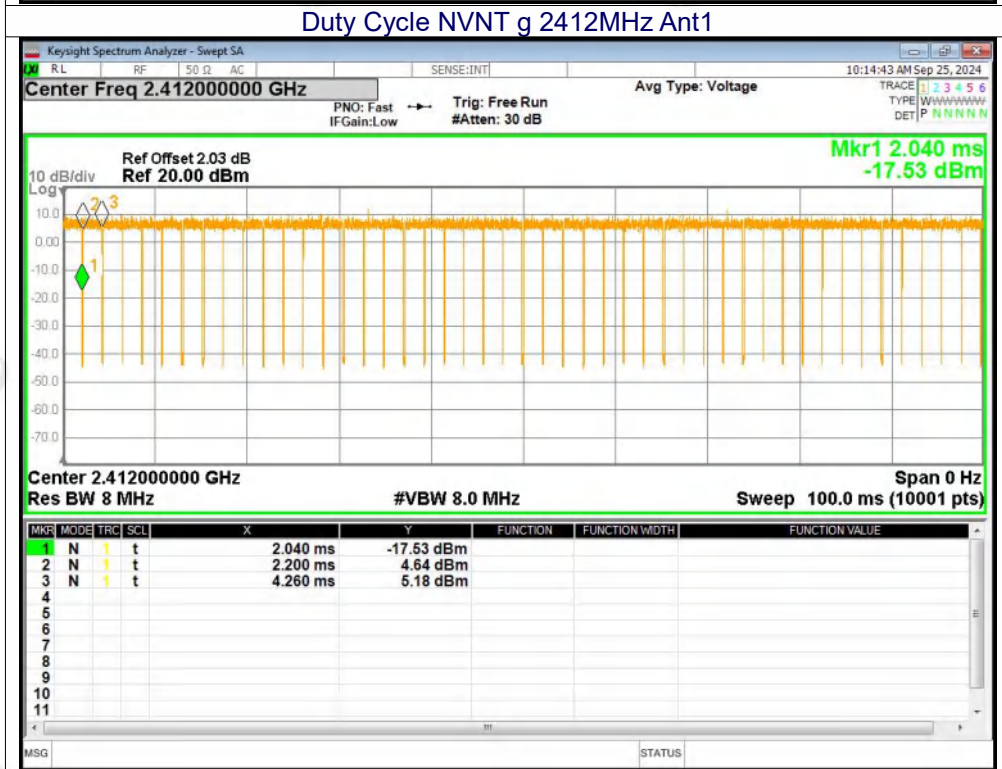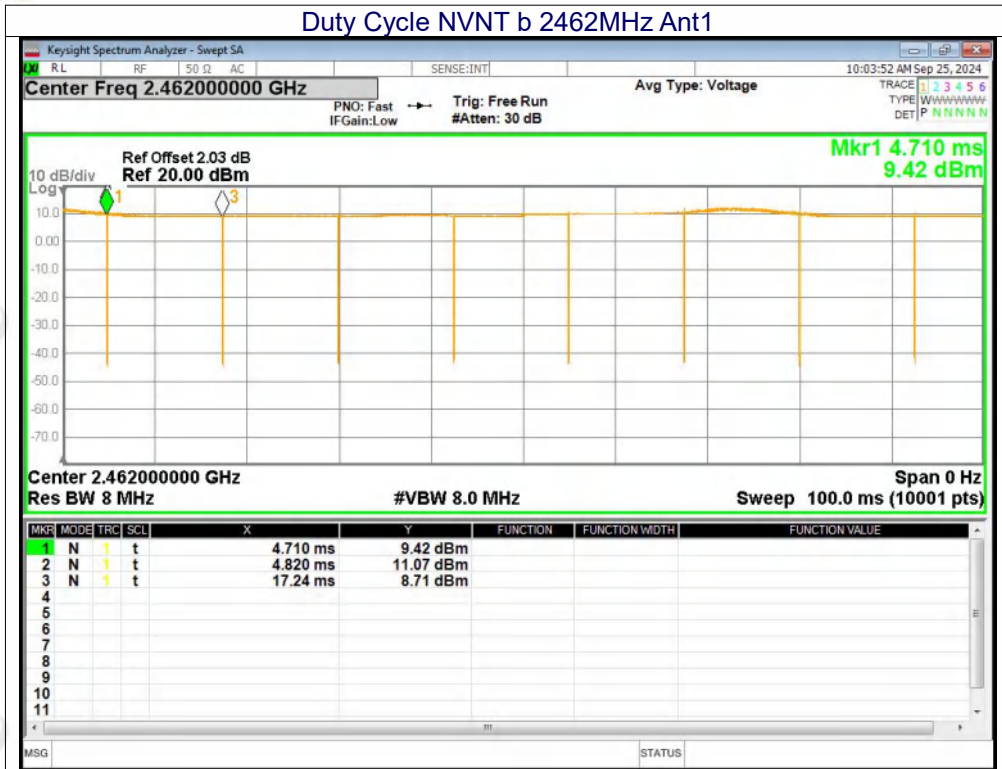


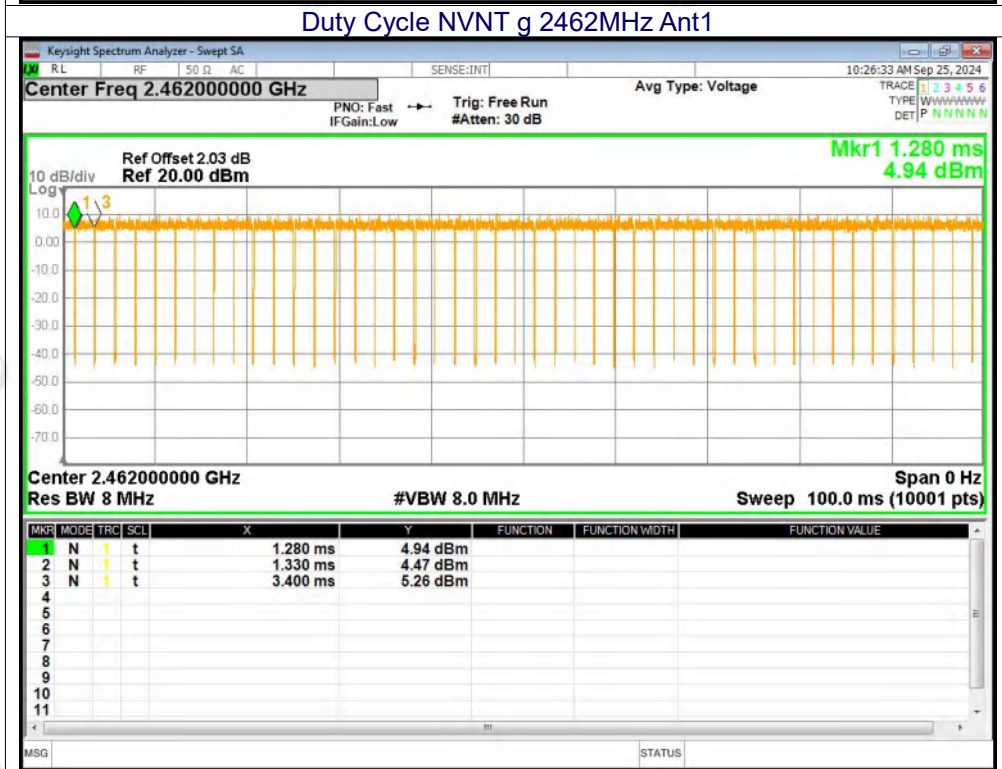
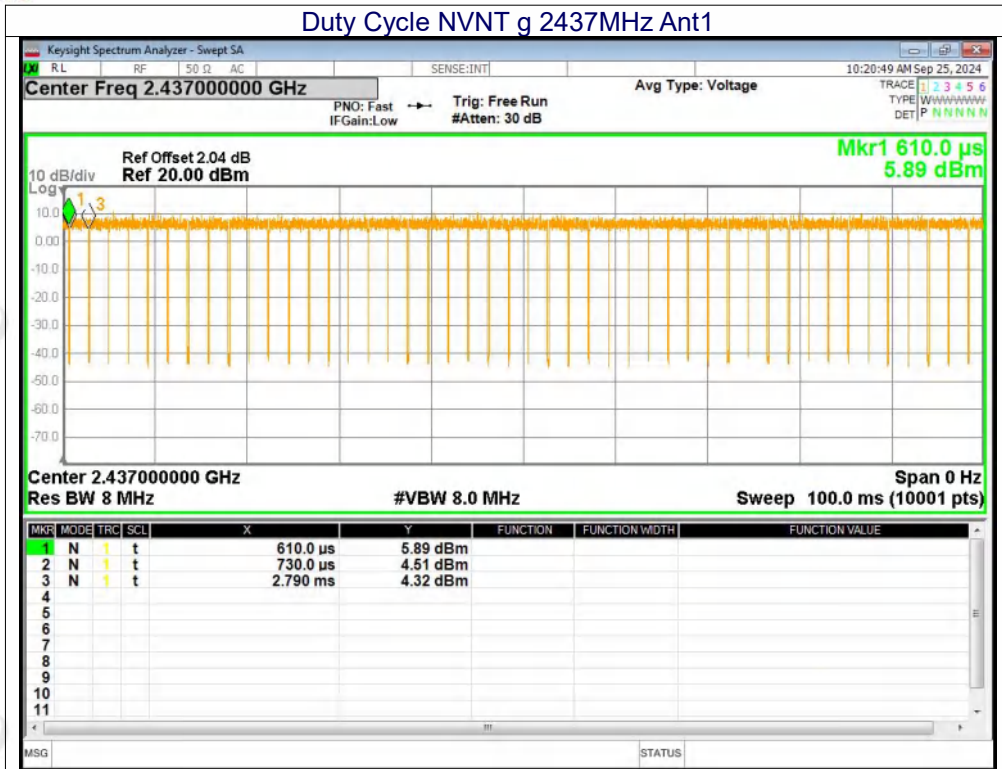


Duty Cycle NVNT n20 2412MHz Ant1

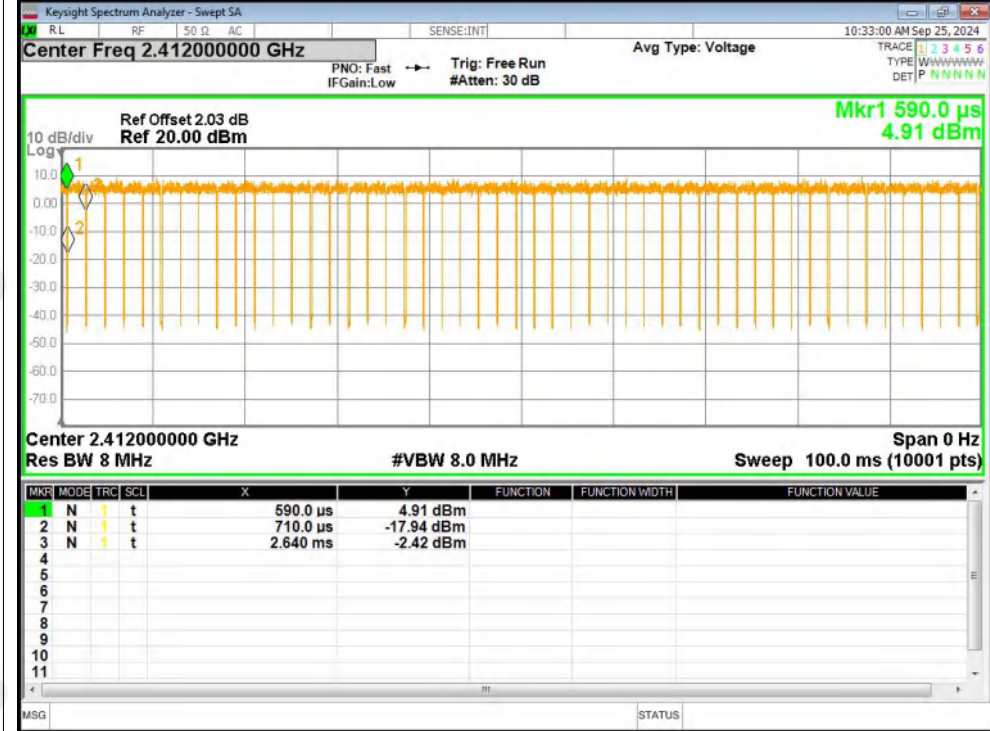


Duty Cycle NVNT n20 2437MHz Ant1

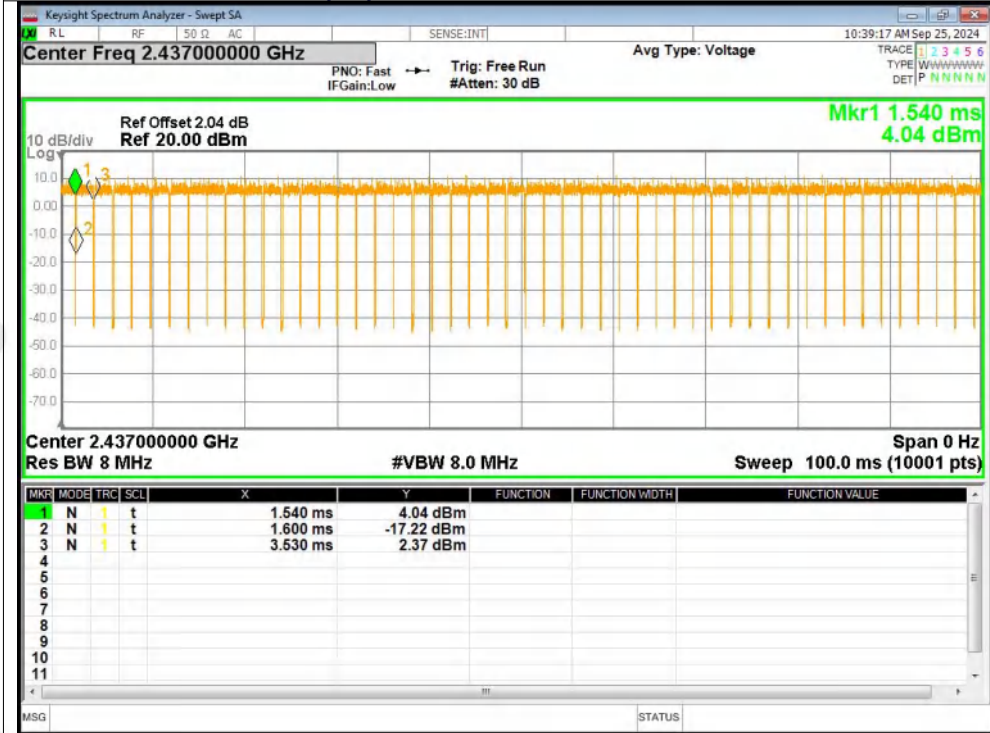


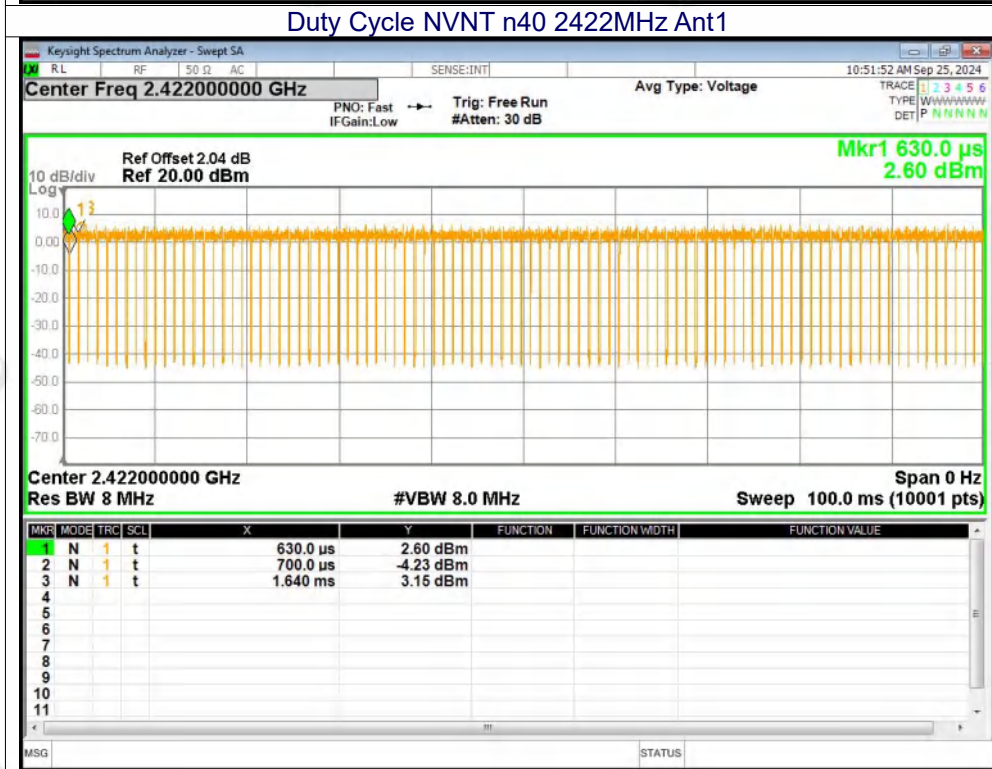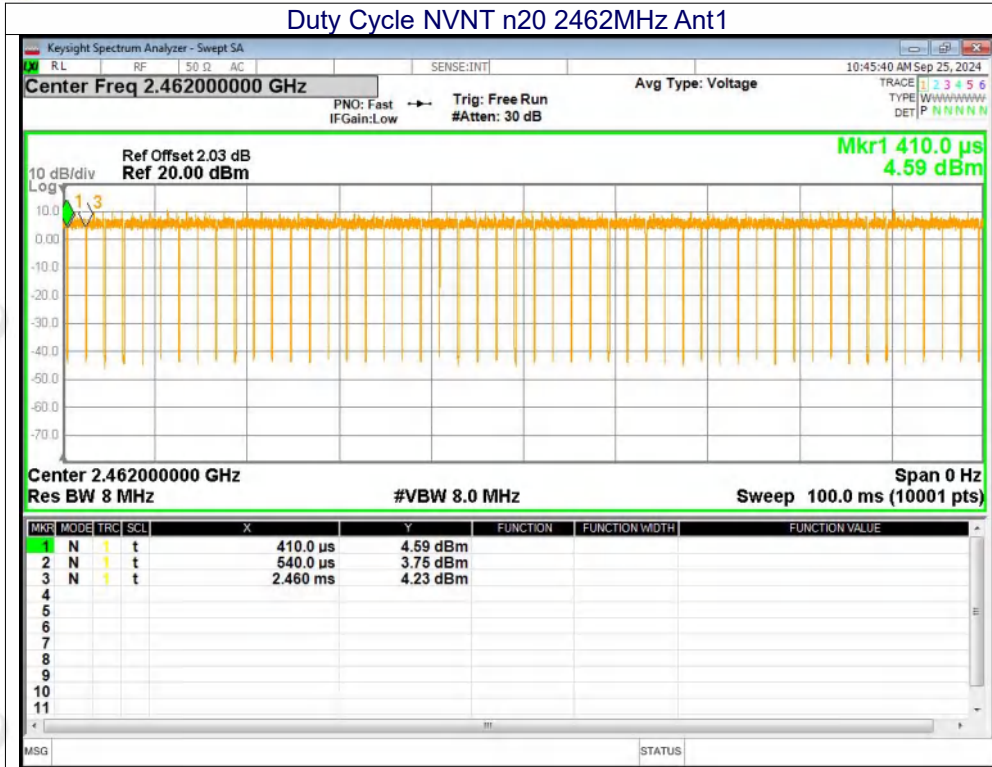

Duty Cycle NVNT n40 2437MHz Ant1

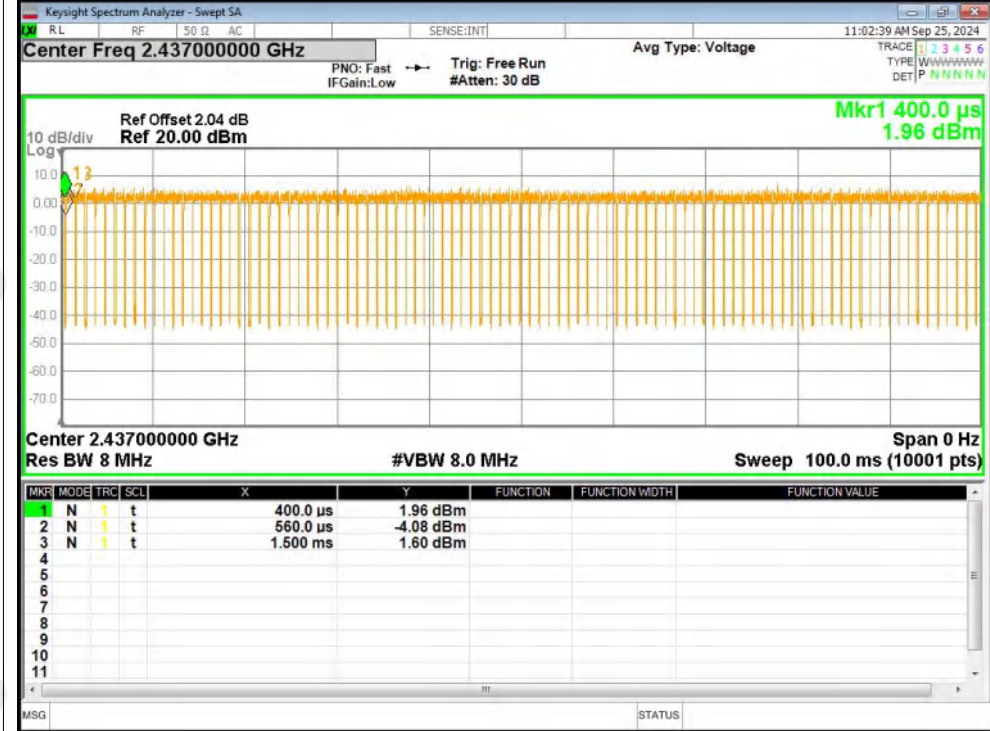

Duty Cycle NVNT n40 2452MHz Ant1

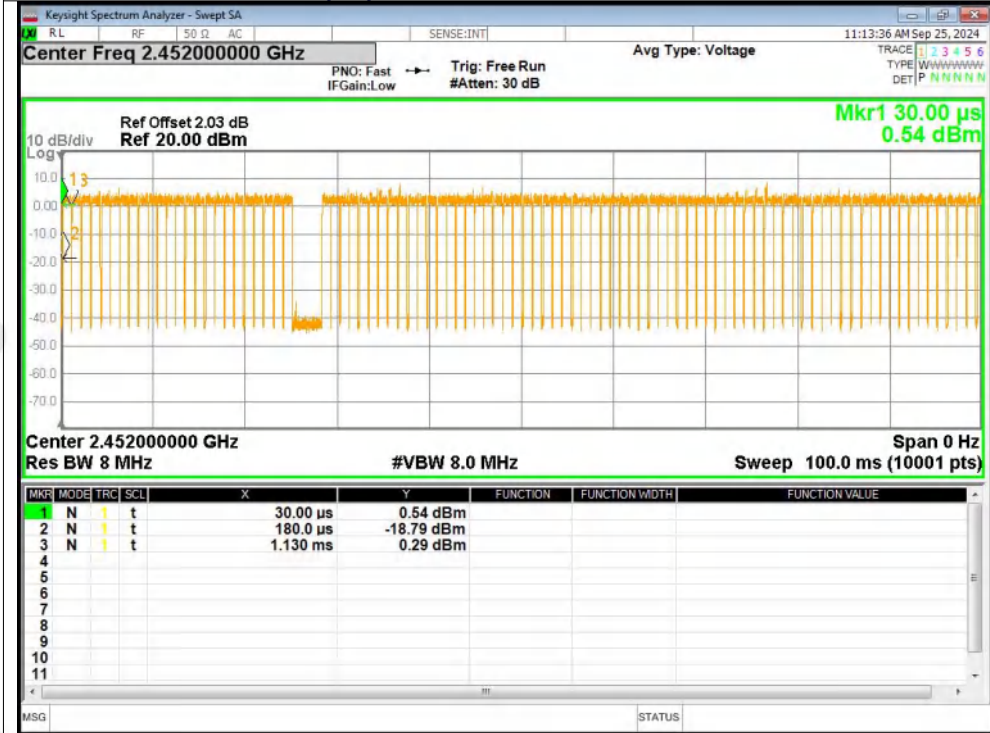



11.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER


Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	8.14	30	Pass
b	2437	Ant1	7.92	30	Pass
b	2462	Ant1	7.71	30	Pass
g	2412	Ant1	7.37	30	Pass
g	2437	Ant1	7.26	30	Pass
g	2462	Ant1	7.20	30	Pass
n20	2412	Ant1	6.81	30	Pass
n20	2437	Ant1	7.23	30	Pass
n20	2462	Ant1	7.04	30	Pass
n40	2422	Ant1	6.31	30	Pass
n40	2437	Ant1	6.35	30	Pass
n40	2452	Ant1	6.40	30	Pass




Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	10.08	0.5	Pass
b	2437	Ant1	10.039	0.5	Pass
b	2462	Ant1	10.058	0.5	Pass
g	2412	Ant1	16.339	0.5	Pass
g	2437	Ant1	16.336	0.5	Pass
g	2462	Ant1	16.328	0.5	Pass
n20	2412	Ant1	17.355	0.5	Pass
n20	2437	Ant1	17.231	0.5	Pass
n20	2462	Ant1	17.528	0.5	Pass
n40	2422	Ant1	35.045	0.5	Pass
n40	2437	Ant1	35.132	0.5	Pass
n40	2452	Ant1	35.463	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1

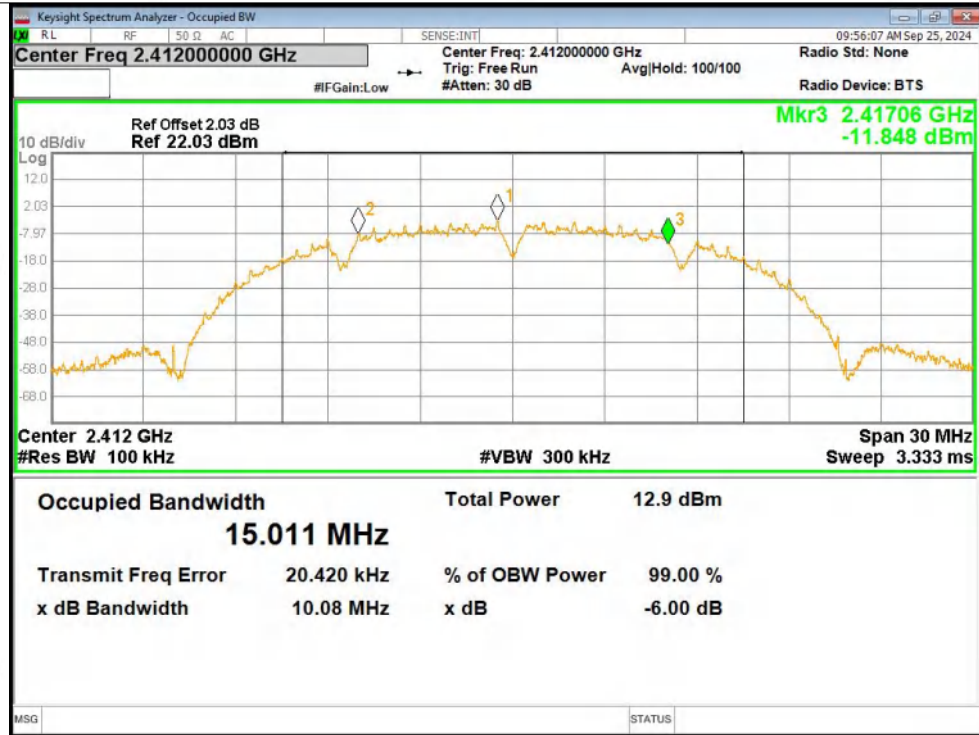


-6dB Bandwidth NVNT b 2437MHz Ant1

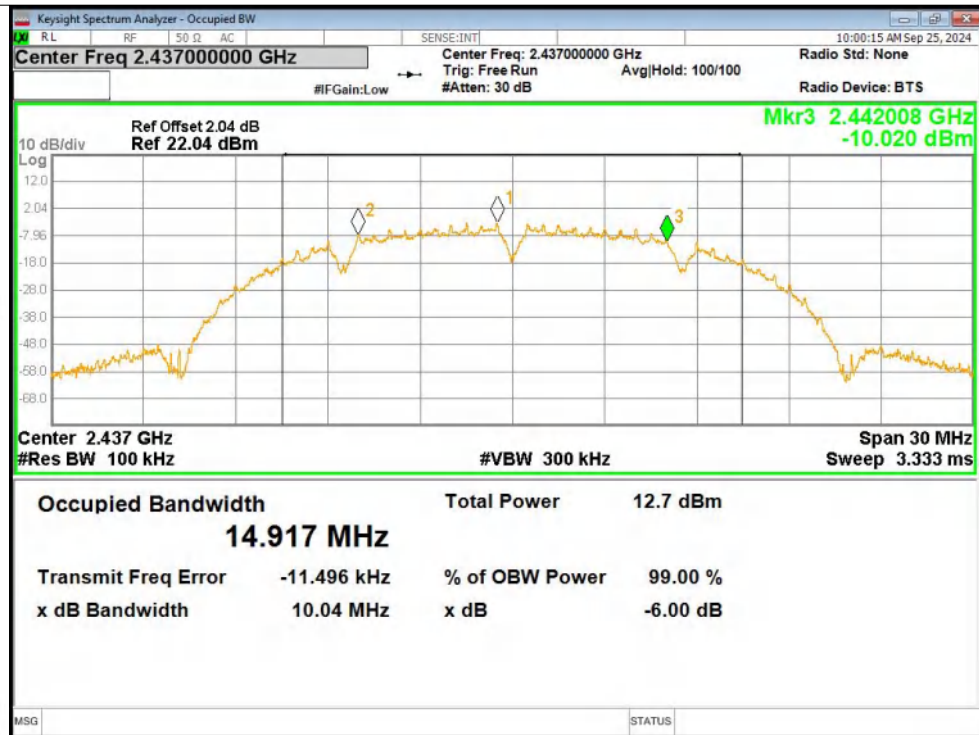


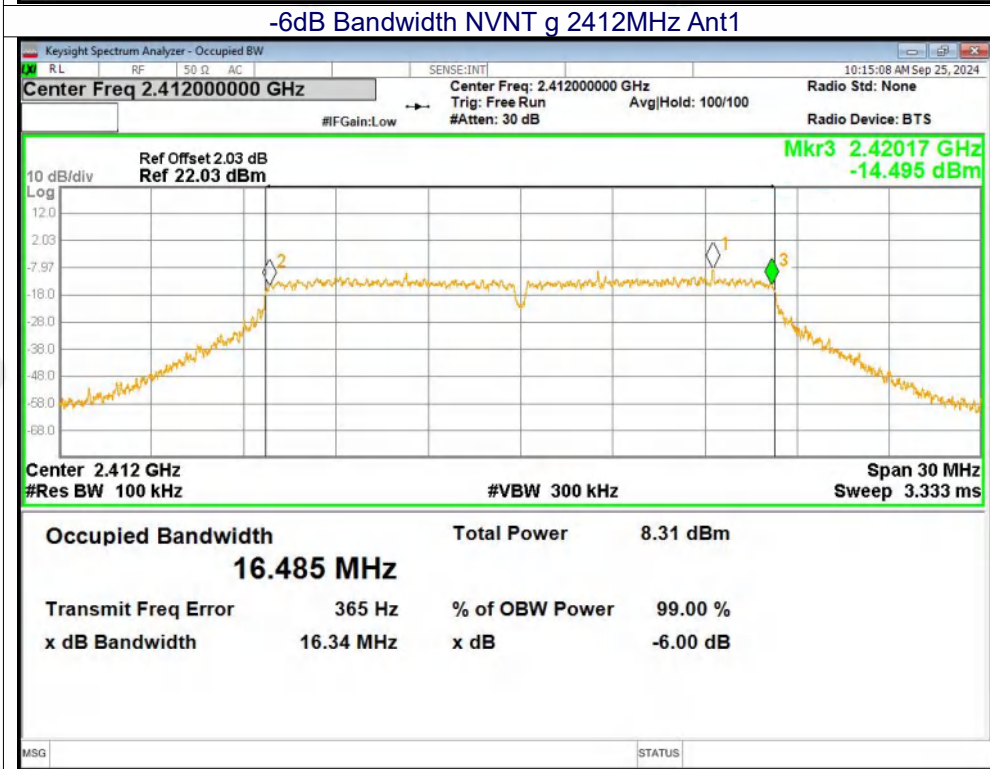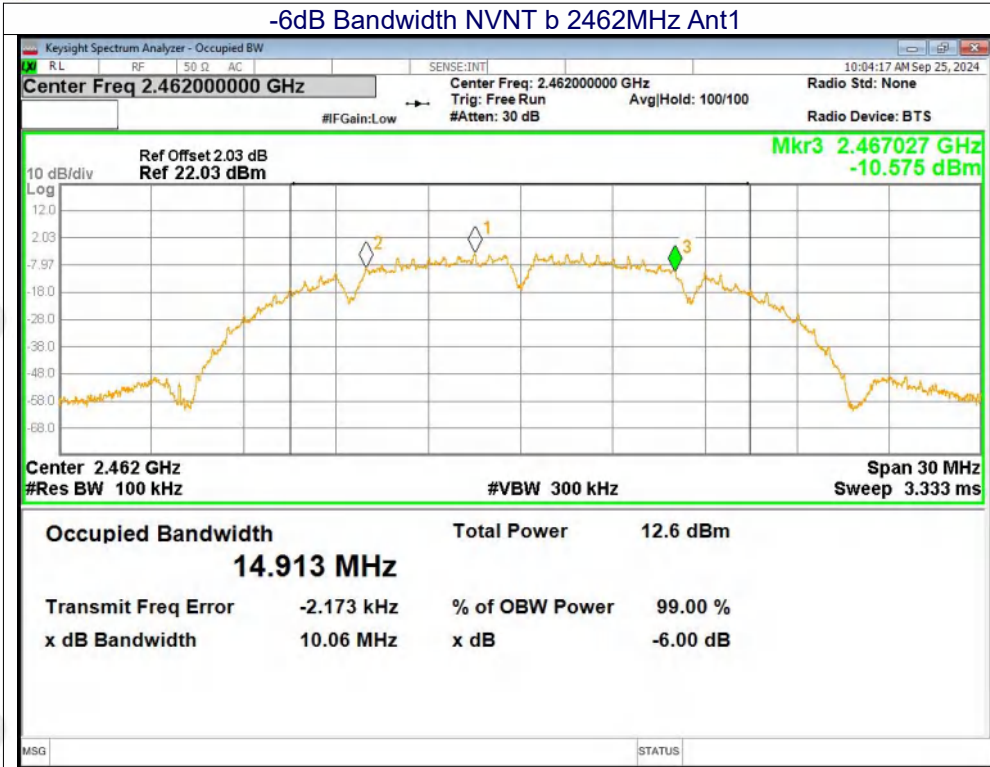


-6dB Bandwidth NVNT g 2437MHz Ant1

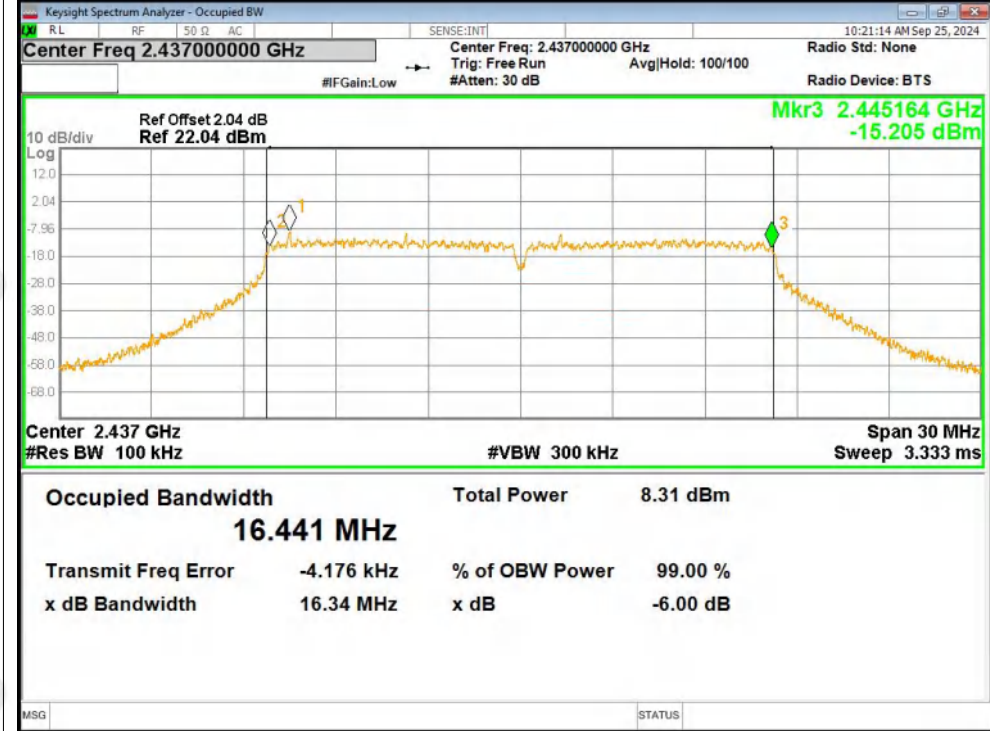


-6dB Bandwidth NVNT g 2462MHz Ant1

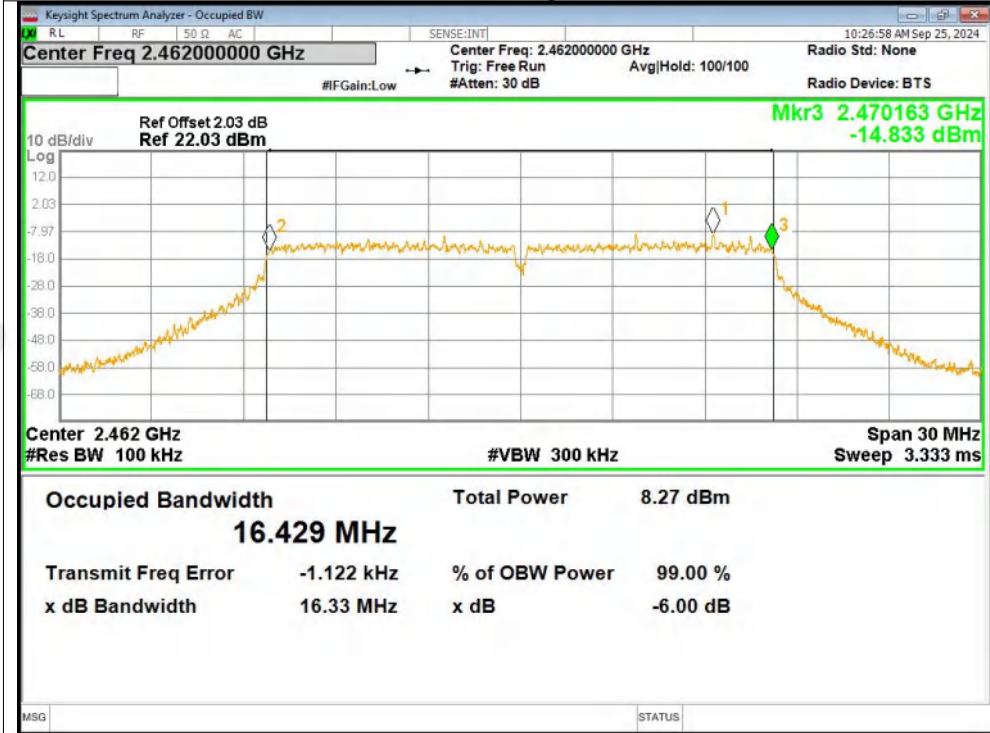


-6dB Bandwidth NVNT n20 2412MHz Ant1

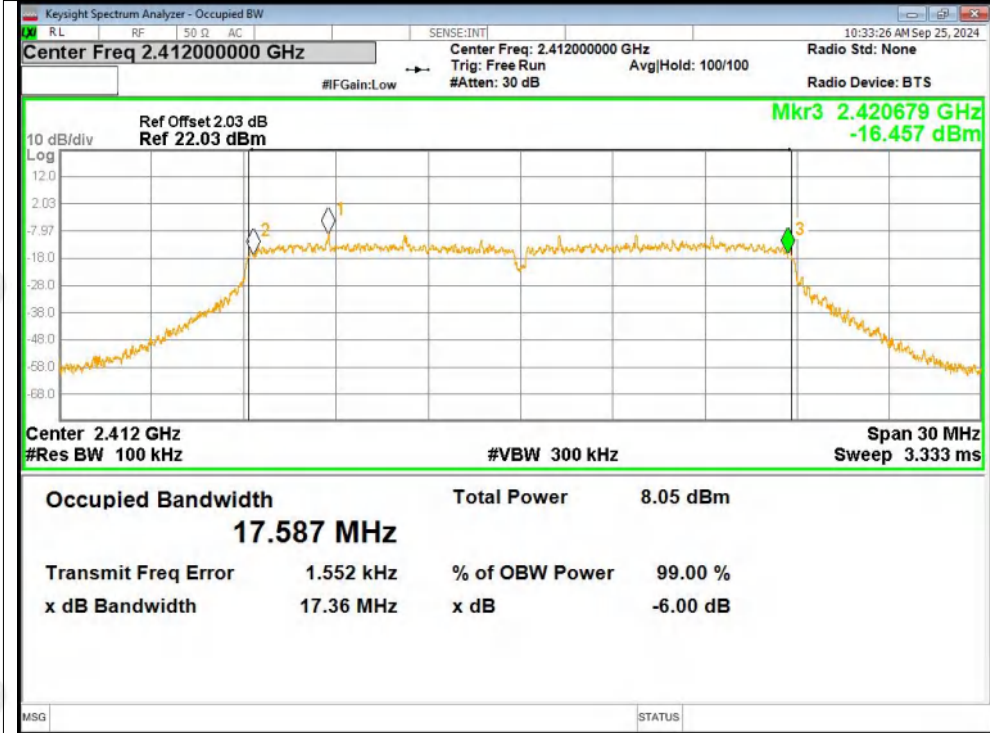


-6dB Bandwidth NVNT n20 2437MHz Ant1

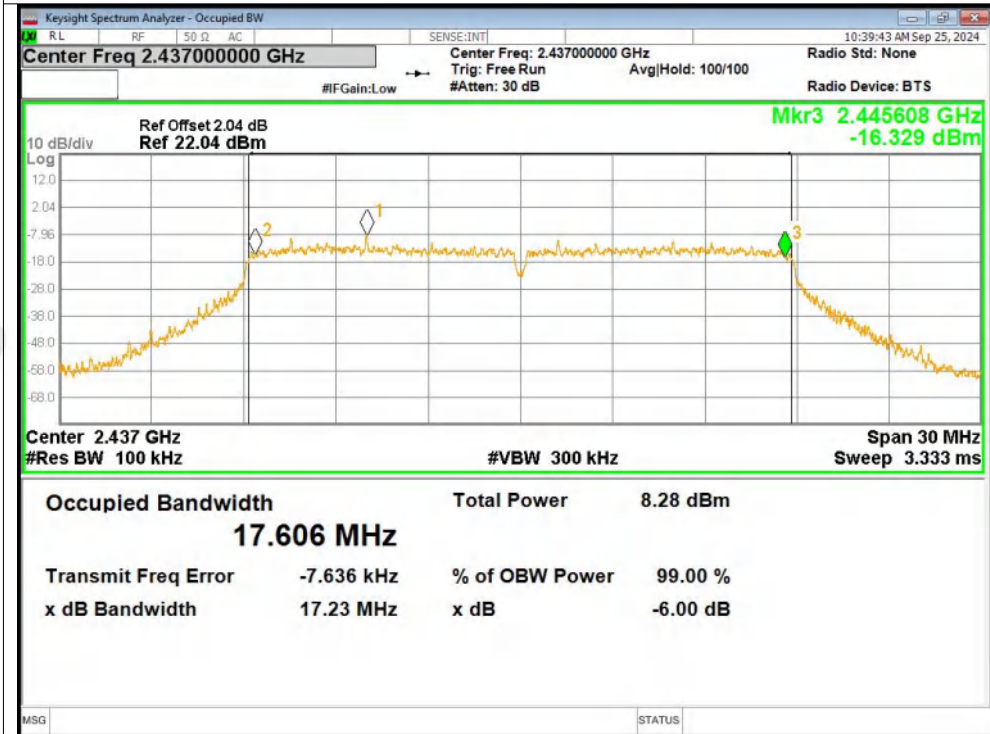


-6dB Bandwidth NVNT n20 2462MHz Ant1

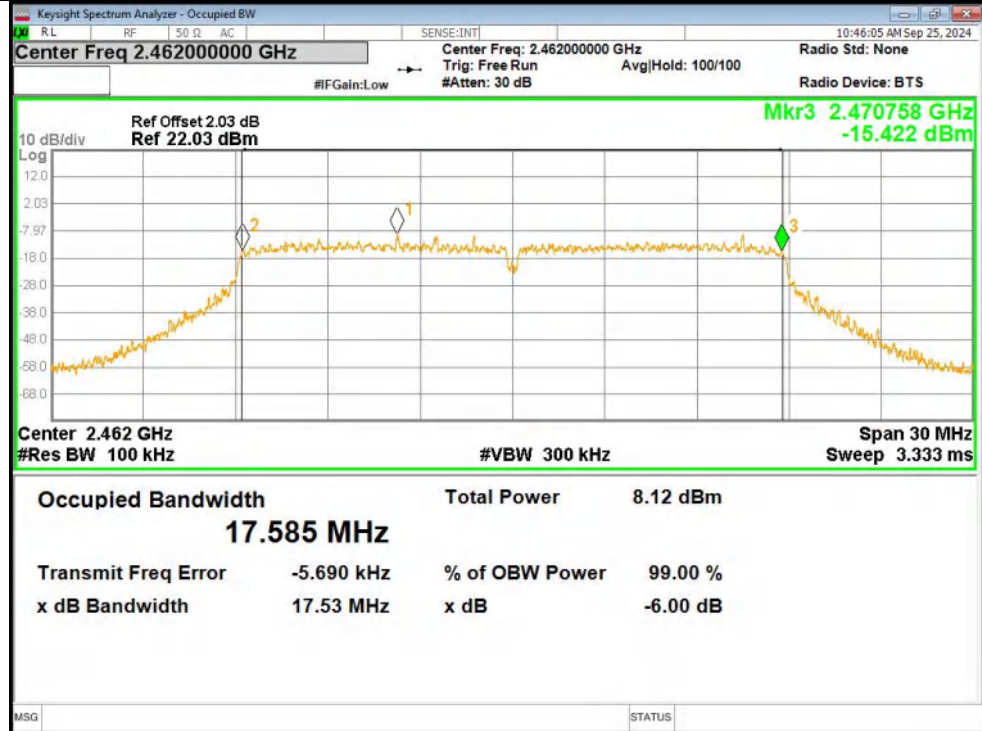


-6dB Bandwidth NVNT n40 2422MHz Ant1

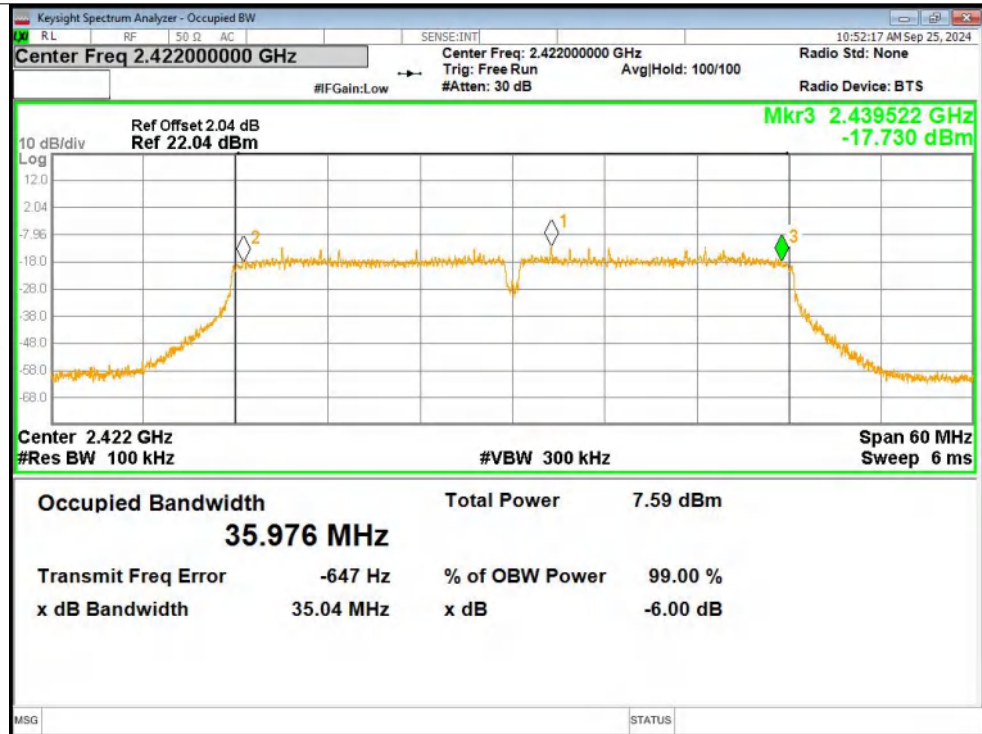

-6dB Bandwidth NVNT n40 2437MHz Ant1

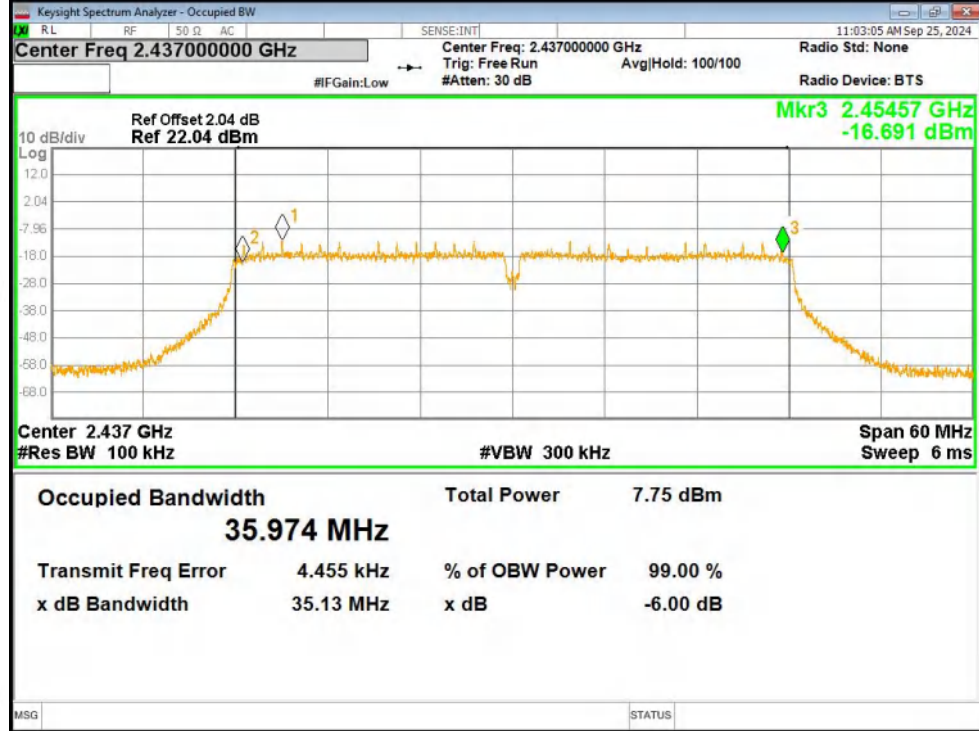

-6dB Bandwidth NVNT n40 2452MHz Ant1

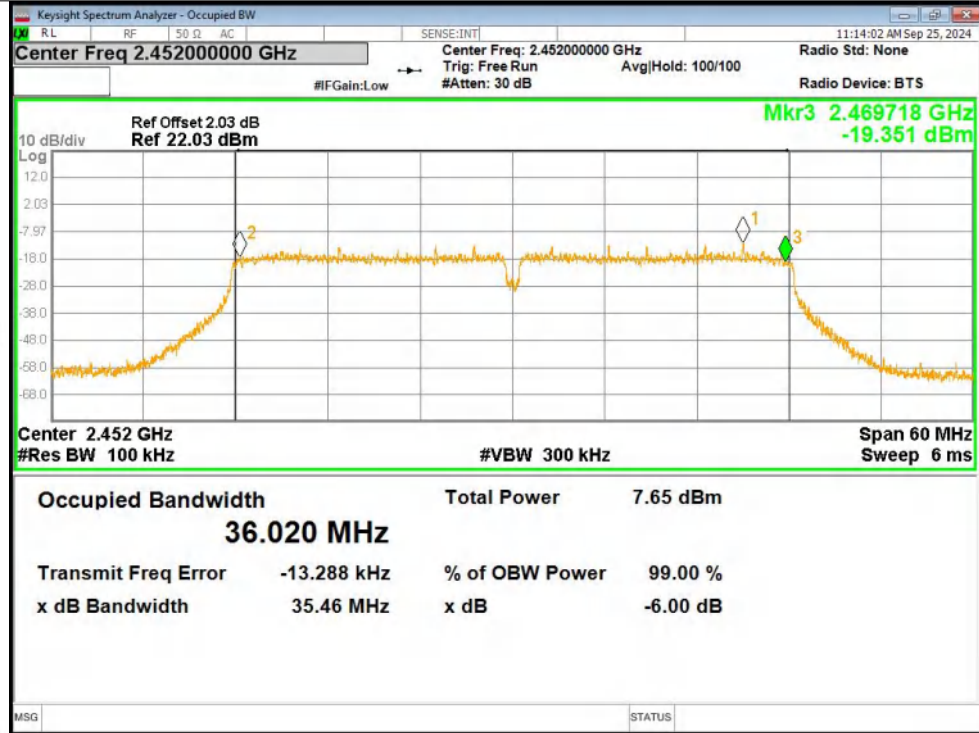





11.4 OCCUPIED CHANNEL BANDWIDTH

Mode	Frequency (MHz)	99% OBW (MHz)
b	2412	15.016
b	2437	14.963
b	2462	14.942
g	2412	16.61
g	2437	16.566
g	2462	16.505
n20	2412	17.664
n20	2437	17.654
n20	2462	17.598
n40	2422	36.117
n40	2437	36.113
n40	2452	36.146


Test Graphs
OBW NVNT b 2412MHz Ant1

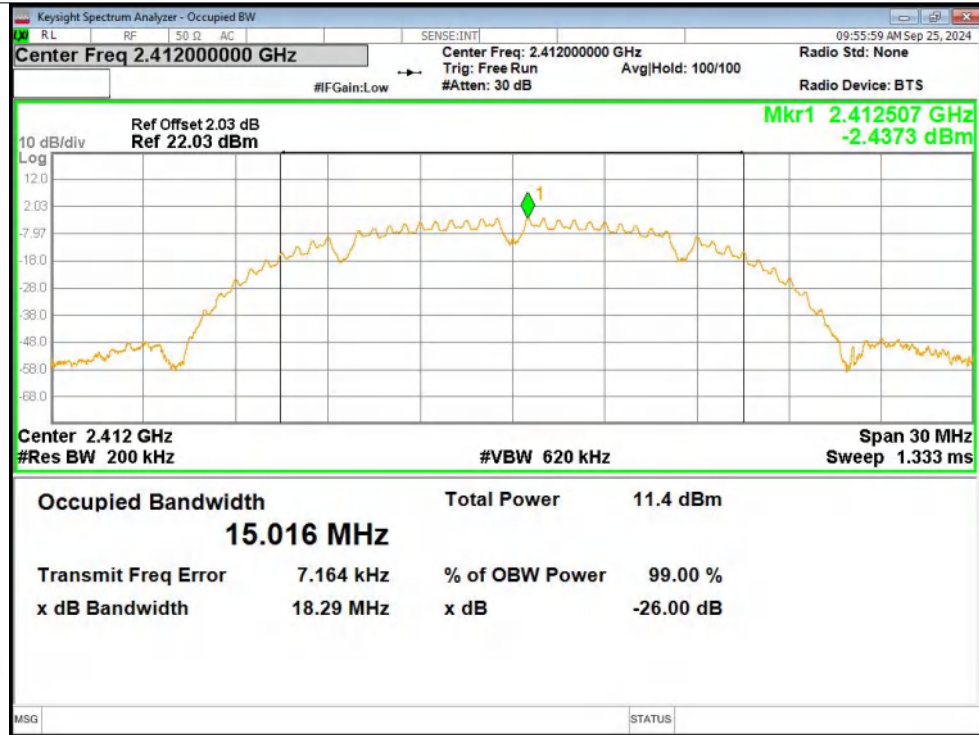


OBW NVNT b 2437MHz Ant1

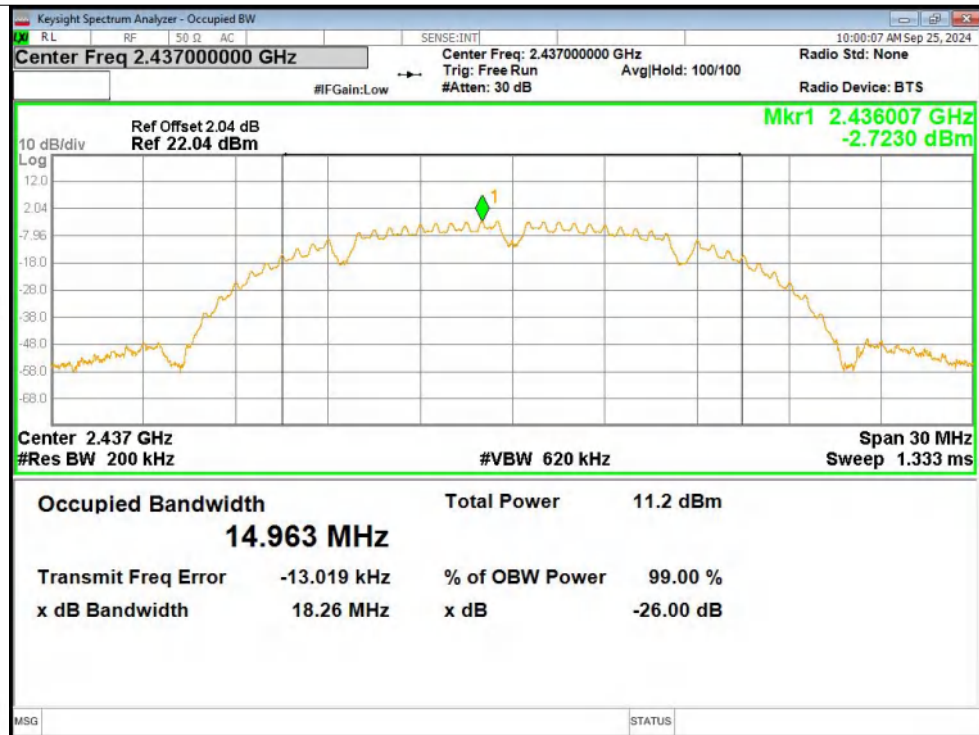

OBW NVNT b 2462MHz Ant1

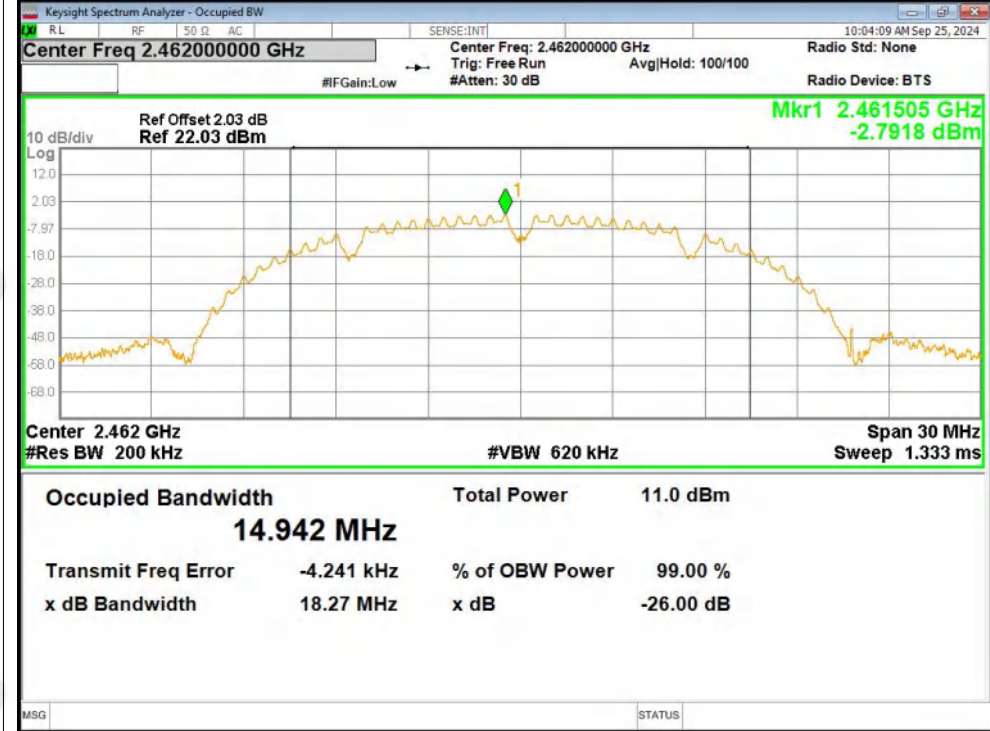


OBW NVNT g 2412MHz Ant1

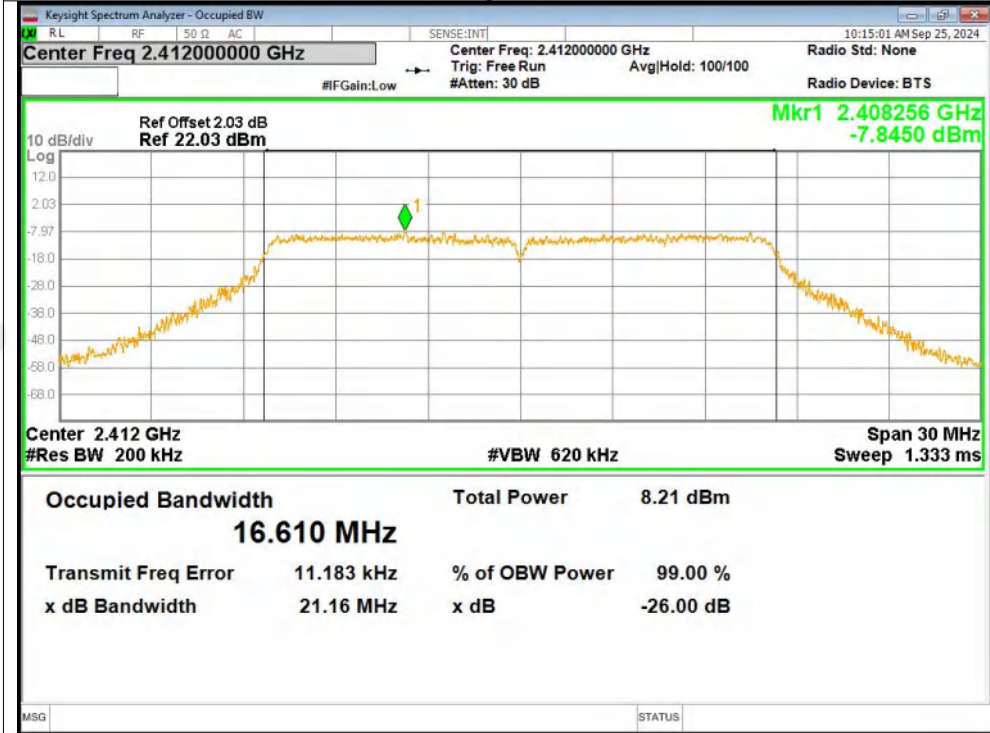





OBW NVNT g 2437MHz Ant1

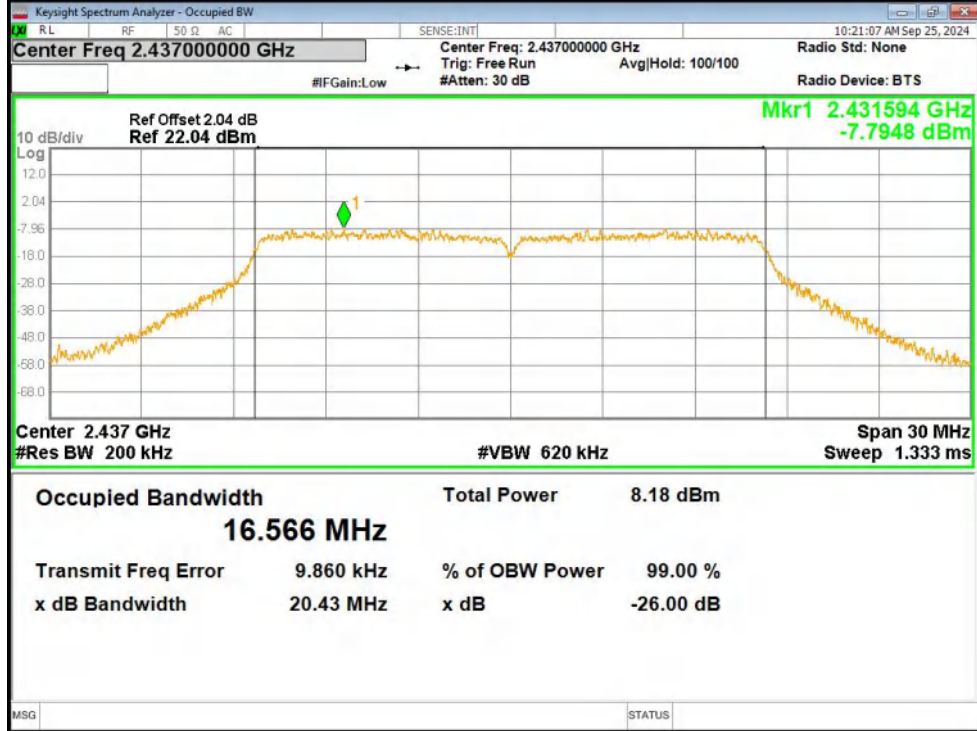


OBW NVNT g 2462MHz Ant1

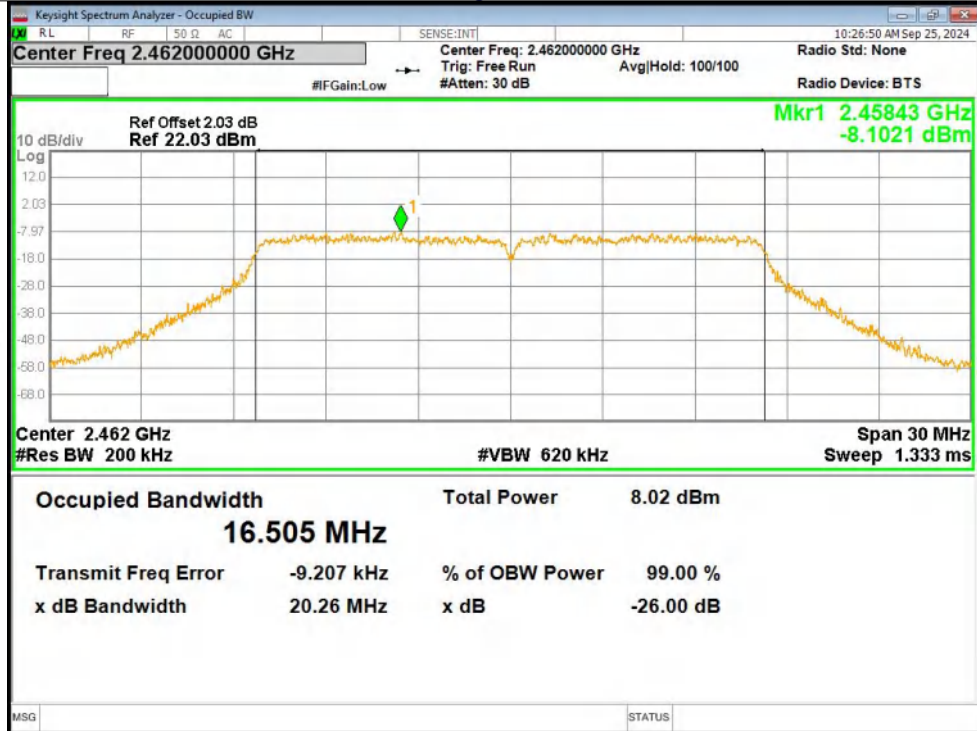


OBW NVNT n20 2412MHz Ant1

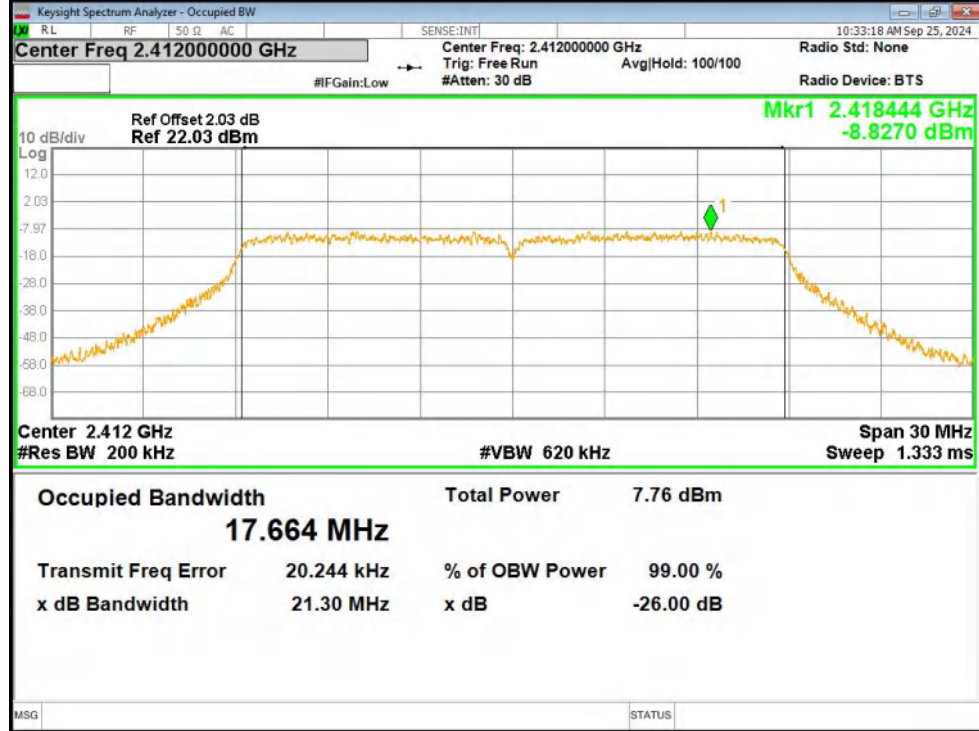


OBW NVNT n20 2437MHz Ant1

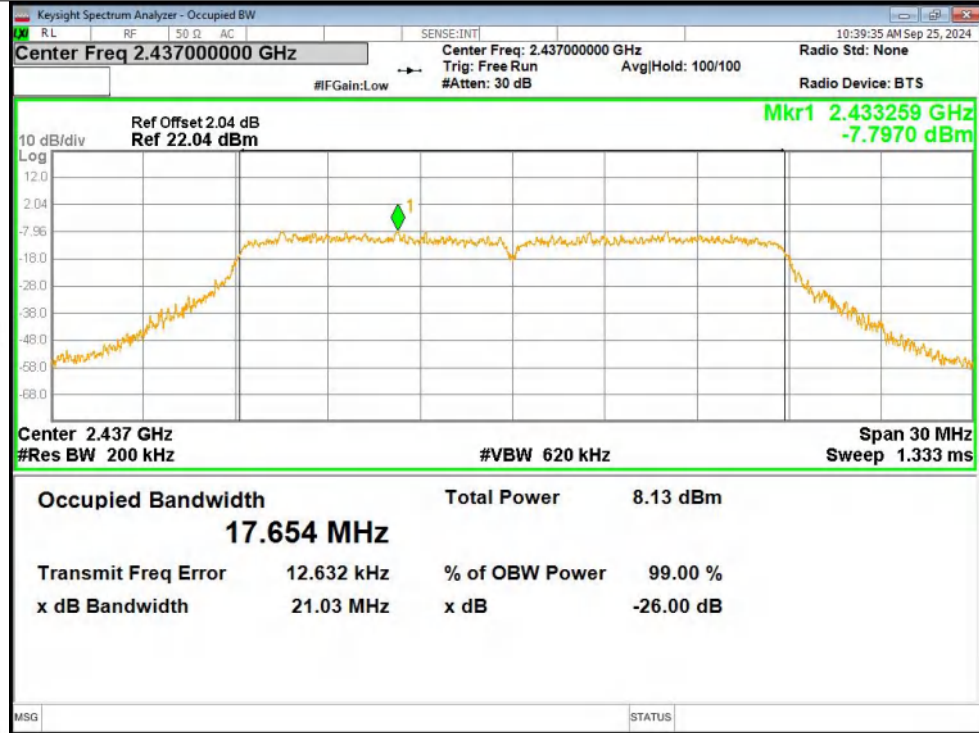


OBW NVNT n20 2462MHz Ant1

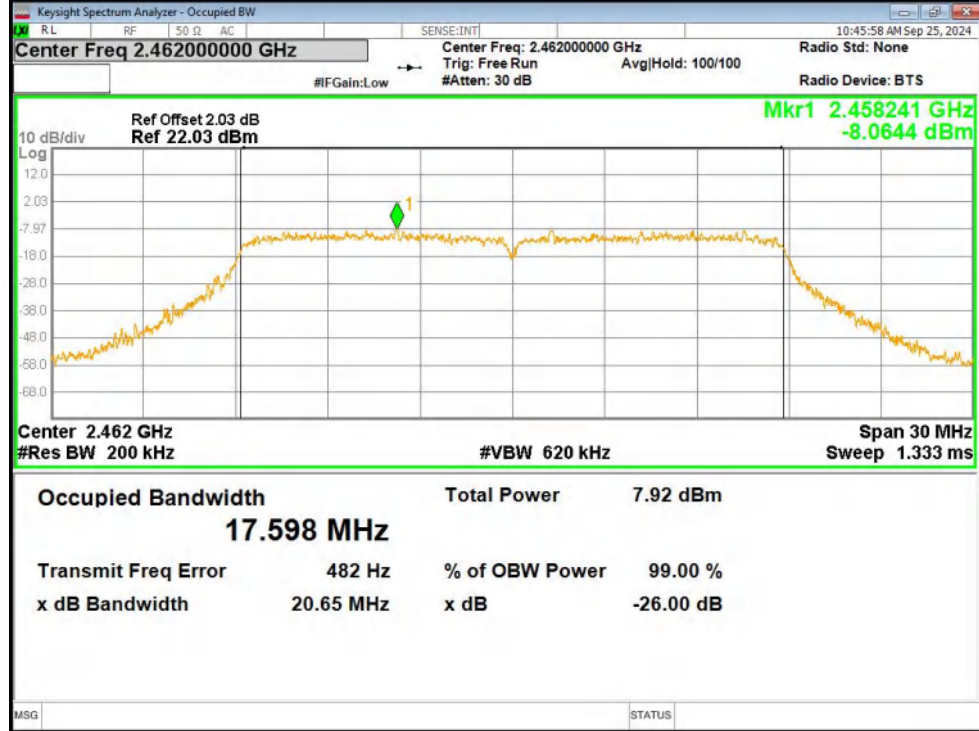


OBW NVNT n40 2422MHz Ant1

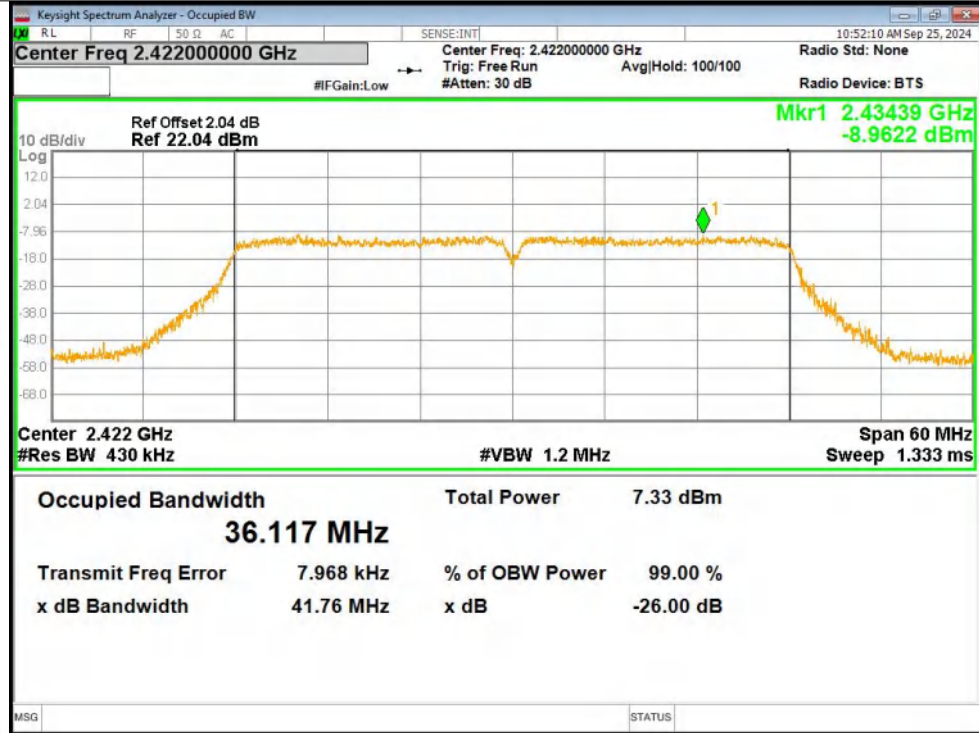

OBW NVNT n40 2437MHz Ant1

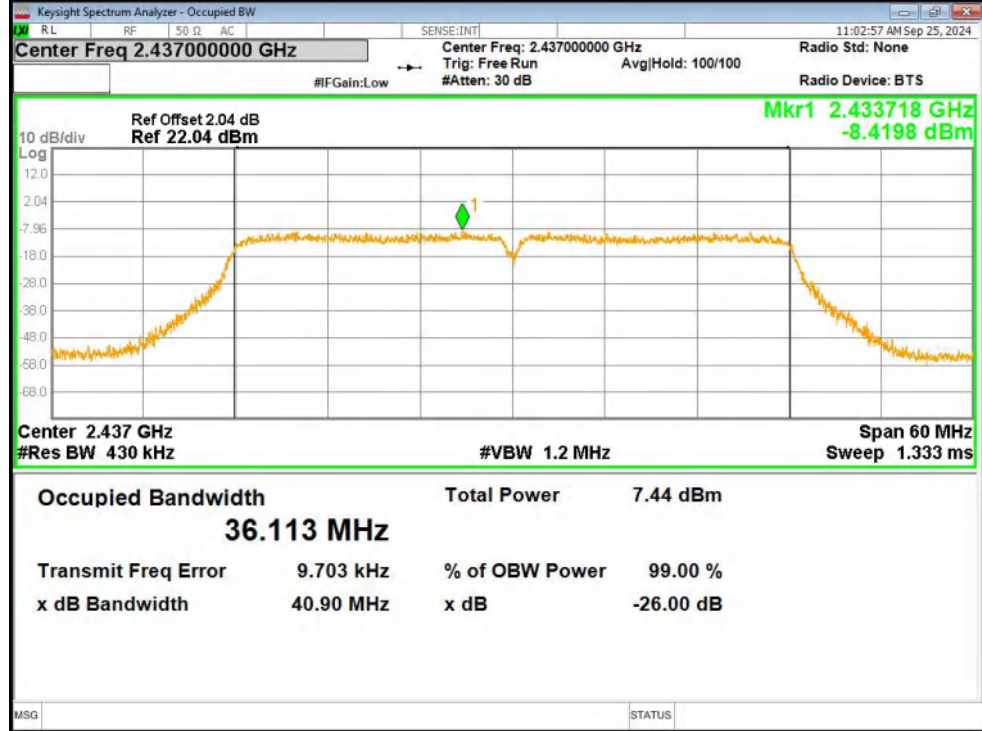



OBW NVNT n40 2452MHz Ant1

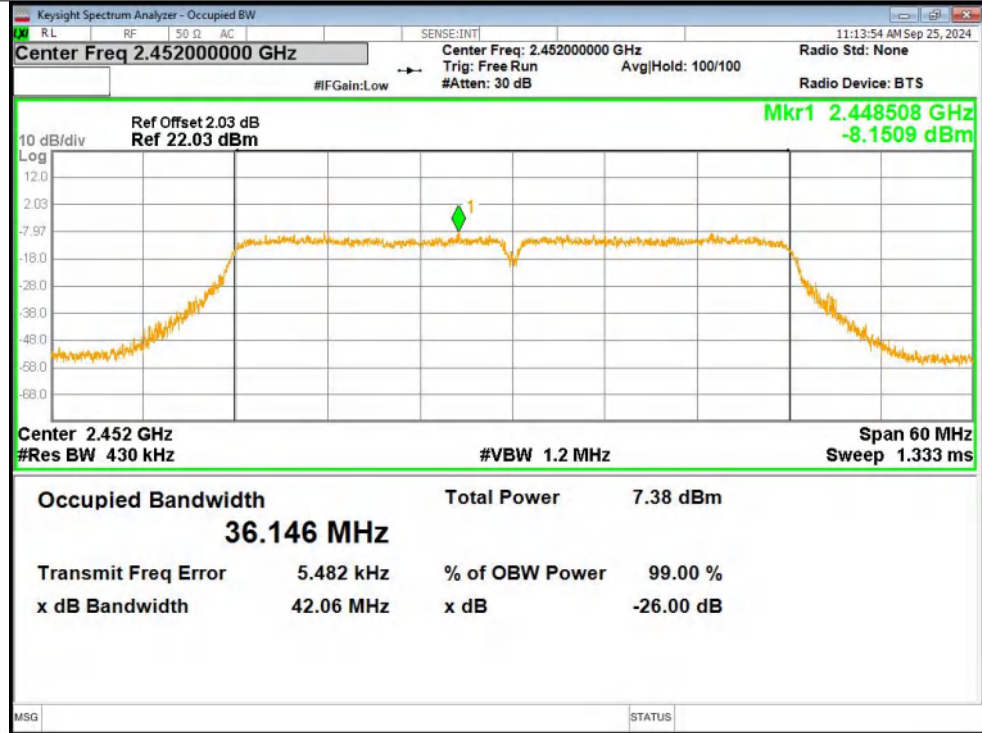




11.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-15.66	8	Pass
b	2437	Ant1	-15.54	8	Pass
b	2462	Ant1	-14.88	8	Pass
g	2412	Ant1	-21.63	8	Pass
g	2437	Ant1	-21.57	8	Pass
g	2462	Ant1	-22.36	8	Pass
n20	2412	Ant1	-22.27	8	Pass
n20	2437	Ant1	-20.37	8	Pass
n20	2462	Ant1	-22.08	8	Pass
n40	2422	Ant1	-25.62	8	Pass
n40	2437	Ant1	-26.21	8	Pass
n40	2452	Ant1	-25.75	8	Pass

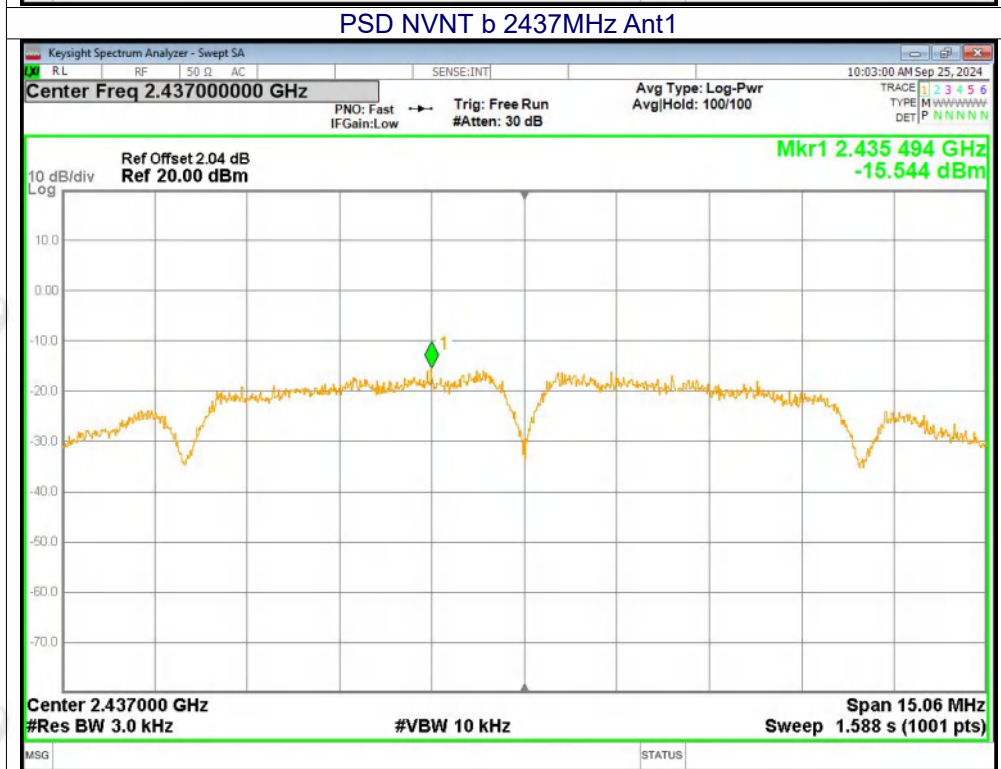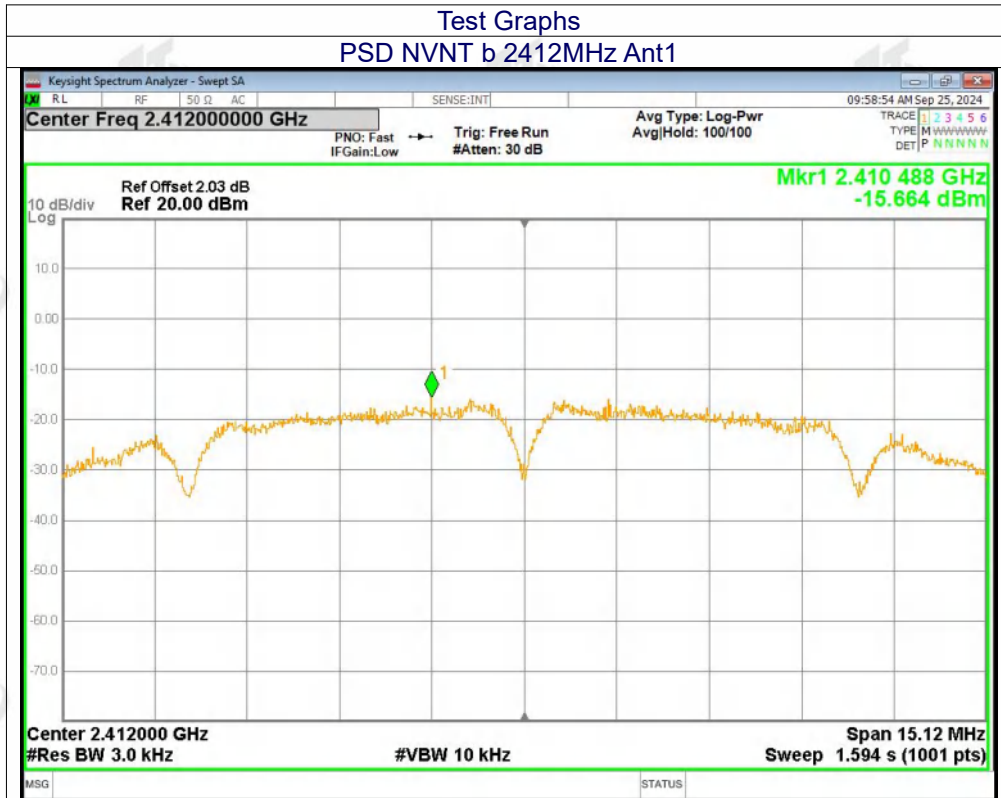




PSD NVNT b 2462MHz Ant1

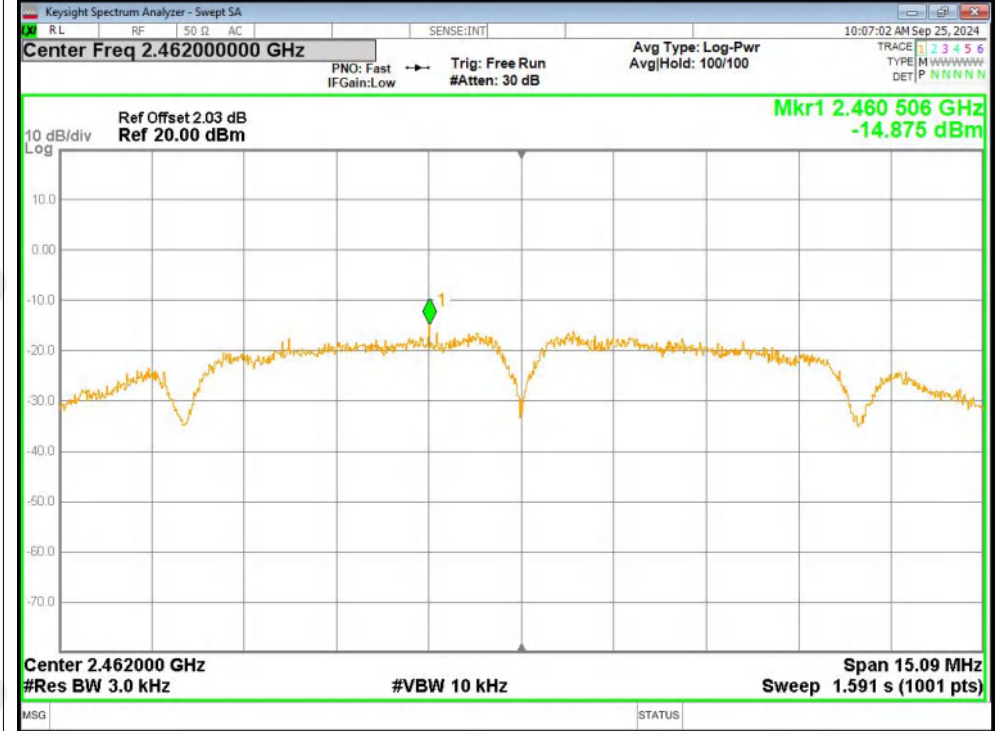


PSD NVNT g 2412MHz Ant1

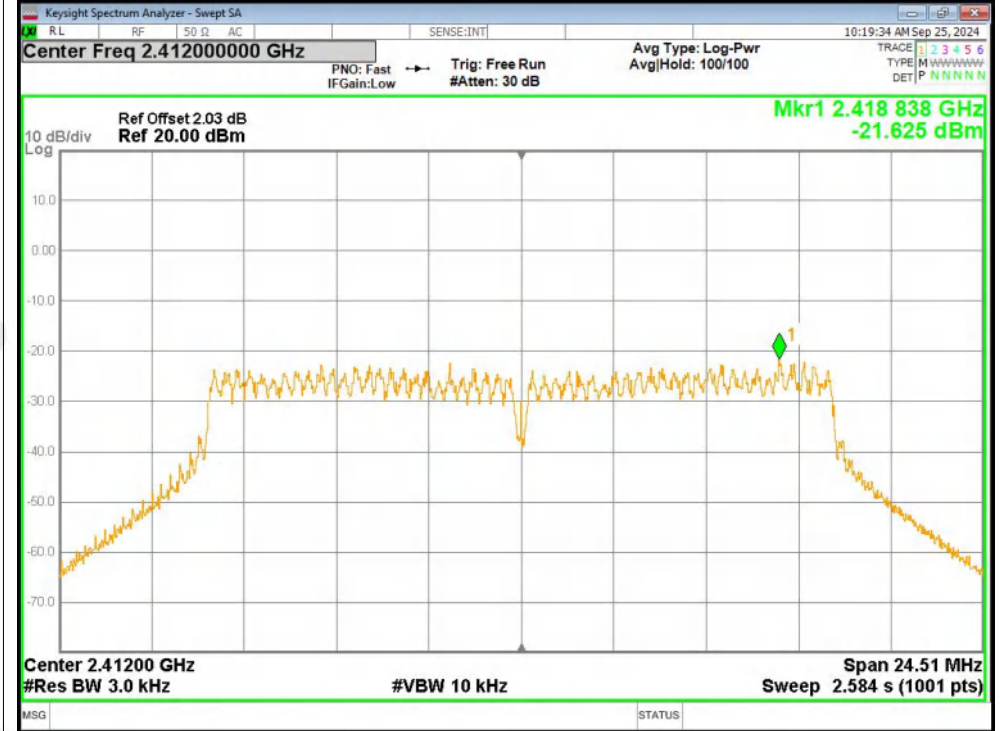




PSD NVNT g 2437MHz Ant1

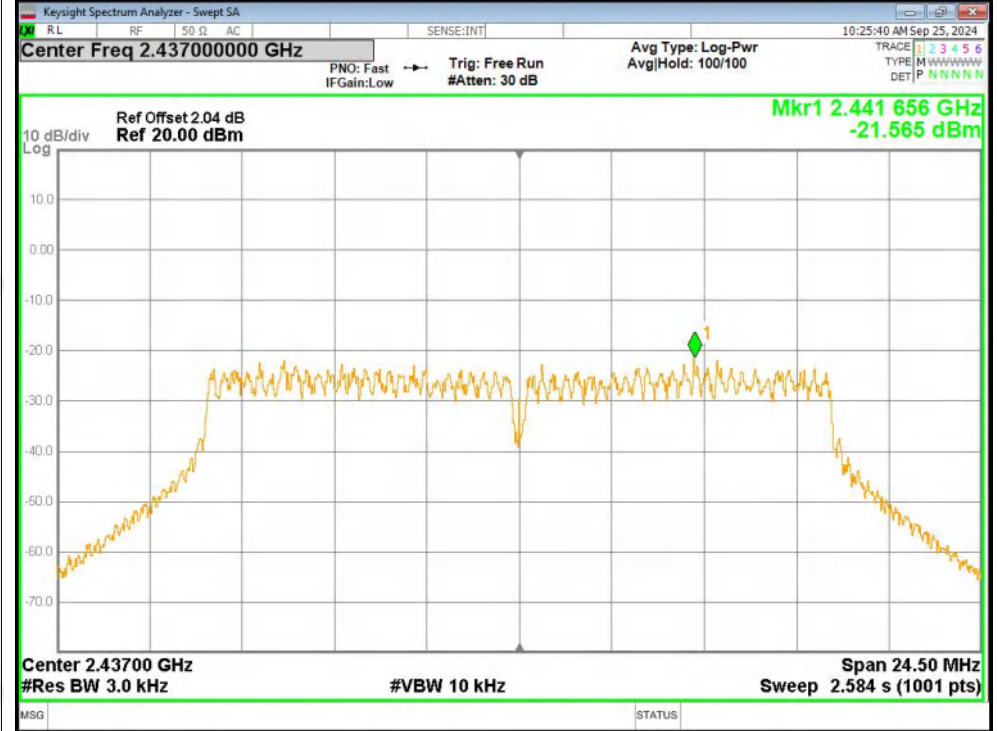


PSD NVNT g 2462MHz Ant1

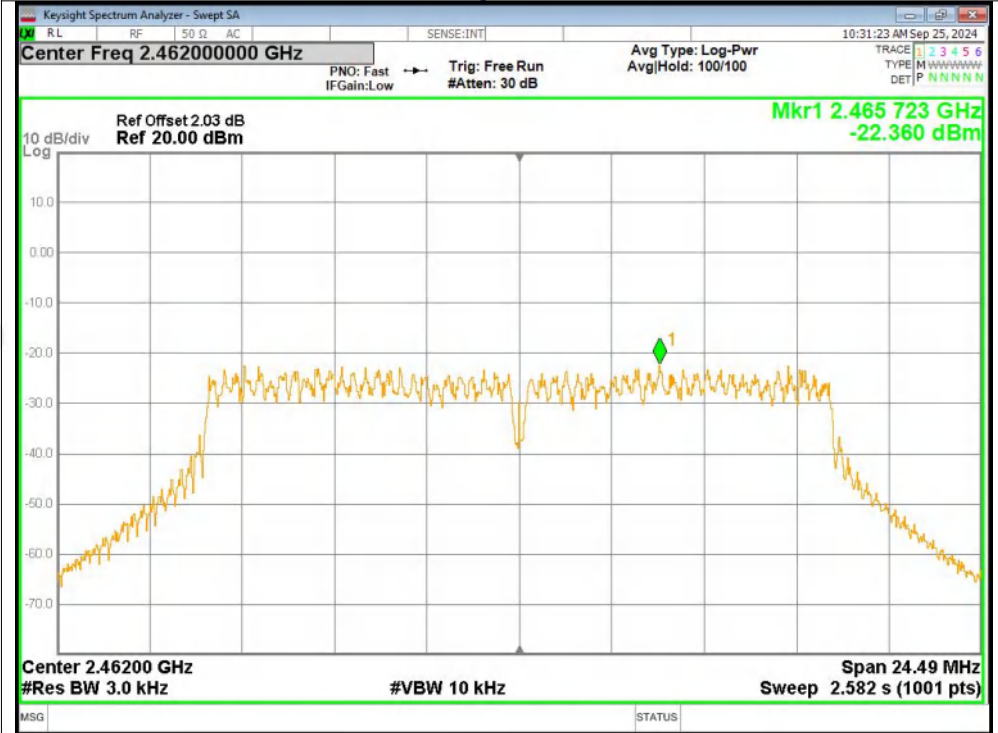




PSD NVNT n20 2412MHz Ant1

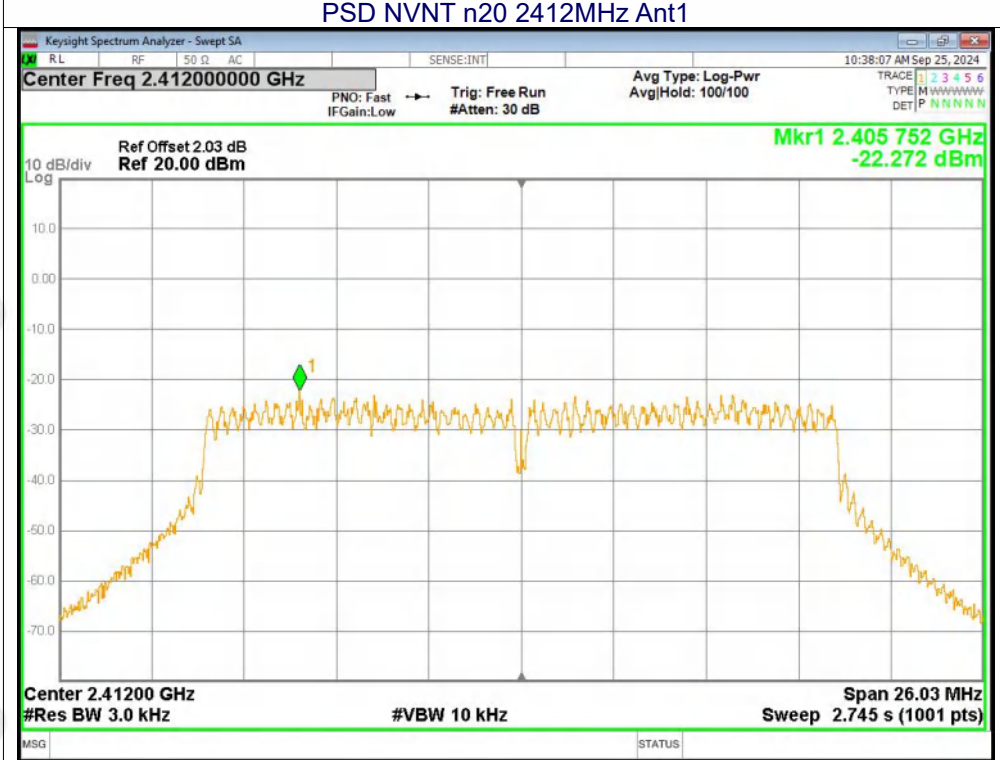


PSD NVNT n20 2437MHz Ant1

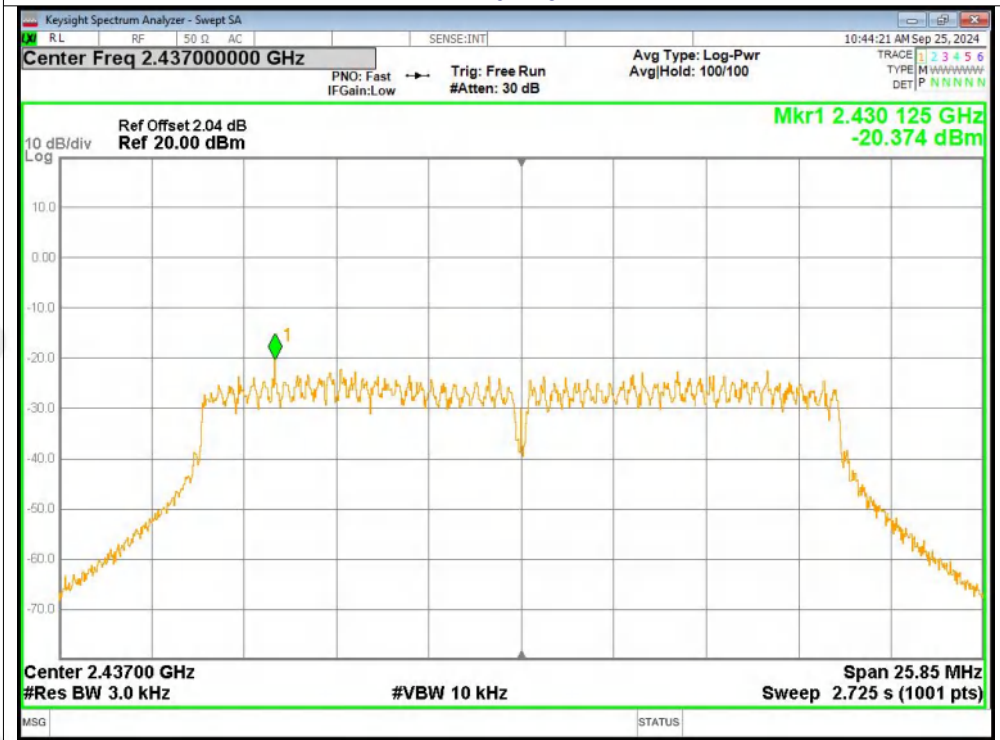






PSD NVNT n20 2462MHz Ant1

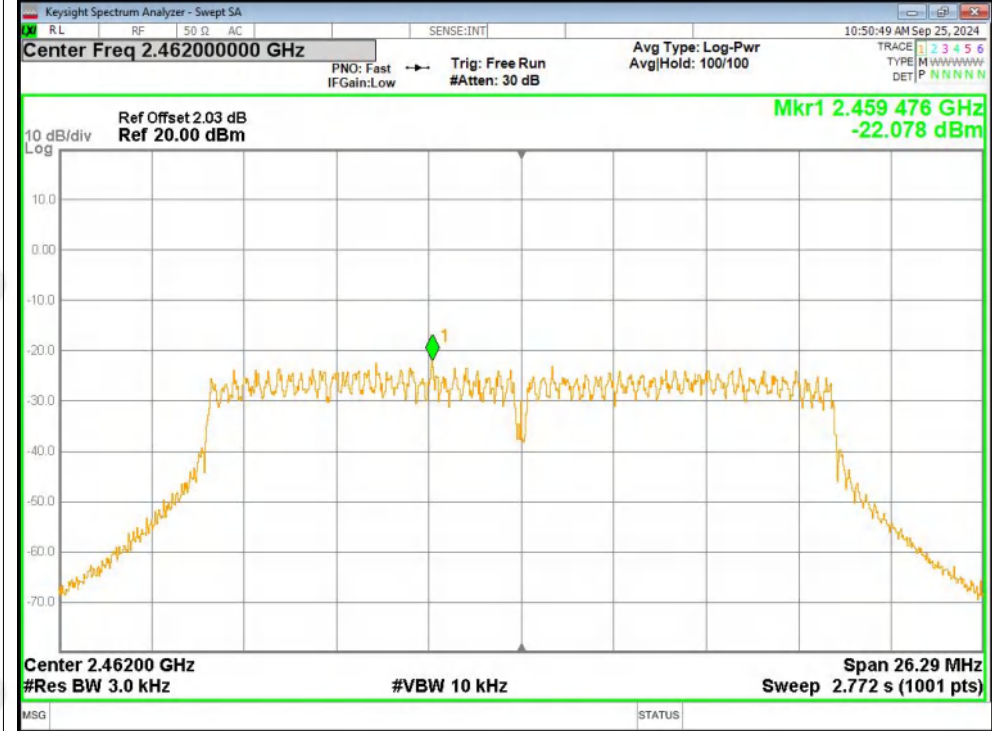

PSD NVNT n40 2422MHz Ant1

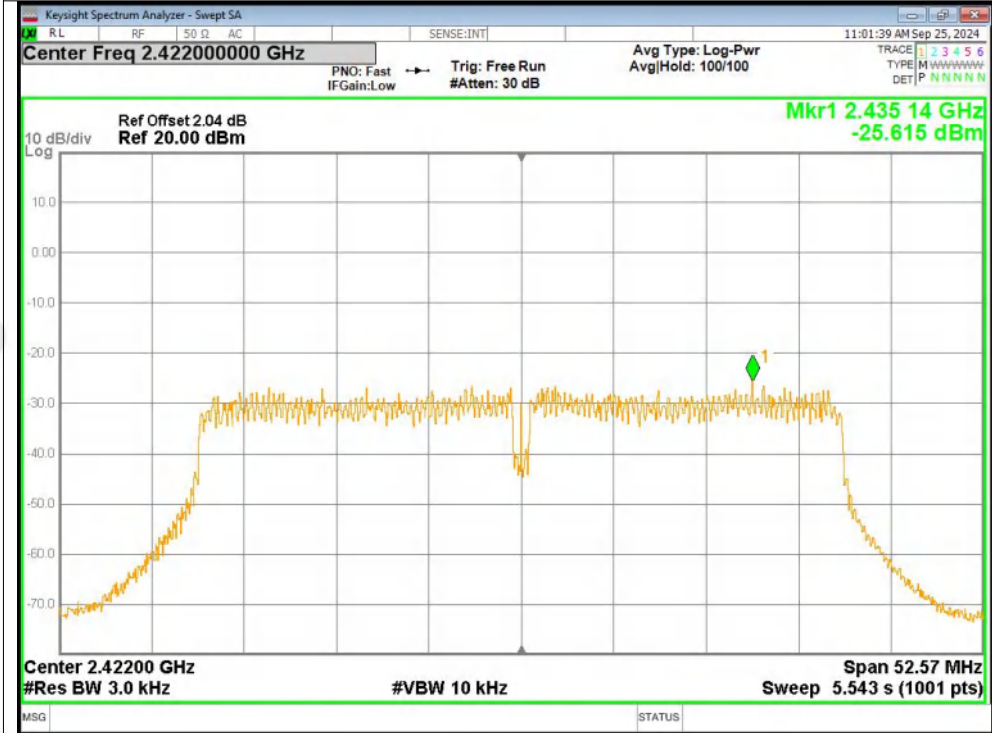


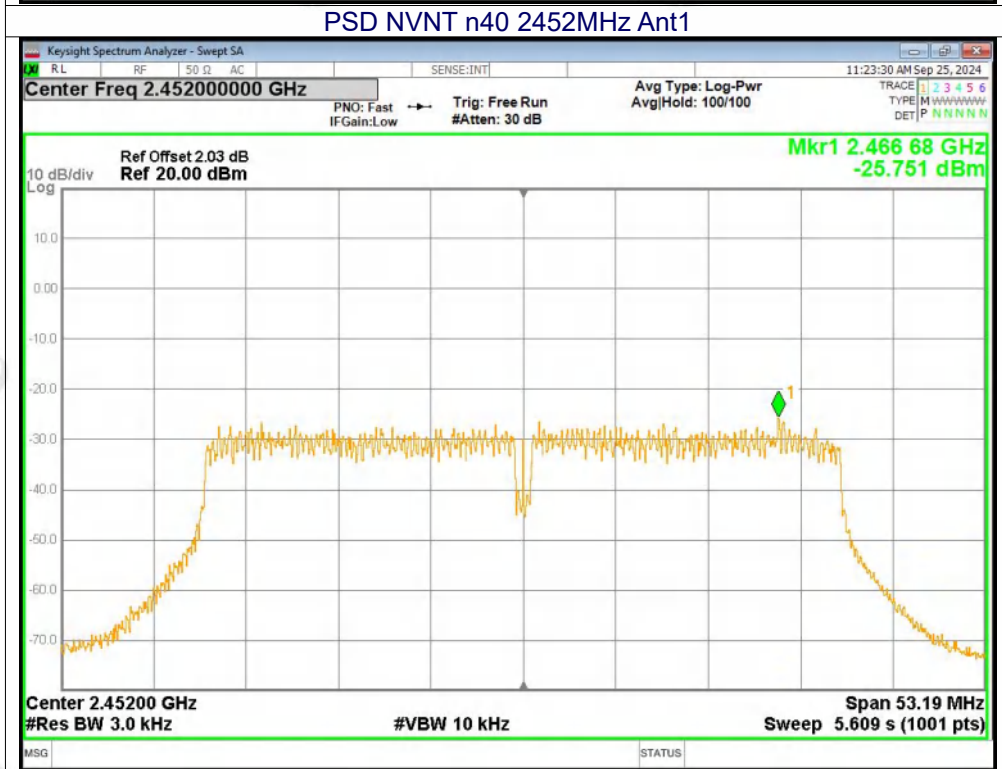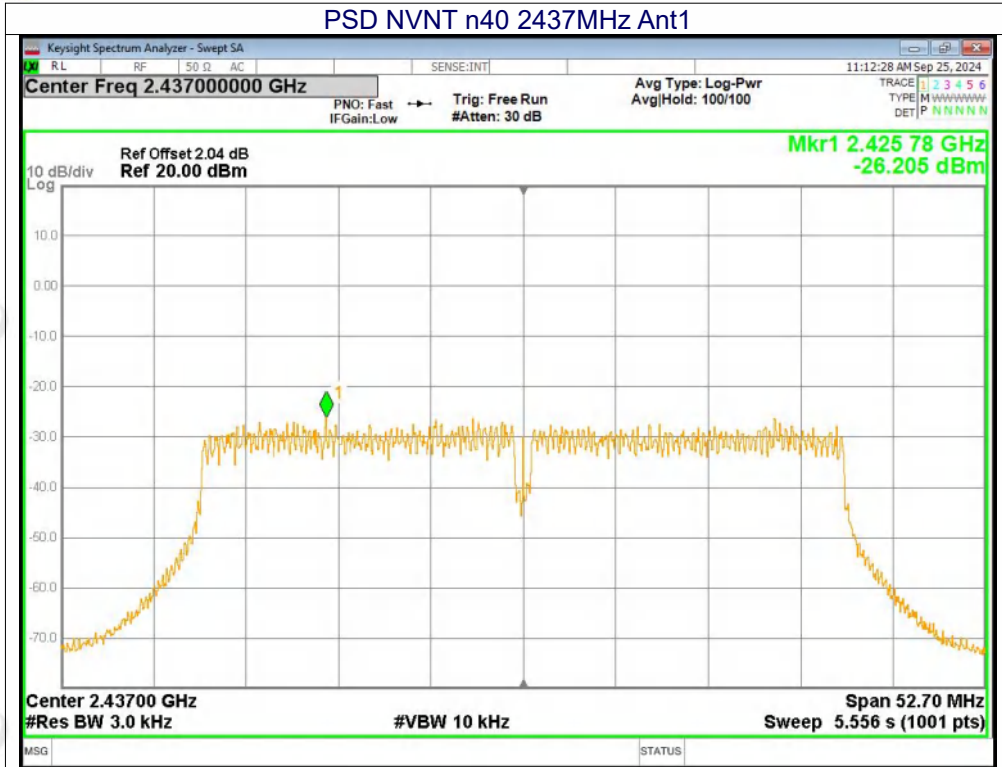




Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-45.81	-20	Pass
b	2462	Ant1	-53.95	-20	Pass
g	2412	Ant1	-36.22	-20	Pass
g	2462	Ant1	-47.78	-20	Pass
n20	2412	Ant1	-37.84	-20	Pass
n20	2462	Ant1	-48.63	-20	Pass
n40	2422	Ant1	-36	-20	Pass
n40	2452	Ant1	-44.04	-20	Pass


Test Graphs
Band Edge NVNT b 2412MHz Ant1 Ref

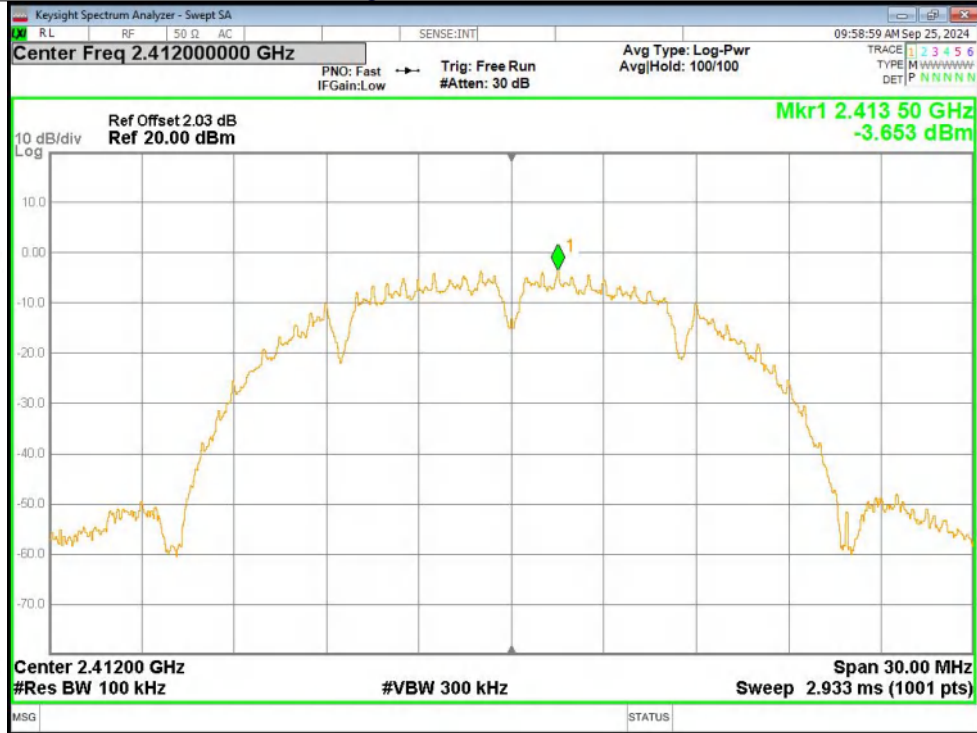


Band Edge NVNT b 2412MHz Ant1 Emission

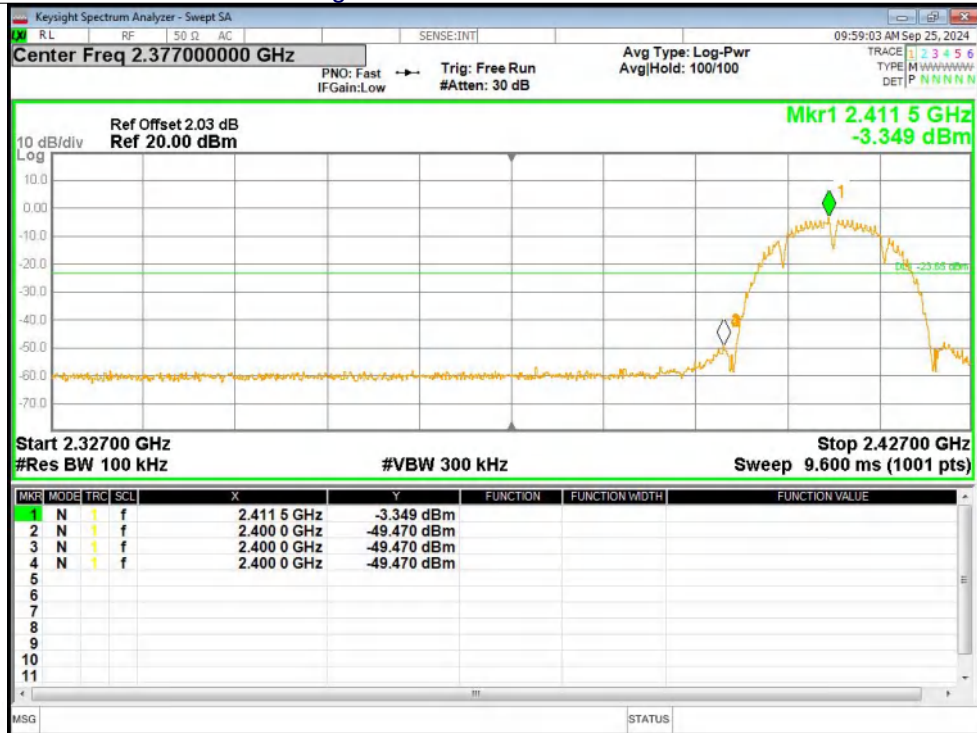


Band Edge NVNT b 2462MHz Ant1 Ref

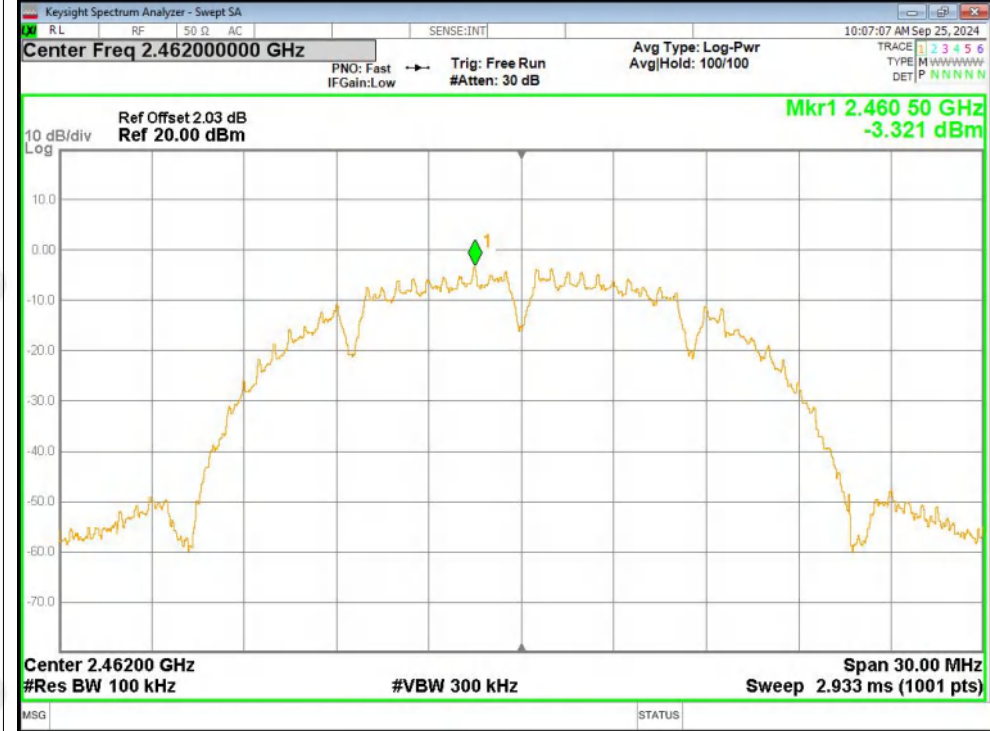


Band Edge NVNT b 2462MHz Ant1 Emission

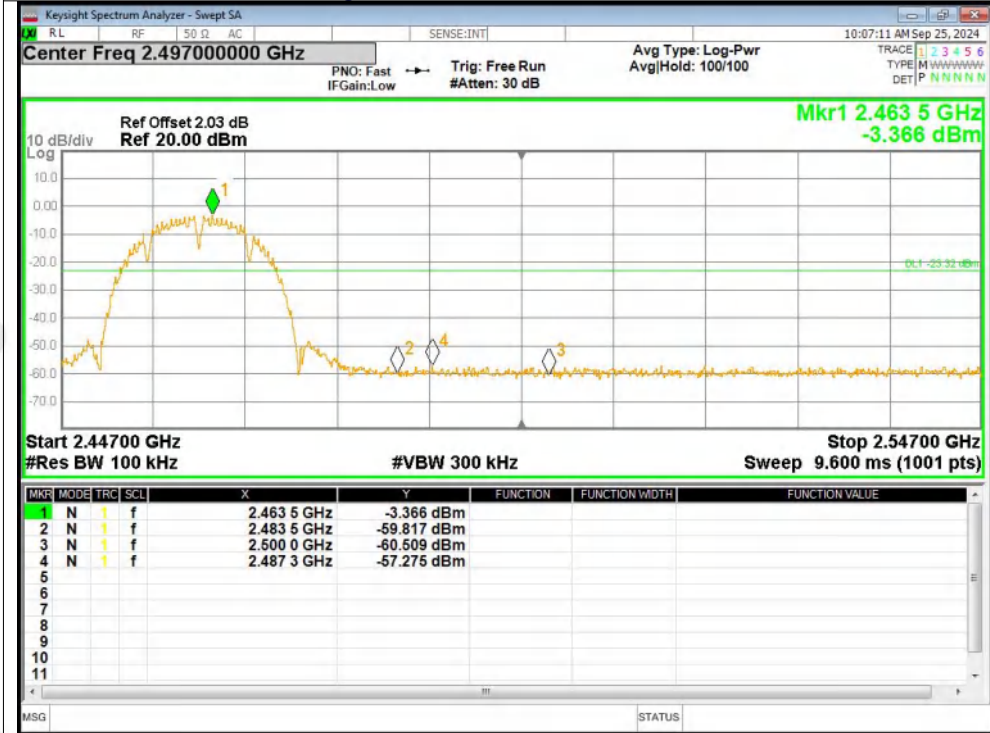


Band Edge NVNT g 2412MHz Ant1 Ref

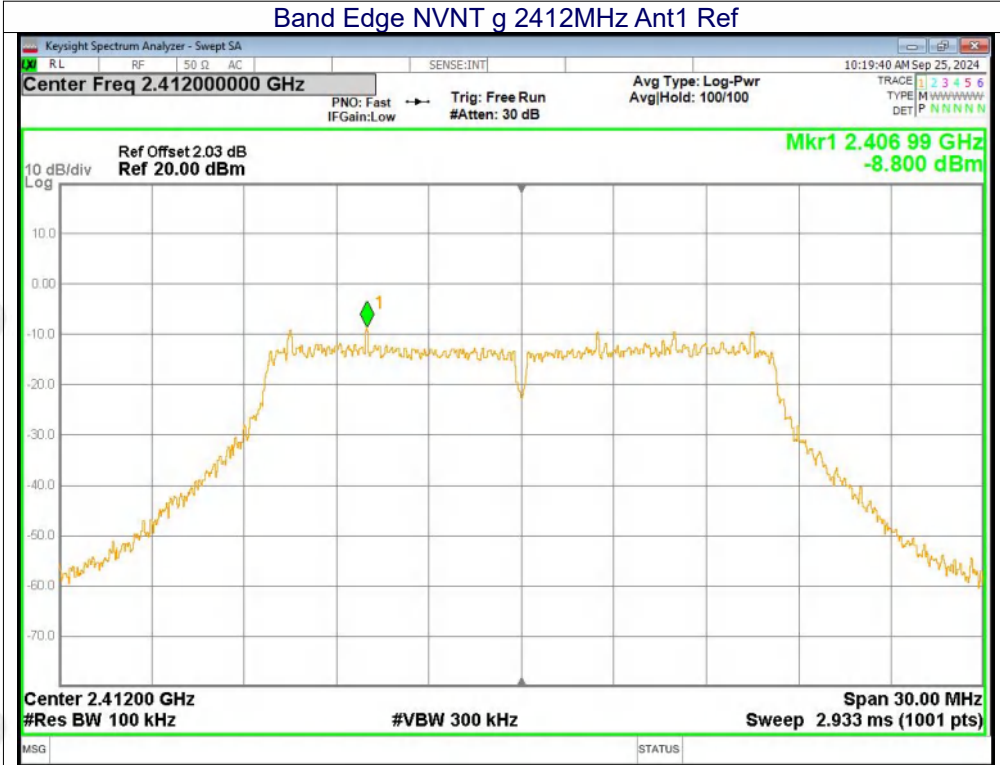


Band Edge NVNT g 2412MHz Ant1 Emission

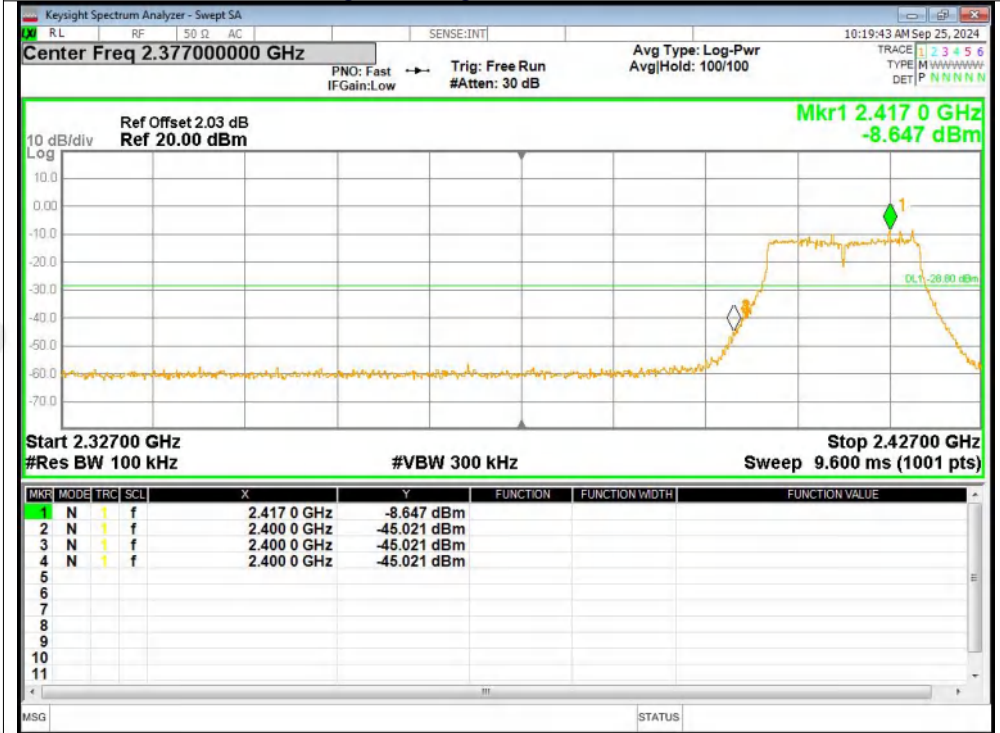


Band Edge NVNT g 2462MHz Ant1 Ref

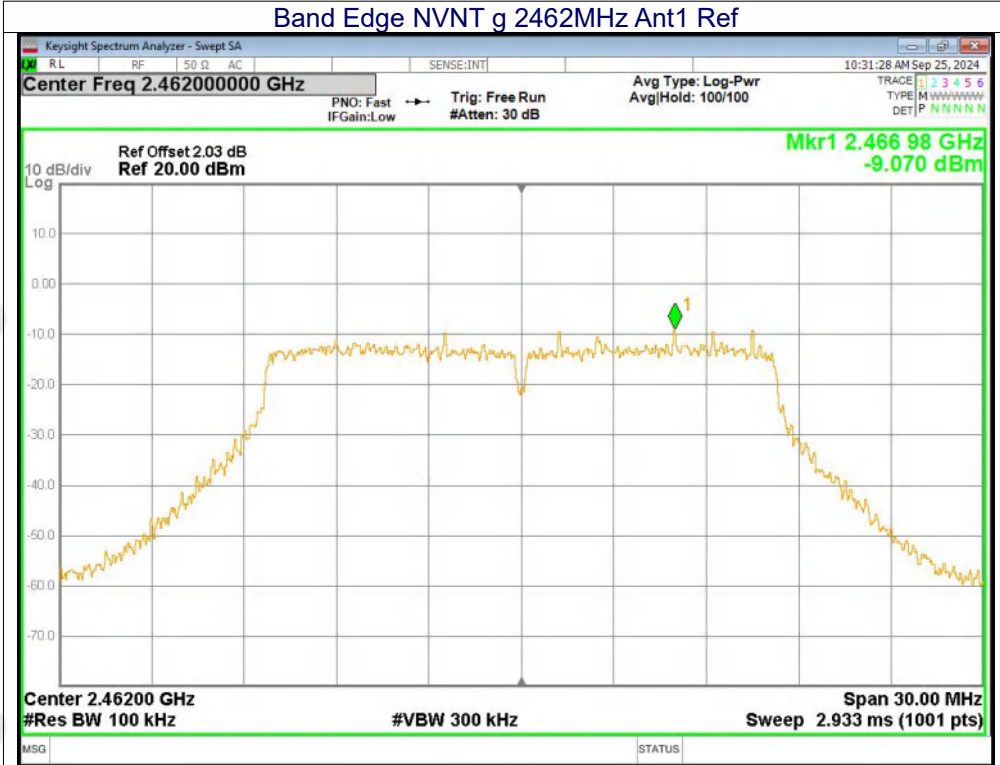


Band Edge NVNT g 2462MHz Ant1 Emission

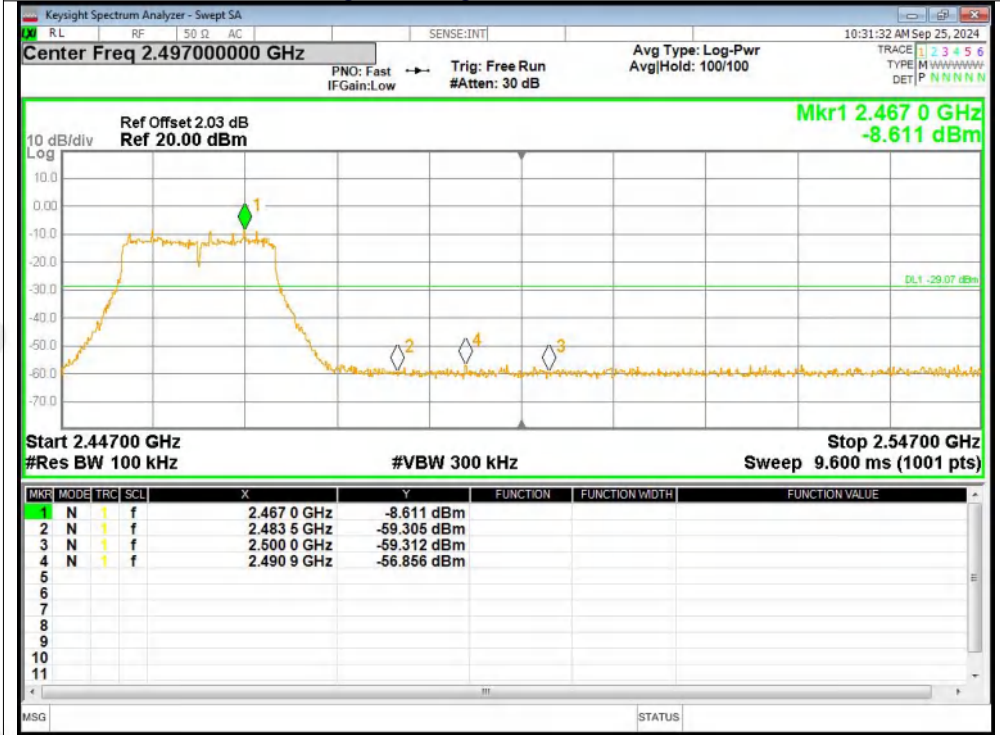


Band Edge NVNT n20 2412MHz Ant1 Ref

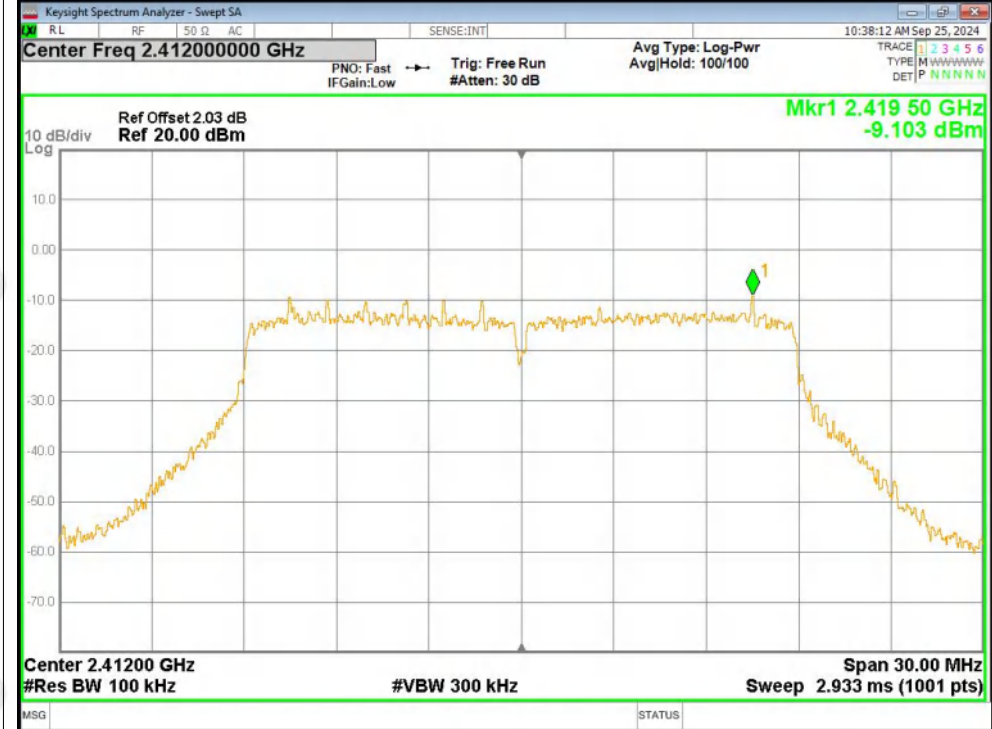


Band Edge NVNT n20 2412MHz Ant1 Emission

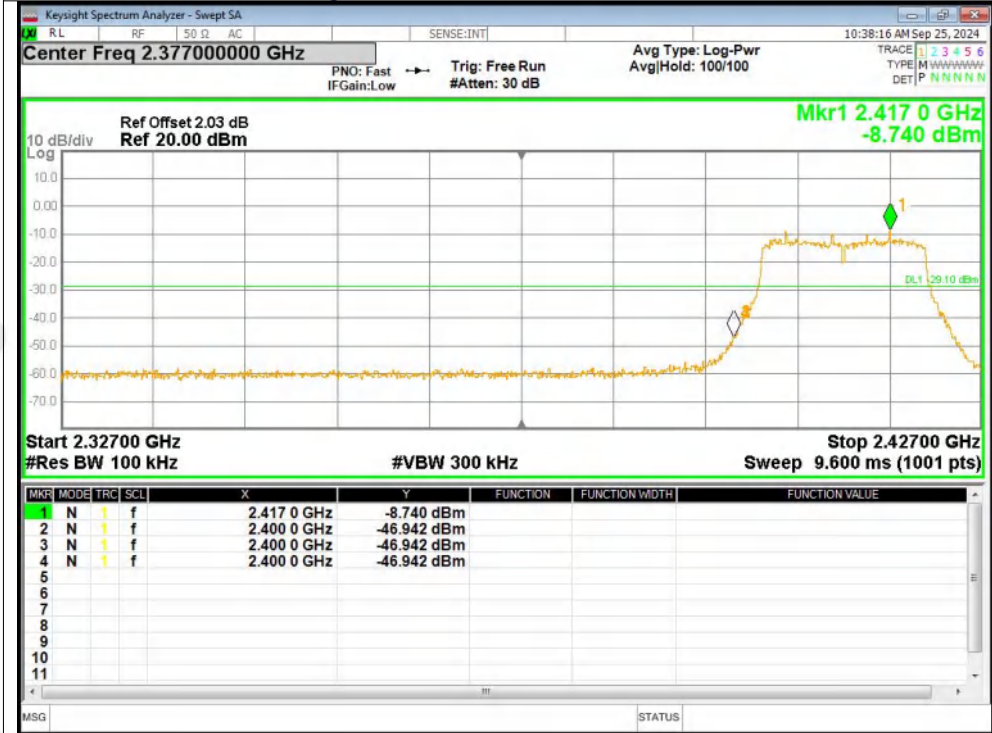

Band Edge NVNT n20 2462MHz Ant1 Ref

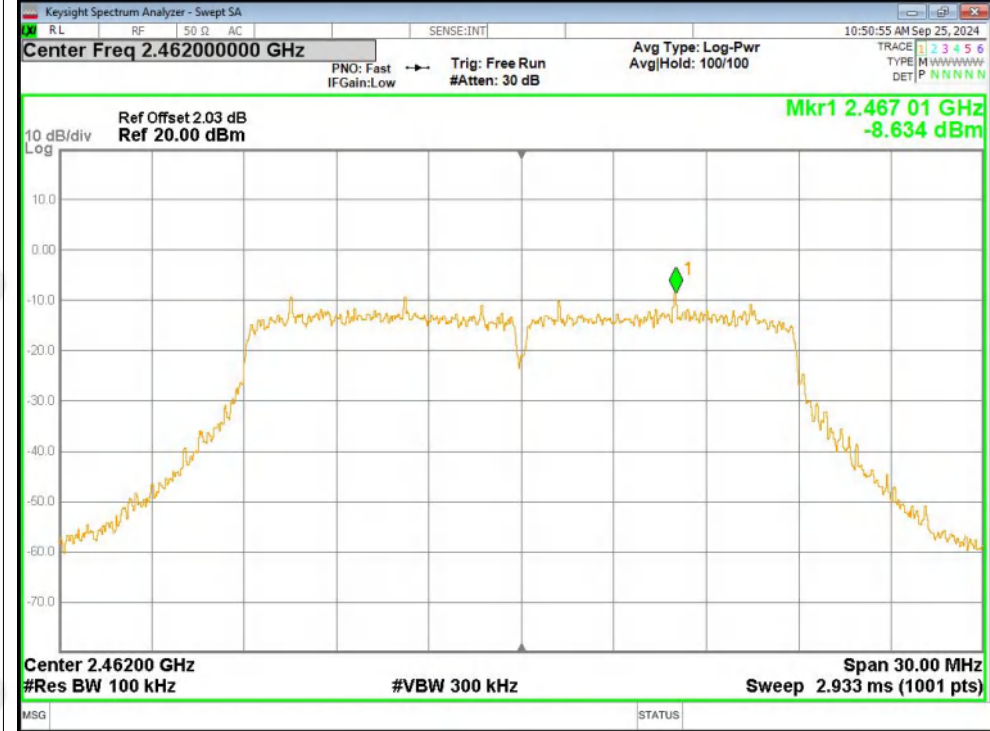


Band Edge NVNT n20 2462MHz Ant1 Emission

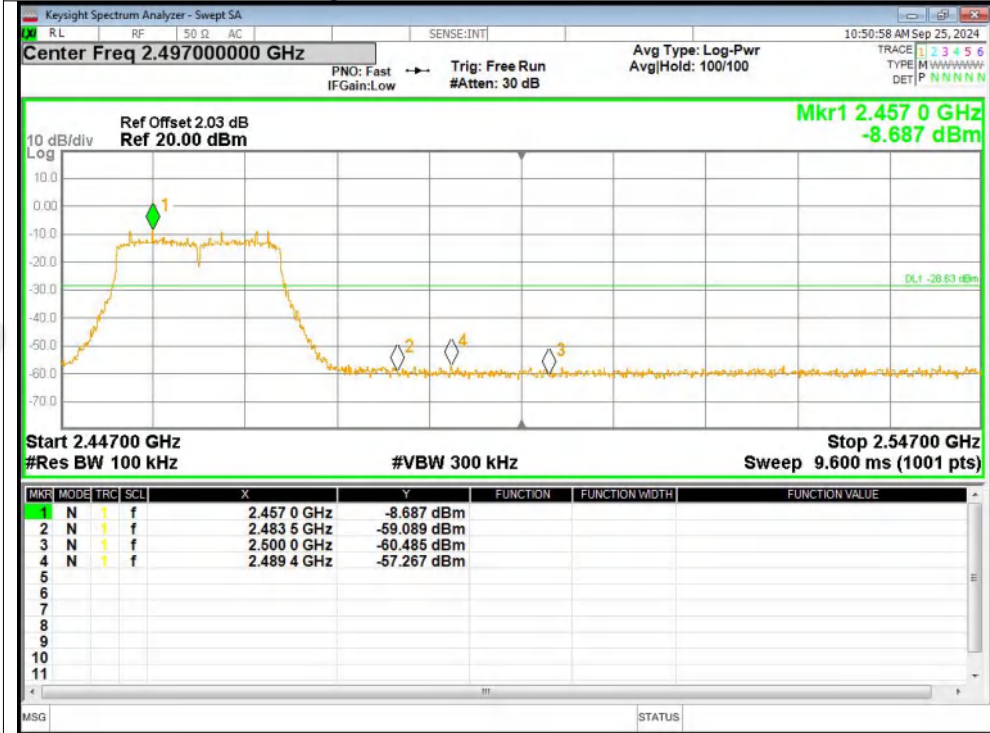

Band Edge NVNT n40 2422MHz Ant1 Ref




Band Edge NVNT n40 2422MHz Ant1 Emission

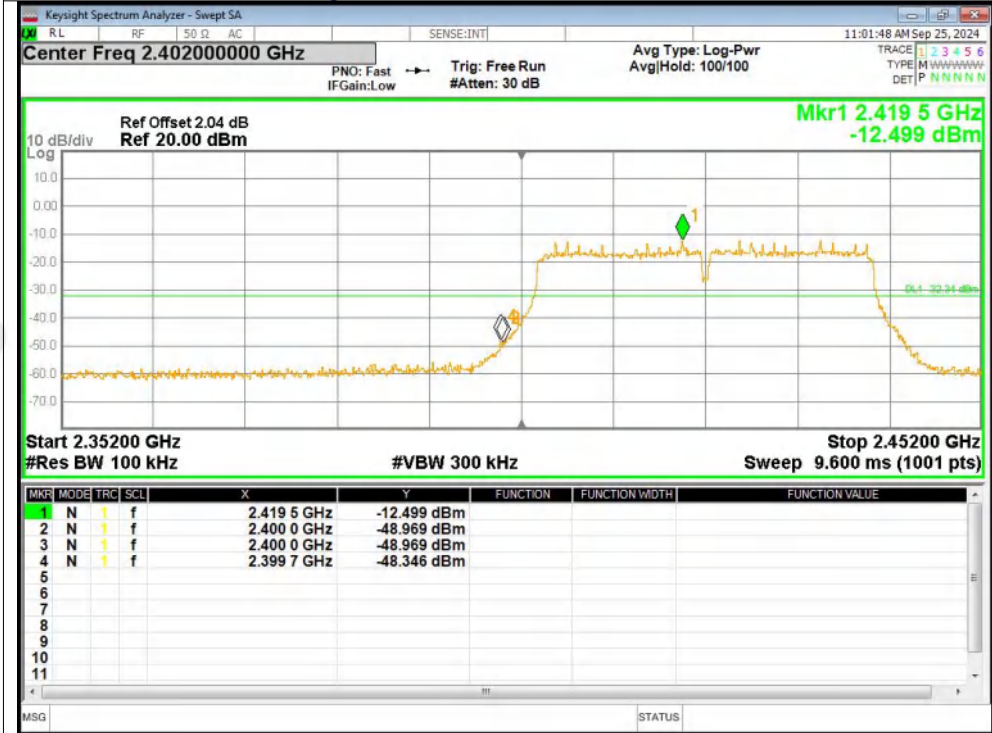

Band Edge NVNT n40 2452MHz Ant1 Ref





Band Edge NVNT n40 2452MHz Ant1 Emission

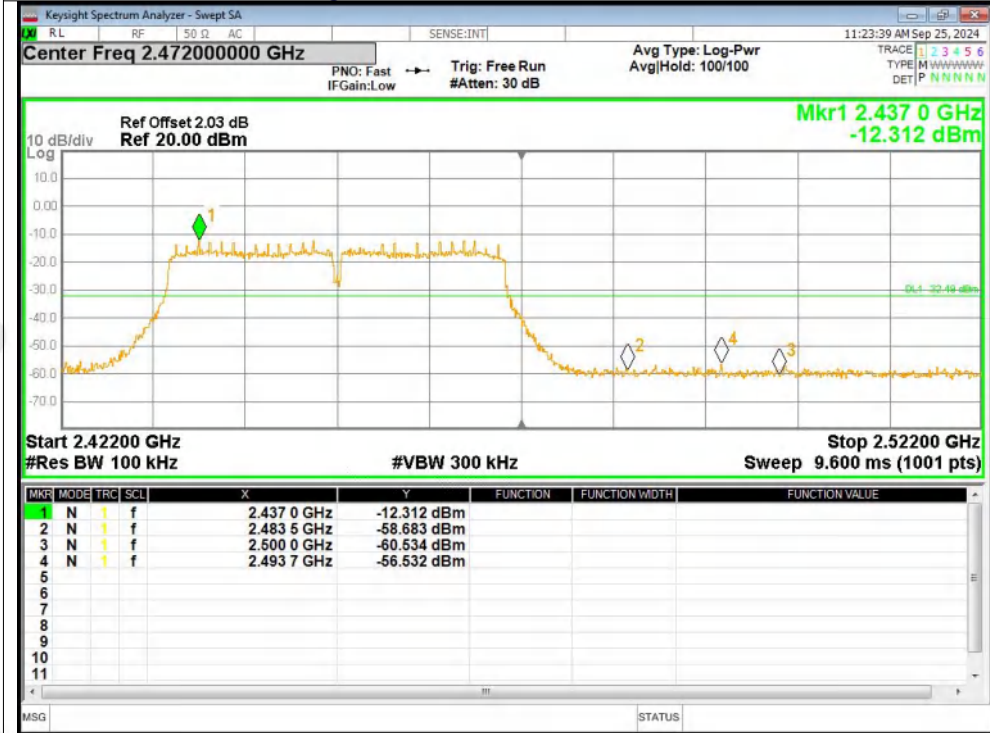




11.7 CONDUCTED RF SPURIOUS EMISSION


Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-42.9	-20	Pass
b	2437	Ant1	-43.62	-20	Pass
b	2462	Ant1	-43.87	-20	Pass
g	2412	Ant1	-38.03	-20	Pass
g	2437	Ant1	-37.91	-20	Pass
g	2462	Ant1	-37.6	-20	Pass
n20	2412	Ant1	-38.11	-20	Pass
n20	2437	Ant1	-37.7	-20	Pass
n20	2462	Ant1	-38.48	-20	Pass
n40	2422	Ant1	-34.69	-20	Pass
n40	2437	Ant1	-33.97	-20	Pass
n40	2452	Ant1	-34.6	-20	Pass

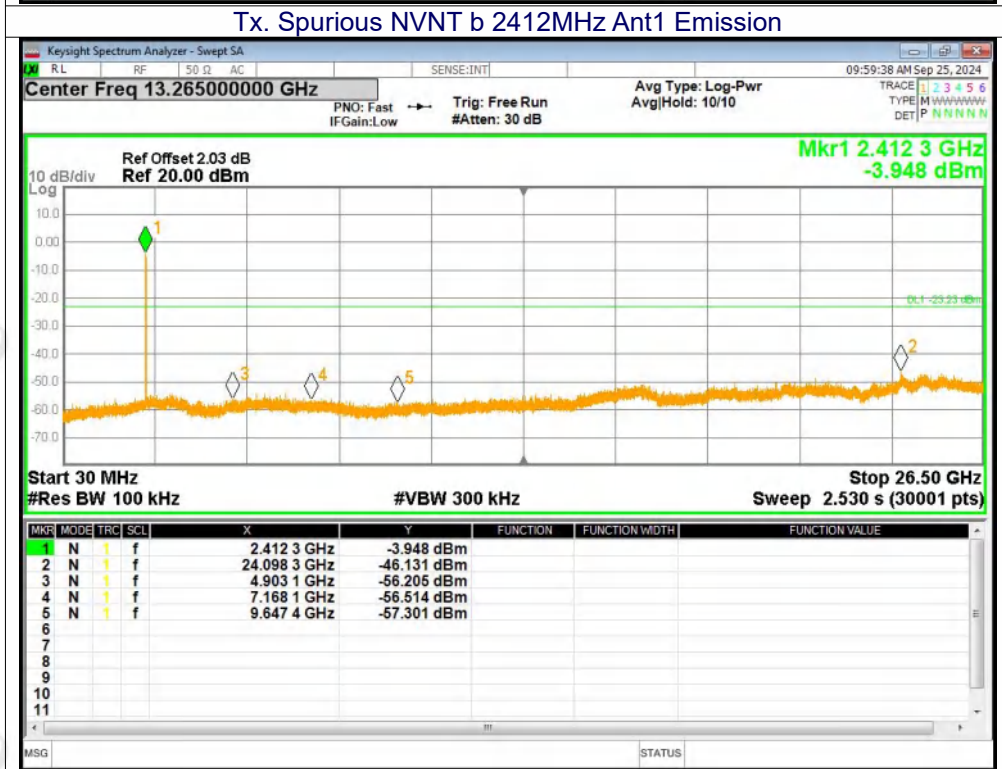
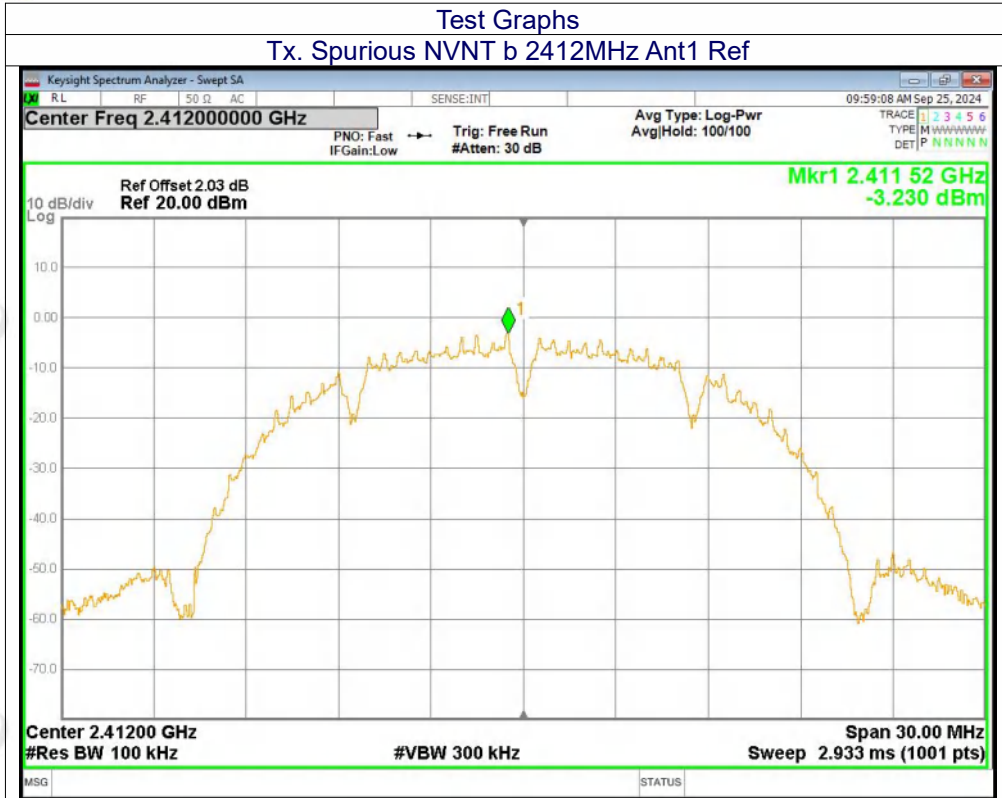


Tx. Spurious NVNT b 2437MHz Ant1 Ref

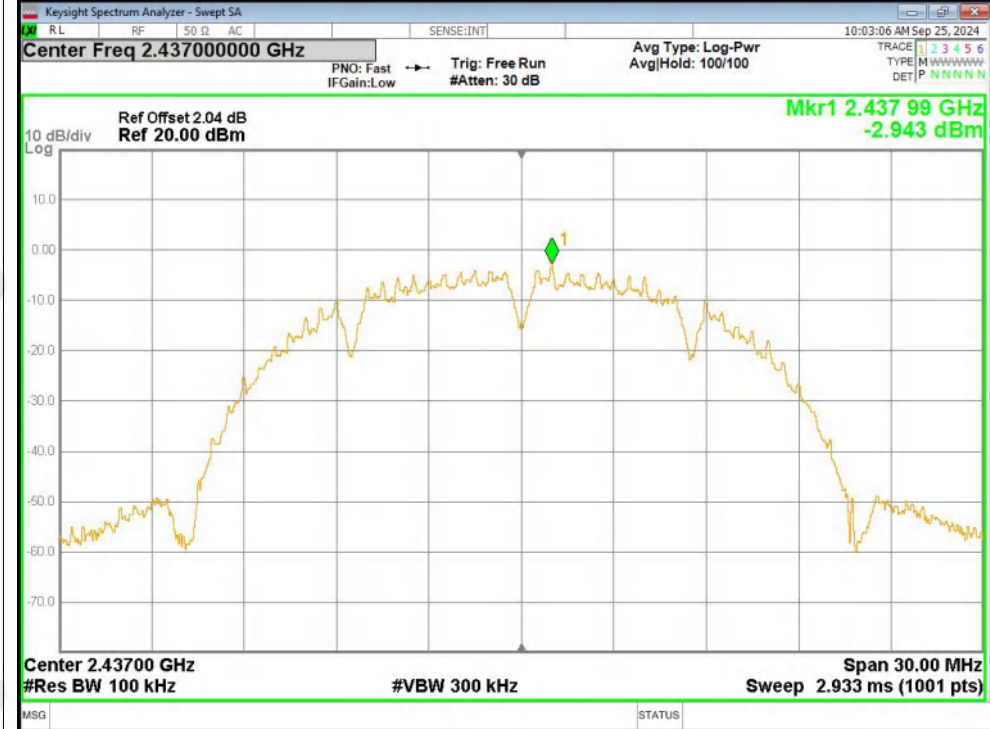


Tx. Spurious NVNT b 2437MHz Ant1 Emission

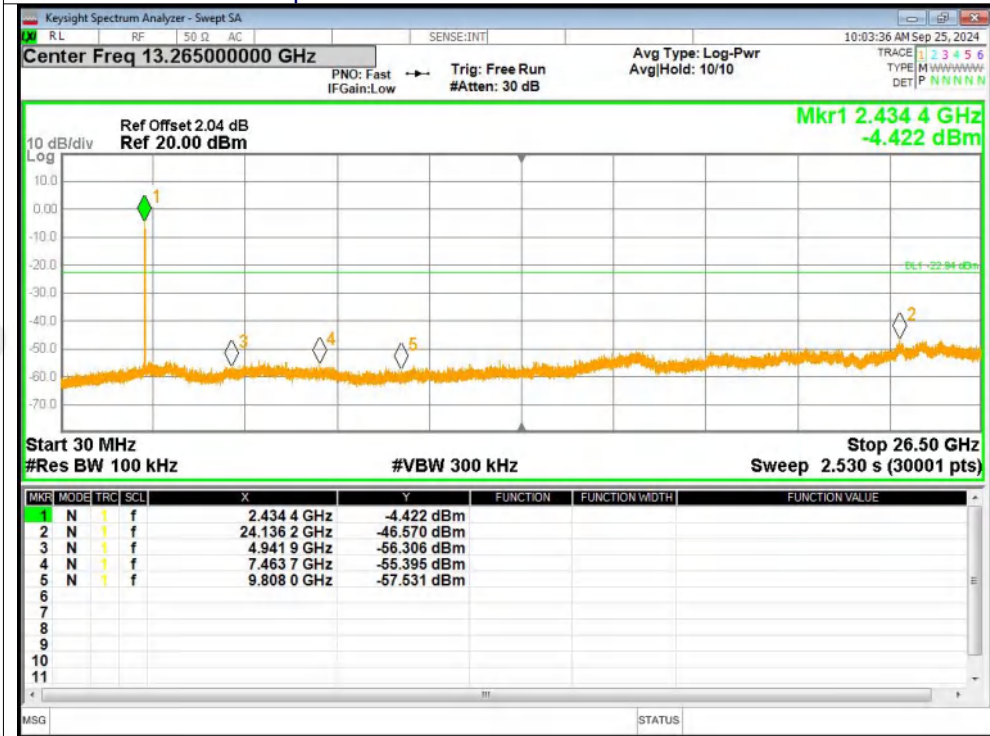


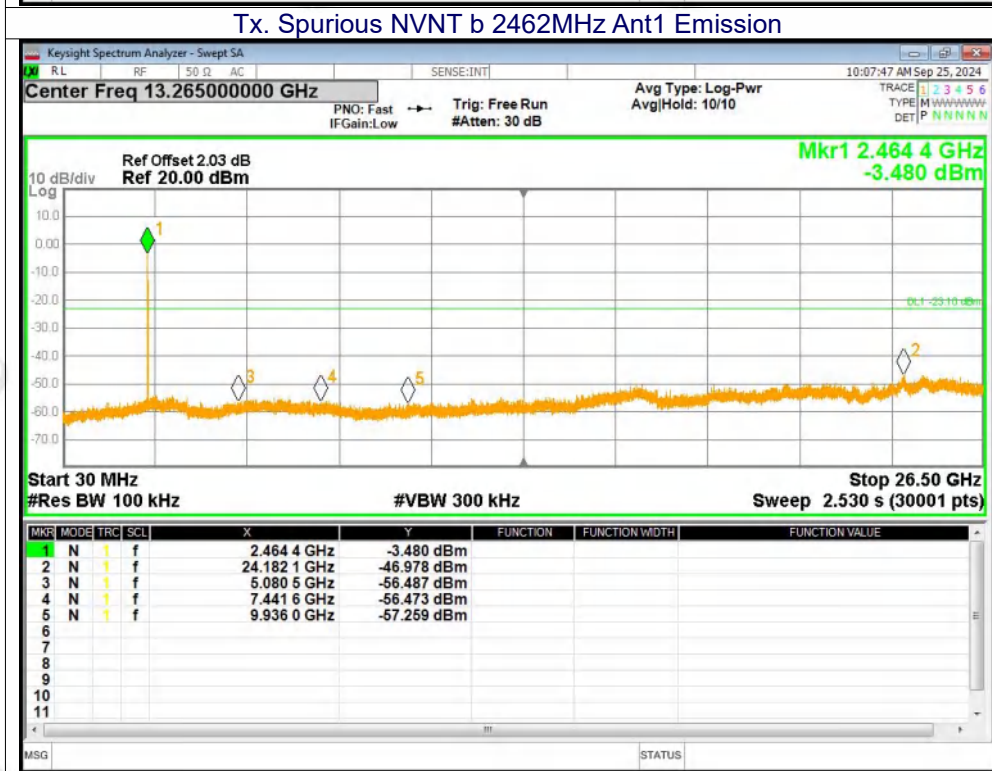
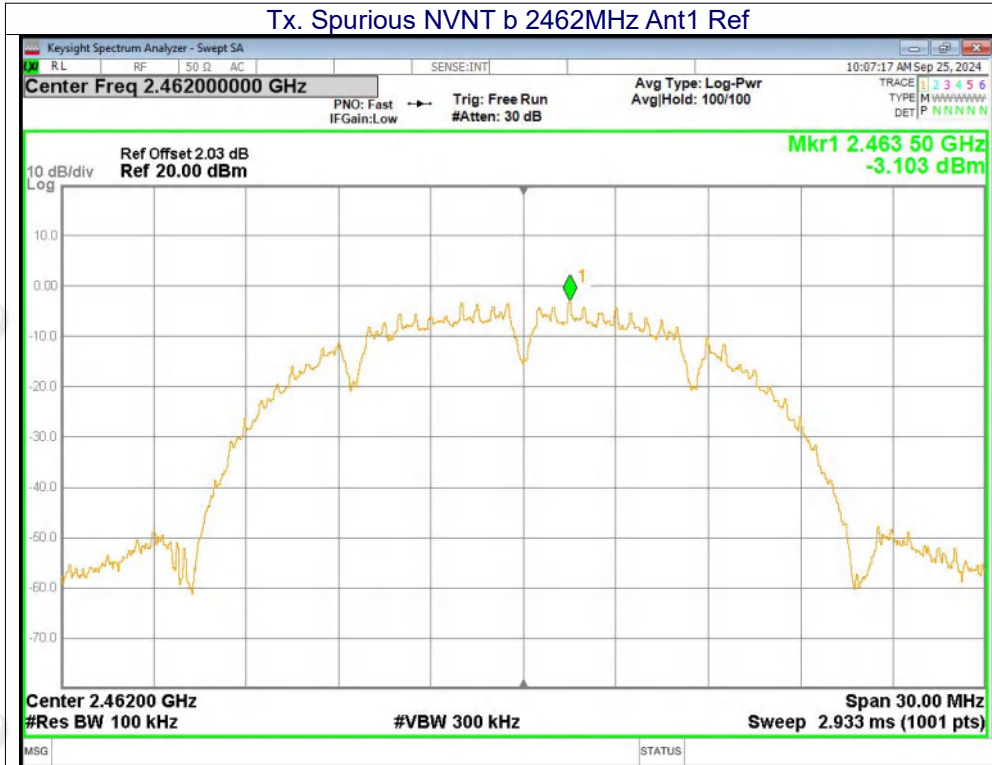


Tx. Spurious NVNT g 2412MHz Ant1 Ref

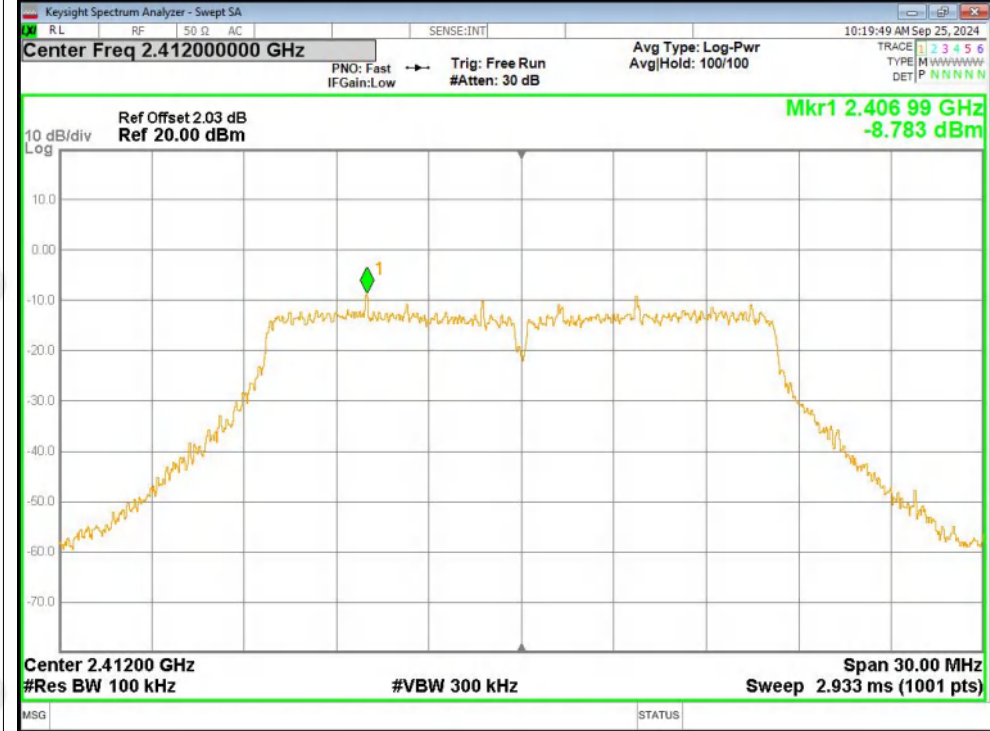


Tx. Spurious NVNT g 2412MHz Ant1 Emission

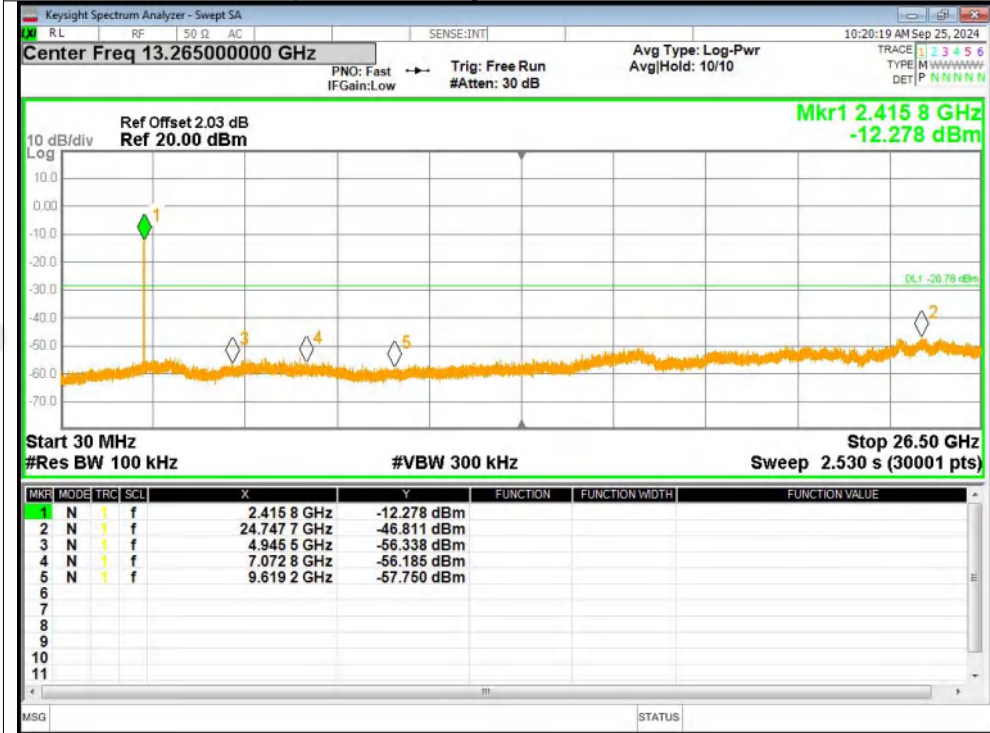


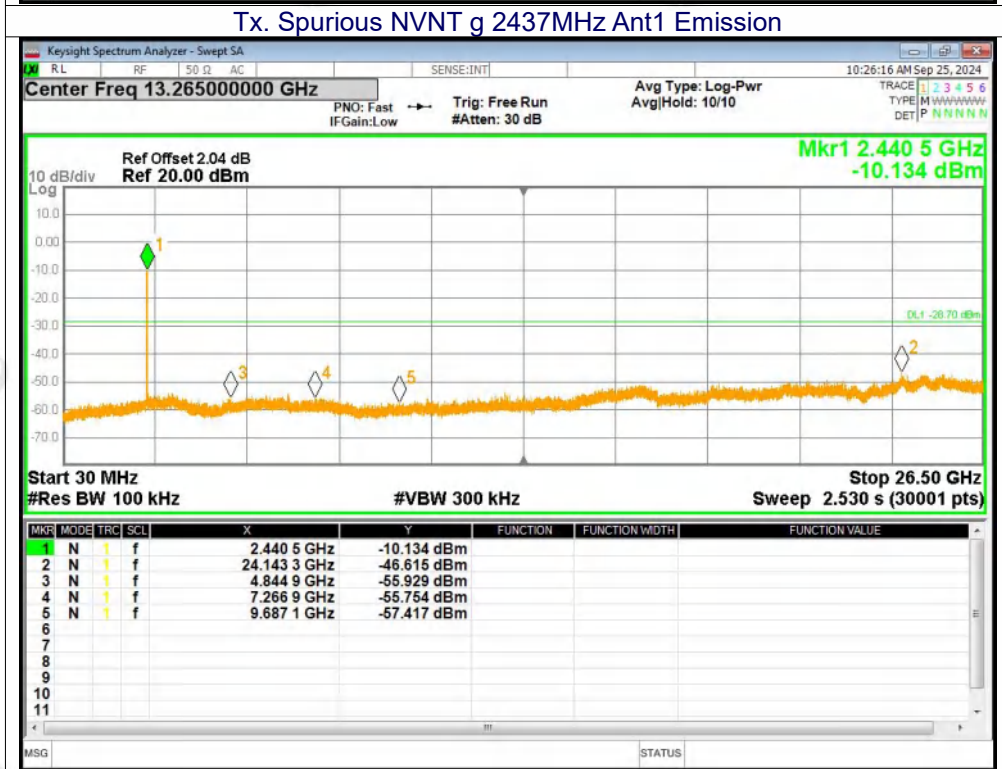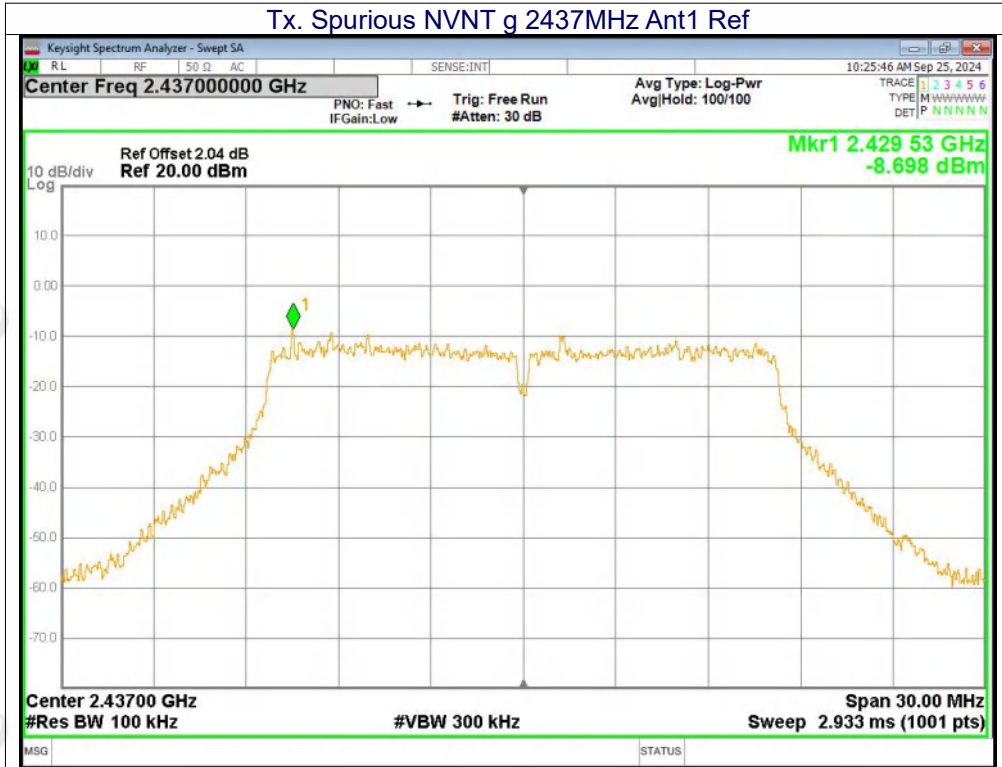

Tx. Spurious NVNT g 2462MHz Ant1 Ref

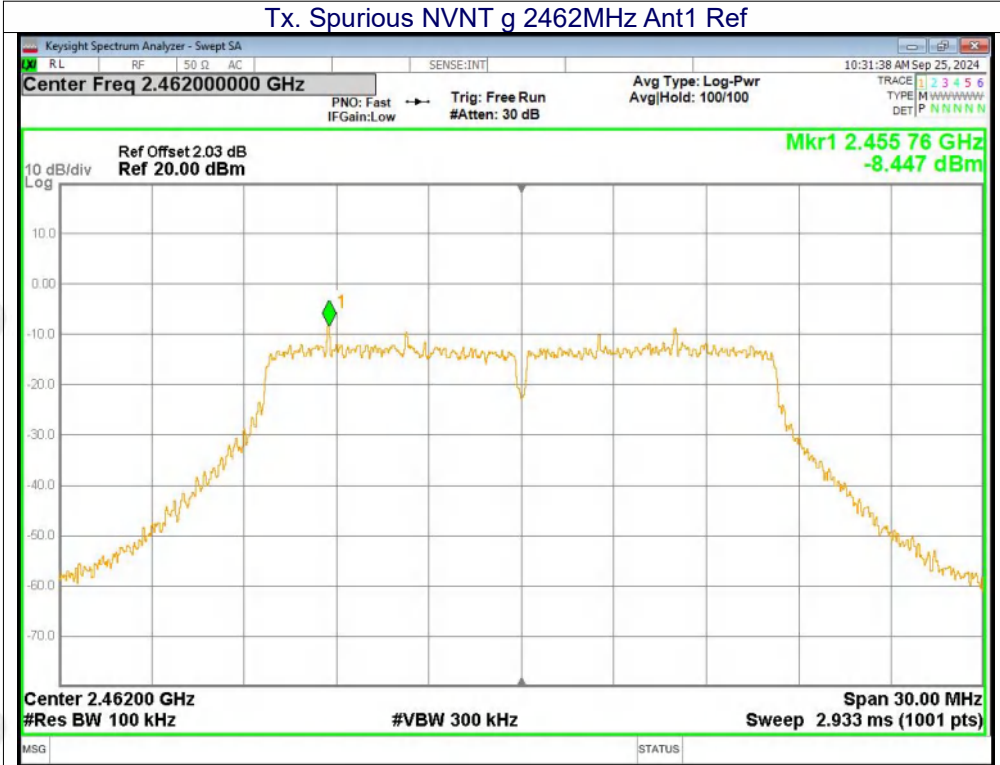


Tx. Spurious NVNT g 2462MHz Ant1 Emission

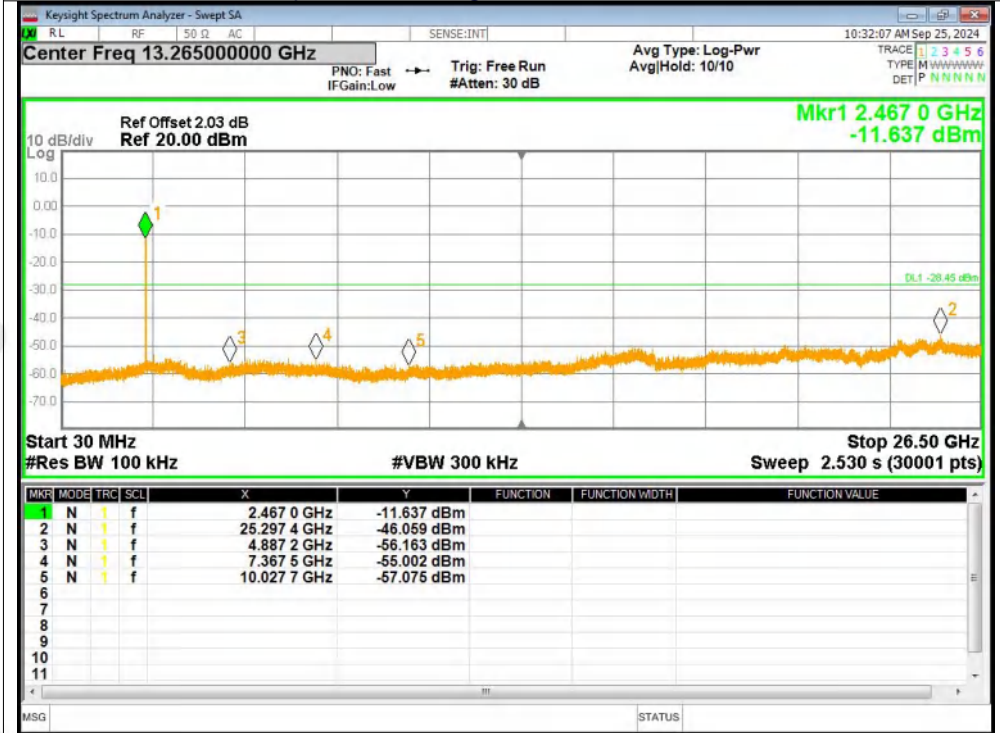


Tx. Spurious NVNT n20 2412MHz Ant1 Ref




Tx. Spurious NVNT n20 2412MHz Ant1 Emission

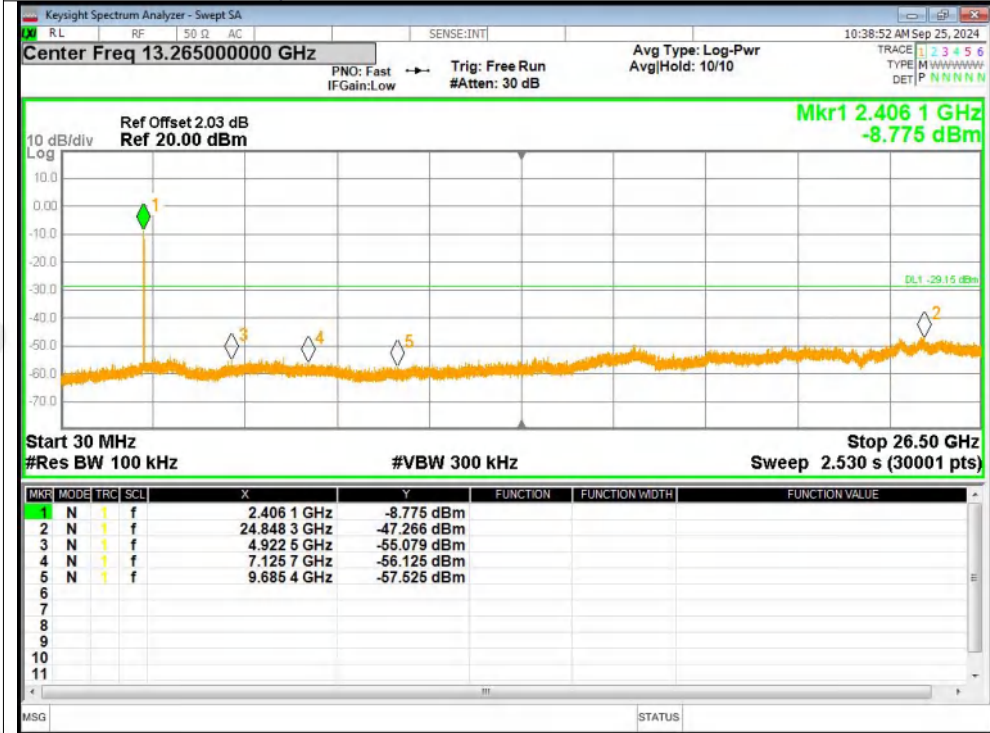


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

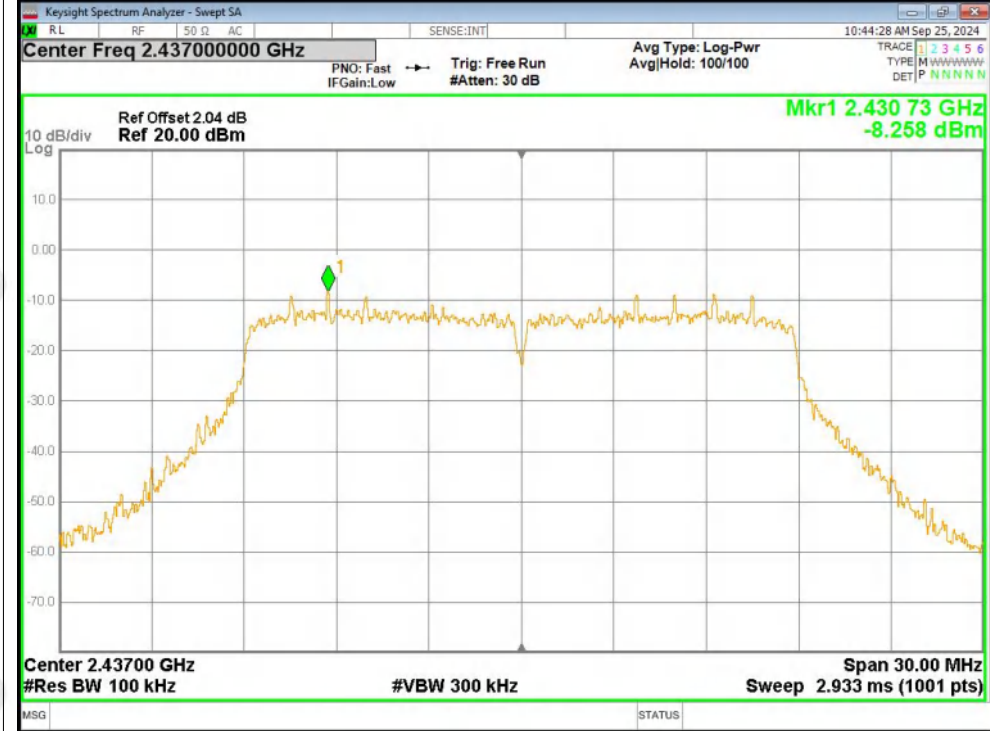


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

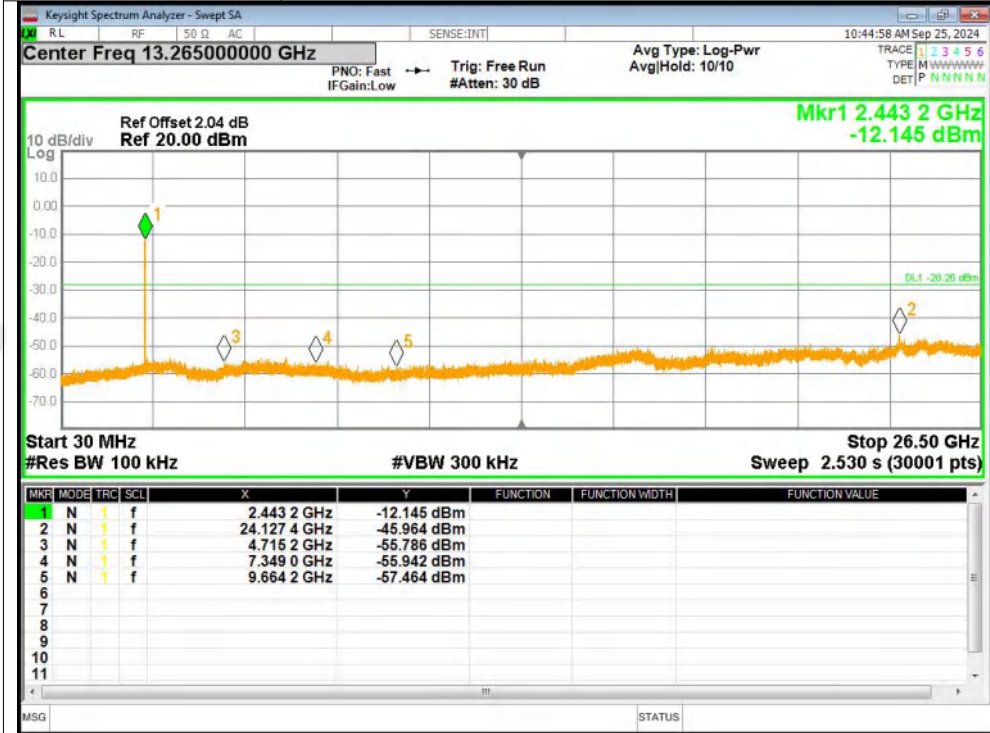

Tx. Spurious NVNT n20 2462MHz Ant1 Ref

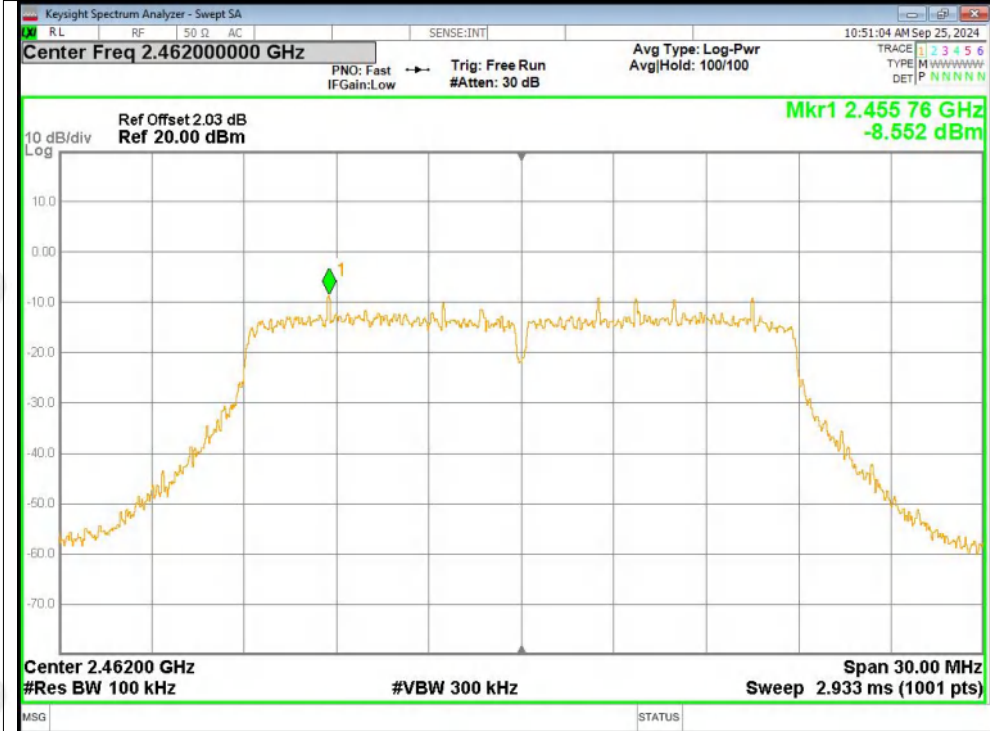


Tx. Spurious NVNT n20 2462MHz Ant1 Emission

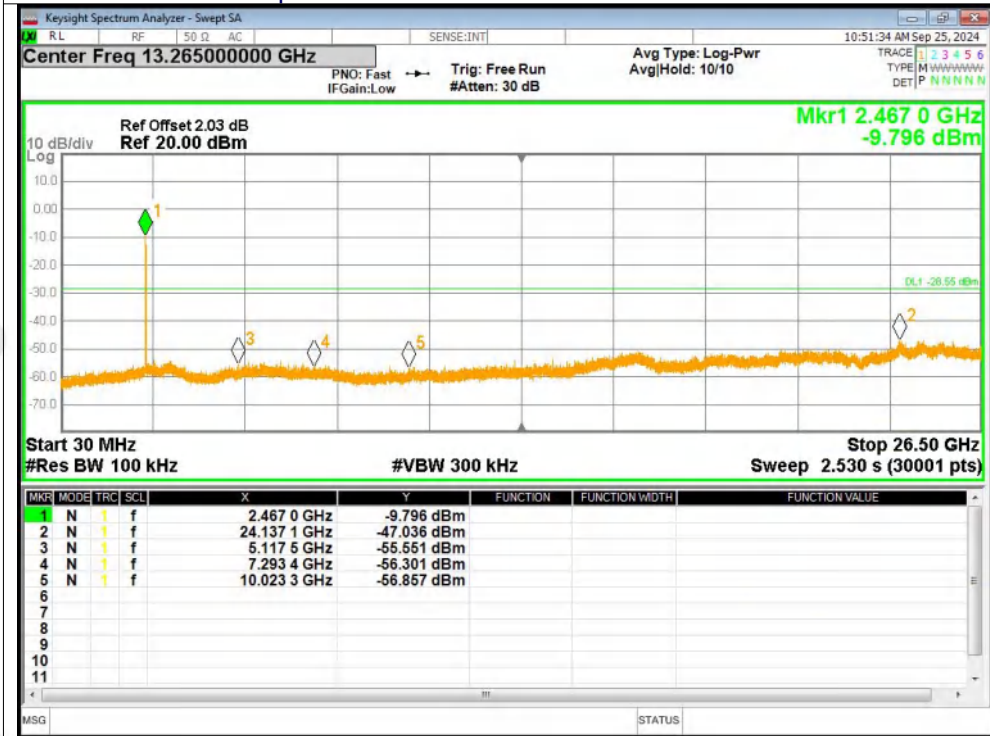

Tx. Spurious NVNT n40 2422MHz Ant1 Ref




Tx. Spurious NVNT n40 2422MHz Ant1 Emission

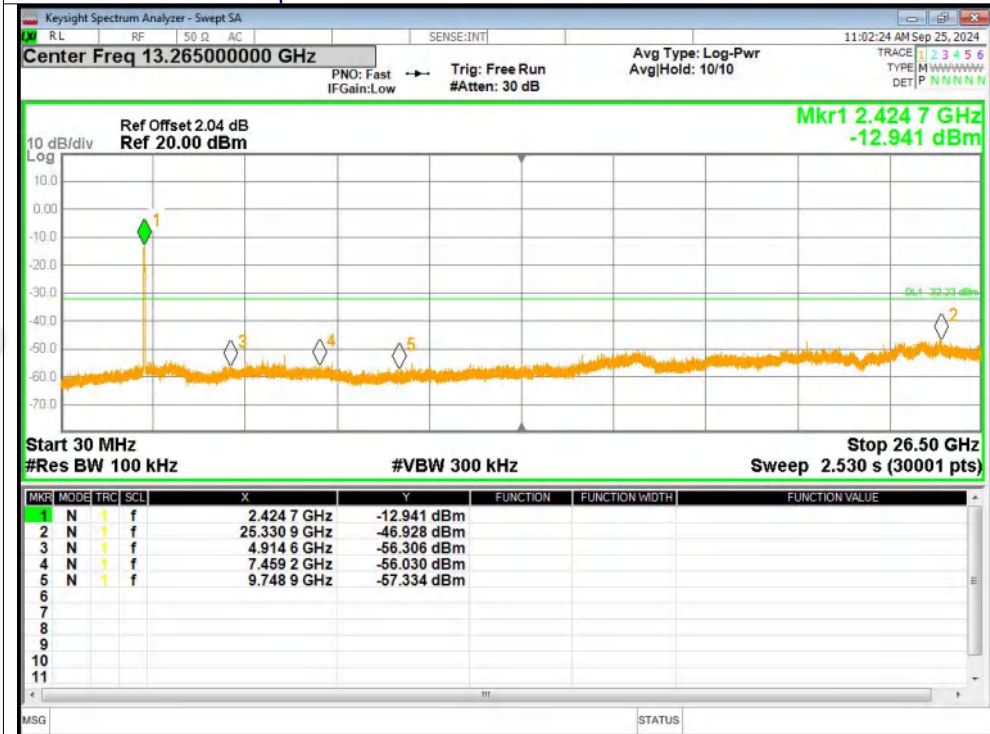

Tx. Spurious NVNT n40 2437MHz Ant1 Ref




Tx. Spurious NVNT n40 2437MHz Ant1 Emission

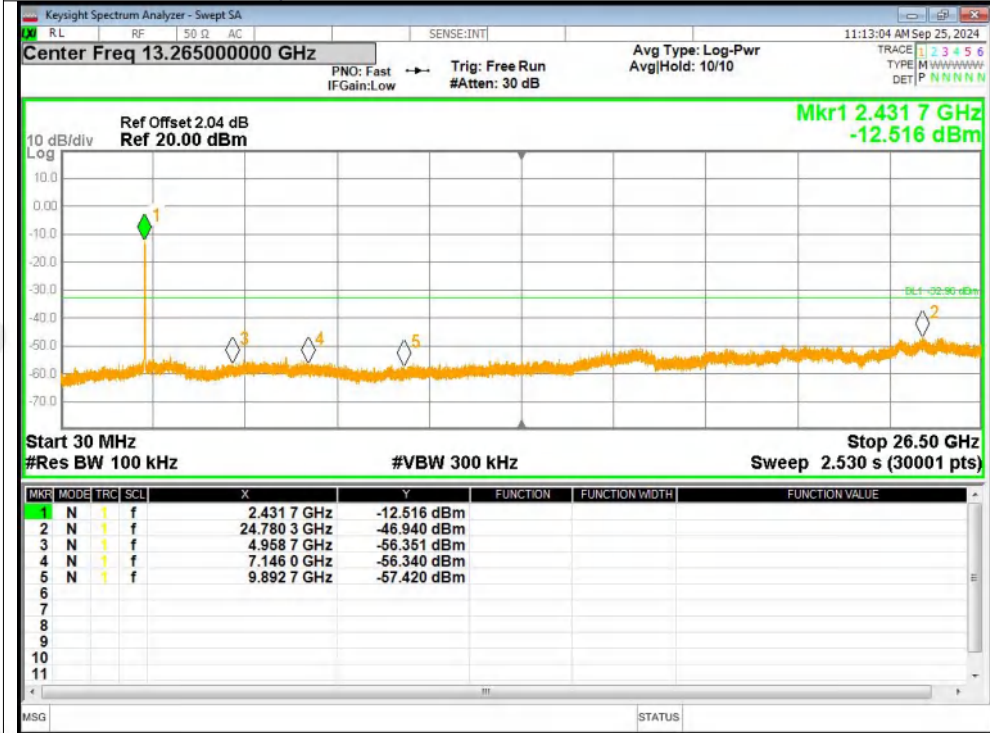

Tx. Spurious NVNT n40 2452MHz Ant1 Ref



Tx. Spurious NVNT n40 2452MHz Ant1 Emission

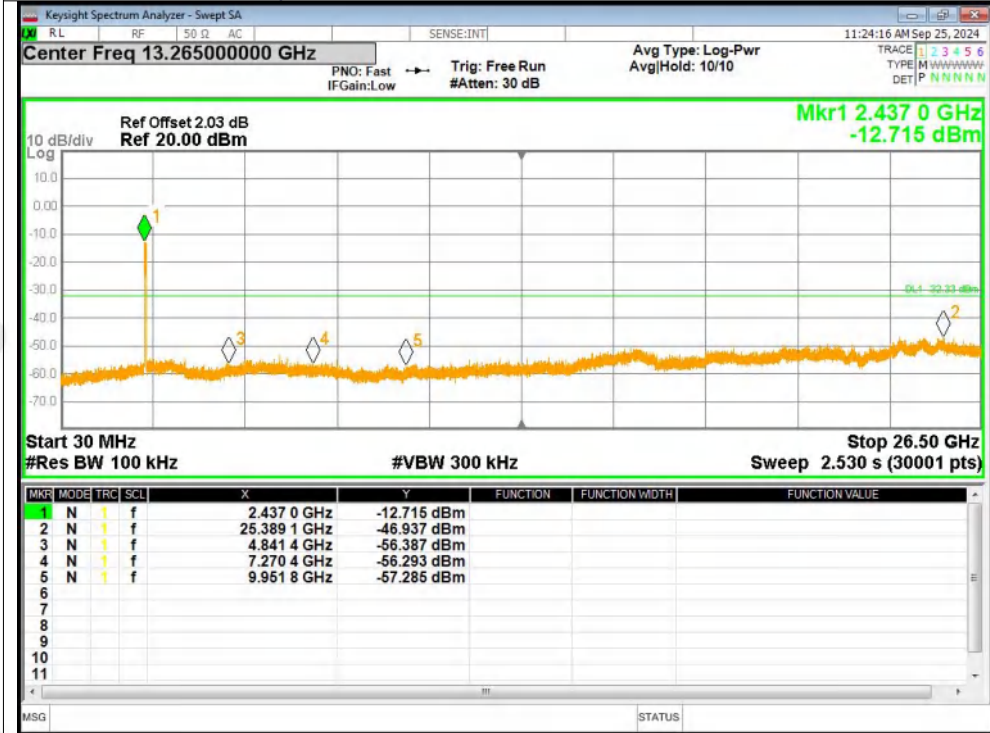



12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****