



FCC Test Report

Report No: FCS202406145W01

Issued for

Applicant:	Fuzhou Hailin Machinery Co.,Ltd.
Address:	1#-3# factory building of Fuzhou Hailin Machinery Co.,Ltd. No.10, Tianshui Road, Gaishan Town, Cangshan District, Fuzhou, Fujian, China
Product Name:	Portable Power Station
Brand Name:	HAILIN
Model Name:	HL12L
Series Model:	N/A
FCC ID:	2BHDW-HL12L
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.fcs-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name.....: Fuzhou Hailin Machinery Co.,Ltd.
Address.....: 1#-3# factory building of Fuzhou Hailin Machinery Co.,Ltd. No.10,
Tianshui Road, Gaishan Town, Cangshan District, Fuzhou, Fujian,
China
Manufacture's Name.....: Fuzhou Hailin Machinery Co.,Ltd.
Address.....: 1#-3# factory building of Fuzhou Hailin Machinery Co.,Ltd. No.10,
Tianshui Road, Gaishan Town, Cangshan District, Fuzhou, Fujian,
China

Product Description

Product Name.....: Portable Power Station
Brand Name: HAILIN
Model Name.....: HL12L
Series Model.....: N/A
Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 209
Test Procedure.....: ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date (s) of performance of tests.: Jun 18, 2024 ~Jun 24, 2024

Date of Issue.....: Jun 25, 2024

Test Result.....: Pass

Tested by

:

Scott Shen

(Scott Shen)

Reviewed by

:

Duke Qian

(Duke Qian)

Approved by

:

Jack Wang

(Jack Wang)



Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
2.4 EQUIPMENTS LIST	10
3 CONDUCTED EMISSION MEASUREMENT	11
3.1 LIMIT	11
3.2 TEST PROCEDURE	11
3.3 TEST SETUP	12
3.4 TEST RESULTS	13
4. RADIATED EMISSION MEASUREMENT	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	16
4.3 TEST SETUP	17
4.4 TEST RESULTS	18
(30MHZ-1000MHZ)	19
5. 20 DB BANDWIDTH TEST	21
5.1 LIMIT	21
5.2 TEST PROCEDURE	21
5.3 TEST SETUP	21
5.4 TEST RESULTS	22
6. ANTENNA REQUIREMENT	24
6.1 STANDARD REQUIREMENT	24
6.2 EUT ANTENNA	24

Revision History

Rev.	Issue Date	Effect Page	Contents
00	June 25, 2024	N/A	N/A

1. SUMMARY OF TEST RESULTS

FCC Rules and Regulations Part 15 Subpart C, Section 209			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.209(a) (f)	Radiated Spurious Emission	PASS	--
15.215(c)	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory		
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan		
Telephone:	+86-769-27280901		
Fax:	+86-769-27280901		
Laboray Accreditations:			
FCC Test Firm Registration Number:	514908		
CNAS Number:	L15566		
Designation number:	CN0127		
A2LA accreditation number:	5545.01		
ISED Number:	25801		
CAB ID:	CN0097		

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.98 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions,radiated (9KHz -30MHz)	± 3.1 dB
6	All emissions,radiated(<1G) 30MHz-1000MHz	± 3.2 dB
7	All emissions,radiated (1GHz -18GHz)	± 3.66 dB
8	All emissions,radiated (18GHz -40GHz)	± 4.31 dB
9	Occupied bandwidth	± 0.3 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Portable Power Station
Trade Name	HAILIN
Model Name	HL12L
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Operation frequency	115-205KHz
Modulation Type	MSK
Antenna Type	Inductive Loop Antenna with 1.0dBi
Power Supply	Mains output 120V-60Hz rated power 1200W PD output: 100W PD Output: 27W Car charger output:12V/8.3A, 100W output with DC1/2 at the same time QC 18W output:QC3.0 5V/3A,9V/2A,12V/1.5A
Battery	Lithium iron batteries 54Ah @22.4V 1209.6Wh
Rated voltage	AC 120V
Test voltage	AC 120V
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Operation frequency:115KHz~205KHz

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Inductive Loop Antenna	N/A	1.0dBi	Antenna

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test software: Test manually using a fixed-frequency prototype

The fixed-frequency prototype is used to manually control the EUT to work in continuous TX mode, select the test channel, and the wireless mode is shown in the following table

Tested mode, Description	
Mode	Description
Mode 1	Coil 1 Phone(5W)
Mode 2	Coil 1 Phon(7.5W)
Mode 3	Coil 1 Phone(10W)
Mode 4	Coil 1 Phone(15W)
Mode 5	Coil 1 Phone(18W)
Mode 6	Coil 2 Phone(5W)
Mode 7	Coil 2 Phon(7.5W)
Mode 8	Coil 2 Phone(10W)
Mode 9	Coil 2 Phone(15W)
Mode 10	Coil 2 Phone(18W)
Mode 11	Coil 1 Phone(5W)+Coil 2 Phone(5W)
Mode 12	Coil 1 Phone(5W)+Coil 2 Phone(7.5W)
Mode 13	Coil 1 Phone(10W)+Coil 2 Phone(10W)

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Phone	Apple	iPhone 12	N/A	This is for testing only in report.
2	Phone	Apple	iPhone 14	N/A	This is for testing only in report.

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2023.08.29	2024.08.28
Signal Analyzer	R&S	FSV40-N	FCS-E012	2023.08.29	2024.08.28
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2023.08.29	2024.08.28
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2023.08.29	2024.08.28
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2023.08.29	2024.08.28
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2023.08.29	2024.08.28
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2023.08.29	2024.08.28
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2023.08.29	2024.08.28
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2023.08.29	2024.08.28
Temperature & Humidity	HTC-1	victor	FCS-E005	2023.08.29	2024.08.28

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2023.08.29	2024.08.28
LISN	R&S	ENV216	FCS-E007	2023.08.29	2024.08.28
LISN	ETS	3810/2NM	FCS-E009	2023.08.29	2024.08.28
Temperature & Humidity	HTC-1	victor	FCS-E008	2023.08.29	2024.08.28

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
Spectrum Analyzer	Keysight	N9020A	FCS-E015	2023.08.29	2024.08.28
Spectrum Analyzer	Agilent	E4447A	MY50180039	2023.08.29	2024.08.28
Spectrum Analyzer	R&S	FSV-40	101499	2023.08.29	2024.08.28

3 CONDUCTED EMISSION MEASUREMENT

3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


3.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

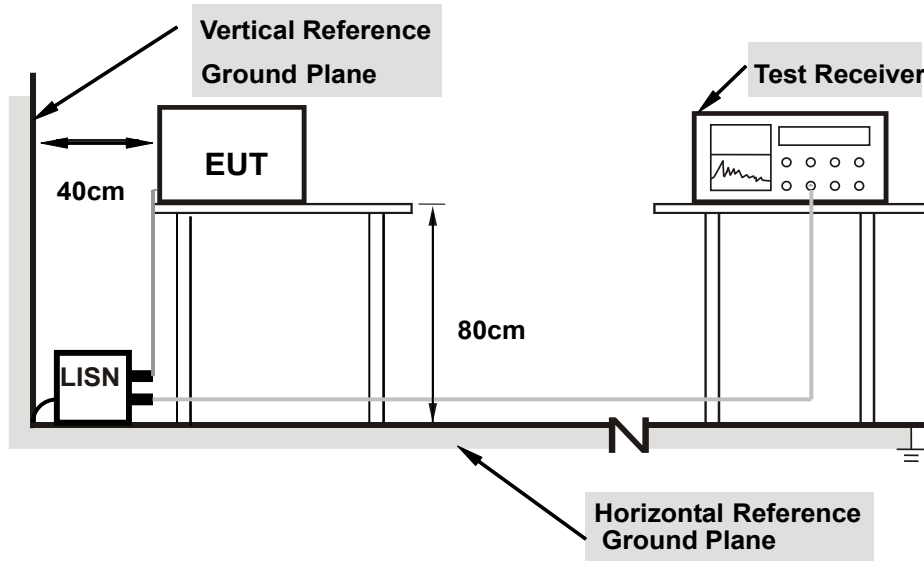


- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.4 TEST RESULTS


Temperature:	25°C	Relative Humidity:	50%
Test Mode:	Mode 12(Worst)	Test Voltage:	DC 12V
Result:	Pass		

L-line

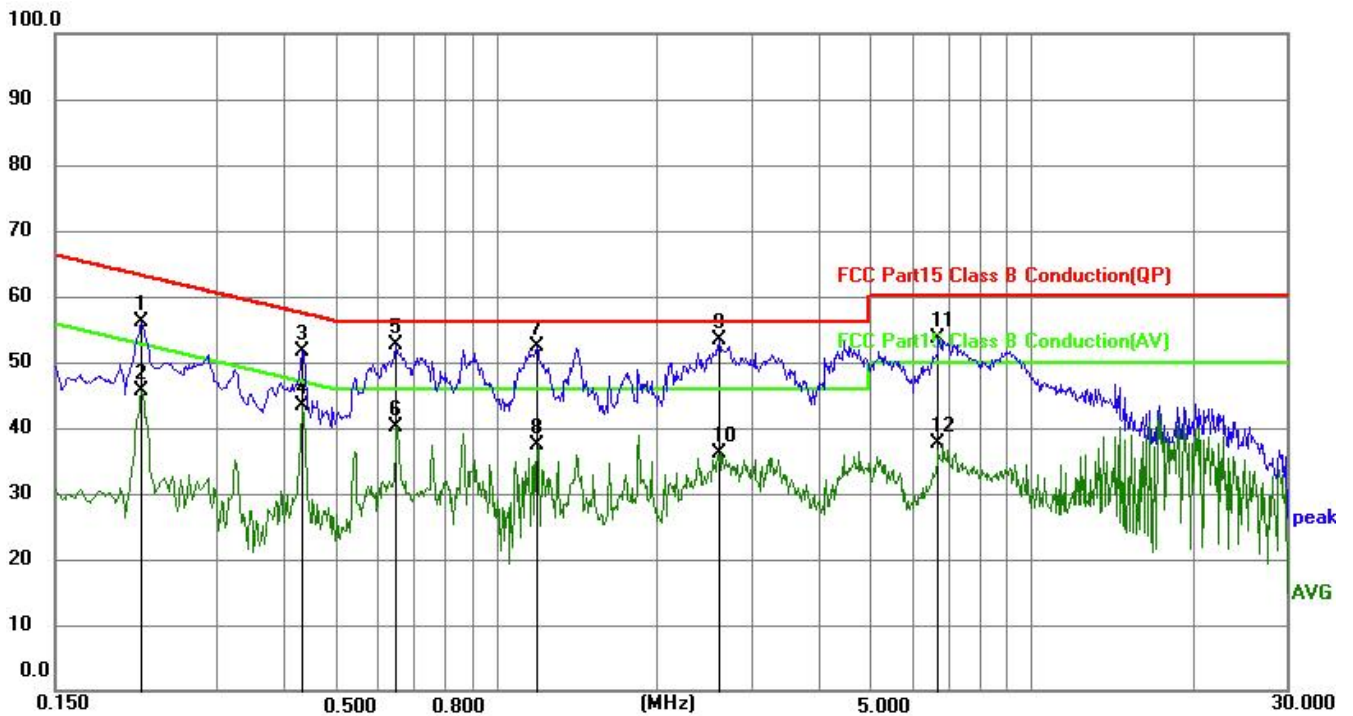

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2172	46.06	10.07	56.13	62.93	6.80	QP
2	0.2172	35.59	10.07	45.66	52.93	7.27	AVG
3	0.4328	41.55	10.02	51.57	57.20	5.63	QP
4	0.4328	33.36	10.02	43.38	47.20	3.82	AVG
5	0.6508	42.69	9.99	52.68	56.00	3.32	QP
6	0.6508	30.19	9.99	40.18	46.00	5.82	AVG
7	1.1906	42.36	9.99	52.35	56.00	3.65	QP
8	1.1906	27.51	9.99	37.50	46.00	8.50	AVG
9	2.6082	43.48	9.95	53.43	56.00	2.57	QP
10	2.6082	26.06	9.95	36.01	46.00	9.99	AVG
11	6.6977	43.89	9.84	53.73	60.00	6.27	QP
12	6.6977	27.78	9.84	37.62	50.00	12.38	AVG

N-line

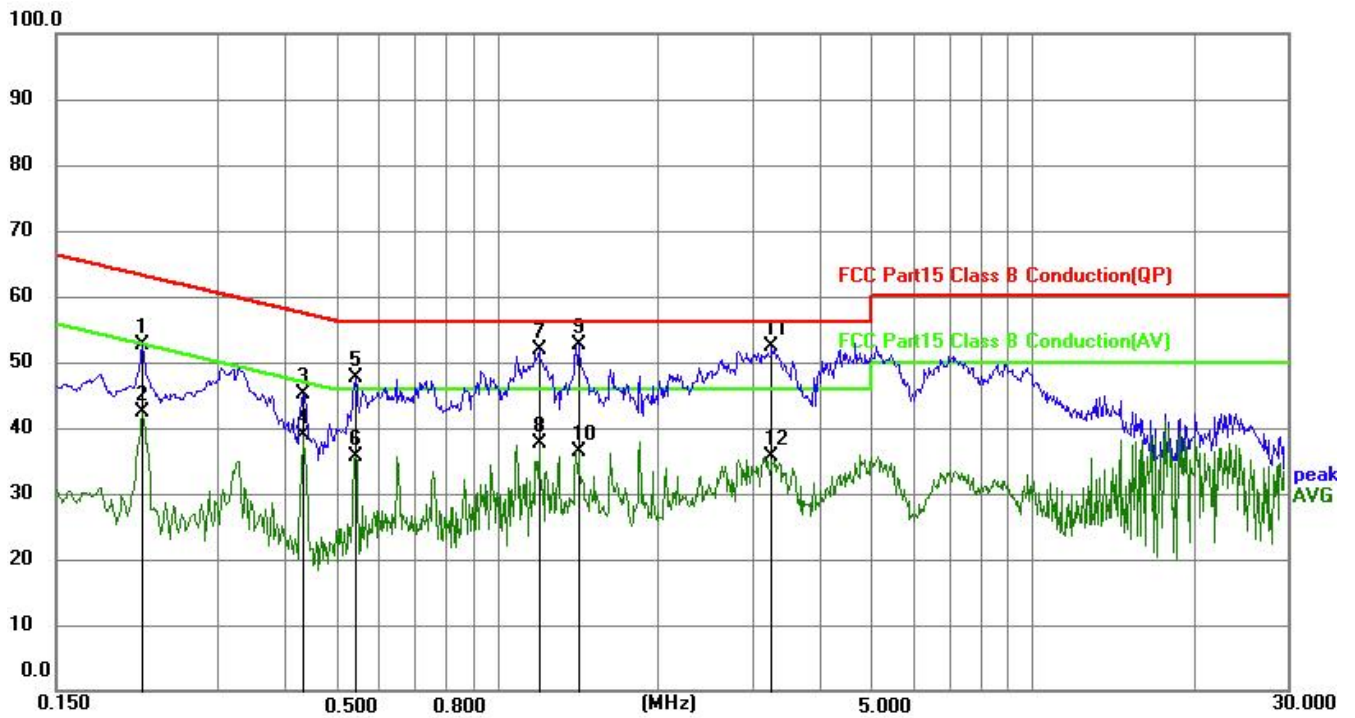

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2172	42.52	10.05	52.57	62.93	10.36	QP
2	0.2172	32.25	10.05	42.30	52.93	10.63	AVG
3	0.4328	35.10	10.00	45.10	57.20	12.10	QP
4	0.4328	28.97	10.00	38.97	47.20	8.23	AVG
5	0.5433	37.69	10.00	47.69	56.00	8.31	QP
6	0.5433	25.62	10.00	35.62	46.00	10.38	AVG
7	1.1970	41.89	9.98	51.87	56.00	4.13	QP
8	1.1970	27.61	9.98	37.59	46.00	8.41	AVG
9	1.4173	42.73	9.98	52.71	56.00	3.29	QP
10	1.4173	26.42	9.98	36.40	46.00	9.60	AVG
11	3.2581	42.37	9.93	52.30	56.00	3.70	QP
12	3.2581	25.81	9.93	35.74	46.00	10.26	AVG

4. RADIATED EMISSION MEASUREMENT

4.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- (5) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits inthese three bands are based on measurements employing an average detector.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested. The worst case emissions were reported

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

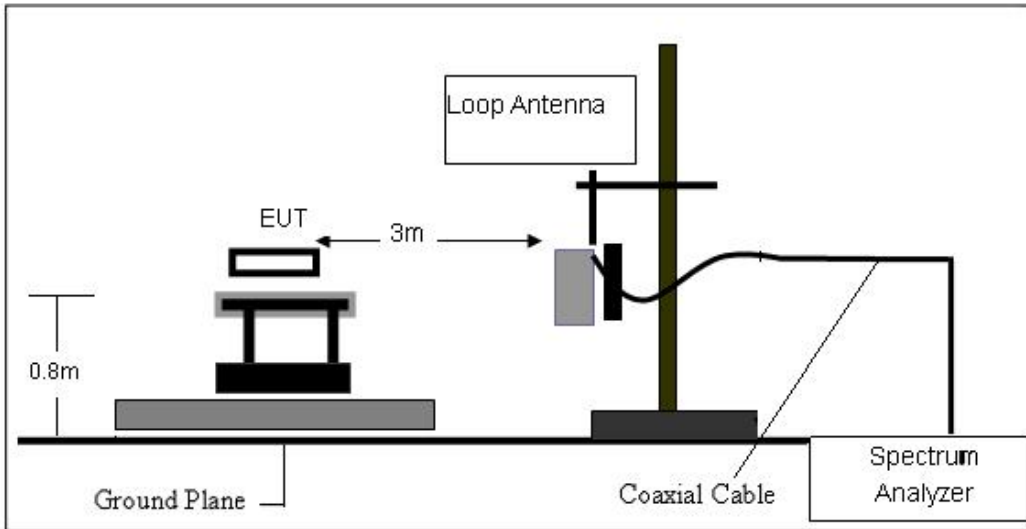

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

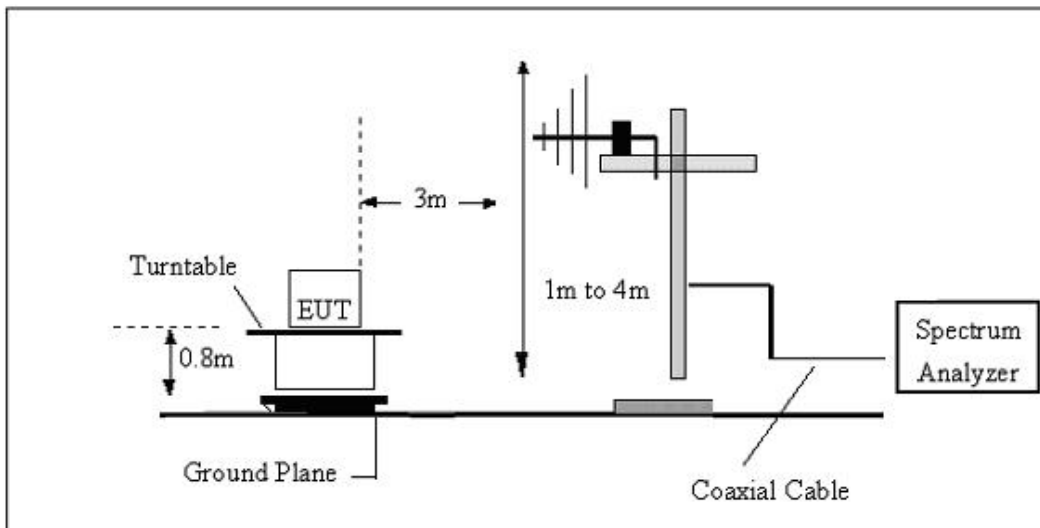


(C) Radiated Emission Test-Up Frequency Above 1GHz

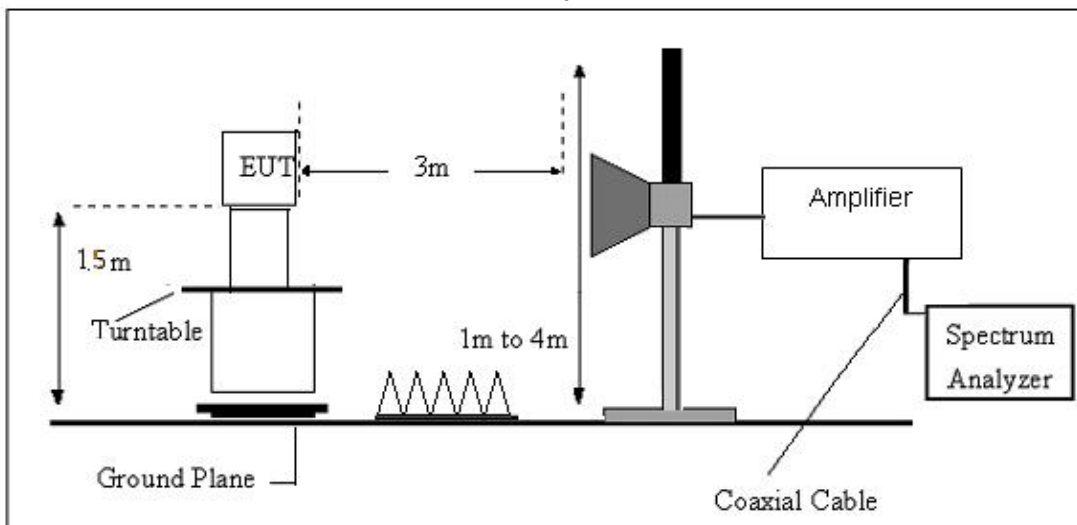

4.4 TEST RESULTS
For spurious emission

(9KHz-30MHz)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	Mode 12(Worst)		

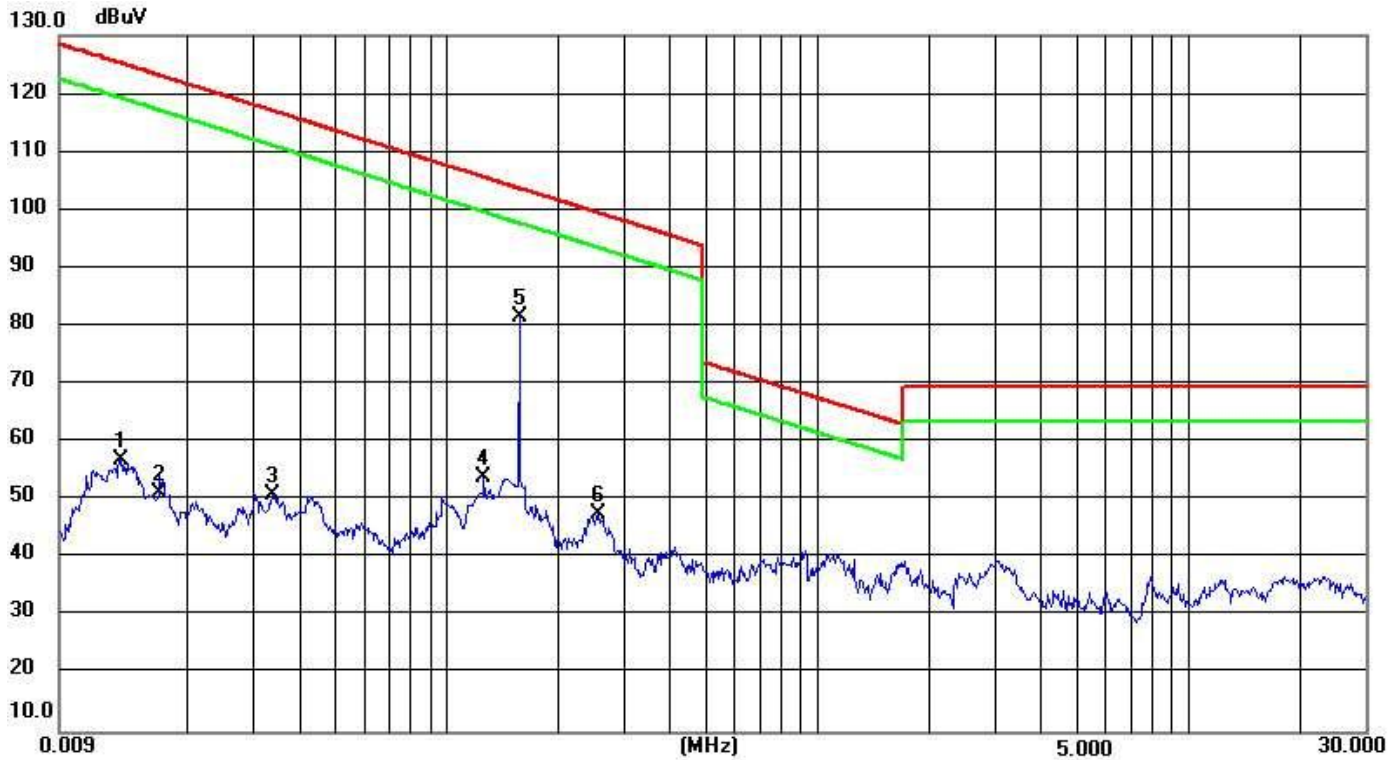

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.0131	46.89	10.12	57.01	125.26	-78.37	AV
2	0.0166	41.17	10.22	51.39	123.21	-82.04	AV
3	0.0337	40.76	10.30	51.06	117.09	-76.33	AV
4	0.1255	43.63	10.39	54.02	105.63	-62.00	AV
5 *	0.1596	71.09	10.45	81.54	103.73	-32.64	AV
6	0.2565	34.88	12.86	47.74	99.45	-64.57	AV


Remarks:

1. Final Level =Receiver Read level + Factor
- 2.The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these three bands are based on measurements employing an average detector

Note: Both coils work at the same time, but only one operating frequency

(30MHZ-1000MHZ)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	Mode 12(Worst)		

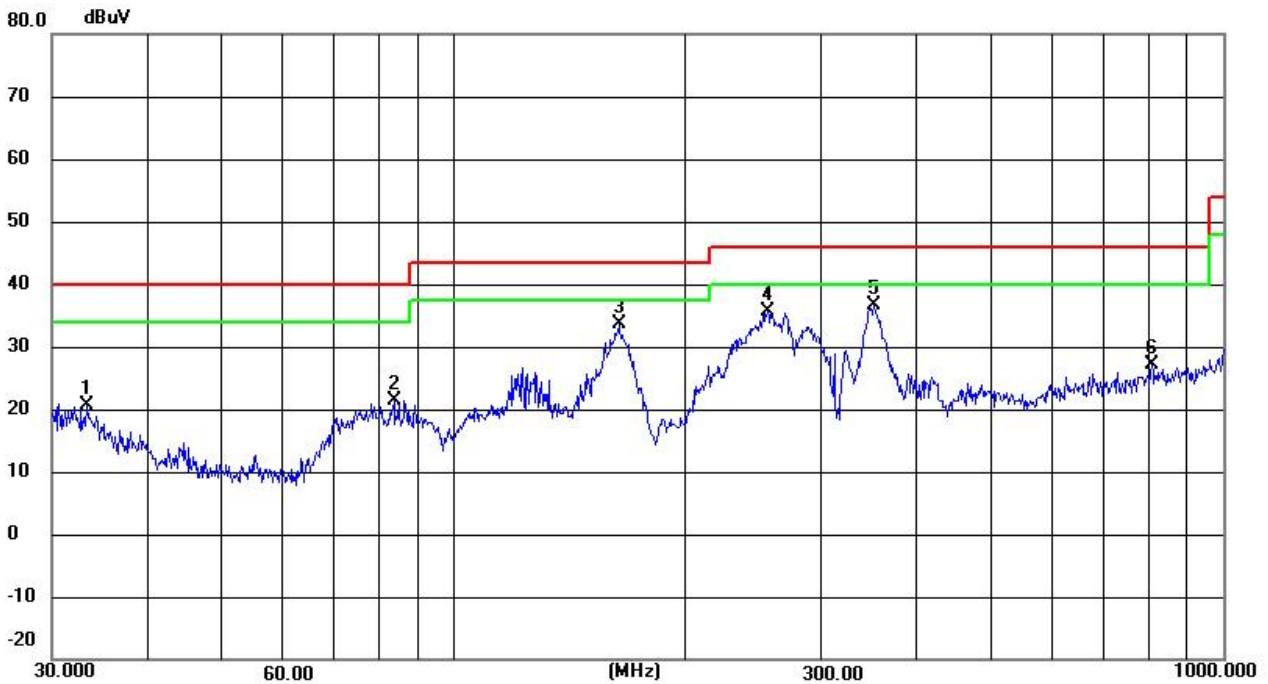


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.3278	30.11	-9.42	20.69	40.00	-19.31	QP
2	83.5220	53.58	-32.17	21.41	40.00	-18.59	QP
3	163.7550	65.66	-32.10	33.56	43.50	-9.94	QP
4	255.6230	67.57	-31.97	35.60	46.00	-10.40	QP
5	351.7080	68.45	-31.74	36.71	46.00	-9.29	QP
6	807.4290	57.83	-30.79	27.04	46.00	18.96	QP

Remarks:

1. Final Level =Receiver Read level + Factor

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	Mode 12(Worst)		

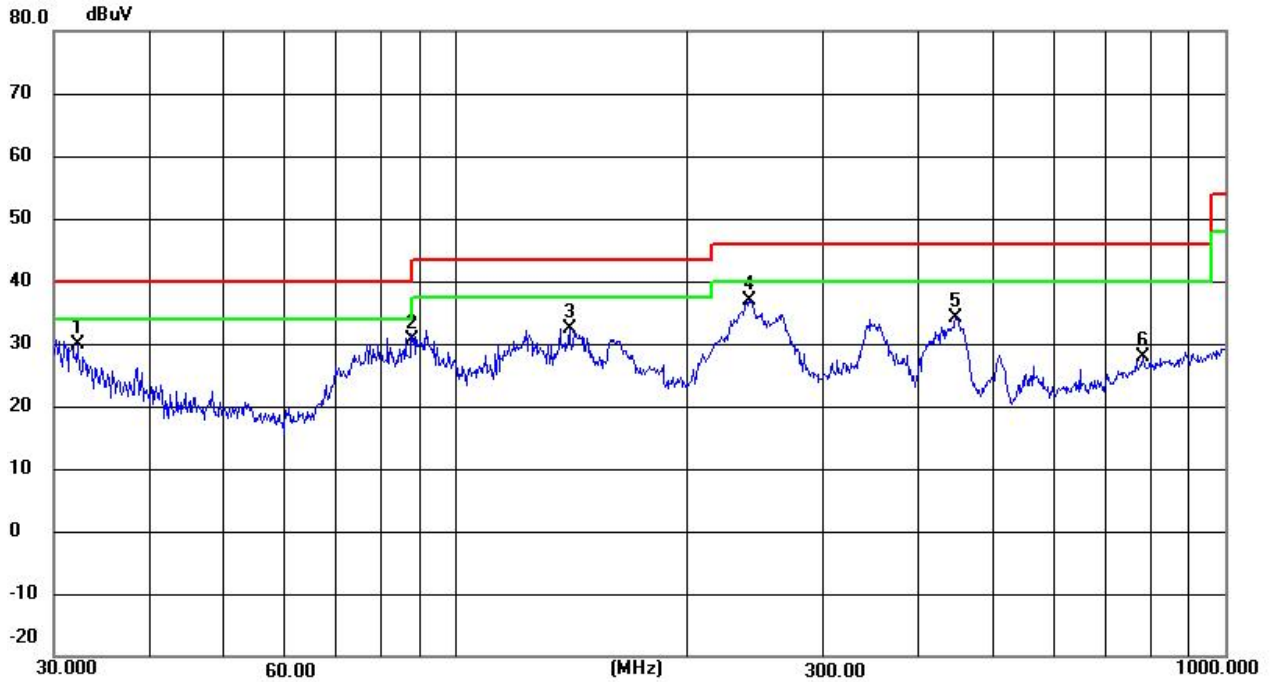

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.1794	38.51	-8.64	29.87	40.00	-10.13	QP
2	87.7245	62.86	-32.18	30.68	40.00	-9.32	QP
3	140.3420	64.47	-32.14	32.33	43.50	-11.17	QP
4	240.8300	68.88	-31.99	36.89	46.00	-9.11	QP
5	446.4140	65.63	-31.46	34.17	46.00	-11.83	QP
6	782.3451	58.82	-30.83	27.99	46.00	18.01	QP

Remarks:

1. Final Level =Receiver Read level + Factor

5. 20 DB BANDWIDTH TEST


5.1 LIMIT

According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

5.2 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a
- known signal from an external generator
 - Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
 - Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

5.3 TEST SETUP

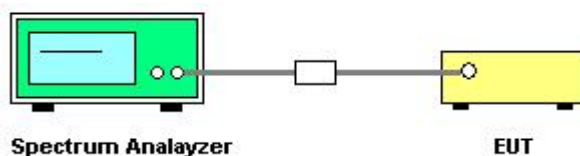


5.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	Mode 12(Worst)	Test Voltage:	DC 12V

Frequency (KHz)	20dB Bandwidth (Hz)	Result
159.6	252	PASS

Phone Coil 1

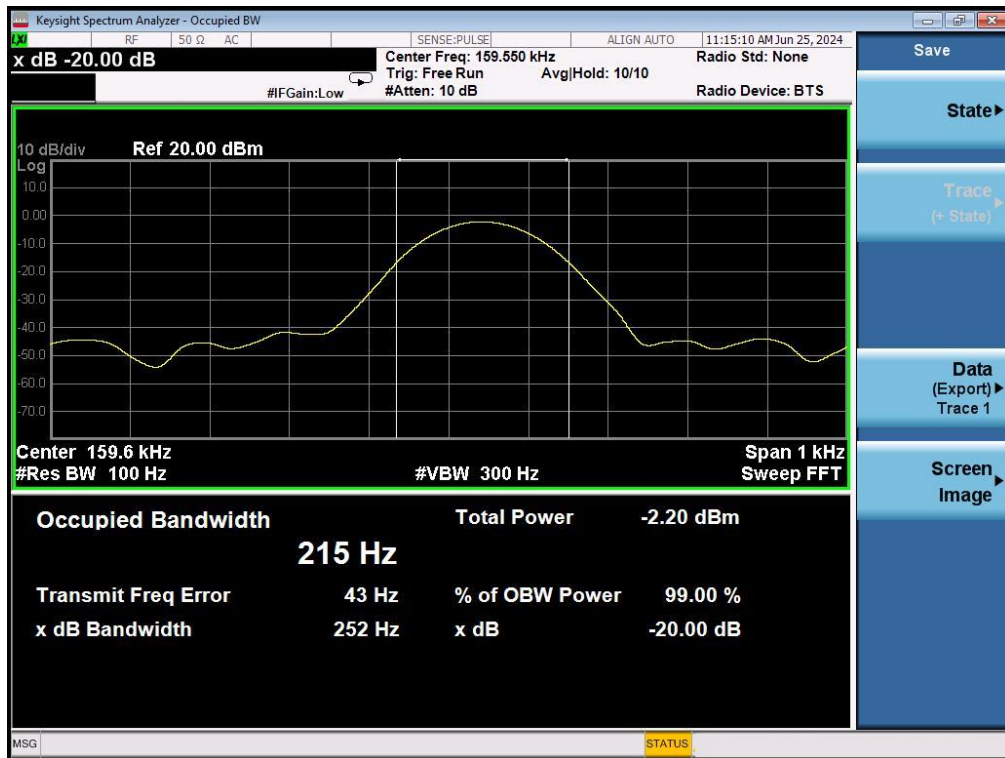

Frequency (KHz)	20dB Bandwidth (Hz)	Result
159.6	395	PASS

Phone Coil 2



6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The antennas used for this product is Inductive Loop Antenna and no other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0dBi.

*****END OF THE REPORT*****