



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

TEST REPORT

Report Reference No. : CTA24081401516

FCC ID : 2BKLE-ARIES

Compiled by

(position+printed name+signature)...: File administrators Jinghua Xiao

Supervised by

(position+printed name+signature)...: Project Engineer Xudong Zhang

Approved by

(position+printed name+signature)...: RF Manager Eric Wang

Date of issue: Aug. 27, 2024

Testing Laboratory Name: Shenzhen CTA Testing Technology Co., Ltd.

Address.....: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Versa World Inc.

Address.....: 16192 COASTAL HWY, LEWES Delaware United States, 19958

Test specification.....:

Standard: FCC 47CFR §2.1093; ANSI/IEEE C95.1-1992; IEEE 1528-2013; KDB 941225 D01; KDB 941225 D05; KDB 941225 D06; KDB 248227 D01; KDB 648474 D04; KDB 447498 D01; KDB 865664 D01; KDB 865664 D02; KDB 690783 D01

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: POC/IP Two Way Radio

Trade Mark.....: Versa

Manufacturer.....: Shenzhen Modern Cowboy Technology Co., Ltd.

Model/Type reference: ARIES

Listed Models: N/A

Rating: DC 3.7V From battery and DC 5.0V From external circuit

Result.....: PASS

TEST REPORT

Equipment under Test : POC/IP Two Way Radio

Model /Type : ARIES

Listed Models : N/A

Applicant : **Versa World Inc.**

Address : 16192 COASTAL HWY, LEWES Delaware United States, 19958

Manufacturer : **Shenzhen Modern Cowboy Technology Co., Ltd.**

Address : Room 611-616, Block B, Jinyuan Commercial Building, No.302,
Xixiang Av., Bao'an District, Shenzhen, Guangdong, China.

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

※ ※ Revision History ※ ※

REV.	ISSUED DATE	DESCRIPTION
Rev.1.0	Aug. 27, 2024	Initial Test Report Release

Contents

1	Statement of Compliance	6
2	General Information.....	8
2.1	General Remarks	8
2.2	Description of Equipment Under Test (EUT).....	8
2.3	Device Category and SAR Limits	11
2.4	Applied Standard	11
2.5	Test Facility	11
2.6	Environment of Test Site.....	13
2.7	Test Configuration.....	13
3	Specific Absorption Rate (SAR)	14
3.1	Introduction	14
3.2	SAR Definition	14
4	SAR Measurement System	15
4.1	E-Field Probe.....	15
4.2	Data Acquisition Electronics (DAE).....	16
4.3	Robot.....	17
4.4	Measurement Server	17
4.5	Phantom	18
4.6	Device Holder	18
4.7	Data Storage and Evaluation.....	19
5	Test Equipment List.....	21
6	Tissue Simulating Liquids.....	22
7	System Verification Procedures	24
8	EUT Testing Position.....	26
8.1	The measurement procedures are as follows:.....	26
9	Measurement Procedures	27
9.1	Spatial Peak SAR Evaluation	27
9.2	Power Reference Measurement	27
9.3	Area Scan Procedures	28
9.4	Zoom Scan Procedures	28
9.5	Volume Scan Procedures	29
9.6	Power Drift Monitoring	29
10	TEST CONDITIONS AND RESULTS.....	30
10.1	Conducted Power Results	30
10.2	Stand-alone SAR test evaluation.....	75
10.3	Transmit Antennas.....	76
10.4	SAR Test Results.....	77
10.5	Estimated SAR	83
10.6	Simultaneous Transmission Analysis.....	84
Appendix A.	EUT Photos and Test Setup Photos.....	85
Appendix B.	Plots of SAR System Check	86
Appendix C.	Plots of SAR Test Data.....	95

1 Statement of Compliance

<Highest SAR Summary>

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013. The maximum results of Specific Absorption Rate (SAR) found during testing are as follows.

<Highest SAR Summary>

Frequency Band	Highest Reported 1g-SAR(W/Kg)	Highest Reported 1g-SAR(W/Kg)
	Front of face (25mm)	Body-worn (0mm)
GSM 850	0.254	0.590
PCS 1900	0.303	0.622
WCDMA band II	0.129	0.485
WCDMA band IV	0.467	0.757
WCDMA band V	0.116	0.418
LTE Band 2	0.208	0.632
LTE Band 5	0.450	0.724
LTE Band 7	0.231	0.494
LTE Band 12/17	0.488	0.786
LTE Band 13	0.218	0.429
LTE Band 66/4	0.341	0.696
WLAN2.4G	0.102	0.327
WLAN5.2G	0.246	0.470
WLAN5.3G	0.246	0.463
WLAN5.5G	0.171	0.399
WLAN5.8G	0.227	0.488
Simultaneous Reported SAR (W/Kg)	0.734	1.274
SAR Test Limit (W/Kg)	1.60	
Test Result	PASS	

Note

1) According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

a) The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for the SAR test exclusion.

b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

•LTE Band 4 (1710-1755 MHz) is covered by LTE band 66 (1710-1780 MHz) and has the same maximum tune-up power, so only LTE Band 66 needs to be tested.

- LTE Band 17 (704-716 MHz) is covered by LTE band 12 (699-716 MHz) and has the same maximum tune-up power, so only LTE Band 12 needs to be tested.

2 General Information

2.1 General Remarks

Date of receipt of test sample	:	Aug. 07, 2024
Testing commenced on	:	Aug. 07, 2024
Testing concluded on	:	Aug. 27, 2024

2.2 Description of Equipment Under Test (EUT)

Product Name:	POC/IP Two Way Radio
Model/Type reference:	ARIES
Power supply:	DC 3.7V From battery and DC 5.0V From external circuit
Adapter information:	Model: K101-0502000U Input: AC 100-240V 50/60Hz 0.3A Output: DC 5.0V 2.0A
Testing sample ID:	CTA240814015-1# (Engineer sample) CTA240814015-2# (Normal sample)
Hardware version:	H251MP_V03
Software version:	V1.0
Bluetooth BLE	
Supported type:	Bluetooth low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	PIFA antenna
Antenna gain:	0.92 dBi
Bluetooth	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PIFA antenna
Antenna gain:	0.92 dBi

WIFI2.4G	
Supported type:	802.11b/802.11g/802.11n(H20)/ 802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/ 802.11n(H40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40):7
Channel separation:	5MHz
Antenna type:	PIFA antenna
Antenna gain:	0.92 dBi
WIFI5G	
WLAN:	Supported 802.11 a/n/ac
Modulation Type:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac20/40: OFDM(64QAM, 16QAM, QPSK, BPSK)
Operation frequency:	IEEE 802.11a:5180-5240MHz,5260-5320MHz,5500-5700MHz,5745-5825MHz IEEE 802.11n HT20: 5180-5240MHz,5260-5320MHz,5500-5700MHz,5745-5825MHz IEEE 802.11n HT40: 5190-5230MHz,5270-5310MHz,5510-5670MHz,5755-5795MHz IEEE 802.11ac20: 5180-5240MHz,5260-5320MHz,5500-5700MHz,5745-5825MHz IEEE 802.11ac40: 5190-5230MHz,5270-5310MHz,5510-5670MHz,5755-5795MHz
Channel number:	4 Channels for 20MHz bandwidth(5180-5240MHz) 4 Channels for 20MHz bandwidth(5260-5320MHz) 11 Channels for 20MHz bandwidth(5500-5700MHz) 5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 2 channels for 40MHz bandwidth(5270~5310MHz) 5 Channels for 40MHz bandwidth(5510-5670MHz) 2 channels for 40MHz bandwidth(5755~5795MHz)
Antenna type:	PIFA antenna
Antenna gain:	1.05 dBi
2G	
Modulation Type	GMSK
Antenna Type	PIFA Antenna
GSM/EDGE/GPRS	Supported GSM/GPRS
GSM/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GSM/GPRS Operation Frequency	GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz

GPRS Operation Frequency Band	GPRS850/GPRS1900
GPRS Multislot Class	Multi-slot Class 12
GPRS operation mode	Class B
Antenna gain:	GSM850:0.1 dbi,DCS1900: 0.5dbi
WCDMA	
Operation Band:	FDD Band II & Band IV & Band V
Power Class:	Power Class 3
Modulation Type:	QPSK for WCDMA/HSUPA/HSDPA,16QAM for HSPA+
Release Version:	R8
Antenna type:	PIFA antenna
Antenna gain:	FDD Band II: 0.50dBi FDD Band IV: 0.50 dBi FDD Band V: 0.10dBi
LTE	
Operation Band:	☒ E-UTRA Band 2(U.S.-Band) ☒ E-UTRA Band 4(U.S.-Band) ☒ E-UTRA Band 5(U.S.-Band) ☒ E-UTRA Band 7(U.S.-Band) ☒ E-UTRA Band 12(U.S.-Band) ☒ E-UTRA Band 13(U.S.-Band) ☒ E-UTRA Band 17(U.S.-Band) ☒ E-UTRA Band 66(U.S.-Band)
Release Version:	Release 9
Category:	Cat 4
Modulation Type:	QPSK, 16QAM
Antenna Description:	PIFA antenna 0.5dBi(max.) For E-UTRA Band 2 0.5dBi(max.) For E-UTRA Band 4 0.1dBi(max.) For E-UTRA Band 5 0.9dBi(max.) For E-UTRA Band 7 0.2dBi(max.) For E-UTRA Band 12 0.6dBi(max.) For E-UTRA Band 13 0.2dBi(max.) For E-UTRA Band 17 0.6dBi(max.) For E-UTRA Band 66
Category of device:	Portable device
Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's	

manual for more detailed description.

2.3 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.4 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03

2.5 Test Facility

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27890 CAB identifier: CN0127

Shenzhen CTA Testing Technology Co., Ltd. has been listed by Innovation, Science and Economic

Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

2.6 Environment of Test Site

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

2.7 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests. For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

3 Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4 SAR Measurement System

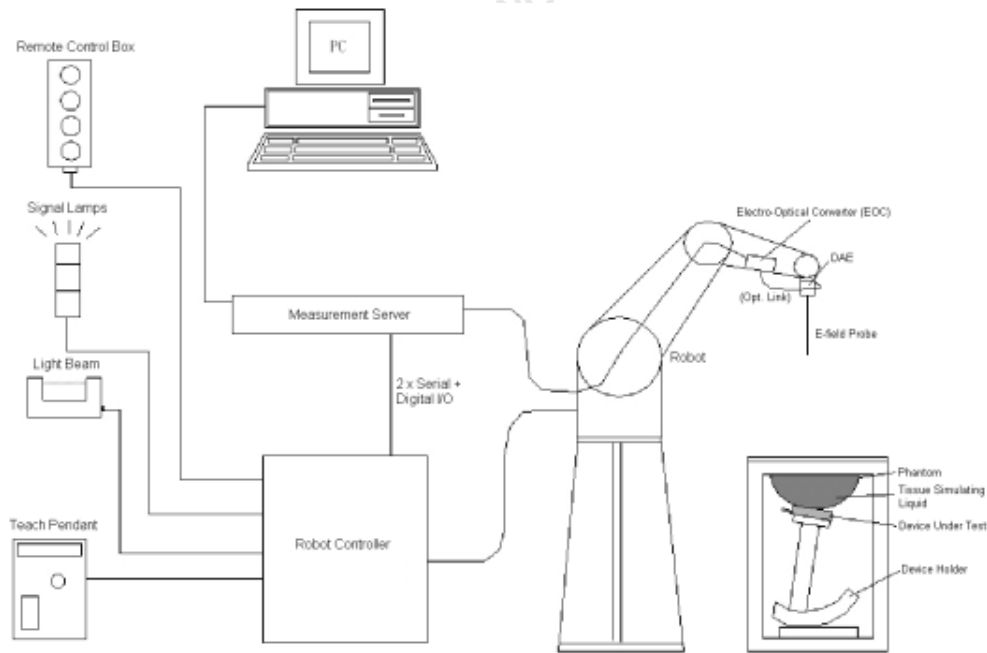

DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

components are described in details in the following sub-sections.

4.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 Photo of EX3DV4
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 W/kg; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200M Ω m; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



Photo of DAE

4.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controllersystem, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäublirobot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Photo of DASY5

4.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Photo of Server for DASY5


4.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	 Photo of SAM Phantom
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

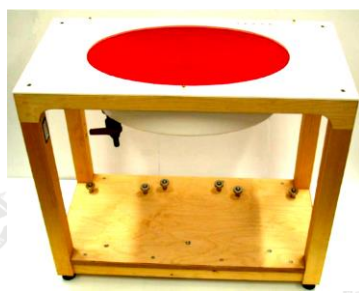Shell Thickness	2 ± 0.2 mm (sagging: <1%)	 Photo of ELI4 Phantom
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

4.6 Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ±0.5mm would produce a SAR uncertainty of ± 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.7 Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [W/kg]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)

U_i = input signal of channel i , ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/kg

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D 750V3	1194	Feb. 17,2023	Feb. 16,2026
SPEAG	835MHz System Validation Kit	D835V2	484	Aug. 25,2023	Aug. 24,2026
SPEAG	1800MHz System Validation Kit	D1800V2	2d158	Dec. 17,2021	Dec. 16,2024
SPEAG	1900MHz System Validation Kit	D1900V2	5d002	Aug. 25,2023	Aug. 24,2026
SPEAG	2450MHz System Validation Kit	D2450V2	745	Aug. 28,2023	Aug. 27,2026
SPEAG	2600MHz System Validation Kit	D2600V2	1073	Feb. 17,2023	Feb. 16,2026
SPEAG	5GHz System Validation Kit	D5GHzV2	1301	Feb.16, 2023	Feb.15, 2026
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMW500	1201.0002K50-104209-JC	Nov.05, 2023	Nov.04, 2024
SPEAG	Data Acquisition Electronics	DAE3	428	Aug.30,2023	Aug.29,2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7624	Sep. 06,2023	Sep. 05,2024
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Oct.25, 2023	Oct.24, 2024
SPEAG	DAK	DAK-3.5	1226	Oct.25, 2023	Oct.24, 2024
SPEAG	SAM Twin Phantom	QD000P40CD	1802	NA1	NA1
SPEAG	ELI Phantom	QDOVA004AA	2058	NA1	NA1
AR	Amplifier	ZHL-42W	QA1118004	Oct.25, 2023	Oct.24, 2024
Agilent	Power Meter	N1914A	MY50001102	Oct.25, 2023	Oct.24, 2024
Agilent	Power Sensor	N8481H	MY51240001	Oct.25, 2023	Oct.24, 2024
R&S	Spectrum Analyzer	N9020A	MY51170037	Oct.25, 2023	Oct.24, 2024
Agilent	Signal Generation	N5182A	MY48180656	Oct.25, 2023	Oct.24, 2024
Worken	Directional Coupler	0110A05601O-10	COM5BNW1A2	Oct.25, 2023	Oct.24, 2024

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
6. "1" : NA as this is not measurement equipment.

6 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:



Photo of Liquid Height

The following table gives the recipes for tissue simulating liquid.

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ+ resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose					
HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 1: Recipe of Tissue Simulate Liquid

The following table shows the measuring results for simulating liquid.

Measured Frequency (MHz)	Target Tissue		Measured Tissue				Liquid Temp.	Test Data
	ϵ_r	σ	ϵ_r	Dev. (%)	σ	Dev. (%)		
750	41.9	0.89	40.685	-2.90%	0.874	-1.80%	22.9	Aug. 07, 2024
835	41.5	0.90	40.687	-1.96%	0.878	-2.44%	22.1	Aug. 08, 2024
1800	40.1	1.37	39.874	-0.56%	1.365	-0.36%	22.5	Aug. 09, 2024
1900	40.0	1.40	40.478	1.20%	1.462	4.43%	22.1	Aug.12, 2024
2450	39.2	1.80	37.748	-3.70%	1.781	-1.06%	22.5	Aug.14, 2024
2600	39.0	1.96	37.978	-2.62%	1.978	0.92%	22.7	Aug.15, 2024
5250	35.9	4.71	36.123	0.62%	4.655	-1.17%	22.2	Aug.23, 2024
5600	35.5	5.27	34.89	-1.72%	5.362	1.75%	22.2	Aug.23, 2024
5750	35.4	5.22	33.777	-4.58%	5.412	3.68%	22.2	Aug.23, 2024

7 System Verification Procedures


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

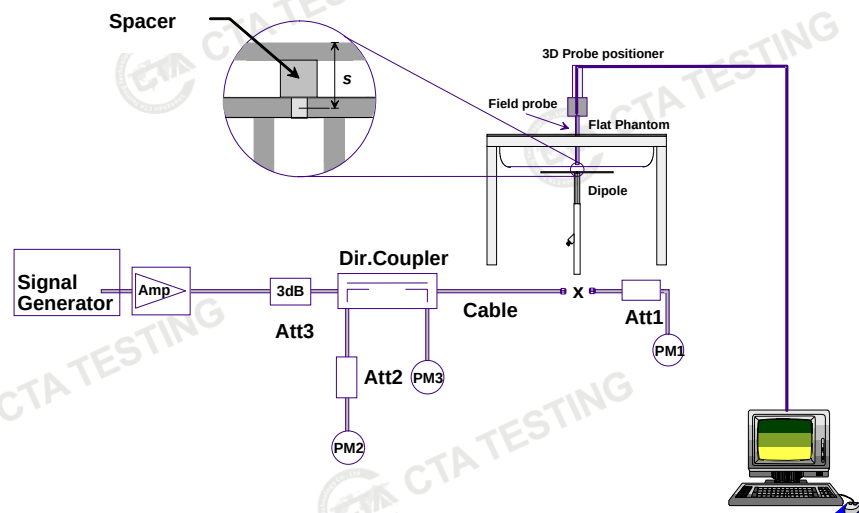

System Setup for System Evaluation

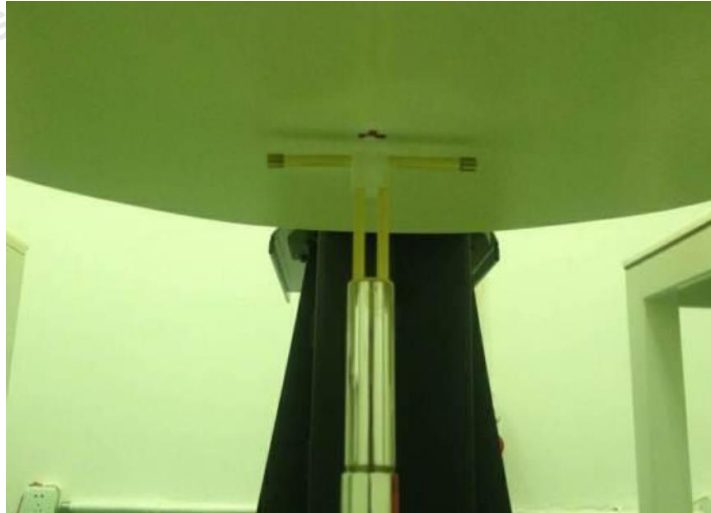


Photo of Dipole Setup

➤ Validation Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.


Date	Frequency (MHz)	Power fed onto reference dipole (mW)	Targeted SAR 1g (W/kg)	Measured SAR1g (W/kg)	Normalized SAR (W/kg)	Deviation (%)
08/07/2024	750	250	8.57	2.11	8.44	-1.52%
08/08/2024	835	250	9.68	2.34	9.36	-3.31%
08/09/2024	1800	250	39.2	9.36	37.44	-4.49%
08/12/2024	1900	250	40.1	10.50	42.00	4.74%
08/14/2024	2450	250	52.7	12.67	50.68	-3.83%
08/15/2024	2600	250	56.8	14.14	56.56	-0.42%
08/23/2024	5250	100	77.7	7.62	76.20	-1.93%
08/23/2024	5600	100	81.6	7.98	79.8	-2.21%
08/23/2024	5750	100	78.0	7.69	76.90	-1.41%

8 EUT Testing Position

8.1 The measurement procedures are as follows:

Front -of-face device


A typical example of a front-of-face device is a two-way radio that is held at a distance from the face of the user when transmitting. In these cases the device under test shall be positioned at the distance to the phantom surface that corresponds to the intended use as specified by the manufacturer in the user instructions (Figure 8a). If the intended use is not specified, a separation distance of 25 mm between the phantom surface and the device shall be used.

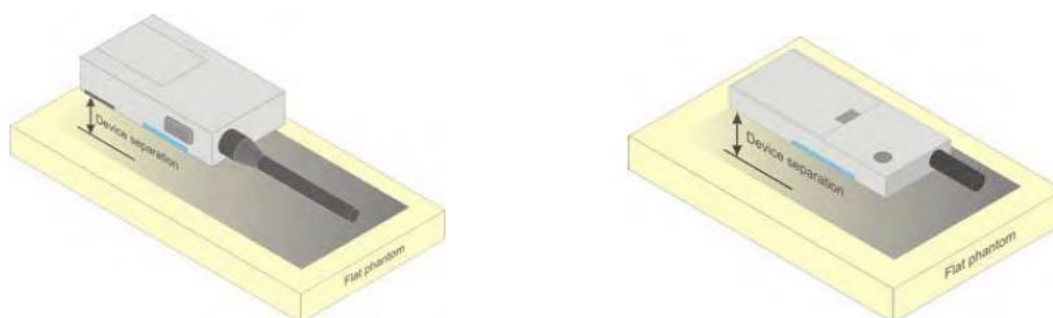

a) Two-way radios

Body-worn device

A typical example of a body-worn device is a Walkie Talkie, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

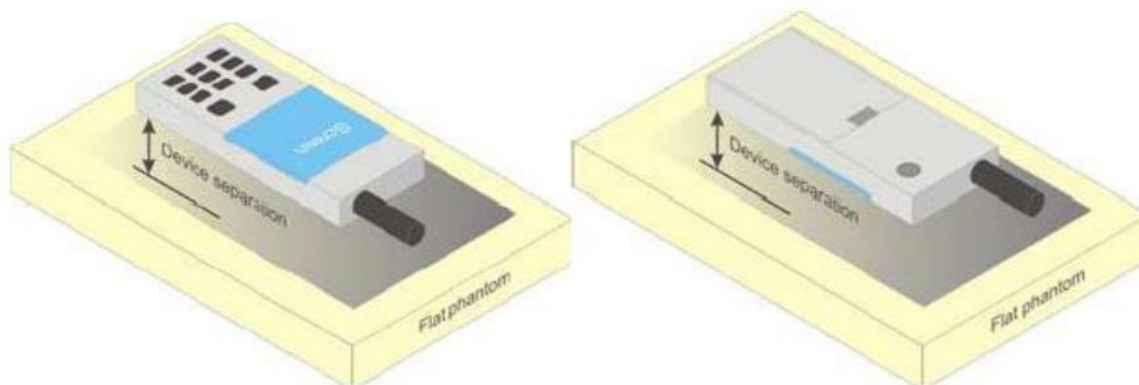

Picture 4 Test positions for body-worn devices

9 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

10 TEST CONDITIONS AND RESULTS

10.1 Conducted Power Results

<GSM Conducted power>

Band GSM850		Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	Tune-up limit (dBm)	128	190	251	128	190	251
Frequency (MHz)		824.2	836.6	848.8	824.2	836.6	848.6
GSM	33.00	32.65	32.69	32.65	23.46	23.50	23.46
GPRS (GMSK, 1 Tx slot)	33.00	32.54	32.54	32.55	23.35	23.35	23.36
GPRS (GMSK, 2 Tx slots)	31.00	31.00	30.99	30.97	24.82	24.81	24.79
GPRS (GMSK, 3 Tx slots)	29.50	29.45	29.46	29.45	25.03	25.04	25.03
GPRS (GMSK, 4 Tx slots)	28.00	27.96	28	27.97	24.79	24.83	24.80
Band PCS1900		Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	Tune-up limit (dBm)	512	661	810	512	661	810
Frequency (MHz)		1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM	30.00	29.67	29.69	29.65	20.48	20.50	20.46
GPRS (GMSK, 1 Tx slot)	30.00	29.52	29.57	29.46	20.33	20.38	20.27
GPRS (GMSK, 2 Tx slots)	28.50	27.97	28.03	27.97	21.79	21.85	21.79
GPRS (GMSK, 3 Tx slots)	26.50	26.49	26.46	26.46	22.07	22.04	22.04
GPRS (GMSK, 4 Tx slots)	25.00	24.92	24.97	24.95	21.75	21.80	21.78
Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots. The calculated method are shown as below: Frame-averaged power = Maximum burst averaged power (1 Tx Slot) – 9.03 dB Frame-averaged power = Maximum burst averaged power (2 Tx Slots) – 6.02 dB Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB Frame-averaged power = Maximum burst averaged power (4 Tx Slots) – 3.01 dB							

Note:

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and for further SAR test reduction
2. For Data mode SAR testing, GPRS should be evaluated, therefore the EUT was set in corresponding TX slots due to its highest frame-average power.

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

Setup Configuration

<WCDMA Conducted Power>

WCDMA	Band II (dBm)			
TX Channel	Tune-up limit (dBm)	9262	9400	9538
Frequency (MHz)		1852.4	1880.0	1907.6
RMC 12.2Kbps	23.50	23.17	23.35	23.25
HSDPA Subtest-1	23.00	22.66	22.84	22.65
HSDPA Subtest-2	23.00	22.57	22.72	22.74
HSDPA Subtest-3	23.00	22.46	22.46	22.37
HSDPA Subtest-4	23.00	22.36	22.62	22.43
HSUPA Subtest-1	23.00	22.64	22.48	22.49
HSUPA Subtest-2	23.00	22.56	22.39	22.32
HSUPA Subtest-3	23.00	22.38	22.5	22.34
HSUPA Subtest-4	23.00	22.49	22.29	22.35
HSUPA Subtest-5	22.00	21.3	21.54	21.55

WCDMA	Band IV (dBm)			
TX Channel	Tune-up limit (dBm)	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC 12.2Kbps	23.50	23.04	23.18	23.25
HSDPA Subtest-1	23.00	22.62	22.9	22.53
HSDPA Subtest-2	23.00	22.66	22.57	22.6
HSDPA Subtest-3	23.00	22.72	22.64	22.52
HSDPA Subtest-4	22.50	22.42	22.48	22.42
HSUPA Subtest-1	23.00	22.56	22.54	22.52
HSUPA Subtest-2	23.00	22.6	22.86	22.47
HSUPA Subtest-3	23.00	22.52	22.68	22.54
HSUPA Subtest-4	23.00	22.34	22.55	22.36
HSUPA Subtest-5	21.50	21.23	21.47	21.32

WCDMA	Band V (dBm)			
TX Channel	Tune-up limit (dBm)	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC 12.2Kbps	23.00	22.81	22.92	22.75
HSDPA Subtest-1	23.00	22.53	22.77	22.75
HSDPA Subtest-2	23.00	22.60	22.86	22.65
HSDPA Subtest-3	23.00	22.63	22.62	22.62

HSDPA Subtest-4	23.00	22.61	22.64	22.66
HSUPA Subtest-1	23.00	22.46	22.60	22.52
HSUPA Subtest-2	23.00	22.54	22.72	22.54
HSUPA Subtest-3	23.00	22.43	22.53	22.50
HSUPA Subtest-4	22.00	21.54	21.56	21.56
HSUPA Subtest-5	22.00	21.76	21.08	21.72

General Note

1. Per KDB 941225 D01 v02, RMC 12.2kbps setting is used to evaluate SAR as primary mode. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.
2. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

<LTE Conducted Power>

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune-up limit (dBm)
Band2	1.4MHz	QPSK	18607	1RB#0	21.29	22.00
Band2	1.4MHz	16QAM	18607	1RB#0	21.14	22.00
Band2	1.4MHz	QPSK	18607	1RB#2	21.28	22.00
Band2	1.4MHz	16QAM	18607	1RB#2	20.52	21.00
Band2	1.4MHz	QPSK	18607	1RB#5	21.21	22.00
Band2	1.4MHz	16QAM	18607	1RB#5	20.40	21.00
Band2	1.4MHz	QPSK	18607	3RB#0	21.39	22.00
Band2	1.4MHz	16QAM	18607	3RB#0	19.99	20.00
Band2	1.4MHz	QPSK	18607	3RB#1	21.35	22.00
Band2	1.4MHz	16QAM	18607	3RB#1	19.94	20.00
Band2	1.4MHz	QPSK	18607	3RB#3	21.35	22.00
Band2	1.4MHz	16QAM	18607	3RB#3	20.02	21.00
Band2	1.4MHz	QPSK	18607	6RB#0	20.29	21.00
Band2	1.4MHz	16QAM	18607	6RB#0	19.35	20.00
Band2	1.4MHz	QPSK	18900	1RB#0	21.73	22.00
Band2	1.4MHz	16QAM	18900	1RB#0	21.13	22.00
Band2	1.4MHz	QPSK	18900	1RB#2	21.73	22.00
Band2	1.4MHz	16QAM	18900	1RB#2	21.21	22.00
Band2	1.4MHz	QPSK	18900	1RB#5	21.74	22.00
Band2	1.4MHz	16QAM	18900	1RB#5	21.16	22.00
Band2	1.4MHz	QPSK	18900	3RB#0	21.88	22.00
Band2	1.4MHz	16QAM	18900	3RB#0	20.64	21.00
Band2	1.4MHz	QPSK	18900	3RB#1	21.85	22.00
Band2	1.4MHz	16QAM	18900	3RB#1	20.72	21.00
Band2	1.4MHz	QPSK	18900	3RB#3	21.86	22.00
Band2	1.4MHz	16QAM	18900	3RB#3	20.85	21.00
Band2	1.4MHz	QPSK	18900	6RB#0	20.97	21.00
Band2	1.4MHz	16QAM	18900	6RB#0	20.12	21.00
Band2	1.4MHz	QPSK	19193	1RB#0	23.13	24.00
Band2	1.4MHz	16QAM	19193	1RB#0	22.38	23.00
Band2	1.4MHz	QPSK	19193	1RB#2	23.11	24.00
Band2	1.4MHz	16QAM	19193	1RB#2	22.44	23.00
Band2	1.4MHz	QPSK	19193	1RB#5	23.15	24.00
Band2	1.4MHz	16QAM	19193	1RB#5	22.38	23.00
Band2	1.4MHz	QPSK	19193	3RB#0	23.26	24.00
Band2	1.4MHz	16QAM	19193	3RB#0	22.12	23.00
Band2	1.4MHz	QPSK	19193	3RB#1	23.32	24.00
Band2	1.4MHz	16QAM	19193	3RB#1	22.10	23.00
Band2	1.4MHz	QPSK	19193	3RB#3	23.24	24.00
Band2	1.4MHz	16QAM	19193	3RB#3	22.17	23.00

Band2	1.4MHz	QPSK	19193	6RB#0	22.36	23.00
Band2	1.4MHz	16QAM	19193	6RB#0	21.65	22.00
Band2	3MHz	QPSK	18615	1RB#0	21.41	22.00
Band2	3MHz	16QAM	18615	1RB#0	20.39	21.00
Band2	3MHz	QPSK	18615	1RB#8	21.40	22.00
Band2	3MHz	16QAM	18615	1RB#8	20.50	21.00
Band2	3MHz	QPSK	18615	1RB#14	21.38	22.00
Band2	3MHz	16QAM	18615	1RB#14	20.53	21.00
Band2	3MHz	QPSK	18615	8RB#0	20.42	21.00
Band2	3MHz	16QAM	18615	8RB#0	19.79	20.00
Band2	3MHz	QPSK	18615	8RB#4	20.51	21.00
Band2	3MHz	16QAM	18615	8RB#4	19.76	20.00
Band2	3MHz	QPSK	18615	8RB#7	20.49	21.00
Band2	3MHz	16QAM	18615	8RB#7	19.64	20.00
Band2	3MHz	QPSK	18615	15RB#0	20.46	21.00
Band2	3MHz	16QAM	18615	15RB#0	19.56	20.00
Band2	3MHz	QPSK	18900	1RB#0	21.89	22.00
Band2	3MHz	16QAM	18900	1RB#0	20.94	21.00
Band2	3MHz	QPSK	18900	1RB#8	22.03	23.00
Band2	3MHz	16QAM	18900	1RB#8	20.91	21.00
Band2	3MHz	QPSK	18900	1RB#14	22.04	23.00
Band2	3MHz	16QAM	18900	1RB#14	21.02	22.00
Band2	3MHz	QPSK	18900	8RB#0	21.08	22.00
Band2	3MHz	16QAM	18900	8RB#0	20.33	21.00
Band2	3MHz	QPSK	18900	8RB#4	21.08	22.00
Band2	3MHz	16QAM	18900	8RB#4	20.32	21.00
Band2	3MHz	QPSK	18900	8RB#7	21.03	22.00
Band2	3MHz	16QAM	18900	8RB#7	20.35	21.00
Band2	3MHz	QPSK	18900	15RB#0	21.13	22.00
Band2	3MHz	16QAM	18900	15RB#0	20.17	21.00
Band2	3MHz	QPSK	19185	1RB#0	23.25	24.00
Band2	3MHz	16QAM	19185	1RB#0	22.26	23.00
Band2	3MHz	QPSK	19185	1RB#8	23.32	24.00
Band2	3MHz	16QAM	19185	1RB#8	22.30	23.00
Band2	3MHz	QPSK	19185	1RB#14	23.34	24.00
Band2	3MHz	16QAM	19185	1RB#14	22.34	23.00
Band2	3MHz	QPSK	19185	8RB#0	22.46	23.00
Band2	3MHz	16QAM	19185	8RB#0	21.66	22.00
Band2	3MHz	QPSK	19185	8RB#4	22.45	23.00
Band2	3MHz	16QAM	19185	8RB#4	21.70	22.00
Band2	3MHz	QPSK	19185	8RB#7	22.43	23.00
Band2	3MHz	16QAM	19185	8RB#7	21.72	22.00
Band2	3MHz	QPSK	19185	15RB#0	22.37	23.00

Band2	3MHz	16QAM	19185	15RB#0	21.58	22.00
Band2	5MHz	QPSK	18625	1RB#0	21.55	22.00
Band2	5MHz	16QAM	18625	1RB#0	20.12	21.00
Band2	5MHz	QPSK	18625	1RB#12	21.53	22.00
Band2	5MHz	16QAM	18625	1RB#12	20.01	21.00
Band2	5MHz	QPSK	18625	1RB#24	21.67	22.00
Band2	5MHz	16QAM	18625	1RB#24	20.04	21.00
Band2	5MHz	QPSK	18625	12RB#0	20.52	21.00
Band2	5MHz	16QAM	18625	12RB#0	19.61	20.00
Band2	5MHz	QPSK	18625	12RB#6	20.51	21.00
Band2	5MHz	16QAM	18625	12RB#6	19.60	20.00
Band2	5MHz	QPSK	18625	12RB#13	20.48	21.00
Band2	5MHz	16QAM	18625	12RB#13	19.67	20.00
Band2	5MHz	QPSK	18625	25RB#0	20.49	21.00
Band2	5MHz	16QAM	18625	25RB#0	19.72	20.00
Band2	5MHz	QPSK	18900	1RB#0	22.09	23.00
Band2	5MHz	16QAM	18900	1RB#0	20.62	21.00
Band2	5MHz	QPSK	18900	1RB#12	22.18	23.00
Band2	5MHz	16QAM	18900	1RB#12	20.62	21.00
Band2	5MHz	QPSK	18900	1RB#24	22.29	23.00
Band2	5MHz	16QAM	18900	1RB#24	20.67	21.00
Band2	5MHz	QPSK	18900	12RB#0	21.14	22.00
Band2	5MHz	16QAM	18900	12RB#0	20.23	21.00
Band2	5MHz	QPSK	18900	12RB#6	21.15	22.00
Band2	5MHz	16QAM	18900	12RB#6	20.24	21.00
Band2	5MHz	QPSK	18900	12RB#13	21.19	22.00
Band2	5MHz	16QAM	18900	12RB#13	20.23	21.00
Band2	5MHz	QPSK	18900	25RB#0	21.09	22.00
Band2	5MHz	16QAM	18900	25RB#0	20.31	21.00
Band2	5MHz	QPSK	19175	1RB#0	23.39	24.00
Band2	5MHz	16QAM	19175	1RB#0	21.94	22.00
Band2	5MHz	QPSK	19175	1RB#12	23.37	24.00
Band2	5MHz	16QAM	19175	1RB#12	21.68	22.00
Band2	5MHz	QPSK	19175	1RB#24	23.23	24.00
Band2	5MHz	16QAM	19175	1RB#24	21.73	22.00
Band2	5MHz	QPSK	19175	12RB#0	22.19	23.00
Band2	5MHz	16QAM	19175	12RB#0	21.34	22.00
Band2	5MHz	QPSK	19175	12RB#6	22.28	23.00
Band2	5MHz	16QAM	19175	12RB#6	21.36	22.00
Band2	5MHz	QPSK	19175	12RB#13	22.23	23.00
Band2	5MHz	16QAM	19175	12RB#13	21.36	22.00
Band2	5MHz	QPSK	19175	25RB#0	22.22	23.00
Band2	5MHz	16QAM	19175	25RB#0	21.34	22.00

Band2	10MHz	QPSK	18650	1RB#0	21.26	22.00
Band2	10MHz	16QAM	18650	1RB#0	20.41	21.00
Band2	10MHz	QPSK	18650	1RB#24	21.32	22.00
Band2	10MHz	16QAM	18650	1RB#24	20.52	21.00
Band2	10MHz	QPSK	18650	1RB#49	21.51	22.00
Band2	10MHz	16QAM	18650	1RB#49	20.67	21.00
Band2	10MHz	QPSK	18650	25RB#0	20.31	21.00
Band2	10MHz	16QAM	18650	25RB#0	19.40	20.00
Band2	10MHz	QPSK	18650	25RB#12	20.42	21.00
Band2	10MHz	16QAM	18650	25RB#12	19.40	20.00
Band2	10MHz	QPSK	18650	25RB#25	20.50	21.00
Band2	10MHz	16QAM	18650	25RB#25	19.58	20.00
Band2	10MHz	QPSK	18650	50RB#0	20.45	21.00
Band2	10MHz	16QAM	18650	50RB#0	19.56	20.00
Band2	10MHz	QPSK	18900	1RB#0	21.79	22.00
Band2	10MHz	16QAM	18900	1RB#0	21.08	22.00
Band2	10MHz	QPSK	18900	1RB#24	21.82	22.00
Band2	10MHz	16QAM	18900	1RB#24	21.09	22.00
Band2	10MHz	QPSK	18900	1RB#49	22.00	23.00
Band2	10MHz	16QAM	18900	1RB#49	21.27	22.00
Band2	10MHz	QPSK	18900	25RB#0	21.02	22.00
Band2	10MHz	16QAM	18900	25RB#0	20.02	21.00
Band2	10MHz	QPSK	18900	25RB#12	20.88	21.00
Band2	10MHz	16QAM	18900	25RB#12	20.02	21.00
Band2	10MHz	QPSK	18900	25RB#25	21.00	22.00
Band2	10MHz	16QAM	18900	25RB#25	20.06	21.00
Band2	10MHz	QPSK	18900	50RB#0	21.02	22.00
Band2	10MHz	16QAM	18900	50RB#0	20.09	21.00
Band2	10MHz	QPSK	19150	1RB#0	22.83	23.00
Band2	10MHz	16QAM	19150	1RB#0	22.02	23.00
Band2	10MHz	QPSK	19150	1RB#24	23.05	24.00
Band2	10MHz	16QAM	19150	1RB#24	22.18	23.00
Band2	10MHz	QPSK	19150	1RB#49	23.18	24.00
Band2	10MHz	16QAM	19150	1RB#49	22.16	23.00
Band2	10MHz	QPSK	19150	25RB#0	21.99	22.00
Band2	10MHz	16QAM	19150	25RB#0	21.16	22.00
Band2	10MHz	QPSK	19150	25RB#12	22.11	23.00
Band2	10MHz	16QAM	19150	25RB#12	21.16	22.00
Band2	10MHz	QPSK	19150	25RB#25	22.22	23.00
Band2	10MHz	16QAM	19150	25RB#25	21.27	22.00
Band2	10MHz	QPSK	19150	50RB#0	22.25	23.00
Band2	10MHz	16QAM	19150	50RB#0	21.37	22.00
Band2	15MHz	QPSK	18675	1RB#0	21.30	22.00

Band2	15MHz	16QAM	18675	1RB#0	20.47	21.00
Band2	15MHz	QPSK	18675	1RB#38	21.49	22.00
Band2	15MHz	16QAM	18675	1RB#38	20.60	21.00
Band2	15MHz	QPSK	18675	1RB#74	21.72	22.00
Band2	15MHz	16QAM	18675	1RB#74	20.85	21.00
Band2	15MHz	QPSK	18675	38RB#0	20.68	21.00
Band2	15MHz	16QAM	18675	38RB#0	20.67	21.00
Band2	15MHz	QPSK	18675	38RB#18	20.66	21.00
Band2	15MHz	16QAM	18675	38RB#18	20.66	21.00
Band2	15MHz	QPSK	18675	38RB#37	20.65	21.00
Band2	15MHz	16QAM	18675	38RB#37	20.65	21.00
Band2	15MHz	QPSK	18675	75RB#0	20.65	21.00
Band2	15MHz	16QAM	18675	75RB#0	19.62	20.00
Band2	15MHz	QPSK	18900	1RB#0	21.82	22.00
Band2	15MHz	16QAM	18900	1RB#0	21.13	22.00
Band2	15MHz	QPSK	18900	1RB#38	21.89	22.00
Band2	15MHz	16QAM	18900	1RB#38	21.10	22.00
Band2	15MHz	QPSK	18900	1RB#74	22.10	23.00
Band2	15MHz	16QAM	18900	1RB#74	21.31	22.00
Band2	15MHz	QPSK	18900	38RB#0	21.02	22.00
Band2	15MHz	16QAM	18900	38RB#0	21.02	22.00
Band2	15MHz	QPSK	18900	38RB#18	21.02	22.00
Band2	15MHz	16QAM	18900	38RB#18	21.02	22.00
Band2	15MHz	QPSK	18900	38RB#37	21.02	22.00
Band2	15MHz	16QAM	18900	38RB#37	21.01	22.00
Band2	15MHz	QPSK	18900	75RB#0	21.01	22.00
Band2	15MHz	16QAM	18900	75RB#0	20.11	21.00
Band2	15MHz	QPSK	19125	1RB#0	22.53	23.00
Band2	15MHz	16QAM	19125	1RB#0	21.64	22.00
Band2	15MHz	QPSK	19125	1RB#38	23.02	24.00
Band2	15MHz	16QAM	19125	1RB#38	22.12	23.00
Band2	15MHz	QPSK	19125	1RB#74	23.17	24.00
Band2	15MHz	16QAM	19125	1RB#74	22.27	23.00
Band2	15MHz	QPSK	19125	38RB#0	22.15	23.00
Band2	15MHz	16QAM	19125	38RB#0	22.15	23.00
Band2	15MHz	QPSK	19125	38RB#18	22.15	23.00
Band2	15MHz	16QAM	19125	38RB#18	22.14	23.00
Band2	15MHz	QPSK	19125	38RB#37	22.13	23.00
Band2	15MHz	16QAM	19125	38RB#37	22.13	23.00
Band2	15MHz	QPSK	19125	75RB#0	22.13	23.00
Band2	15MHz	16QAM	19125	75RB#0	21.15	22.00
Band2	20MHz	QPSK	18700	1RB#0	21.73	22.00
Band2	20MHz	16QAM	18700	1RB#0	20.41	21.00

Band2	20MHz	QPSK	18700	1RB#49	22.01	23.00
Band2	20MHz	16QAM	18700	1RB#49	20.43	21.00
Band2	20MHz	QPSK	18700	1RB#99	21.82	22.00
Band2	20MHz	16QAM	18700	1RB#99	20.67	21.00
Band2	20MHz	QPSK	18700	50RB#0	20.61	21.00
Band2	20MHz	16QAM	18700	50RB#0	19.74	20.00
Band2	20MHz	QPSK	18700	50RB#25	20.49	21.00
Band2	20MHz	16QAM	18700	50RB#25	19.74	20.00
Band2	20MHz	QPSK	18700	50RB#50	20.79	21.00
Band2	20MHz	16QAM	18700	50RB#50	20.03	21.00
Band2	20MHz	QPSK	18700	100RB#0	20.75	21.00
Band2	20MHz	16QAM	18700	100RB#0	19.78	20.00
Band2	20MHz	QPSK	18900	1RB#0	22.01	23.00
Band2	20MHz	16QAM	18900	1RB#0	21.24	22.00
Band2	20MHz	QPSK	18900	1RB#49	22.13	23.00
Band2	20MHz	16QAM	18900	1RB#49	21.10	22.00
Band2	20MHz	QPSK	18900	1RB#99	22.20	23.00
Band2	20MHz	16QAM	18900	1RB#99	21.45	22.00
Band2	20MHz	QPSK	18900	50RB#0	20.96	21.00
Band2	20MHz	16QAM	18900	50RB#0	20.20	21.00
Band2	20MHz	QPSK	18900	50RB#25	21.07	22.00
Band2	20MHz	16QAM	18900	50RB#25	20.20	21.00
Band2	20MHz	QPSK	18900	50RB#50	21.14	22.00
Band2	20MHz	16QAM	18900	50RB#50	20.27	21.00
Band2	20MHz	QPSK	18900	100RB#0	21.20	22.00
Band2	20MHz	16QAM	18900	100RB#0	20.20	21.00
Band2	20MHz	QPSK	19100	1RB#0	22.36	23.00
Band2	20MHz	16QAM	19100	1RB#0	21.50	22.00
Band2	20MHz	QPSK	19100	1RB#49	23.00	24.00
Band2	20MHz	16QAM	19100	1RB#49	21.17	22.00
Band2	20MHz	QPSK	19100	1RB#99	22.25	23.00
Band2	20MHz	16QAM	19100	1RB#99	21.44	22.00
Band2	20MHz	QPSK	19100	50RB#0	20.83	21.00
Band2	20MHz	16QAM	19100	50RB#0	19.84	20.00
Band2	20MHz	QPSK	19100	50RB#25	20.80	21.00
Band2	20MHz	16QAM	19100	50RB#25	19.99	20.00
Band2	20MHz	QPSK	19100	50RB#50	21.36	22.00
Band2	20MHz	16QAM	19100	50RB#50	20.42	21.00
Band2	20MHz	QPSK	19100	100RB#0	21.09	22.00
Band2	20MHz	16QAM	19100	100RB#0	20.09	21.00

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune-up limit (dBm)
Band4	1.4MHz	QPSK	19957	1RB#0	20.45	21.00
Band4	1.4MHz	16QAM	19957	1RB#0	20.25	21.00
Band4	1.4MHz	QPSK	19957	1RB#2	20.53	21.00
Band4	1.4MHz	16QAM	19957	1RB#2	20.26	21.00
Band4	1.4MHz	QPSK	19957	1RB#5	20.71	21.00
Band4	1.4MHz	16QAM	19957	1RB#5	19.78	20.00
Band4	1.4MHz	QPSK	19957	3RB#0	20.58	21.00
Band4	1.4MHz	16QAM	19957	3RB#0	19.83	20.00
Band4	1.4MHz	QPSK	19957	3RB#1	20.65	21.00
Band4	1.4MHz	16QAM	19957	3RB#1	19.80	20.00
Band4	1.4MHz	QPSK	19957	3RB#3	20.66	21.00
Band4	1.4MHz	16QAM	19957	3RB#3	19.49	20.00
Band4	1.4MHz	QPSK	19957	6RB#0	19.79	20.00
Band4	1.4MHz	16QAM	19957	6RB#0	18.91	19.00
Band4	1.4MHz	QPSK	20175	1RB#0	21.68	22.00
Band4	1.4MHz	16QAM	20175	1RB#0	21.21	22.00
Band4	1.4MHz	QPSK	20175	1RB#2	21.76	22.00
Band4	1.4MHz	16QAM	20175	1RB#2	21.29	22.00
Band4	1.4MHz	QPSK	20175	1RB#5	21.78	22.00
Band4	1.4MHz	16QAM	20175	1RB#5	21.27	22.00
Band4	1.4MHz	QPSK	20175	3RB#0	21.72	22.00
Band4	1.4MHz	16QAM	20175	3RB#0	20.88	21.00
Band4	1.4MHz	QPSK	20175	3RB#1	21.77	22.00
Band4	1.4MHz	16QAM	20175	3RB#1	20.85	21.00
Band4	1.4MHz	QPSK	20175	3RB#3	21.85	22.00
Band4	1.4MHz	16QAM	20175	3RB#3	20.93	21.00
Band4	1.4MHz	QPSK	20175	6RB#0	21.00	22.00
Band4	1.4MHz	16QAM	20175	6RB#0	20.34	21.00
Band4	1.4MHz	QPSK	20393	1RB#0	21.80	22.00
Band4	1.4MHz	16QAM	20393	1RB#0	20.51	21.00
Band4	1.4MHz	QPSK	20393	1RB#2	21.68	22.00
Band4	1.4MHz	16QAM	20393	1RB#2	20.49	21.00
Band4	1.4MHz	QPSK	20393	1RB#5	21.71	22.00
Band4	1.4MHz	16QAM	20393	1RB#5	20.51	21.00
Band4	1.4MHz	QPSK	20393	3RB#0	21.67	22.00
Band4	1.4MHz	16QAM	20393	3RB#0	20.78	21.00
Band4	1.4MHz	QPSK	20393	3RB#1	21.72	22.00
Band4	1.4MHz	16QAM	20393	3RB#1	20.78	21.00
Band4	1.4MHz	QPSK	20393	3RB#3	21.73	22.00
Band4	1.4MHz	16QAM	20393	3RB#3	20.79	21.00

Band4	1.4MHz	QPSK	20393	6RB#0	20.80	21.00
Band4	1.4MHz	16QAM	20393	6RB#0	20.06	21.00
Band4	3MHz	QPSK	19965	1RB#0	22.71	23.00
Band4	3MHz	16QAM	19965	1RB#0	21.84	22.00
Band4	3MHz	QPSK	19965	1RB#8	22.71	23.00
Band4	3MHz	16QAM	19965	1RB#8	21.91	22.00
Band4	3MHz	QPSK	19965	1RB#14	22.56	23.00
Band4	3MHz	16QAM	19965	1RB#14	21.85	22.00
Band4	3MHz	QPSK	19965	8RB#0	22.02	23.00
Band4	3MHz	16QAM	19965	8RB#0	21.30	22.00
Band4	3MHz	QPSK	19965	8RB#4	21.94	22.00
Band4	3MHz	16QAM	19965	8RB#4	21.23	22.00
Band4	3MHz	QPSK	19965	8RB#7	21.88	22.00
Band4	3MHz	16QAM	19965	8RB#7	21.15	22.00
Band4	3MHz	QPSK	19965	15RB#0	21.86	22.00
Band4	3MHz	16QAM	19965	15RB#0	21.14	22.00
Band4	3MHz	QPSK	20175	1RB#0	23.24	24.00
Band4	3MHz	16QAM	20175	1RB#0	21.86	22.00
Band4	3MHz	QPSK	20175	1RB#8	23.23	24.00
Band4	3MHz	16QAM	20175	1RB#8	22.35	23.00
Band4	3MHz	QPSK	20175	1RB#14	23.39	24.00
Band4	3MHz	16QAM	20175	1RB#14	22.39	23.00
Band4	3MHz	QPSK	20175	8RB#0	22.41	23.00
Band4	3MHz	16QAM	20175	8RB#0	21.75	22.00
Band4	3MHz	QPSK	20175	8RB#4	22.40	23.00
Band4	3MHz	16QAM	20175	8RB#4	21.74	22.00
Band4	3MHz	QPSK	20175	8RB#7	22.45	23.00
Band4	3MHz	16QAM	20175	8RB#7	21.78	22.00
Band4	3MHz	QPSK	20175	15RB#0	22.46	23.00
Band4	3MHz	16QAM	20175	15RB#0	21.47	22.00
Band4	3MHz	QPSK	20385	1RB#0	22.73	23.00
Band4	3MHz	16QAM	20385	1RB#0	22.02	23.00
Band4	3MHz	QPSK	20385	1RB#8	22.71	23.00
Band4	3MHz	16QAM	20385	1RB#8	22.02	23.00
Band4	3MHz	QPSK	20385	1RB#14	22.64	23.00
Band4	3MHz	16QAM	20385	1RB#14	22.01	23.00
Band4	3MHz	QPSK	20385	8RB#0	21.86	22.00
Band4	3MHz	16QAM	20385	8RB#0	21.24	22.00
Band4	3MHz	QPSK	20385	8RB#4	21.89	22.00
Band4	3MHz	16QAM	20385	8RB#4	21.25	22.00
Band4	3MHz	QPSK	20385	8RB#7	21.93	22.00
Band4	3MHz	16QAM	20385	8RB#7	21.18	22.00
Band4	3MHz	QPSK	20385	15RB#0	21.95	22.00

Band4	3MHz	16QAM	20385	15RB#0	21.10	22.00
Band4	5MHz	QPSK	19975	1RB#0	22.76	23.00
Band4	5MHz	16QAM	19975	1RB#0	21.53	22.00
Band4	5MHz	QPSK	19975	1RB#12	22.74	23.00
Band4	5MHz	16QAM	19975	1RB#12	21.47	22.00
Band4	5MHz	QPSK	19975	1RB#24	22.72	23.00
Band4	5MHz	16QAM	19975	1RB#24	21.42	22.00
Band4	5MHz	QPSK	19975	12RB#0	21.99	22.00
Band4	5MHz	16QAM	19975	12RB#0	21.16	22.00
Band4	5MHz	QPSK	19975	12RB#6	22.01	23.00
Band4	5MHz	16QAM	19975	12RB#6	21.16	22.00
Band4	5MHz	QPSK	19975	12RB#13	21.98	22.00
Band4	5MHz	16QAM	19975	12RB#13	21.09	22.00
Band4	5MHz	QPSK	19975	25RB#0	21.96	22.00
Band4	5MHz	16QAM	19975	25RB#0	21.23	22.00
Band4	5MHz	QPSK	20175	1RB#0	23.12	24.00
Band4	5MHz	16QAM	20175	1RB#0	22.63	23.00
Band4	5MHz	QPSK	20175	1RB#12	23.15	24.00
Band4	5MHz	16QAM	20175	1RB#12	22.69	23.00
Band4	5MHz	QPSK	20175	1RB#24	23.34	24.00
Band4	5MHz	16QAM	20175	1RB#24	22.37	23.00
Band4	5MHz	QPSK	20175	12RB#0	22.52	23.00
Band4	5MHz	16QAM	20175	12RB#0	21.66	22.00
Band4	5MHz	QPSK	20175	12RB#6	22.50	23.00
Band4	5MHz	16QAM	20175	12RB#6	21.68	22.00
Band4	5MHz	QPSK	20175	12RB#13	22.45	23.00
Band4	5MHz	16QAM	20175	12RB#13	21.78	22.00
Band4	5MHz	QPSK	20175	25RB#0	22.54	23.00
Band4	5MHz	16QAM	20175	25RB#0	21.66	22.00
Band4	5MHz	QPSK	20375	1RB#0	22.85	23.00
Band4	5MHz	16QAM	20375	1RB#0	21.65	22.00
Band4	5MHz	QPSK	20375	1RB#12	22.81	23.00
Band4	5MHz	16QAM	20375	1RB#12	21.57	22.00
Band4	5MHz	QPSK	20375	1RB#24	22.78	23.00
Band4	5MHz	16QAM	20375	1RB#24	21.53	22.00
Band4	5MHz	QPSK	20375	12RB#0	21.99	22.00
Band4	5MHz	16QAM	20375	12RB#0	21.13	22.00
Band4	5MHz	QPSK	20375	12RB#6	22.09	23.00
Band4	5MHz	16QAM	20375	12RB#6	21.14	22.00
Band4	5MHz	QPSK	20375	12RB#13	22.01	23.00
Band4	5MHz	16QAM	20375	12RB#13	21.14	22.00
Band4	5MHz	QPSK	20375	25RB#0	22.07	23.00
Band4	5MHz	16QAM	20375	25RB#0	21.09	22.00

Band4	10MHz	QPSK	20000	1RB#0	22.68	23.00
Band4	10MHz	16QAM	20000	1RB#0	21.95	22.00
Band4	10MHz	QPSK	20000	1RB#24	22.60	23.00
Band4	10MHz	16QAM	20000	1RB#24	21.88	22.00
Band4	10MHz	QPSK	20000	1RB#49	22.64	23.00
Band4	10MHz	16QAM	20000	1RB#49	21.94	22.00
Band4	10MHz	QPSK	20000	25RB#0	21.92	22.00
Band4	10MHz	16QAM	20000	25RB#0	21.10	22.00
Band4	10MHz	QPSK	20000	25RB#12	21.86	22.00
Band4	10MHz	16QAM	20000	25RB#12	21.04	22.00
Band4	10MHz	QPSK	20000	25RB#25	21.88	22.00
Band4	10MHz	16QAM	20000	25RB#25	21.03	22.00
Band4	10MHz	QPSK	20000	50RB#0	21.95	22.00
Band4	10MHz	16QAM	20000	50RB#0	21.16	22.00
Band4	10MHz	QPSK	20175	1RB#0	23.14	24.00
Band4	10MHz	16QAM	20175	1RB#0	22.27	23.00
Band4	10MHz	QPSK	20175	1RB#24	23.24	24.00
Band4	10MHz	16QAM	20175	1RB#24	22.39	23.00
Band4	10MHz	QPSK	20175	1RB#49	23.28	24.00
Band4	10MHz	16QAM	20175	1RB#49	22.34	23.00
Band4	10MHz	QPSK	20175	25RB#0	22.46	23.00
Band4	10MHz	16QAM	20175	25RB#0	21.73	22.00
Band4	10MHz	QPSK	20175	25RB#12	22.44	23.00
Band4	10MHz	16QAM	20175	25RB#12	21.71	22.00
Band4	10MHz	QPSK	20175	25RB#25	22.45	23.00
Band4	10MHz	16QAM	20175	25RB#25	21.77	22.00
Band4	10MHz	QPSK	20175	50RB#0	22.46	23.00
Band4	10MHz	16QAM	20175	50RB#0	21.66	22.00
Band4	10MHz	QPSK	20350	1RB#0	22.85	23.00
Band4	10MHz	16QAM	20350	1RB#0	22.74	23.00
Band4	10MHz	QPSK	20350	1RB#24	22.68	23.00
Band4	10MHz	16QAM	20350	1RB#24	22.54	23.00
Band4	10MHz	QPSK	20350	1RB#49	22.66	23.00
Band4	10MHz	16QAM	20350	1RB#49	22.41	23.00
Band4	10MHz	QPSK	20350	25RB#0	22.10	23.00
Band4	10MHz	16QAM	20350	25RB#0	21.36	22.00
Band4	10MHz	QPSK	20350	25RB#12	22.12	23.00
Band4	10MHz	16QAM	20350	25RB#12	21.38	22.00
Band4	10MHz	QPSK	20350	25RB#25	21.97	22.00
Band4	10MHz	16QAM	20350	25RB#25	21.20	22.00
Band4	10MHz	QPSK	20350	50RB#0	22.08	23.00
Band4	10MHz	16QAM	20350	50RB#0	21.27	22.00
Band4	15MHz	QPSK	20025	1RB#0	22.72	23.00

Band4	15MHz	16QAM	20025	1RB#0	21.98	22.00
Band4	15MHz	QPSK	20025	1RB#38	22.66	23.00
Band4	15MHz	16QAM	20025	1RB#38	21.89	22.00
Band4	15MHz	QPSK	20025	1RB#74	22.43	23.00
Band4	15MHz	16QAM	20025	1RB#74	22.11	23.00
Band4	15MHz	QPSK	20025	38RB#0	21.96	22.00
Band4	15MHz	16QAM	20025	38RB#0	21.96	22.00
Band4	15MHz	QPSK	20025	38RB#18	21.96	22.00
Band4	15MHz	16QAM	20025	38RB#18	21.95	22.00
Band4	15MHz	QPSK	20025	38RB#37	21.94	22.00
Band4	15MHz	16QAM	20025	38RB#37	22.02	23.00
Band4	15MHz	QPSK	20025	75RB#0	22.01	23.00
Band4	15MHz	16QAM	20025	75RB#0	21.14	22.00
Band4	15MHz	QPSK	20175	1RB#0	22.59	23.00
Band4	15MHz	16QAM	20175	1RB#0	22.14	23.00
Band4	15MHz	QPSK	20175	1RB#38	22.86	23.00
Band4	15MHz	16QAM	20175	1RB#38	22.26	23.00
Band4	15MHz	QPSK	20175	1RB#74	22.78	23.00
Band4	15MHz	16QAM	20175	1RB#74	22.28	23.00
Band4	15MHz	QPSK	20175	38RB#0	22.39	23.00
Band4	15MHz	16QAM	20175	38RB#0	22.37	23.00
Band4	15MHz	QPSK	20175	38RB#18	22.37	23.00
Band4	15MHz	16QAM	20175	38RB#18	22.37	23.00
Band4	15MHz	QPSK	20175	38RB#37	22.36	23.00
Band4	15MHz	16QAM	20175	38RB#37	22.36	23.00
Band4	15MHz	QPSK	20175	75RB#0	22.36	23.00
Band4	15MHz	16QAM	20175	75RB#0	21.68	22.00
Band4	15MHz	QPSK	20325	1RB#0	23.04	24.00
Band4	15MHz	16QAM	20325	1RB#0	22.68	23.00
Band4	15MHz	QPSK	20325	1RB#38	22.84	23.00
Band4	15MHz	16QAM	20325	1RB#38	22.43	23.00
Band4	15MHz	QPSK	20325	1RB#74	22.67	23.00
Band4	15MHz	16QAM	20325	1RB#74	22.18	23.00
Band4	15MHz	QPSK	20325	38RB#0	22.09	23.00
Band4	15MHz	16QAM	20325	38RB#0	22.09	23.00
Band4	15MHz	QPSK	20325	38RB#18	22.09	23.00
Band4	15MHz	16QAM	20325	38RB#18	22.10	23.00
Band4	15MHz	QPSK	20325	38RB#37	22.10	23.00
Band4	15MHz	16QAM	20325	38RB#37	22.11	23.00
Band4	15MHz	QPSK	20325	75RB#0	22.11	23.00
Band4	15MHz	16QAM	20325	75RB#0	21.34	22.00
Band4	20MHz	QPSK	20050	1RB#0	22.73	23.00
Band4	20MHz	16QAM	20050	1RB#0	21.82	22.00

Band4	20MHz	QPSK	20050	1RB#49	22.57	23.00
Band4	20MHz	16QAM	20050	1RB#49	21.71	22.00
Band4	20MHz	QPSK	20050	1RB#99	23.04	24.00
Band4	20MHz	16QAM	20050	1RB#99	22.10	23.00
Band4	20MHz	QPSK	20050	50RB#0	21.90	22.00
Band4	20MHz	16QAM	20050	50RB#0	21.21	22.00
Band4	20MHz	QPSK	20050	50RB#25	21.93	22.00
Band4	20MHz	16QAM	20050	50RB#25	21.21	22.00
Band4	20MHz	QPSK	20050	50RB#50	22.11	23.00
Band4	20MHz	16QAM	20050	50RB#50	21.46	22.00
Band4	20MHz	QPSK	20050	100RB#0	21.98	22.00
Band4	20MHz	16QAM	20050	100RB#0	21.30	22.00
Band4	20MHz	QPSK	20175	1RB#0	22.51	23.00
Band4	20MHz	16QAM	20175	1RB#0	22.47	23.00
Band4	20MHz	QPSK	20175	1RB#49	23.33	24.00
Band4	20MHz	16QAM	20175	1RB#49	23.01	24.00
Band4	20MHz	QPSK	20175	1RB#99	23.19	24.00
Band4	20MHz	16QAM	20175	1RB#99	22.80	23.00
Band4	20MHz	QPSK	20175	50RB#0	22.42	23.00
Band4	20MHz	16QAM	20175	50RB#0	21.58	22.00
Band4	20MHz	QPSK	20175	50RB#25	22.37	23.00
Band4	20MHz	16QAM	20175	50RB#25	21.57	22.00
Band4	20MHz	QPSK	20175	50RB#50	22.41	23.00
Band4	20MHz	16QAM	20175	50RB#50	21.72	22.00
Band4	20MHz	QPSK	20175	100RB#0	22.46	23.00
Band4	20MHz	16QAM	20175	100RB#0	21.75	22.00
Band4	20MHz	QPSK	20300	1RB#0	23.35	24.00
Band4	20MHz	16QAM	20300	1RB#0	22.13	23.00
Band4	20MHz	QPSK	20300	1RB#49	23.09	24.00
Band4	20MHz	16QAM	20300	1RB#49	21.91	22.00
Band4	20MHz	QPSK	20300	1RB#99	22.91	23.00
Band4	20MHz	16QAM	20300	1RB#99	21.53	22.00
Band4	20MHz	QPSK	20300	50RB#0	22.39	23.00
Band4	20MHz	16QAM	20300	50RB#0	21.75	22.00
Band4	20MHz	QPSK	20300	50RB#25	22.45	23.00
Band4	20MHz	16QAM	20300	50RB#25	21.75	22.00
Band4	20MHz	QPSK	20300	50RB#50	22.09	23.00
Band4	20MHz	16QAM	20300	50RB#50	21.43	22.00
Band4	20MHz	QPSK	20300	100RB#0	22.24	23.00
Band4	20MHz	16QAM	20300	100RB#0	21.49	22.00

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune-up limit (dBm)
Band5	1.4MHz	QPSK	20407	1RB#0	23.60	24.00
Band5	1.4MHz	16QAM	20407	1RB#0	23.48	24.00
Band5	1.4MHz	QPSK	20407	1RB#2	23.54	24.00
Band5	1.4MHz	16QAM	20407	1RB#2	23.45	24.00
Band5	1.4MHz	QPSK	20407	1RB#5	23.56	24.00
Band5	1.4MHz	16QAM	20407	1RB#5	23.78	24.00
Band5	1.4MHz	QPSK	20407	3RB#0	23.61	24.00
Band5	1.4MHz	16QAM	20407	3RB#0	22.99	23.00
Band5	1.4MHz	QPSK	20407	3RB#1	23.60	24.00
Band5	1.4MHz	16QAM	20407	3RB#1	22.98	23.00
Band5	1.4MHz	QPSK	20407	3RB#3	23.54	24.00
Band5	1.4MHz	16QAM	20407	3RB#3	22.46	23.00
Band5	1.4MHz	QPSK	20407	6RB#0	22.89	23.00
Band5	1.4MHz	16QAM	20407	6RB#0	22.70	23.00
Band5	1.4MHz	QPSK	20525	1RB#0	23.76	24.00
Band5	1.4MHz	16QAM	20525	1RB#0	22.49	23.00
Band5	1.4MHz	QPSK	20525	1RB#2	23.84	24.00
Band5	1.4MHz	16QAM	20525	1RB#2	22.56	23.00
Band5	1.4MHz	QPSK	20525	1RB#5	23.92	24.00
Band5	1.4MHz	16QAM	20525	1RB#5	23.42	24.00
Band5	1.4MHz	QPSK	20525	3RB#0	23.88	24.00
Band5	1.4MHz	16QAM	20525	3RB#0	23.28	24.00
Band5	1.4MHz	QPSK	20525	3RB#1	23.88	24.00
Band5	1.4MHz	16QAM	20525	3RB#1	23.31	24.00
Band5	1.4MHz	QPSK	20525	3RB#3	23.72	24.00
Band5	1.4MHz	16QAM	20525	3RB#3	23.11	24.00
Band5	1.4MHz	QPSK	20525	6RB#0	22.98	23.00
Band5	1.4MHz	16QAM	20525	6RB#0	22.47	23.00
Band5	1.4MHz	QPSK	20643	1RB#0	23.38	24.00
Band5	1.4MHz	16QAM	20643	1RB#0	23.56	24.00
Band5	1.4MHz	QPSK	20643	1RB#2	23.05	24.00
Band5	1.4MHz	16QAM	20643	1RB#2	22.76	23.00
Band5	1.4MHz	QPSK	20643	1RB#5	21.94	22.00
Band5	1.4MHz	16QAM	20643	1RB#5	21.83	22.00
Band5	1.4MHz	QPSK	20643	3RB#0	23.41	24.00
Band5	1.4MHz	16QAM	20643	3RB#0	22.71	23.00
Band5	1.4MHz	QPSK	20643	3RB#1	23.41	24.00
Band5	1.4MHz	16QAM	20643	3RB#1	22.72	23.00
Band5	1.4MHz	QPSK	20643	3RB#3	22.46	23.00
Band5	1.4MHz	16QAM	20643	3RB#3	22.24	23.00
Band5	1.4MHz	QPSK	20643	6RB#0	22.75	23.00

Band5	1.4MHz	16QAM	20643	6RB#0	22.31	23.00
Band5	3MHz	QPSK	20415	1RB#0	23.38	24.00
Band5	3MHz	16QAM	20415	1RB#0	22.76	23.00
Band5	3MHz	QPSK	20415	1RB#8	23.42	24.00
Band5	3MHz	16QAM	20415	1RB#8	22.81	23.00
Band5	3MHz	QPSK	20415	1RB#14	23.42	24.00
Band5	3MHz	16QAM	20415	1RB#14	22.85	23.00
Band5	3MHz	QPSK	20415	8RB#0	22.60	23.00
Band5	3MHz	16QAM	20415	8RB#0	22.16	23.00
Band5	3MHz	QPSK	20415	8RB#4	22.68	23.00
Band5	3MHz	16QAM	20415	8RB#4	22.19	23.00
Band5	3MHz	QPSK	20415	8RB#7	22.58	23.00
Band5	3MHz	16QAM	20415	8RB#7	22.15	23.00
Band5	3MHz	QPSK	20415	15RB#0	22.54	23.00
Band5	3MHz	16QAM	20415	15RB#0	21.91	22.00
Band5	3MHz	QPSK	20525	1RB#0	23.74	24.00
Band5	3MHz	16QAM	20525	1RB#0	22.31	23.00
Band5	3MHz	QPSK	20525	1RB#8	23.69	24.00
Band5	3MHz	16QAM	20525	1RB#8	23.14	24.00
Band5	3MHz	QPSK	20525	1RB#14	23.82	24.00
Band5	3MHz	16QAM	20525	1RB#14	23.23	24.00
Band5	3MHz	QPSK	20525	8RB#0	22.69	23.00
Band5	3MHz	16QAM	20525	8RB#0	22.36	23.00
Band5	3MHz	QPSK	20525	8RB#4	22.72	23.00
Band5	3MHz	16QAM	20525	8RB#4	22.37	23.00
Band5	3MHz	QPSK	20525	8RB#7	22.84	23.00
Band5	3MHz	16QAM	20525	8RB#7	22.44	23.00
Band5	3MHz	QPSK	20525	15RB#0	22.76	23.00
Band5	3MHz	16QAM	20525	15RB#0	22.04	23.00
Band5	3MHz	QPSK	20635	1RB#0	23.44	24.00
Band5	3MHz	16QAM	20635	1RB#0	23.61	24.00
Band5	3MHz	QPSK	20635	1RB#8	23.33	24.00
Band5	3MHz	16QAM	20635	1RB#8	23.47	24.00
Band5	3MHz	QPSK	20635	1RB#14	21.93	22.00
Band5	3MHz	16QAM	20635	1RB#14	21.78	22.00
Band5	3MHz	QPSK	20635	8RB#0	22.87	23.00
Band5	3MHz	16QAM	20635	8RB#0	22.22	23.00
Band5	3MHz	QPSK	20635	8RB#4	22.78	23.00
Band5	3MHz	16QAM	20635	8RB#4	22.22	23.00
Band5	3MHz	QPSK	20635	8RB#7	22.60	23.00
Band5	3MHz	16QAM	20635	8RB#7	22.16	23.00
Band5	3MHz	QPSK	20635	15RB#0	22.66	23.00
Band5	3MHz	16QAM	20635	15RB#0	22.06	23.00

Band5	5MHz	QPSK	20425	1RB#0	23.38	24.00
Band5	5MHz	16QAM	20425	1RB#0	22.32	23.00
Band5	5MHz	QPSK	20425	1RB#12	23.55	24.00
Band5	5MHz	16QAM	20425	1RB#12	22.32	23.00
Band5	5MHz	QPSK	20425	1RB#24	23.69	24.00
Band5	5MHz	16QAM	20425	1RB#24	22.41	23.00
Band5	5MHz	QPSK	20425	12RB#0	22.57	23.00
Band5	5MHz	16QAM	20425	12RB#0	22.03	23.00
Band5	5MHz	QPSK	20425	12RB#6	22.57	23.00
Band5	5MHz	16QAM	20425	12RB#6	22.03	23.00
Band5	5MHz	QPSK	20425	12RB#13	22.46	23.00
Band5	5MHz	16QAM	20425	12RB#13	22.00	23.00
Band5	5MHz	QPSK	20425	25RB#0	22.54	23.00
Band5	5MHz	16QAM	20425	25RB#0	22.17	23.00
Band5	5MHz	QPSK	20525	1RB#0	23.37	24.00
Band5	5MHz	16QAM	20525	1RB#0	23.41	24.00
Band5	5MHz	QPSK	20525	1RB#12	23.53	24.00
Band5	5MHz	16QAM	20525	1RB#12	23.44	24.00
Band5	5MHz	QPSK	20525	1RB#24	24.00	25.00
Band5	5MHz	16QAM	20525	1RB#24	23.21	24.00
Band5	5MHz	QPSK	20525	12RB#0	22.77	23.00
Band5	5MHz	16QAM	20525	12RB#0	22.14	23.00
Band5	5MHz	QPSK	20525	12RB#6	22.75	23.00
Band5	5MHz	16QAM	20525	12RB#6	22.15	23.00
Band5	5MHz	QPSK	20525	12RB#13	22.75	23.00
Band5	5MHz	16QAM	20525	12RB#13	22.44	23.00
Band5	5MHz	QPSK	20525	25RB#0	22.80	23.00
Band5	5MHz	16QAM	20525	25RB#0	22.06	23.00
Band5	5MHz	QPSK	20625	1RB#0	23.64	24.00
Band5	5MHz	16QAM	20625	1RB#0	23.07	24.00
Band5	5MHz	QPSK	20625	1RB#12	23.46	24.00
Band5	5MHz	16QAM	20625	1RB#12	22.95	23.00
Band5	5MHz	QPSK	20625	1RB#24	22.42	23.00
Band5	5MHz	16QAM	20625	1RB#24	22.08	23.00
Band5	5MHz	QPSK	20625	12RB#0	22.91	23.00
Band5	5MHz	16QAM	20625	12RB#0	22.34	23.00
Band5	5MHz	QPSK	20625	12RB#6	22.91	23.00
Band5	5MHz	16QAM	20625	12RB#6	22.37	23.00
Band5	5MHz	QPSK	20625	12RB#13	22.79	23.00
Band5	5MHz	16QAM	20625	12RB#13	22.20	23.00
Band5	5MHz	QPSK	20625	25RB#0	22.98	23.00
Band5	5MHz	16QAM	20625	25RB#0	22.33	23.00
Band5	10MHz	QPSK	20450	1RB#0	23.39	24.00

Band5	10MHz	16QAM	20450	1RB#0	22.93	23.00
Band5	10MHz	QPSK	20450	1RB#24	23.52	24.00
Band5	10MHz	16QAM	20450	1RB#24	22.96	23.00
Band5	10MHz	QPSK	20450	1RB#49	23.48	24.00
Band5	10MHz	16QAM	20450	1RB#49	23.12	24.00
Band5	10MHz	QPSK	20450	25RB#0	22.60	23.00
Band5	10MHz	16QAM	20450	25RB#0	21.94	22.00
Band5	10MHz	QPSK	20450	25RB#12	22.52	23.00
Band5	10MHz	16QAM	20450	25RB#12	21.93	22.00
Band5	10MHz	QPSK	20450	25RB#25	22.59	23.00
Band5	10MHz	16QAM	20450	25RB#25	22.02	23.00
Band5	10MHz	QPSK	20450	50RB#0	22.54	23.00
Band5	10MHz	16QAM	20450	50RB#0	22.03	23.00
Band5	10MHz	QPSK	20525	1RB#0	23.58	24.00
Band5	10MHz	16QAM	20525	1RB#0	23.12	24.00
Band5	10MHz	QPSK	20525	1RB#24	23.69	24.00
Band5	10MHz	16QAM	20525	1RB#24	23.29	24.00
Band5	10MHz	QPSK	20525	1RB#49	23.76	24.00
Band5	10MHz	16QAM	20525	1RB#49	23.29	24.00
Band5	10MHz	QPSK	20525	25RB#0	22.75	23.00
Band5	10MHz	16QAM	20525	25RB#0	22.28	23.00
Band5	10MHz	QPSK	20525	25RB#12	22.62	23.00
Band5	10MHz	16QAM	20525	25RB#12	22.29	23.00
Band5	10MHz	QPSK	20525	25RB#25	22.77	23.00
Band5	10MHz	16QAM	20525	25RB#25	22.42	23.00
Band5	10MHz	QPSK	20525	50RB#0	22.89	23.00
Band5	10MHz	16QAM	20525	50RB#0	22.39	23.00
Band5	10MHz	QPSK	20600	1RB#0	23.75	24.00
Band5	10MHz	16QAM	20600	1RB#0	23.78	24.00
Band5	10MHz	QPSK	20600	1RB#24	23.67	24.00
Band5	10MHz	16QAM	20600	1RB#24	23.64	24.00
Band5	10MHz	QPSK	20600	1RB#49	23.02	24.00
Band5	10MHz	16QAM	20600	1RB#49	22.74	23.00
Band5	10MHz	QPSK	20600	25RB#0	22.78	23.00
Band5	10MHz	16QAM	20600	25RB#0	22.40	23.00
Band5	10MHz	QPSK	20600	25RB#12	22.87	23.00
Band5	10MHz	16QAM	20600	25RB#12	22.26	23.00
Band5	10MHz	QPSK	20600	25RB#25	22.84	23.00
Band5	10MHz	16QAM	20600	25RB#25	22.56	23.00
Band5	10MHz	QPSK	20600	50RB#0	22.89	23.00
Band5	10MHz	16QAM	20600	50RB#0	22.39	23.00

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune-up limit (dBm)
Band7	5MHz	QPSK	20775	1RB#0	20.21	21.00
Band7	5MHz	16QAM	20775	1RB#0	20.06	21.00
Band7	5MHz	QPSK	20775	1RB#12	20.52	21.00
Band7	5MHz	16QAM	20775	1RB#12	20.15	21.00
Band7	5MHz	QPSK	20775	1RB#24	20.16	21.00
Band7	5MHz	16QAM	20775	1RB#24	20.20	21.00
Band7	5MHz	QPSK	20775	12RB#0	20.28	21.00
Band7	5MHz	16QAM	20775	12RB#0	19.56	20.00
Band7	5MHz	QPSK	20775	12RB#6	20.28	21.00
Band7	5MHz	16QAM	20775	12RB#6	19.57	20.00
Band7	5MHz	QPSK	20775	12RB#13	20.32	21.00
Band7	5MHz	16QAM	20775	12RB#13	19.66	20.00
Band7	5MHz	QPSK	20775	25RB#0	20.28	21.00
Band7	5MHz	16QAM	20775	25RB#0	19.56	20.00
Band7	5MHz	QPSK	21100	1RB#0	21.22	22.00
Band7	5MHz	16QAM	21100	1RB#0	19.95	20.00
Band7	5MHz	QPSK	21100	1RB#12	21.07	22.00
Band7	5MHz	16QAM	21100	1RB#12	19.84	20.00
Band7	5MHz	QPSK	21100	1RB#24	21.07	22.00
Band7	5MHz	16QAM	21100	1RB#24	19.78	20.00
Band7	5MHz	QPSK	21100	12RB#0	20.26	21.00
Band7	5MHz	16QAM	21100	12RB#0	19.34	20.00
Band7	5MHz	QPSK	21100	12RB#6	20.28	21.00
Band7	5MHz	16QAM	21100	12RB#6	19.51	20.00
Band7	5MHz	QPSK	21100	12RB#13	20.11	21.00
Band7	5MHz	16QAM	21100	12RB#13	19.36	20.00
Band7	5MHz	QPSK	21100	25RB#0	20.36	21.00
Band7	5MHz	16QAM	21100	25RB#0	19.46	20.00
Band7	5MHz	QPSK	21425	1RB#0	20.77	21.00
Band7	5MHz	16QAM	21425	1RB#0	20.57	21.00
Band7	5MHz	QPSK	21425	1RB#12	21.16	22.00
Band7	5MHz	16QAM	21425	1RB#12	21.06	22.00
Band7	5MHz	QPSK	21425	1RB#24	20.85	21.00
Band7	5MHz	16QAM	21425	1RB#24	20.77	21.00
Band7	5MHz	QPSK	21425	12RB#0	20.87	21.00
Band7	5MHz	16QAM	21425	12RB#0	20.84	21.00
Band7	5MHz	QPSK	21425	12RB#6	20.85	21.00
Band7	5MHz	16QAM	21425	12RB#6	20.82	21.00
Band7	5MHz	QPSK	21425	12RB#13	21.00	22.00
Band7	5MHz	16QAM	21425	12RB#13	20.81	21.00
Band7	5MHz	QPSK	21425	25RB#0	20.93	21.00

Band7	5MHz	16QAM	21425	25RB#0	20.92	21.00
Band7	10MHz	QPSK	20800	1RB#0	20.00	21.00
Band7	10MHz	16QAM	20800	1RB#0	19.97	20.00
Band7	10MHz	QPSK	20800	1RB#24	20.30	21.00
Band7	10MHz	16QAM	20800	1RB#24	20.30	21.00
Band7	10MHz	QPSK	20800	1RB#49	20.90	21.00
Band7	10MHz	16QAM	20800	1RB#49	20.91	21.00
Band7	10MHz	QPSK	20800	25RB#0	20.14	21.00
Band7	10MHz	16QAM	20800	25RB#0	20.12	21.00
Band7	10MHz	QPSK	20800	25RB#12	20.15	21.00
Band7	10MHz	16QAM	20800	25RB#12	20.12	21.00
Band7	10MHz	QPSK	20800	25RB#25	20.69	21.00
Band7	10MHz	16QAM	20800	25RB#25	20.55	21.00
Band7	10MHz	QPSK	20800	50RB#0	20.41	21.00
Band7	10MHz	16QAM	20800	50RB#0	20.42	21.00
Band7	10MHz	QPSK	21100	1RB#0	21.90	22.00
Band7	10MHz	16QAM	21100	1RB#0	21.29	22.00
Band7	10MHz	QPSK	21100	1RB#24	21.95	22.00
Band7	10MHz	16QAM	21100	1RB#24	21.15	22.00
Band7	10MHz	QPSK	21100	1RB#49	21.56	22.00
Band7	10MHz	16QAM	21100	1RB#49	20.99	21.00
Band7	10MHz	QPSK	21100	25RB#0	21.30	22.00
Band7	10MHz	16QAM	21100	25RB#0	20.54	21.00
Band7	10MHz	QPSK	21100	25RB#12	21.24	22.00
Band7	10MHz	16QAM	21100	25RB#12	20.50	21.00
Band7	10MHz	QPSK	21100	25RB#25	21.08	22.00
Band7	10MHz	16QAM	21100	25RB#25	20.36	21.00
Band7	10MHz	QPSK	21100	50RB#0	21.17	22.00
Band7	10MHz	16QAM	21100	50RB#0	20.31	21.00
Band7	10MHz	QPSK	21400	1RB#0	20.89	21.00
Band7	10MHz	16QAM	21400	1RB#0	20.79	21.00
Band7	10MHz	QPSK	21400	1RB#24	20.83	21.00
Band7	10MHz	16QAM	21400	1RB#24	20.84	21.00
Band7	10MHz	QPSK	21400	1RB#49	21.24	22.00
Band7	10MHz	16QAM	21400	1RB#49	21.24	22.00
Band7	10MHz	QPSK	21400	25RB#0	20.85	21.00
Band7	10MHz	16QAM	21400	25RB#0	20.81	21.00
Band7	10MHz	QPSK	21400	25RB#12	20.84	21.00
Band7	10MHz	16QAM	21400	25RB#12	20.81	21.00
Band7	10MHz	QPSK	21400	25RB#25	21.14	22.00
Band7	10MHz	16QAM	21400	25RB#25	20.90	21.00
Band7	10MHz	QPSK	21400	50RB#0	20.98	21.00
Band7	10MHz	16QAM	21400	50RB#0	20.86	21.00

Band7	15MHz	QPSK	20825	1RB#0	19.99	20.00
Band7	15MHz	16QAM	20825	1RB#0	19.96	20.00
Band7	15MHz	QPSK	20825	1RB#38	20.50	21.00
Band7	15MHz	16QAM	20825	1RB#38	20.50	21.00
Band7	15MHz	QPSK	20825	1RB#74	20.95	21.00
Band7	15MHz	16QAM	20825	1RB#74	20.98	21.00
Band7	15MHz	QPSK	20825	38RB#0	20.55	21.00
Band7	15MHz	16QAM	20825	38RB#0	20.54	21.00
Band7	15MHz	QPSK	20825	38RB#18	20.54	21.00
Band7	15MHz	16QAM	20825	38RB#18	20.53	21.00
Band7	15MHz	QPSK	20825	38RB#37	20.53	21.00
Band7	15MHz	16QAM	20825	38RB#37	20.53	21.00
Band7	15MHz	QPSK	20825	75RB#0	20.53	21.00
Band7	15MHz	16QAM	20825	75RB#0	20.50	21.00
Band7	15MHz	QPSK	21100	1RB#0	21.79	22.00
Band7	15MHz	16QAM	21100	1RB#0	21.64	22.00
Band7	15MHz	QPSK	21100	1RB#38	21.74	22.00
Band7	15MHz	16QAM	21100	1RB#38	21.30	22.00
Band7	15MHz	QPSK	21100	1RB#74	20.82	21.00
Band7	15MHz	16QAM	21100	1RB#74	20.94	21.00
Band7	15MHz	QPSK	21100	38RB#0	21.24	22.00
Band7	15MHz	16QAM	21100	38RB#0	21.24	22.00
Band7	15MHz	QPSK	21100	38RB#18	21.25	22.00
Band7	15MHz	16QAM	21100	38RB#18	21.25	22.00
Band7	15MHz	QPSK	21100	38RB#37	21.25	22.00
Band7	15MHz	16QAM	21100	38RB#37	21.25	22.00
Band7	15MHz	QPSK	21100	75RB#0	21.25	22.00
Band7	15MHz	16QAM	21100	75RB#0	20.43	21.00
Band7	15MHz	QPSK	21375	1RB#0	20.90	21.00
Band7	15MHz	16QAM	21375	1RB#0	20.60	21.00
Band7	15MHz	QPSK	21375	1RB#38	20.78	21.00
Band7	15MHz	16QAM	21375	1RB#38	20.57	21.00
Band7	15MHz	QPSK	21375	1RB#74	20.88	21.00
Band7	15MHz	16QAM	21375	1RB#74	20.67	21.00
Band7	15MHz	QPSK	21375	38RB#0	20.88	21.00
Band7	15MHz	16QAM	21375	38RB#0	20.87	21.00
Band7	15MHz	QPSK	21375	38RB#18	20.87	21.00
Band7	15MHz	16QAM	21375	38RB#18	20.86	21.00
Band7	15MHz	QPSK	21375	38RB#37	20.86	21.00
Band7	15MHz	16QAM	21375	38RB#37	20.86	21.00
Band7	15MHz	QPSK	21375	75RB#0	20.86	21.00
Band7	15MHz	16QAM	21375	75RB#0	20.87	21.00
Band7	20MHz	QPSK	20850	1RB#0	20.08	21.00

Band7	20MHz	16QAM	20850	1RB#0	19.92	20.00
Band7	20MHz	QPSK	20850	1RB#49	20.79	21.00
Band7	20MHz	16QAM	20850	1RB#49	20.66	21.00
Band7	20MHz	QPSK	20850	1RB#99	21.66	22.00
Band7	20MHz	16QAM	20850	1RB#99	21.26	22.00
Band7	20MHz	QPSK	20850	50RB#0	20.21	21.00
Band7	20MHz	16QAM	20850	50RB#0	20.22	21.00
Band7	20MHz	QPSK	20850	50RB#25	20.21	21.00
Band7	20MHz	16QAM	20850	50RB#25	20.22	21.00
Band7	20MHz	QPSK	20850	50RB#50	21.24	22.00
Band7	20MHz	16QAM	20850	50RB#50	20.87	21.00
Band7	20MHz	QPSK	20850	100RB#0	20.75	21.00
Band7	20MHz	16QAM	20850	100RB#0	20.65	21.00
Band7	20MHz	QPSK	21100	1RB#0	21.82	22.00
Band7	20MHz	16QAM	21100	1RB#0	21.84	22.00
Band7	20MHz	QPSK	21100	1RB#49	21.79	22.00
Band7	20MHz	16QAM	21100	1RB#49	21.61	22.00
Band7	20MHz	QPSK	21100	1RB#99	21.19	22.00
Band7	20MHz	16QAM	21100	1RB#99	21.26	22.00
Band7	20MHz	QPSK	21100	50RB#0	21.45	22.00
Band7	20MHz	16QAM	21100	50RB#0	20.53	21.00
Band7	20MHz	QPSK	21100	50RB#25	21.38	22.00
Band7	20MHz	16QAM	21100	50RB#25	20.54	21.00
Band7	20MHz	QPSK	21100	50RB#50	21.01	22.00
Band7	20MHz	16QAM	21100	50RB#50	20.19	21.00
Band7	20MHz	QPSK	21100	100RB#0	21.20	22.00
Band7	20MHz	16QAM	21100	100RB#0	20.51	21.00
Band7	20MHz	QPSK	21350	1RB#0	20.80	21.00
Band7	20MHz	16QAM	21350	1RB#0	20.58	21.00
Band7	20MHz	QPSK	21350	1RB#49	20.82	21.00
Band7	20MHz	16QAM	21350	1RB#49	20.69	21.00
Band7	20MHz	QPSK	21350	1RB#99	21.30	22.00
Band7	20MHz	16QAM	21350	1RB#99	21.17	22.00
Band7	20MHz	QPSK	21350	50RB#0	20.78	21.00
Band7	20MHz	16QAM	21350	50RB#0	20.66	21.00
Band7	20MHz	QPSK	21350	50RB#25	20.78	21.00
Band7	20MHz	16QAM	21350	50RB#25	20.65	21.00
Band7	20MHz	QPSK	21350	50RB#50	20.98	21.00
Band7	20MHz	16QAM	21350	50RB#50	21.01	22.00
Band7	20MHz	QPSK	21350	100RB#0	20.86	21.00
Band7	20MHz	16QAM	21350	100RB#0	20.69	21.00

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune-up limit (dBm)
Band12	1.4MHz	QPSK	23017	1RB#0	23.89	24.00
Band12	1.4MHz	16QAM	23017	1RB#0	22.75	23.00
Band12	1.4MHz	QPSK	23017	1RB#2	23.98	24.00
Band12	1.4MHz	16QAM	23017	1RB#2	22.90	23.00
Band12	1.4MHz	QPSK	23017	1RB#5	23.90	24.00
Band12	1.4MHz	16QAM	23017	1RB#5	22.84	23.00
Band12	1.4MHz	QPSK	23017	3RB#0	23.96	24.00
Band12	1.4MHz	16QAM	23017	3RB#0	22.73	23.00
Band12	1.4MHz	QPSK	23017	3RB#1	23.98	24.00
Band12	1.4MHz	16QAM	23017	3RB#1	22.76	23.00
Band12	1.4MHz	QPSK	23017	3RB#3	23.99	24.00
Band12	1.4MHz	16QAM	23017	3RB#3	22.75	23.00
Band12	1.4MHz	QPSK	23017	6RB#0	22.97	23.00
Band12	1.4MHz	16QAM	23017	6RB#0	21.94	22.00
Band12	1.4MHz	QPSK	23095	1RB#0	24.00	25.00
Band12	1.4MHz	16QAM	23095	1RB#0	22.86	23.00
Band12	1.4MHz	QPSK	23095	1RB#2	24.13	25.00
Band12	1.4MHz	16QAM	23095	1RB#2	23.00	24.00
Band12	1.4MHz	QPSK	23095	1RB#5	24.00	25.00
Band12	1.4MHz	16QAM	23095	1RB#5	22.85	23.00
Band12	1.4MHz	QPSK	23095	3RB#0	24.08	25.00
Band12	1.4MHz	16QAM	23095	3RB#0	22.86	23.00
Band12	1.4MHz	QPSK	23095	3RB#1	24.08	25.00
Band12	1.4MHz	16QAM	23095	3RB#1	22.85	23.00
Band12	1.4MHz	QPSK	23095	3RB#3	24.13	25.00
Band12	1.4MHz	16QAM	23095	3RB#3	22.88	23.00
Band12	1.4MHz	QPSK	23095	6RB#0	23.02	24.00
Band12	1.4MHz	16QAM	23095	6RB#0	21.87	22.00
Band12	1.4MHz	QPSK	23173	1RB#0	24.02	25.00
Band12	1.4MHz	16QAM	23173	1RB#0	22.74	23.00
Band12	1.4MHz	QPSK	23173	1RB#2	24.14	25.00
Band12	1.4MHz	16QAM	23173	1RB#2	22.94	23.00
Band12	1.4MHz	QPSK	23173	1RB#5	24.03	25.00
Band12	1.4MHz	16QAM	23173	1RB#5	22.79	23.00
Band12	1.4MHz	QPSK	23173	3RB#0	24.09	25.00
Band12	1.4MHz	16QAM	23173	3RB#0	22.86	23.00
Band12	1.4MHz	QPSK	23173	3RB#1	24.11	25.00
Band12	1.4MHz	16QAM	23173	3RB#1	22.89	23.00
Band12	1.4MHz	QPSK	23173	3RB#3	24.17	25.00

Band12	3MHz	16QAM	23025	1RB#14	22.93	23.00
Band12	3MHz	QPSK	23025	8RB#0	22.86	23.00
Band12	3MHz	16QAM	23025	8RB#0	21.94	22.00
Band12	3MHz	QPSK	23025	8RB#4	22.90	23.00
Band12	3MHz	16QAM	23025	8RB#4	21.92	22.00
Band12	3MHz	QPSK	23025	8RB#7	22.93	23.00
Band12	3MHz	16QAM	23025	8RB#7	21.94	22.00
Band12	3MHz	QPSK	23025	15RB#0	22.92	23.00
Band12	3MHz	16QAM	23025	15RB#0	21.87	22.00
Band12	3MHz	QPSK	23095	1RB#0	24.02	25.00
Band12	3MHz	16QAM	23095	1RB#0	22.88	23.00
Band12	3MHz	QPSK	23095	1RB#8	24.03	25.00
Band12	3MHz	16QAM	23095	1RB#8	22.89	23.00
Band12	3MHz	QPSK	23095	1RB#14	24.08	25.00
Band12	3MHz	16QAM	23095	1RB#14	22.87	23.00
Band12	3MHz	QPSK	23095	8RB#0	22.95	23.00
Band12	3MHz	16QAM	23095	8RB#0	21.98	22.00
Band12	3MHz	QPSK	23095	8RB#4	22.97	23.00
Band12	3MHz	16QAM	23095	8RB#4	21.97	22.00
Band12	3MHz	QPSK	23095	8RB#7	22.96	23.00
Band12	3MHz	16QAM	23095	8RB#7	21.96	22.00
Band12	3MHz	QPSK	23095	15RB#0	22.95	23.00
Band12	3MHz	16QAM	23095	15RB#0	21.89	22.00
Band12	3MHz	QPSK	23165	1RB#0	24.04	25.00
Band12	3MHz	16QAM	23165	1RB#0	22.77	23.00
Band12	3MHz	QPSK	23165	1RB#8	24.06	25.00
Band12	3MHz	16QAM	23165	1RB#8	22.81	23.00
Band12	3MHz	QPSK	23165	1RB#14	24.04	25.00
Band12	3MHz	16QAM	23165	1RB#14	22.83	23.00
Band12	3MHz	QPSK	23165	8RB#0	23.08	24.00
Band12	3MHz	16QAM	23165	8RB#0	22.03	23.00
Band12	3MHz	QPSK	23165	8RB#4	23.08	24.00
Band12	3MHz	16QAM	23165	8RB#4	22.02	23.00
Band12	3MHz	QPSK	23165	8RB#7	23.04	24.00
Band12	3MHz	16QAM	23165	8RB#7	21.97	22.00
Band12	3MHz	QPSK	23165	15RB#0	23.00	24.00
Band12	3MHz	16QAM	23165	15RB#0	21.92	22.00
Band12	5MHz	QPSK	23035	1RB#0	23.86	24.00
Band12	5MHz	16QAM	23035	1RB#0	22.75	23.00
Band12	5MHz	QPSK	23035	1RB#12	24.04	25.00
Band12	5MHz	16QAM	23035	1RB#12	22.93	23.00
Band12	5MHz	QPSK	23035	1RB#24	23.95	24.00
Band12	5MHz	16QAM	23035	12RB#0	21.75	22.00

Band12	5MHz	16QAM	23035	12RB#6	21.78	22.00
Band12	5MHz	QPSK	23035	12RB#13	22.87	23.00
Band12	5MHz	16QAM	23035	12RB#13	21.84	22.00
Band12	5MHz	QPSK	23035	25RB#0	22.83	23.00
Band12	5MHz	16QAM	23035	25RB#0	21.84	22.00
Band12	5MHz	QPSK	23095	1RB#0	23.88	24.00
Band12	5MHz	16QAM	23095	1RB#0	22.92	23.00
Band12	5MHz	QPSK	23095	1RB#12	24.08	25.00
Band12	5MHz	16QAM	23095	1RB#12	23.10	24.00
Band12	5MHz	QPSK	23095	1RB#24	23.85	24.00
Band12	5MHz	16QAM	23095	1RB#24	22.95	23.00
Band12	5MHz	16QAM	23095	12RB#0	22.06	23.00
Band12	5MHz	QPSK	23095	12RB#6	23.00	24.00
Band12	5MHz	16QAM	23095	12RB#6	22.03	23.00
Band12	5MHz	QPSK	23095	12RB#13	23.01	24.00
Band12	5MHz	16QAM	23095	12RB#13	21.94	22.00
Band12	5MHz	QPSK	23095	25RB#0	23.04	24.00
Band12	5MHz	16QAM	23095	25RB#0	21.98	22.00
Band12	5MHz	QPSK	23155	1RB#0	23.92	24.00
Band12	5MHz	16QAM	23155	25RB#0	22.02	23.00
Band12	10MHz	QPSK	23060	1RB#0	24.38	25.00
Band12	10MHz	16QAM	23060	1RB#0	23.41	24.00
Band12	10MHz	QPSK	23060	1RB#24	24.61	25.00
Band12	10MHz	16QAM	23060	1RB#24	23.72	24.00
Band12	10MHz	QPSK	23060	1RB#49	24.45	25.00
Band12	10MHz	16QAM	23060	1RB#49	23.50	24.00
Band12	10MHz	QPSK	23060	25RB#0	23.40	24.00
Band12	10MHz	16QAM	23060	25RB#0	22.32	23.00
Band12	10MHz	QPSK	23060	25RB#12	23.43	24.00
Band12	10MHz	16QAM	23060	25RB#12	22.30	23.00
Band12	10MHz	QPSK	23060	25RB#25	23.44	24.00
Band12	10MHz	16QAM	23060	25RB#25	22.41	23.00
Band12	10MHz	QPSK	23060	50RB#0	23.42	24.00
Band12	10MHz	16QAM	23060	50RB#0	22.37	23.00
Band12	10MHz	QPSK	23095	1RB#0	24.50	25.00
Band12	10MHz	16QAM	23095	1RB#0	23.33	24.00
Band12	10MHz	QPSK	23095	1RB#24	24.63	25.00
Band12	10MHz	16QAM	23095	1RB#24	23.49	24.00
Band12	10MHz	QPSK	23095	1RB#49	24.55	25.00
Band12	10MHz	16QAM	23095	1RB#49	23.34	24.00
Band12	10MHz	QPSK	23095	25RB#0	23.64	24.00
Band12	10MHz	16QAM	23095	25RB#0	22.67	23.00
Band12	10MHz	QPSK	23095	25RB#12	23.66	24.00

Band12	10MHz	16QAM	23095	25RB#12	22.68	23.00
Band12	10MHz	QPSK	23095	25RB#25	23.66	24.00
Band12	10MHz	16QAM	23095	25RB#25	22.66	23.00
Band12	10MHz	QPSK	23095	50RB#0	23.61	24.00
Band12	10MHz	16QAM	23095	50RB#0	22.65	23.00
Band12	10MHz	QPSK	23130	1RB#0	24.48	25.00
Band12	10MHz	16QAM	23130	1RB#0	23.25	24.00
Band12	10MHz	QPSK	23130	1RB#24	24.58	25.00
Band12	10MHz	16QAM	23130	1RB#24	23.26	24.00
Band12	10MHz	QPSK	23130	1RB#49	24.54	25.00
Band12	10MHz	16QAM	23130	1RB#49	23.30	24.00
Band12	10MHz	QPSK	23130	25RB#0	23.50	24.00
Band12	10MHz	16QAM	23130	25RB#0	22.52	23.00
Band12	10MHz	QPSK	23130	25RB#12	23.49	24.00
Band12	10MHz	16QAM	23130	25RB#12	22.49	23.00
Band12	10MHz	QPSK	23130	25RB#25	23.45	24.00
Band12	10MHz	16QAM	23130	25RB#25	22.45	23.00
Band12	10MHz	QPSK	23130	50RB#0	23.42	24.00

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune-up limit (dBm)
Band13	5MHz	QPSK	23205	1RB#0	22.47	23.00
Band13	5MHz	QPSK	23205	1RB#12	22.65	23.00
Band13	5MHz	QPSK	23205	1RB#24	22.58	23.00
Band13	5MHz	QPSK	23205	12RB#0	21.57	22.00
Band13	5MHz	QPSK	23205	12RB#6	21.60	22.00
Band13	5MHz	QPSK	23205	12RB#13	21.53	22.00
Band13	5MHz	QPSK	23205	25RB#0	21.55	22.00
Band13	5MHz	QPSK	23230	1RB#0	22.52	23.00
Band13	5MHz	QPSK	23230	1RB#12	22.77	23.50
Band13	5MHz	QPSK	23230	1RB#24	22.58	23.00
Band13	5MHz	QPSK	23230	12RB#0	21.73	22.00
Band13	5MHz	QPSK	23230	12RB#6	21.67	22.00
Band13	5MHz	QPSK	23230	12RB#13	21.63	22.00
Band13	5MHz	QPSK	23230	25RB#0	21.70	22.00
Band13	5MHz	QPSK	23255	1RB#0	22.64	23.00
Band13	5MHz	QPSK	23255	1RB#12	22.78	23.50
Band13	5MHz	QPSK	23255	1RB#24	22.60	23.00
Band13	5MHz	QPSK	23255	12RB#0	21.63	22.00
Band13	5MHz	QPSK	23255	12RB#6	21.66	22.00
Band13	5MHz	QPSK	23255	12RB#13	21.78	22.50
Band13	5MHz	QPSK	23255	25RB#0	21.71	22.00
Band13	5MHz	16QAM	23205	1RB#0	21.48	22.00
Band13	5MHz	16QAM	23205	1RB#12	21.71	22.00
Band13	5MHz	16QAM	23205	1RB#24	21.64	22.00
Band13	5MHz	16QAM	23205	12RB#0	20.52	21.00
Band13	5MHz	16QAM	23205	12RB#6	20.55	21.00
Band13	5MHz	16QAM	23205	12RB#13	20.54	21.00
Band13	5MHz	16QAM	23205	25RB#0	20.57	21.00
Band13	5MHz	16QAM	23230	1RB#0	21.74	22.00
Band13	5MHz	16QAM	23230	1RB#12	21.98	22.50
Band13	5MHz	16QAM	23230	1RB#24	21.77	22.50
Band13	5MHz	16QAM	23230	12RB#0	20.80	21.50
Band13	5MHz	16QAM	23230	12RB#6	20.72	21.00
Band13	5MHz	16QAM	23230	12RB#13	20.71	21.00
Band13	5MHz	16QAM	23230	25RB#0	20.69	21.00
Band13	5MHz	16QAM	23255	1RB#0	21.64	22.00
Band13	5MHz	16QAM	23255	1RB#12	21.76	22.50
Band13	5MHz	16QAM	23255	1RB#24	21.64	22.00
Band13	5MHz	16QAM	23255	12RB#0	20.57	21.00

Band13	5MHz	16QAM	23255	12RB#6	20.60	21.00
Band13	5MHz	16QAM	23255	12RB#13	20.82	21.50
Band13	5MHz	16QAM	23255	25RB#0	20.77	21.50
Band13	10MHz	QPSK	23230	1RB#0	22.48	23.00
Band13	10MHz	QPSK	23230	1RB#24	22.83	23.50
Band13	10MHz	QPSK	23230	1RB#49	22.70	23.00
Band13	10MHz	QPSK	23230	25RB#0	21.82	22.50
Band13	10MHz	QPSK	23230	25RB#12	21.82	22.50
Band13	10MHz	QPSK	23230	25RB#25	21.87	22.50
Band13	10MHz	QPSK	23230	50RB#0	21.84	22.50
Band13	10MHz	16QAM	23230	1RB#0	21.65	22.00
Band13	10MHz	16QAM	23230	1RB#24	21.93	22.50
Band13	10MHz	16QAM	23230	1RB#49	21.87	22.50
Band13	10MHz	16QAM	23230	25RB#0	20.82	21.50
Band13	10MHz	16QAM	23230	25RB#12	20.88	21.50
Band13	10MHz	16QAM	23230	25RB#25	20.90	21.50
Band13	10MHz	16QAM	23230	50RB#0	20.90	21.50

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune-up limit (dBm)
Band17	5MHz	QPSK	23755	1RB#0	23.62	24.00
Band17	5MHz	16QAM	23755	1RB#0	23.57	24.00
Band17	5MHz	QPSK	23755	1RB#12	23.66	24.00
Band17	5MHz	16QAM	23755	1RB#12	23.69	24.00
Band17	5MHz	16QAM	23755	1RB#24	23.76	24.00
Band17	5MHz	QPSK	23755	12RB#0	23.90	24.00
Band17	5MHz	16QAM	23755	12RB#0	23.89	24.00
Band17	5MHz	QPSK	23755	12RB#6	23.89	24.00
Band17	5MHz	16QAM	23755	12RB#6	23.89	24.00
Band17	5MHz	QPSK	23755	12RB#13	23.88	24.00
Band17	5MHz	16QAM	23755	12RB#13	23.95	24.00
Band17	5MHz	QPSK	23755	25RB#0	23.95	24.00
Band17	5MHz	16QAM	23755	25RB#0	23.74	24.00
Band17	5MHz	QPSK	23790	1RB#0	23.78	24.00
Band17	5MHz	16QAM	23790	1RB#0	22.51	23.00
Band17	5MHz	QPSK	23790	1RB#12	23.73	24.00
Band17	5MHz	16QAM	23790	1RB#12	22.53	23.00
Band17	5MHz	QPSK	23790	1RB#24	23.74	24.00
Band17	5MHz	16QAM	23790	1RB#24	22.46	23.00
Band17	5MHz	QPSK	23790	12RB#0	22.88	23.00
Band17	5MHz	16QAM	23790	12RB#0	21.89	22.00
Band17	5MHz	QPSK	23790	12RB#6	22.79	23.00
Band17	5MHz	16QAM	23790	12RB#6	21.89	22.00
Band17	5MHz	QPSK	23790	12RB#13	22.88	23.00
Band17	5MHz	16QAM	23790	12RB#13	21.99	22.00
Band17	5MHz	QPSK	23790	25RB#0	22.81	23.00
Band17	5MHz	16QAM	23790	25RB#0	21.97	22.00
Band17	5MHz	QPSK	23825	1RB#0	23.87	24.00
Band17	5MHz	16QAM	23825	1RB#0	22.46	23.00
Band17	5MHz	QPSK	23825	1RB#12	23.82	24.00
Band17	5MHz	16QAM	23825	1RB#12	22.43	23.00
Band17	5MHz	QPSK	23825	1RB#24	23.83	24.00
Band17	5MHz	16QAM	23825	1RB#24	22.41	23.00
Band17	5MHz	QPSK	23825	12RB#0	22.83	23.00
Band17	5MHz	16QAM	23825	12RB#0	22.09	23.00
Band17	5MHz	QPSK	23825	12RB#6	22.87	23.00
Band17	5MHz	16QAM	23825	12RB#6	22.13	23.00
Band17	5MHz	QPSK	23825	12RB#13	22.87	23.00
Band17	5MHz	QPSK	23825	25RB#0	22.85	23.00
Band17	5MHz	16QAM	23825	25RB#0	22.14	23.00
Band17	10MHz	QPSK	23780	1RB#0	23.54	24.00

Band17	10MHz	16QAM	23780	1RB#0	22.49	23.00
Band17	10MHz	QPSK	23780	1RB#24	23.45	24.00
Band17	10MHz	16QAM	23780	1RB#24	22.53	23.00
Band17	10MHz	16QAM	23780	1RB#49	22.68	23.00
Band17	10MHz	QPSK	23780	25RB#0	22.64	23.00
Band17	10MHz	16QAM	23780	25RB#0	21.79	22.00
Band17	10MHz	QPSK	23780	25RB#12	22.77	23.00
Band17	10MHz	16QAM	23780	25RB#12	21.86	22.00
Band17	10MHz	QPSK	23780	25RB#25	22.83	23.00
Band17	10MHz	16QAM	23780	25RB#25	21.83	22.00
Band17	10MHz	16QAM	23780	50RB#0	21.80	22.00
Band17	10MHz	QPSK	23790	1RB#0	23.82	24.00
Band17	10MHz	16QAM	23790	1RB#0	22.61	23.00
Band17	10MHz	QPSK	23790	1RB#24	23.83	24.00
Band17	10MHz	16QAM	23790	1RB#24	22.75	23.00
Band17	10MHz	QPSK	23790	1RB#49	23.67	24.00
Band17	10MHz	16QAM	23790	1RB#49	22.64	23.00
Band17	10MHz	QPSK	23790	25RB#0	22.84	23.00
Band17	10MHz	16QAM	23790	25RB#0	22.08	23.00
Band17	10MHz	QPSK	23790	25RB#12	22.84	23.00
Band17	10MHz	16QAM	23800	1RB#24	23.41	24.00
Band17	10MHz	16QAM	23800	1RB#49	23.44	24.00
Band17	10MHz	QPSK	23800	25RB#0	22.68	23.00
Band17	10MHz	16QAM	23800	25RB#0	21.90	22.00
Band17	10MHz	QPSK	23800	25RB#12	22.64	23.00
Band17	10MHz	16QAM	23800	25RB#12	21.91	22.00
Band17	10MHz	QPSK	23800	25RB#25	22.82	23.00
Band17	10MHz	16QAM	23800	25RB#25	22.02	23.00
Band17	10MHz	QPSK	23800	50RB#0	22.66	23.00
Band17	10MHz	16QAM	23800	50RB#0	21.92	22.00
Band17	5MHz	QPSK	23755	1RB#24	23.70	24.00
Band17	5MHz	16QAM	23825	12RB#13	22.09	23.00
Band17	10MHz	QPSK	23780	1RB#49	23.76	24.00
Band17	10MHz	QPSK	23780	50RB#0	22.62	23.00
Band17	10MHz	16QAM	23790	25RB#12	22.07	23.00
Band17	10MHz	QPSK	23790	25RB#25	22.81	23.00
Band17	10MHz	16QAM	23790	25RB#25	21.98	22.00
Band17	10MHz	QPSK	23790	50RB#0	22.78	23.00
Band17	10MHz	16QAM	23790	50RB#0	21.89	22.00
Band17	10MHz	QPSK	23800	1RB#0	23.59	24.00
Band17	10MHz	16QAM	23800	1RB#0	23.53	24.00
Band17	10MHz	QPSK	23800	1RB#24	23.49	24.00
Band17	10MHz	QPSK	23800	1RB#49	23.55	24.00

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune-up limit (dBm)
Band66	1.4MHz	QPSK	131979	1RB#0	22.44	23.00
Band66	1.4MHz	QPSK	131979	1RB#2	22.60	23.00
Band66	1.4MHz	QPSK	131979	1RB#5	22.45	23.00
Band66	1.4MHz	QPSK	131979	3RB#0	22.50	23.00
Band66	1.4MHz	QPSK	131979	3RB#1	22.52	23.00
Band66	1.4MHz	QPSK	131979	3RB#3	22.50	23.00
Band66	1.4MHz	QPSK	131979	6RB#0	21.55	22.00
Band66	1.4MHz	QPSK	132322	1RB#0	22.22	22.50
Band66	1.4MHz	QPSK	132322	1RB#2	22.30	23.00
Band66	1.4MHz	QPSK	132322	1RB#5	22.17	22.50
Band66	1.4MHz	QPSK	132322	3RB#0	22.26	23.00
Band66	1.4MHz	QPSK	132322	3RB#1	22.24	22.50
Band66	1.4MHz	QPSK	132322	3RB#3	22.30	23.00
Band66	1.4MHz	QPSK	132322	6RB#0	21.29	22.00
Band66	1.4MHz	QPSK	132665	1RB#0	21.80	22.50
Band66	1.4MHz	QPSK	132665	1RB#2	21.98	22.50
Band66	1.4MHz	QPSK	132665	1RB#5	21.77	22.50
Band66	1.4MHz	QPSK	132665	3RB#0	21.92	22.50
Band66	1.4MHz	QPSK	132665	3RB#1	21.91	22.50
Band66	1.4MHz	QPSK	132665	3RB#3	21.90	22.50
Band66	1.4MHz	QPSK	132665	6RB#0	20.94	21.50
Band66	1.4MHz	16QAM	131979	1RB#0	21.52	22.00
Band66	1.4MHz	16QAM	131979	1RB#2	21.52	22.00
Band66	1.4MHz	16QAM	131979	1RB#5	21.52	22.00
Band66	1.4MHz	16QAM	131979	3RB#0	21.37	22.00
Band66	1.4MHz	16QAM	131979	3RB#1	21.39	22.00
Band66	1.4MHz	16QAM	131979	3RB#3	21.36	22.00
Band66	1.4MHz	16QAM	131979	6RB#0	20.56	21.00
Band66	1.4MHz	16QAM	132322	1RB#0	21.34	22.00
Band66	1.4MHz	16QAM	132322	1RB#2	21.52	22.00
Band66	1.4MHz	16QAM	132322	1RB#5	21.33	22.00
Band66	1.4MHz	16QAM	132322	3RB#0	21.17	21.50
Band66	1.4MHz	16QAM	132322	3RB#1	21.16	21.50
Band66	1.4MHz	16QAM	132322	3RB#3	21.17	21.50
Band66	1.4MHz	16QAM	132322	6RB#0	20.20	20.50
Band66	1.4MHz	16QAM	132665	1RB#0	20.77	21.50
Band66	1.4MHz	16QAM	132665	1RB#2	20.84	21.50
Band66	1.4MHz	16QAM	132665	1RB#5	20.66	21.00
Band66	1.4MHz	16QAM	132665	3RB#0	20.75	21.00
Band66	1.4MHz	16QAM	132665	3RB#1	20.73	21.00
Band66	1.4MHz	16QAM	132665	3RB#3	20.68	21.00

Band66	1.4MHz	16QAM	132665	6RB#0	19.94	20.50
Band66	3MHz	QPSK	131987	1RB#0	22.40	23.00
Band66	3MHz	QPSK	131987	1RB#8	22.43	23.00
Band66	3MHz	QPSK	131987	1RB#14	22.43	23.00
Band66	3MHz	QPSK	131987	8RB#0	21.48	22.00
Band66	3MHz	QPSK	131987	8RB#4	21.49	22.00
Band66	3MHz	QPSK	131987	8RB#7	21.53	22.00
Band66	3MHz	QPSK	131987	15RB#0	21.46	22.00
Band66	3MHz	QPSK	132322	1RB#0	22.22	22.50
Band66	3MHz	QPSK	132322	1RB#8	22.19	22.50
Band66	3MHz	QPSK	132322	1RB#14	22.18	22.50
Band66	3MHz	QPSK	132322	8RB#0	21.25	21.50
Band66	3MHz	QPSK	132322	8RB#4	21.18	21.50
Band66	3MHz	QPSK	132322	8RB#7	21.17	21.50
Band66	3MHz	QPSK	132322	15RB#0	21.22	21.50
Band66	3MHz	QPSK	132657	1RB#0	21.84	22.50
Band66	3MHz	QPSK	132657	1RB#8	21.83	22.50
Band66	3MHz	QPSK	132657	1RB#14	21.77	22.50
Band66	3MHz	QPSK	132657	8RB#0	20.87	21.50
Band66	3MHz	QPSK	132657	8RB#4	20.87	21.50
Band66	3MHz	QPSK	132657	8RB#7	20.85	21.50
Band66	3MHz	QPSK	132657	15RB#0	20.82	21.50
Band66	3MHz	16QAM	131987	1RB#0	21.58	22.00
Band66	3MHz	16QAM	131987	1RB#8	21.61	22.00
Band66	3MHz	16QAM	131987	1RB#14	21.53	22.00
Band66	3MHz	16QAM	131987	8RB#0	20.45	21.00
Band66	3MHz	16QAM	131987	8RB#4	20.50	21.00
Band66	3MHz	16QAM	131987	8RB#7	20.50	21.00
Band66	3MHz	16QAM	131987	15RB#0	20.45	21.00
Band66	3MHz	16QAM	132322	1RB#0	21.40	22.00
Band66	3MHz	16QAM	132322	1RB#8	21.32	22.00
Band66	3MHz	16QAM	132322	1RB#14	21.25	21.50
Band66	3MHz	16QAM	132322	8RB#0	20.21	20.50
Band66	3MHz	16QAM	132322	8RB#4	20.25	20.50
Band66	3MHz	16QAM	132322	8RB#7	20.21	20.50
Band66	3MHz	16QAM	132322	15RB#0	20.08	20.50
Band66	3MHz	16QAM	132657	1RB#0	20.77	21.50
Band66	3MHz	16QAM	132657	1RB#8	20.77	21.50
Band66	3MHz	16QAM	132657	1RB#14	20.71	21.00
Band66	3MHz	16QAM	132657	8RB#0	19.93	20.50
Band66	3MHz	16QAM	132657	8RB#4	19.94	20.50
Band66	3MHz	16QAM	132657	8RB#7	19.89	20.50
Band66	3MHz	16QAM	132657	15RB#0	19.79	20.50

Band66	5MHz	QPSK	131997	1RB#0	22.32	23.00
Band66	5MHz	QPSK	131997	1RB#12	22.51	23.00
Band66	5MHz	QPSK	131997	1RB#24	22.34	23.00
Band66	5MHz	QPSK	131997	12RB#0	21.39	22.00
Band66	5MHz	QPSK	131997	12RB#6	21.40	22.00
Band66	5MHz	QPSK	131997	12RB#13	21.36	22.00
Band66	5MHz	QPSK	131997	25RB#0	21.39	22.00
Band66	5MHz	QPSK	132322	1RB#0	22.17	22.50
Band66	5MHz	QPSK	132322	1RB#12	22.24	22.50
Band66	5MHz	QPSK	132322	1RB#24	22.05	22.50
Band66	5MHz	QPSK	132322	12RB#0	21.14	21.50
Band66	5MHz	QPSK	132322	12RB#6	21.12	21.50
Band66	5MHz	QPSK	132322	12RB#13	21.12	21.50
Band66	5MHz	QPSK	132322	25RB#0	21.13	21.50
Band66	5MHz	QPSK	132647	1RB#0	21.78	22.50
Band66	5MHz	QPSK	132647	1RB#12	21.88	22.50
Band66	5MHz	QPSK	132647	1RB#24	21.67	22.00
Band66	5MHz	QPSK	132647	12RB#0	20.83	21.50
Band66	5MHz	QPSK	132647	12RB#6	20.85	21.50
Band66	5MHz	QPSK	132647	12RB#13	20.76	21.50
Band66	5MHz	QPSK	132647	25RB#0	20.80	21.50
Band66	5MHz	16QAM	131997	1RB#0	21.32	22.00
Band66	5MHz	16QAM	131997	1RB#12	21.48	22.00
Band66	5MHz	16QAM	131997	1RB#24	21.33	22.00
Band66	5MHz	16QAM	131997	12RB#0	20.34	21.00
Band66	5MHz	16QAM	131997	12RB#6	20.32	21.00
Band66	5MHz	16QAM	131997	12RB#13	20.33	21.00
Band66	5MHz	16QAM	131997	25RB#0	20.37	21.00
Band66	5MHz	16QAM	132322	1RB#0	21.37	22.00
Band66	5MHz	16QAM	132322	1RB#12	21.46	22.00
Band66	5MHz	16QAM	132322	1RB#24	21.25	21.50
Band66	5MHz	16QAM	132322	12RB#0	20.18	20.50
Band66	5MHz	16QAM	132322	12RB#6	20.14	20.50
Band66	5MHz	16QAM	132322	12RB#13	20.08	20.50
Band66	5MHz	16QAM	132322	25RB#0	20.11	20.50
Band66	5MHz	16QAM	132647	1RB#0	20.80	21.50
Band66	5MHz	16QAM	132647	1RB#12	20.90	21.50
Band66	5MHz	16QAM	132647	1RB#24	20.70	21.00
Band66	5MHz	16QAM	132647	12RB#0	19.85	20.50
Band66	5MHz	16QAM	132647	12RB#6	19.88	20.50
Band66	5MHz	16QAM	132647	12RB#13	19.85	20.50
Band66	5MHz	16QAM	132647	25RB#0	19.88	20.50
Band66	10MHz	QPSK	132022	1RB#0	22.30	23.00

Band66	10MHz	QPSK	132022	1RB#24	22.32	23.00
Band66	10MHz	QPSK	132022	1RB#49	22.30	23.00
Band66	10MHz	QPSK	132022	25RB#0	21.36	22.00
Band66	10MHz	QPSK	132022	25RB#12	21.37	22.00
Band66	10MHz	QPSK	132022	25RB#25	21.35	22.00
Band66	10MHz	QPSK	132022	50RB#0	21.33	22.00
Band66	10MHz	QPSK	132322	1RB#0	22.24	22.50
Band66	10MHz	QPSK	132322	1RB#24	22.22	22.50
Band66	10MHz	QPSK	132322	1RB#49	22.04	22.50
Band66	10MHz	QPSK	132322	25RB#0	21.15	21.50
Band66	10MHz	QPSK	132322	25RB#12	21.17	21.50
Band66	10MHz	QPSK	132322	25RB#25	21.14	21.50
Band66	10MHz	QPSK	132322	50RB#0	21.14	21.50
Band66	10MHz	QPSK	132622	1RB#0	21.90	22.50
Band66	10MHz	QPSK	132622	1RB#24	21.89	22.50
Band66	10MHz	QPSK	132622	1RB#49	21.75	22.00
Band66	10MHz	QPSK	132622	25RB#0	21.02	21.50
Band66	10MHz	QPSK	132622	25RB#12	21.00	21.50
Band66	10MHz	QPSK	132622	25RB#25	20.84	21.50
Band66	10MHz	QPSK	132622	50RB#0	20.92	21.50
Band66	10MHz	16QAM	132022	1RB#0	21.49	22.00
Band66	10MHz	16QAM	132022	1RB#24	21.59	22.00
Band66	10MHz	16QAM	132022	1RB#49	21.52	22.00
Band66	10MHz	16QAM	132022	25RB#0	20.34	21.00
Band66	10MHz	16QAM	132022	25RB#12	20.36	21.00
Band66	10MHz	16QAM	132022	25RB#25	20.38	21.00
Band66	10MHz	16QAM	132022	50RB#0	20.32	21.00
Band66	10MHz	16QAM	132322	1RB#0	21.39	22.00
Band66	10MHz	16QAM	132322	1RB#24	21.33	22.00
Band66	10MHz	16QAM	132322	1RB#49	21.18	21.50
Band66	10MHz	16QAM	132322	25RB#0	20.19	20.50
Band66	10MHz	16QAM	132322	25RB#12	20.16	20.50
Band66	10MHz	16QAM	132322	25RB#25	20.14	20.50
Band66	10MHz	16QAM	132322	50RB#0	20.12	20.50
Band66	10MHz	16QAM	132622	1RB#0	20.85	21.50
Band66	10MHz	16QAM	132622	1RB#24	20.88	21.50
Band66	10MHz	16QAM	132622	1RB#49	20.69	21.00
Band66	10MHz	16QAM	132622	25RB#0	20.05	20.50
Band66	10MHz	16QAM	132622	25RB#12	20.06	20.50
Band66	10MHz	16QAM	132622	25RB#25	19.92	20.50
Band66	10MHz	16QAM	132622	50RB#0	19.93	20.50
Band66	15MHz	QPSK	132047	1RB#0	22.26	23.00
Band66	15MHz	QPSK	132047	1RB#38	22.33	23.00

Band66	15MHz	QPSK	132047	1RB#74	22.22	22.50
Band66	15MHz	QPSK	132047	38RB#0	21.47	22.00
Band66	15MHz	QPSK	132047	38RB#18	21.43	22.00
Band66	15MHz	QPSK	132047	38RB#37	21.42	22.00
Band66	15MHz	QPSK	132047	75RB#0	21.43	22.00
Band66	15MHz	QPSK	132322	1RB#0	22.24	22.50
Band66	15MHz	QPSK	132322	1RB#38	22.14	22.50
Band66	15MHz	QPSK	132322	1RB#74	21.90	22.50
Band66	15MHz	QPSK	132322	38RB#0	21.21	21.50
Band66	15MHz	QPSK	132322	38RB#18	21.19	21.50
Band66	15MHz	QPSK	132322	38RB#37	21.20	21.50
Band66	15MHz	QPSK	132322	75RB#0	21.21	21.50
Band66	15MHz	QPSK	132597	1RB#0	21.97	22.50
Band66	15MHz	QPSK	132597	1RB#38	21.94	22.50
Band66	15MHz	QPSK	132597	1RB#74	21.70	22.00
Band66	15MHz	QPSK	132597	38RB#0	21.08	21.50
Band66	15MHz	QPSK	132597	38RB#18	21.08	21.50
Band66	15MHz	QPSK	132597	38RB#37	21.09	21.50
Band66	15MHz	QPSK	132597	75RB#0	21.02	21.50
Band66	15MHz	16QAM	132047	1RB#0	21.42	22.00
Band66	15MHz	16QAM	132047	1RB#38	21.50	22.00
Band66	15MHz	16QAM	132047	1RB#74	21.48	22.00
Band66	15MHz	16QAM	132047	38RB#0	21.46	22.00
Band66	15MHz	16QAM	132047	38RB#18	21.46	22.00
Band66	15MHz	16QAM	132047	38RB#37	21.46	22.00
Band66	15MHz	16QAM	132047	75RB#0	20.34	21.00
Band66	15MHz	16QAM	132322	1RB#0	21.50	22.00
Band66	15MHz	16QAM	132322	1RB#38	21.45	22.00
Band66	15MHz	16QAM	132322	1RB#74	21.25	21.50
Band66	15MHz	16QAM	132322	38RB#0	21.21	21.50
Band66	15MHz	16QAM	132322	38RB#18	21.21	21.50
Band66	15MHz	16QAM	132322	38RB#37	21.20	21.50
Band66	15MHz	16QAM	132322	75RB#0	20.19	20.50
Band66	15MHz	16QAM	132597	1RB#0	20.90	21.50
Band66	15MHz	16QAM	132597	1RB#38	20.83	21.50
Band66	15MHz	16QAM	132597	1RB#74	20.64	21.00
Band66	15MHz	16QAM	132597	38RB#0	21.08	21.50
Band66	15MHz	16QAM	132597	38RB#18	21.08	21.50
Band66	15MHz	16QAM	132597	38RB#37	21.08	21.50
Band66	15MHz	16QAM	132597	75RB#0	20.01	20.50
Band66	20MHz	QPSK	132072	1RB#0	22.18	22.50
Band66	20MHz	QPSK	132072	1RB#49	22.52	23.00
Band66	20MHz	QPSK	132072	1RB#99	22.30	23.00

Band66	20MHz	QPSK	132072	50RB#0	21.40	22.00
Band66	20MHz	QPSK	132072	50RB#25	21.39	22.00
Band66	20MHz	QPSK	132072	50RB#50	21.32	22.00
Band66	20MHz	QPSK	132072	100RB#0	21.38	22.00
Band66	20MHz	QPSK	132322	1RB#0	22.14	22.50
Band66	20MHz	QPSK	132322	1RB#49	22.33	23.00
Band66	20MHz	QPSK	132322	1RB#99	21.84	22.50
Band66	20MHz	QPSK	132322	50RB#0	21.21	21.50
Band66	20MHz	QPSK	132322	50RB#25	21.24	21.50
Band66	20MHz	QPSK	132322	50RB#50	21.15	21.50
Band66	20MHz	QPSK	132322	100RB#0	21.18	21.50
Band66	20MHz	QPSK	132572	1RB#0	21.65	22.00
Band66	20MHz	QPSK	132572	1RB#49	21.94	22.50
Band66	20MHz	QPSK	132572	1RB#99	21.47	22.00
Band66	20MHz	QPSK	132572	50RB#0	21.10	21.50
Band66	20MHz	QPSK	132572	50RB#25	21.11	21.50
Band66	20MHz	QPSK	132572	50RB#50	20.88	21.50
Band66	20MHz	QPSK	132572	100RB#0	20.98	21.50
Band66	20MHz	16QAM	132072	1RB#0	21.21	21.50
Band66	20MHz	16QAM	132072	1RB#49	21.50	22.00
Band66	20MHz	16QAM	132072	1RB#99	21.34	22.00
Band66	20MHz	16QAM	132072	50RB#0	20.39	21.00
Band66	20MHz	16QAM	132072	50RB#25	20.36	21.00
Band66	20MHz	16QAM	132072	50RB#50	20.33	21.00
Band66	20MHz	16QAM	132072	100RB#0	20.37	21.00
Band66	20MHz	16QAM	132322	1RB#0	21.36	22.00
Band66	20MHz	16QAM	132322	1RB#49	21.39	22.00
Band66	20MHz	16QAM	132322	1RB#99	21.06	21.50
Band66	20MHz	16QAM	132322	50RB#0	20.25	20.50
Band66	20MHz	16QAM	132322	50RB#25	20.22	20.50
Band66	20MHz	16QAM	132322	50RB#50	20.11	20.50
Band66	20MHz	16QAM	132322	100RB#0	20.15	20.50
Band66	20MHz	16QAM	132572	1RB#0	20.77	21.50
Band66	20MHz	16QAM	132572	1RB#49	21.09	21.50
Band66	20MHz	16QAM	132572	1RB#99	20.62	21.00
Band66	20MHz	16QAM	132572	50RB#0	20.12	20.50
Band66	20MHz	16QAM	132572	50RB#25	20.12	20.50
Band66	20MHz	16QAM	132572	50RB#50	19.89	20.50
Band66	20MHz	16QAM	132572	100RB#0	19.99	20.50

<WLAN 2.4GHz Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power(dBm)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11b	1	2412	14.98	12.98	13.00
	6	2437	14.67	12.67	13.00
	11	2462	13.65	11.65	12.00
802.11g	1	2412	13.35	8.35	9.00
	6	2437	14.30	9.3	10.00
	11	2462	13.56	8.56	9.00
802.11n(HT20)	1	2412	13.23	5.23	6.00
	6	2437	14.31	6.31	7.00
	11	2462	13.60	5.6	6.00
802.11n(HT40)	3	2422	13.80	3.8	4.00
	6	2437	13.99	3.99	4.00
	9	2452	12.44	2.44	3.00

<WLAN 5.2GHz Conducted Power>

Test Mode	Antenna	Freq(MHz)	Result [dBm]	Tune-up limit (dBm)
11A	Ant1	5180	12.89	13.00
		5220	12.80	13.00
		5240	11.98	12.00
11N20SISO	Ant1	5180	13.12	14.00
		5220	12.66	13.00
		5240	12.28	13.00
11N40SISO	Ant1	5190	13.43	14.00
		5230	13.04	14.00
11AC20SISO	Ant1	5180	13.21	14.00
		5220	12.95	13.00
		5240	12.43	13.00
11AC40SISO	Ant1	5190	13.56	14.00
		5230	13.82	14.00

<WLAN 5.3GHz Conducted Power>

Test Mode	Antenna	Freq(MHz)	Result [dBm]	Tune-up limit (dBm)
11A	Ant1	5260	12.83	13.00
		5300	12.11	13.00
		5320	11.71	12.00
11N20SISO	Ant1	5260	13.33	13.50
		5300	12.16	13.00
		5320	11.56	12.00
11N40SISO	Ant1	5270	13.37	13.50
		5310	12.65	13.00
11AC20SISO	Ant1	5260	13.24	13.50
		5300	12.00	13.00
		5320	11.63	12.00
11AC40SISO	Ant1	5270	13.63	14.00
		5310	12.38	13.00

<WLAN 5.5GHz Conducted Power>

Test Mode	Antenna	Freq(MHz)	Channel Power [dBm]	Tune-up limit (dBm)
11A	Ant1	5500	11.12	12.00
		5580	12.16	12.50
		5700	12.12	12.50
11N20SISO	Ant1	5500	11.05	12.00
		5580	12.11	12.50
		5700	12.10	12.50
11N40SISO	Ant1	5550	12.60	13.00
		5670	12.87	13.00
11AC20SISO	Ant1	5500	11.22	12.00
		5580	11.82	12.00
		5700	12.02	12.50
11AC40SISO	Ant1	5550	12.23	12.50
		5670	12.66	13.00

<WLAN 5.8GHz Conducted Power>

Test Mode	Antenna	Freq(MHz)	Channel Power [dBm]	Tune-up limit (dBm)
11A	Ant1	5745	12.49	13.00
		5785	11.96	12.00
		5825	11.95	12.00
11N20SISO	Ant1	5745	12.69	13.00
		5785	12.57	13.00
		5825	12.12	13.00
11N40SISO	Ant1	5755	12.40	13.00
		5795	12.37	13.00
11AC20SISO	Ant1	5745	12.59	13.00
		5785	12.11	13.00
		5825	12.18	13.00
11AC40SISO	Ant1	5755	12.74	13.00
		5795	12.69	13.00

<Bluetooth Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power(dBm)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
GFSK	0	2402	-3.03	-5.03	-5.00
	39	2441	-1.84	-3.84	-3.00
	78	2480	-1.36	-3.36	-3.00
$\pi/4$ DQPSK	0	2402	-0.12	-2.12	-2.00
	39	2441	1.11	-0.89	0.00
	78	2480	1.54	-0.46	0.00
8DPSK	0	2402	0.50	-1.5	-1.00
	39	2441	1.50	-0.5	0.00
	78	2480	1.98	-0.02	0.00
BLE 1M	0	2402	-3.03	-5.03	-5.00
	19	2440	-1.87	-3.87	-3.00
	39	2480	-1.40	-3.4	-3.00

10.2 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
			dBm	mW				
Bluetooth	2.48	Front of face	0.00	1.00	10	0.157	3	Y
		Body worn	0.00	1.00	5	0.315	3	Y


The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

10.3 Transmit Antennas

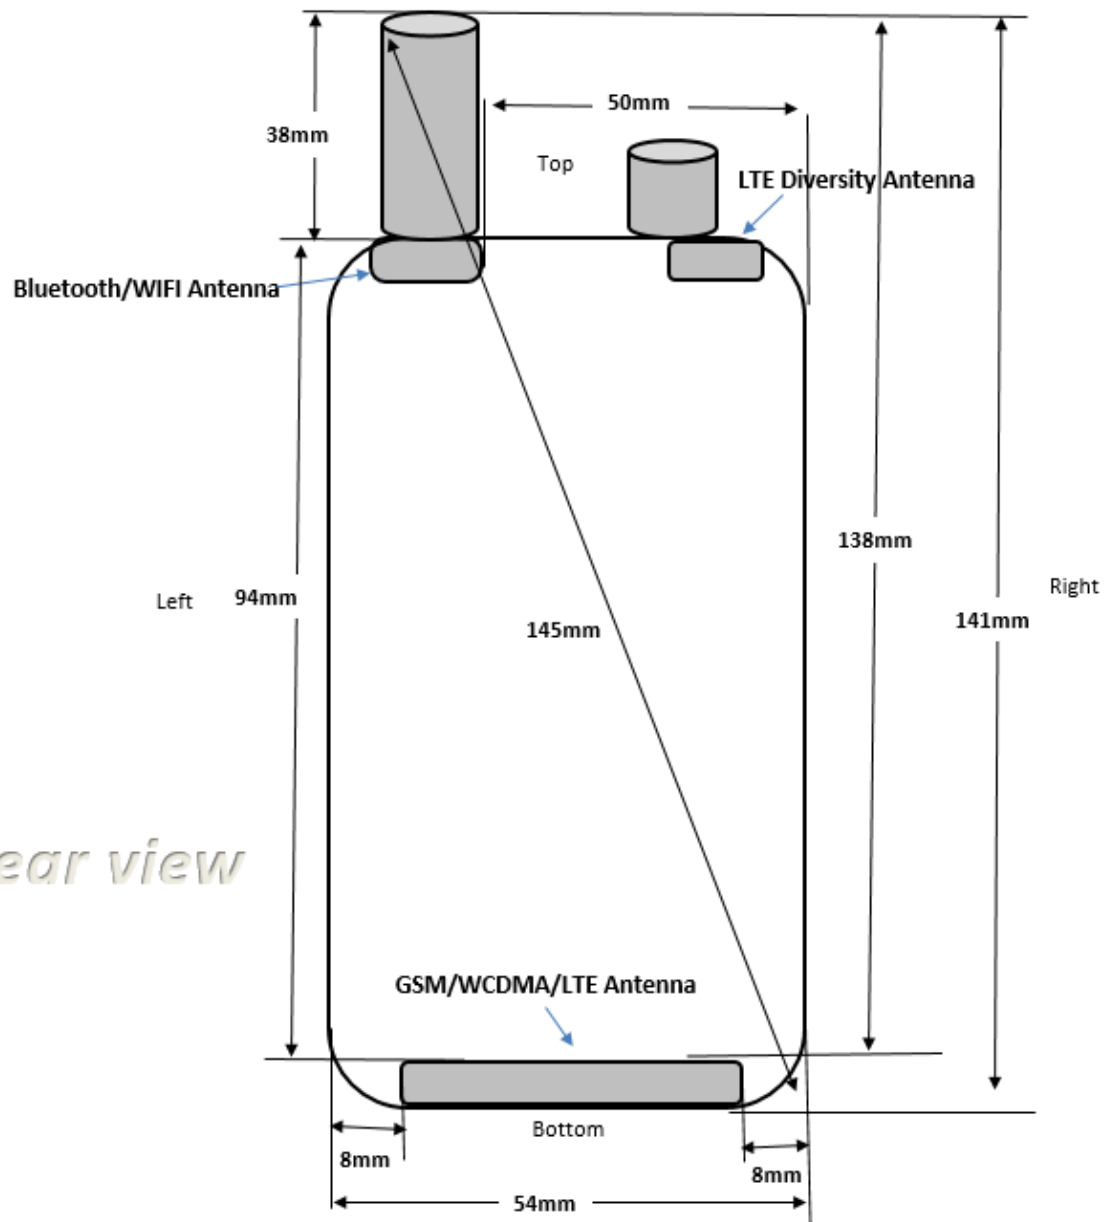

10.4 SAR Test Results

General Note:

- 1 Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a) Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b) For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c) For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- 2 Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- 3 Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

<Body SAR>

SAR Values [GSM 850]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#1	GPRS 3tx slot	Front of face(25mm)	190	836.6	29.46	29.50	1.009	-0.12	0.252	0.254
#2	GPRS 3tx slot	Body worn(0mm)	190	836.6	29.46	29.50	1.009	0.14	0.585	0.590

SAR Values [PCS 1900]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#3	GPRS 3tx slot	Front of face(25mm)	512	1850.2	26.49	26.50	1.002	-0.01	0.302	0.303
#4	GPRS 3tx slot	Body worn(0mm)	512	1850.2	26.49	26.50	1.002	-0.17	0.621	0.622

SAR Values [WCDMA band II]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#5	RMC 12.2K	Front of face(25mm)	9400	1880.0	23.35	23.50	1.035	-0.17	0.125	0.129
#6	RMC 12.2K	Body worn(0mm)	9400	1880.0	23.35	23.50	1.035	-0.03	0.469	0.485

SAR Values [WCDMA band IV]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#7	RMC 12.2K	Front of face(25mm)	1513	1752.6	23.25	23.50	1.059	-0.20	0.441	0.467
#8	RMC 12.2K	Body worn(0mm)	1513	1752.6	23.25	23.50	1.059	-0.11	0.715	0.757

SAR Values [WCDMA band V]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#9	RMC 12.2K	Front of face(25mm)	4182	836.4	22.92	23.00	1.019	-0.01	0.114	0.116
#10	RMC 12.2K	Body worn(0mm)	4182	836.4	22.92	23.00	1.019	0.12	0.410	0.418

SAR Values [LTE Band 2]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#11	20MHz/1RB#49	Front of face(25mm)	19100	1900	23.00	24.00	1.259	0.15	0.165	0.208
#12	20MHz/1RB#49	Body worn(0mm)	19100	1900	23.00	24.00	1.259	-0.11	0.502	0.632
	20MHz/50RB#50	Front of face(25mm)	19100	1900	21.36	22.00	1.259	0.03	0.112	0.632
	20MHz/50RB#50	Body worn(0mm)	19100	1900	21.36	22.00	1.159	-0.17	0.469	0.130

SAR Values [LTE Band 5]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#13	10MHz/1RB#49	Front of face(25mm)	20525	836.5	23.76	24.00	1.057	-0.12	0.426	0.450
#14	10MHz/1RB#49	Body worn(0mm)	20525	836.5	23.76	24.00	1.057	-0.17	0.685	0.724
	10MHz/25RB#12	Front of face(25mm)	20600	844	22.87	23.00	1.030	0.03	0.366	0.377
	10MHz/25RB#12	Body worn(0mm)	20600	844	22.87	23.00	1.030	-0.15	0.612	0.631

SAR Values [LTE Band 7]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#15	20MHz/1RB#0	Front of face(25mm)	21100	2535.5	21.82	22.00	1.042	0.05	0.222	0.231
#16	20MHz/1RB#0	Body worn(0mm)	21100	2535.5	21.82	22.00	1.042	-0.11	0.474	0.494
	20MHz/50RB#0	Front of face(25mm)	21100	2535.5	21.45	22.00	1.135	0.01	0.187	0.212
	20MHz/50RB#0	Body worn(0mm)	21100	2535.5	21.45	22.00	1.135	-0.17	0.421	0.478

SAR Values [LTE Band 12]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#17	10MHz/1RB#24	Front of face(25mm)	23095	707.5	24.63	25.00	1.089	-0.11	0.448	0.488
#18	10MHz/1RB#24	Body worn(0mm)	23095	707.5	24.63	25.00	1.089	-0.20	0.722	0.786
	10MHz/25RB#12	Front of face(25mm)	23095	707.5	23.66	24.00	1.081	0.00	0.398	0.430
	10MHz/25RB#12	Body worn(0mm)	23095	707.5	23.66	24.00	1.081	-0.16	0.666	0.720

SAR Values [LTE Band 13]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)
Measured / Reported SAR numbers										
#19	10MHz/1RB#24	Front of face(25mm)	23230	782	22.83	23.50	1.167	0.02	0.187	0.218
#20	10MHz/1RB#24	Body worn(0mm)	23230	782	22.83	23.50	1.167	-0.11	0.368	0.429
	10MHz/25RB#25	Front of face(25mm)	23230	782	21.87	22.50	1.156	-0.18	0.144	0.166
	10MHz/25RB#25	Body worn(0mm)	23230	782	21.87	22.50	1.156	-0.09	0.312	0.361

SAR Values [LTE Band 66]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers										
#21	20MHz/1RB#49	Front of face(25mm)	132072	1720.0	22.52	23.00	1.117	0.02	0.305	0.341
#22	20MHz/1RB#49	Body worn(0mm)	132072	1720.0	22.52	23.00	1.117	-0.15	0.623	0.696
	20MHz/50RB#0	Front of face(25mm)	132072	1720.0	21.40	22.00	1.148	-0.17	0.254	0.292
	20MHz/50RB#0	Body worn(0mm)	132072	1720.0	21.40	22.00	1.148	0.11	0.565	0.649

SAR Values [WIFI 2.4G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Duty Cycle	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers											
#23	802.11b	Front of face(25mm)	1	2412	1.000	12.98	13.00	1.005	0.02	0.102	0.102
#24	802.11b	Body worn(0mm)	1	2412	1.000	12.98	13.00	1.005	-0.14	0.325	0.327

Remark: The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was <1.2W/kg, So OFDM SAR test is not required.

SAR Values [WIFI 5.2G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Duty Cycle	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers											
#25	802.11n40	Front of face(25mm)	38	5190	1.000	13.43	14.00	1.140	0.02	0.215	0.245
#26	802.11n40	Body worn(0mm)	38	5190	1.000	13.43	14.00	1.140	-0.15	0.412	0.470

SAR Values [WIFI 5.3G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Duty Cycle	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers											
#27	802.11ac40	Front of face(25mm)	54	5270	1.000	13.63	14.00	1.089	-0.05	0.226	0.246
#28	802.11ac40	Body worn(0mm)	54	5270	1.000	13.63	14.00	1.089	-0.17	0.425	0.463

SAR Values [WIFI 5.5G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Duty Cycle	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers											
#29	802.11n40	Front of face(25mm)	134	5670	1.000	12.87	13.00	1.030	-0.04	0.166	0.171
#30	802.11n40	Body worn(0mm)	134	5670	1.000	12.87	13.00	1.030	-0.11	0.387	0.399

SAR Values [WIFI 5.8G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Duty Cycle	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers											
#31	802.11n40	Front of face(25mm)	151	5755	1.000	12.40	13.00	1.148	-0.06	0.198	0.227
#32	802.11n40	Body worn(0mm)	151	5755	1.000	12.40	13.00	1.148	-0.17	0.425	0.488

10.5 Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$
W/kg for test separation distances ≤ 50 mm;

Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Estimated SAR Result

Freq. Band	Frequency (GHz)	Test Position	max. power (dBm)	max. power (mw)	Test Separation (mm)	Estimated
						1g SAR (W/kg)
Bluetooth	2.48	Front of face	0.00	1.00	10	0.021
		Body worn	0.00	1.00	5	0.042

10.6 Simultaneous Transmission Analysis

Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤ 1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

Application Simultaneous Transmission information:

No.	Simultaneous Transmission Configurations	Front of face	Body-worn
1	WWAN (2/3/4G) + WLAN 2.4GHz	Yes	Yes
2	WWAN (2/3/4G) + WLAN 5GHz	Yes	Yes
3	WWAN (2/3/4G) + Bluetooth	Yes	Yes

Note: WLAN and BT share the same antenna and cannot transmitting at the same time.


Evaluation of Simultaneous SAR

Simultaneous transmission SAR for WIFI/BT and GSM/WCDMA/ LTE

Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	SPLSR
	MAX. WWAN Reported SAR	MAX. WLAN2.4G Reported SAR	MAX. WLAN5G Reported SAR	Bluetooth				
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
Front of face	0.488	0.102	0.246	0.021	0.590	0.734	0.509	N/A
Body-worn	0.786	0.327	0.488	0.042	1.113	1.274	0.828	N/A

MAX. $\Sigma \text{SAR}_{1g} = 1.249$ W/kg < 1.6 W/kg, so the Simultaneous transmission SAR with volume scan are not required.

Appendix A. EUT Photos and Test Setup Photos

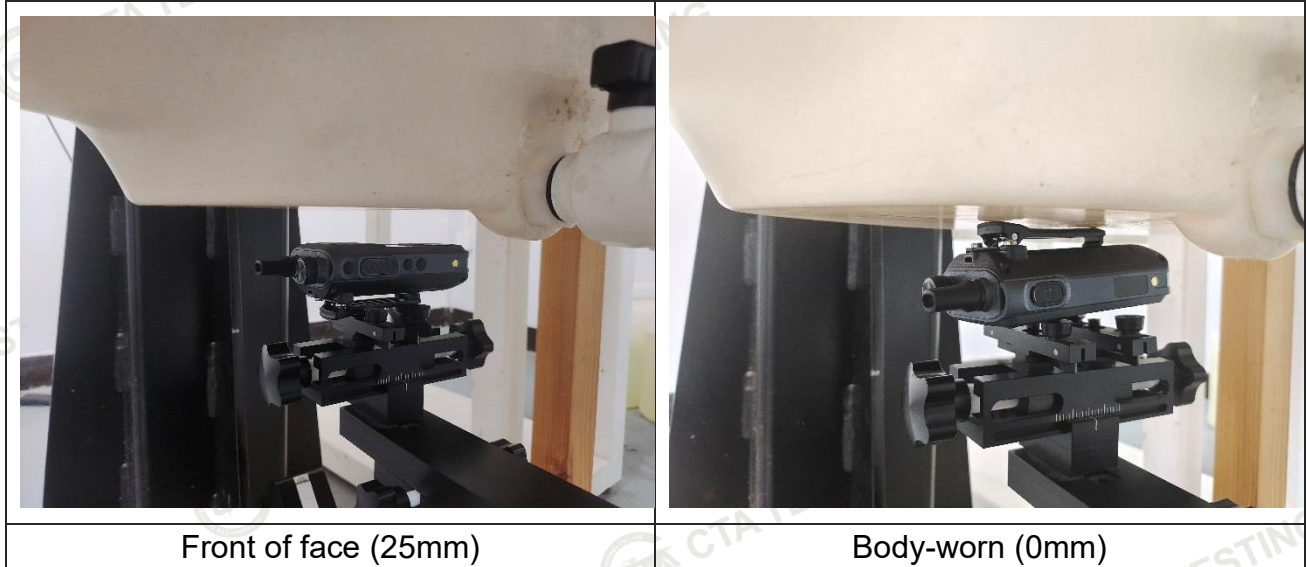

Appendix B. Plots of SAR System Check

750MHz System Check

Date: 08/07/2024

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1194


Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 40.685$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.58, 10.58, 10.58); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

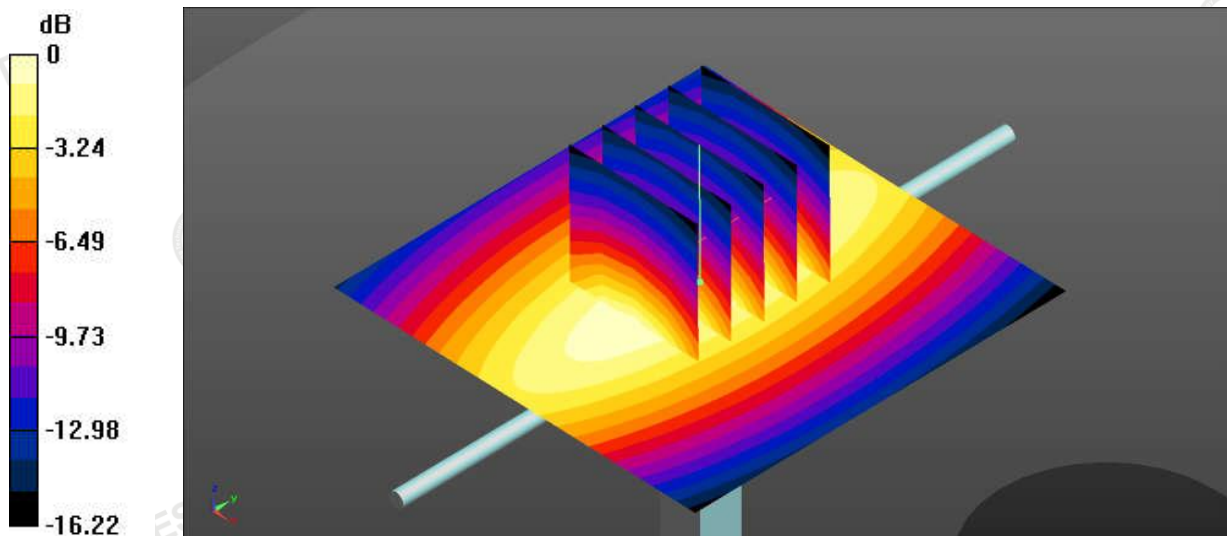Area Scan (5x18x1): Measured grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (measured) = 3.14 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.21 V/m ; Power Drift = -0.16 dB Peak SAR (extrapolated) = 2.65 W/kg **SAR(1 g) = 2.11 W/kg ; SAR(10 g) = 1.80 W/kg** Maximum value of SAR (measured) = 3.05 W/kg 0 dB = 3.05 W/kg

System Performance Check 750MHz 250mW

835MHz System Check

Date: 08/08/2024

DUT: Dipole 835 MHz; Type: D835V2; Serial: 484


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.878 \text{ S/m}$; $\epsilon_r = 40.687$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

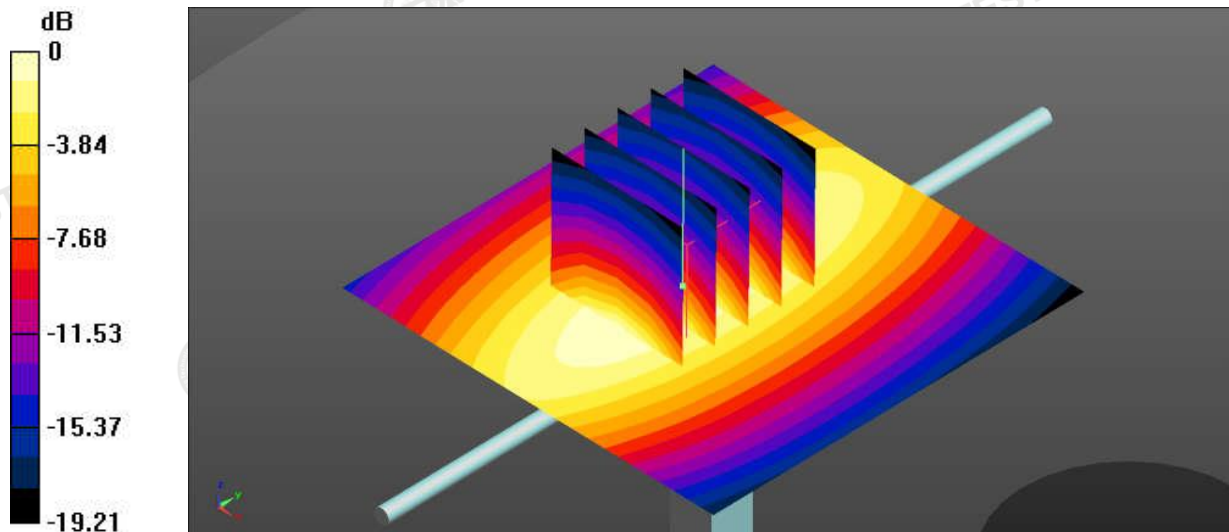Area Scan (5x18x1): Measured grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (measured) = 3.72 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 56.98 V/m ; Power Drift = -0.11 dB Peak SAR (extrapolated) = 3.52 W/kg **SAR(1 g) = 2.34 W/kg ; SAR(10 g) = 1.86 W/kg** Maximum value of SAR (measured) = 3.66 W/kg 0 dB = 3.66 W/kg

System Performance Check 835MHz 250mW

1800 MHz System Check

Date: 08/09/2024

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d158

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x10x1): Measured grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 12.98 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 74.65 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 23.5 W/kg

SAR(1 g) = 9.36 W/kg; SAR(10 g) = 5.14 W/kg

Maximum value of SAR (measured) = 11.4 W/kg

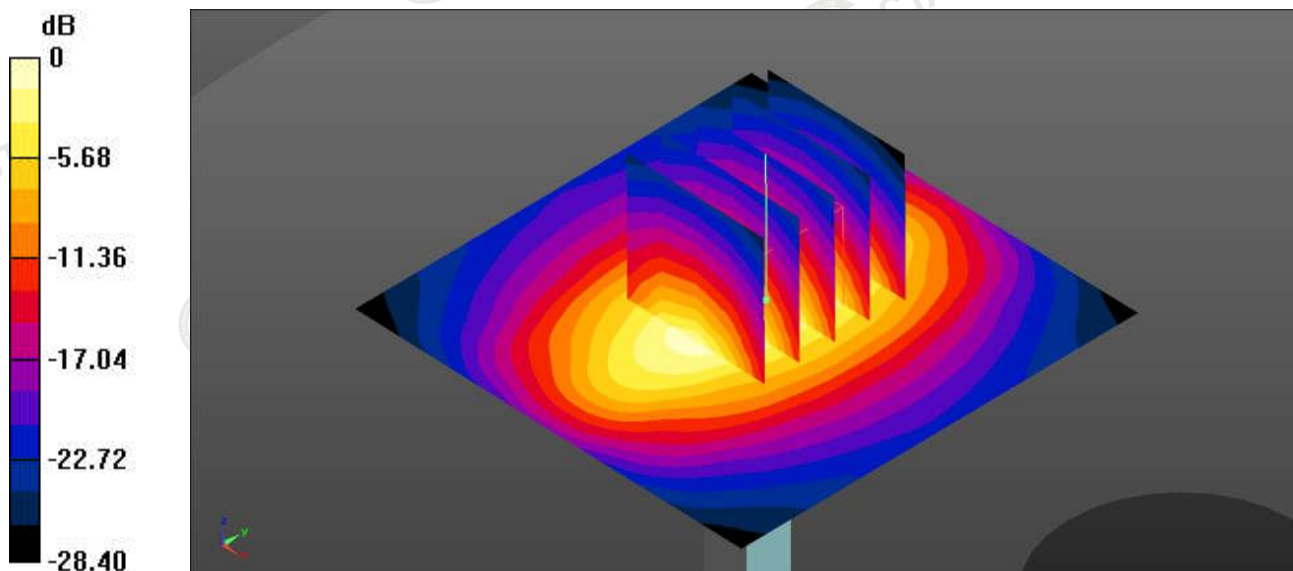

0 dB = 11.4 W/kg

System Performance Check 1800MHz 250mW

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d002

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 40.478$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x10x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 16.5 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 74.25 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 21.3 W/kg

SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.10 W/kg

Maximum value of SAR (measured) = 14.9 W/kg

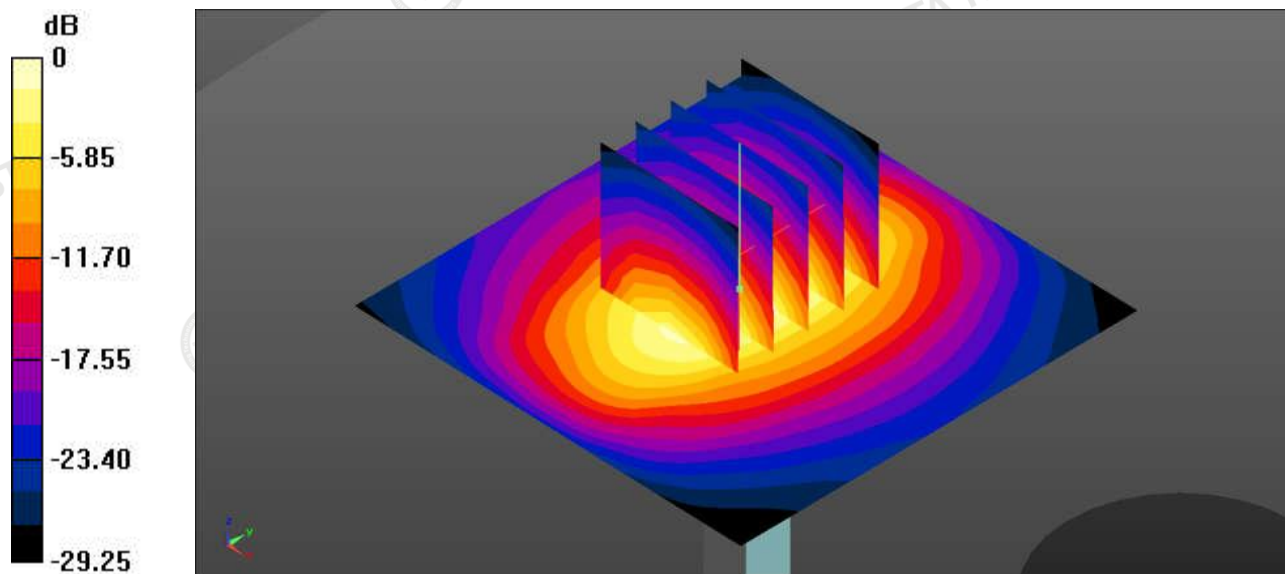

0 dB = 14.9 W/kg

System Performance Check 1900MHz 250mW

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 745

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 37.350$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.85, 7.85, 7.85); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (4x8x1): Measurement grid: dx=12 mm, dy=12 mm

Maximum value of SAR (measured) = 26.3 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.65 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 23.2 W/kg

SAR(1 g) = 12.67 W/kg; SAR(10 g) = 6.11 W/kg

Maximum value of SAR (measured) = 25.5 W/kg

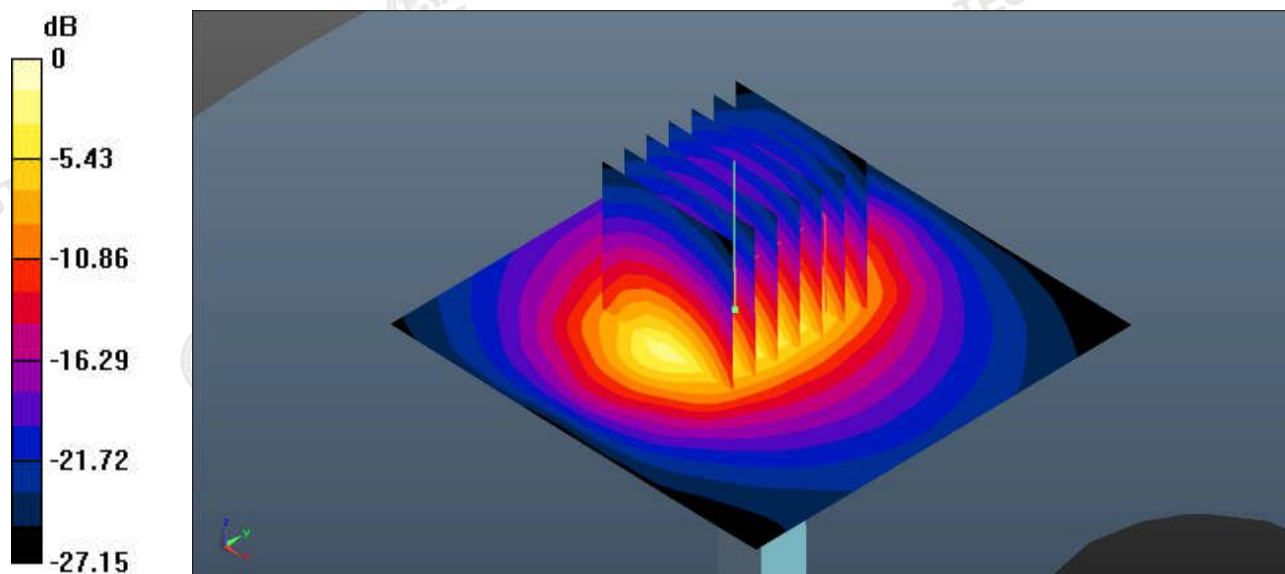

0 dB = 25.5 W/kg

System Performance Check 2450MHz 250mW

2600MHz System Check

Date: 08/15/2024

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1073

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 37.978$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (4x8x1): Measurement grid: dx=12 mm, dy=12 mm

Maximum value of SAR (measured) = 27.6 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 65.21 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 32.32 W/kg

SAR(1 g) = 14.14 W/kg; SAR(10 g) = 6.47 W/kg

Maximum value of SAR (measured) = 26.8 W/kg

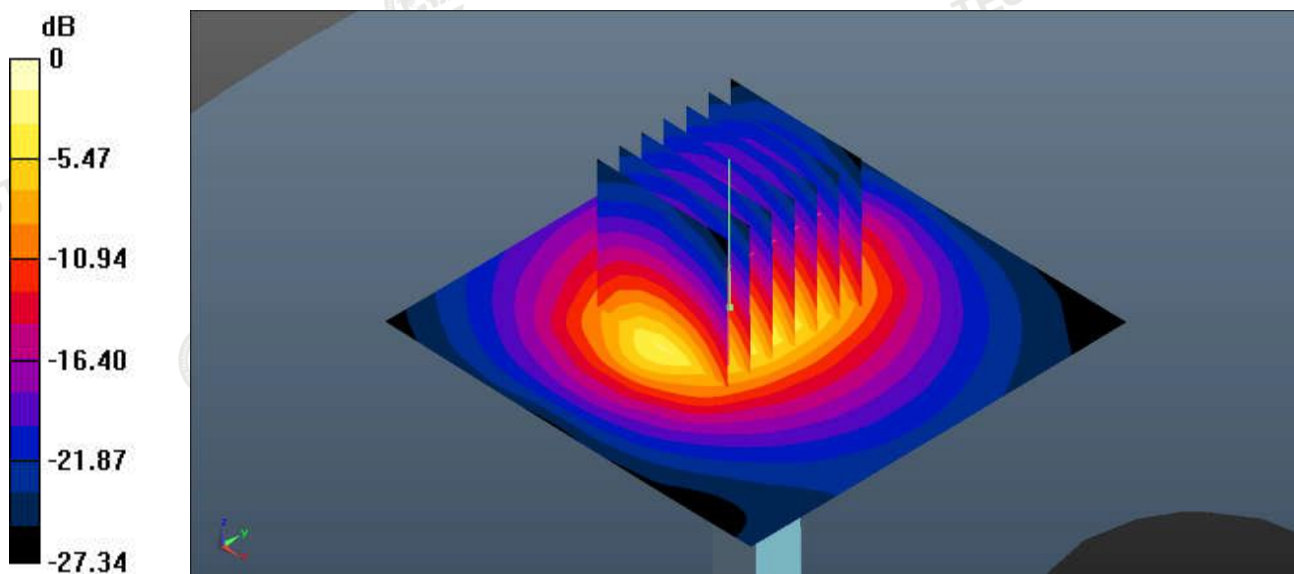

0 dB = 26.8 W/kg

System Performance Check 2600MHz 250mW

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1301

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.655$ S/m; $\epsilon_r = 36.123$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(5.55, 5.55, 5.55); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (5x5x1): Measured grid: dx=10 mm, dy=10 mm

Maximum value of SAR (measured) = 9.74 W/kg



Zoom Scan (7x7x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 32.54 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 7.62 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 9.65 W/kg

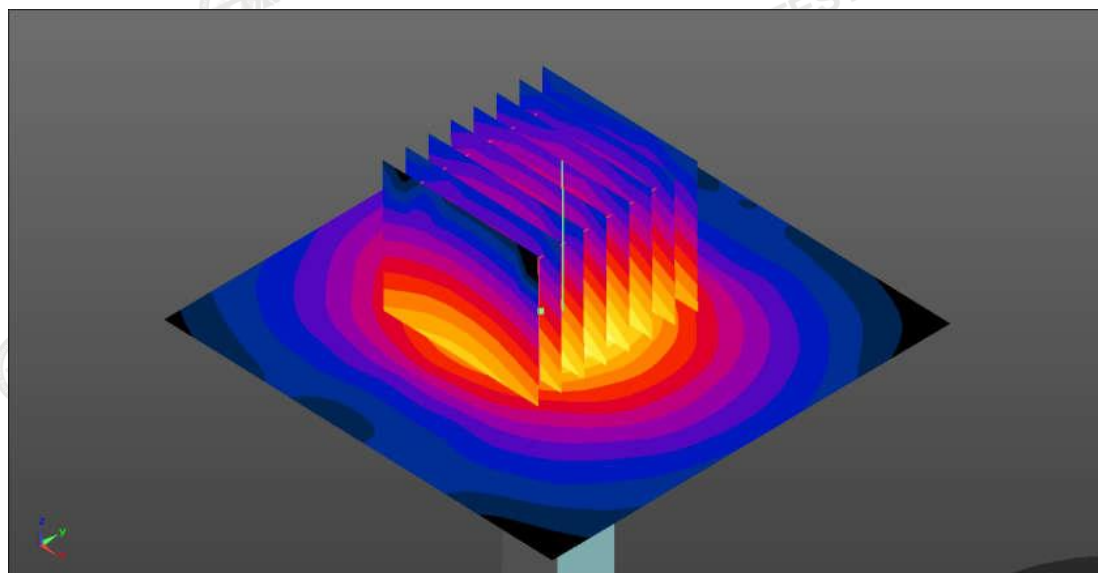

0 dB = 9.65 W/kg

System Performance Check 5250MHz 100mW

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1301

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.362$ S/m; $\epsilon_r = 34.89$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(4.96, 4.96, 4.96); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (5x5x1): Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (measured) = 15.6 W/kg


Zoom Scan (7x7x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 36.65 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 20.14 W/kg

SAR(1 g) = 7.98 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

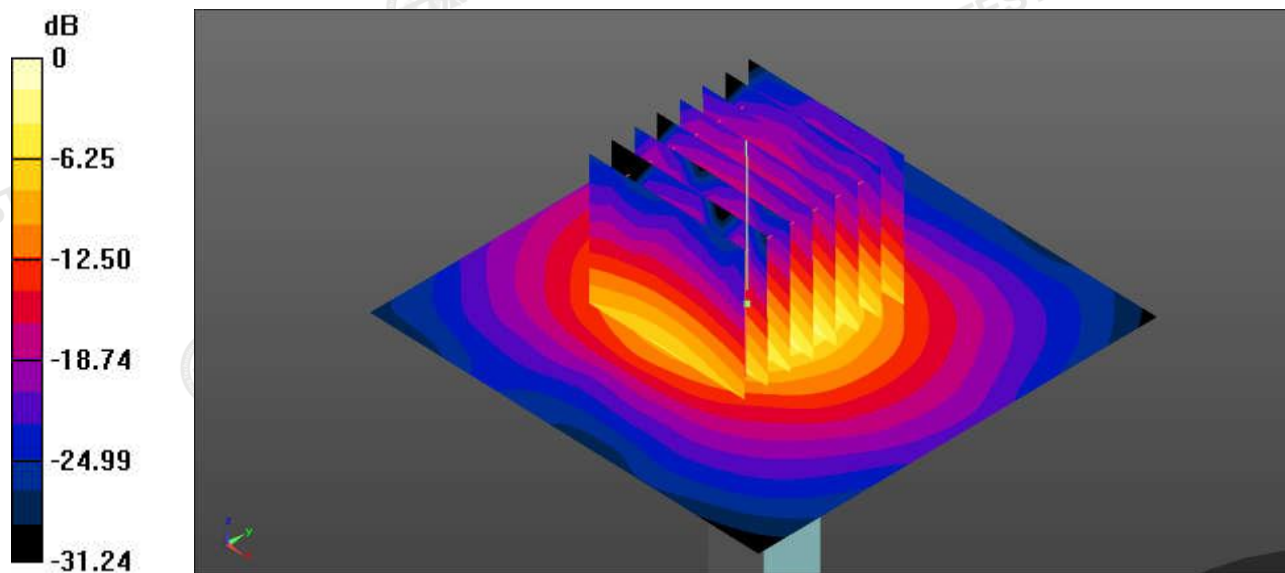

0 dB = 14.4 W/kg

System Performance Check 5600MHz 100mW

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1301

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.412$ S/m; $\epsilon_r = 33.777$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(4.98, 4.98, 4.98); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (5x5x1): Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (measured) = 17.7 W/kg



Zoom Scan (7x7x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 41.21 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 22.21 W/kg

SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 15.8 W/kg

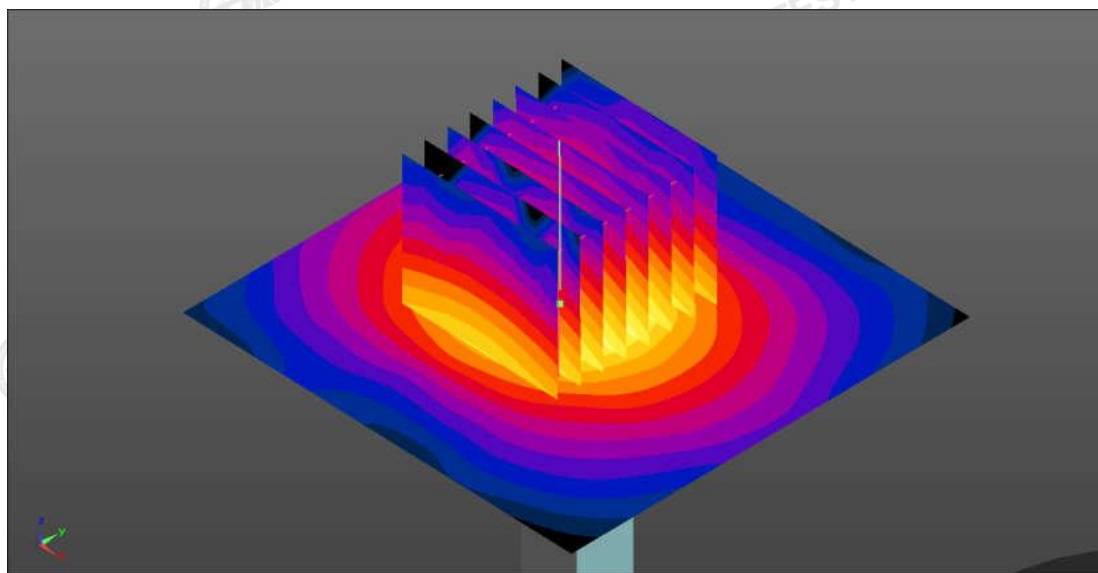

0 dB = 15.8 W/kg

System Performance Check 5750MHz 100mW

Appendix C. Plots of SAR Test Data

#1

Date: 08/08/2024

GSM850_GPRS(3 TX slots)_ Front of face_25mm_Ch190

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 40.598$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.611W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value =6.352 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

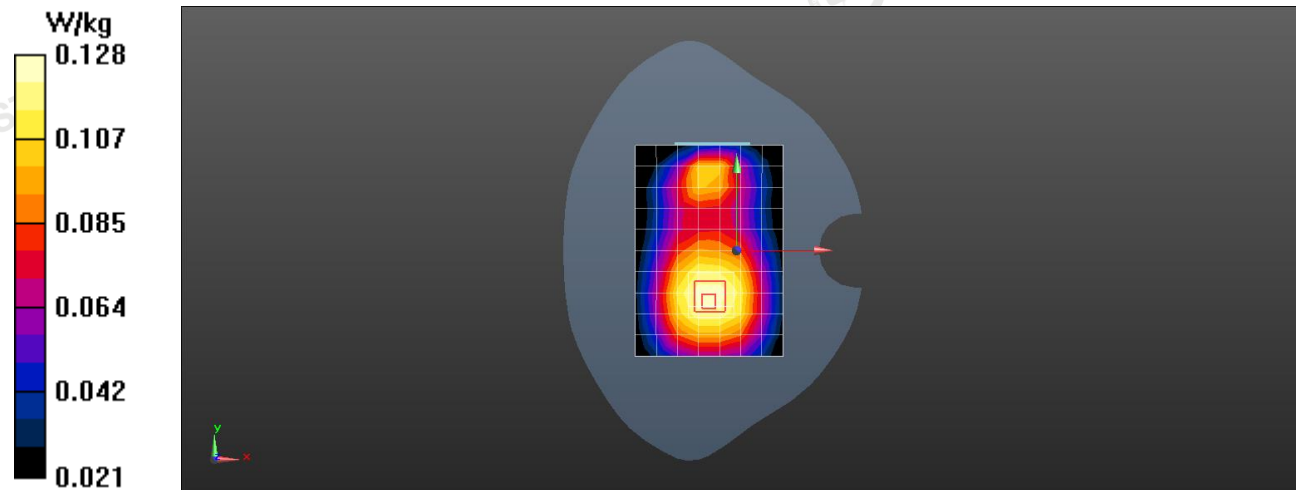

0 dB = 0.604 W/kg

#2

Date: 08/08/2024

GSM850_GPRS(3 TX slots)_ Body worn_0mm_Ch190

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 40.598$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.524 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.268 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.366 W/kg

Maximum value of SAR (measured) = 0.511 W/kg

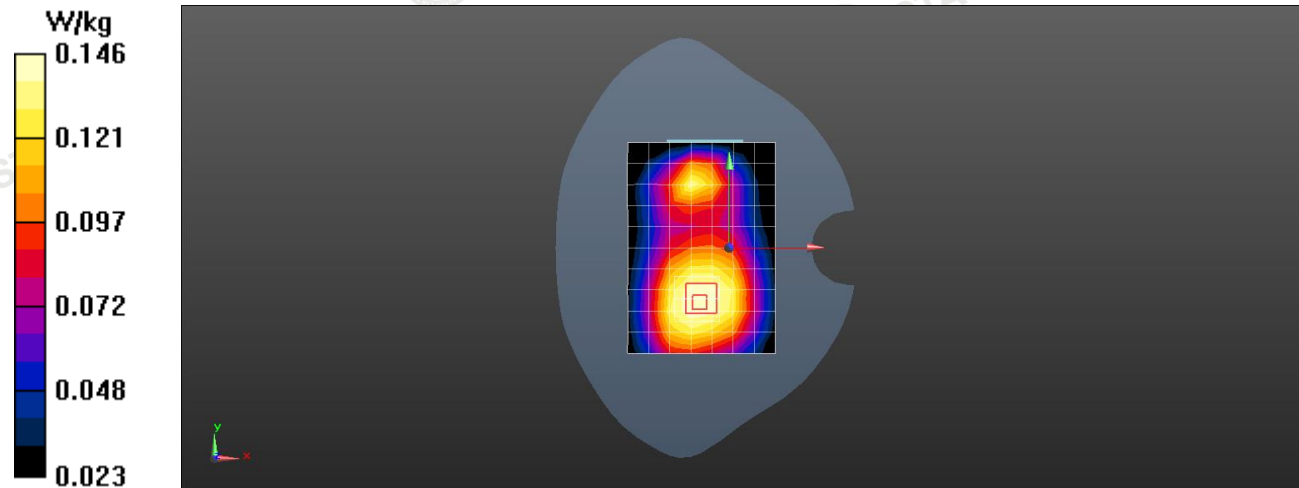

0 dB = 0.511 W/kg

#3

Date: 08/12/2024

PCS1900_GPRS(3 TX slots)_ Front of face _25mm_Ch512

Communication System: UID 0, Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.452 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.652 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.302 W/Kg; SAR(10 g) = 0.118 W/Kg

Maximum value of SAR (measured) = 0.446 W/Kg

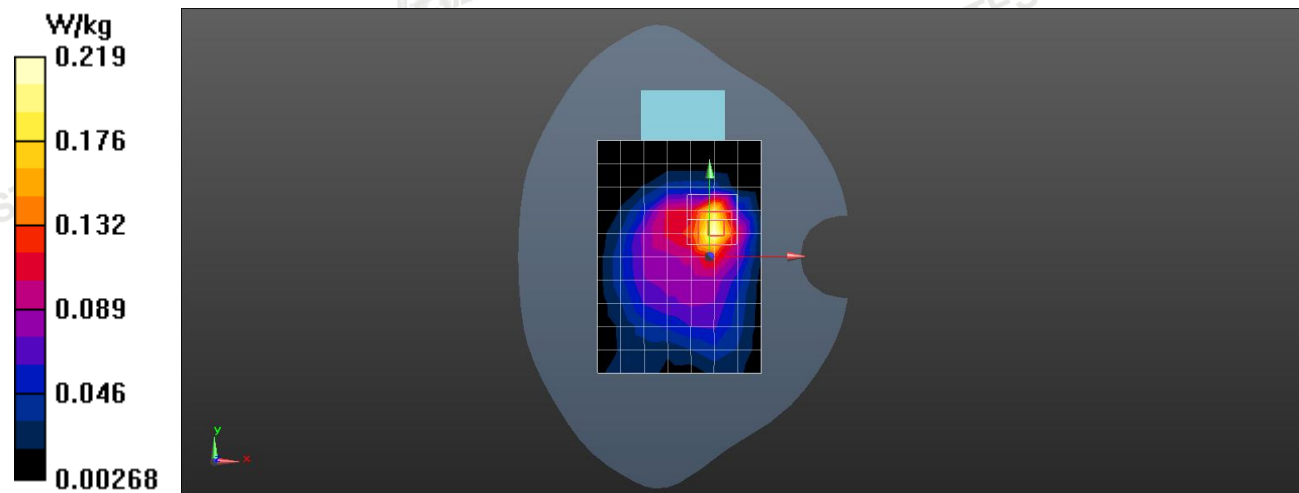

0 dB = 0.446 W/kg

#4

Date: 08/12/2024

PCS1900_GPRS(3 TX slots)_ Body worn _0mm_Ch512

Communication System: UID 0, Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.563 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.985 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.621 W/Kg; SAR(10 g) = 0.415 W/Kg

Maximum value of SAR (measured) = 0.547 W/Kg

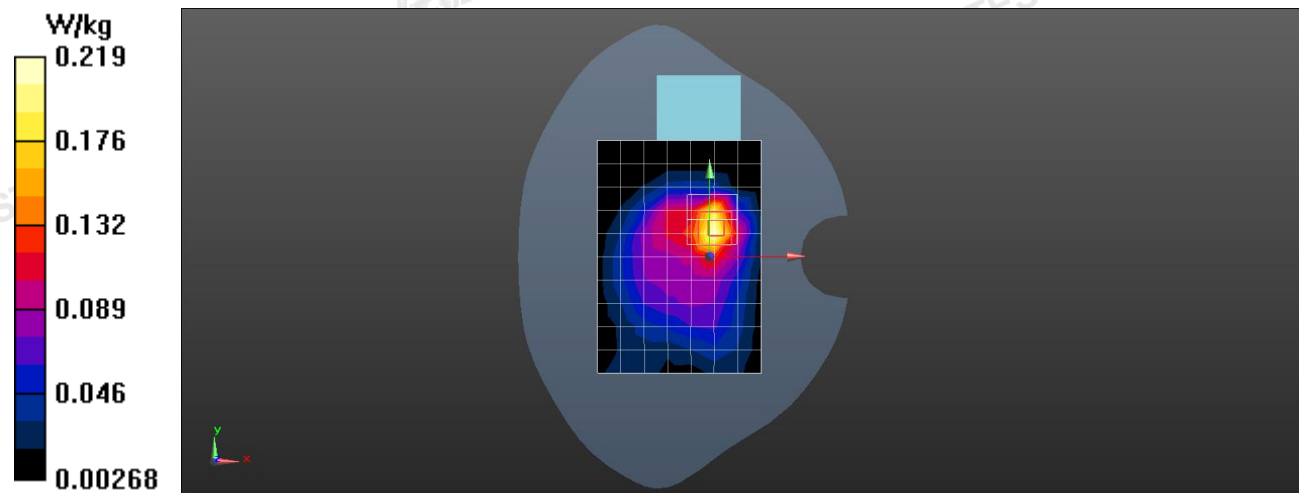

0 dB = 0.547 W/kg

#5

Date: 08/12/2024

WCDMA Band II_RMC 12.2K_ Front of face _25mm_Ch9400

Communication System: UID 0, Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.318$ S/m; $\epsilon_r = 39.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.362 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.215 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.125 W/Kg; SAR(10 g) = 0.084 W/Kg

Maximum value of SAR (measured) = 0.352 W/kg

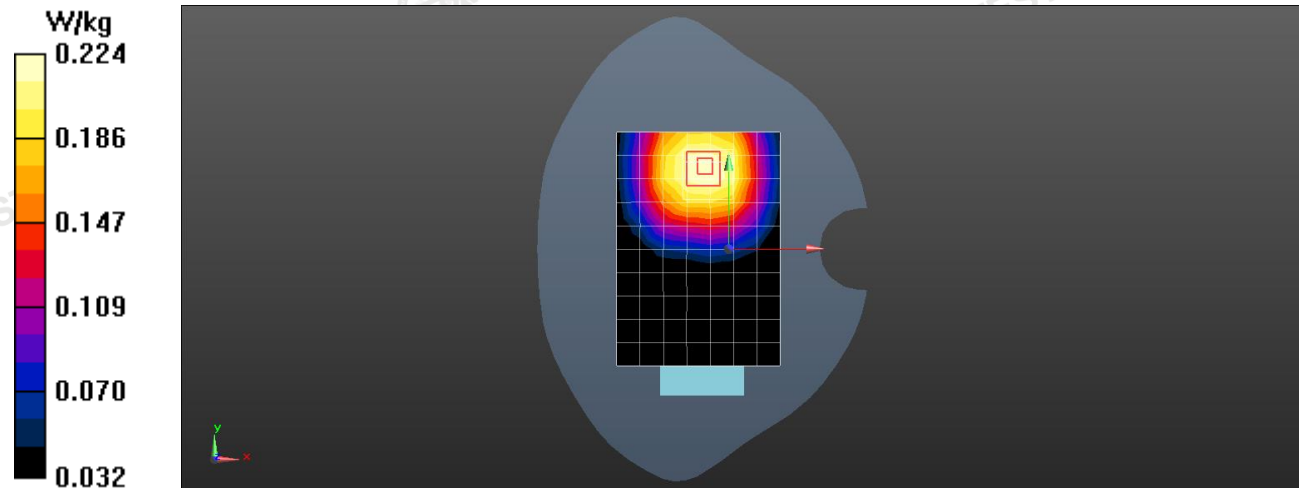

0 dB = 0.352 W/kg

#6

Date: 08/12/2024

WCDMA Band II_RMC 12.2K_ Body worn _0mm_Ch9400

Communication System: UID 0, Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.318$ S/m; $\epsilon_r = 39.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.741 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.126 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.469 W/Kg; SAR(10 g) = 0.222 W/Kg

Maximum value of SAR (measured) = 0.732 W/kg

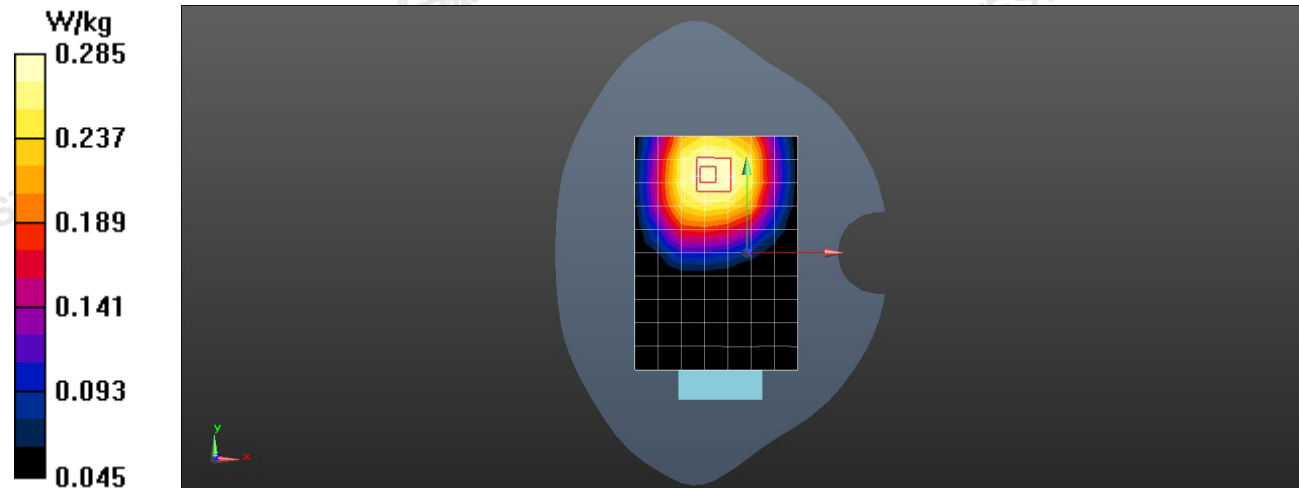

0 dB = 0.732 W/kg

#7

Date: 08/09/2024

WCDMA Band IV_ RMC 12.2K_ Front of face _25mm_Ch1513

Communication System: UID 0, Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 40.698$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.115 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.004 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.333 W/Kg

SAR(1 g) = 0.441 W/Kg; SAR(10 g) = 0.285 W/Kg

Maximum value of SAR (measured) = 0.106 W/kg

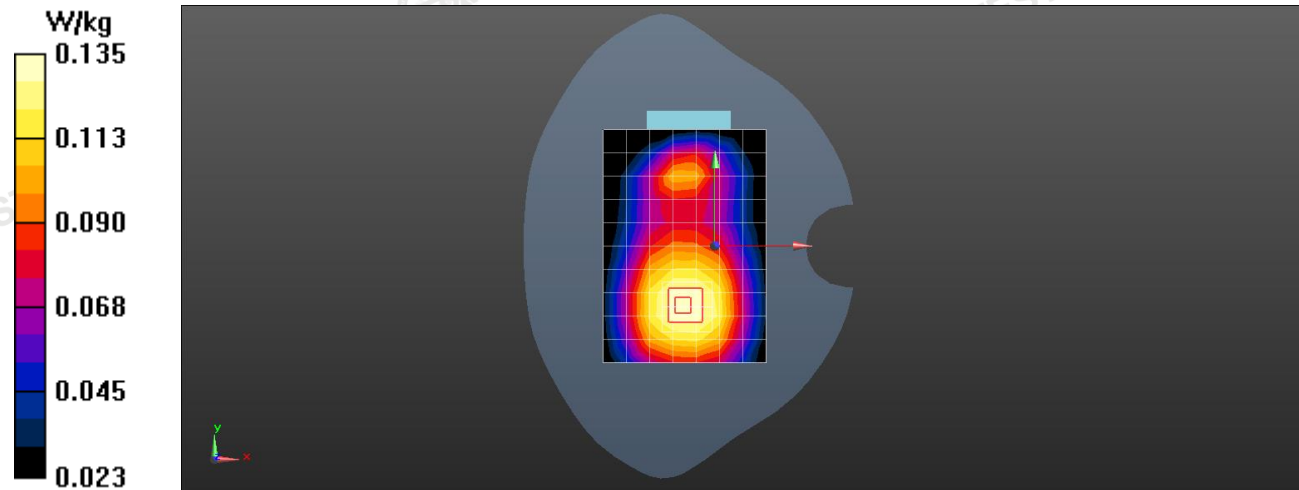

0 dB = 0.106 W/kg

#8

Date: 08/09/2024

WCDMA Band IV_ RMC 12.2K_ Body worn _0mm_Ch1513

Communication System: UID 0, Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 40.698$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.185 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.632 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.302 W/Kg

SAR(1 g) = 0.715 W/Kg; SAR(10 g) = 0.502 W/Kg

Maximum value of SAR (measured) = 0.162 W/kg

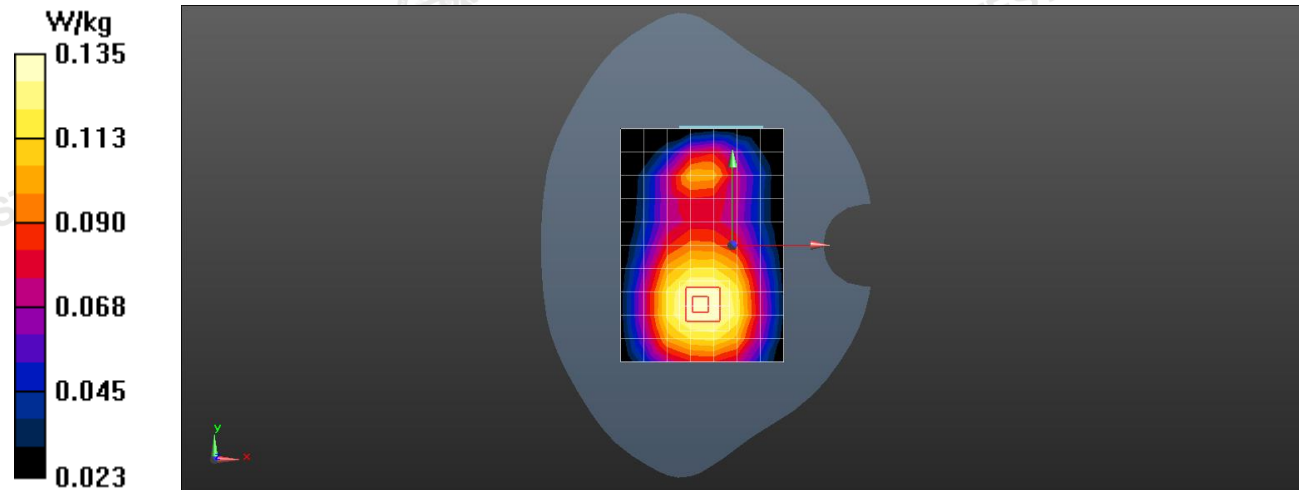

0 dB = 0.162 W/kg

#9

Date: 08/08/2024

WCDMA Band V_ RMC 12.2K_ Front of face _25mm_Ch4182

Communication System: UID 0, Generic WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 40.251$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.698 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.774 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.635 W/Kg

SAR(1 g) = 0.114 W/Kg; SAR(10 g) = 0.052 W/Kg

Maximum value of SAR (measured) = 0.679 W/kg

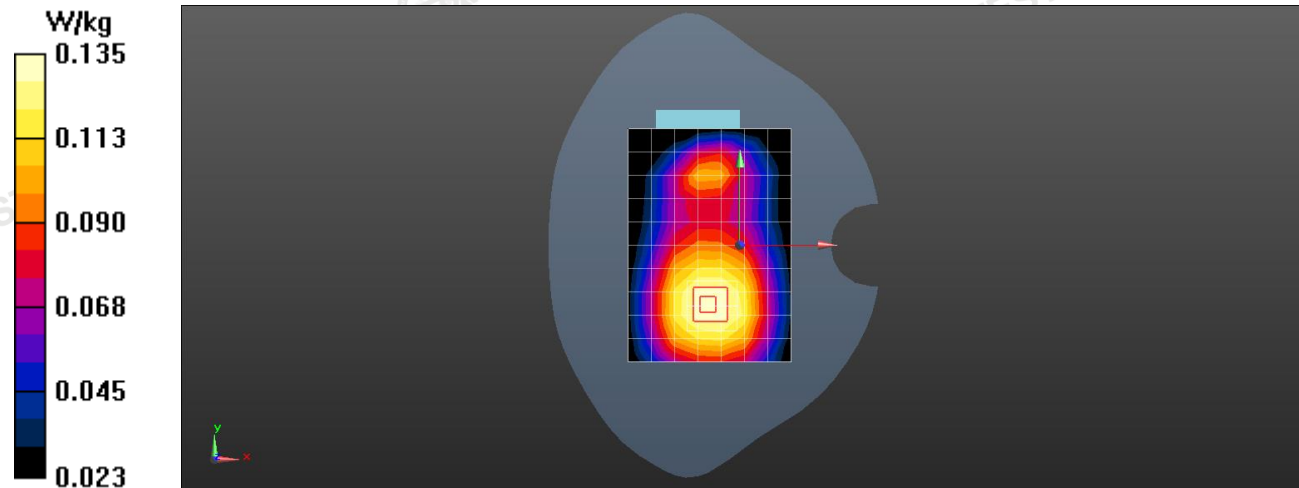

0 dB = 0.679 W/kg

#10

Date: 08/08/2024

WCDMA Band V_ RMC 12.2K_ Body worn _0mm_Ch4182

Communication System: UID 0, Generic WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 40.251$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.302 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.251 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.222 W/Kg

SAR(1 g) = 0.410 W/Kg; SAR(10 g) = 0.302 W/Kg

Maximum value of SAR (measured) = 0.289 W/kg

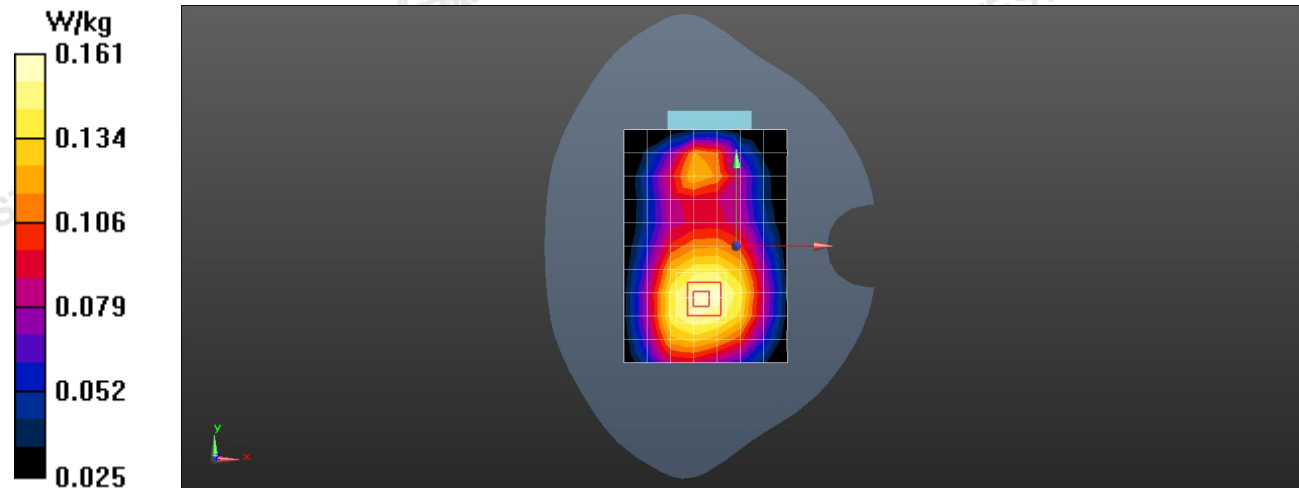

0 dB = 0.289 W/kg

#11

Date: 08/12/2024

LTE Band 2_20MHz/1RB#49_ Front of face _25mm _Ch19100

Communication System: UID 0, Generic LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.346$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.451 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.658V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.441 W/kg

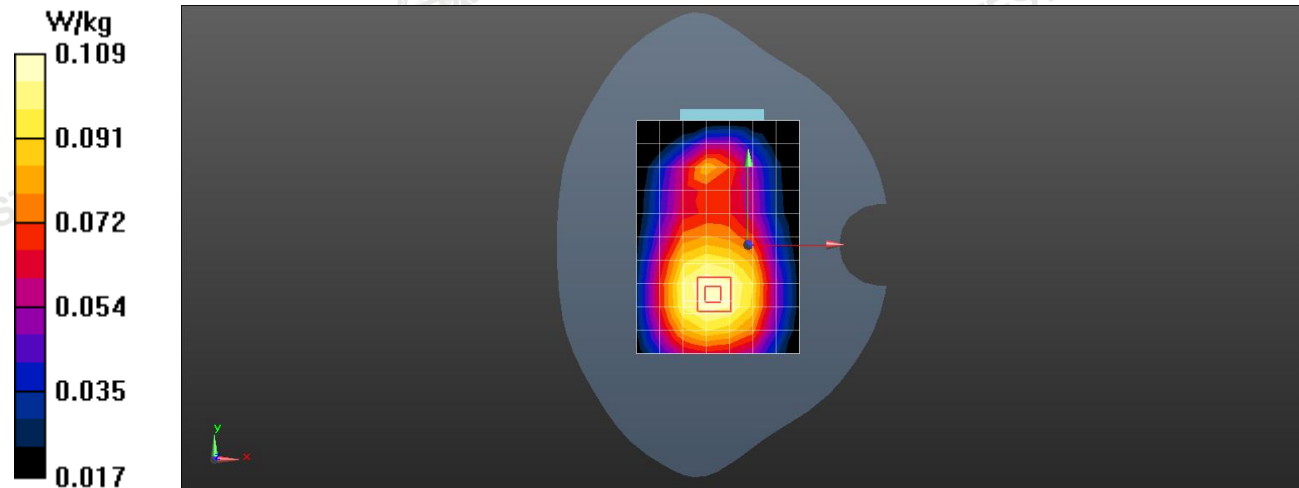

0 dB = 0.441 W/kg

#12

Date: 08/12/2024

LTE Band 2_20MHz/1RB#49_ Body worn _0mm _Ch19100

Communication System: UID 0, Generic LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.346$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.361 W/kg



Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.012V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.367 W/kg

Maximum value of SAR (measured) = 0.355 W/kg

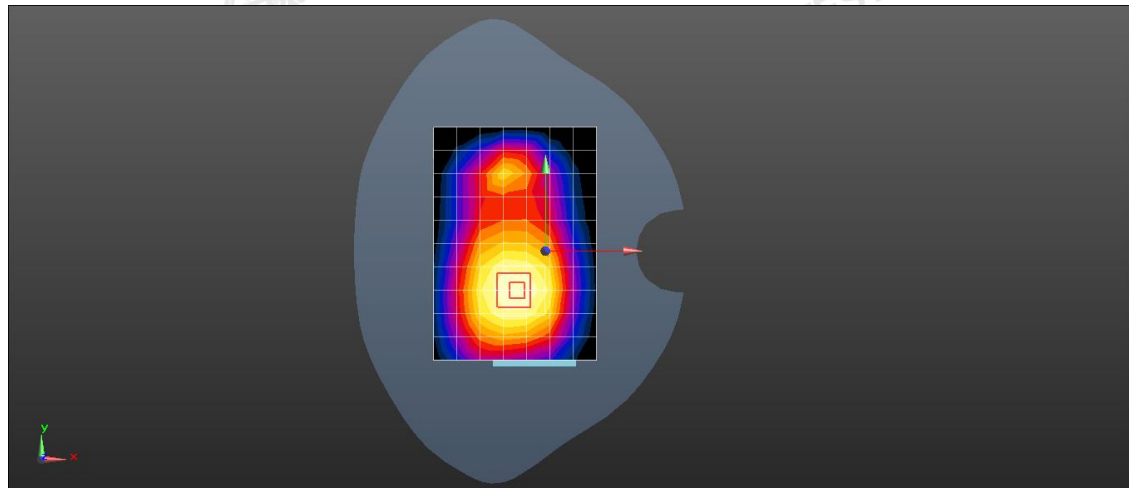

0 dB = 0.355 W/kg

#13

Date: 08/08/2024

LTE Band 5_10MHz/1RB#49_ Front of face _25mm_Ch20525

Communication System: UID 0, Generic LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 40.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.258 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.110 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.247 W/kg

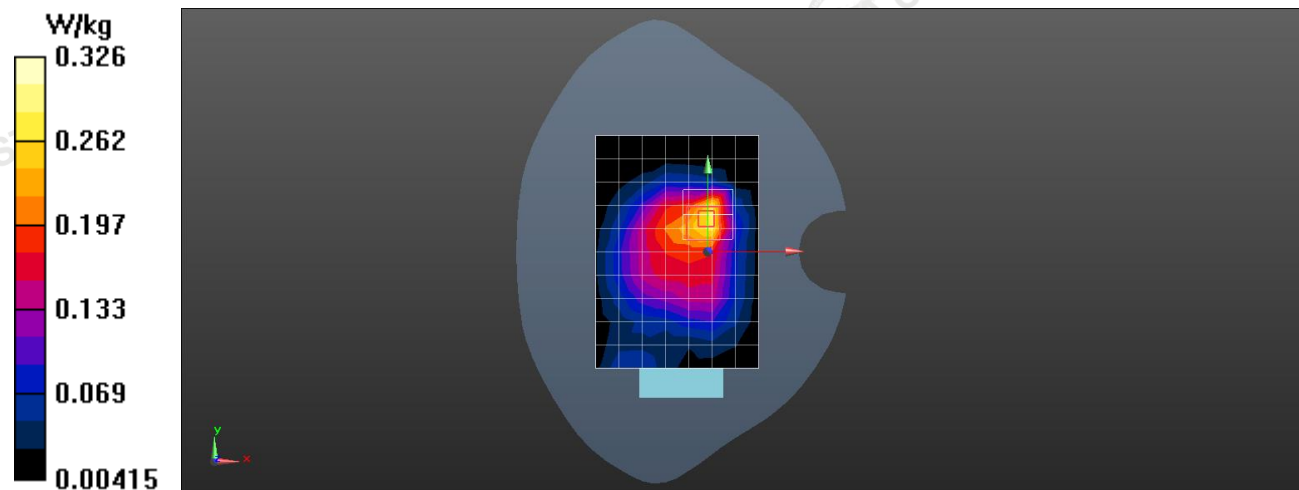

0 dB = 0.247 W/kg

#14

Date: 08/08/2024

LTE Band 5_10MHz/1RB#49_ Body worn _0mm_Ch20525

Communication System: UID 0, Generic LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 40.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.475 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.262 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.445 W/kg

Maximum value of SAR (measured) = 0.466 W/kg

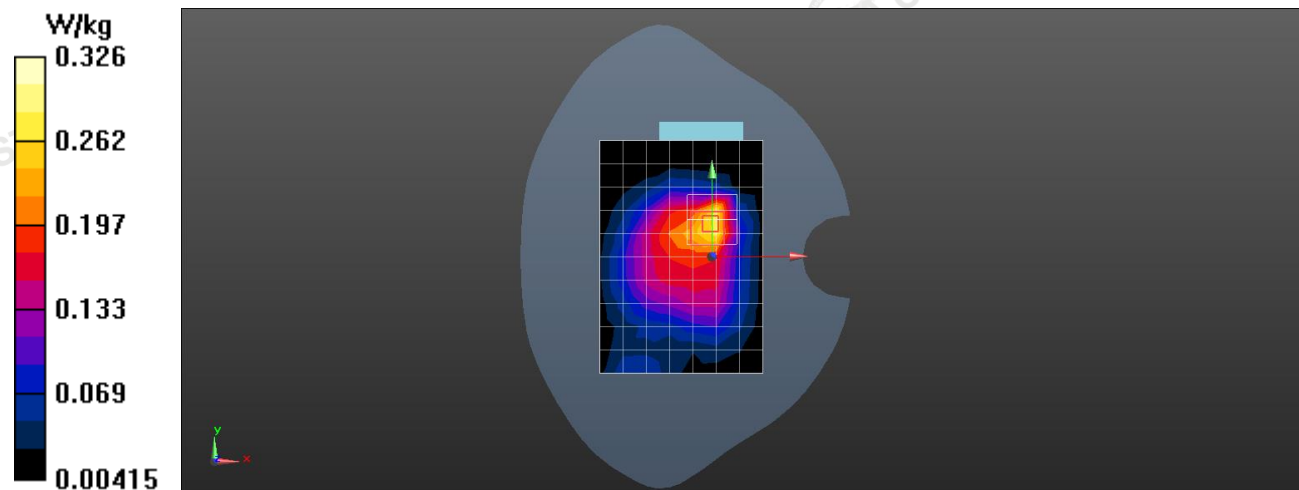

0 dB = 0.466 W/kg

#15

Date: 08/15/2024

LTE Band 7_20MHz/1RB#0_ Front of face _25mm_Ch21100

Communication System: UID 0, Generic LTE (0); Frequency 2535.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.866$ S/m; $\epsilon_r = 38.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (9x13x1): Measurement grid: dx=12 mm, dy=12 mm

Maximum value of SAR (measured) = 0.662 W/kg


Front /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.21 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.654 W/kg

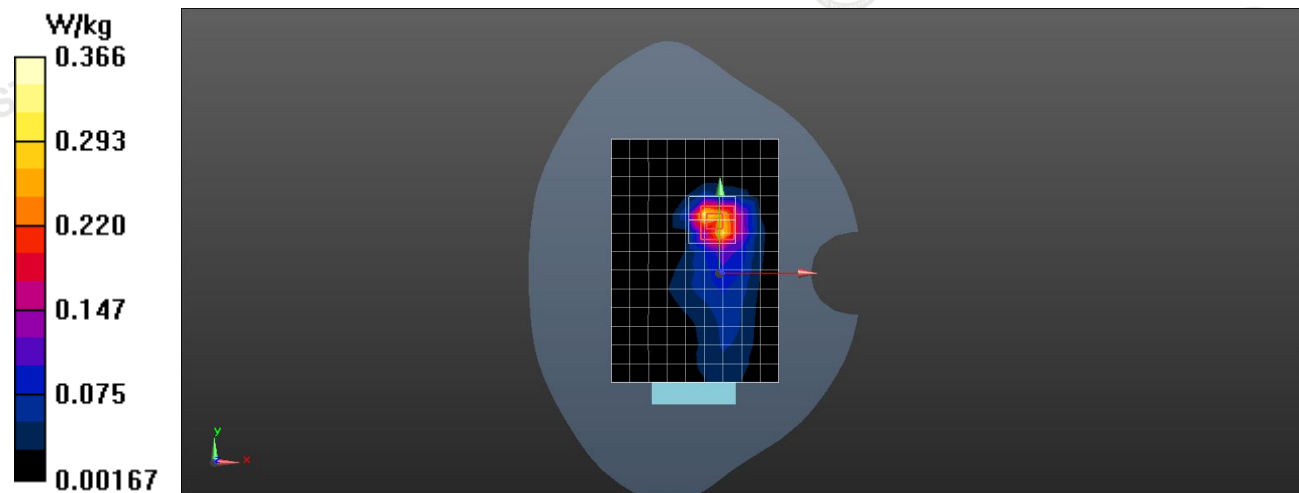

0 dB = 0.654 W/kg

#16

Date: 08/15/2024

LTE Band 7_20MHz/1RB#0_ Body worn _0mm_Ch21100

Communication System: UID 0, Generic LTE (0); Frequency 2535.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.866$ S/m; $\epsilon_r = 38.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (9x13x1): Measurement grid: dx=12 mm, dy=12 mm

Maximum value of SAR (measured) = 0.214 W/kg


Front /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.321 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.98 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.205 W/kg

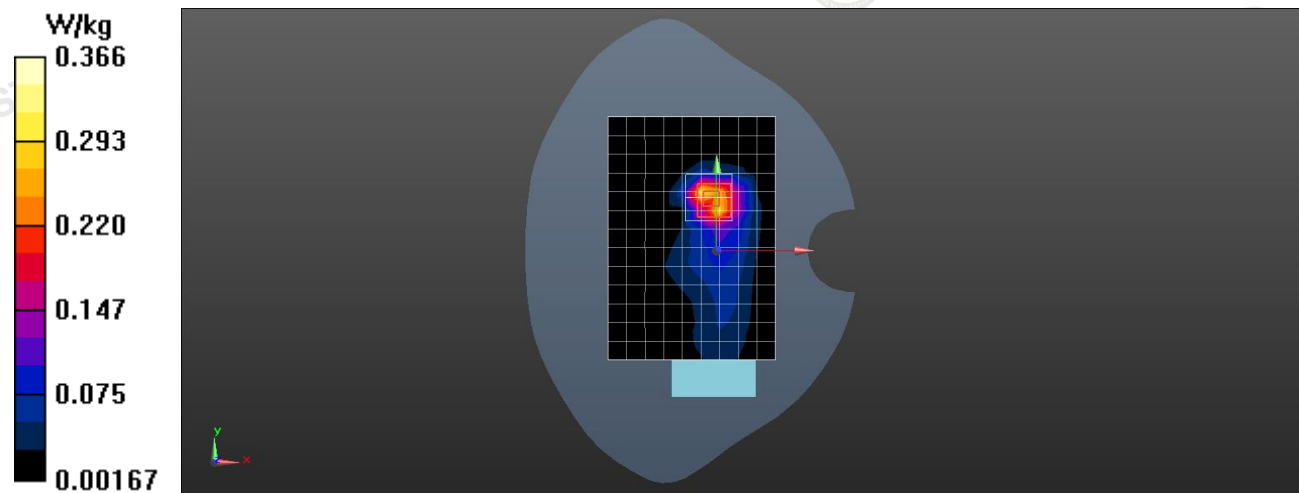

0 dB = 0.205 W/kg

#17

Date: 08/07/2024

LTE Band 12_10MHz/1RB#24_ Front of face _25mm_Ch23095

Communication System: UID 0, Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 41.669$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.58, 10.58, 10.58); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (9x13x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 1.69 W/kg



Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.98 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.448W/kg; SAR(10 g) = 0.327 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

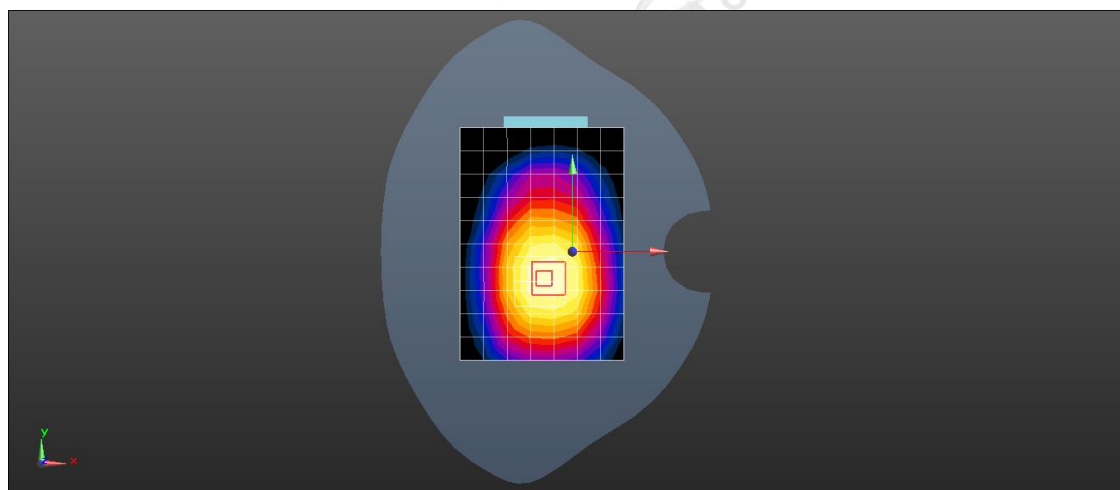

0 dB = 1.55 W/kg

#18

Date: 08/07/2024

LTE Band 12_10MHz/1RB#24_ Body worn _0mm_Ch23095

Communication System: UID 0, Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 41.669$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.58, 10.58, 10.58); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (9x13x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 1.36 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.875 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 4.45 W/kg

SAR(1 g) = 0.722W/kg; SAR(10 g) = 0.536 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

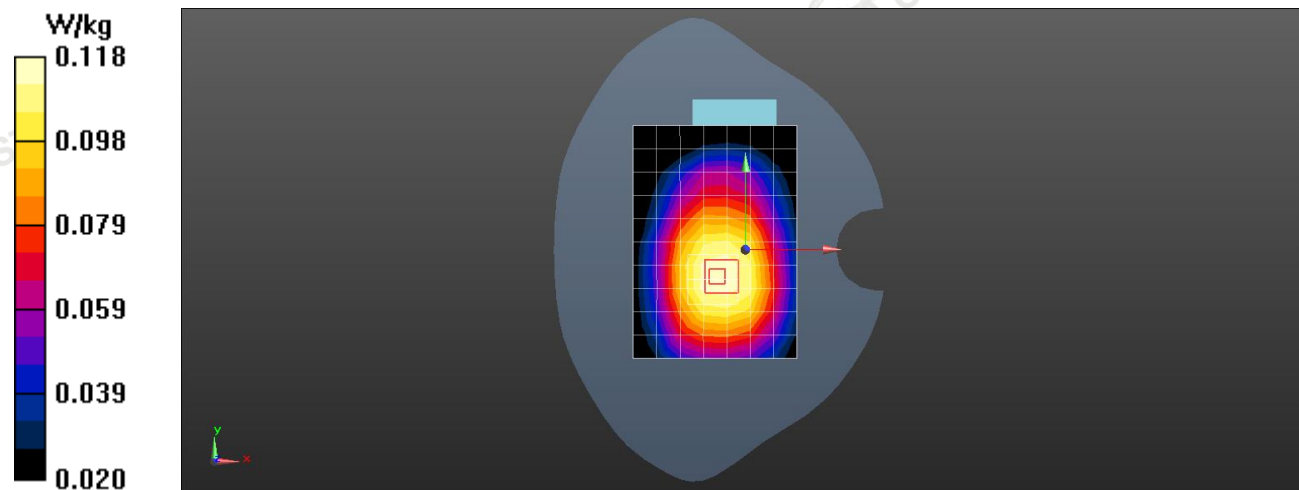

0 dB = 1.19 W/kg

#19

Date: 08/07/2024

LTE Band 13_10MHz/1RB#24_ Front of face _25mm_Ch23230


Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.847 \text{ S/m}$; $\epsilon_r = 41.221$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.58, 10.58, 10.58); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

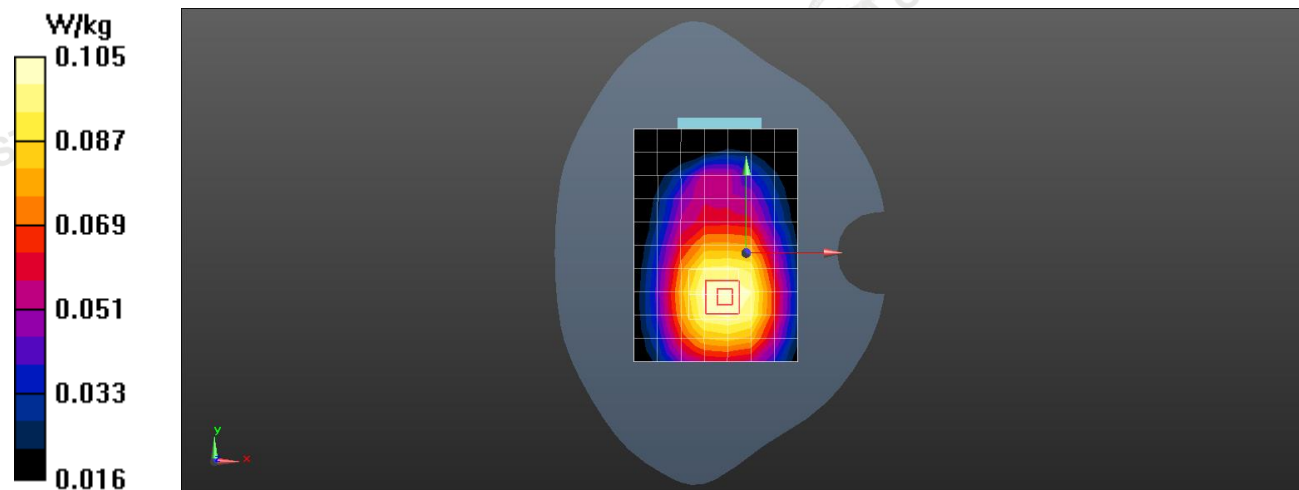Front /Area Scan (9x13x1): Measurement grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (measured) = 2.96 W/kg **Front /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.254 V/m ; Power Drift = 0.02 dB Peak SAR (extrapolated) = 1.11 W/kg **SAR(1 g) = 0.187 W/kg ; SAR(10 g) = 0.110 W/kg** Maximum value of SAR (measured) = 2.85 W/kg 0 dB = 2.85 W/kg

#20

Date: 08/07/2024

LTE Band 13_10MHz/1RB#24_ Body worn _0mm_Ch23230

Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.847 \text{ S/m}$; $\epsilon_r = 41.221$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.58, 10.58, 10.58); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (9x13x1): Measurement grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$

Maximum value of SAR (measured) = 2.36 W/kg


Front /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.85 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 2.25 W/kg

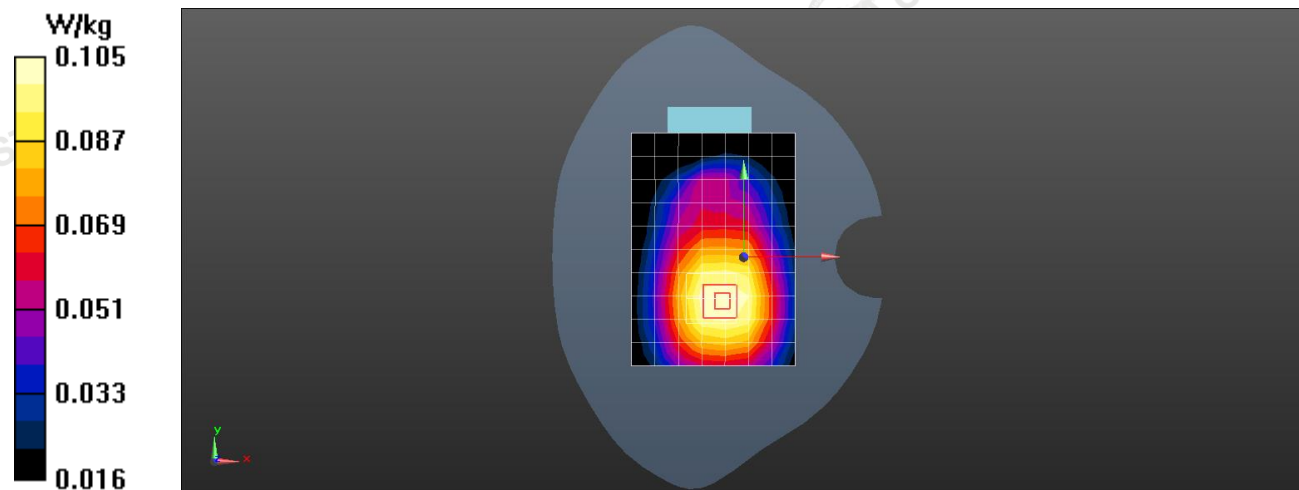

0 dB = 2.25 W/kg

#21

Date: 08/09/2024

LTE Band 66_20MHz/1RB#49_ Front of face _25mm_Ch132072

Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.775$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.745 W/Kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value =4.858 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.305 W/Kg; SAR(10 g) = 0.148 W/Kg

Maximum value of SAR (measured) = 0.754 W/Kg

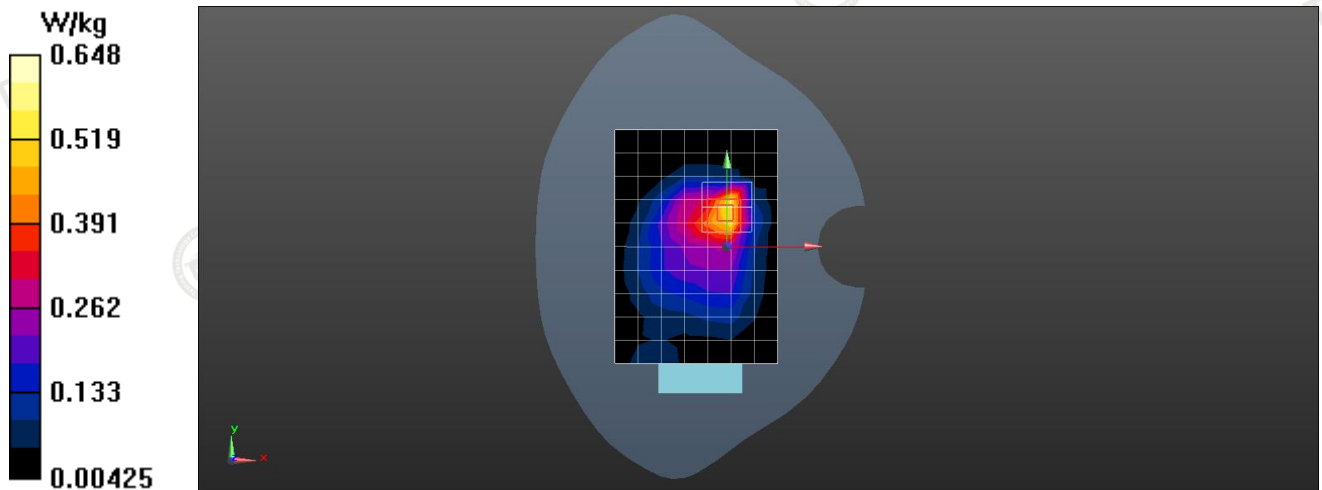

0 dB = 0.754 W/kg

#22

Date: 08/09/2024

LTE Band 66_20MHz/1RB#49_ Body worn _0mm_Ch132072

Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.775$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: dx=15 mm, dy=15 mm

Maximum value of SAR (measured) = 0.332 W/Kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value =4.858 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.623 W/Kg; SAR(10 g) = 0.479 W/Kg

Maximum value of SAR (measured) = 0.319 W/Kg

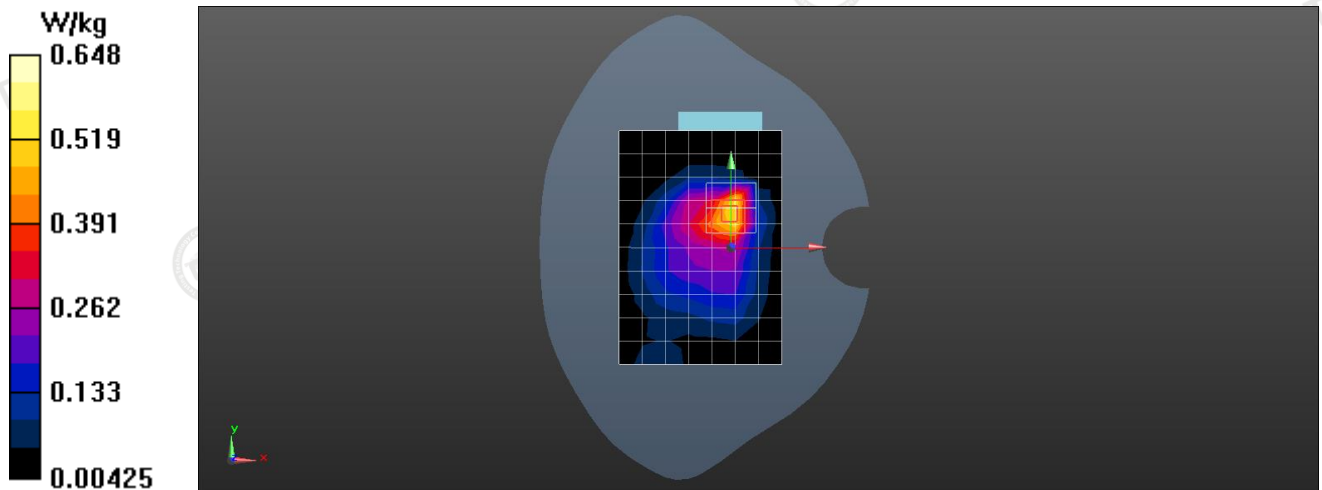

0 dB = 0.319 W/kg

#23

Date: 08/14/2024

WIFI2.4G_DSSS_ Front of face _25mm_Ch1

Communication System: UID 0, Generic WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.85, 7.85, 7.85); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=12 mm, dy=12 mm

Maximum value of SAR (measured) = 2.77 W/kg


Front /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.632 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 2.66 W/kg

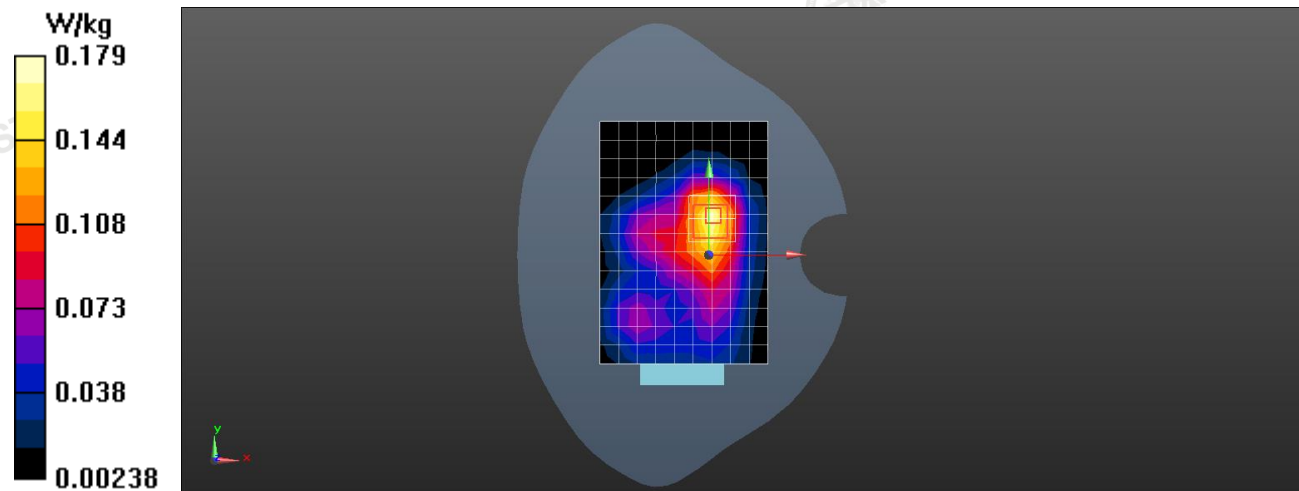

0 dB = 2.66 W/kg

#24

Date: 08/14/2024

WIFI2.4G_DSSS_ Body worn _0mm_Ch1

Communication System: UID 0, Generic WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.85, 7.85, 7.85); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front /Area Scan (8x11x1): Measurement grid: dx=12 mm, dy=12 mm

Maximum value of SAR (measured) = 5.63 W/kg


Front /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.258 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 4.52 W/kg

SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 5.59 W/kg

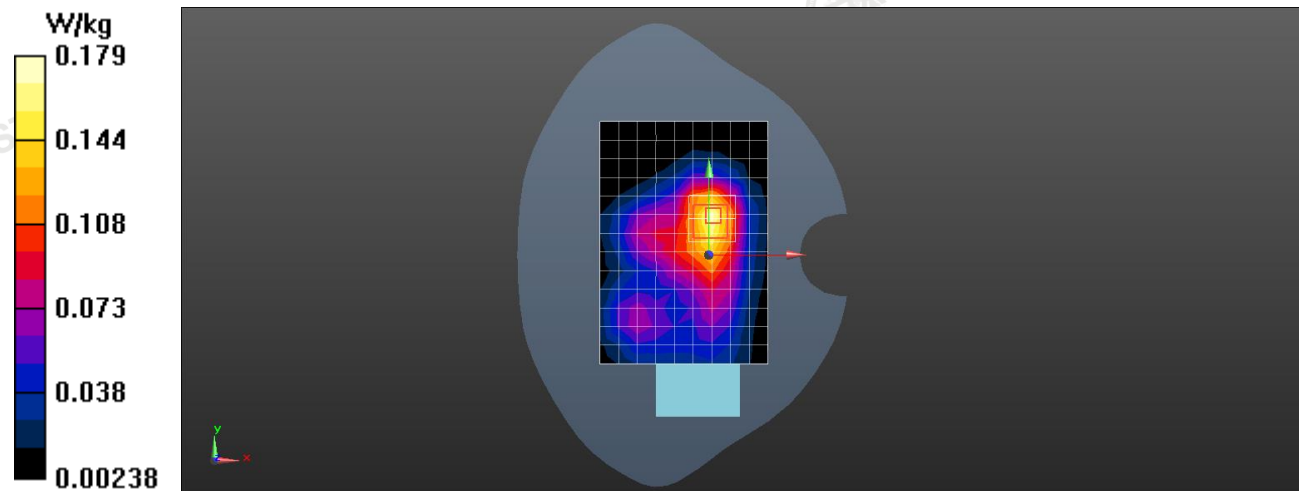

0 dB = 5.59 W/kg

#25

Date: 08/23/2024

WLAN 5.2GHz_802.11n40_ Front of face _25mm_CH38

Communication System: UID 0, Generic WLAN (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.565$ S/m; $\epsilon_r = 36.778$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(5.55, 5.55, 5.55); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.287 W/Kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.521 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.268 W/Kg

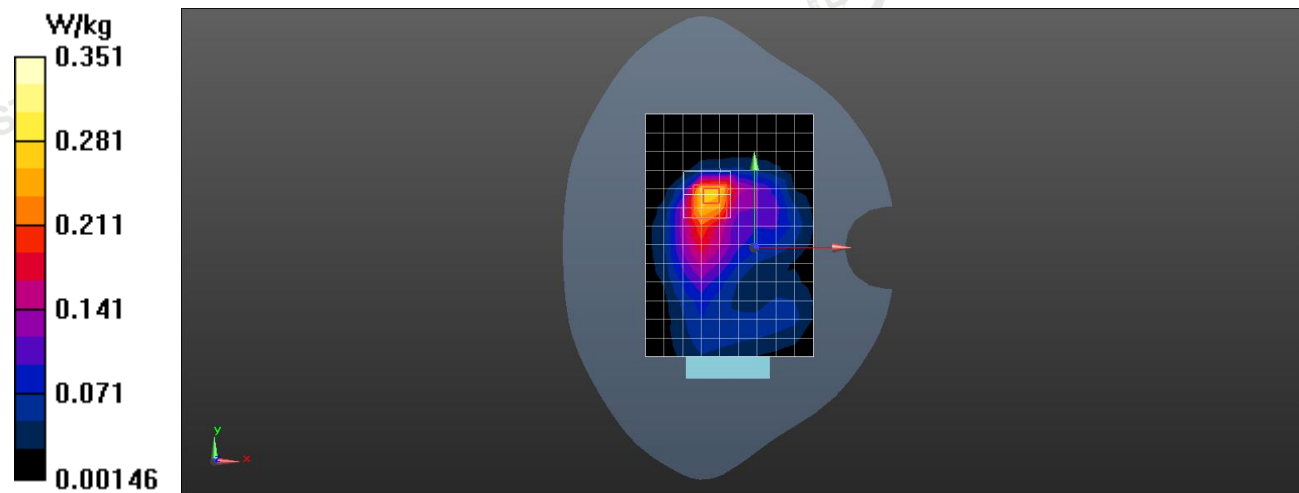

0 dB = 0.268 W/kg

#26

Date: 08/23/2024

WLAN 5.2GHz_802.11n40_ Body worn _0mm_CH38

Communication System: UID 0, Generic WLAN (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.565$ S/m; $\epsilon_r = 36.778$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(5.55, 5.55, 5.55); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.444 W/Kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.745 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 0.432 W/Kg

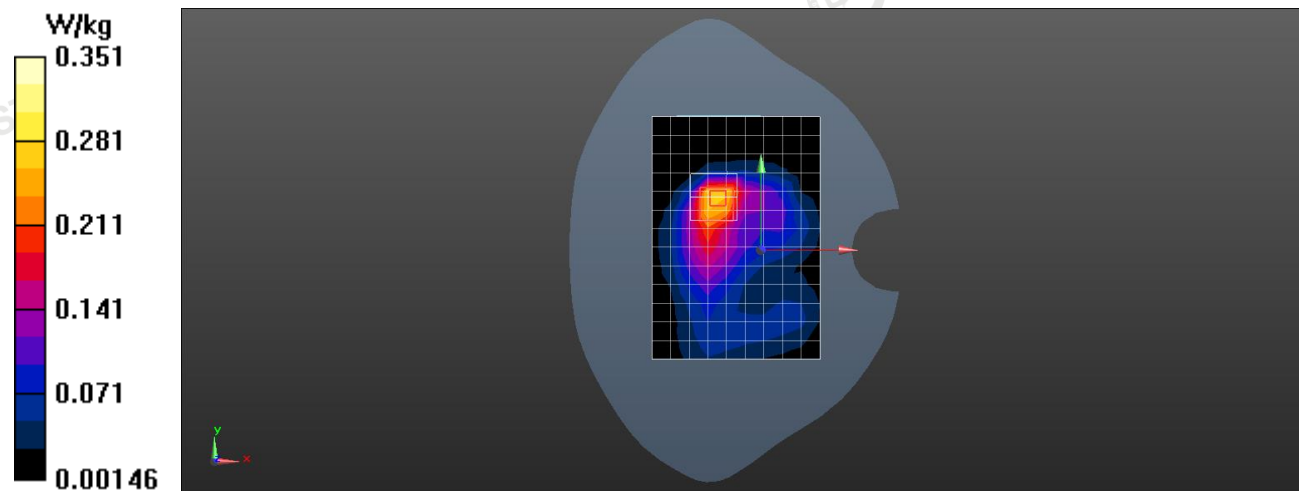

0 dB = 0.432 W/kg

#27

Date: 08/23/2024

WLAN 5.3GHz_802.11ac40_ Front of face _25mm_CH54

Communication System: UID 0, Generic WLAN (0); Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.887$ S/m; $\epsilon_r = 34.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(5.55, 5.55, 5.55); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.635 W/Kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.652 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.96 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.622 W/Kg

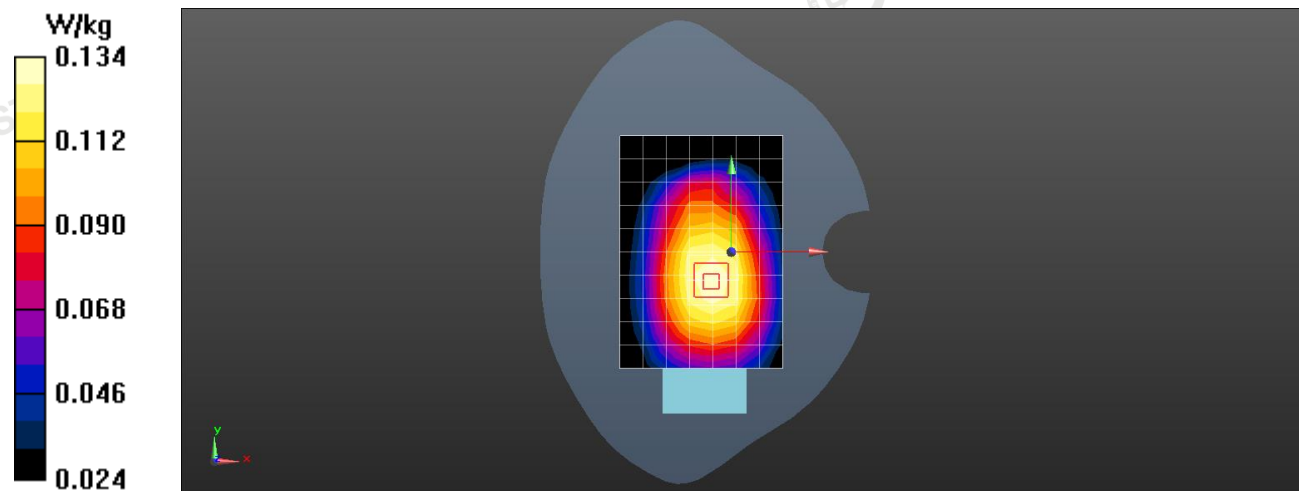

0 dB = 0.622 W/kg

#28

Date: 08/23/2024

WLAN 5.3GHz_802.11ac40_ Body worn _0mm_CH54

Communication System: UID 0, Generic WLAN (0); Frequency: 5270 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.887$ S/m; $\epsilon_r = 34.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(5.55, 5.55, 5.55); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.521 W/Kg



Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value =3.125 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) =2.41 W/kg

SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.508 W/Kg

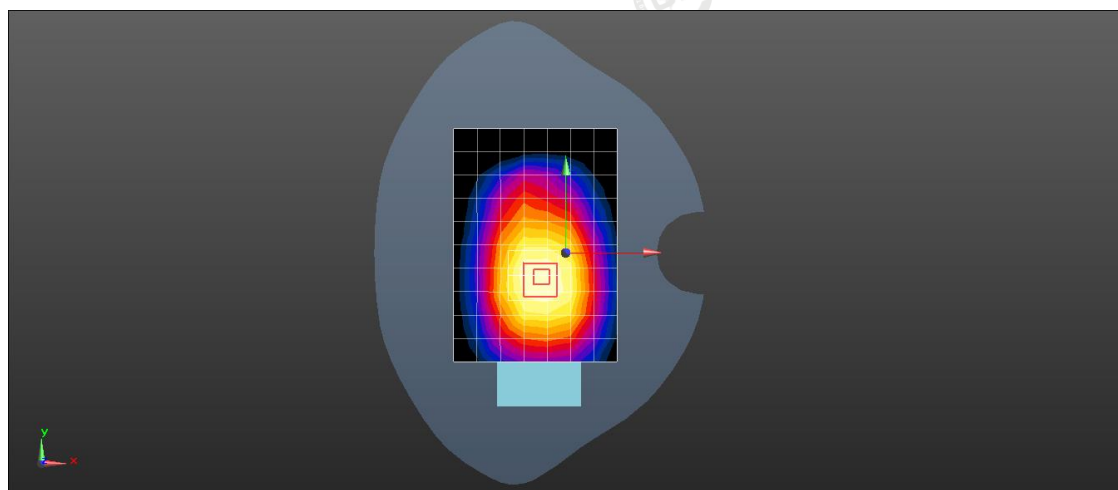

0 dB = 0.508 W/kg

#29

Date: 08/23/2024

WLAN 5.5GHz_802.11n40_ Front of face _25mm_CH134

Communication System: UID 0, Generic WLAN (0); Frequency: 5670 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.124$ S/m; $\epsilon_r = 35.120$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(4.965, 4.96, 4.96); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.221 W/Kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.65 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.215 W/Kg

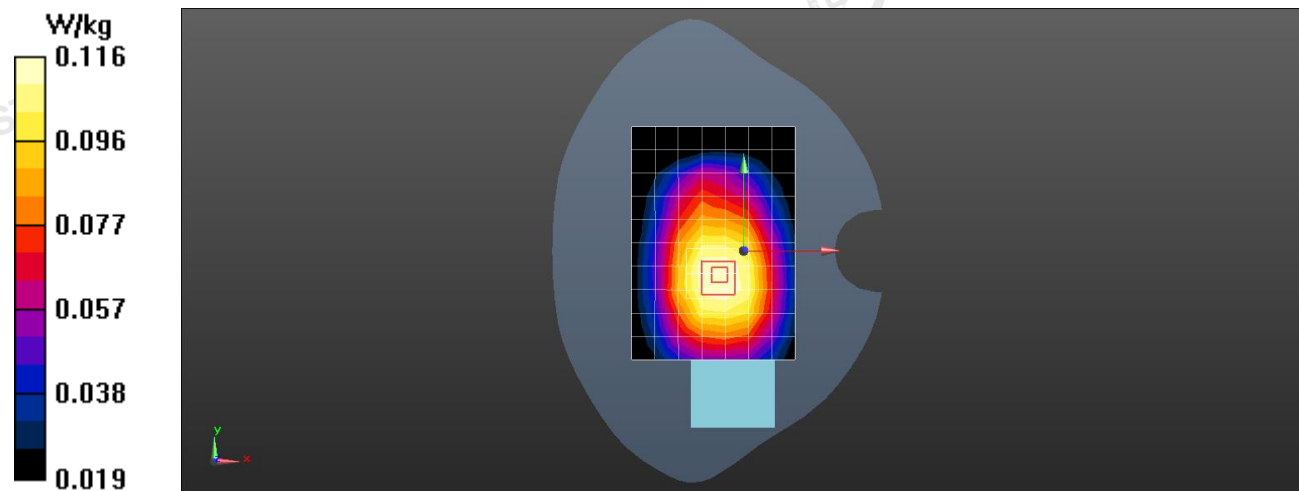

0 dB = 0.215 W/kg

#30

Date: 08/23/2024

WLAN 5.5GHz_802.11n40_ Body worn _0mm_CH134

Communication System: UID 0, Generic WLAN (0); Frequency: 5670 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.124$ S/m; $\epsilon_r = 35.120$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(4.965, 4.96, 4.96); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.398 W/Kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.21 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 5.21 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.388 W/Kg

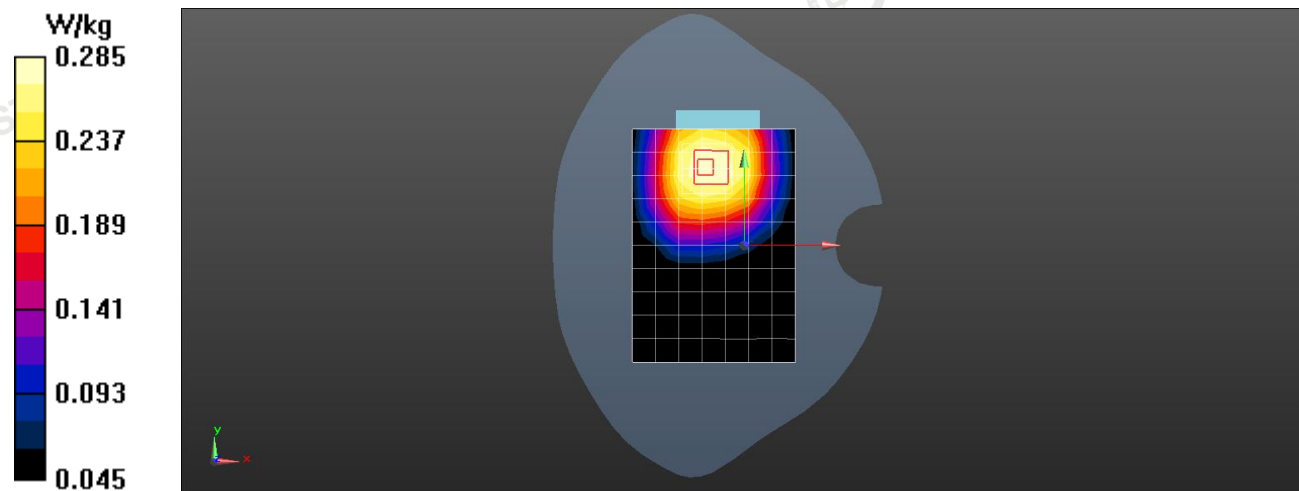

0 dB = 0.388 W/kg

#31

Date: 08/23/2024

WLAN 5.8GHz_802.11n40_ Front of face _25mm _CH151

Communication System: UID 0, Generic WLAN (0); Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.357$ S/m; $\epsilon_r = 34.578$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(4.98, 4.98, 4.98); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.231 W/Kg


Zoom Scan (7x7x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.874 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.227 W/kg

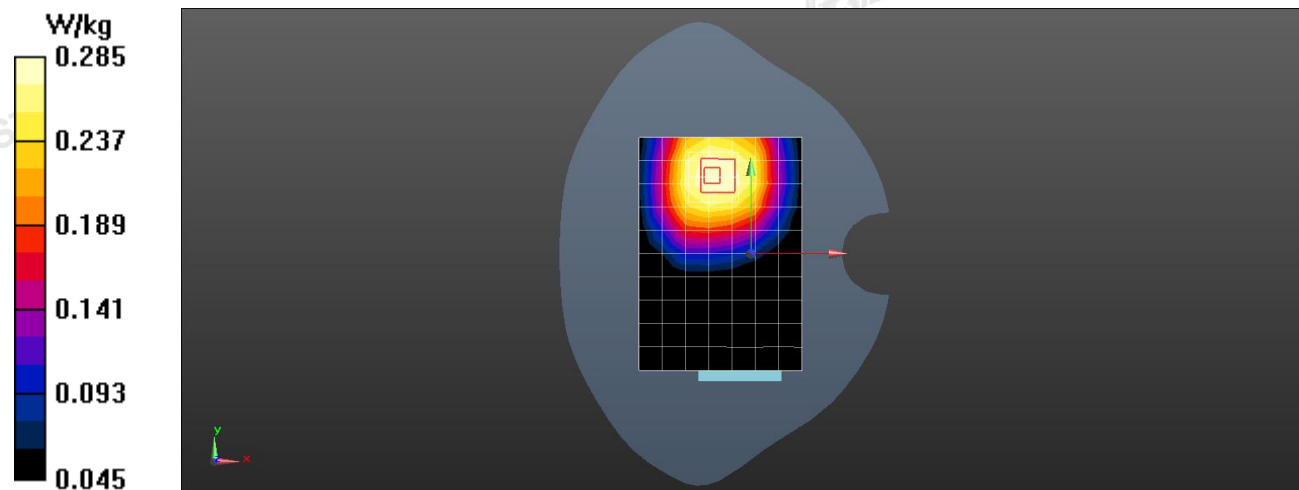

0 dB = 0.227 W/kg

#32

Date: 08/23/2024

WLAN 5.8GHz_802.11n40_ Body worn _0mm _CH151

Communication System: UID 0, Generic WLAN (0); Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.357$ S/m; $\epsilon_r = 34.578$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(4.98, 4.98, 4.98); Calibrated: Sep. 06, 2023
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.332 W/Kg


Zoom Scan (7x7x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.745 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.87 W/kg


SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.322 W/kg

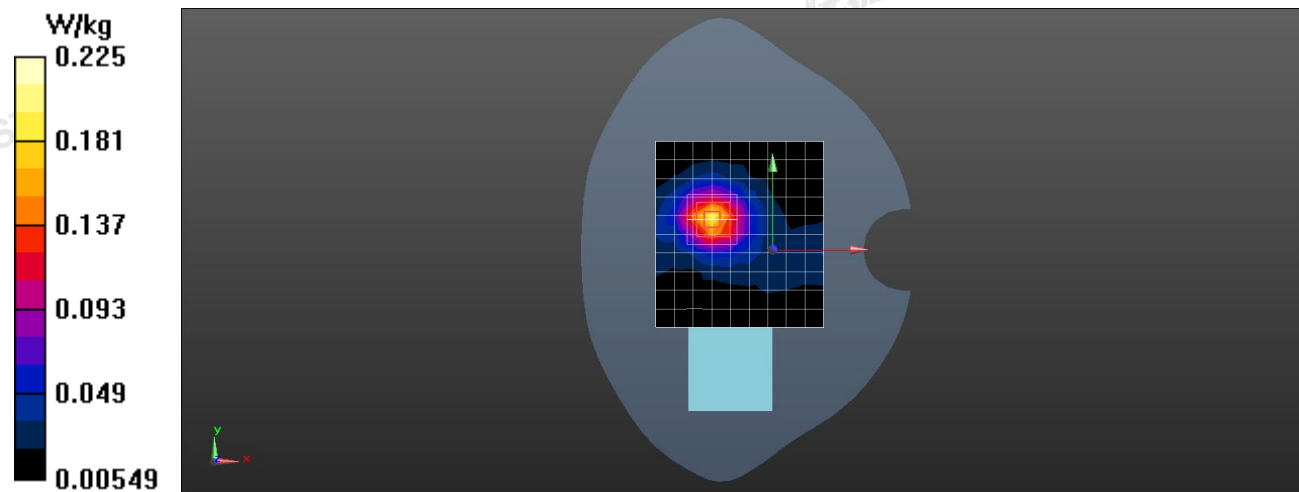

0 dB = 0.322 W/kg

Appendix D. DASY System Calibration Certificate



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client **INNOWAVE**Certificate No: **J23Z60222****CALIBRATION CERTIFICATE**Object **EX3DV4 - SN : 7624**Calibration Procedure(s)
FF-Z11-004-02
Calibration Procedures for Dosimetric E-field ProbesCalibration date: **September 06, 2023**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Power sensor NRP-Z91	101547	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Power sensor NRP-Z91	101548	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Reference 10dBAttenuator	18N50W-10dB	19-Jan-23(CTTL, No.J23X00212)	Jan-25
Reference 20dBAttenuator	18N50W-20dB	19-Jan-23(CTTL, No.J23X00211)	Jan-25
Reference Probe EX3DV4	SN 3846	31-May-23(SPEAG, No.EX-3846_May23)	May-24
DAE4	SN 549	24-Jan-23(SPEAG, No.DAE4-549_Jan23)	Jan-24
DAE4	SN 1744	30-Aug-22(SPEAG, No.DAE4-1744_Aug22)	Aug-23
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	12-Jun-23(CTTL, No.J23X05434)	Jun-24
Network Analyzer E5071C	MY46110673	10-Jan-23(CTTL, No.J23X00104)	Jan-24
Reference 10dBAttenuator	BT0520	11-May-23(CTTL, No.J23X04061)	May-25
Reference 20dBAttenuator	BT0267	11-May-23(CTTL, No.J23X04062)	May-25
OCP DAK-3.5	SN 1040	18-Jan-23(SPEAG, No.OCP-DAK3.5-1040_Jan23)	Jan-24

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 12, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: J23Z60222

Page 1 of 9



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:


- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta=0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Certificate No.: J23Z60222

Page 2 of 9



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7624

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc ($k=2$)
Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.57	0.59	0.58	$\pm 10.0\%$
DCP(mV) ^B	112.6	113.4	119.4	

Modulation Calibration Parameters


UID	Communication System Name		A dB	B dB $\cdot\mu\text{V}$	C	D dB	VR mV	Unc ^E ($k=2$)
0	CW	X	0.0	0.0	1.0	0.00	200.3	$\pm 4.7\%$
		Y	0.0	0.0	1.0		212.4	
		Z	0.0	0.0	1.0		202.8	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E^2 -field uncertainty inside TSL (see Page 4).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7624

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	10.58	10.58	10.58	0.20	1.06	± 12.7%
835	41.5	0.90	10.19	10.19	10.19	0.19	1.20	± 12.7%
1750	40.1	1.37	8.66	8.66	8.66	0.21	1.13	± 12.7%
1900	40.0	1.40	8.35	8.35	8.35	0.33	0.91	± 12.7%
2100	39.8	1.49	8.27	8.27	8.27	0.23	1.08	± 12.7%
2300	39.5	1.67	8.13	8.13	8.13	0.58	0.67	± 12.7%
2450	39.2	1.80	7.85	7.85	7.85	0.63	0.66	± 12.7%
2600	39.0	1.96	7.66	7.66	7.66	0.65	0.66	± 12.7%
3500	37.9	2.91	7.20	7.20	7.20	0.34	1.00	± 13.9%
3700	37.7	3.12	7.00	7.00	7.00	0.36	1.07	± 13.9%
3900	37.5	3.32	6.85	6.85	6.85	0.30	1.50	± 13.9%
4100	37.2	3.53	6.78	6.78	6.78	0.30	1.35	± 13.9%
4200	37.1	3.63	6.68	6.68	6.68	0.30	1.45	± 13.9%
4400	36.9	3.84	6.61	6.61	6.61	0.30	1.45	± 13.9%
4600	36.7	4.04	6.47	6.47	6.47	0.40	1.30	± 13.9%
4800	36.4	4.25	6.37	6.37	6.37	0.40	1.40	± 13.9%
4950	36.3	4.40	6.08	6.08	6.08	0.40	1.40	± 13.9%
5250	35.9	4.71	5.55	5.55	5.55	0.40	1.50	± 13.9%
5600	35.5	5.07	4.96	4.96	4.96	0.35	1.70	± 13.9%
5750	35.4	5.22	4.98	4.98	4.98	0.35	1.80	± 13.9%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency up to 6 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.