




## FCC CERTIFICATION TEST REPORT

<b>Applicant:</b>	RAINVI TECHNOLOGIES PRIVATE LIMITED		
<b>Address:</b>	8-2-283/82/A/321/1 HBS CO OP JUBILEE HILLS HYDERABAD, TELANGANA, INDIA - 500034		
<b>Manufacturer:</b>	Guangzhou Yuandong Smart Sports Technology Co., LTD		
<b>Address:</b>	Room 518, 192 Kezhu Road, Huangpu District, Guangzhou		
<b>Product Description:</b>	Bluetooth Weight Controller		
<b>Brand Name:</b>	NA		
<b>Tested Model:</b>	PBWT-01		
<b>FCC ID:</b>	2BKUS-PBWT-01		
<b>Report No.:</b>	JCF240813051-004		
<b>Received Date:</b>	Aug. 13, 2024		
<b>Tested Date:</b>	Aug. 13, 2024 ~ Sep. 02, 2024		
<b>Issued Date:</b>	Sep. 02, 2024		
<b>Test Standards:</b>	FCC Rules and Regulations Part 15 Subpart C,		
<b>Test Procedure:</b>	ANSI C63.10:2013		
<b>Test Result:</b>	Pass		
<b>Prepared By:</b>			
 <u>Roger Li/Engineer</u>			
		<b>Date:</b> Sep. 02, 2024	
<b>Reviewed By:</b>			
 <u>Kennys Zhang/Engineer</u>			
		<b>Date:</b> Sep. 02, 2024	
<b>Approved By:</b>			
 <u>Talent Zhang/Engineer</u>			
		<b>Date:</b> Sep. 02, 2024	

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

**Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 02, 2024	Original Report	/

## TABLE OF CONTENTS

<b>1. Test Report Declare</b> .....	<b>5</b>
<b>2. Summary of Test Results</b> .....	<b>6</b>
<b>3. Test Laboratory</b> .....	<b>6</b>
<b>4. Equipment Under Test</b> .....	<b>7</b>
4.1. Description of EUT .....	7
4.2. Channel List .....	7
4.3. Test Channel Configuration .....	7
4.4. Test environment conditions .....	7
4.5. The Worse Case Power Setting Parameter .....	7
4.6. Description of Available Antennas .....	7
<b>5. Description of Test Setup</b> .....	<b>8</b>
5.1. Accessory .....	8
5.2. Support Equipment .....	8
5.3. Test Setup .....	8
5.4. Setup Diagram for Tests .....	8
<b>6. Measurement Uncertainty</b> .....	<b>8</b>
<b>7. Measuring Instrument and Software Used</b> .....	<b>9</b>
<b>8. On Time and Duty Cycle</b> .....	<b>11</b>
8.1. Block diagram of test setup .....	11
8.2. Limits .....	11
8.3. Procedure .....	11
8.4. Results .....	11
8.5. Original test data .....	11
<b>9. 6 dB DTS Bandwidth</b> .....	<b>12</b>
9.1. Block diagram of test setup .....	12
9.2. Limits .....	12
9.3. Test Procedure .....	12
9.4. Results .....	12
9.5. Original test data .....	12
<b>10. Peak Conducted Output Power</b> .....	<b>14</b>
10.1. Block diagram of test setup .....	14
10.2. Limits .....	14
10.3. Test Procedure .....	14
10.4. Results .....	14
10.5. Original test data .....	15
<b>11. Power Spectral Density</b> .....	<b>16</b>
11.1. Block diagram of test setup .....	16
11.2. Limits .....	16
11.3. Test Procedure .....	16
11.4. Results .....	16
11.5. Original test data .....	16
<b>12. Conducted Bandedge and Spurious Emissions</b> .....	<b>17</b>
12.1. Block diagram of test setup .....	17
12.2. Limits .....	17
12.3. Test Procedure .....	17
12.4. Results .....	17
12.5. Original test data .....	18
<b>13. Radiated Emission</b> .....	<b>20</b>
13.1. Block diagram of test setup .....	20
13.2. Limit .....	21
13.3. Test Procedure .....	22
13.4. Results .....	24

- 13.5. Original test data ..... 24
- 14. Antenna Requirements ..... 25**
  - 14.1. Limits ..... 25
  - 14.2. Result ..... 25
- APPENDIX A – Radiated Emission Below 1GHz Test Data ..... 26**
- APPENDIX B – Radiated Emission Above 1GHz Test Data ..... 28**

## 1. Test Report Declare

<b>Applicant:</b>	RAINVI TECHNOLOGIES PRIVATE LIMITED
<b>Address:</b>	8-2-283/82/A/321/1 HBS CO OP JUBILEE HILLS HYDERABAD, TELANGANA, INDIA - 500034
<b>Manufacturer:</b>	Guangzhou Yuandong Smart Sports Technology Co., LTD
<b>Address:</b>	Room 518, 192 Kezhu Road, Huangpu District, Guangzhou
<b>Product Name:</b>	Bluetooth Weight Controller
<b>Brand Name:</b>	NA
<b>Model Name:</b>	PBWT-01
<b>Difference Description:</b>	NA

### We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

## 2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6 dB Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207	NA
7	Antenna Requirement	FCC Part 15.203	Pass

## 3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

## 4. Equipment Under Test

### 4.1. Description of EUT

<b>EUT Name:</b>	Bluetooth Weight Controller
<b>Model Number:</b>	PBWT-01
<b>EUT Function Description:</b>	Please refer to the user manual of this device
<b>Power Supply:</b>	3V <sup>---</sup>
<b>Hardware Version:</b>	NA
<b>Software Version:</b>	NA
<b>Radio Specification:</b>	Non-specific short range devices
<b>Operation Frequency:</b>	2405 MHz
<b>Modulation:</b>	GFSK
<b>Data Rate:</b>	250kbps
<b>Antenna Type:</b>	PCB Antenna, MAX. Gain: -3.81 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

### 4.2. Channel List

Mode	Transmit Chains	Test Channel and Frequency (MHz)
GFSK	1	2405

### 4.3. Test Channel Configuration

Mode	Worst Data Rate	Test Channel and Frequency (MHz)
GFSK	250kbps	2405

### 4.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

### 4.5. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band		
Test Software		N/A
Modulation Type	Transmit Antenna Number	Test Software Setting Value
GFSK	1	2405
		Default

### 4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX	Antenna 1 can be used as transmitting/receiving antenna.

## 5. Description of Test Setup

### 5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
N/A	N/A	N/A	N/A	N/A

### 5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
N/A	N/A	N/A	N/A

### 5.3. Test Setup

The EUT can work in Fixed Frequency mode.

### 5.4. Setup Diagram for Tests



## 6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of  $k = 2$ .




## 7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	MY56320512	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	Vector Signal Generator	Keysight	N5182B	MY57300334	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	Signal Generator	Keysight	N5171B	MY57280639	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	DC POWER	Keysight	E342A	MY59020356	Jun. 29, 2024	Jun. 28, 2025
<input checked="" type="checkbox"/>	Incubator thermometer	GWS	EL-02JA	21107288	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	Control unit(Power sensor)	Tonscend	JS0806-2	/	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	Wideband radio communication tester	R&S	CMW500	163478	Jul. 03, 2024	Jul. 02, 2025
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9020B	MY60112206	Sep. 12, 2023	Sep. 12, 2024
<input checked="" type="checkbox"/>	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Sep. 12, 2023	Sep. 12, 2024
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test software	Tonscend	JS1120-3	V3.3.10		
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	EMI Receiver	R&S	ESW	101685	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	Bilog Antenna	Schwarzbeck	VULB 9163	01416	May. 22, 2024	May. 21, 2025
<input checked="" type="checkbox"/>	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Sep. 26, 2023	Sep. 25, 2024
<input checked="" type="checkbox"/>	Horn Antenna 2	ETS	BBHA 9170	1090	Sep. 04, 2023	Sep. 03, 2024
<input checked="" type="checkbox"/>	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 14, 2024	Jan. 13, 2025
<input checked="" type="checkbox"/>	Signal Pre-Amplifier	Tonscend	TAP01018050	AP23I8060293	Oct. 12, 2023	Oct. 11, 2024
<input checked="" type="checkbox"/>	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Sep. 02, 2024	Sep. 01, 2025
<input checked="" type="checkbox"/>	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test software	Tonscend	TS+	V3.0.0.4		
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	102509	Sep. 11, 2024	Sep. 10, 2025
<input checked="" type="checkbox"/>	EMI Receiver	R&S	ESR	102154	Sep. 11, 2024	Sep. 10, 2025
Software						
Used	Description	Manufacturer	Name	Version		

<input checked="" type="checkbox"/>	Test software	EZ	EZ-EMC	EMEC-3A1		
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	Temperature & Humidity	Temperature	HTC-1	/	Nov. 02, 2023	Nov. 01, 2024

## 8. On Time and Duty Cycle

### 8.1. Block diagram of test setup

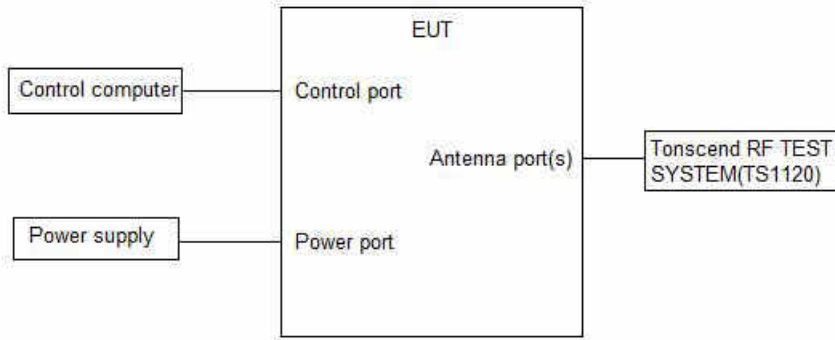

### 8.2. Limits

None; for reporting purposes only

### 8.3. Procedure

KDB 558074 Zero-Span Spectrum Analyzer Method

### 8.4. Results

Test Mode	Ant.	Freq. (MHz)	ON Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)
SRD	Ant1	2405	0.42	1.24	33.87	4.70


Note: Duty Cycle Correction Factor =  $10\log(1/x)$ .

Where: x is Duty Cycle(Linear)

Where: T is On Time (transmit duration)

If that calculated VBW is not available on the analyzer, then the next higher value should be used.

### 8.5. Original test data

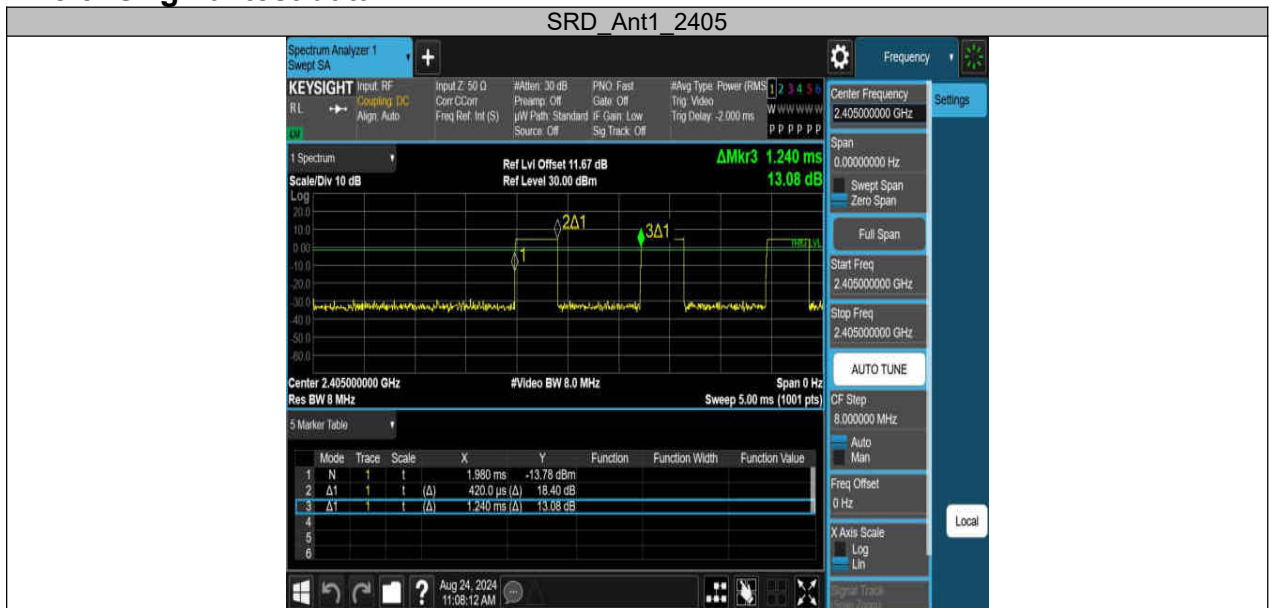



99% bandwidth



## 10. Peak Conducted Output Power

### 10.1. Block diagram of test setup

Same as section 8.1

### 10.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Peak Output Power	1 watt or 30 dBm	2400 - 2483.5

### 10.3. Test Procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

99% Bandwidth set the spectrum analyzer as follows:

RBW:	30 kHz
VBW:	100 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

6 dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

Allow the trace to stabilize, measure the 6 dB and 99% bandwidth of signal.

### 10.4. Results

Test Mode	Ant.	Freq (MHz)	Conducted Peak Power (dBm)	Conducted Limit (dBm)	Verdict
SRD	Ant1	2405	4.69	≤30	PASS

### 10.5. Original test data



## 11. Power Spectral Density

### 11.1. Block diagram of test setup

Same as section 8.1

### 11.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400 - 2483.5

### 11.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	3 kHz ≤ RBW ≤ 100 kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 11.4. Results

Test Mode	Ant.	Freq. (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
SRD	Ant1	2405	-4.61	≤8.00	PASS

### 11.5. Original test data

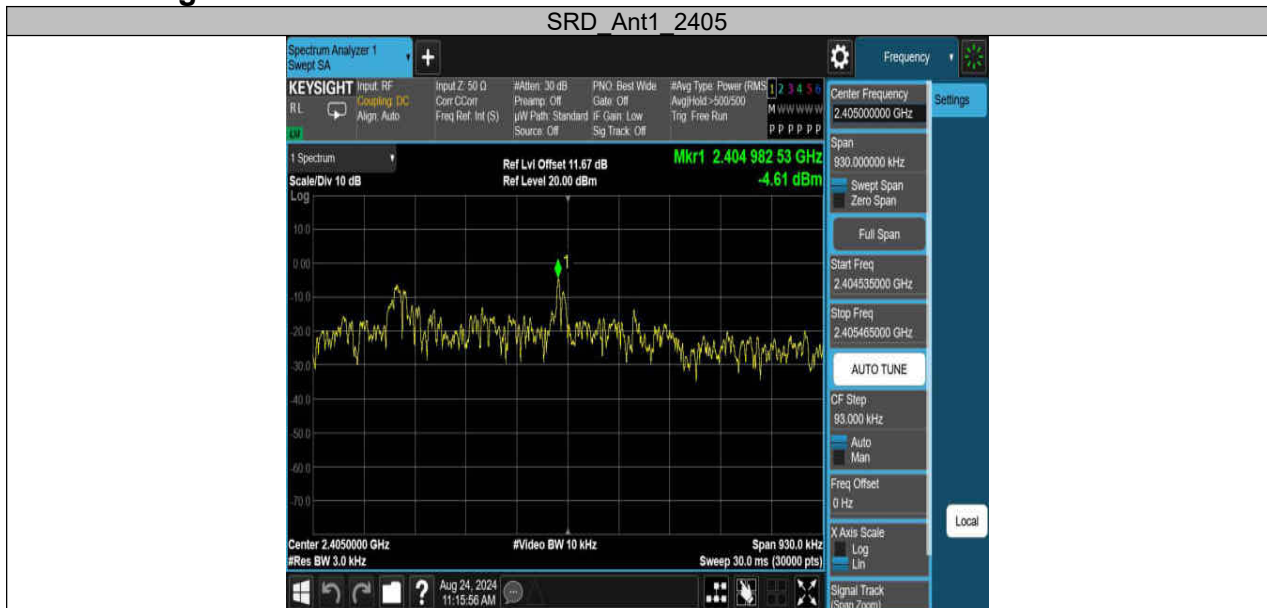



## 12. Conducted Bandedge and Spurious Emissions

### 12.1. Block diagram of test setup

Same as section 8.1

### 12.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Band edge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 12.3. Test Procedure

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$\geq 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Connect the UUT to the spectrum analyzer and use the following settings:

Use the peak marker function to determine the maximum peak power level to establish the reference level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple

Use the peak marker function to determine the maximum amplitude level.

### 12.4. Results

Band edge


Test Mode	Ant.	Freq. (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
SRD	Ant1	2405	4.42	-45.3	$\leq -15.58$	PASS

Spurious Emissions

Test Mode	Ant.	Freq. (MHz)	Freq Range (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
SRD	Ant1	2405	Reference	4.51	4.51	---	PASS
			30~1000	4.51	-60.59	$\leq -15.49$	PASS
			1000~26500	4.51	-49.87	$\leq -15.49$	PASS


### 12.5. Original test data

Band edge:

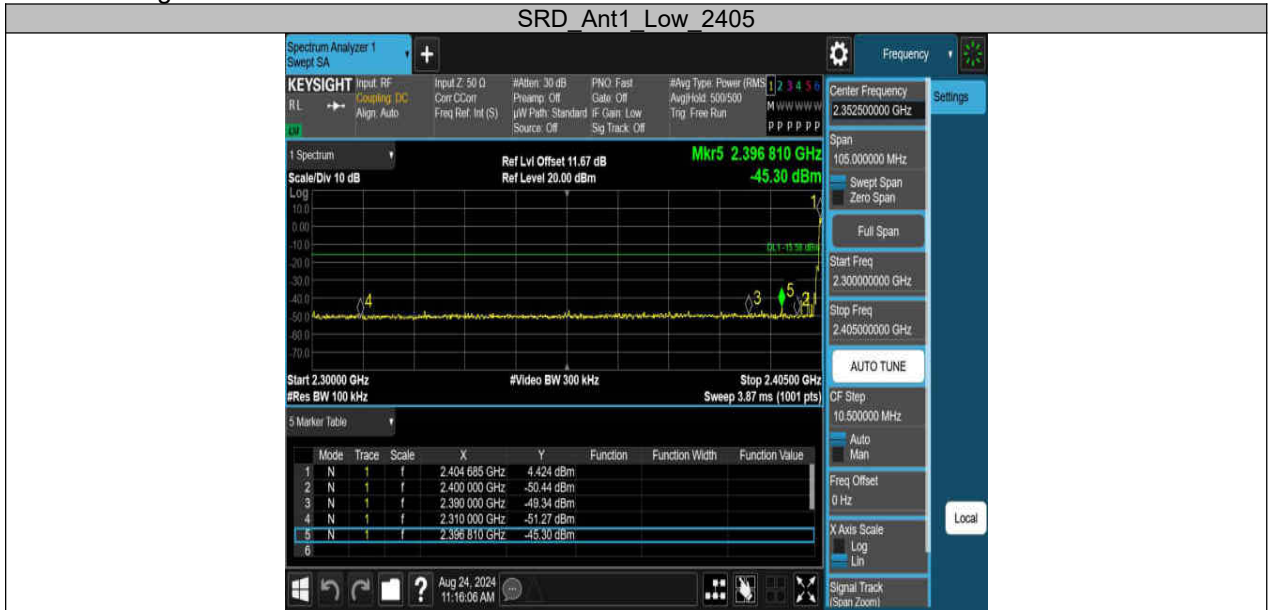


Spurious Emissions:



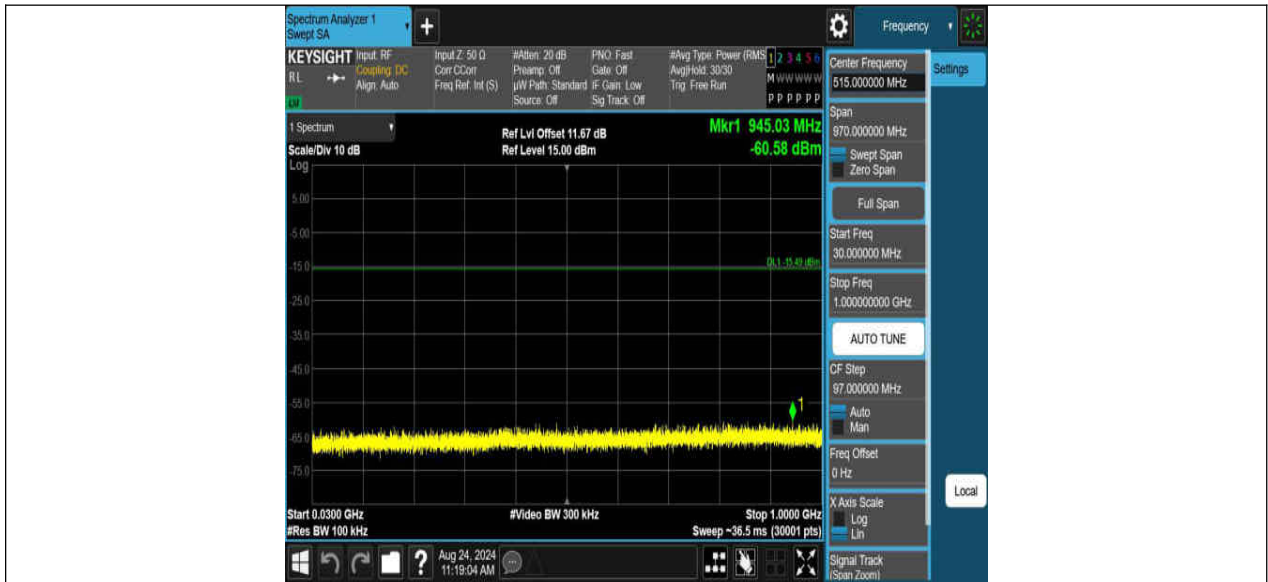


SRD Ant1 2405 1000~26500

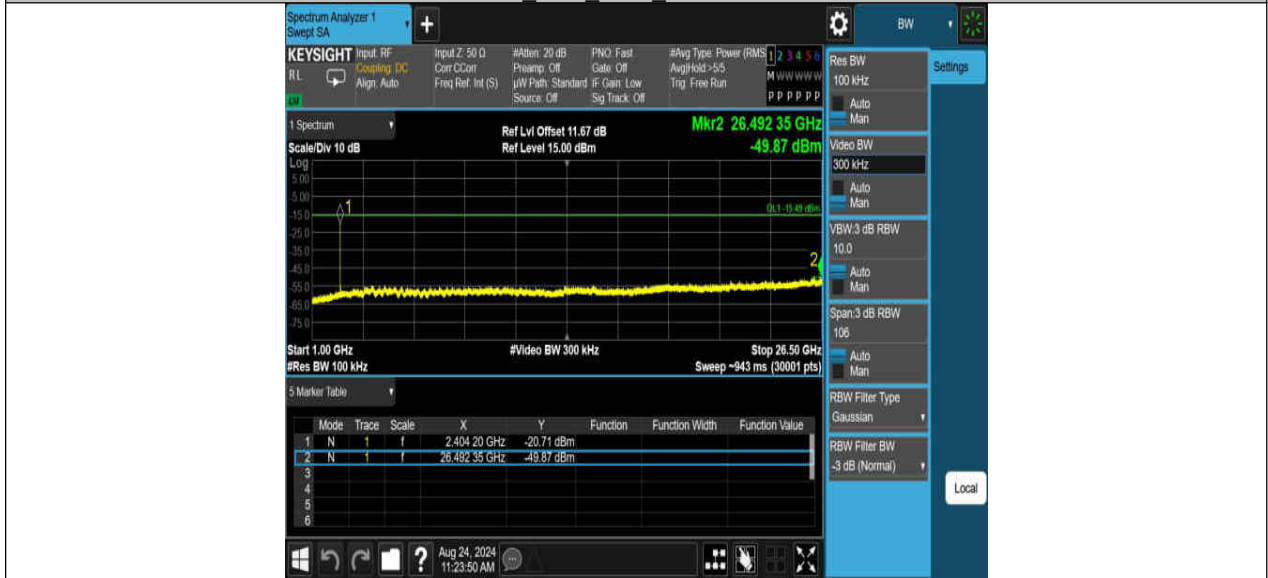


### 13. Radiated Emission

#### 13.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

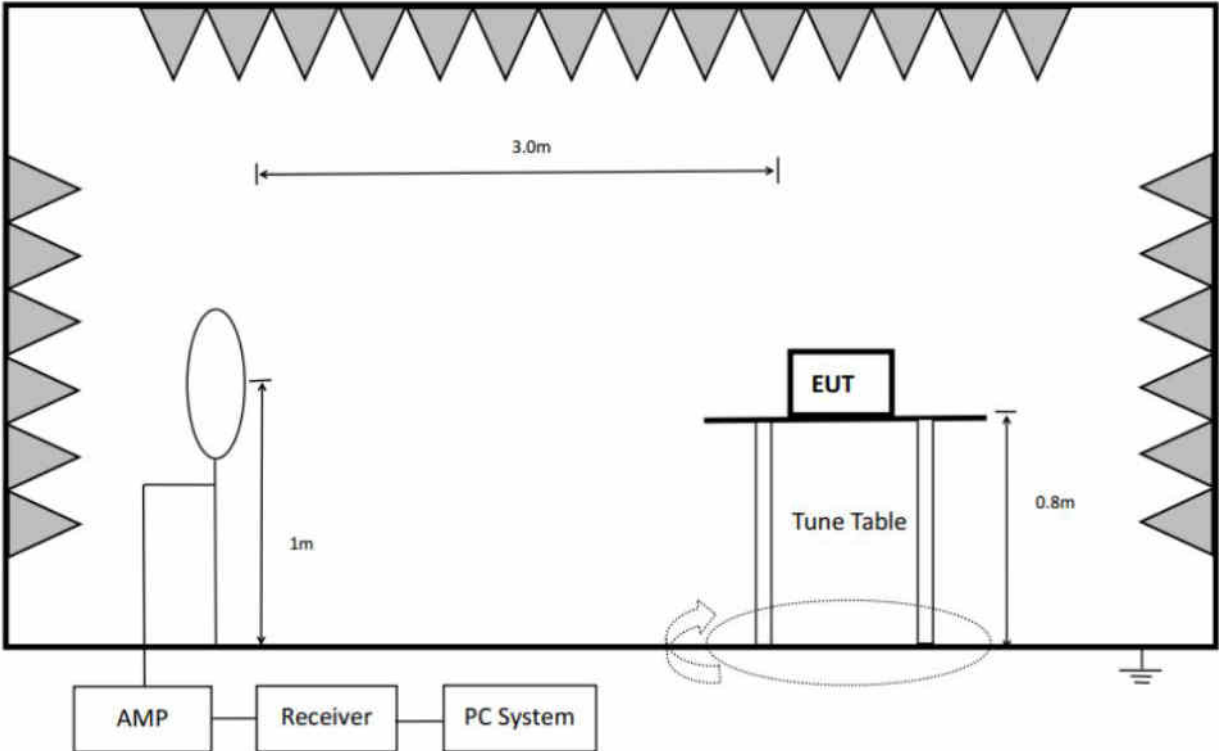

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

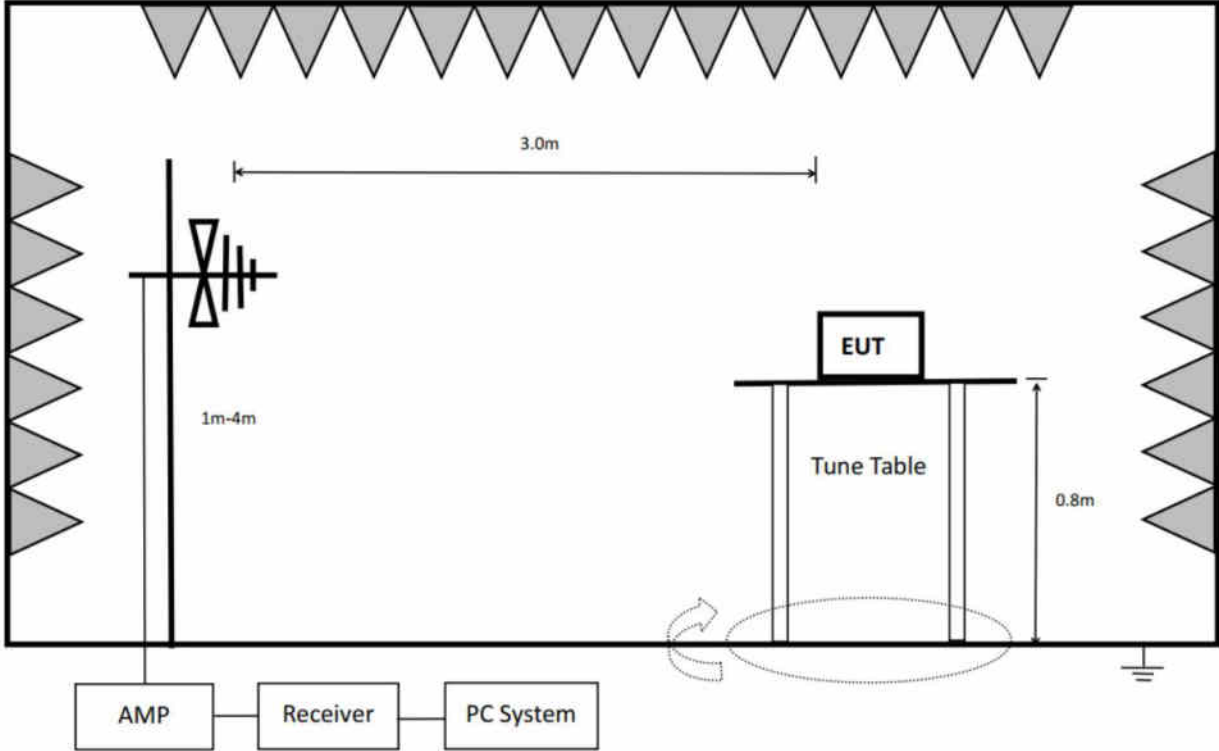

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

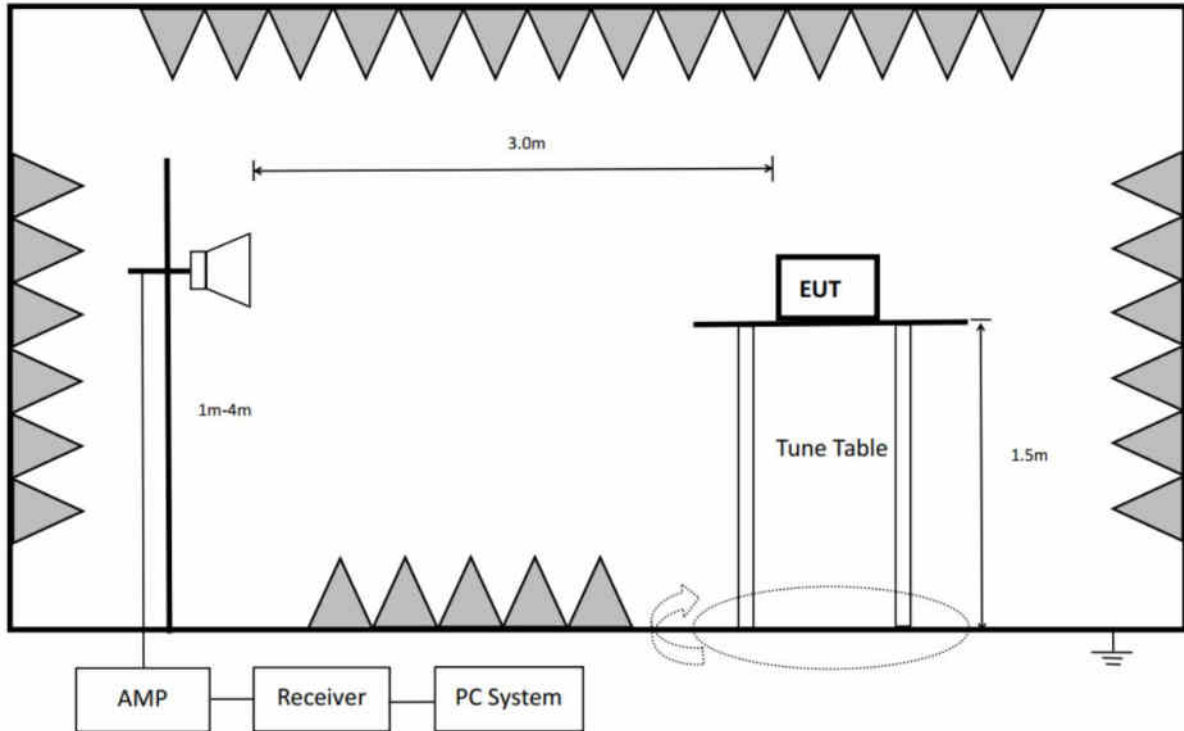

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

### 13.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

## (2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dB( $\mu\text{V}$ )/m (Peak) 54.0 dB( $\mu\text{V}$ )/m (Average)	

Note: (1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

About Restricted bands of operation please refer to FCC § 15.205(a),

### 13.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	300 Hz (From 9 kHz to 0.15 MHz)/ 10 kHz (From 0.15 MHz to 30 MHz)
VBW	1 kHz (From 9 kHz to 0.15 MHz)/ 30 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013

2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm meter above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.

5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT

measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	100 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 1.5m above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.

7. Restriction band: Investigated frequency range from 2310 MHz to 2410 MHz and 2470MHz to 2500 MHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

### **13.4. Results**

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 26 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 2405 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

### **13.5. Original test data**

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B



## 14. Antenna Requirements

### 14.1. Limits

Please refer to FCC § 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC § 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 14.2. Result


The antenna used for this product is PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is - 3.81 dBi

# APPENDIX A – Radiated Emission Below 1GHz Test Data Test Report

Project Information			
Customer:			
EUT:	Bluetooth Weight Controller		
Model:	PBWT-01	SN:	
Mode:	2405 Mhz	Voltage:	DC 3V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Soho Liu
Remark:			
Test Standard: FCC PART 15 C			

Start of Test: 2024-08-22 10:17:12

### Test Graph

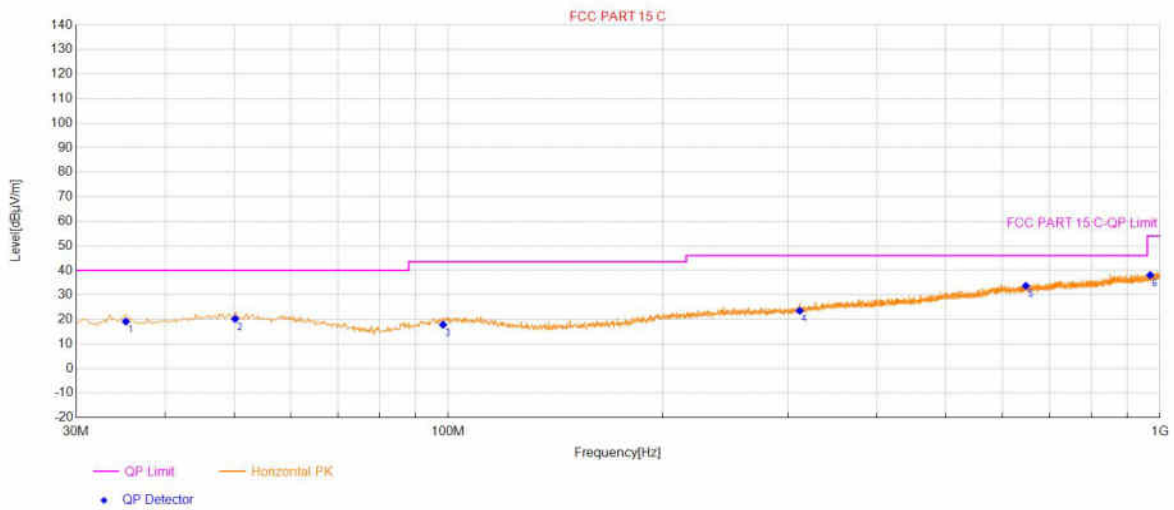


Final Data List									
NO.	Frequency (MHz)	Factor (dB/m)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	35.2390	17.74	19.16	40.00	20.84	100	293	Horizontal	PASS
2	50.1800	21.45	20.23	40.00	19.77	100	280	Horizontal	PASS
3	98.3017	19.63	17.88	43.50	25.62	100	359	Horizontal	PASS
4	311.7443	23.47	23.56	46.00	22.44	100	300	Horizontal	PASS
5	647.8196	30.71	33.69	46.00	12.31	100	312	Horizontal	PASS
6	968.5657	35.37	38.06	54.00	15.94	100	160	Horizontal	PASS

# Test Report

Project Information			
Customer:			
EUT:	Bluetooth Weight Controller		
Model:	PBWT-01	SN:	
Mode:	2405 Mhz	Voltage:	DC 3V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Soho Liu
Remark:			
Test Standard: FCC PART 15 C			

Start of Test: 2024-08-22 10:18:20

## Test Graph

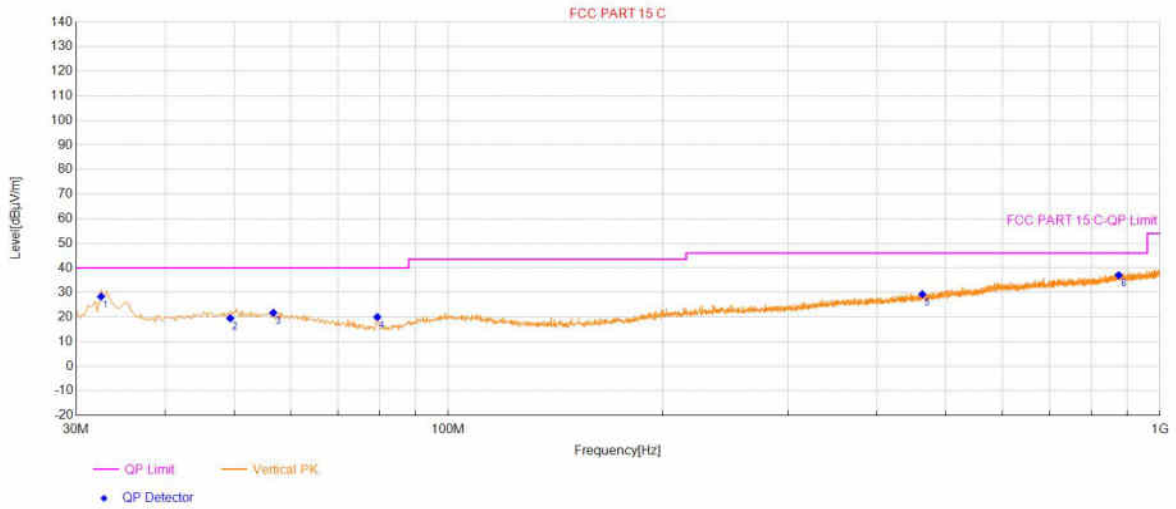


Final Data List									
NO.	Frequency (MHz)	Factor (dB/m)	QP Value (dBµV/m)	QP Limit (dBµV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	32.5225	17.70	28.35	40.00	11.65	100	7	Vertical	PASS
2	49.4039	21.41	19.52	40.00	20.48	100	320	Vertical	PASS
3	56.7774	20.68	21.75	40.00	18.25	100	207	Vertical	PASS
4	79.4799	14.98	20.02	40.00	19.98	100	161	Vertical	PASS
5	463.4827	26.92	29.28	46.00	16.72	100	135	Vertical	PASS
6	875.0390	34.27	37.03	46.00	8.97	100	207	Vertical	PASS

# APPENDIX B – Radiated Emission Above 1GHz Test Data Test Report

Project Information			
Customer:			
EUT:	Bluetooth Weight Controller		
Model:	PBWT-01	SN:	
Mode:	2405 Mhz	Voltage:	DC 3V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Soho Liu
Remark:			
Test Standard: FCC PART 15 C			

Start of Test:2024-08-23 10:48:37

### Test Graph

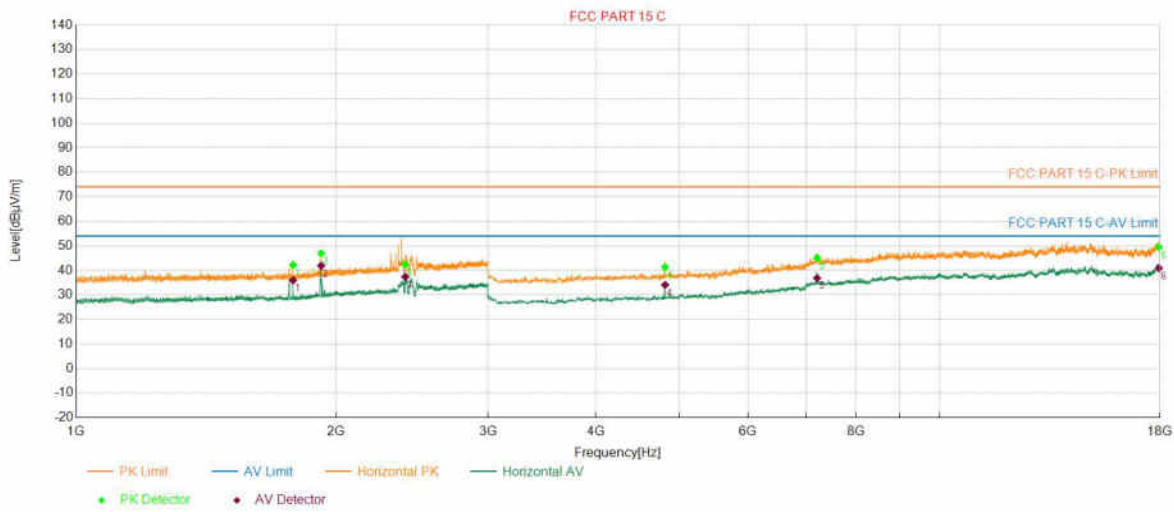


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1783.3567	0.43	42.21	74.00	31.79	35.95	54.00	18.05	150	311	Horizontal
2	1921.7844	1.76	46.99	74.00	27.01	41.90	54.00	12.10	150	2	Horizontal
3	2405.0810	6.71	42.49	74.00	31.51	37.39	54.00	16.61	150	40	Horizontal
4	4809.3619	-4.97	41.30	74.00	32.70	34.08	54.00	19.92	150	135	Horizontal
5	7212.8426	3.36	45.11	74.00	28.89	36.86	54.00	17.14	150	152	Horizontal
6	17945.9892	21.04	49.48	74.00	24.52	40.86	54.00	13.14	150	152	Horizontal

# Test Report

Project Information			
Customer:			
EUT:	Bluetooth Weight Controller		
Model:	PBWT-01	SN:	
Mode:	2405 Mhz	Voltage:	DC 3V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Soho Liu
Remark:			
Test Standard: FCC PART 15 C			

Start of Test:2024-08-23 10:50:38

## Test Graph

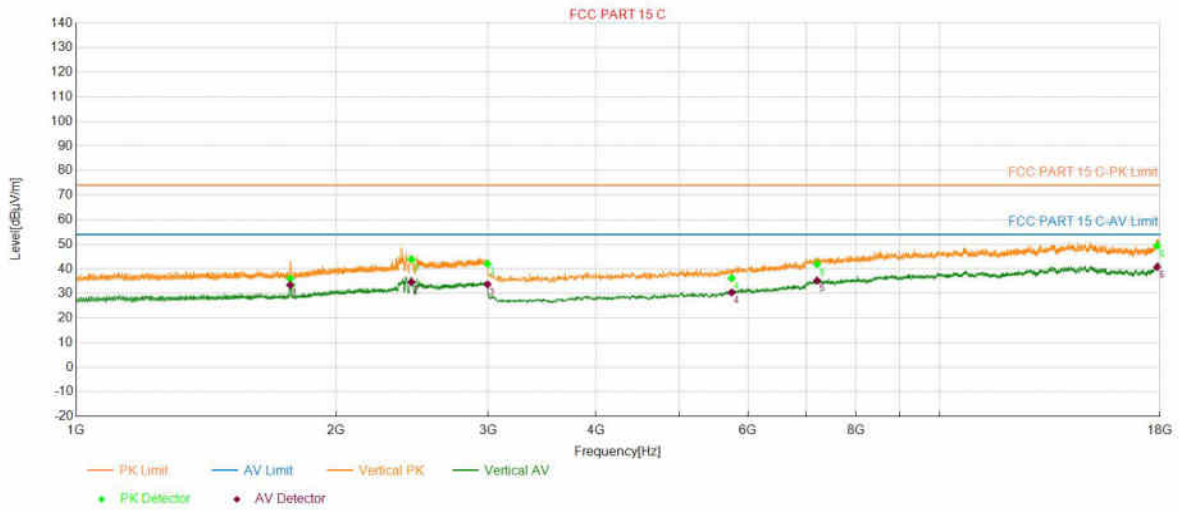


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1769.7540	0.41	36.05	74.00	37.95	33.48	54.00	20.52	150	288	Vertical
2	2445.8892	6.41	43.92	74.00	30.08	34.65	54.00	19.35	150	353	Vertical
3	2995.1990	7.71	42.10	74.00	31.90	33.71	54.00	20.29	150	265	Vertical
4	5742.5485	-1.94	36.23	74.00	37.77	30.43	54.00	23.57	150	244	Vertical
5	7212.8426	3.36	41.97	74.00	32.03	35.22	54.00	18.78	150	11	Vertical
6	17870.9742	20.54	49.46	74.00	24.54	40.77	54.00	13.23	150	0	Vertical

# Test Report

Project Information			
Customer:			
EUT:	Bluetooth Weight Controller		
Model:	PBWT-01	SN:	
Mode:	2405 Mhz	Voltage:	DC 3V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Soho Liu
Remark:			
Test Standard: FCC Part15 C			

Start of Test:2024-08-23 11:00:30

## Test Graph

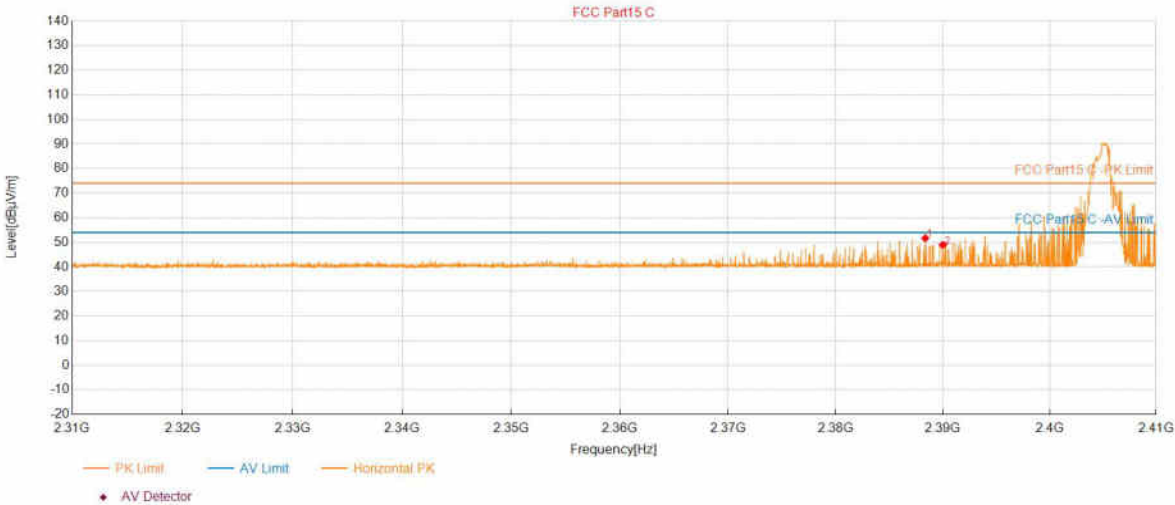


Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.36	51.70	74.00	22.30	150	42	Horizontal
2	2390.00	48.97	74.00	25.03	150	97	Horizontal

# Test Report

Project Information			
Customer:			
EUT:	Bluetooth Weight Controller		
Model:	PBWT-01	SN:	
Mode:	2405 Mhz	Voltage:	DC 3V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Soho Liu
Remark:			
Test Standard: FCC Part15 C			

Start of Test:2024-08-23 11:03:34

### Test Graph

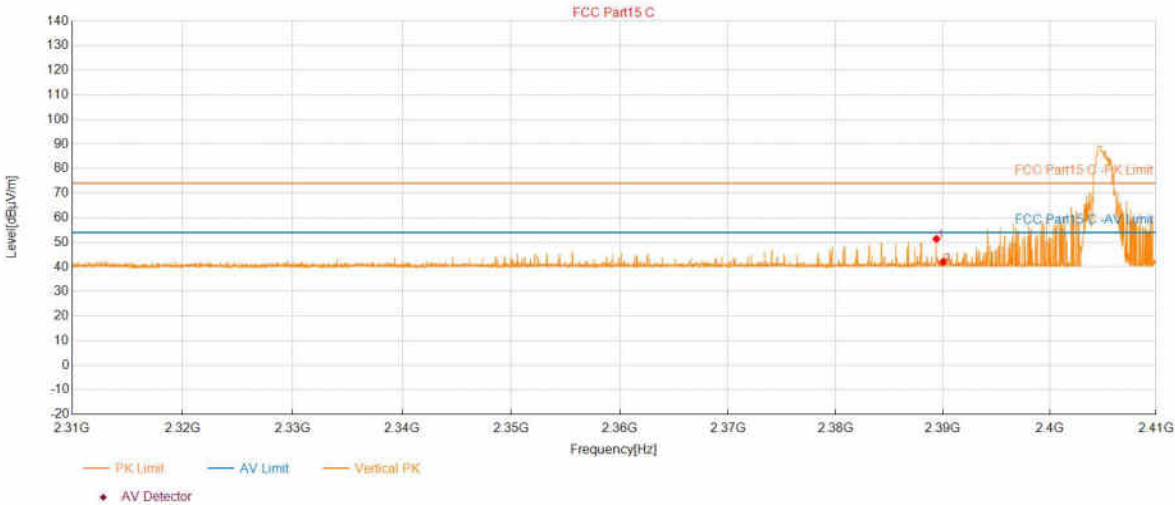

Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.40	51.39	74.00	22.61	150	360	Vertical
2	2390.02	42.06	74.00	31.94	150	360	Vertical

**END OF REPORT**