



**FCC TEST REPORT**  
**FCC ID:2BLPO-TK-CW301**

**Report Number**.....: **ZHT-241010024E**  
**Date of Test**.....: Oct. 10, 2024 to Oct. 18, 2024  
**Date of issue**.....: Nov. 04, 2024  
**Test Result** .....: PASS

**Testing Laboratory**.....: **Guangdong Zhonghan Testing Technology Co., Ltd.**  
**Address** .....: Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Applicant's name** .....: **Shenzhen Suiqi Innovation Technology Co.,Ltd.**  
**Address** .....: The 37th Floor, the east tower building of Galaxy twin towers, COCO PARK WORLD, NO.8 Yaxing road, Bantian street, Longgang district, Shenzhen

**Manufacturer's name** .....: **Shenzhen Suiqi Innovation Technology Co.,Ltd.**  
**Address** .....: The 37th Floor, the east tower building of Galaxy twin towers, COCO PARK WORLD, NO.8 Yaxing road, Bantian street, Longgang district, Shenzhen

**Test specification:**  
**Standard**.....: FCC CFR Title 47 Part 15 Subpart C  
**Test procedure**.....: /  
**Non-standard test method** .....: N/A

This device described above has been tested by ZHT, and the test resul/ show that the equipment under test (EUT) is in compliance with the FCC requiremen/. And it is applicable only to the tested sample identified in the report.  
This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.

**Product name**.....: **Qi2 wireless chargere**  
**Trademark** .....: /  
**Model/Type reference**.....: TK-CW301  
**Model Difference**.....: /  
**Ratings**.....: Input: 5V---3A, 9V---2.23A  
Wireless output: 5 W / 7.5 W / 10 W / 15 W (Max)



Testing procedure and testing location:

Testing Laboratory..... Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tested by (name + signature)..... Kimi Lu

*Kimi Lu*

Reviewer (name + signature)..... Baret Wu

*Baret Wu*

Approved (name + signature)..... Levi Lee

*Levi Lee*



TABLE OF CONTENT

**1. VERSION ..... 4**

**2. TEST SUMMARY ..... 5**

    2.1 TEST FACILITY ..... 6

    2.2 MEASUREMENT UNCERTAINTY ..... 6

**3. GENERAL INFORMATION ..... 7**

    3.1 GENERAL DESCRIPTION OF EUT ..... 7

    3.2 Test mode ..... 7

    3.3 Block Diagram of EUT Configuration ..... 7

    3.4 Test Conditions ..... 7

    3.5 Description Of Support Uni/ (Conducted Mode) ..... 8

    3.6 EQUIPMEN/ LIST FOR ALL TEST ITEMS ..... 9

**4. CONDUCTED EMISSION TEST ..... 11**

    4.1 CONDUCTED EMISSION MEASUREMENT ..... 11

        4.1.1 POWER LINE CONDUCTED EMISSION Limi/ ..... 11

        4.1.2 TEST PROCEDURE ..... 11

        4.1.3 DEVIATION FROM TEST STANDARD ..... 11

        4.1.4 TEST SETUP ..... 12

        4.1.5 EUT OPERATING CONDITIONS ..... 12

        4.1.6 Test Result ..... 13

**5. RADIATED EMISSION MEASUREMENT ..... 15**

    5.1 Radiated Emission Limi/ ..... 15

    5.2 Anechoic Chamber Test Setup Diagram ..... 16

    5.3 Test Procedure ..... 16

    5.4 DEVIATION FROM TEST STANDARD ..... 16

    5.5 Test Result ..... 17

**6. BANDWIDTH TEST ..... 20**

**7. ANTENNA REQUIREMENT ..... 22**

**8. TEST SETUP PHOTO ..... 23**

**9. EUT CONSTRUCTIONAL DETAILS ..... 23**



1. VERSION

Report No.	Version	Description	Approved
ZHT-241010024E	Rev.01	Initial issue of report	Nov. 04, 2024



## 2. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



## 2.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.  
Add. : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District  
Shenzhen, Guangdong, China

FCC Registration Number:255941  
Designation Number: CN0325  
IC Registered No.: 29832  
CAB identifier: CN0143

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF conducted power	$\pm 0.16\text{dB}$
3	Conducted spurious emissions	$\pm 0.21\text{dB}$
4	All radiated emissions (9k-30MHz)	$\pm 4.68\text{dB}$
5	All radiated emissions (<1G)	$\pm 4.68\text{dB}$
6	All radiated emissions (>1G)	$\pm 4.89\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$
9	Occupied Bandwidth	$\pm 4.96\%$



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT


Product Name:	Qi2 wireless chargere
Test Model No:	TK-CW301
Hardware version:	V1.0
Software version:	V1.0
Operation Frequency:	110.1-205KHz
Modulation type:	MSK
Antenna Type:	Coil Antenna
Antenna gain:	0dBi

#### 3.2 Test mode

Test Modes:	
Mode 1	AC adapter wireless charging(5W)
Mode 2	AC adapter wireless charging(7.5W)
Mode 3	AC adapter wireless charging(10W)
Mode 4	AC adapter wireless charging(15W)

Note: 1. All modes were tested, only the worst-case was recorded in the report. Mode 4 is the worst mode.  
2.The EUT not supports portable use.

#### 3.3 Block Diagram of EUT Configuration

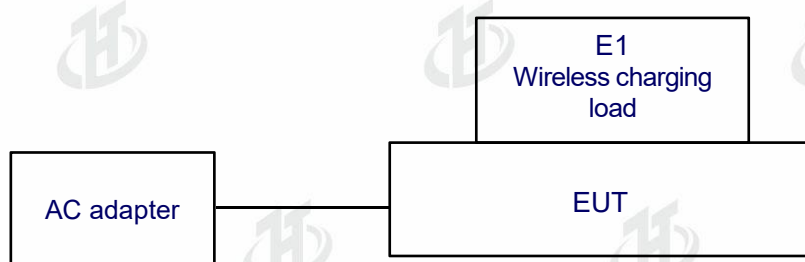

#### 3.4 Test Conditions

Temperature: 23~26°C

Relative Humidity: 54~63 %



### 3.5 Description Of Support Uni/ (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support uni/ or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless charging load	N/A	EESON	N/A	AE
E-2	AC adapter	N/A	CHG-WALL-PD-45W	N/A	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.





## 3.6 EQUIPMEN/ LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	May 10, 2024	May 09, 2025
2	Loop antenna	EMCI	LAP600	272	May 10, 2024	May 09, 2025
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	May 10, 2024	May 09, 2025
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 10, 2024	May 09, 2025
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	May 28, 2024	May 27, 2025
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 16, 2024	May 15, 2025
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	May 10, 2024	May 09, 2025
8	Amplifier	AEROFLEX	100KHz-40GHz	097	May 10, 2024	May 09, 2025
9	Spectrum Analyzer	R&S	FSV40	101413	May 16, 2024	May 15, 2025
10	966 Anechoic Chamber	EMToni	9m6m6m	/	Nov. 25, 2021	Nov. 24, 2024
11	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 10, 2024	May 09, 2025
12	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 10, 2024	May 09, 2025
13	Single Generator	Agilent	N5182A	MY48180575	May 10, 2024	May 09, 2025
14	Power Sensor	MWRFtest	MW100-RFCB	/	May 10, 2024	May 09, 2025
15	Power Amplifier Shielding Room	EMToni	2m3m3m	/	Nov. 25, 2021	Nov. 24, 2024
16	CABLE	EMToni	DA800-NM-NM-11000MM	/	May 10, 2024	May 09, 2025



Conduction Test equipment

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 10, 2024	May 09, 2025
LISN	R&S	ENV216	102794	May 10, 2024	May 09, 2025
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	May 10, 2024	May 09, 2025
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	May 10, 2024	May 09, 2025
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 10, 2024	May 09, 2025
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 10, 2024	May 09, 2025
CE Shielding Room	EMToni	9m4m3m	/	Nov. 25, 2021	Nov. 24, 2024
CABLE	EMToni	G223-NM-BNC M-2000MM	/	May 10, 2024	May 09, 2025



#### 4. CONDUCTED EMISSION TEST

##### 4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

##### 4.1.1 POWER LINE CONDUCTED EMISSION Limi/

FREQUENCY (MHz)	Limit (dBuV)		Standard
	QP	AVG	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) \*Decreases with the logarithm of the frequency.


##### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipmen/ powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

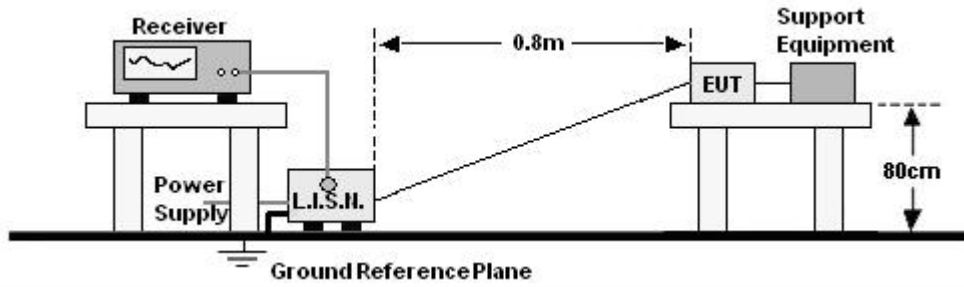


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4

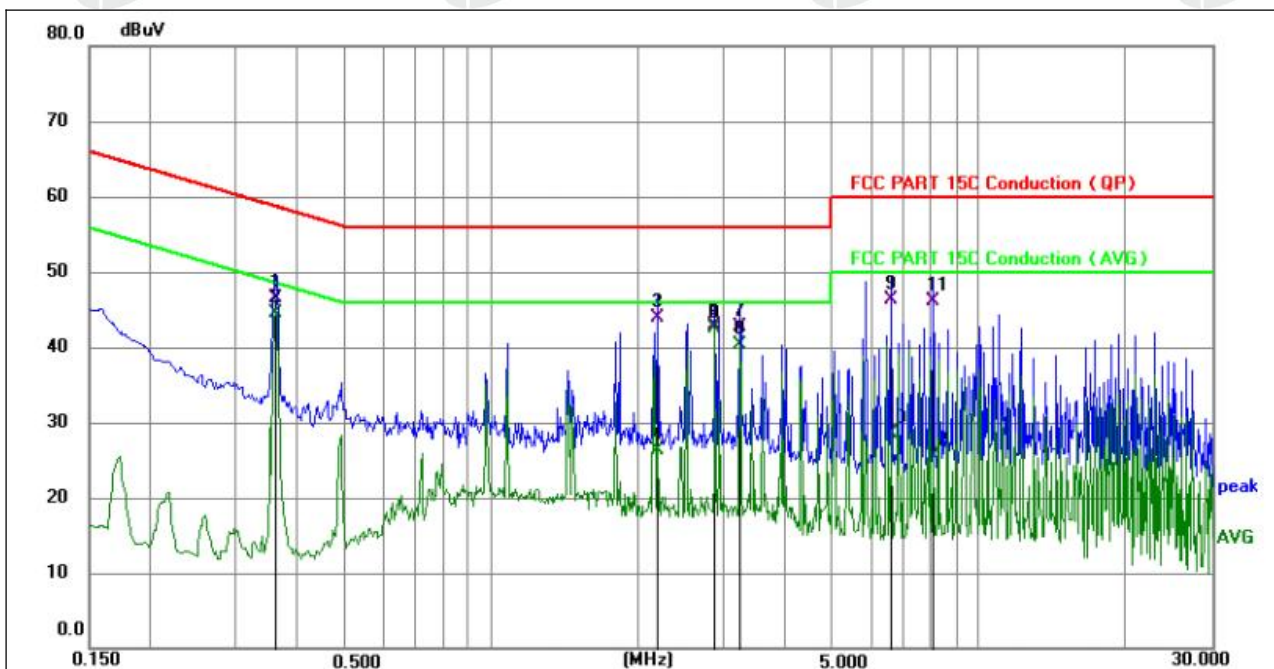


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3613	36.49	9.97	46.46	58.70	-12.24	QP	P	
2	0.3613	34.61	9.97	44.58	48.70	-4.12	AVG	P	
3	2.1974	33.78	10.07	43.85	56.00	-12.15	QP	P	
4	2.1974	16.22	10.07	26.29	46.00	-19.71	AVG	P	
5	2.8770	32.93	10.07	43.00	56.00	-13.00	QP	P	
6 *	2.8770	32.49	10.07	42.56	46.00	-3.44	AVG	P	
7	3.2370	32.55	10.08	42.63	56.00	-13.37	QP	P	
8	3.2370	30.14	10.08	40.22	46.00	-5.78	AVG	P	
9	6.5940	36.25	10.11	46.36	60.00	-13.64	QP	P	
10	6.5940	18.31	10.11	28.42	50.00	-21.58	AVG	P	
11	8.0610	35.94	10.09	46.03	60.00	-13.97	QP	P	
12	8.0610	15.32	10.09	25.41	50.00	-24.59	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4

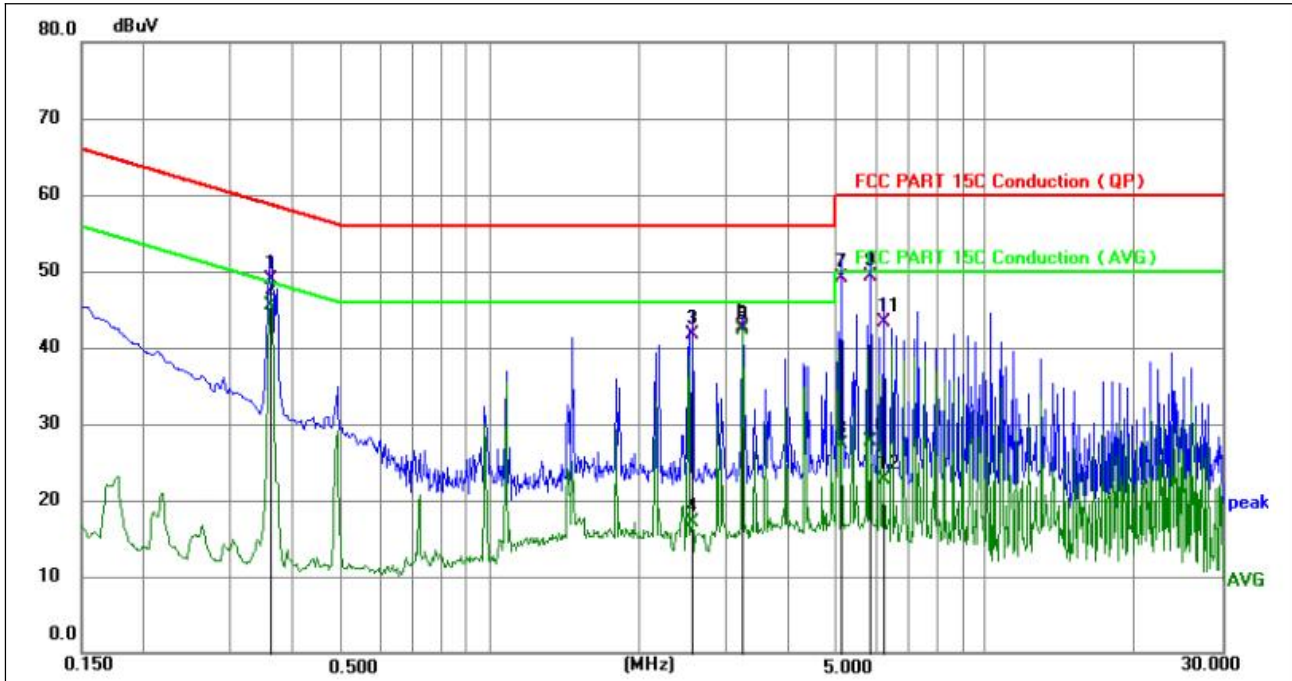

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F	Remark
1	0.3613	38.87	9.97	48.84	58.70	-9.86	QP	P	
2 *	0.3613	35.60	9.97	45.57	48.70	-3.13	AVG	P	
3	2.5665	31.70	10.06	41.76	56.00	-14.24	QP	P	
4	2.5665	7.00	10.06	17.06	46.00	-28.94	AVG	P	
5	3.2370	32.72	10.08	42.80	56.00	-13.20	QP	P	
6	3.2370	32.25	10.08	42.33	46.00	-3.67	AVG	P	
7	5.1314	38.90	10.12	49.02	60.00	-10.98	QP	P	
8	5.1314	17.23	10.12	27.35	50.00	-22.65	AVG	P	
9	5.8605	39.14	10.11	49.25	60.00	-10.75	QP	P	
10	5.8605	17.66	10.11	27.77	50.00	-22.23	AVG	P	
11	6.2294	33.27	10.11	43.38	60.00	-16.62	QP	P	
12	6.2294	12.63	10.11	22.74	50.00	-27.26	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



**5. RADIATED EMISSION MEASUREMENT**

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 Radiated Emission Limit

**Limi/ for frequency below 30MHz**


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

**Limi/ for frequency Above 30MHz**


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

## 5.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

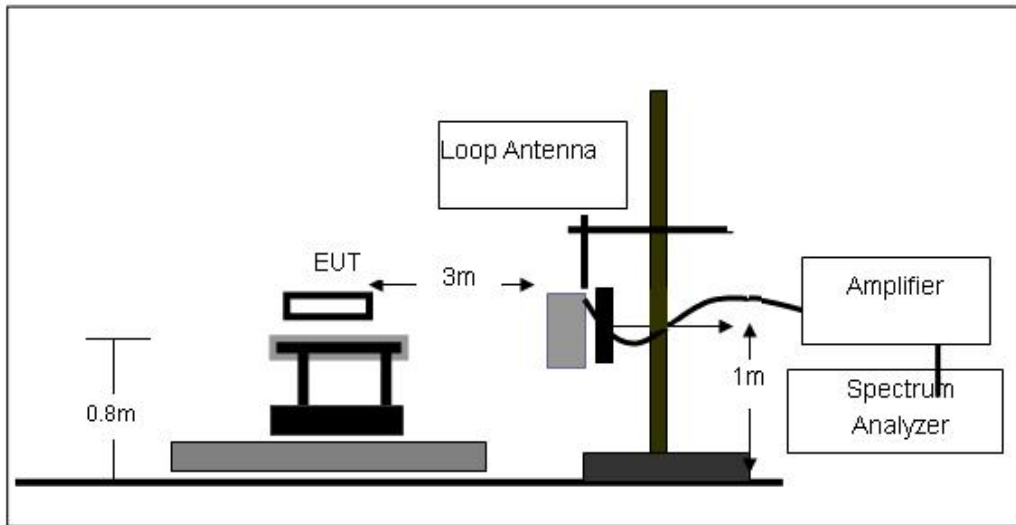

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

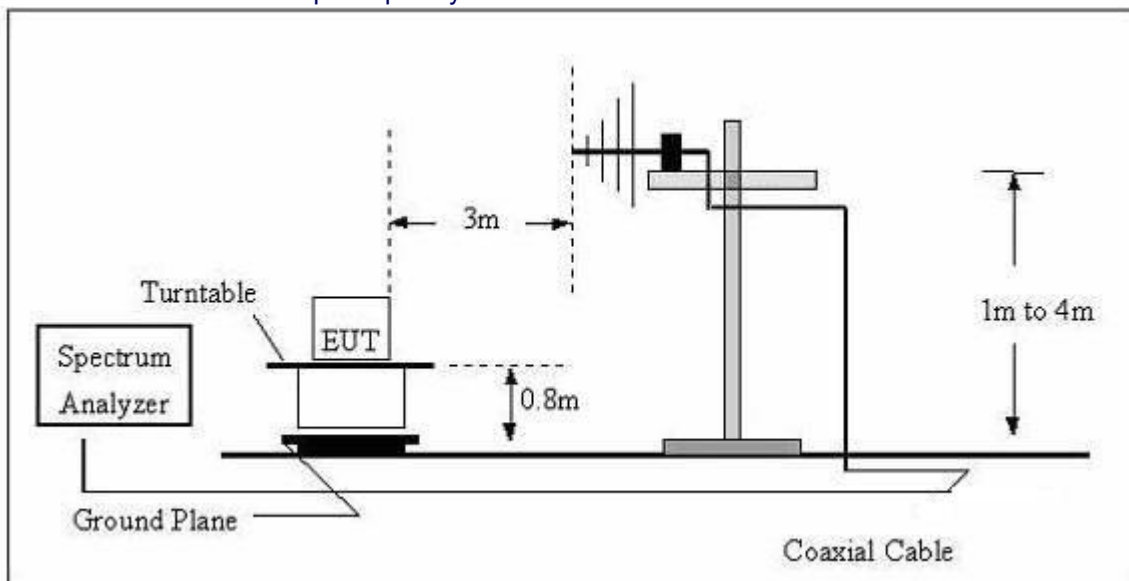

The radiated emission test were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limit.

## 5.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

## 5.4 DEVIATION FROM TEST STANDARD

No deviation





5.5 Test Result


Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	coaxial
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 4

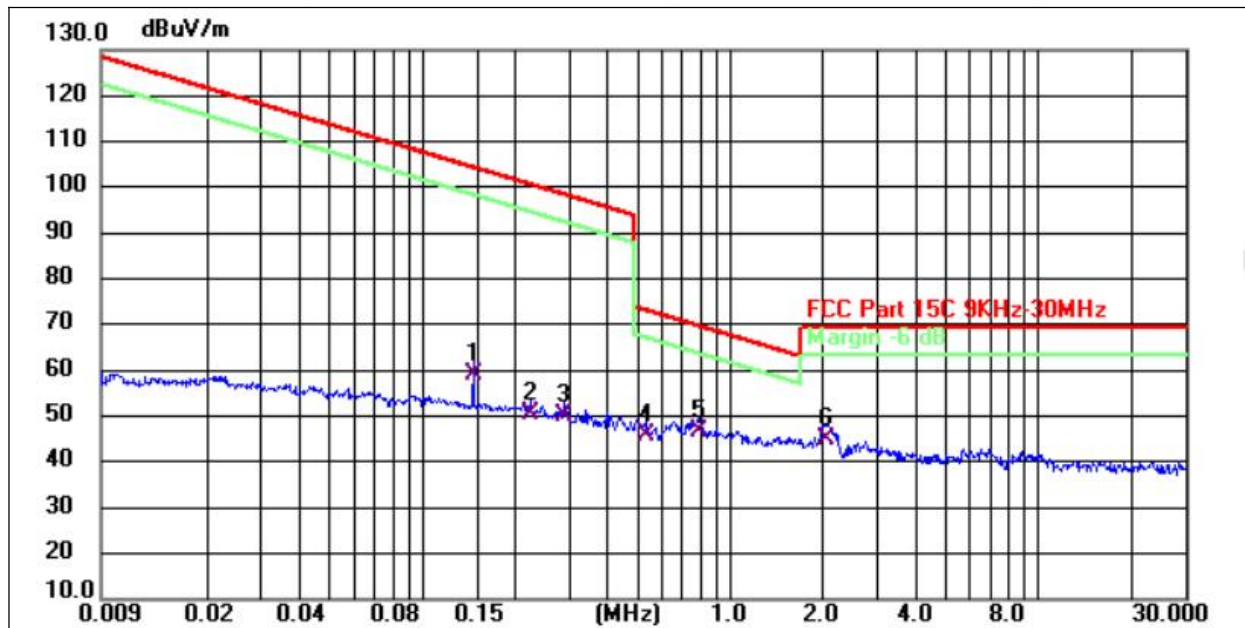

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.145	59.00	0.16	59.16	104.38	-45.22	QP
2	0.224	49.75	0.58	50.33	100.60	-50.27	QP
3	0.287	49.22	0.71	49.93	98.45	-48.52	QP
4	0.528	44.48	1.16	45.64	73.15	-27.51	QP
5 *	0.786	45.03	1.69	46.72	69.70	-22.98	QP
6	2.030	40.79	4.22	45.01	69.54	-24.53	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Emission Level = Meter Reading - Factor


Margin = Emission Level- Limit.

The amplitude of emissions which are attenuated by more than 20db below the permissible value has no need to be reported.



30MHz-1GHz


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 4

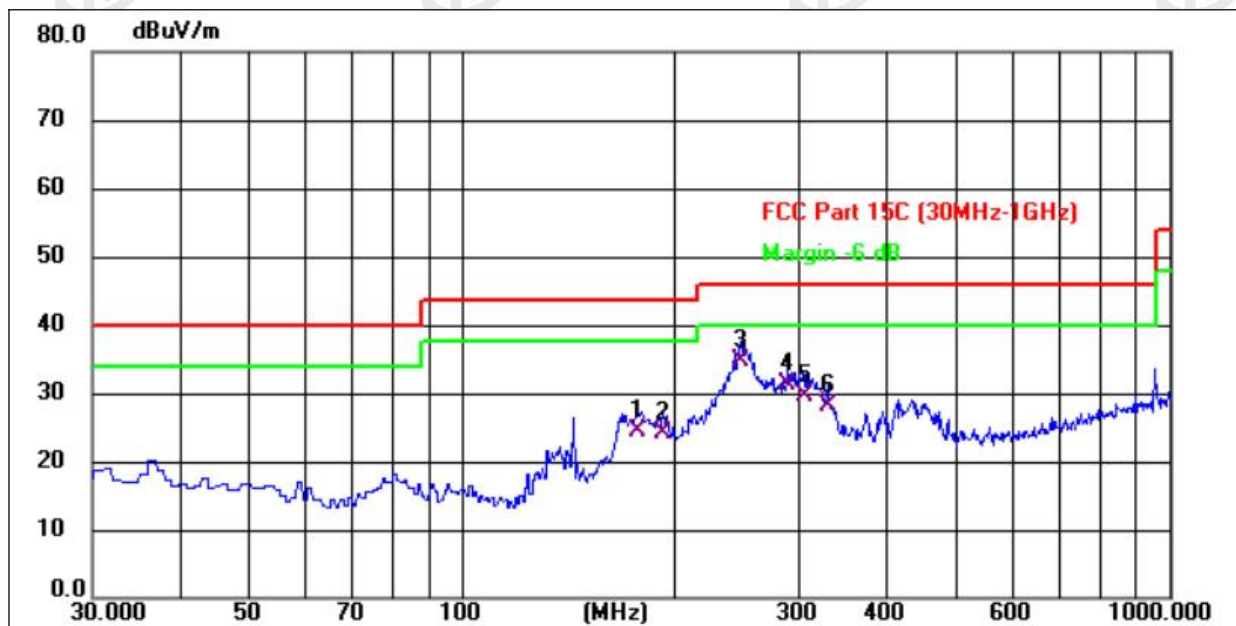

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	177.440	36.96	-12.64	24.32	43.50	-19.18	QP
2	191.745	35.85	-11.71	24.14	43.50	-19.36	QP
3 *	247.280	43.99	-9.36	34.63	46.00	-11.37	QP
4	288.020	39.69	-8.49	31.20	46.00	-14.80	QP
5	305.480	37.74	-8.12	29.62	46.00	-16.38	QP
6	328.760	35.79	-7.59	28.20	46.00	-17.80	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 4

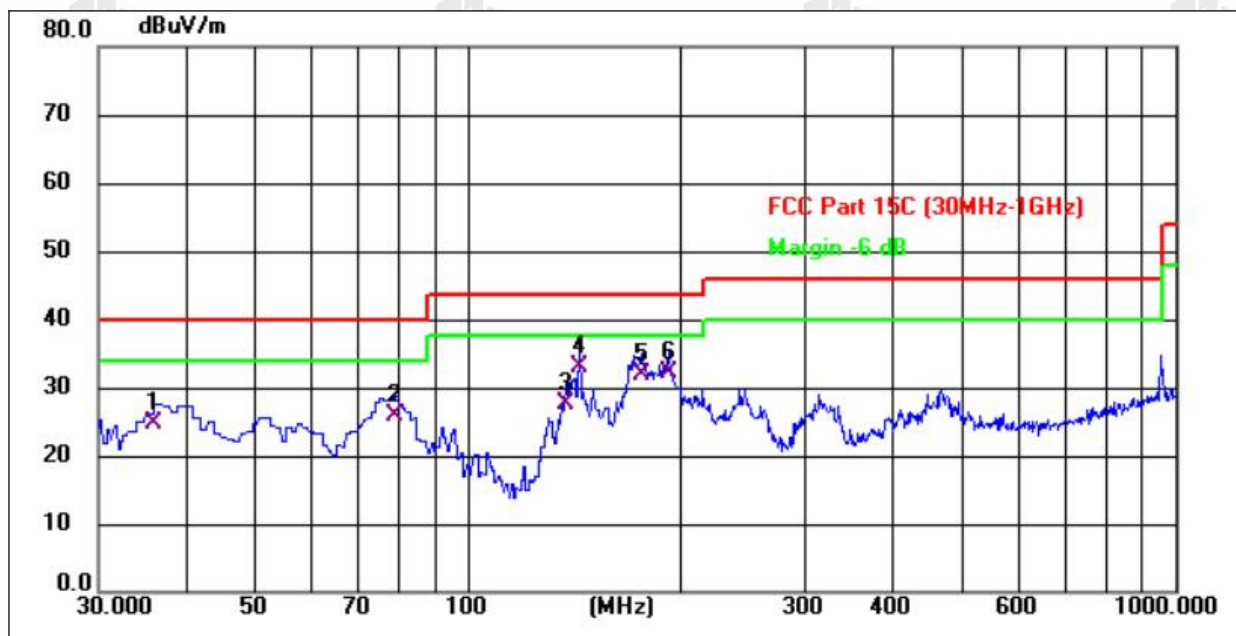

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.001	33.11	-8.42	24.69	40.00	-15.31	QP
2	78.965	40.05	-14.27	25.78	40.00	-14.22	QP
3	137.420	41.24	-13.64	27.60	43.50	-15.90	QP
4 *	143.326	46.96	-13.87	33.09	43.50	-10.41	QP
5	175.500	44.73	-12.74	31.99	43.50	-11.51	QP
6	191.745	43.88	-11.71	32.17	43.50	-11.33	QP

Remarks:

1. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
2. Level = Reading + Factor
3. Margin = Emission Level- Limit.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



## 6. BANDWIDTH TEST

1. Set RBW = 10 Hz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude point (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


### TEST SETUP





Temperature:	25.7 °C	Relative Humidity:	55%
Pressure:	101kPa		

Frequency (KHz)	20dB bandwidth (KHz)	Result
145.0	0.025	Pass

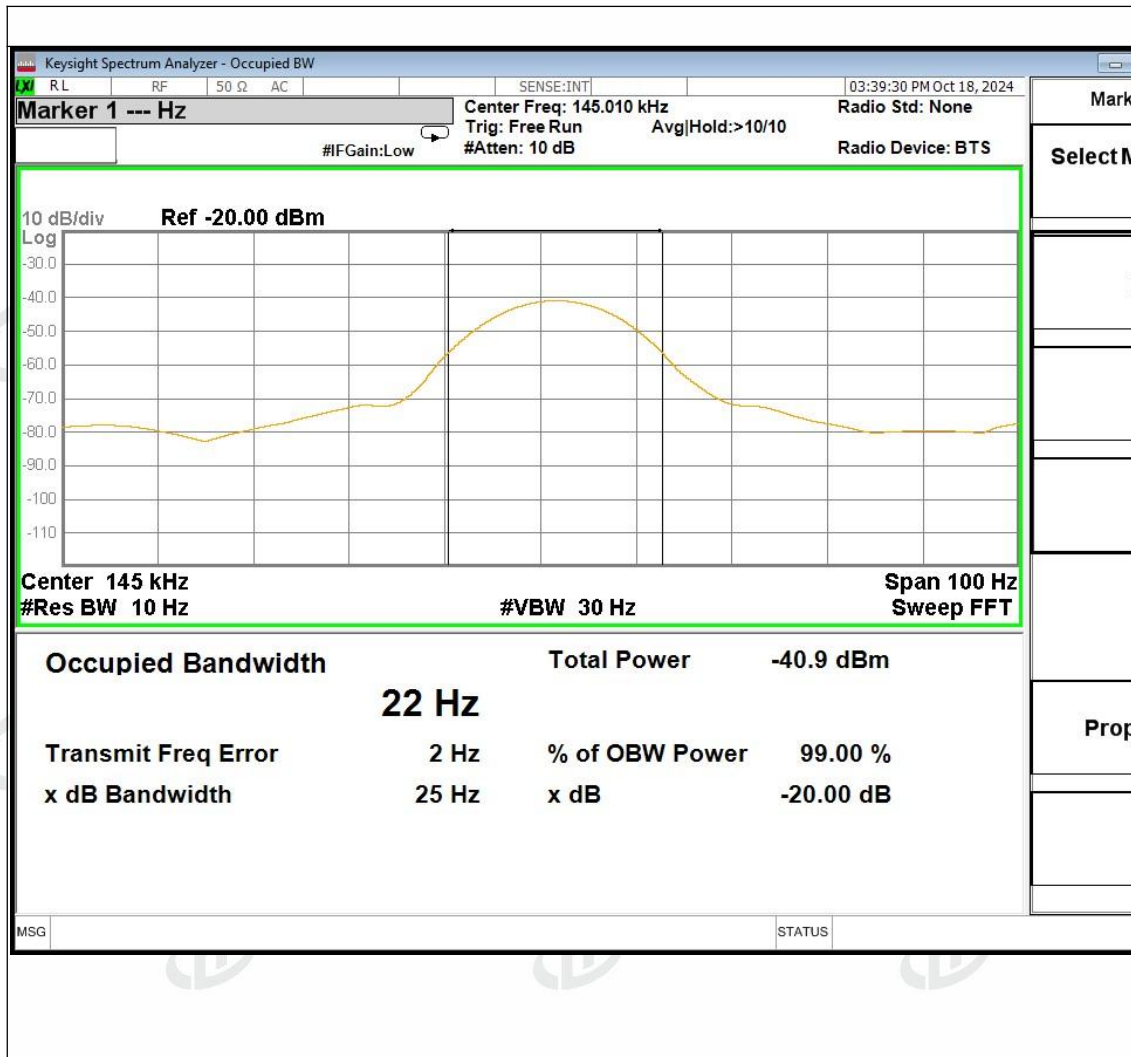



### 7. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:	The antenna is Coil Antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details



**8. TEST SETUP PHOTO**

Reference to the appendix I for details.

**9. EUT CONSTRUCTIONAL DETAILS**

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*