

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.247 (FHSS),
RSS-247 Issue 3:2023, RSS-Gen Issue 5

FOR:

ARAD TECHNOLOGIES

Allegro Cellular

Model: PIT Unit X

FCC ID: 2A7AA-CM2R1PIT4G

IC: 28664-CM2R1PIT4G

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements	7
7.1	20 dB bandwidth	7
7.2	Carrier frequency separation	12
7.3	Number of hopping frequencies	14
7.4	Average time of occupancy	17
7.5	Peak output power	20
7.6	Field strength of spurious emissions	26
7.7	Band edge radiated emissions	44
7.8	Antenna requirements	48
8	APPENDIX A Test equipment and ancillaries used for tests	49
9	APPENDIX B Test equipment correction factors	50
10	APPENDIX C Measurement uncertainties	53
11	APPENDIX D Test laboratory description	54
12	APPENDIX E Specification references	55
13	APPENDIX F Abbreviations and acronyms	56

1 Applicant information

Client name: ARAD TECHNOLOGIES
Address: POB 537, HaMada 4, Yokneam Ind. Zone, Yokneam Ilit 20692, Israel
Telephone: 04-9935222, Ext: 271
Fax: 04-9935227
E-mail: viorel.negreanu@aradtec.com
Contact name: Mr. Vily Negreanu

2 Equipment under test attributes

Product name: Allegro Cellular
Product type: Transceiver
Model(s): PIT Unit X
Serial number: 80E12696A18F
Hardware version: PCB00266 (1)
Software release: 74.1.9
Receipt date 23-May-24

3 Manufacturer information

Manufacturer name: ARAD TECHNOLOGIES
Address: POB 537, HaMada 4, Yokneam Ind. Zone, Yokneam Ilit 20692, Israel
Telephone: 04-9935222, Ext: 271
Fax: 04-9935227
E-Mail: viorel.negreanu@aradtec.com
Contact name: Mr. Vily Negreanu

4 Test details

Project ID: 54470
Location: Hermon Laboratories Ltd. 66 HaTachana str., P.O. Box 23, Binyamina 3055001, Israel
Test started: 27-Jun-24
Test completed: 11-Jul-24
Test specification(s): FCC 47CFR part 15 subpart C §15.247 (FHSS),
RSS-247 Issue 3:2023, RSS-Gen Issue 5

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)1 / RSS-247 section 5.1(c), 20 dB bandwidth	Pass
Section 15.247(b) / RSS-247 section 5.4(a), Peak output power	Pass
Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
Section 15.247(a)1 / RSS-247 section 5.1(b), Frequency separation	Pass
Section 15.247(a)1 / RSS-247 section 5.1(c), Number of hopping frequencies	Pass
Section 15.247(a)1 / RSS-247 section 5.1(c), Average time of occupancy	Pass
Section 15.247(i)5 / RSS-102 section 2.5, RF exposure	Pass, the exhibit to the application of certification is provided
Section 15.247(d) / RSS-247 section 5.5, Emissions at band edges	Pass
Section 15.207(a) / RSS-Gen section 8.8, Conducted emission	Not required
Section 15.203 / RSS-Gen section 8.3, Antenna requirements	Pass

This test report supersedes the previously issued test report identified by Doc ID: ARARAD_FCC.54470_LoRa

Testing was completed against all relevant requirements of the test standard. However, results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer, EMC & Radio	27-Jun-24 – 11-Jul-24	
Reviewed by:	Mrs. S. Peysahov Sheynin, certification specialist, EMC & Radio	20-Jul-24	
Approved by:	Mr. M. Nikishin, group leader, EMC & Radio	14-Aug-24	


6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The Allegro cellular PIT booster Module is a battery-operated radio module designed for automated water meter reading. The Allegro cellular is capable of reading water consumption data from residential and commercial water meters equipped with an Encoder or Solid-State Register. It uses CAT-M cellular / LoRaWAN radio for relaying water consumption data to the utility. And Bluetooth short range wireless technology for unit parameters configuration and maintenance interface.

6.2 Test configuration

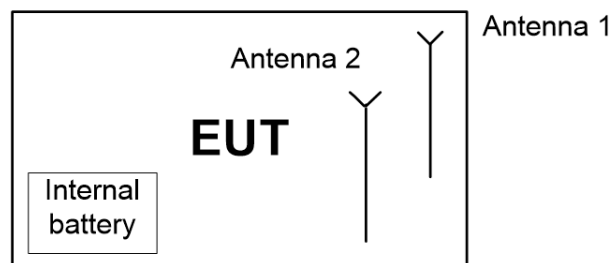

6.3 Transmitter characteristics

Type of equipment					
X	Stand-alone (Equipment with or without its own control provisions)				
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use			
X	fixed	Always at a distance more than 2 m from all people			
	mobile	Always at a distance more than 20 cm from all people			
	portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency ranges		902 – 928 MHz			
Operating frequencies		902.3 – 914.9 MHz			
Maximum rated output power		At transmitter 50 Ω RF output connector			dBm
		Peak output power			27.94 dBm
Is transmitter output power variable?		X	No		
			Yes		continuous variable
				stepped variable with stepsize	dB
				minimum RF power	dBm
				maximum RF power	dBm
Antenna connection					
unique coupling		standard connector		X	integral
				X	without temporary RF connector
Antenna/s technical characteristics					
Type		Manufacturer		Model number	
Intergrated		Inhouse design		N/A	
Transmitter aggregate data rate/s		980bps 5470bps			
Type of modulation		Chirp Spread Spectrum CSS			
Modulating test signal (baseband)		LoRa			
Transmitter power source					
X	Battery	Nominal rated voltage	3.6 VDC	Battery type	Lithium Inorganic battery
	DC	Nominal rated voltage			
	AC mains	Nominal rated voltage		Frequency	
Common power source for transmitter and receiver				X	yes
					no
Spread spectrum technique used		X	Frequency hopping (FHSS)		
			Digital transmission system (DTS)		
			Hybrid		
Spread spectrum parameters for transmitters tested per FCC 15.247 only					
FHSS	Total number of hops		64		
	Bandwidth per hop		144.36 kHz		
	Max. separation of hops		200 kHz		



Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s): 27-Jun-24			
Temperature: 23 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements

7.1 20 dB bandwidth

7.1.1 General

This test was performed to measure the 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	250	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.

7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

7.1.2.4 The test was repeated for each data rate and each modulation format.

Figure 7.1.1 The 20 dB bandwidth test setup





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s): 27-Jun-24			
Temperature: 23 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
DETECTOR USED: Peak
SWEEP TIME: Auto
VIDEO BANDWIDTH: ≥ RBW
FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, bps	99% OBW kHz	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency							
902.3	LoRa	980	126.05	143.86	250	-106.14	Pass
		5470	127.24	137.86	250	-112.14	Pass
Mid frequency							
908.7	LoRa	980	126.28	144.36	250	-105.64	Pass
		5470	127.20	138.86	250	-111.14	Pass
High frequency							
914.9	LoRa	980	126.02	143.86	250	-106.14	Pass
		5470	127.08	137.86	250	-112.14	Pass

Reference numbers of test equipment used

HL 5288	HL 5902	HL 3903						
---------	---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES



Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s): 27-Jun-24			
Temperature: 23 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.1.1 20 dB bandwidth test result at low frequency

BIT RATE 980 bps

99%OBW



20 dB OBW

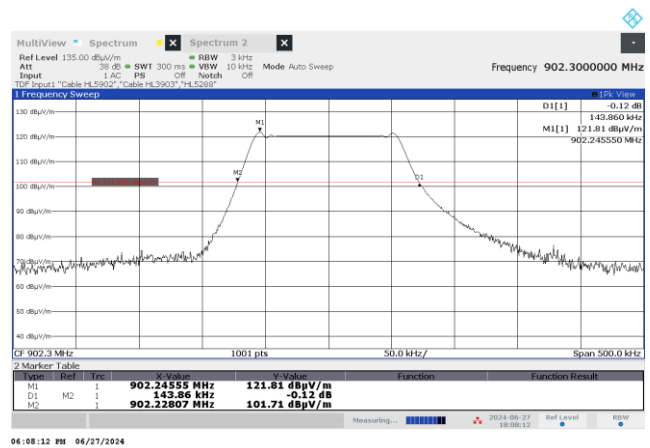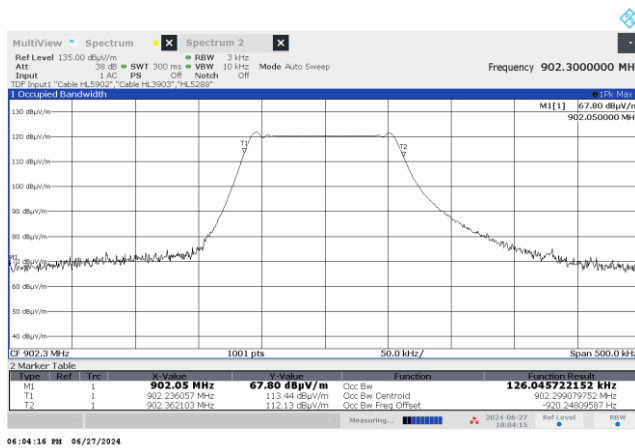

BIT RATE 5470 bps

99%OBW

20 dB OBW

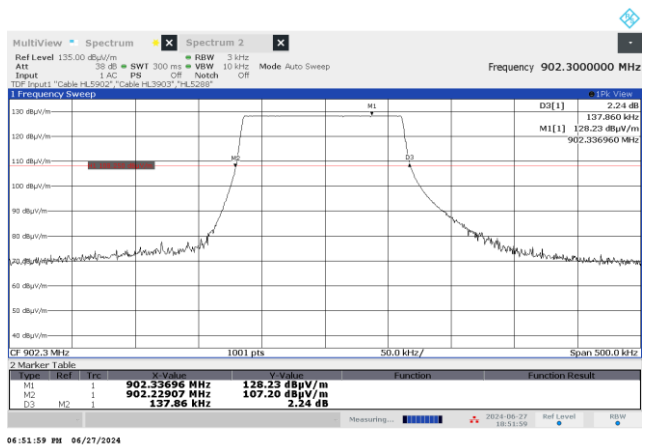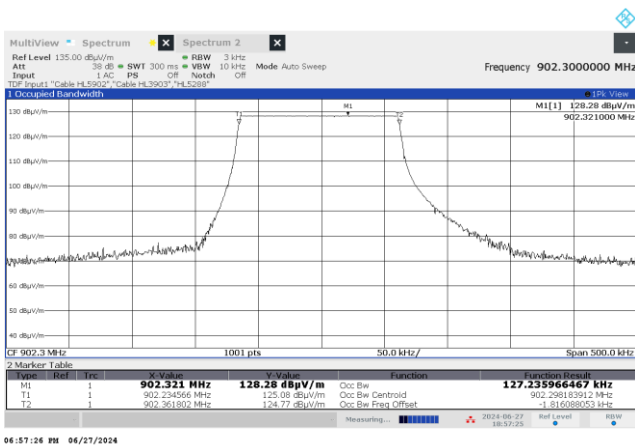




HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s): 27-Jun-24			
Temperature: 23 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.1.2 The 20 dB bandwidth test result at mid frequency


BIT RATE 980 bps

99%OBW

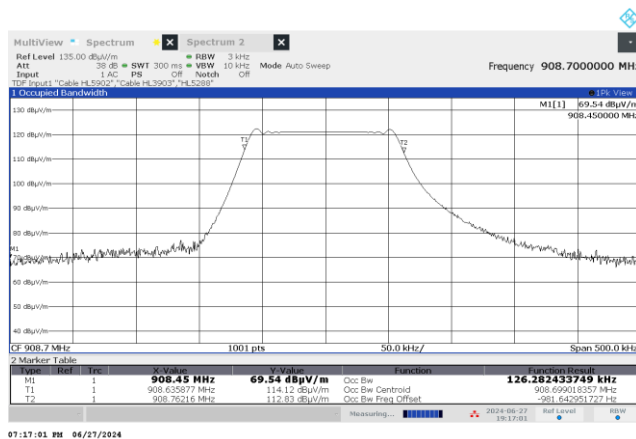

07:17:01 PM 06/27/2024


20 dB OBW

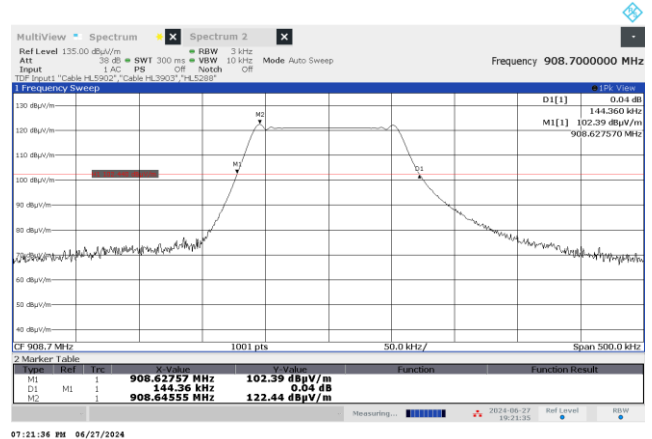

07:21:36 PM 06/27/2024


BIT RATE 5470 bps

99%OBW

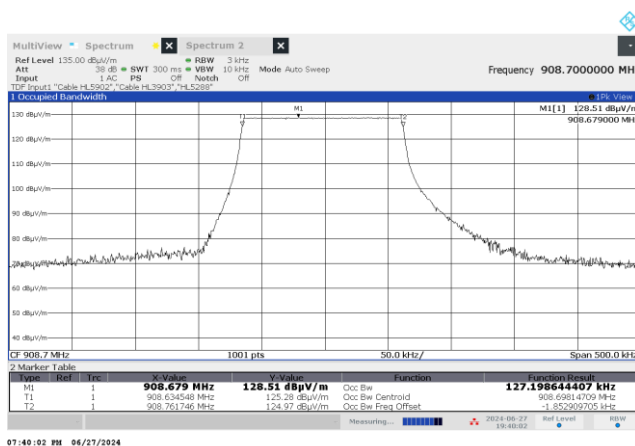

07:40:02 PM 06/27/2024

20 dB OBW

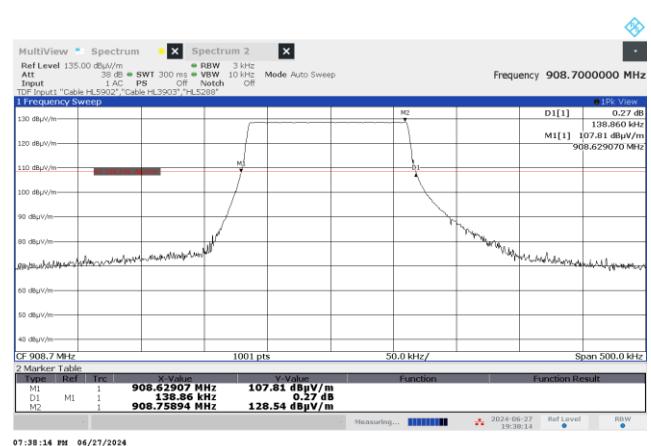

07:38:14 PM 06/27/2024



HERMON LABORATORIES



Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s): 27-Jun-24			
Temperature: 23 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.1.3 The 20 dB bandwidth test result at high frequency

BIT RATE 980 bps

99%OBW



20 dB OBW

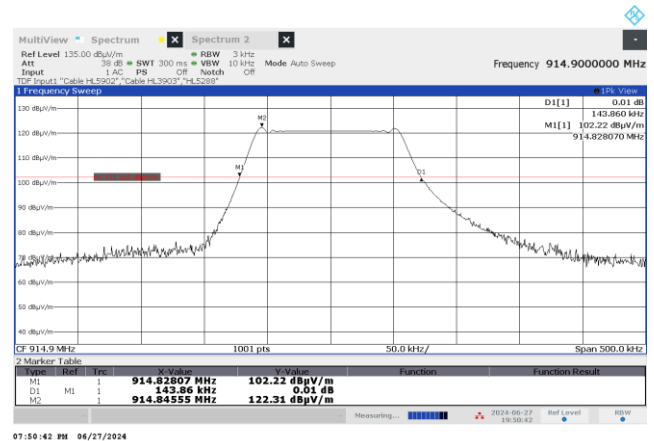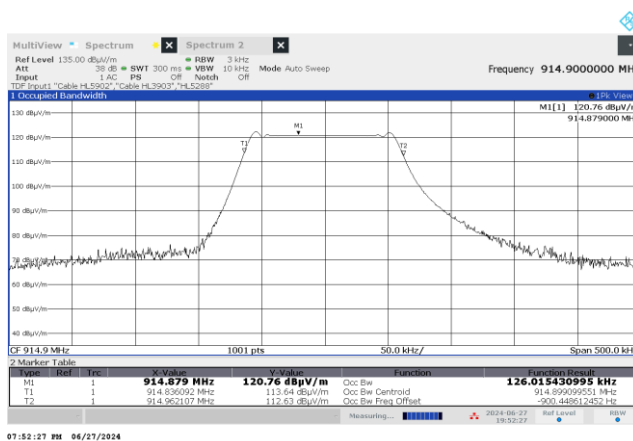

BIT RATE 5470 bps

99%OBW

20 dB OBW

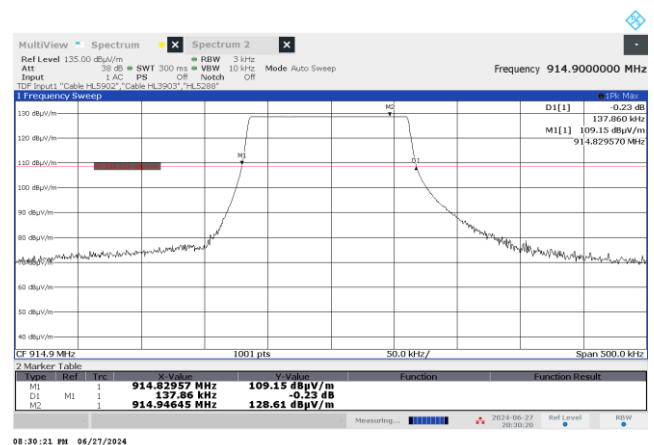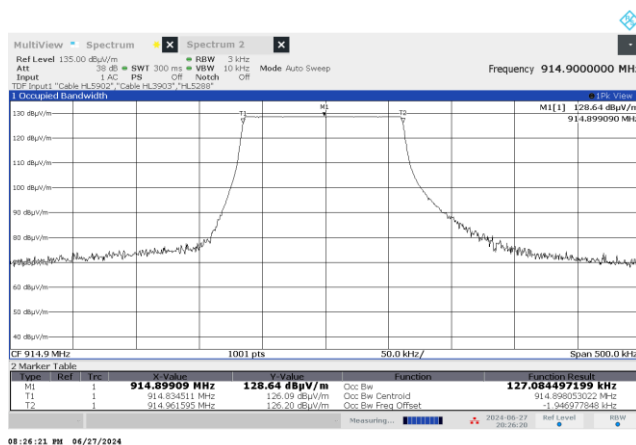



Test specification: Section 15.247(a)1, RSS-247 section 5.1(2), Frequency separation			
Test procedure: ANSI C63.10, section 7.8.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.


Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation	
	Output power 30 dBm	Output power 21 dBm
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater	25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5		
5725.0 – 5850.0		

7.2.2 Test procedure

- 7.2.2.1** The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2** The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3** The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4** The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and associated plots.

Figure 7.2.1 Carrier frequency separation test setup





Test specification: Section 15.247(a)1, RSS-247 section 5.1(2), Frequency separation			
Test procedure: ANSI C63.10, section 7.8.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 MODULATION: LoRa
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: $\geq$ RBW
 FREQUENCY HOPPING: Enabled

BIT RATE: 980 bps
 20 dB BANDWIDTH: 144.36 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin, kHz*	Verdict
200	144.36	-55.64	Pass

BIT RATE: 5470 bps
 20 dB BANDWIDTH: 138.86 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin, kHz*	Verdict
200	138.86	-60.14	Pass


* - Margin = Carrier frequency separation – specification limit.

Reference numbers of test equipment used

HL 2780	HL 3434	HL 4136	HL 7546	HL 5622			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.

Plot 7.2.1 Carrier frequency separation

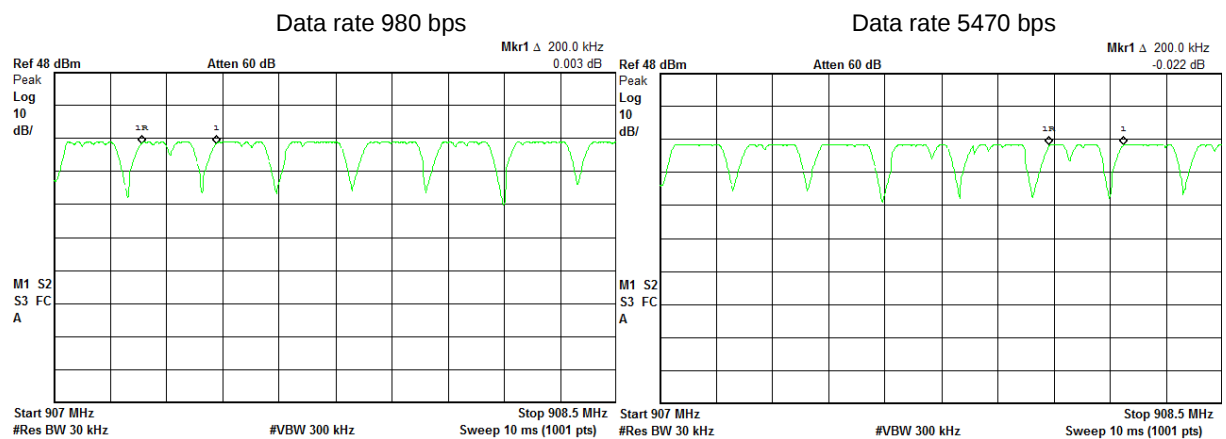



Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Number of hopping frequencies			
Test procedure: ANSI C63.10, section 7.8.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

7.3.2 Test procedure


7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.

7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.

7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.

7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and associated plots.

Figure 7.3.1 Hopping frequencies test setup





Test specification:		Section 15.247(a)1, RSS-247 section 5.1(3), Number of hopping frequencies	
Test procedure:		ANSI C63.10, section 7.8.3	
Test mode:		Verdict: PASS	
Date(s):			
01-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
MODULATION: LoRa
DETECTOR USED: Peak
FREQUENCY HOPPING: Enabled

BIT RATE: 980 bps

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
64	50	14	Pass

BIT RATE: 5470 bps

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
64	50	14	Pass

* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used

HL 2780	HL 4136	HL 3434	HL 7546	HL 5622			
---------	---------	---------	---------	---------	--	--	--



Full description is given in Appendix A.





HERMON LABORATORIES

Test specification:		Section 15.247(a)1, RSS-247 section 5.1(3), Number of hopping frequencies	
Test procedure:		ANSI C63.10, section 7.8.3	
Test mode:		Verdict: PASS	
Date(s):			
01-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.3.1 Number of hopping frequencies with bit rate 980 bps

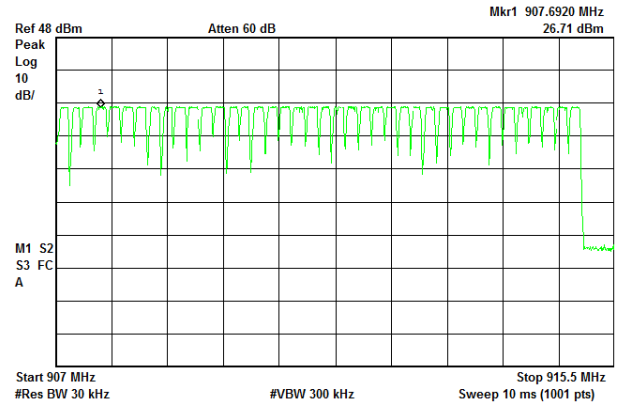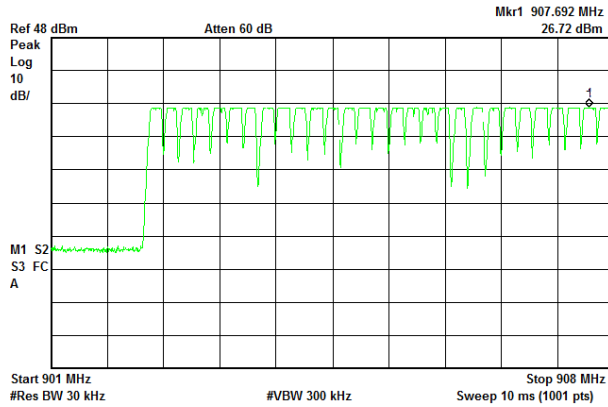

Plot 7.3.2 Number of hopping frequencies with bit rate 5470 bps

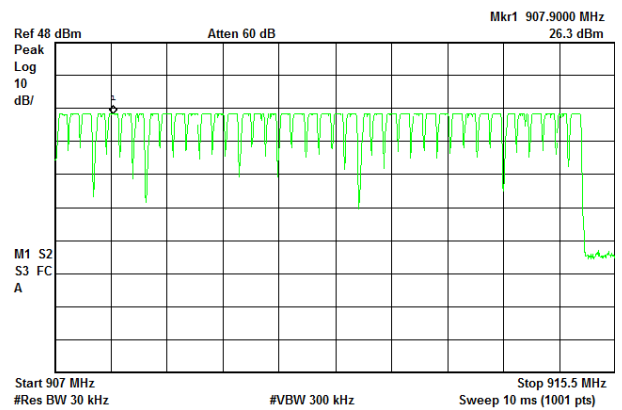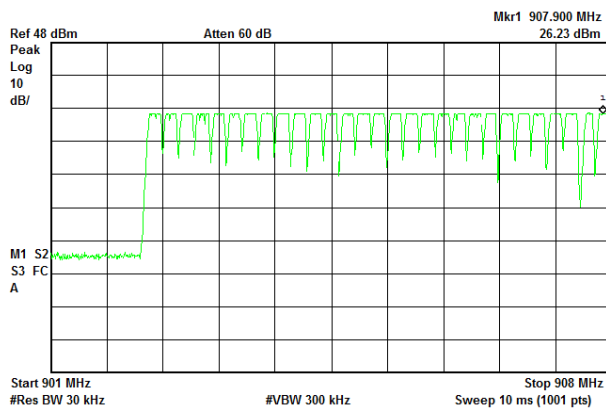



Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Average time of occupancy			
Test procedure: ANSI C63.10, section 7.8.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.


Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	$0.4 \times N$	$N (\geq 15)$
5725.0 – 5850.0	0.4	30.0	≥ 75

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 7.4.2.3 The single transmission duration and period were measured with oscilloscope.
- 7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 7.4.2.5 The test was repeated at each data rate and modulation type as provided in Table 7.4.2 and associated plots.

Figure 7.4.1 Average time of occupancy test setup





Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Average time of occupancy			
Test procedure: ANSI C63.10, section 7.8.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 MODULATION: LoRa
 DETECTOR USED: Peak
 NUMBER OF HOPPING FREQUENCIES: 64
 INVESTIGATED PERIOD: 21 s
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, s	Number of transmissions within investigated period	Average time of occupancy*, s	Bit rate, bps	Limit, s	Margin, s**	Verdict
908.7	0.3715	1	0.37	980	0.4	-0.03	Pass
914.9	0.3715	1	0.37	5470	0.4	-0.03	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period) / (Single transmission period × number of hopping channels).

** - Margin = Average time of occupancy – specification limit.

Reference numbers of test equipment used

HL 2780	HL 4136	HL 7546	HL 5622				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Average time of occupancy			
Test procedure: ANSI C63.10, section 7.8.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.4.1 Single transmission duration

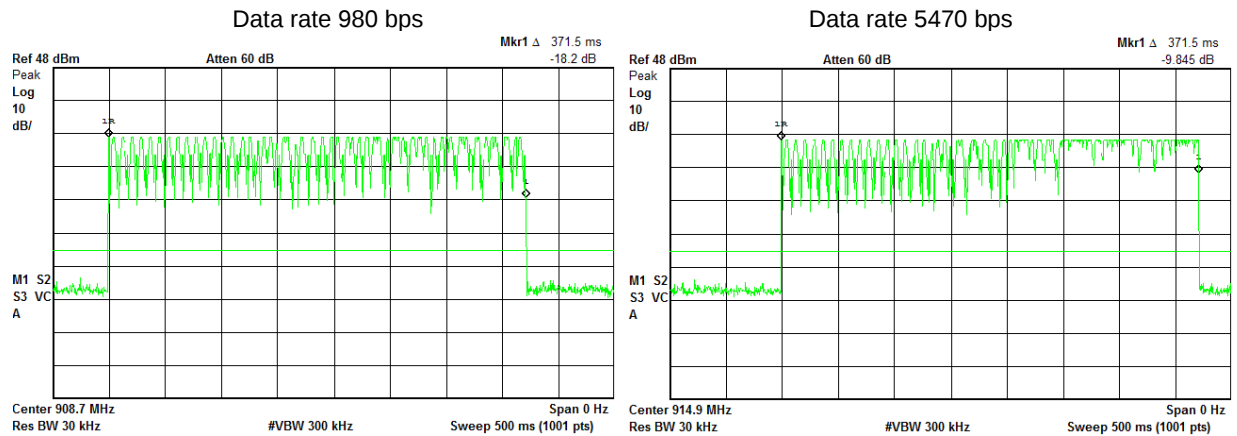

Plot 7.4.2 Number of transmissions within investigated period

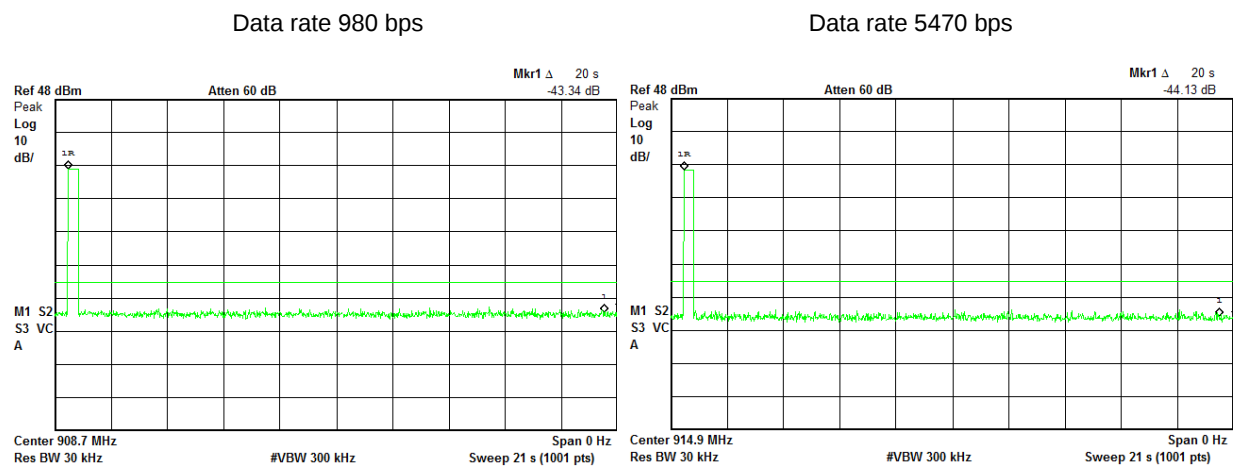



Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	0.25 (<50 hopping channels)	24.0(<50 hopping channels)	125.2 (<50 hopping channels)	6.0*
	1.0 (≥50 hopping channels)	30.0 (≥50 hopping channels)	131.2 (≥50 hopping channels)	
2400.0 – 2483.5	0.125 (<75 hopping channels)	21.0(<75 hopping channels)	122.2 (<75 hopping channels)	
	1.0 (≥75 hopping channels)	30.0 (≥75 hopping channels)	131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

*- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

** - The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:


$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.



Test specification:		Section 15.247(b), RSS-247 section 5.4(1), Peak output power	
Test procedure:		ANSI C63.10, section 7.8.5	
Test mode:		Verdict: PASS	
Date(s):			
04-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

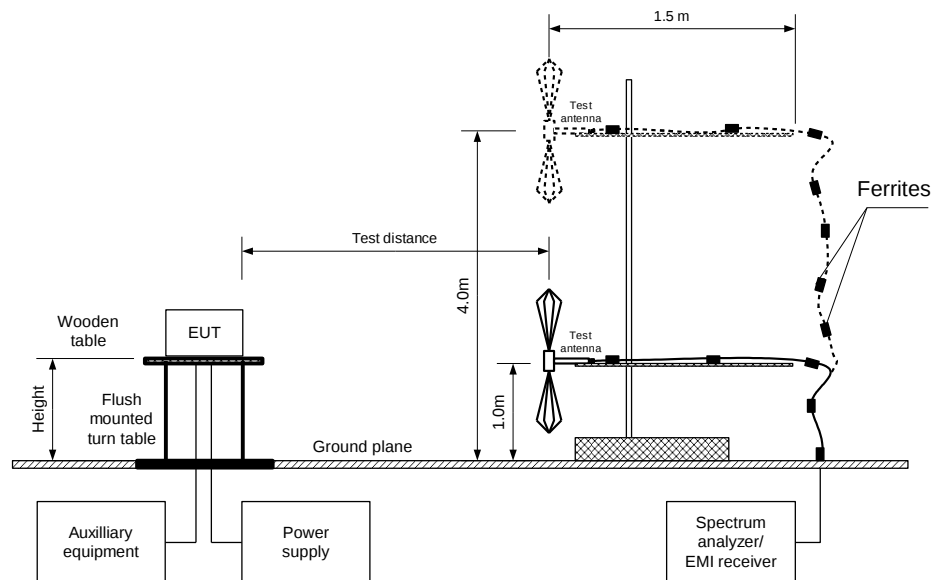



HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY: 902-928 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 0.8 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
 MODULATION: LoRa
 DETECTOR USED: Peak
 EUT 20 dB BANDWIDTH: 144.36 kHz
 RESOLUTION BANDWIDTH: 300 kHz
 VIDEO BANDWIDTH: 1 MHz
 FREQUENCY HOPPING: Disabled
 NUMBER OF FREQUENCY HOPPING CHANNELS: 64

BIT RATE 980 bps

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
902.3	122.16	Vertical	1.0	-38	0	26.96	30	-3.04	Pass
908.7	123.10	Vertical	1.0	-30	0	27.90	30	-2.10	Pass
914.9	123.12	Vertical	1.0	-32	0	27.92	30	-2.08	Pass

BIT RATE 5470 bps

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
902.3	122.86	Vertical	1.0	-39	0	27.66	30	-2.34	Pass
908.7	123.05	Vertical	1.0	-30	0	27.85	30	-2.15	Pass
914.9	123.14	Vertical	1.0	-37	0	27.94	30	-2.06	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

*** - Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 5288	HL 5902	HL 3903					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.5.1 Field strength of carrier at low frequency

Data rate 980 bps

Vertical antenna polarization

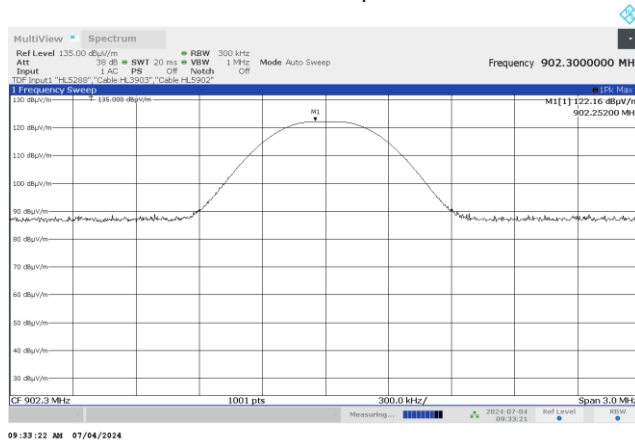


Horizontal antenna polarization

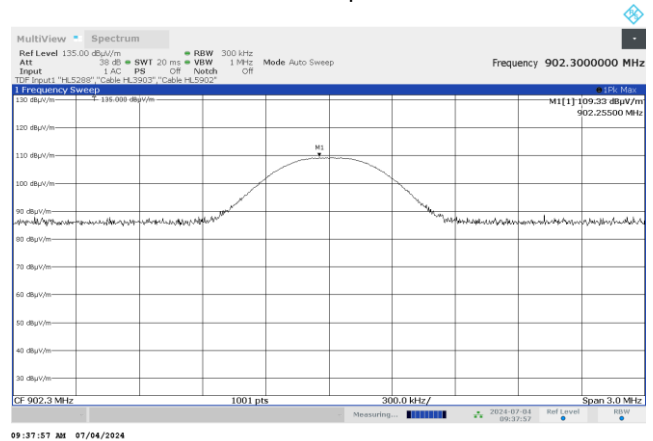


Data rate 5470 bps

Vertical antenna polarization

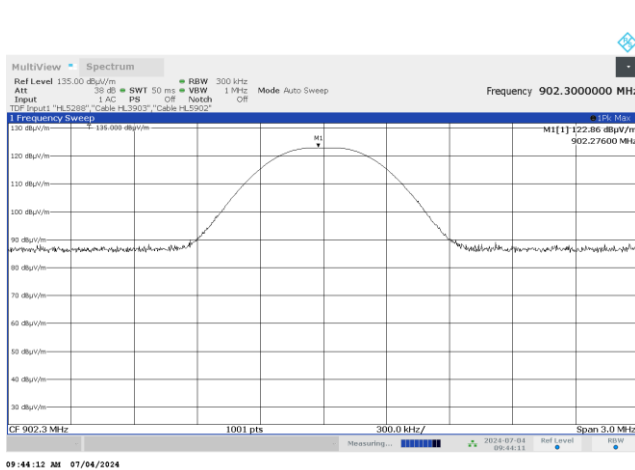

Horizontal antenna polarization

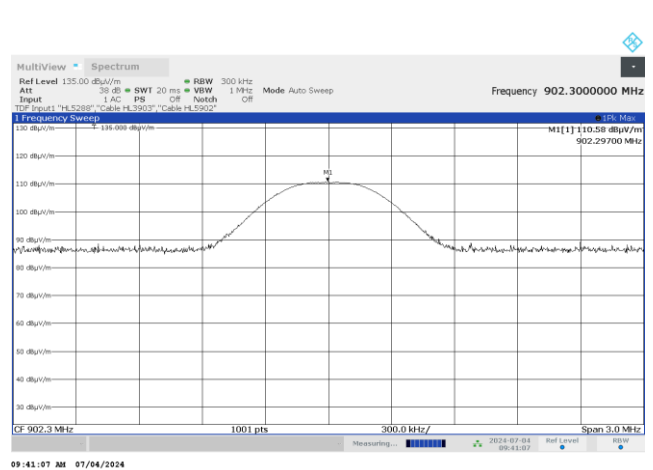




HERMON LABORATORIES

Test specification:		Section 15.247(b), RSS-247 section 5.4(1), Peak output power	
Test procedure:		ANSI C63.10, section 7.8.5	
Test mode:		Verdict: PASS	
Date(s):			
04-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.5.2 Field strength of carrier at mid frequency

Data rate 980 bps

Vertical antenna polarization

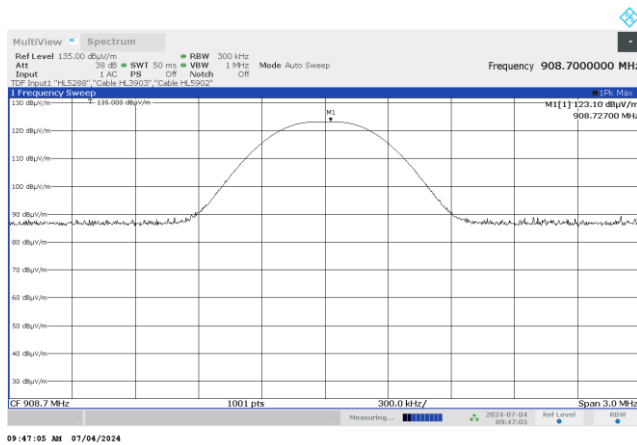


Horizontal antenna polarization

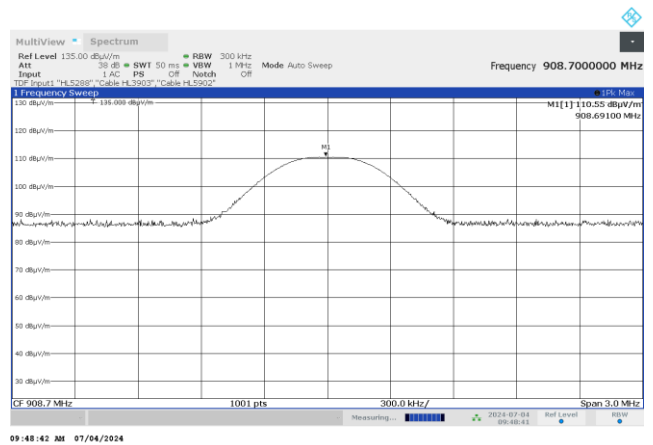


Data rate 5470 bps

Vertical antenna polarization

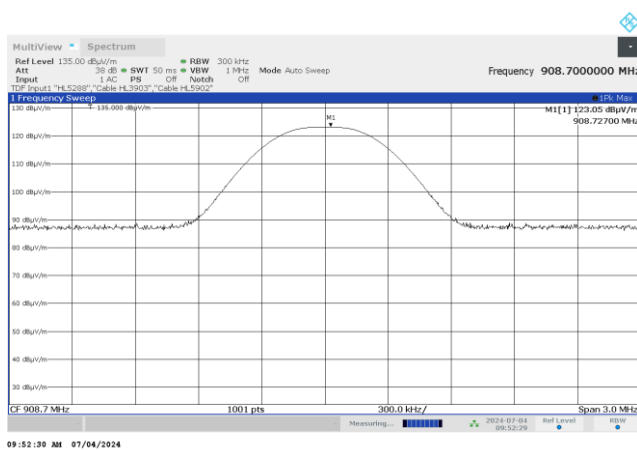

Horizontal antenna polarization

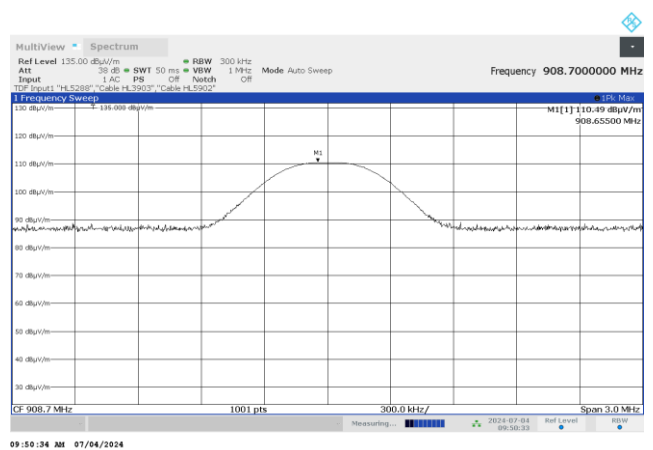




HERMON LABORATORIES

Test specification:		Section 15.247(b), RSS-247 section 5.4(1), Peak output power	
Test procedure:		ANSI C63.10, section 7.8.5	
Test mode:		Verdict: PASS	
Date(s):			
04-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.5.3 Field strength of carrier at high frequency

Data rate 980 bps

Vertical antenna polarization

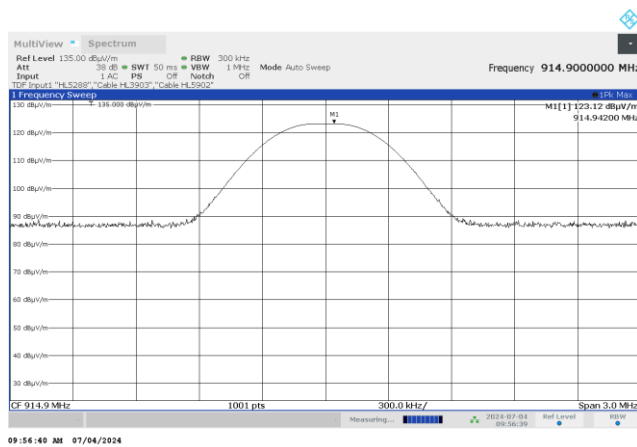


Horizontal antenna polarization

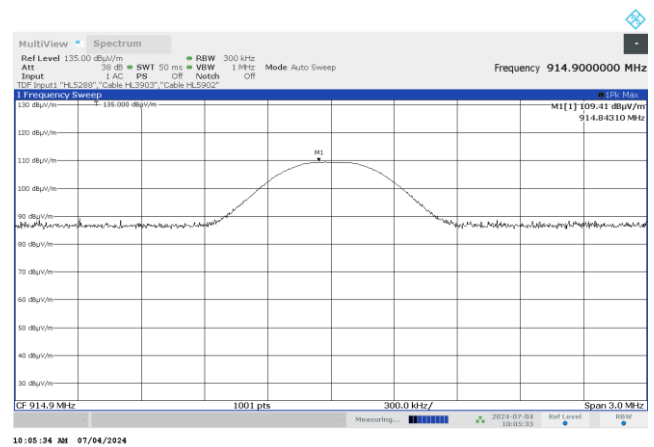


Data rate 5470 bps

Vertical antenna polarization

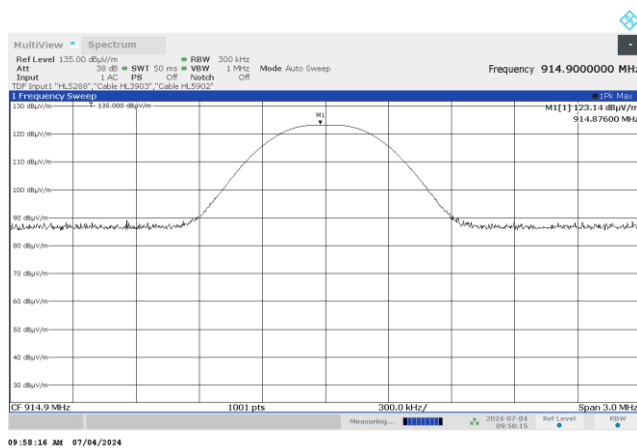

Horizontal antenna polarization

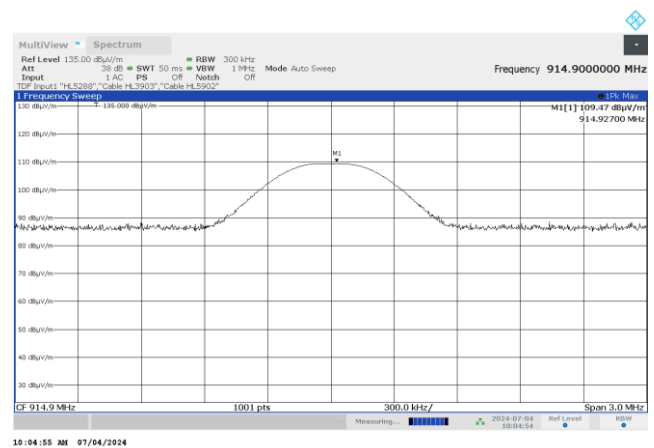



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

7.6 Field strength of spurious emissions

7.6.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.6.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and the performance check was conducted.

7.6.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.6.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.6.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.6.3.1 The EUT was set up as shown in Figure 7.6.2, Figure 1.1.3, energized and the performance check was conducted.

7.6.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.6.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.6.1 Setup for spurious emission field strength measurements below 30 MHz


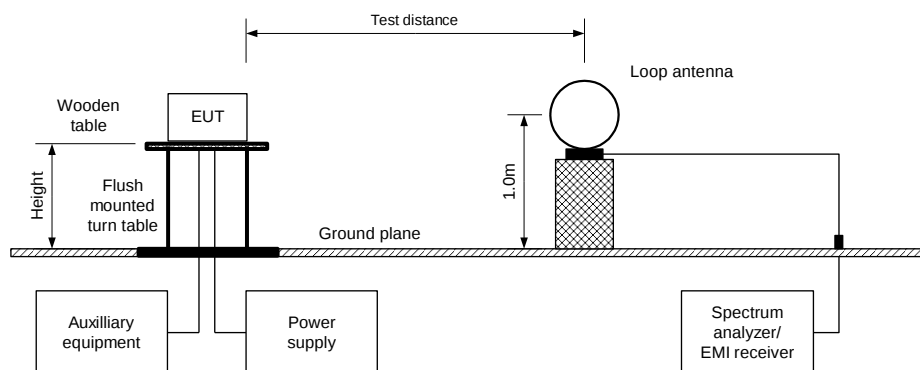



Figure 7.6.2 Setup for spurious emission field strength measurements from 30 to 1000 MHz



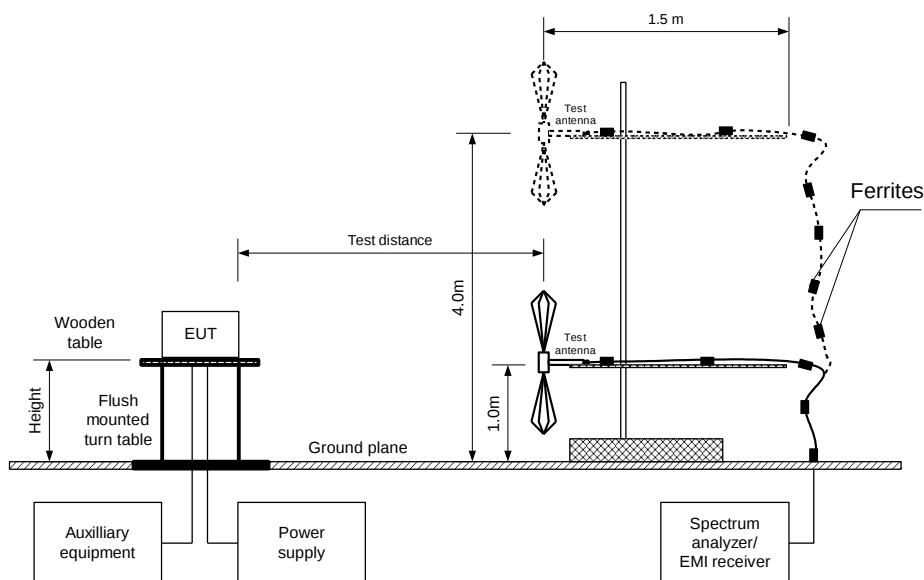

Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.6.3 Setup for spurious emission field strength measurements above 1000 MHz

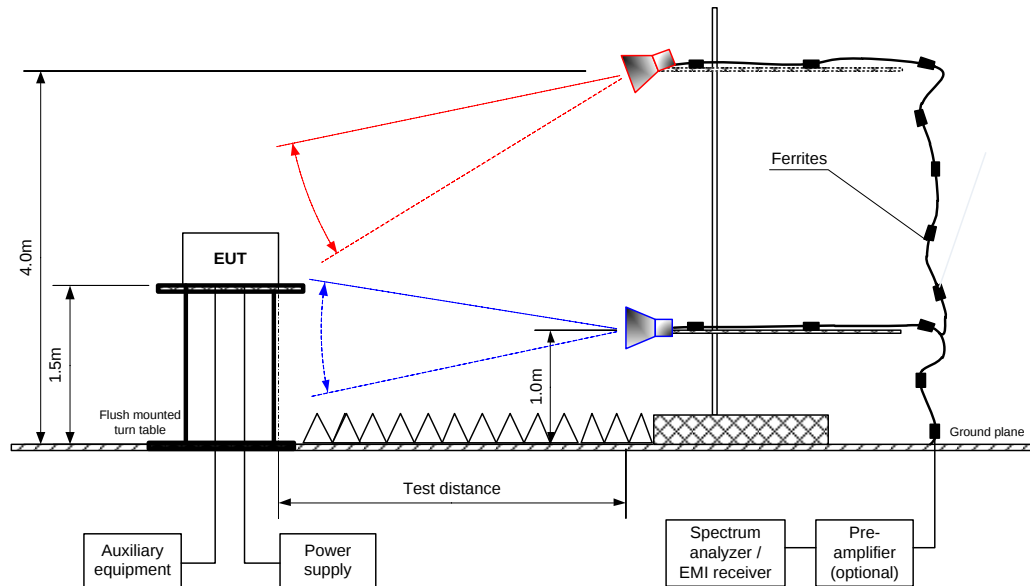



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Table 7.6.2 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
Low, mid, high carrier frequency								
No spurious emissions were found								Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Table 7.6.3 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 9500 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1804.6	61.89	Horizontal	1.5	-41	122.86	60.97	20.0	40.97	Pass
7218.4	51.71	Vertical	1.5	-19		71.15	20.0	51.15	Pass
Mid carrier frequency									
1817.4	62.93	Horizontal	1.5	-40	123.10	60.17	20.0	40.17	Pass
6360.9	47.96	Vertical	1.5	67		75.14	20.0	55.14	Pass
High carrier frequency									
1829.8	62.23	Horizontal	1.5	-36	123.14	60.91	20.0	40.91	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Table 7.6.4 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 9500 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled

Frequency											
Frequency, MHz	Antenna		Azimuth, degrees**	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency											
2706.9	Vertical	1.3	-170	48.34	74	-25.66	45.57	NA	54	-8.43	Pass
8120.7	Vertical	1.5	-24	58.30	74	-15.7	53.45	NA	54	-0.55	
Mid carrier frequency											
2726.1	Vertical	1.5	180	47.26	74	-26.74	47.26	NA	54	-6.74	Pass
4543.5	Vertical	1.5	100	44.48	74	-29.52	44.48	NA	54	-9.52	
7269.6	Vertical	1.5	-17	50.70	74	-23.30	44.13	NA	54	-9.87	
8178.3	Horizontal	1.5	0	54.82	74	-19.18	47.54	NA	54	-6.46	
High carrier frequency											
2744.7	Vertical	1.5	180	47.16	74	-26.84	47.16	NA	54	-6.84	Pass
7319.2	Vertical	1.5	-48	50.12	74	-23.88	42.62	NA	54	-11.38	
8234.1	Horizontal	1.5	-20	57.43	74	-16.57	52.21	NA	54	-1.79	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,
where Calculated field strength = Measured field strength + average factor.

Table 7.6.5 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
NA	NA	NA	NA	NA	NA

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Table 7.6.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.6.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 446	HL 5288	HL 4933	HL 3903	HL 5902	HL 7585	HL 4339	HL
--------	---------	---------	---------	---------	---------	---------	----


Full description is given in Appendix A.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.6.1 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

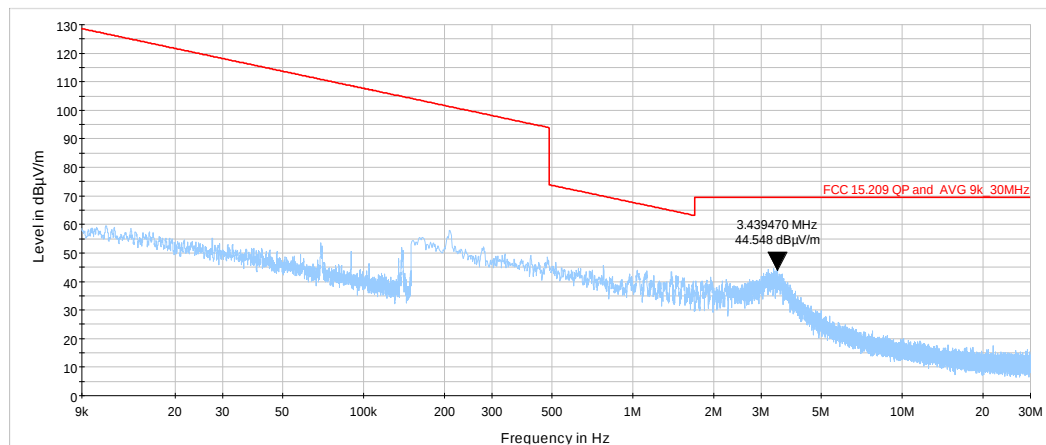

Plot 7.6.2 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

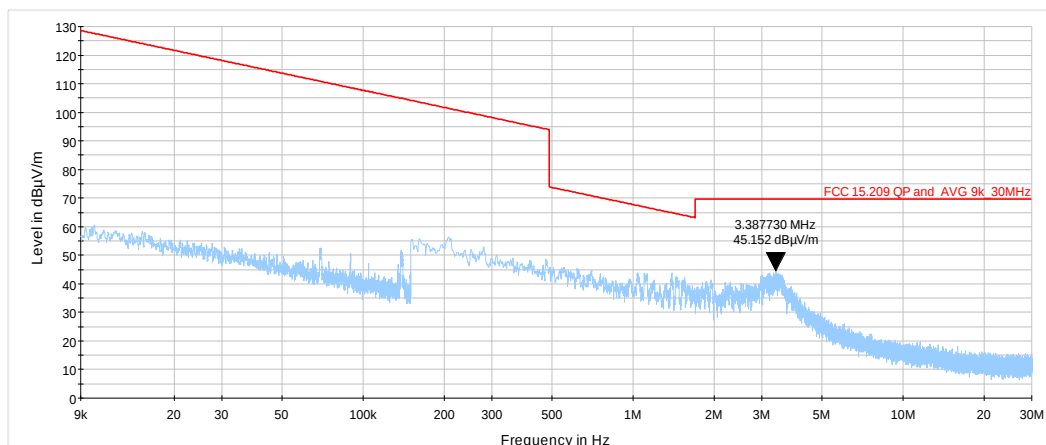




Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.6.3 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

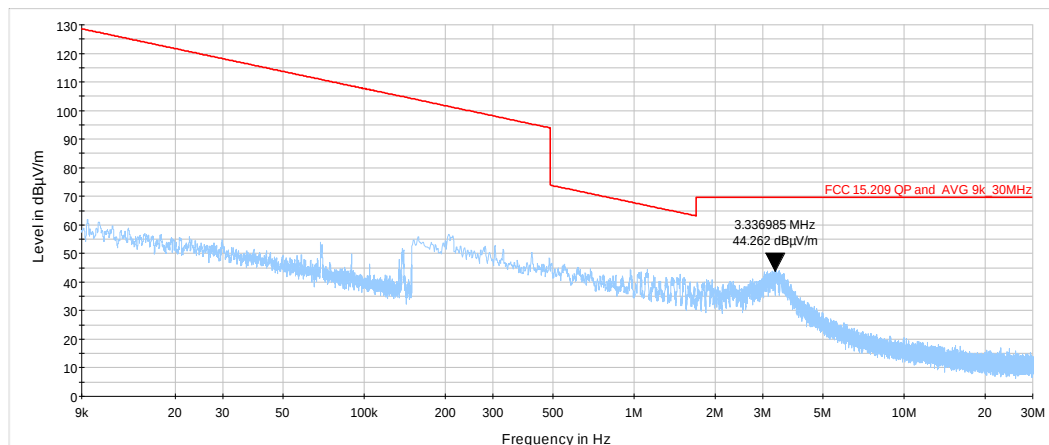

Plot 7.6.4 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

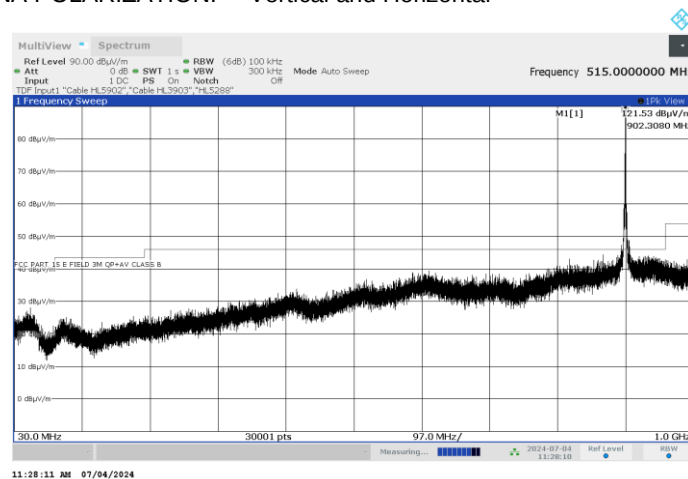




HERMON LABORATORIES

Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.6.5 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

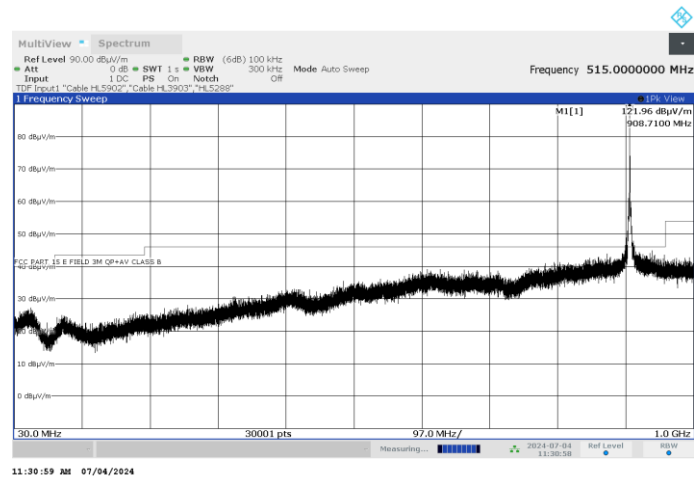

Plot 7.6.6 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

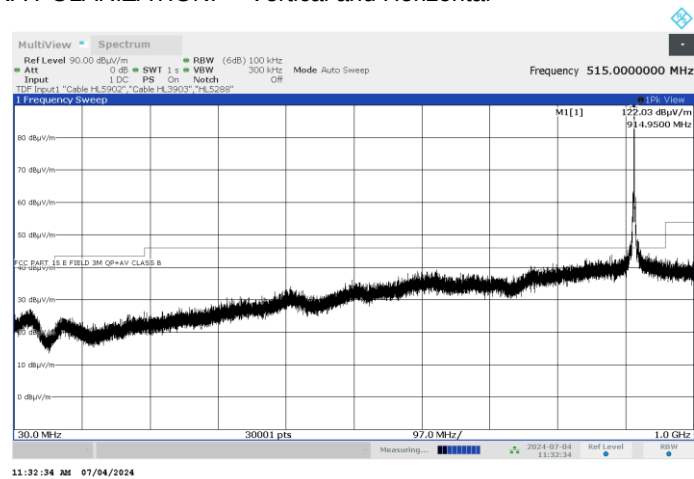




HERMON LABORATORIES

Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.6.7 Radiated emission measurements from 1000 to 9500 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

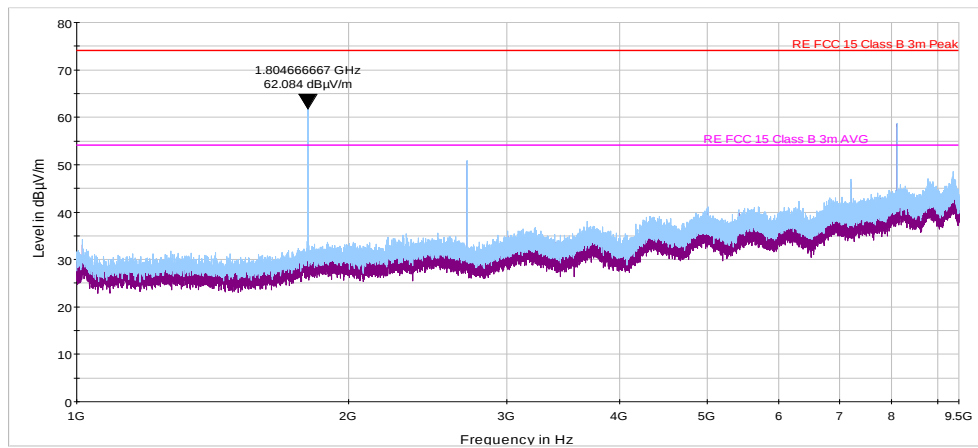

Plot 7.6.8 Radiated emission measurements from 1000 to 9500 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

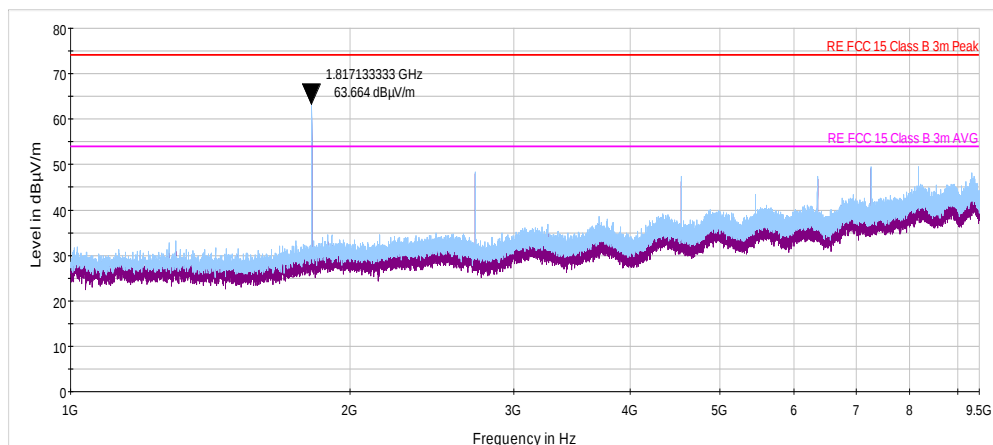




HERMON LABORATORIES

Report ID: ARARAD_FCC.54470_LoRa_Rev1.docx
Date of Issue: 14-Aug-24

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.6.9 Radiated emission measurements from 1000 to 9500 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

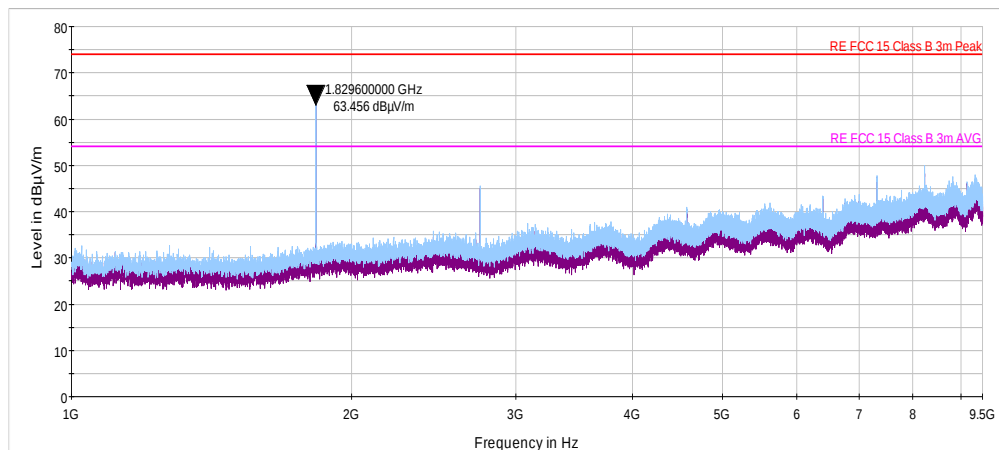




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.6.10 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

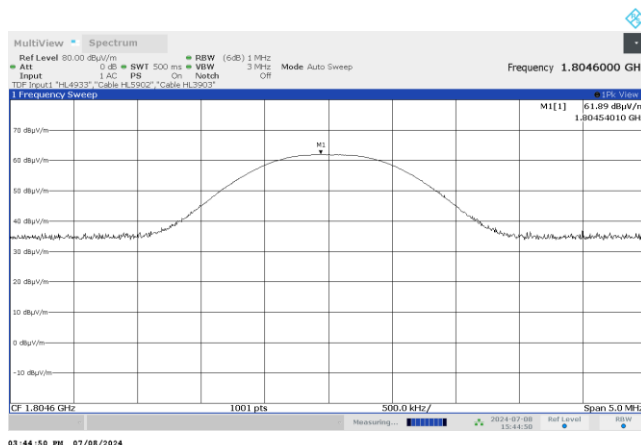

Plot 7.6.11 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

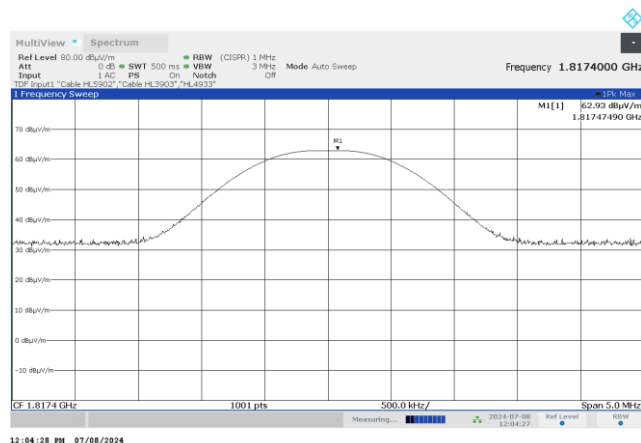




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 24 °C	Relative Humidity: 58 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.6.12 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

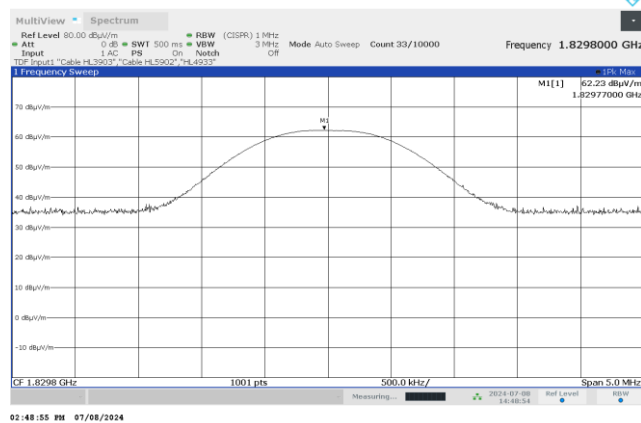

Plot 7.6.13 Radiated emission measurements at the 3 harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

