



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai) Co.,Ltd.
EQUIPMENT : 2.4GHz Wi-Fi & BT IoT Module
BRAND NAME : ESPRESSIF
MODEL NAME : ESP32-S3-WROOM-1U
FCC ID : 2AC7Z-ESP868505
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jun. 11, 2022 ~ Jun. 28, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 5

 1.6 Testing Location 6

 1.7 Test Software..... 6

 1.8 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 9

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 TEST RESULT 11

 3.1 6dB and 99% Bandwidth Measurement 11

 3.2 Output Power Measurement..... 12

 3.3 Power Spectral Density Measurement 13

 3.4 Conducted Band Edges and Spurious Emission Measurement 14

 3.5 Radiated Band Edges and Spurious Emission Measurement 15

 3.6 AC Conducted Emission Measurement..... 19

 3.7 Antenna Requirements 21

4 LIST OF MEASURING EQUIPMENT 22

5 UNCERTAINTY OF EVALUATION 23

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS

APPENDIX F. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.02 dB at 2483.500 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.18 dB at 0.152 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP32-S3-WROOM-1U
FCC ID	2AC7Z-ESP868505
HW Version	V1.1
SW Version	v1.1.3.4
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 21.55 dBm (0.1429 W) 802.11g : 25.86 dBm (0.3855 W) 802.11n HT20 : 25.56 dBm (0.3597 W) 802.11n HT40 : 24.70 dBm (0.2951 W)
99% Occupied Bandwidth	802.11b : 13.027MHz 802.11g : 18.182MHz 802.11n HT20 : 18.821MHz 802.11n HT40 : 34.685MHz
Antenna Type / Gain	PCB Antenna type with gain 3.96 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		




2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WLAN Tx(2.4G) + NB Charging

2.3 Connection Diagram of Test System

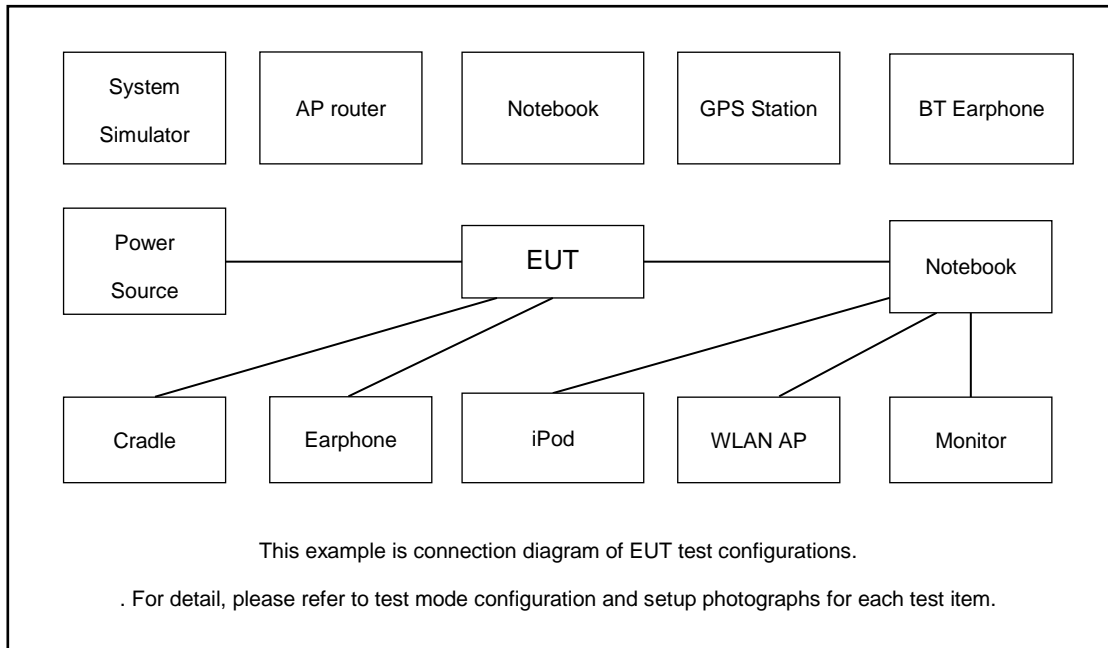

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	hard disk	N/A	N/A	N/A	N/A	N/A
4.	Antenna	N/A	N/A	N/A	N/A	N/A
5.	Test Jig	N/A	N/A	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.30 dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.30 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

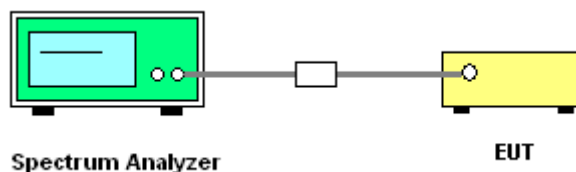

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

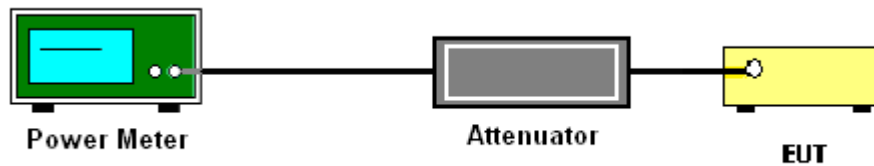

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

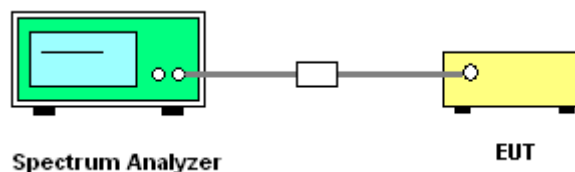

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

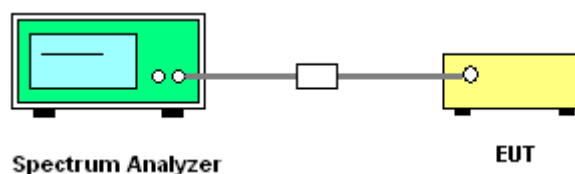

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

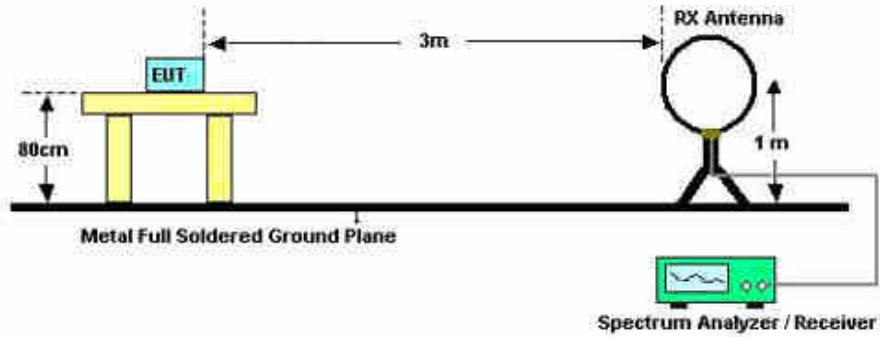

For radiated emissions from 30MHz to 1GHz

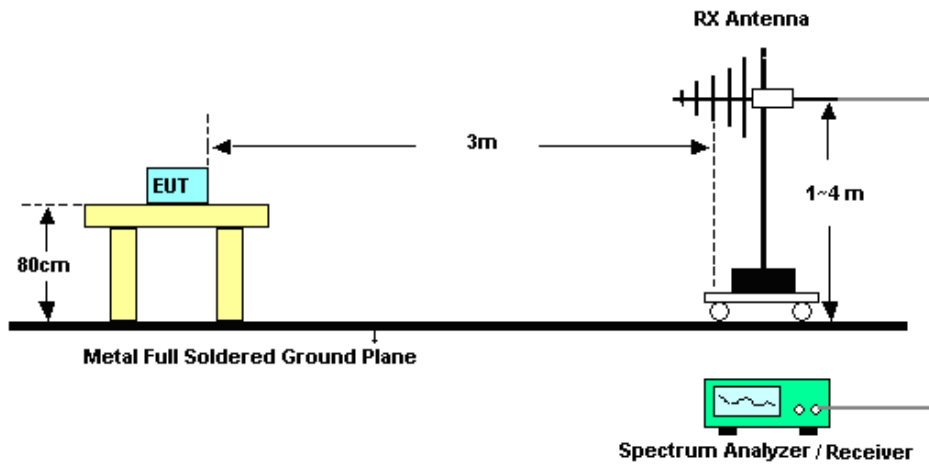

For radiated emissions above 1GHz

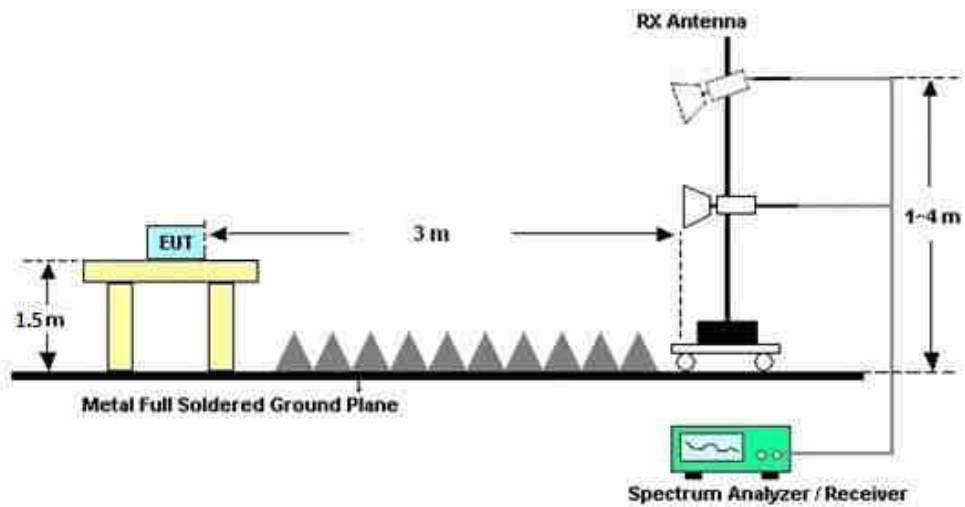



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

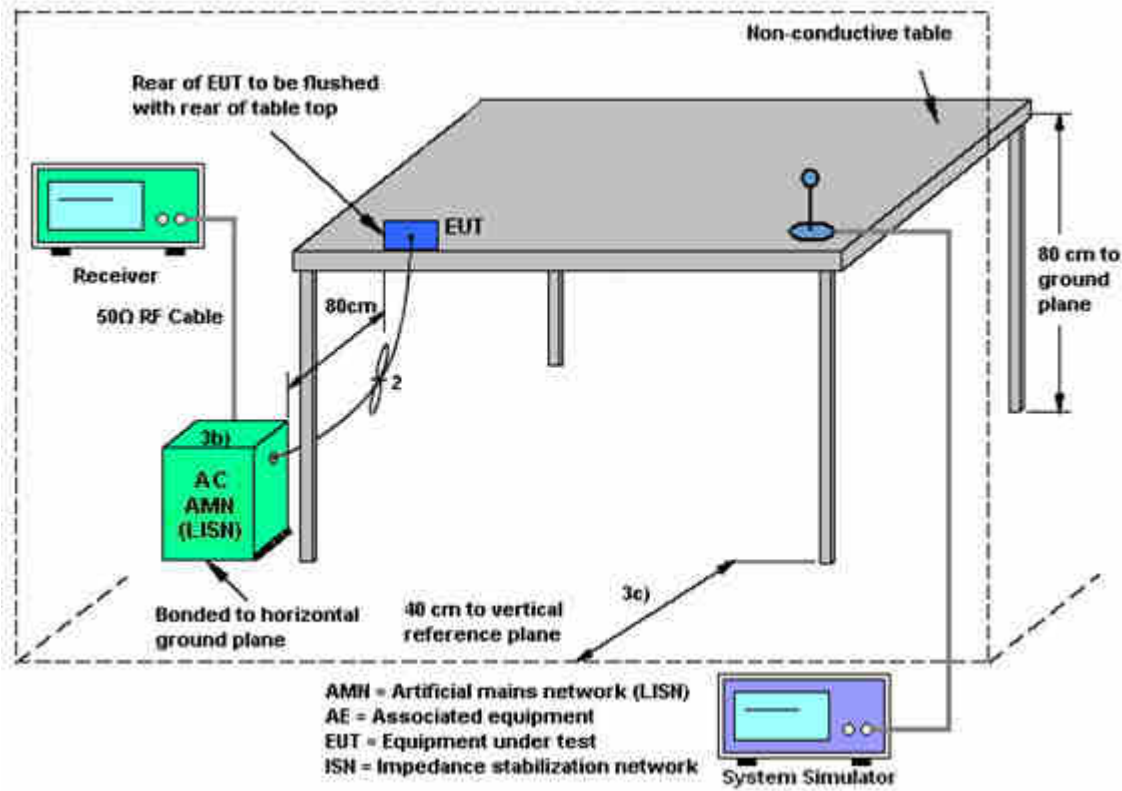

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jun. 15, 2022 ~Jun. 28, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Jun. 15, 2022 ~Jun. 28, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Jun. 15, 2022 ~Jun. 28, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Jun. 11, 2022 ~Jun. 28, 2022	Oct. 15, 2022	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 26, 2021	Jun. 11, 2022 ~Jun. 28, 2022	Oct. 25, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jun. 11, 2022 ~Jun. 28, 2022	Oct. 29, 2022	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 24, 2022	Jun. 11, 2022 ~Jun. 28, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 19, 2021	Jun. 11, 2022 ~Jun. 28, 2022	Jul. 18, 2022	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	Jun. 11, 2022 ~Jun. 28, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 30, 2021	Jun. 11, 2022 ~Jun. 28, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Jun. 11, 2022 ~Jun. 28, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jun. 11, 2022 ~Jun. 28, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 14, 2021	Jun. 11, 2022 ~Jun. 28, 2022	Oct. 13, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 11, 2022 ~Jun. 28, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 11, 2022 ~Jun. 28, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 11, 2022 ~Jun. 28, 2022	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May. 24, 2022	Jun. 17, 2022	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jun. 17, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May. 24, 2022	Jun. 17, 2022	May. 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jun. 17, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results




DTS Bandwidth


Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.88	2408.12	2417.00	0.5	PASS
		2437	9.04	2432.24	2441.28	0.5	PASS
		2462	8.64	2457.44	2466.08	0.5	PASS
11G	Ant1	2412	16.36	2403.80	2420.16	0.5	PASS
		2417	16.36	2408.80	2425.16	0.5	PASS
		2437	16.32	2428.80	2445.12	0.5	PASS
		2457	16.28	2448.84	2465.12	0.5	PASS
		2462	16.36	2453.80	2470.16	0.5	PASS
11N20SISO	Ant1	2412	17.56	2403.20	2420.76	0.5	PASS
		2417	17.56	2408.20	2425.76	0.5	PASS
		2437	17.56	2428.20	2445.76	0.5	PASS
		2457	17.56	2448.20	2465.76	0.5	PASS
		2462	17.56	2453.20	2470.76	0.5	PASS
11N40SISO	Ant1	2422	32.64	2405.68	2438.32	0.5	PASS
		2437	32.64	2420.68	2453.32	0.5	PASS
		2452	32.64	2435.68	2468.32	0.5	PASS




Test Graphs

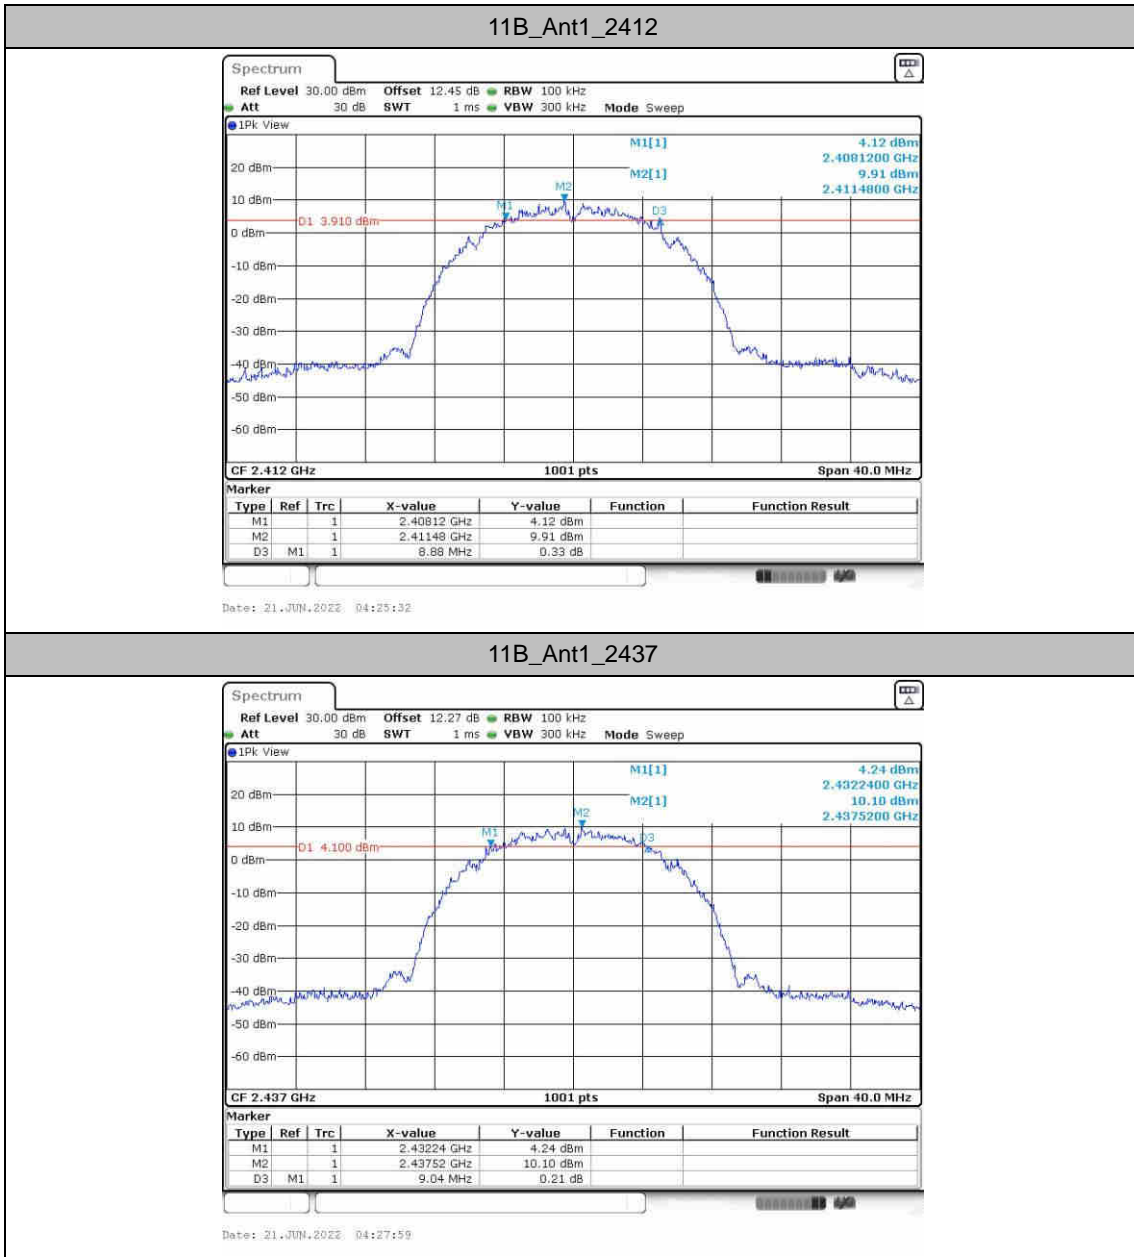

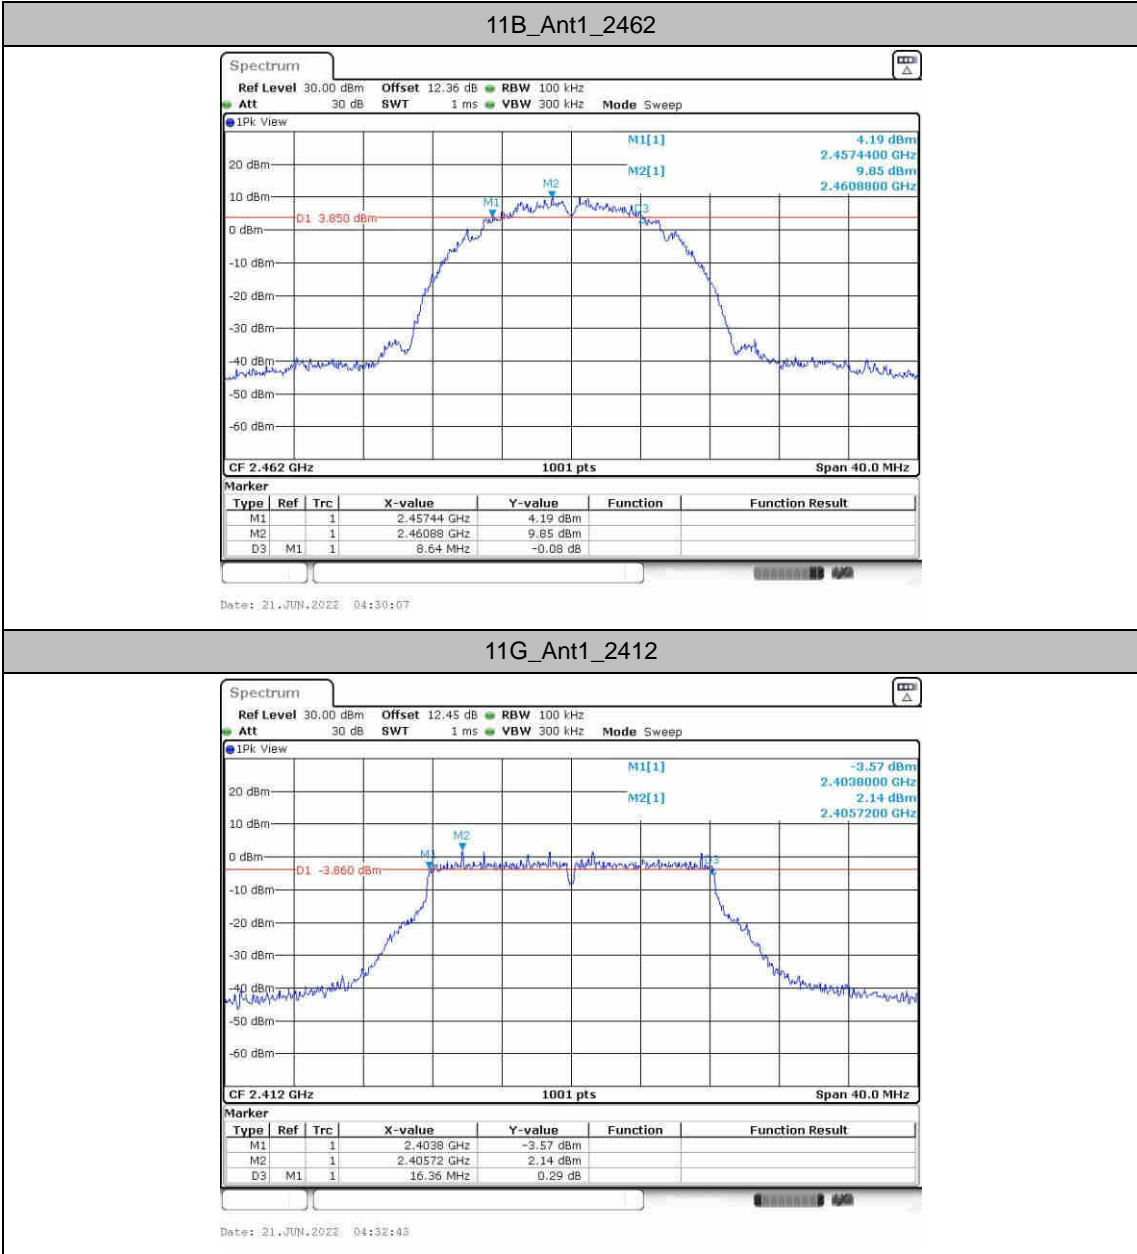
11G_Ant1_2412




11G_Ant1_2417

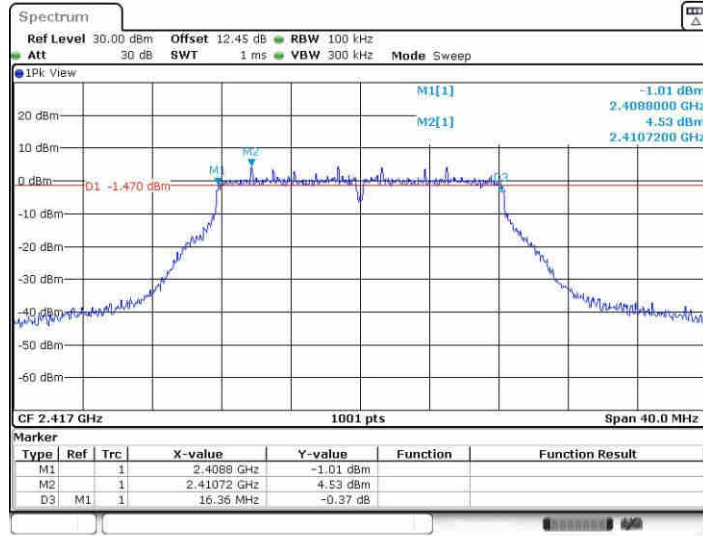


Date: 21 JUN 2022 04:35:15

11G_Ant1_2437

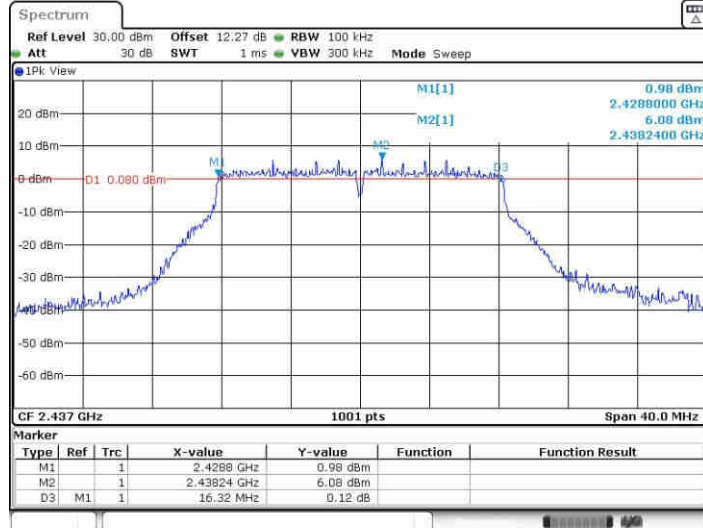


Date: 21 JUN 2022 04:37:48

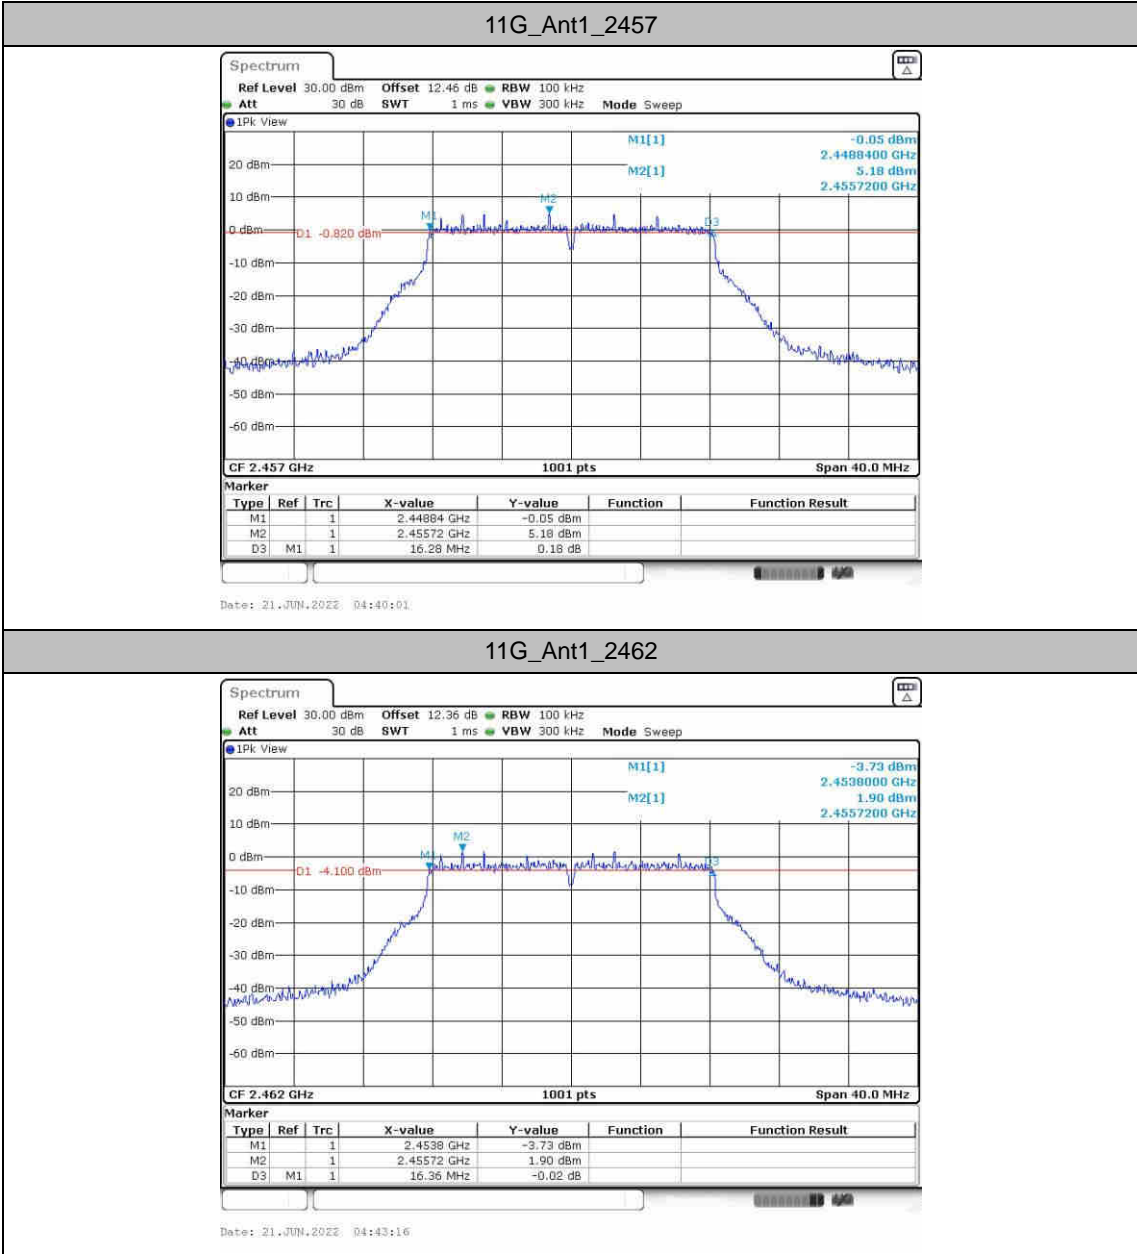




11N20SISO_Ant1_2412

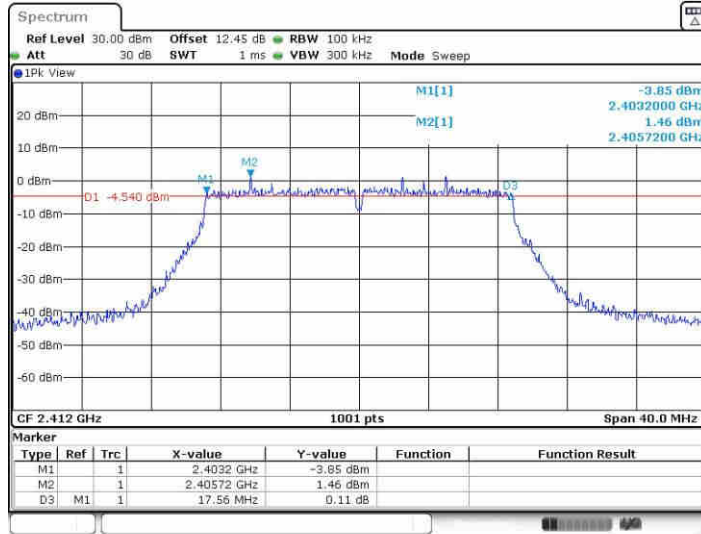

Date: 21 JUN 2022 04:46:12


11N20SISO_Ant1_2417

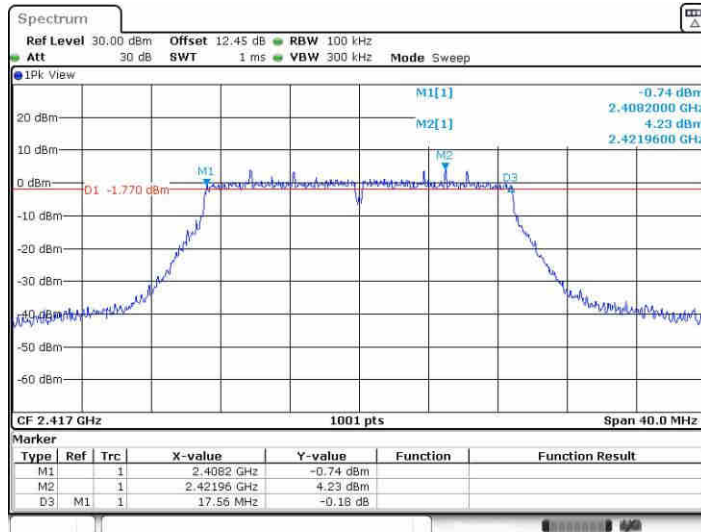

Date: 21 JUN 2022 04:48:45




11N20SISO_Ant1_2437

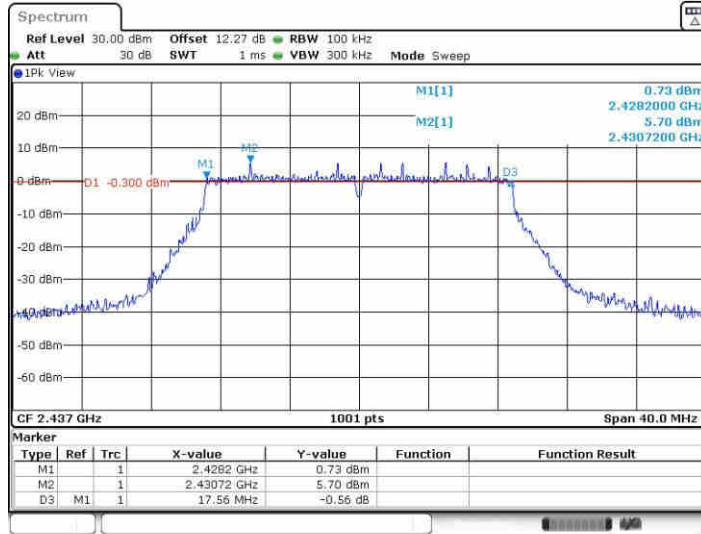

Date: 21 JUN 2022 04:51:12


11N20SISO_Ant1_2457

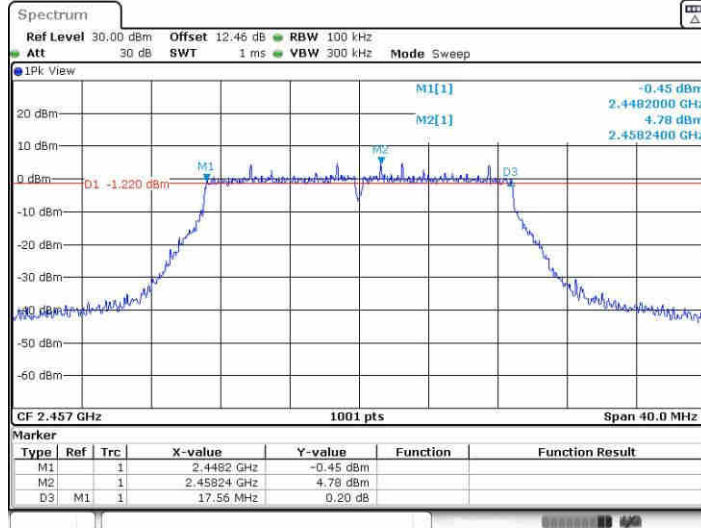


Date: 21 JUN 2022 04:53:22



11N20SISO_Ant1_2462

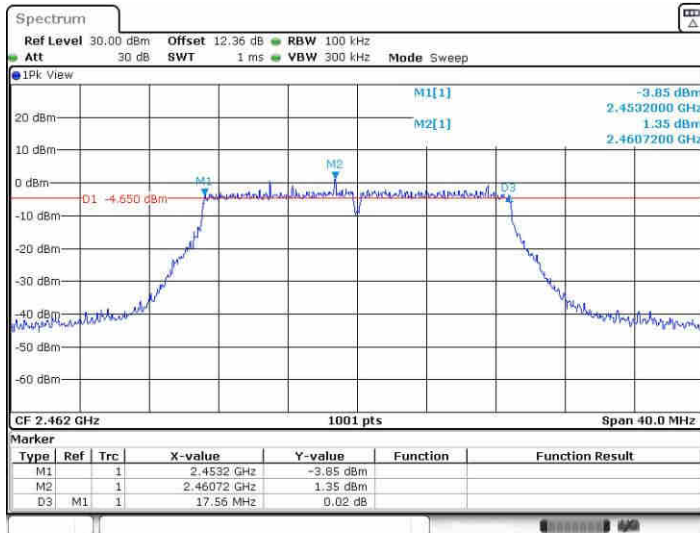


11N40SISO_Ant1_2422

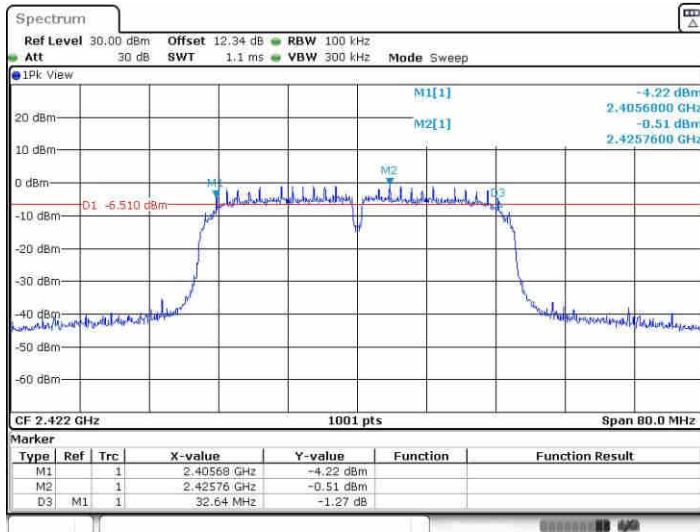




11N40SISO_Ant1_2437

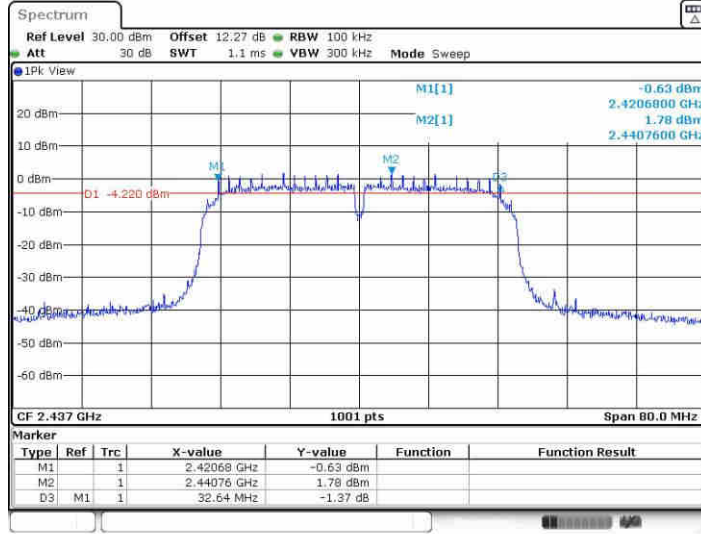

11N40SISO_Ant1_2452

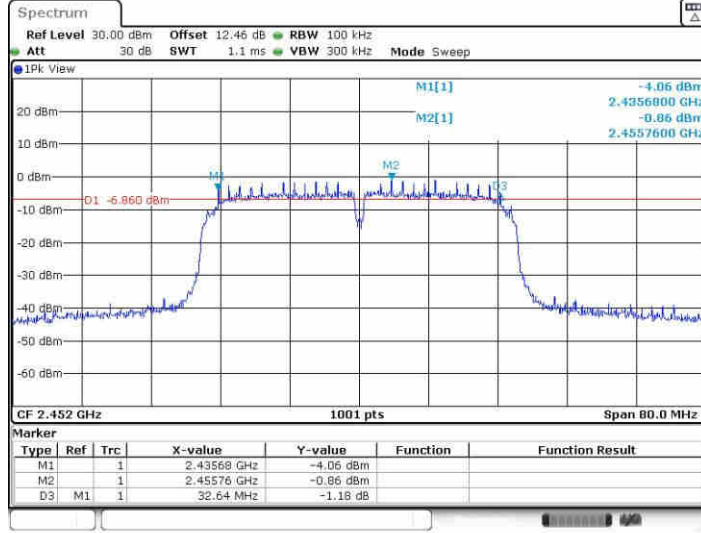




Occupied Channel Bandwidth


Test Result

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.027	2405.447	2418.474	---	---
		2437	13.027	2430.407	2443.434	---	---
		2462	13.027	2455.447	2468.474	---	---
11G	Ant1	2412	18.062	2402.929	2420.991	---	---
		2417	18.102	2407.849	2425.951	---	---
		2437	18.182	2427.769	2445.951	---	---
		2457	18.062	2447.929	2465.991	---	---
		2462	18.062	2452.889	2470.951	---	---
11N20SISO	Ant1	2412	18.741	2402.609	2421.351	---	---
		2417	18.781	2407.569	2426.351	---	---
		2437	18.821	2427.529	2446.351	---	---
		2457	18.781	2447.569	2466.351	---	---
		2462	18.821	2452.569	2471.391	---	---
11N40SISO	Ant1	2422	34.685	2404.657	2439.343	---	---
		2437	34.685	2419.577	2454.263	---	---
		2452	34.685	2434.657	2469.343	---	---




Test Graphs

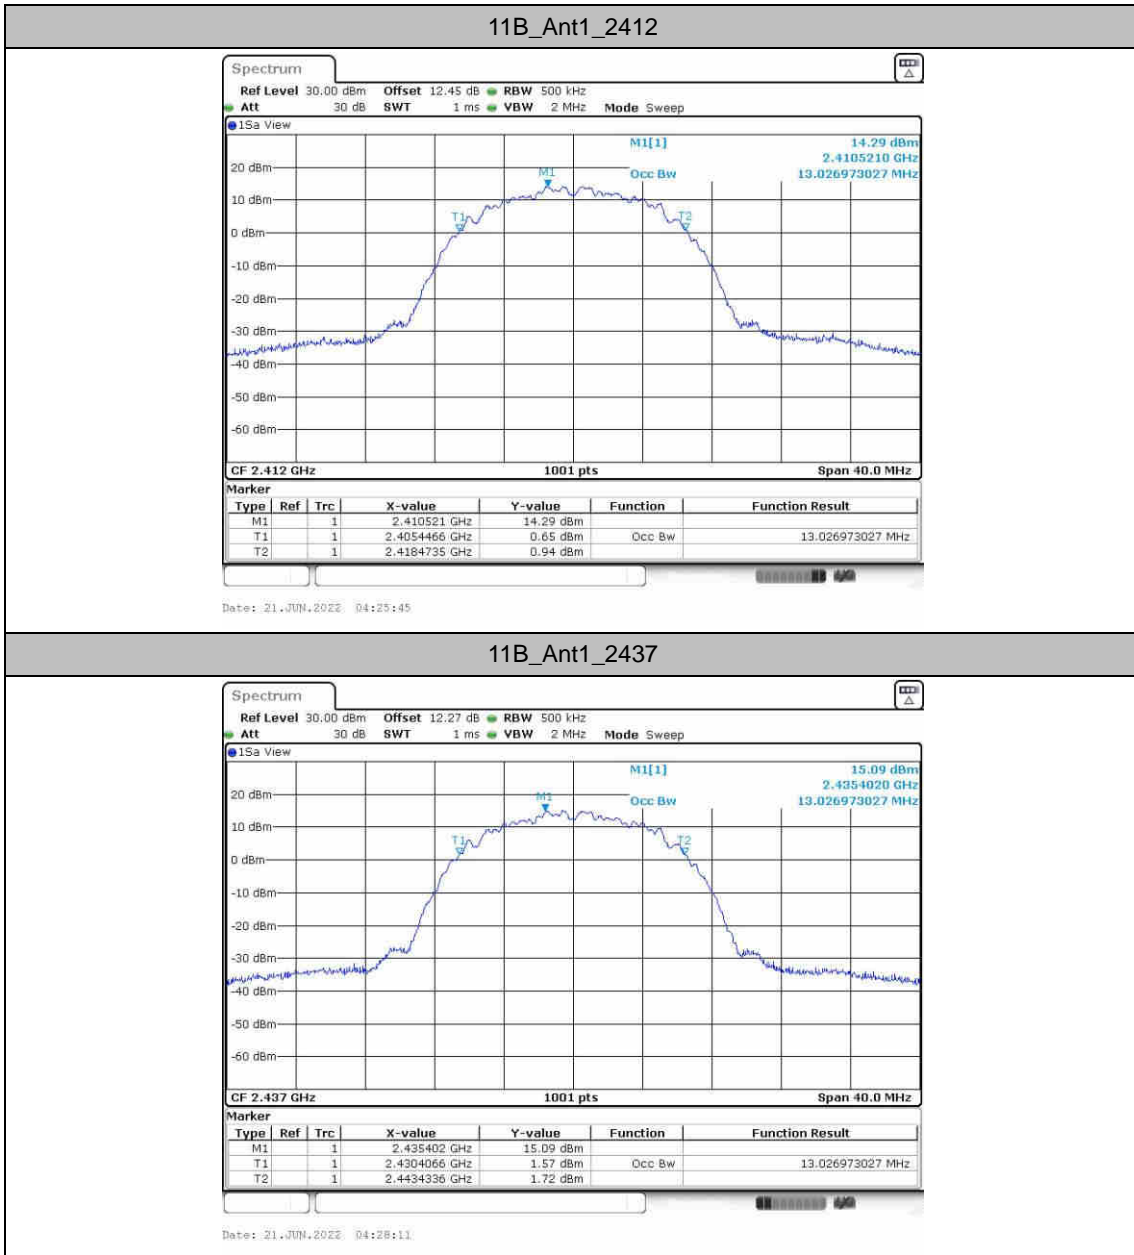

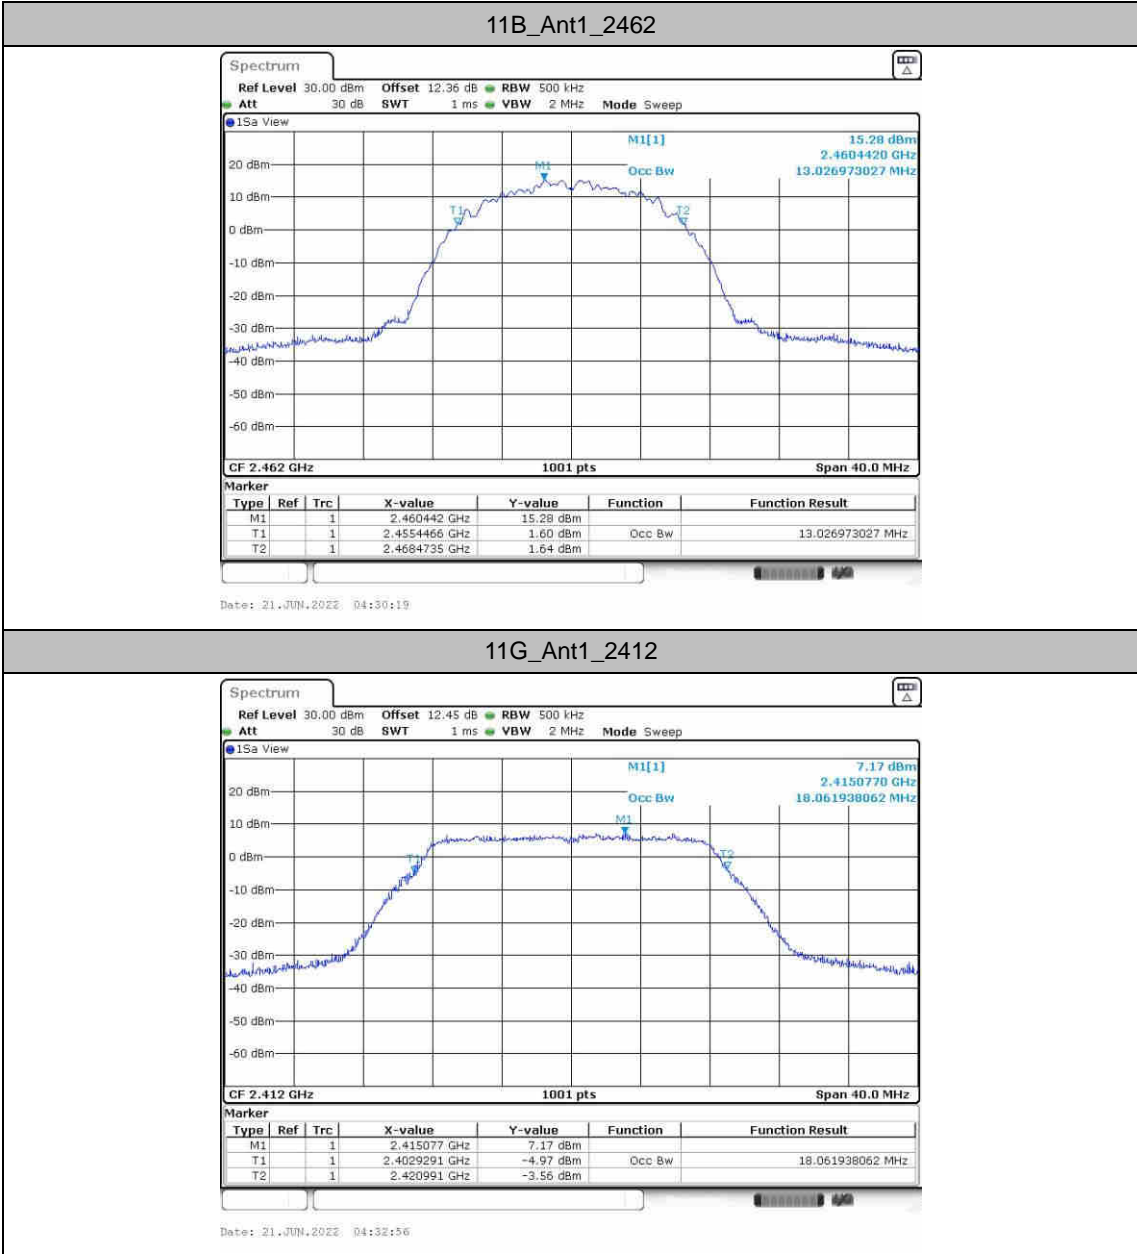
11G_Ant1_2412




11G_Ant1_2417

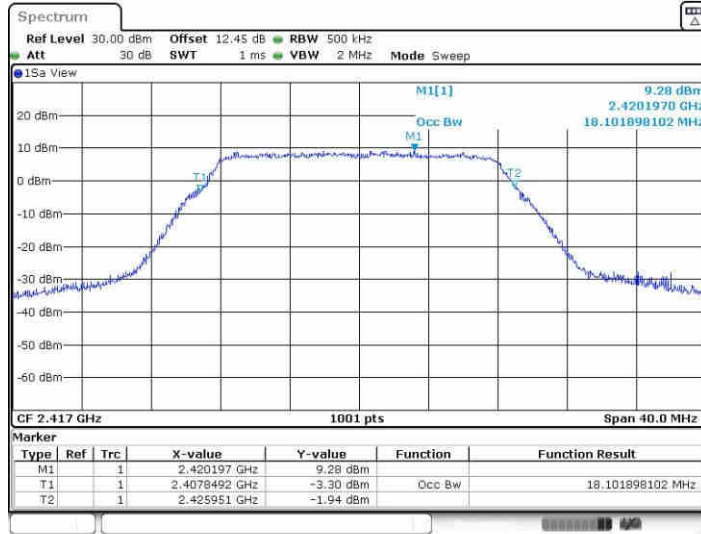


Date: 21 JUN 2022 04:35:29

11G_Ant1_2437

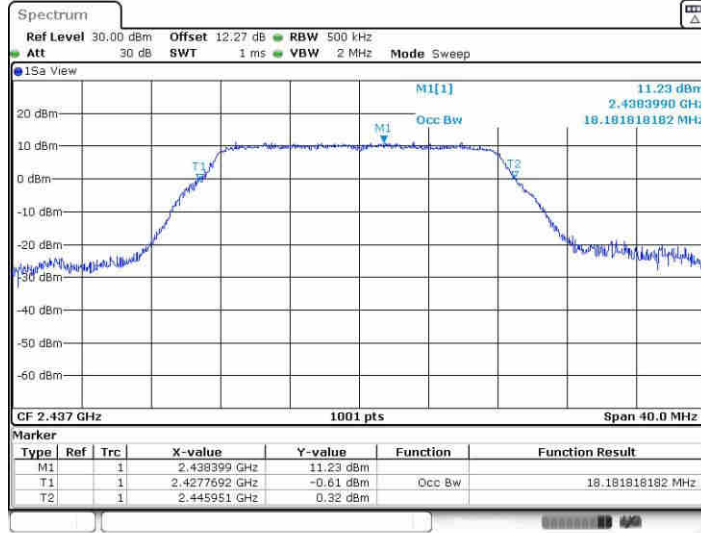


Date: 21 JUN 2022 04:37:59

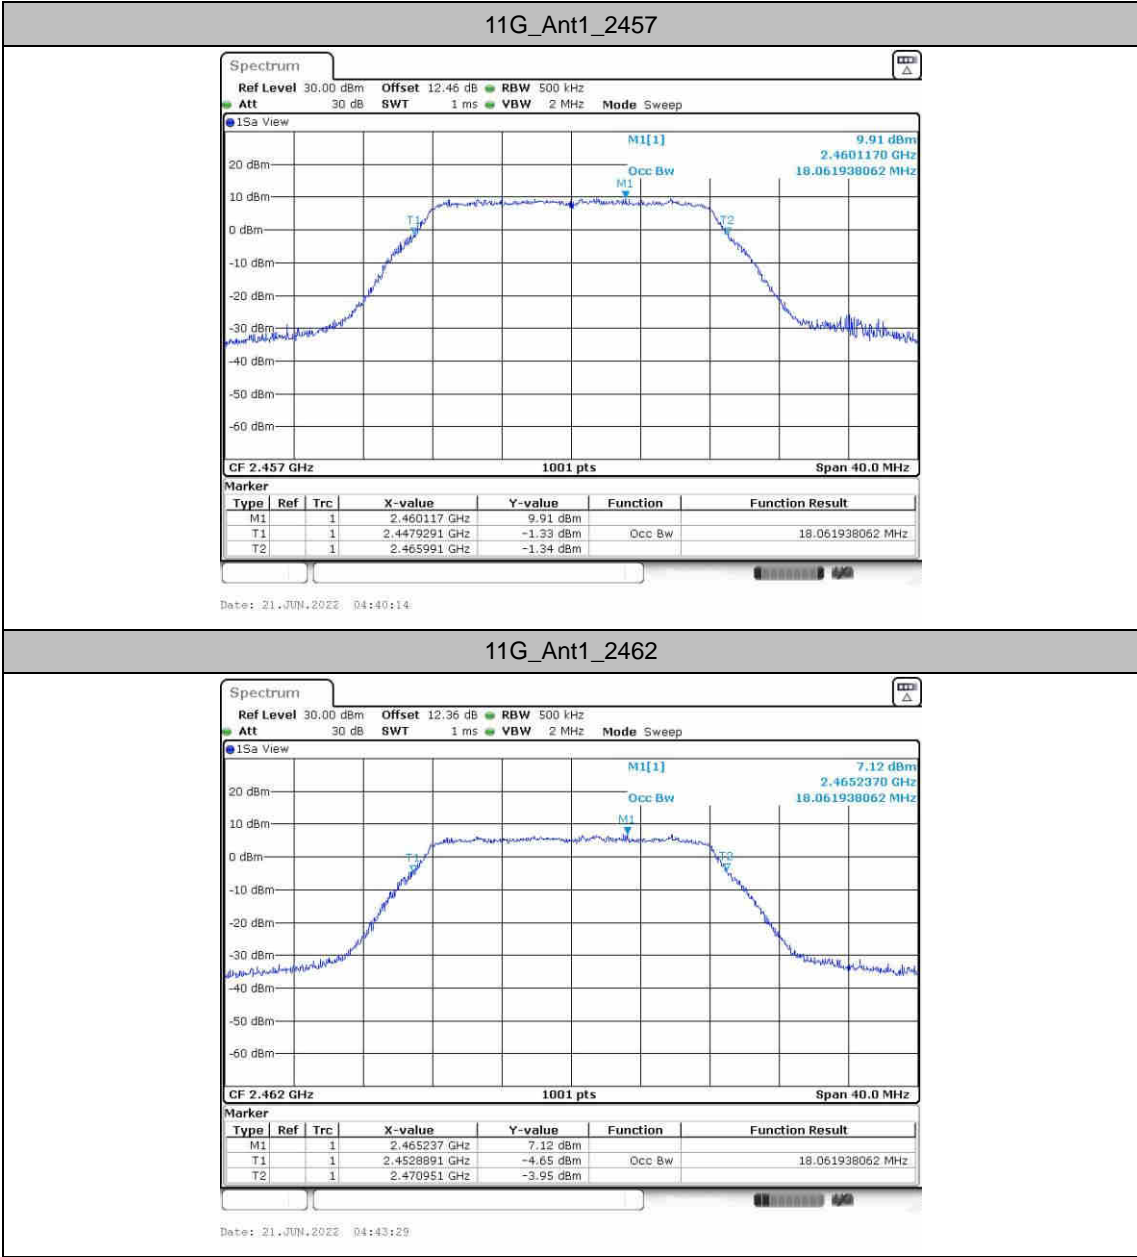



11N20SISO_Ant1_2412

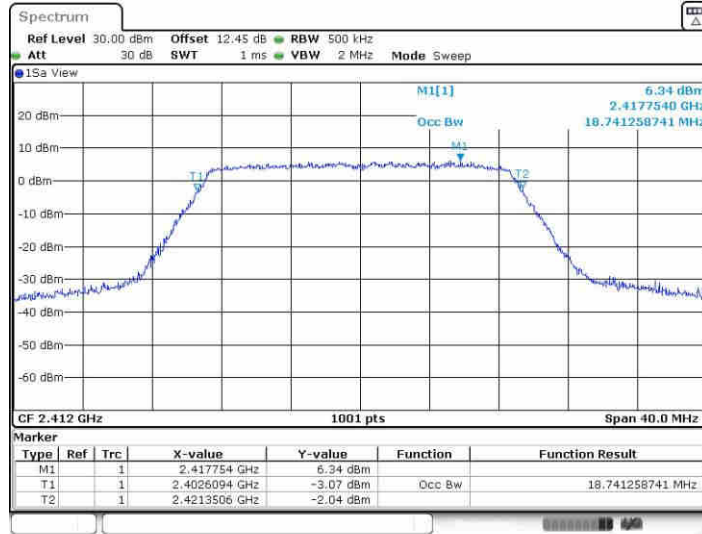

Date: 21 JUN 2022 04:46:24


11N20SISO_Ant1_2417



Date: 21 JUN 2022 04:48:55




11N20SISO_Ant1_2437

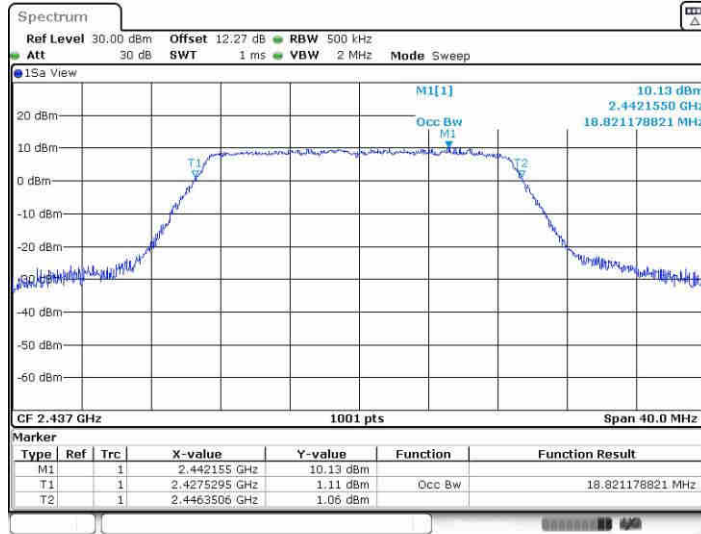

Date: 21 JUN 2022 04:51:26


11N20SISO_Ant1_2457

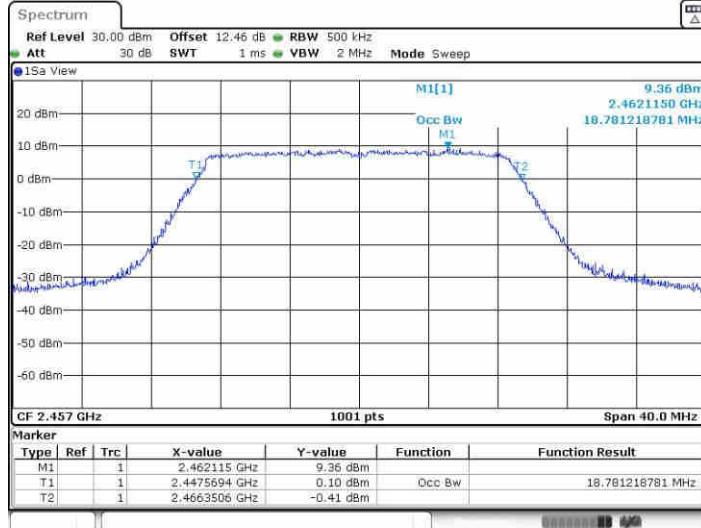

Date: 21 JUN 2022 04:53:33




11N20SISO_Ant1_2462

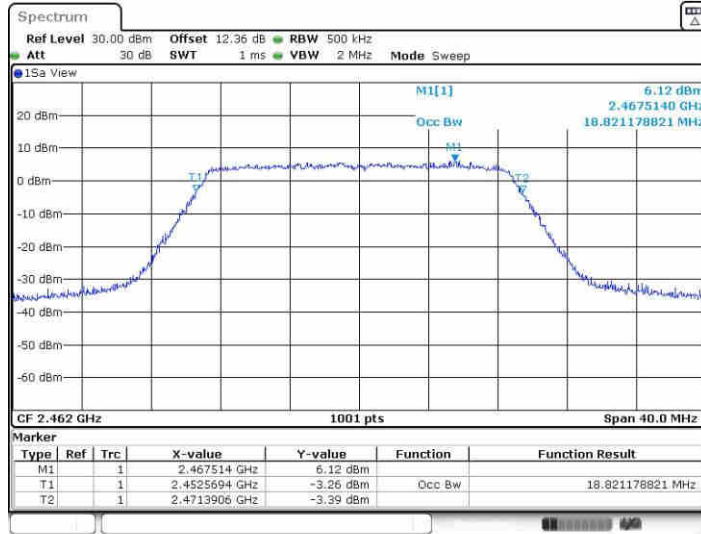

Date: 21 JUN 2022 04:56:04


11N40SISO_Ant1_2422

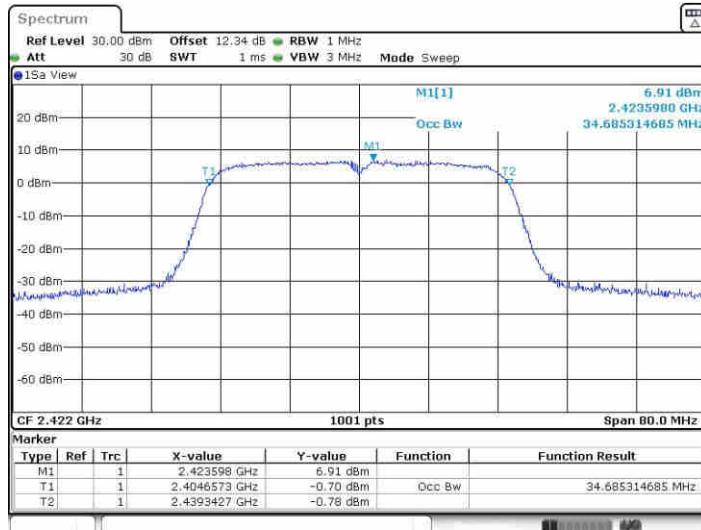

Date: 21 JUN 2022 04:58:49




11N40SISO_Ant1_2437

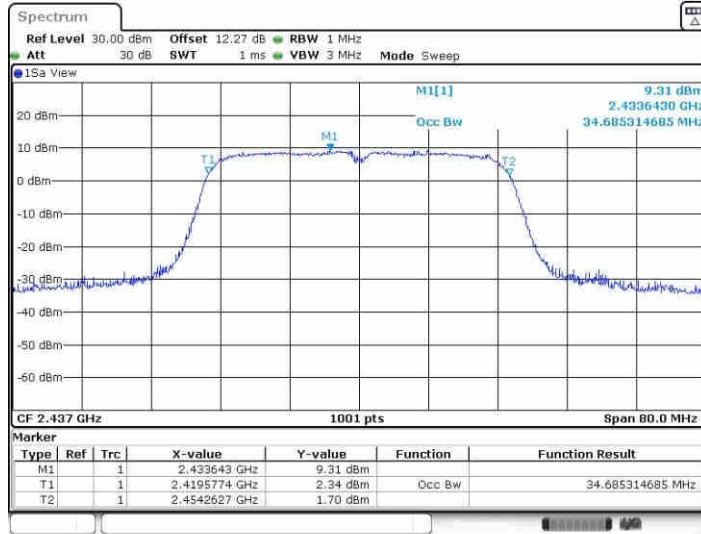

Date: 21 JUN 2022 05:01:17

11N40SISO_Ant1_2452

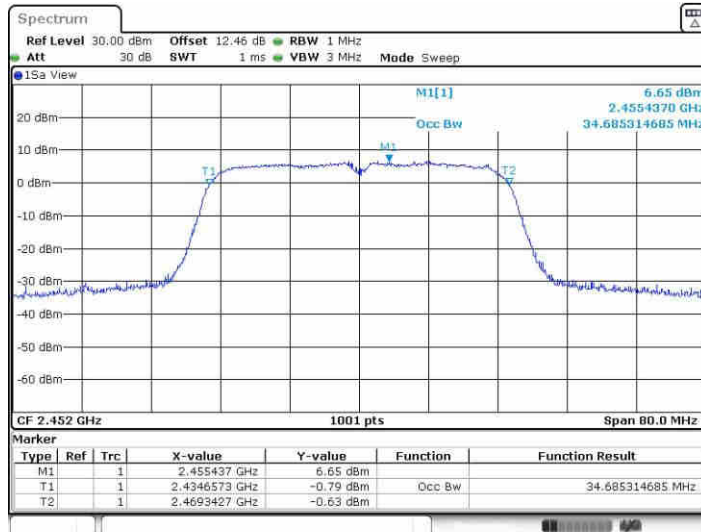

Date: 21 JUN 2022 05:03:34




Maximum power spectral density

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-5.75	≤8.00	PASS
		2437	-4.75	≤8.00	PASS
		2462	-4.66	≤8.00	PASS
11G	Ant1	2412	-12.45	≤8.00	PASS
		2417	-9.56	≤8.00	PASS
		2437	-8.2	≤8.00	PASS
		2457	-9.62	≤8.00	PASS
		2462	-12.41	≤8.00	PASS
11N20SISO	Ant1	2412	-11.8	≤8.00	PASS
		2417	-9.13	≤8.00	PASS
		2437	-7.86	≤8.00	PASS
		2457	-8.62	≤8.00	PASS
		2462	-12.01	≤8.00	PASS
11N40SISO	Ant1	2422	-14.25	≤8.00	PASS
		2437	-12.93	≤8.00	PASS
		2452	-15.63	≤8.00	PASS




Test Graphs

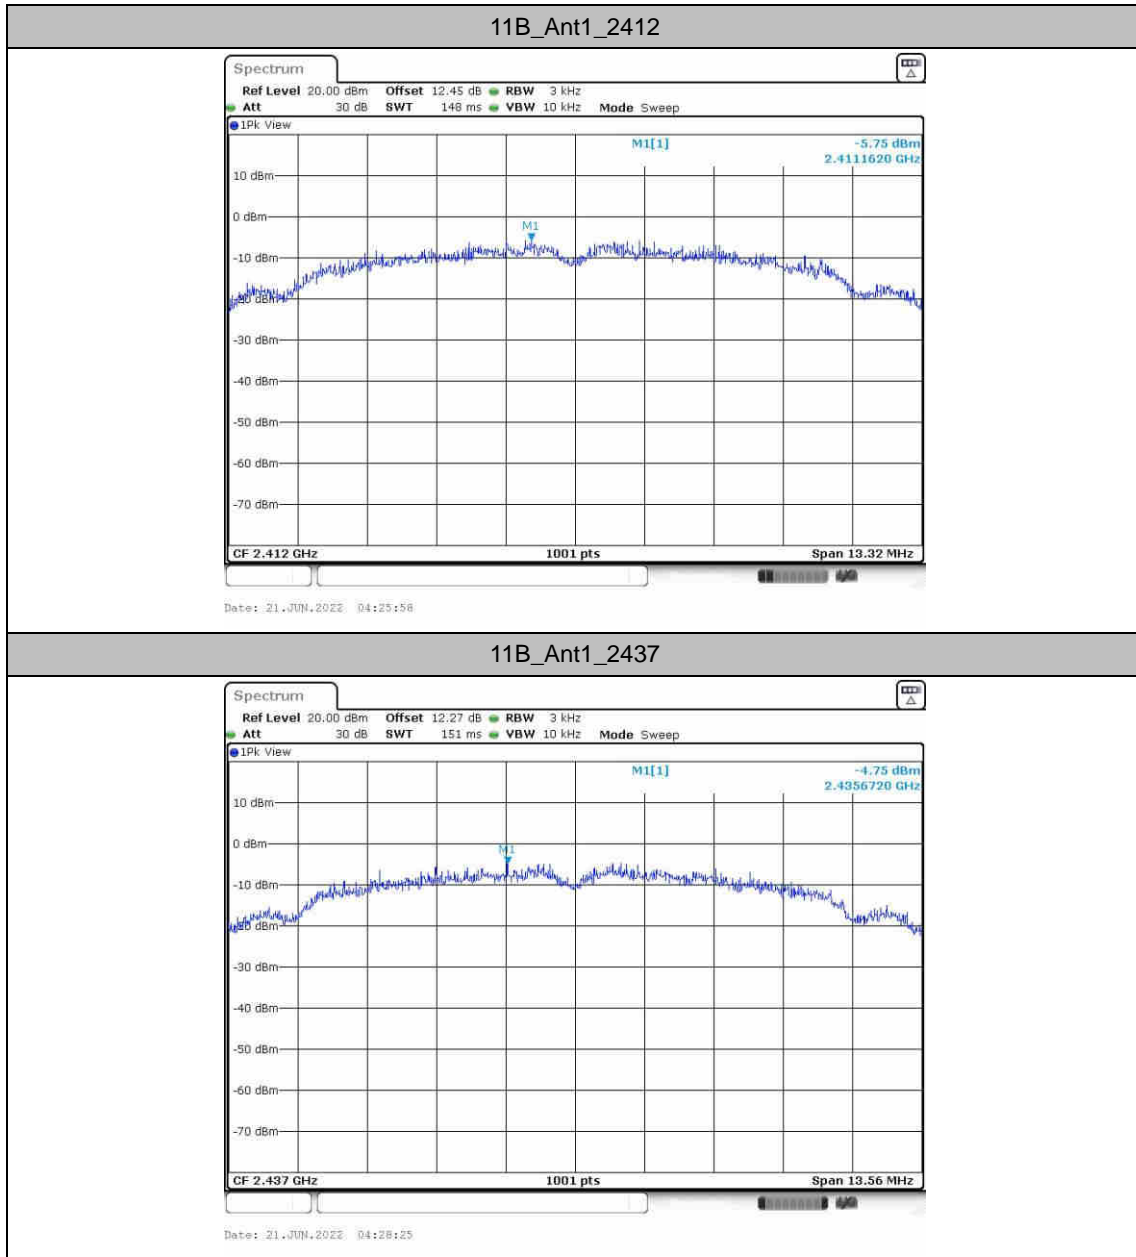




11B_Ant1_2462

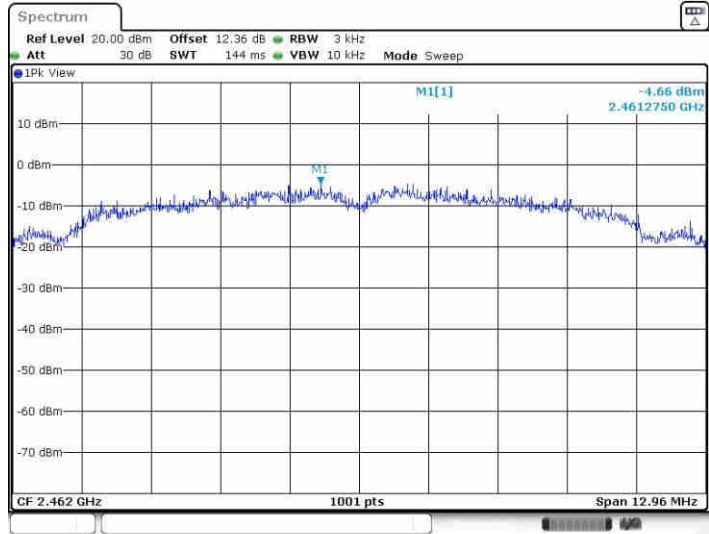

Date: 21 JUN 2022 04:30:32


11G_Ant1_2412

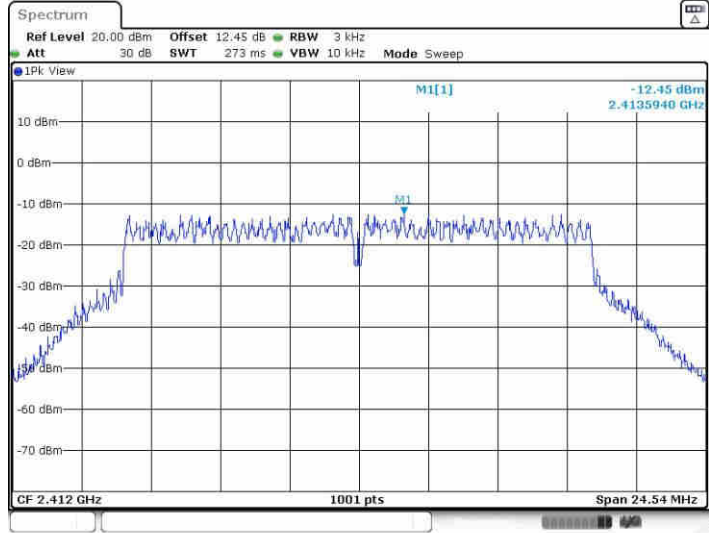

Date: 21 JUN 2022 04:33:09




11G_Ant1_2417

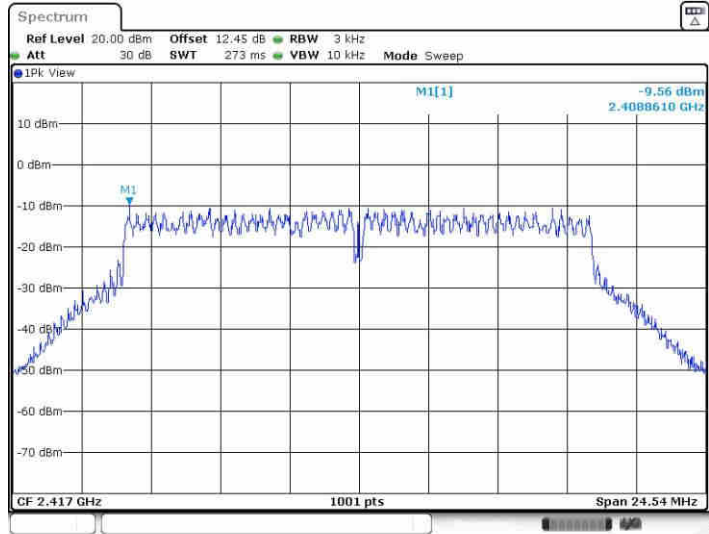

Date: 21 JUN 2022 04:35:42


11G_Ant1_2437

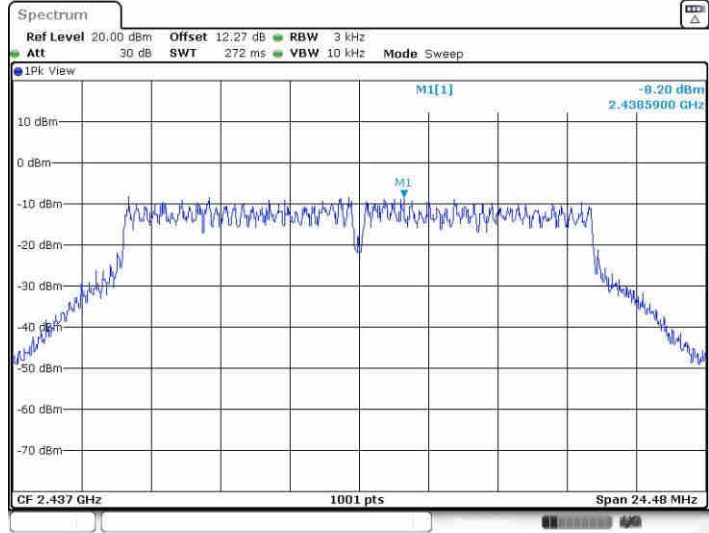

Date: 21 JUN 2022 04:38:12




11G_Ant1_2457

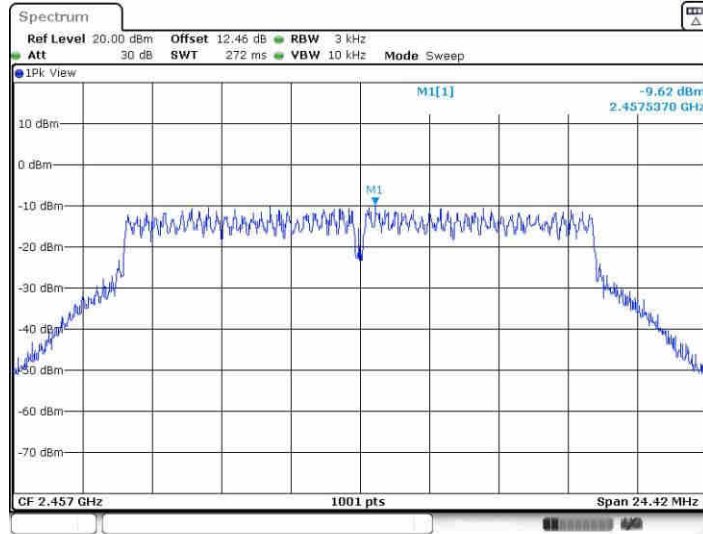

Date: 21 JUN 2022 04:40:27


11G_Ant1_2462

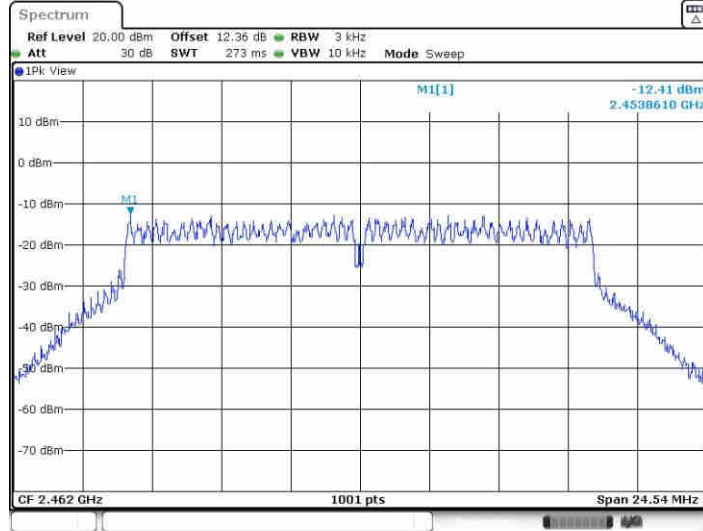


Date: 21 JUN 2022 04:43:45



11N20SISO_Ant1_2412

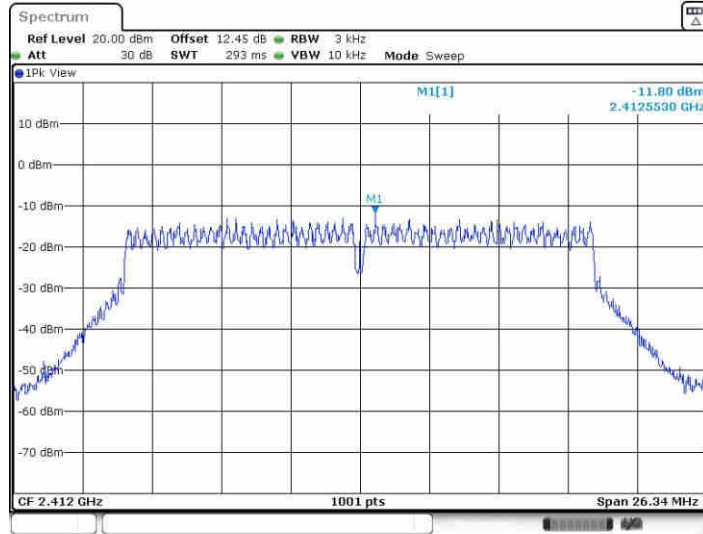


11N20SISO_Ant1_2417

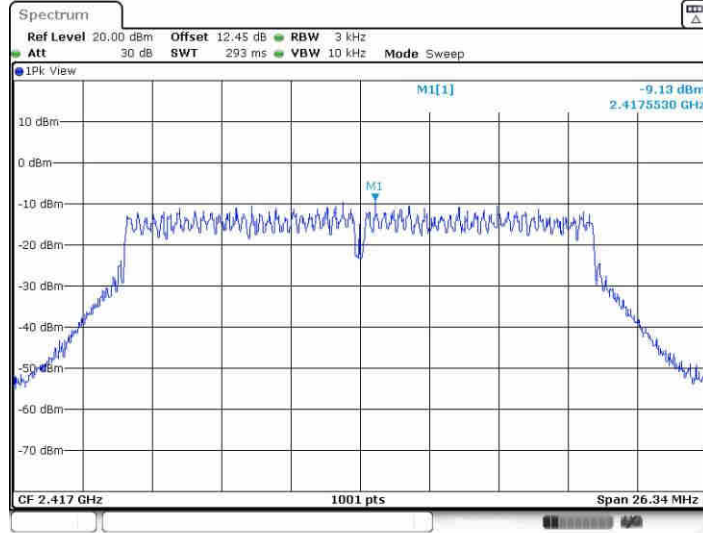




11N20SISO_Ant1_2437

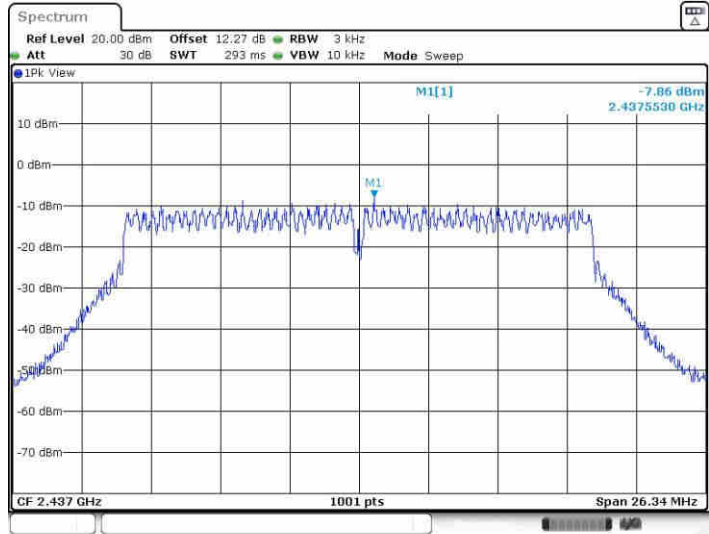

Date: 21 JUN 2022 04:51:37


11N20SISO_Ant1_2457

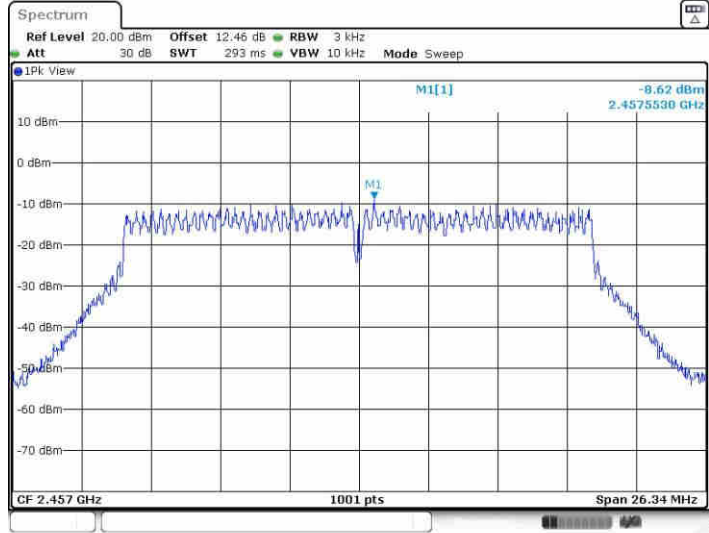

Date: 21 JUN 2022 04:53:45




11N20SISO_Ant1_2462

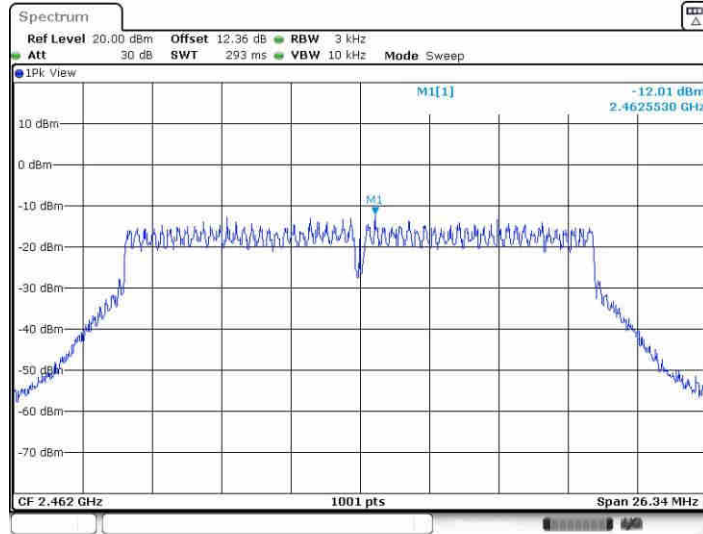

Date: 21 JUN 2022 04:56:18


11N40SISO_Ant1_2422

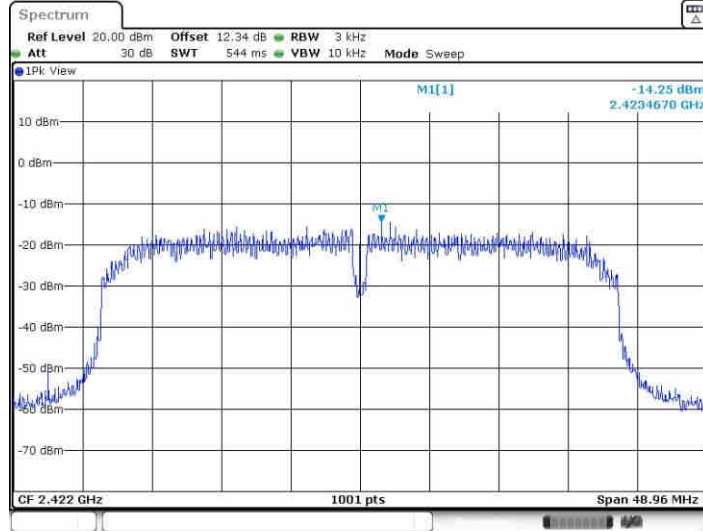

Date: 21 JUN 2022 04:59:03




11N40SISO_Ant1_2437

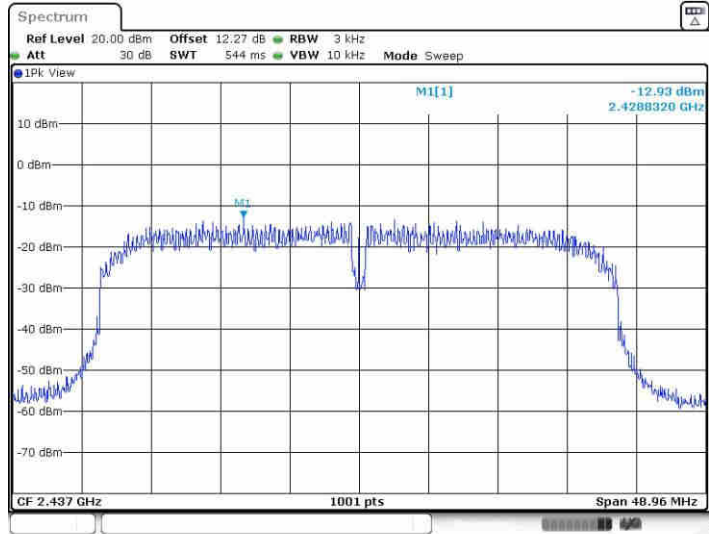

Date: 21 JUN 2022 05:01:31

11N40SISO_Ant1_2452

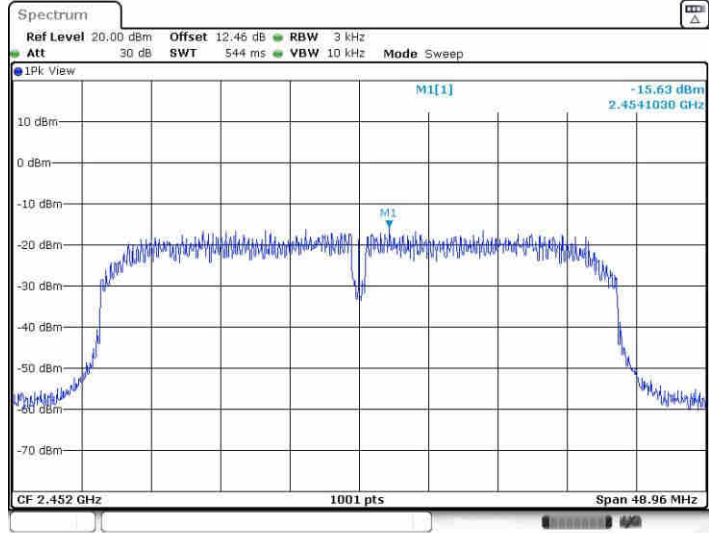

Date: 21 JUN 2022 05:03:47



Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
11B	Ant1	2412	2411.46	9.41
		2437	2436.45	10.18
		2462	2462.45	10.57
11G	Ant1	2412	2416.97	1.89
		2417	2411.99	3.60
		2437	2439.44	5.92
		2457	2455.69	5.21
		2462	2460.72	1.47
11N20SISO	Ant1	2412	2410.70	1.20
		2417	2419.48	4.14
		2437	2441.96	5.29
		2457	2450.71	4.72
		2462	2466.96	1.08
11N40SISO	Ant1	2422	2426.96	-1.01
		2437	2425.73	1.01
		2452	2455.68	-1.24




Test Graphs






11B_Ant1_2462

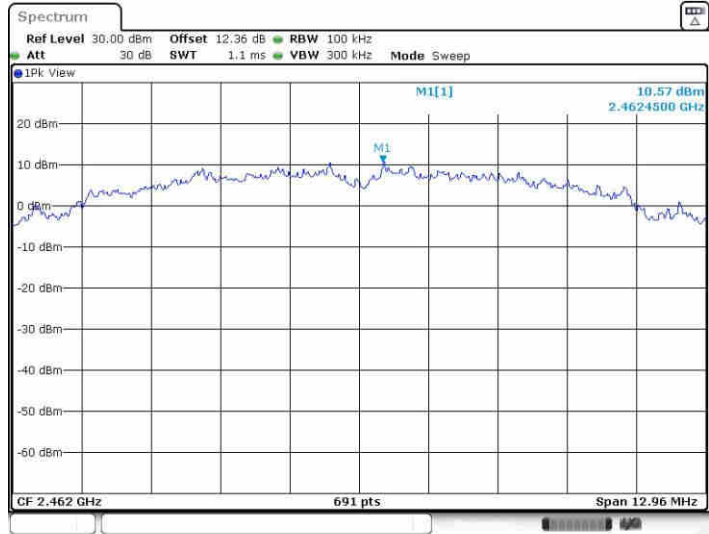

Date: 21 JUN 2022 04:30:41


11G_Ant1_2412

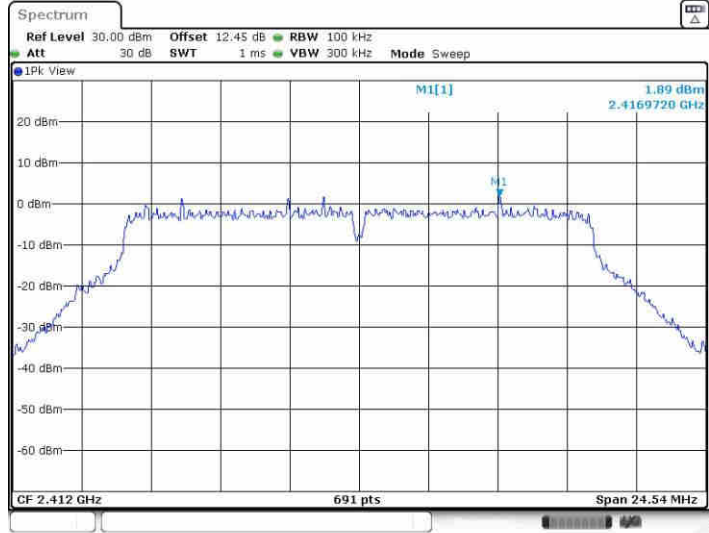

Date: 21 JUN 2022 04:33:18




11G_Ant1_2417

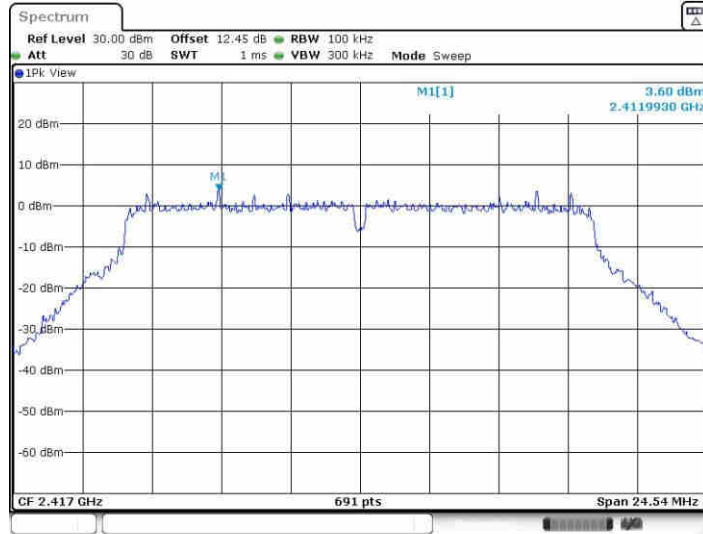

Date: 21 JUN 2022 04:35:53


11G_Ant1_2437

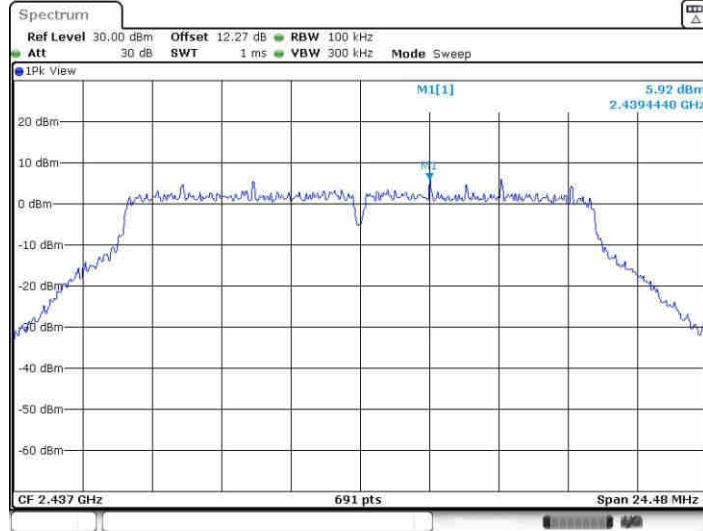

Date: 21 JUN 2022 04:38:20




11G_Ant1_2457

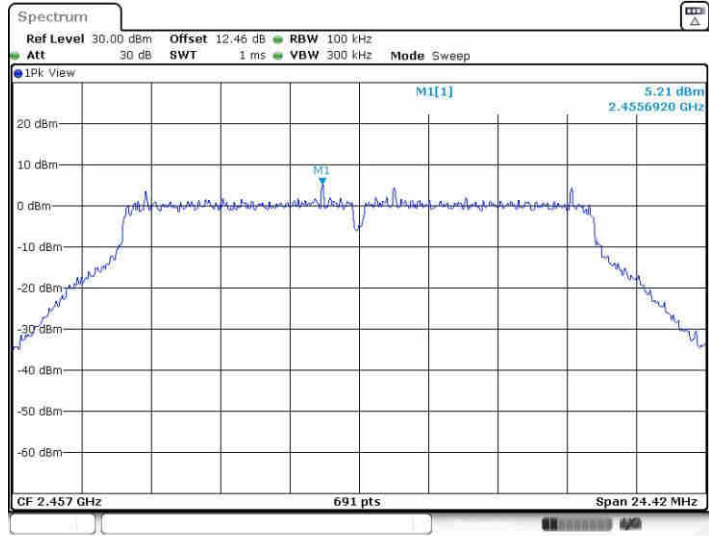

Date: 21 JUN 2022 04:40:38


11G_Ant1_2462

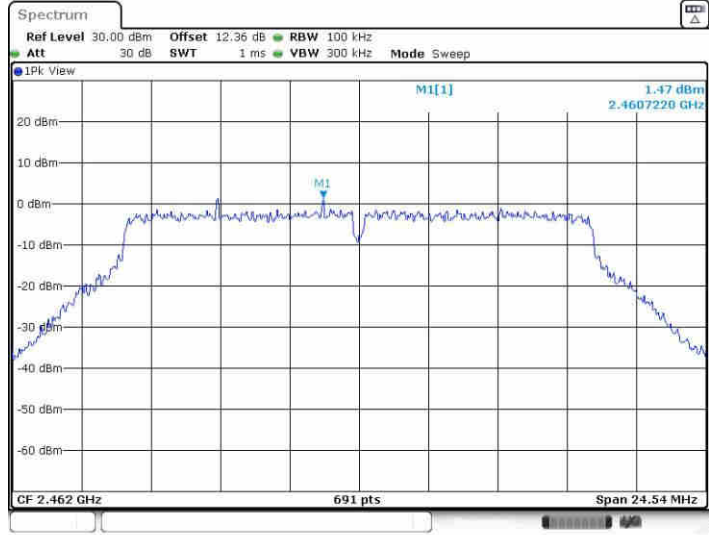

Date: 21 JUN 2022 04:43:53




11N20SISO_Ant1_2412

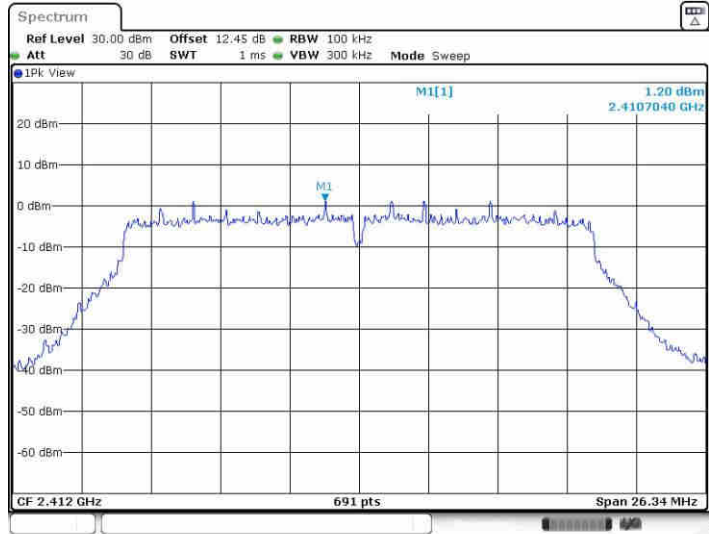

Date: 21 JUN 2022 04:46:45


11N20SISO_Ant1_2417

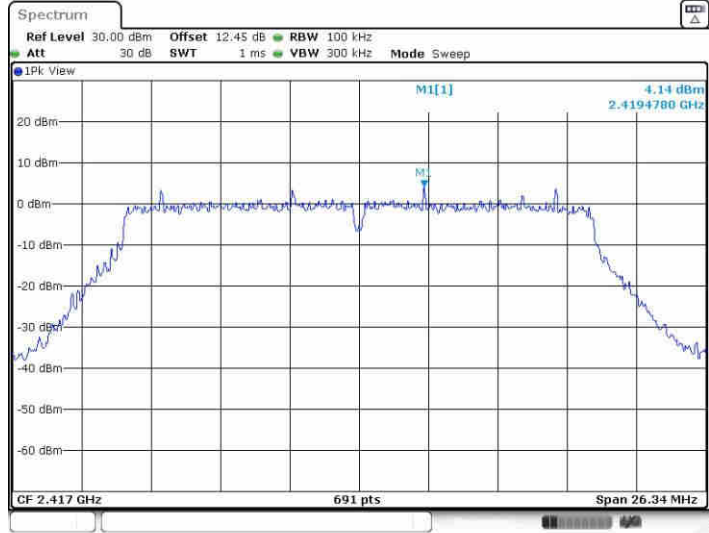

Date: 21 JUN 2022 04:49:19




11N20SISO_Ant1_2437

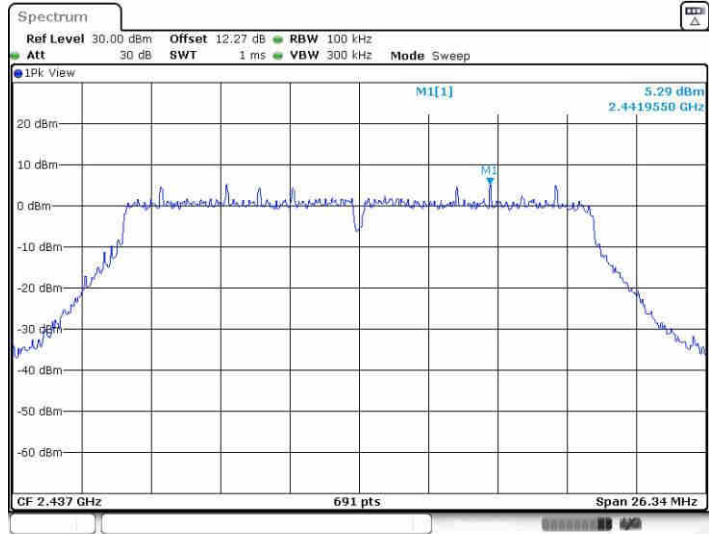

Date: 21 JUN 2022 04:51:46


11N20SISO_Ant1_2457

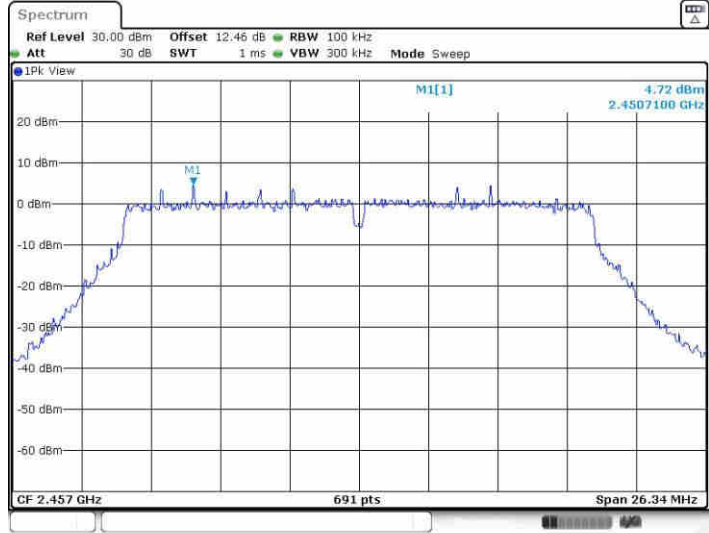

Date: 21 JUN 2022 04:53:55




11N20SISO_Ant1_2462

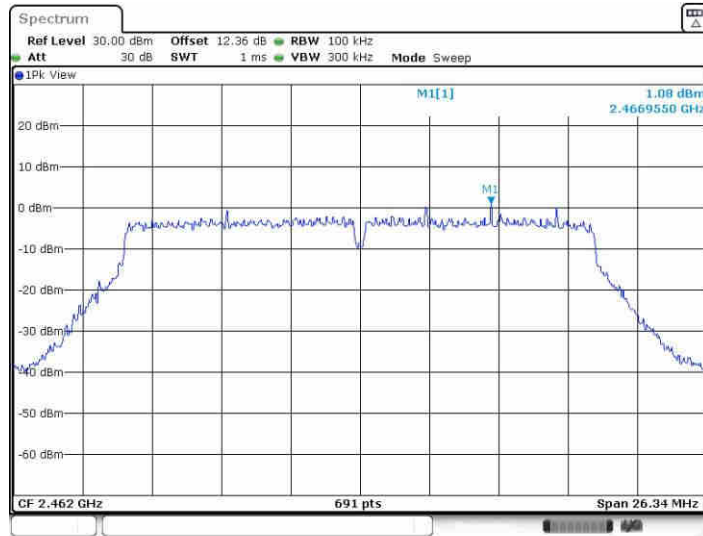


Date: 21 JUN 2022 04:56:28

11N40SISO_Ant1_2422

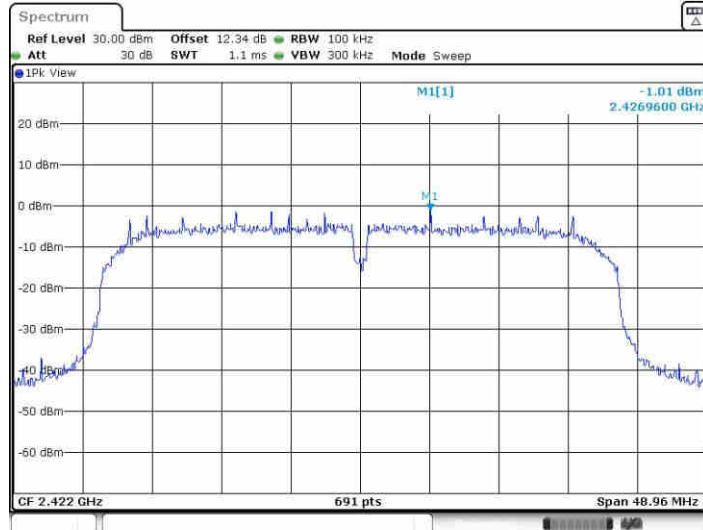

Date: 21 JUN 2022 04:59:13

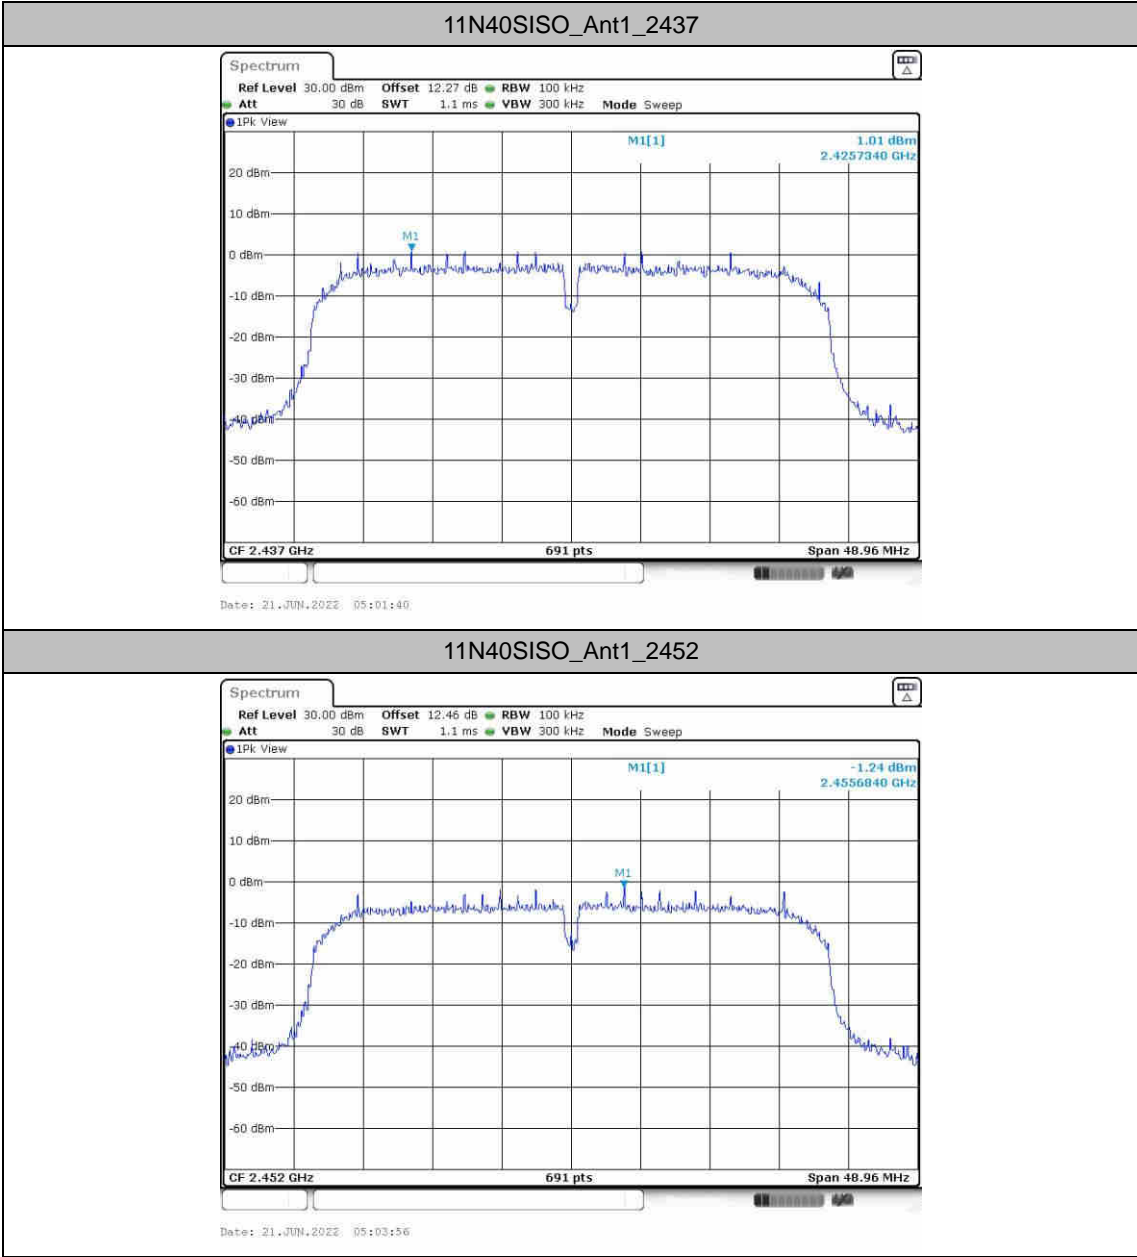




Band edge measurements

Test Result

TestMode	Antenna	Channel Name	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	9.41	-38.93	≤-10.59	PASS
		High	2462	10.57	-42.21	≤-9.43	PASS
11G	Ant1	Low	2412	1.89	-34.87	≤-18.11	PASS
			2417	3.60	-38.93	≤-16.4	PASS
		High	2457	5.21	-41.74	≤-14.79	PASS
			2462	1.47	-42.66	≤-18.53	PASS
11N20SISO	Ant1	Low	2412	1.20	-34.89	≤-18.8	PASS
			2417	4.14	-38.9	≤-15.86	PASS
		High	2457	4.72	-40.9	≤-15.28	PASS
			2462	1.08	-42.69	≤-18.92	PASS
11N40SISO	Ant1	Low	2422	-1.01	-37.61	≤-21.01	PASS
		High	2452	-1.24	-39.47	≤-21.24	PASS




Test Graphs

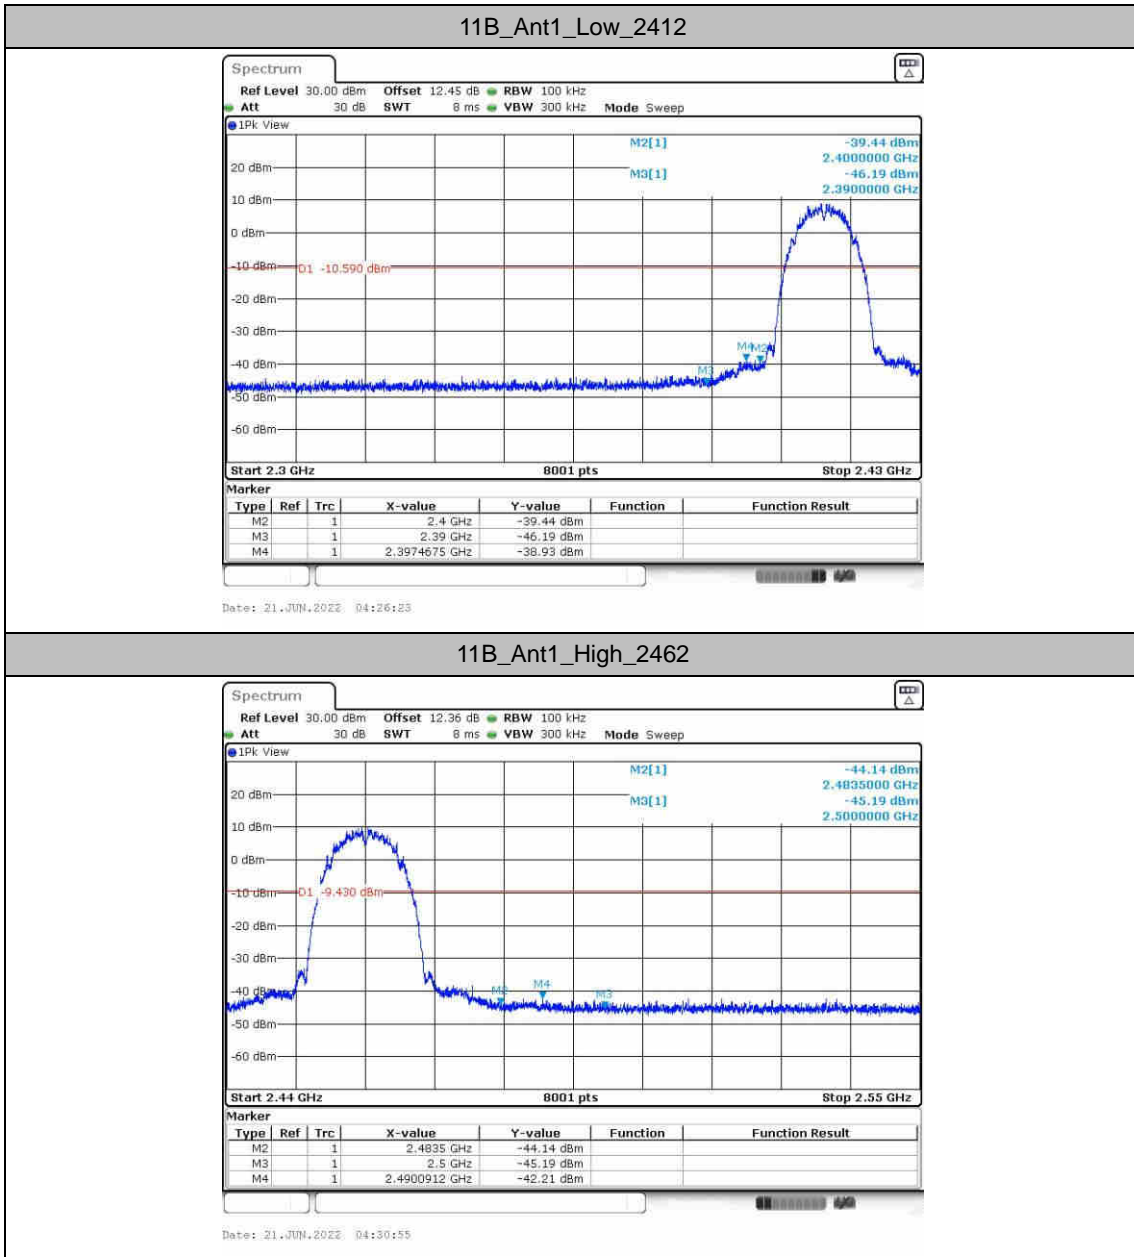




11G_Ant1_Low_2412

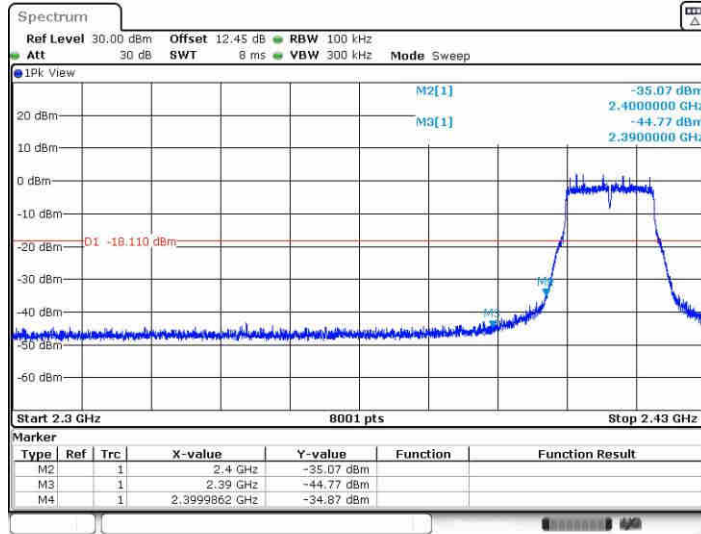

Date: 21 JUN 2022 04:33:33


11G_Ant1_Low_2417

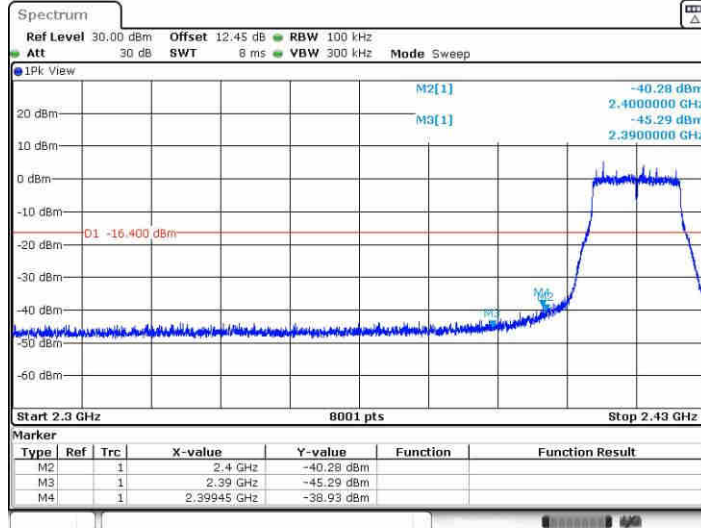

Date: 21 JUN 2022 04:36:08




11G_Ant1_High_2457

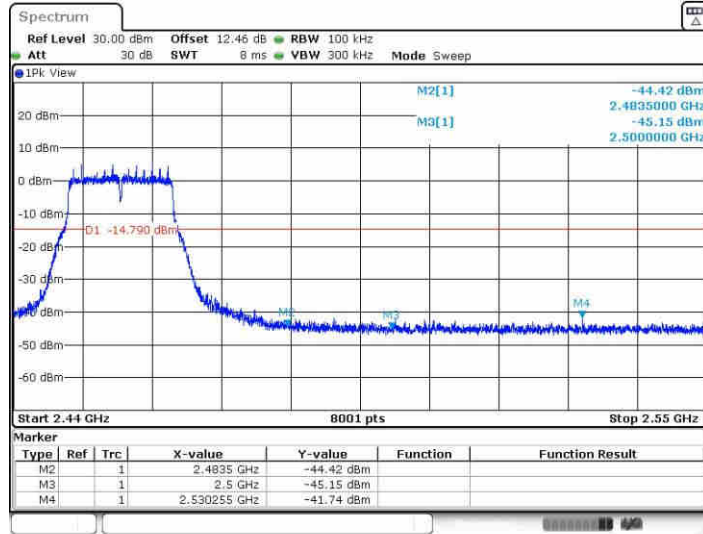

Date: 21 JUN 2022 04:40:53


11G_Ant1_High_2462

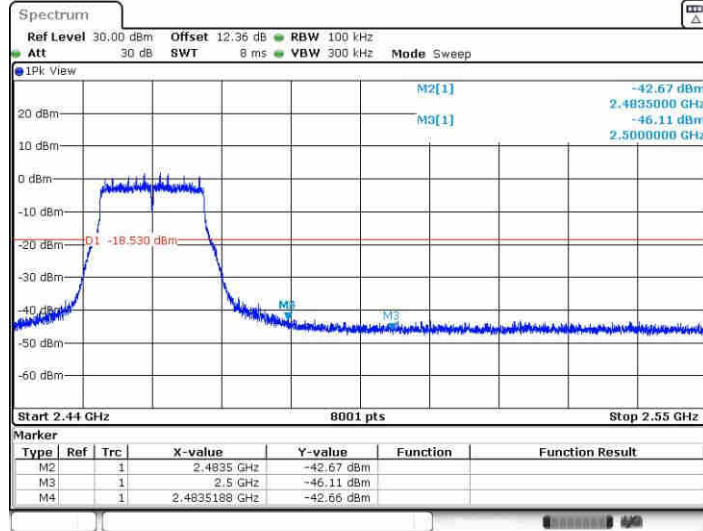

Date: 21 JUN 2022 04:44:08




11N20SISO_Ant1_Low_2412

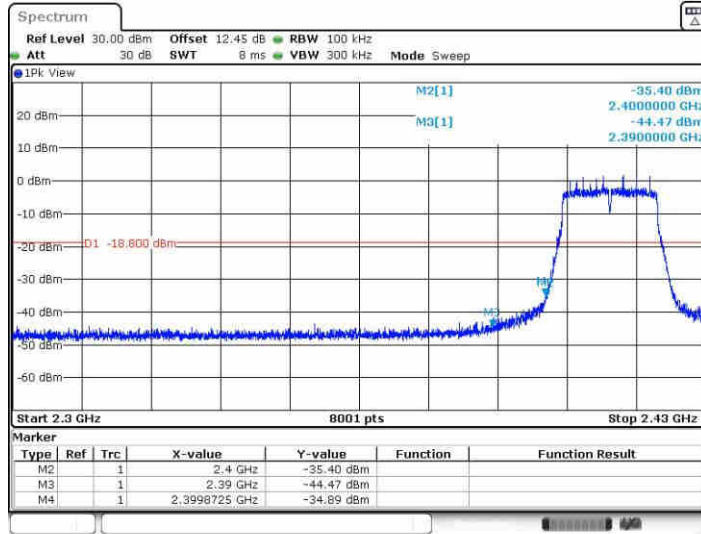

Date: 21 JUN 2022 04:47:01


11N20SISO_Ant1_Low_2417

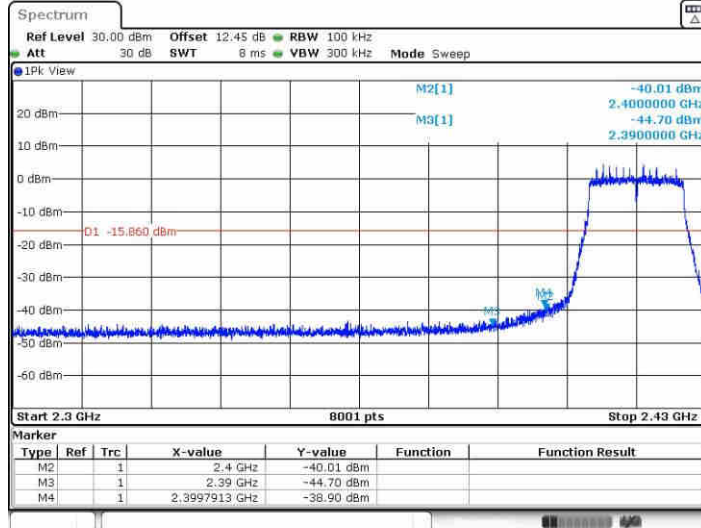


Date: 21 JUN 2022 04:49:33



11N20SISO_Ant1_High_2457

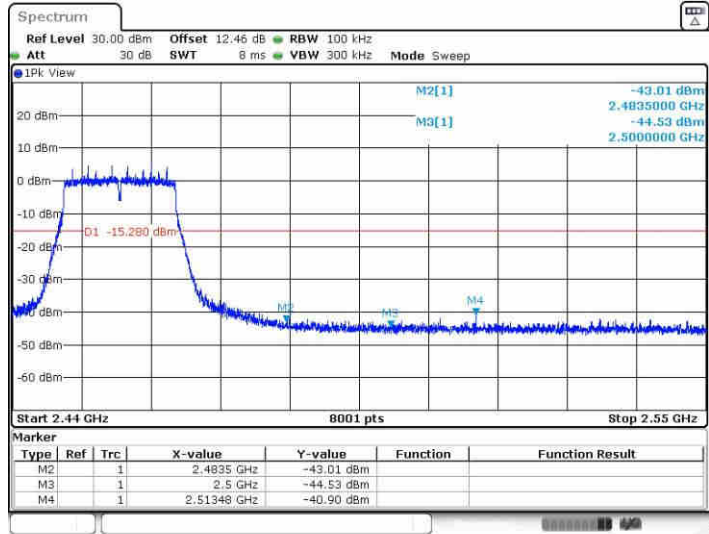


11N20SISO_Ant1_High_2462

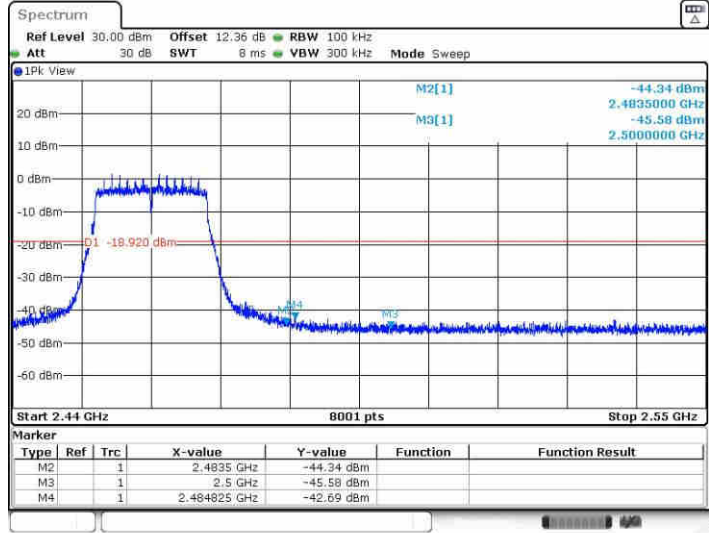




11N40SISO_Ant1_Low_2422

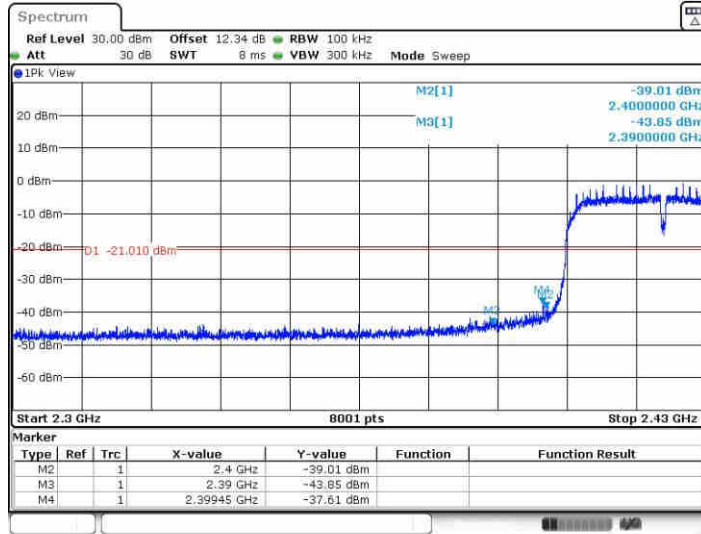

Date: 21 JUN 2022 04:59:28

11N40SISO_Ant1_High_2452

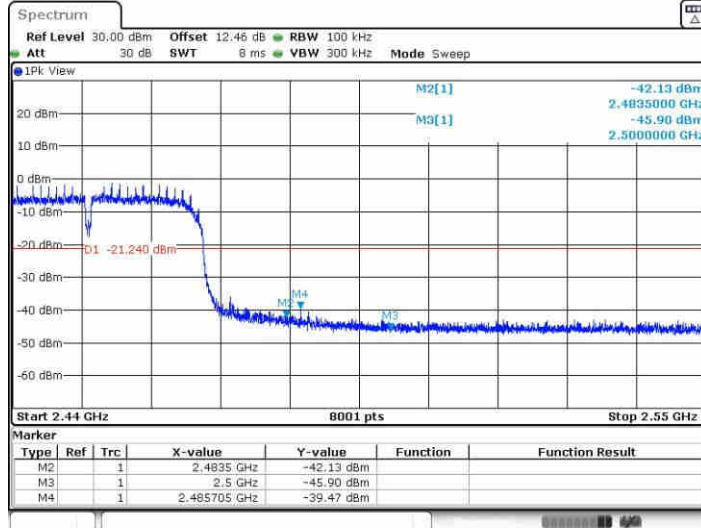

Date: 21 JUN 2022 05:04:11




Conducted Spurious Emission

Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict		
11B	Ant1	2412	30~1000	9.41	-54.91	≤-10.59	PASS		
			1000~26500	9.41	-46.5	≤-10.59	PASS		
		2437	30~1000	10.18	-54.69	≤-9.82	PASS		
			1000~26500	10.18	-46.06	≤-9.82	PASS		
		2462	30~1000	10.57	-54.61	≤-9.43	PASS		
			1000~26500	10.57	-46.18	≤-9.43	PASS		
11G	Ant1	2412	30~1000	1.89	-55.6	≤-18.11	PASS		
			1000~26500	1.89	-45.84	≤-18.11	PASS		
		2417	30~1000	3.60	-55.25	≤-16.4	PASS		
			1000~26500	3.60	-46.2	≤-16.4	PASS		
		2437	30~1000	5.92	-55.37	≤-14.08	PASS		
			1000~26500	5.92	-45.87	≤-14.08	PASS		
		2457	30~1000	5.21	-54.36	≤-14.79	PASS		
			1000~26500	5.21	-46.09	≤-14.79	PASS		
		2462	30~1000	1.47	-54.96	≤-18.53	PASS		
			1000~26500	1.47	-45.65	≤-18.53	PASS		
		11N20SISO	Ant1	2412	30~1000	1.20	-55.25	≤-18.8	PASS
					1000~26500	1.20	-46.23	≤-18.8	PASS
2417	30~1000			4.14	-54.9	≤-15.86	PASS		
	1000~26500			4.14	-46.06	≤-15.86	PASS		
2437	30~1000			5.29	-54.49	≤-14.71	PASS		
	1000~26500			5.29	-46.52	≤-14.71	PASS		
2457	30~1000			4.72	-54.32	≤-15.28	PASS		
	1000~26500			4.72	-46.21	≤-15.28	PASS		
2462	30~1000			1.08	-55.03	≤-18.92	PASS		
	1000~26500			1.08	-45.01	≤-18.92	PASS		
11N40SISO	Ant1			2422	30~1000	-1.01	-55.01	≤-21.01	PASS
					1000~26500	-1.01	-46.36	≤-21.01	PASS
		2437	30~1000	1.01	-55.34	≤-18.99	PASS		
			1000~26500	1.01	-46.57	≤-18.99	PASS		
		2452	30~1000	-1.24	-54.93	≤-21.24	PASS		
			1000~26500	-1.24	-46.2	≤-21.24	PASS		




Test Graphs

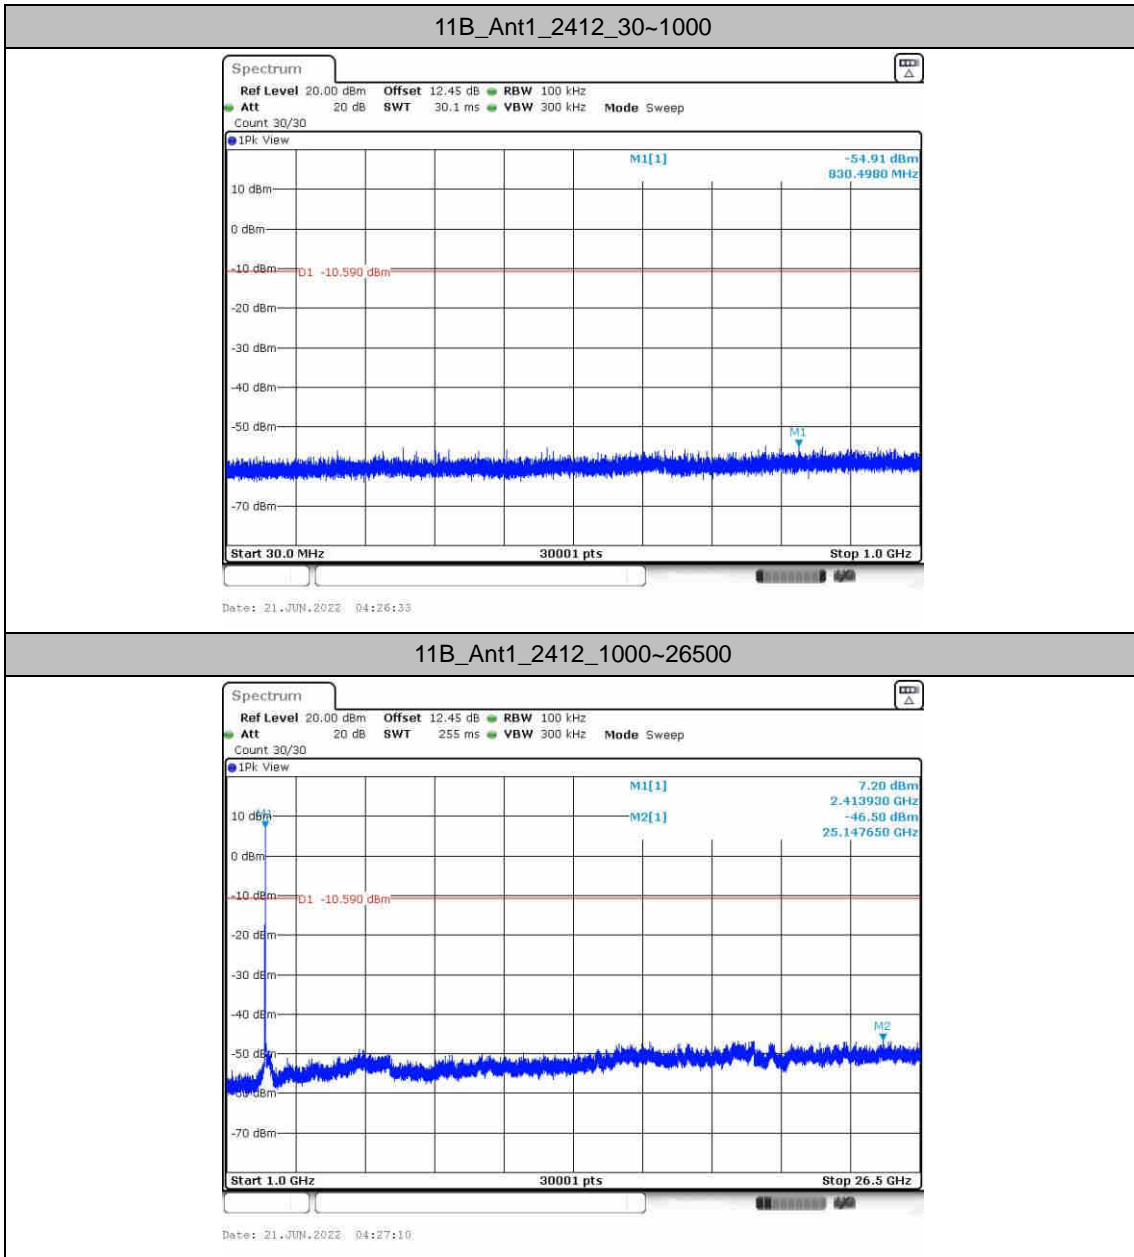




11B_Ant1_2437_30~1000

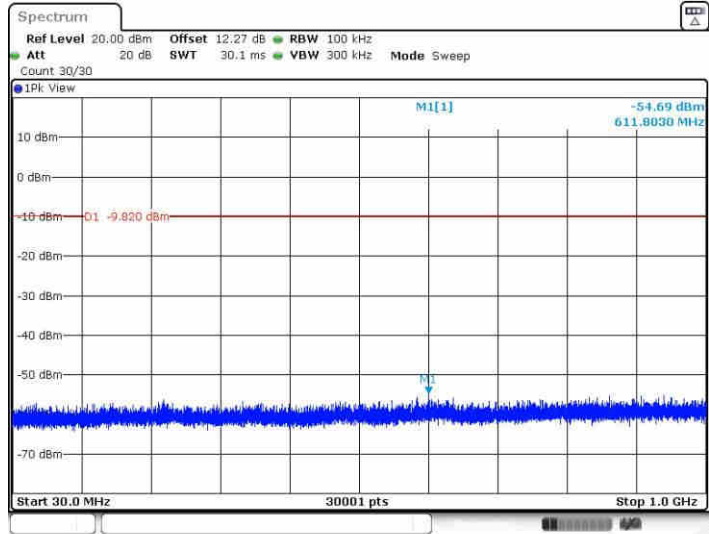

Date: 21 JUN 2022 04:28:45


11B_Ant1_2437_1000~26500

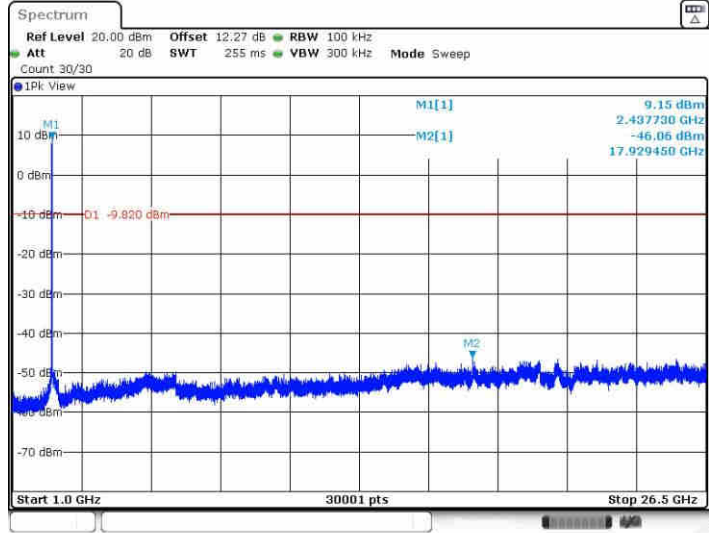

Date: 21 JUN 2022 04:29:22




11B_Ant1_2462_30~1000

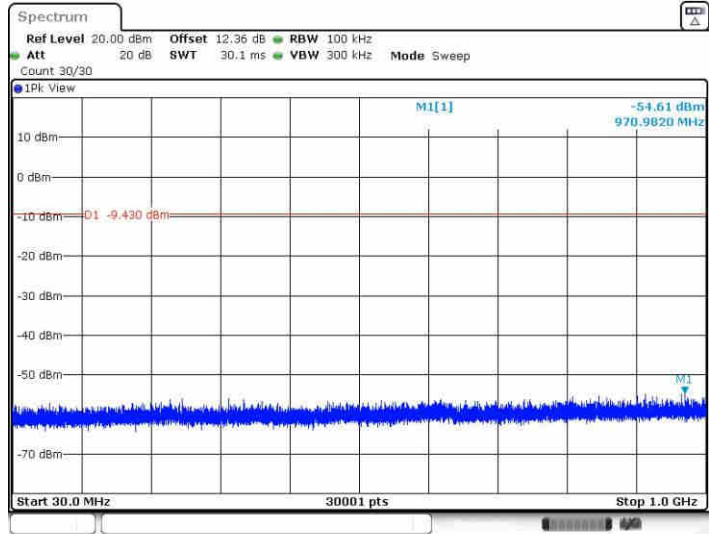

Date: 21 JUN 2022 04:31:05


11B_Ant1_2462_1000~26500

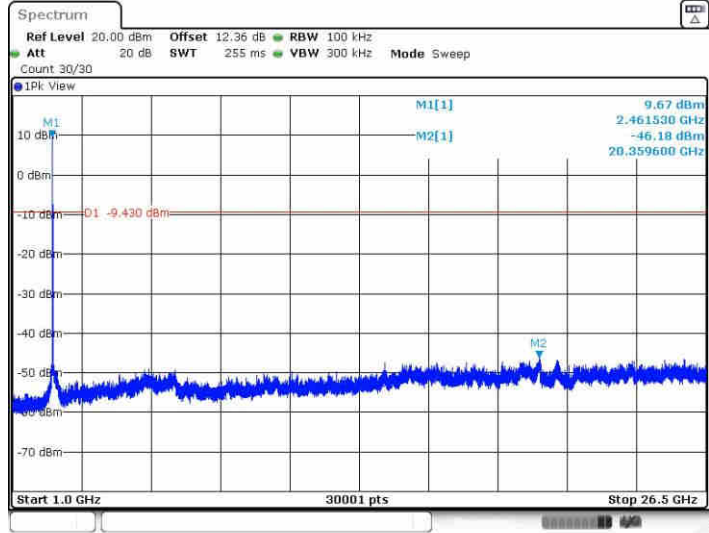

Date: 21 JUN 2022 04:31:42




11G_Ant1_2412_30~1000

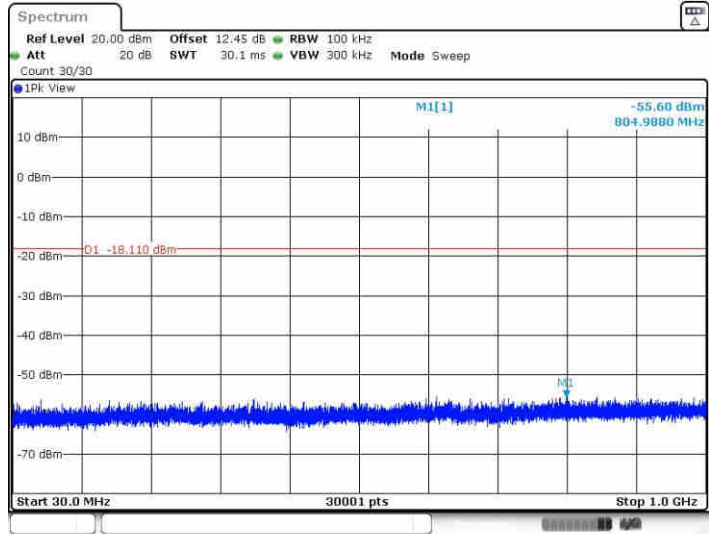

Date: 21 JUN 2022 04:33:43


11G_Ant1_2412_1000~26500

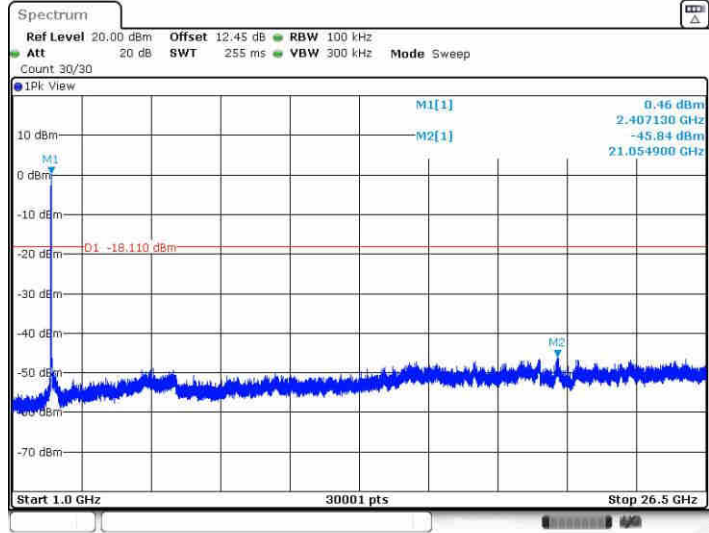

Date: 21 JUN 2022 04:34:20




11G_Ant1_2417_30~1000

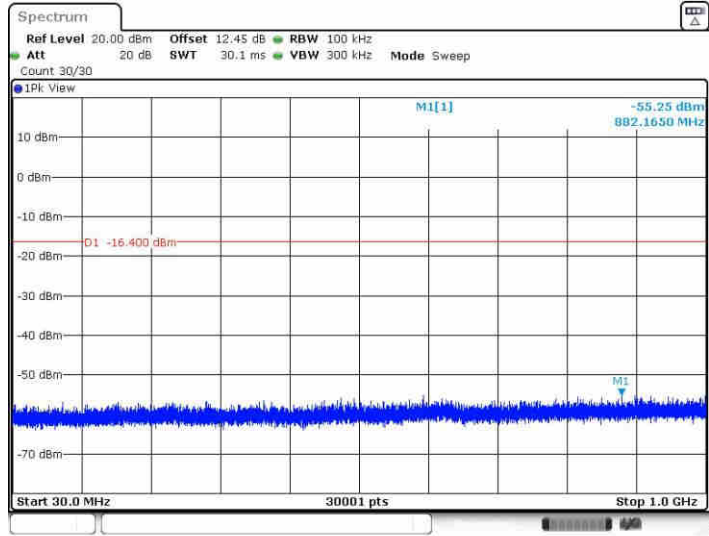

Date: 21 JUN 2022 04:36:19

11G_Ant1_2417_1000~26500

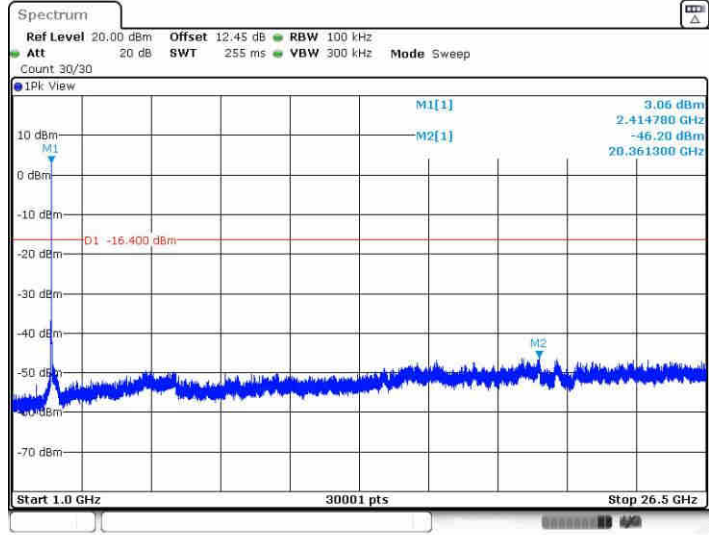

Date: 21 JUN 2022 04:36:56