

ProductNumber:FPC

ProductName:WIFI2.4GHZAntennaFPC

Index:

1. Specification

2. Characteristics and Reliability Test

3. Antenna - S Parameter Test Data

4. Mechanical and Packing Drawing

5. Material Description and RoHS Test Report

ProductNumber:FPC

ProductName:WIFI2.4GHZAntennaFPC

1. Specification

A. Electrical Characteristics	
Frequency	2400-2500MHZ ~ 4900-5900MHZ
S.W.R.	< 2.5
Antenna Gain	2 dBi \pm 0.7
Polarization	Linear
Impedance	50 Ohm
B. Material & Mechanical Characteristics	
Material of Radiator	FR-4
Cable Type	RG-1.13
Connector Type	I-pex
Cable length	13CM
C. Environmental	
Operation Temperature	- 40 °C ~ + 65 °C
Storage Temperature	- 40 °C ~ + 80 °C
Antenna Color Storage life	< 2 year

2. Characteristics and Reliability Test

Test Items		Test Condition and Procedure	Requirements
C1	S.W.R.	Set DUT on Network Analyzer; make individual calibration to test	Directive DUT specification
C2	Antenna Gain	Set DUT on Antenna Chamber; make individual calibration to test	Directive DUT specification
M1	Vibration	GB / T2423 . 48-1997 Amplitude: 0.03 inch (1.5mm); Freq: 20 to 80 to 20 Hz 3 directions; 2 hours for each direction	1. No Visual Damage 2. Frequency Tol.<= 5%
M2	Random Drop	GB / T2423.8-1995 Height: 1.0 Meter; 3 directions; 1 time for each direction	1. No parts separated 2. Frequency Tol.<= 5%
M3	Solderability	GB 2423 . 28- 82 Solder iron: 260 \pm 5°C; Duration: 5 seconds	1. Mounted on PCB 2. No Visual Damage
M4	Terminal-	Holding with individual specification; force applied	1. Directive DUT specification

ProductNumber:FPC


ProductName:WIFI2.4GHZAntennaFPC

	Pull Test	to axis of terminal	2. Frequency Tol.<= 5%
M5	Terminal-Torque Test	Holding with individual specification; applied clockwise and counterclockwise to the axis of terminal	1. Directive DUT specification 2. Frequency Tol.<= 5%
M6	Dimension	Inspection of dimension, color, material, package, surface process	Directive DUT specification
E1	Salt Spray	GB / T 2423 . 17- 93 Temp: 35°C; RH: >= 95%; NaCl solution: >= 5%; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E2	Humidity	GB / T 2423 . 4 - 93 Temp: 80°C / 12 H; -40°C / 12H RH: >= 90%; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E3	Thermal Shock	GB / T 2423 . 22 - 87 1 Cycle: - 40°C (30 minutes) to + 80°C (30 minutes) Cycles: 24	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E4	Life (High Temp.)	GB /T 2423 . 2 - 89 Temp: 80°C; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
R1	RoHS	With Reference to IEC 62321:2008 with flow chart	Directive RoHS 2002/95/EC
R2	PFOS	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC
R3	PFOA	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC


ProductNumber:FPC

ProductName:WIFI2.4GHZAntennaFPC

3. Antenna - S Parameter Test Data

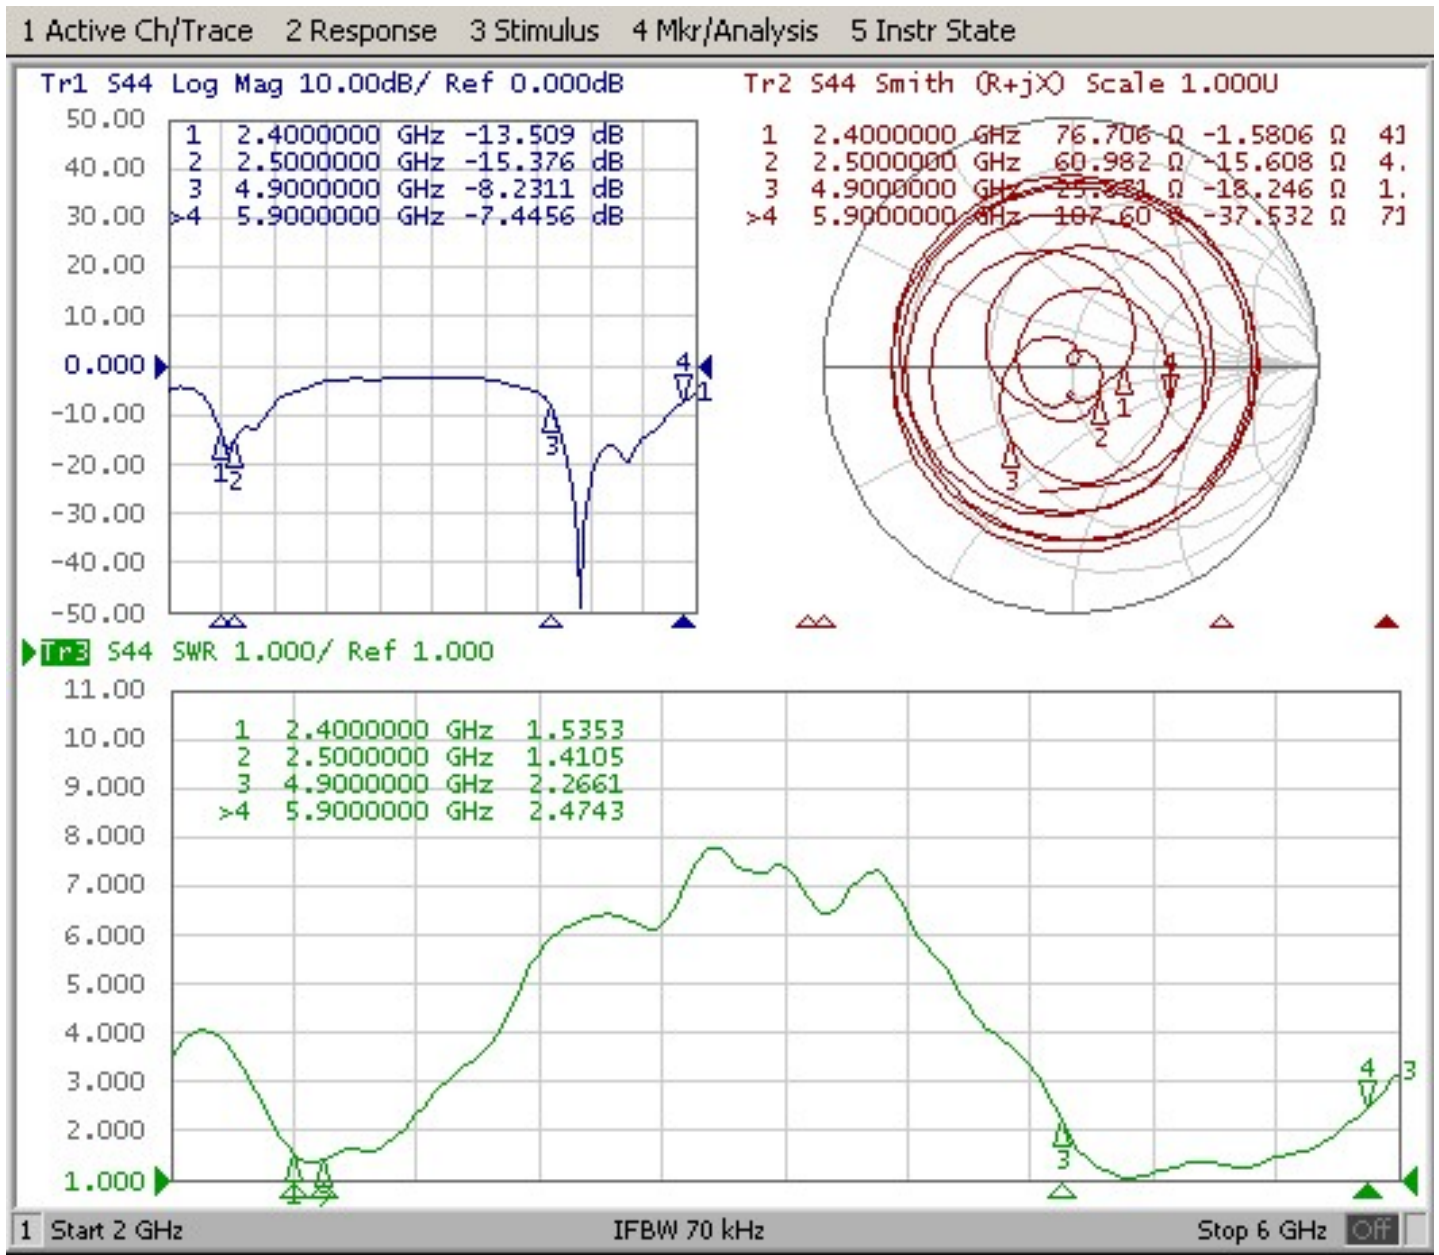



REV.	FILE No.	DRAWN BY	DATE

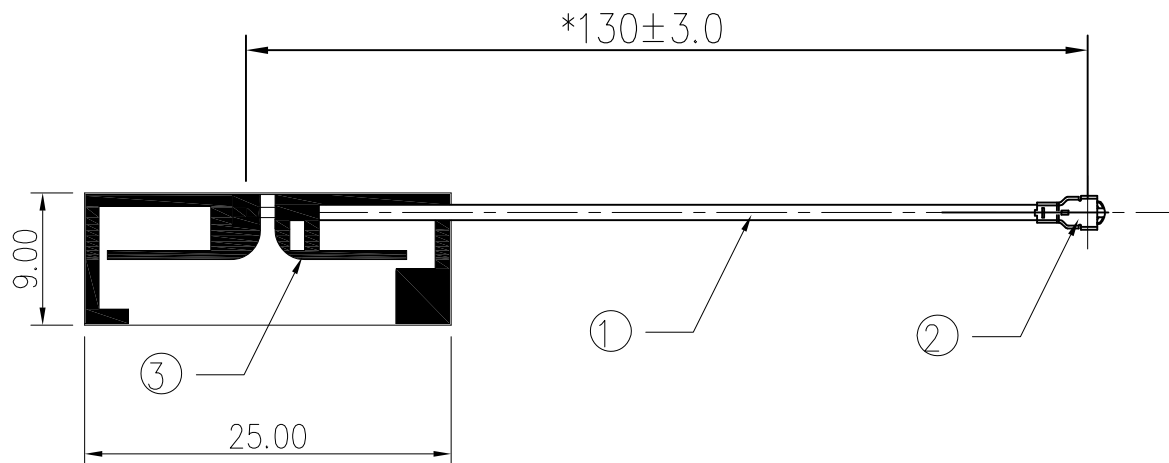

SPECIFICATION:
 1. NORMAL IMPEDANCE: 50Ω;
 2. VSWR: 4.0 Max.;
 3. PEAK GAIN: 2.7 dBi

3	PCB	MATERIAL :FR-4	1	N/A
2	RF CABLE	1.13CABLE,BLACK	1	N/A
1	RF CONNECTOR	MHF IPEX PLUG FOR 1.13CABLE	1	N/A
ITEM	PART NAME	DESCRIPTION	Q'TY	REMARK

DWG TYPE:					
GENERAL TOLERANCE: UNLESS OTHERWISE SPECIFIED		 	TITLE: Wifi ANTENNA ASSEMBLY 1.13 CABLE,BLACK		
X.X ±0.35	X.X* ±3°	APPD:	DWG No.:		
X.XX ±0.25	X.XX* ±2°	CHECK:	AN0819-130IPEX		
X.XXX ±0.15	X.XXX* ±1°	DRAW:	DATE: 2017.12.20	SCALE: UNIT:	PAGE: