



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

198 Kezhu Road, Scientech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663

Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM171200751801
Page: 1 of 47
FCC ID: 2AO33BLEPARK

TEST REPORT

Application No.: GZEM1712007518CR
Applicant: FAAC S.p.A - BU Parking
Address of Applicant: 10 VIA CALARI - ZOLA PREDOSA, 40069 BOLOGNA, Italy
Manufacturer: Same as the applicant
Address of Manufacturer: Same as the applicant
Factory: Same as the applicant
Address of Factory: Same as the applicant
Equipment Under Test (EUT):
EUT Name: BLEPARK device for wireless communication connection
FCC ID: 2AO33BLEPARK
Model No.: BLEPARK ver.1.0
Trade Mark: BLEPARK
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2018-01-03
Date of Test: 2018-01-09 to 2018-01-22
Date of Issue: 2018-07-09
Test Result: Pass*

* In the configuration tested, the EUT complied with the standards specified above.



Kobe Jian
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM171200751801
Page: 2 of 47

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-07-09		Original

Authorized for issue by:			
Tested By		 _____ Vico_Cui /Project Engineer	2018-01-09 to 2018-01-22
Checked By		 _____ Ricky_Liu /Reviewer	2018-03-23
			Date
			Date

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	6
4.4 Test Location	7
4.5 Test Facility	8
4.6 Deviation from Standards	9
4.7 Abnormalities from Standard Conditions	9
5 Equipment List	10
6 Radio Spectrum Technical Requirement	13
6.1 Antenna Requirement	13
6.1.1 Test Requirement	13
6.1.2 Conclusion	13
7 Radio Spectrum Matter Test Results	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	14
7.1.1 E.U.T. Operation	14
7.1.2 Test Setup Diagram	14
7.1.3 Measurement Procedure and Data	15
7.2 Minimum 6dB Bandwidth	18
7.2.1 E.U.T. Operation	18
7.2.2 Test Setup Diagram	18
7.2.3 Measurement Procedure and Data	18
7.3 Conducted Peak Output Power	19
7.3.1 E.U.T. Operation	19
7.3.2 Test Setup Diagram	19
7.3.3 Measurement Procedure and Data	19
7.4 Power Spectrum Density	20
7.4.1 E.U.T. Operation	20
7.4.2 Test Setup Diagram	20
7.4.3 Measurement Procedure and Data	20
7.5 Conducted Band Edges Measurement	21
7.5.1 E.U.T. Operation	21
7.5.2 Test Setup Diagram	21
7.5.3 Measurement Procedure and Data	21
7.6 Conducted Spurious Emissions	22
7.6.1 E.U.T. Operation	22
7.6.2 Test Setup Diagram	22
7.6.3 Measurement Procedure and Data	22
7.7 Radiated Emissions which fall in the restricted bands	23
7.7.1 E.U.T. Operation	23

7.7.2	Test Setup Diagram.....	24
7.7.3	Measurement Procedure and Data	25
7.8	Radiated Spurious Emissions	28
7.8.1	E.U.T. Operation.....	28
7.8.2	Test Setup Diagram.....	29
7.8.3	Measurement Procedure and Data	30
8	Appendix	35
8.1	Appendix 15.247	35

4 General Information

4.1 Details of E.U.T.

Power Supply:	DC 12V
Test Voltage:	AC 230V, 50Hz with adaptor
Cable:	DC input cable (unshielded, <3m) RS 232 cable (unshielded, <3m)
Bluetooth Version	4.1 BT Signal mode BLE only
Antenna Type	Integrated PCB Antenna
Channel Spacing	2MHz
Modulation Type	GFSK
Number of Channels	40
Operation Frequency	2402MHz to 2480MHz
Power Class	<10mW
Antenna Gain	3.3 dBi

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	IBM	T30	S/N78-3VMLX 06/01
Adapter supplied by client	SMART	ZZU1001-025120-2E	1511005080
Converter supplied by client	FAAC	110.G90091	1711009
RS232 cable supplied by client	FAAC	1.8m	N/A
USB cable supplied by client	FAAC	1m	N/A

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	+/-7.25 x 10 ⁻⁸
2	Duty cycle	+/-0.37%
3	Occupied Bandwidth	+/-3%
4	RF Conducted power	+/-0.75dB
5	RF Power Density	+/-2.84dB
6	Conducted Spurious Emissions	+/-0.75dB
7	RF Radiated Power	+/-4.5dB (below 1GHz)
8	RF Radiated Power	+/-4.8dB (above 1GHz)
	Radiated Spurious Emission Test	+/-4.5dB (30MHz-1GHz)
9	Radiated Spurious Emission Test	+/-4.8dB (1GHz-18GHz)
	Temperature	+/-0.4°C
10	Humidity	+/-1.3%
11	Supply Voltages	+/-1.5%
12	Time	+/-3%



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co. Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Power Spectrum Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer	Agilent Technologies	N9020A	SEM004-10	2017-02-13	2018-02-12
ESG vector signal generator	KEYSIGHT	E4438C	SEM006-03	2017-04-14	2018-04-13
EXG Analog Signal Generator	Agilent Technologies	N5171B	SEM006-04	2017-07-26	2020-07-25
Power Meter	Agilent Technologies	U2021XA_C h2	SEM009-02	2017-09-19	2018-9-18
Power Meter	Agilent Technologies	U2021XA_C h3	SEM009-03	2017-09-19	2018-9-18
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
RI High Frequency Cable	SGS	20 m	EMC0528	2016-04-19	2018-04-18
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bilog Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-18	2019-01-17
Amplifier	HP	8447F	EMC2065	2017-06-19	2018-06-18
Pre Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2016-02-27	2018-02-26
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2016-04-30	2018-04-29

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	Zhong Yu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Netwok	R&S	ENV216	EMC0118	2018-01-19	2019-01-18
LISN	SCHAFFNER CHASE	MN2050D/1	EMC0102	2017-09-20	2018-09-19
EMI Test Receiver	Rohde & Schwarz	ESCS30	EMC0506	2017-11-27	2018-11-26
Coaxial Cable	HangTianXing	2m	EMC0107	2016-07-24	2018-07-23
Voltage Probe	SGS	N/A	EMC0106	2016-04-04	2018-04-03
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM171200751801
Page: 12 of 47

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
RI High Frequency Cable	SGS	20 m	EMC0528	2016-04-19	2018-04-18
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bilog Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-18	2019-01-17
Amplifier	HP	8447F	EMC2065	2017-06-19	2018-06-18
Pre Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2016-02-27	2018-02-26
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2016-04-30	2018-04-29

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2017-07-26	2018-07-25
DMM	Fluke	73	EMC0007	2017-07-26	2018-07-25

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.3dBi.

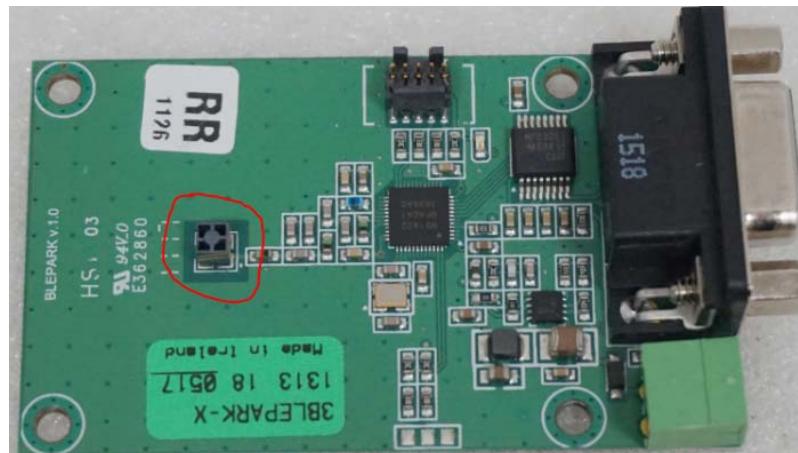

Test result: The unit does meet the FCC requirements.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 20.8 °C Humidity: 34.1 % RH Atmospheric Pressure: 1020 mbar

Test Mode: a: TX mode _ Keep the EUT in continuously transmitting mode with GFSK modulation

7.1.2 Test Setup Diagram

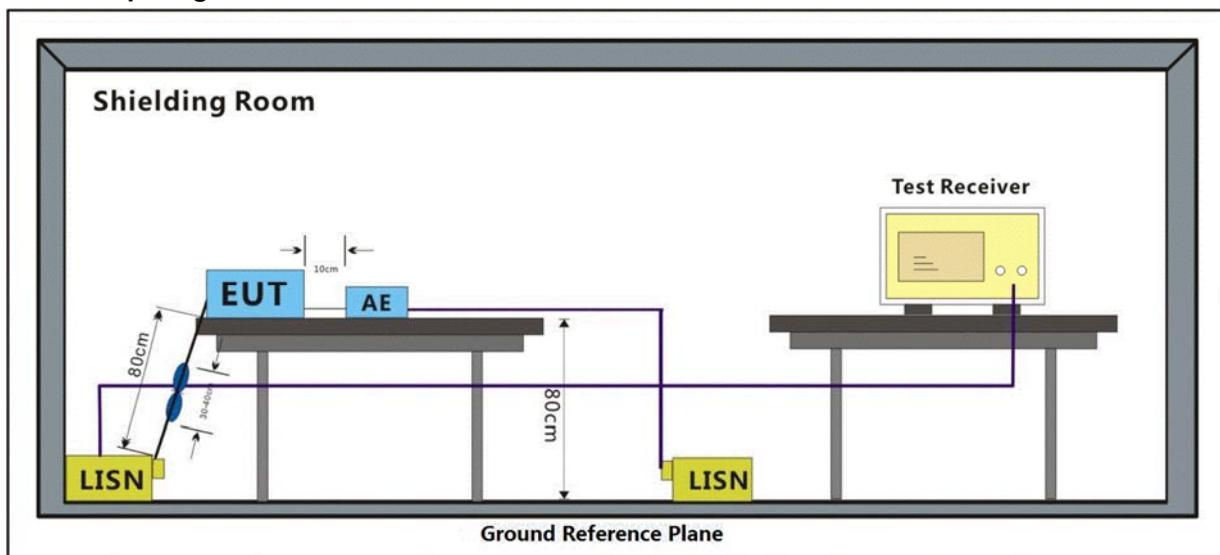


7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 μ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:a; Line:Live Line

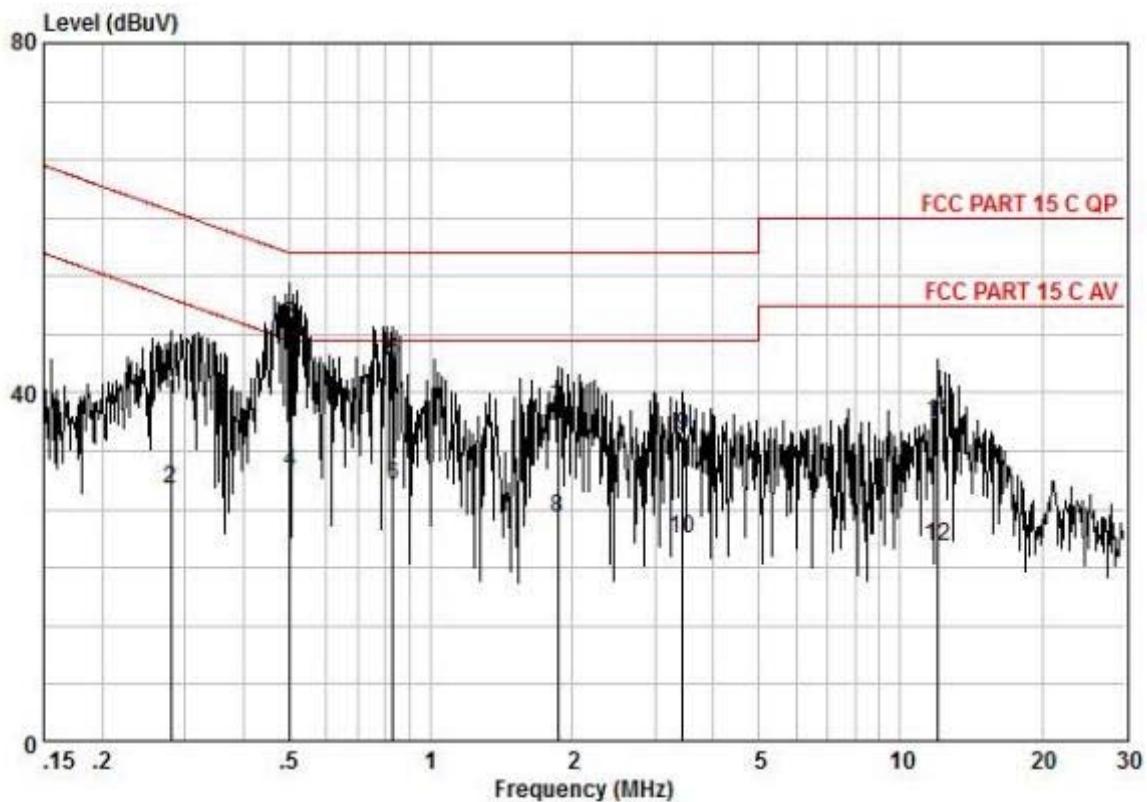

Pol No	Model	Line	Line	Line	Line	Line	Line	Line	Line	Line	Line
Frequency	read	Cable	LISN	Measured	Limit	Over					
MHz	level	Loss	Factor	level	Line	limit					
0.28	31.81	0.14	9.63	41.58	60.81	-19.23	QP				
0.28	19.23	0.14	9.63	29.00	50.81	-21.81	AVERAGE				
0.50	37.79	0.20	9.65	47.64	56.00	-8.36	QP				
0.50	21.11	0.20	9.65	30.96	46.00	-15.04	AVERAGE				
0.83	33.64	0.27	9.62	43.53	56.00	-12.47	QP				
0.83	19.49	0.27	9.62	29.38	46.00	-16.62	AVERAGE				
1.87	28.22	0.38	9.61	38.21	56.00	-17.79	QP				
1.87	15.74	0.38	9.61	25.73	46.00	-20.27	AVERAGE				
3.44	24.83	0.58	9.62	35.03	56.00	-20.97	QP				
3.44	13.14	0.58	9.62	23.34	46.00	-22.66	AVERAGE				
12.06	26.30	0.70	9.71	36.71	60.00	-23.29	QP				
12.06	11.99	0.70	9.71	22.40	50.00	-27.60	AVERAGE				

Mode:a; Line:Neutral Line

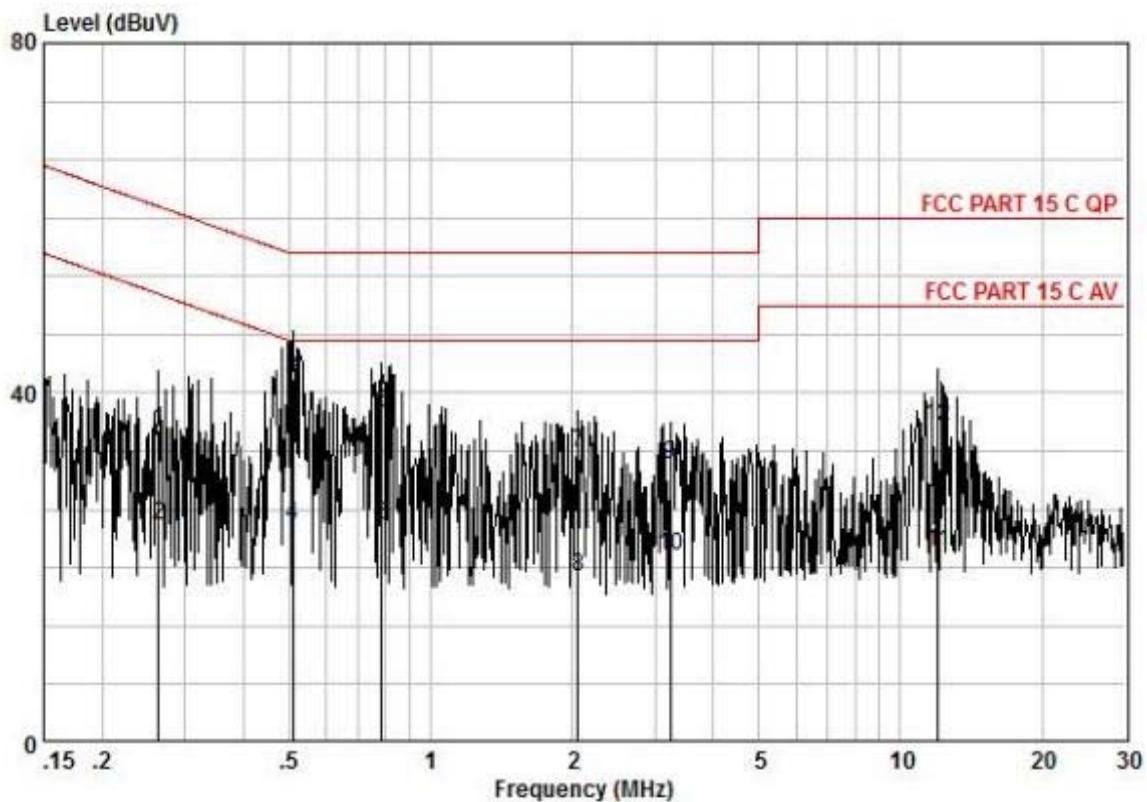

Pol No	Model	NEUTRAL							
Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark		
0.26	26.12	0.13	9.58	35.83	61.34	-25.51	QP		
0.26	15.16	0.13	9.58	24.87	51.34	-26.47	AVERAGE		
0.51	31.79	0.20	9.55	41.55	56.00	-14.45	QP		
0.51	15.11	0.20	9.55	24.87	46.00	-21.13	AVERAGE		
0.79	14.89	0.27	9.59	24.75	46.00	-21.25	AVERAGE		
0.79	27.84	0.27	9.59	37.70	56.00	-18.30	QP		
2.05	23.16	0.41	9.52	33.09	56.00	-22.91	QP		
2.05	9.08	0.41	9.52	19.01	46.00	-26.99	AVERAGE		
3.24	21.59	0.56	9.57	31.72	56.00	-24.28	QP		
3.24	11.32	0.56	9.57	21.45	46.00	-24.55	AVERAGE		
12.06	11.52	0.70	9.63	21.85	50.00	-28.15	AVERAGE		
12.06	25.91	0.70	9.63	36.24	60.00	-23.76	QP		

7.2 Minimum 6dB Bandwidth


Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1
Limit: ≥ 500 kHz

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 26.2 °C Humidity: 41.6 % RH Atmospheric Pressure: 1020 mbar
Test Mode: a: TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.2.2 Test Setup Diagram

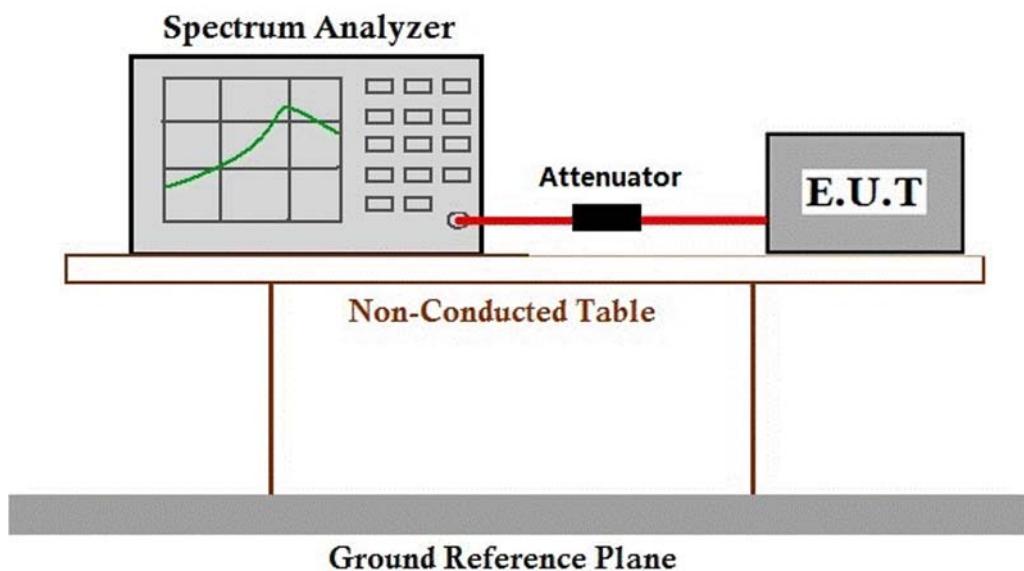

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 26.2 °C Humidity: 41.6 % RH Atmospheric Pressure: 1020 mbar

Test Mode: a: TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.3.2 Test Setup Diagram

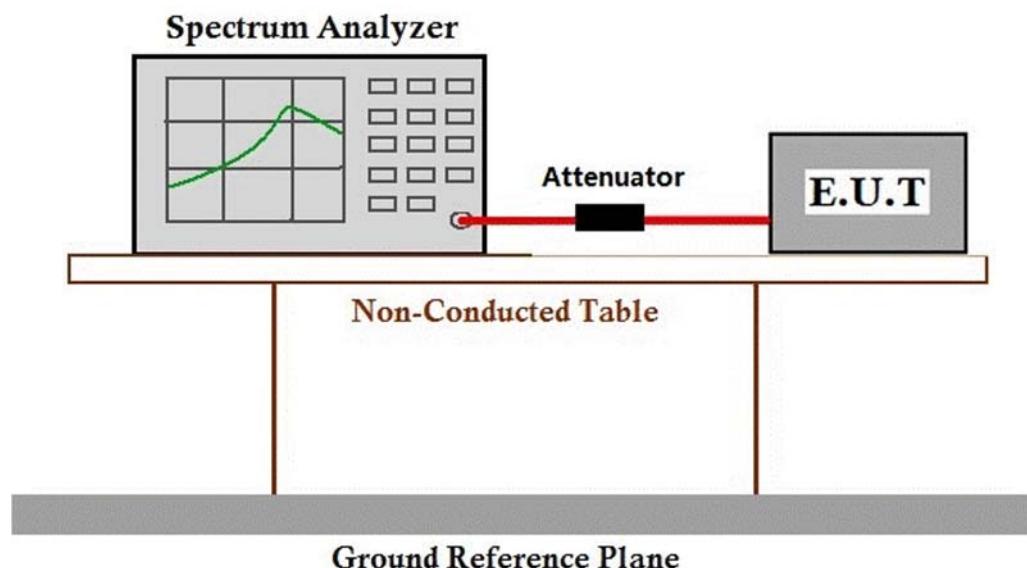

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2
Limit: ≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation

Operating Environment:
Temperature: 26.2 °C Humidity: 41.6 % RH Atmospheric Pressure: 1020 mbar
Test Mode: a: TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.4.2 Test Setup Diagram

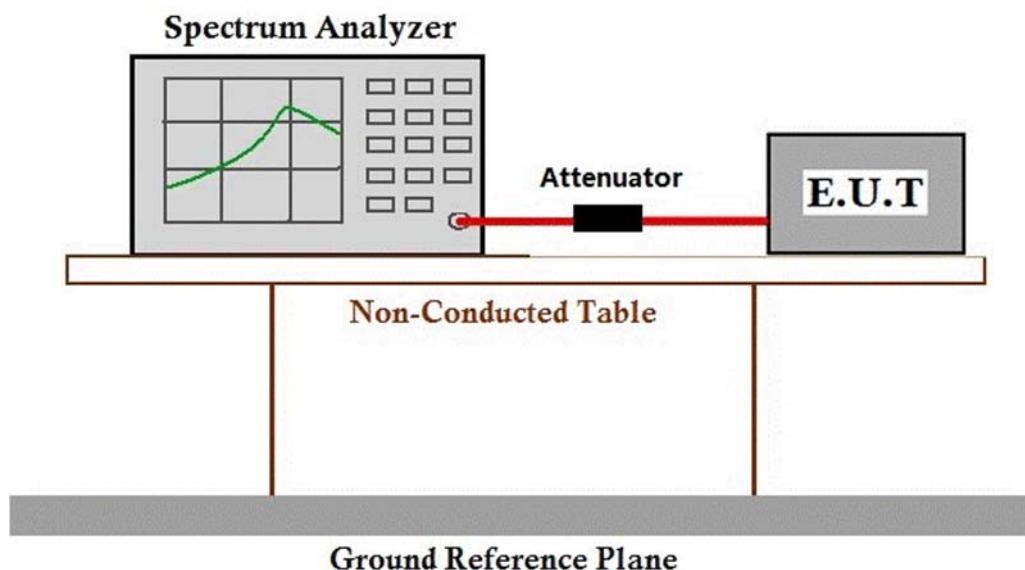

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 26.2 °C Humidity: 41.6 % RH Atmospheric Pressure: 1020 mbar

Test Mode: a: TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.5.2 Test Setup Diagram

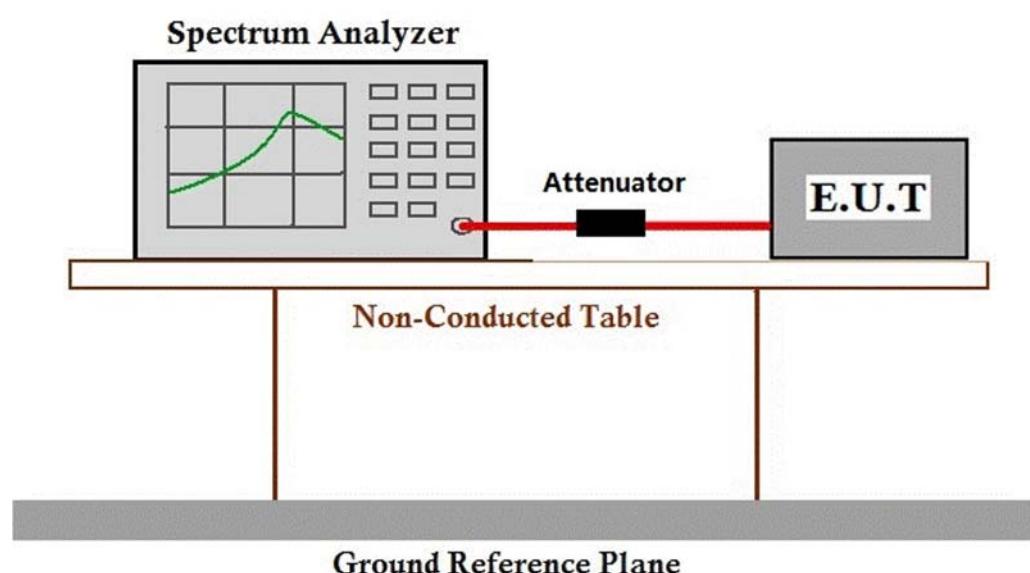

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.11
Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.6.1 E.U.T. Operation

Operating Environment:
Temperature: 26.2 °C Humidity: 41.6 % RH Atmospheric Pressure: 1020 mbar
Test Mode: a: TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.6.2 Test Setup Diagram

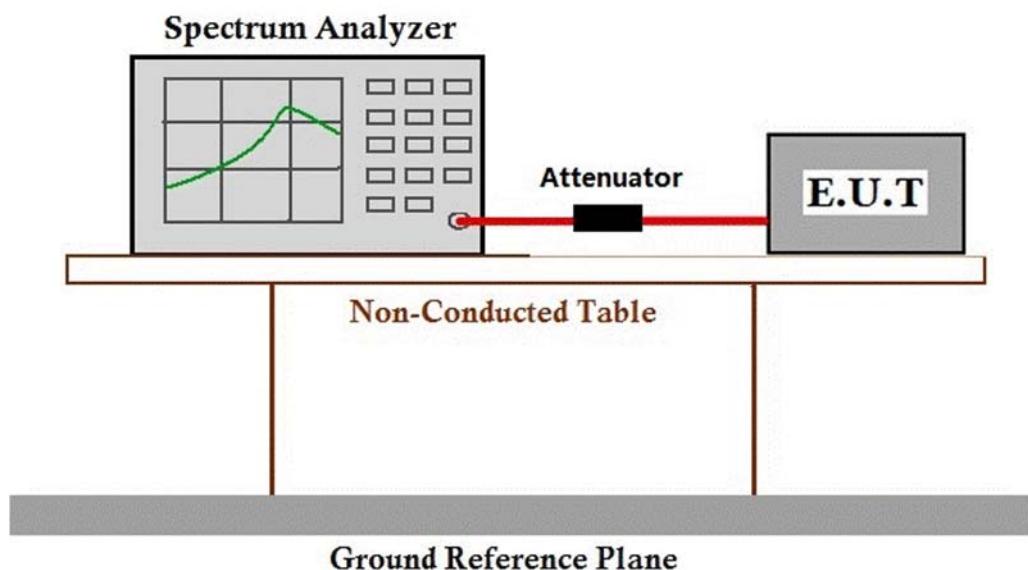

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 11.12

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Test Mode: a: TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.7.2 Test Setup Diagram

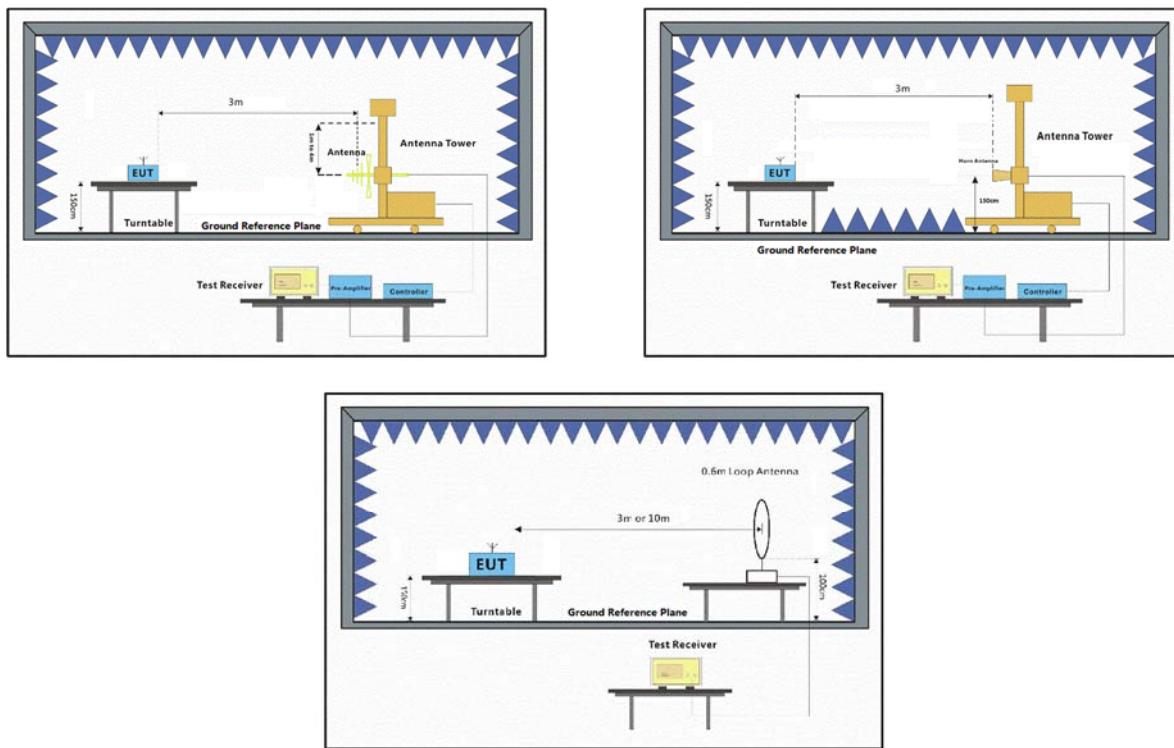

7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preampl Factor

Mode:a; Polarization:Horizontal; Modulation:GFSK; Channel:Low

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit	Pol/Phase	Remark
	Level	Factor	Loss	Factor					
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	29.98	26.25	6.80	39.07	23.96	54.00	-30.04	HORIZONTAL Average
2	2310.000	41.03	26.25	6.80	39.07	35.01	74.00	-38.99	HORIZONTAL Peak
3	2390.000	30.66	26.43	6.87	39.10	24.86	54.00	-29.14	HORIZONTAL Average
4	2390.000	41.39	26.43	6.87	39.10	35.59	74.00	-38.41	HORIZONTAL Peak
5	2483.500	26.72	26.58	7.07	39.14	21.23	54.00	-32.77	HORIZONTAL Average
6	2483.500	40.98	26.58	7.07	39.14	35.49	74.00	-38.51	HORIZONTAL Peak
7	2500.000	28.62	26.60	7.10	39.14	23.18	54.00	-30.82	HORIZONTAL Average
8	2500.000	40.74	26.60	7.10	39.14	35.30	74.00	-38.70	HORIZONTAL Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; Channel:Low

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit	Pol/Phase	Remark
	Level	Factor	Loss	Factor					
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	27.82	26.25	6.80	39.07	21.80	54.00	-32.20	VERTICAL Average
2	2310.000	40.77	26.25	6.80	39.07	34.75	74.00	-39.25	VERTICAL Peak
3	2390.000	30.38	26.43	6.87	39.10	24.58	54.00	-29.42	VERTICAL Average
4	2390.000	43.74	26.43	6.87	39.10	37.94	74.00	-36.06	VERTICAL Peak
5	2483.500	29.68	26.58	7.07	39.14	24.19	54.00	-29.81	VERTICAL Average
6	2483.500	40.99	26.58	7.07	39.14	35.50	74.00	-38.50	VERTICAL Peak
7	2500.000	30.85	26.60	7.10	39.14	25.41	54.00	-28.59	VERTICAL Average
8	2500.000	41.67	26.60	7.10	39.14	36.23	74.00	-37.77	VERTICAL Peak

Mode:a; Polarization:Horizontal; Modulation:GFSK; Channel:High

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor	Level	dBuV/m	dBuV/m			
	MHz	dBuV	dB/m	dB	dB	dB	dB	dB	dB	
1	2310.000	28.64	26.25	6.80	39.07	22.62	54.00	-31.38	HORIZONTAL	Average
2	2310.000	39.86	26.25	6.80	39.07	33.84	74.00	-40.16	HORIZONTAL	Peak
3	2390.000	28.79	26.43	6.87	39.10	22.99	54.00	-31.01	HORIZONTAL	Average
4	2390.000	40.89	26.43	6.87	39.10	35.09	74.00	-38.91	HORIZONTAL	Peak
5	2483.500	26.87	26.58	7.07	39.14	21.38	54.00	-32.62	HORIZONTAL	Average
6	2483.500	40.34	26.58	7.07	39.14	34.85	74.00	-39.15	HORIZONTAL	Peak
7	2500.000	27.72	26.60	7.10	39.14	22.28	54.00	-31.72	HORIZONTAL	Average
8	2500.000	40.74	26.60	7.10	39.14	35.30	74.00	-38.70	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; Channel:High

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor	Level	dBuV/m	dBuV/m			
	MHz	dBuV	dB/m	dB	dB	dB	dB	dB	dB	
1	2310.000	27.19	26.25	6.80	39.07	21.17	54.00	-32.83	VERTICAL	Average
2	2310.000	40.37	26.25	6.80	39.07	34.35	74.00	-39.65	VERTICAL	Peak
3	2390.000	28.14	26.43	6.87	39.10	22.34	54.00	-31.66	VERTICAL	Average
4	2390.000	40.86	26.43	6.87	39.10	35.06	74.00	-38.94	VERTICAL	Peak
5	2483.500	34.03	26.58	7.07	39.14	28.54	54.00	-25.46	VERTICAL	Average
6	2483.500	48.65	26.58	7.07	39.14	43.16	74.00	-30.84	VERTICAL	Peak
7	2500.000	27.90	26.60	7.10	39.14	22.46	54.00	-31.54	VERTICAL	Average
8	2500.000	41.36	26.60	7.10	39.14	35.92	74.00	-38.08	VERTICAL	Peak

7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 11.12

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 23 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Test Mode: a: TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

Final Test Mode: TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation
For below 1GHz part, through pre-scan, the worst case is the lowest channel Transmitting mode.

Only the worst case is recorded in the report.

7.8.2 Test Setup Diagram

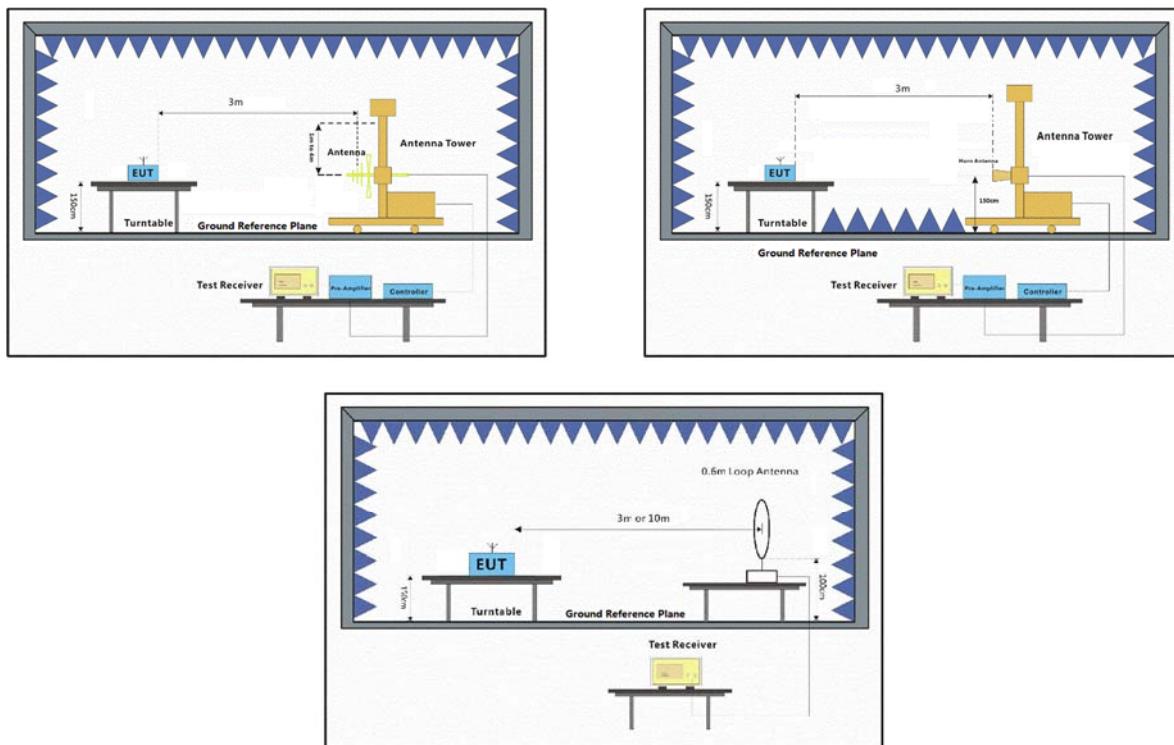

7.8.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

For 9KHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with Loop antenna and the amplitude of spurious emissions from the radiator are attenuated more than 20dB below the limit, so the test data were not recorded in the test report.

For above 30MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Mode:a; Polarization:Horizontal; Modulation:GFSK; Channel:Low

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit Pol/Phase	Remark
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	56.395	45.33	14.21	0.80	27.00	33.34	40.00	-6.66 HORIZONTAL QP
2	70.584	46.03	12.60	0.90	27.00	32.53	40.00	-7.47 HORIZONTAL QP
3	97.115	42.02	8.84	1.10	26.91	25.05	43.50	-18.45 HORIZONTAL QP
4	117.773	42.44	10.89	1.19	26.90	27.62	43.50	-15.88 HORIZONTAL QP
5	169.005	37.21	13.25	1.38	26.72	25.12	43.50	-18.38 HORIZONTAL QP
6	362.985	35.27	15.71	1.97	26.80	26.15	46.00	-19.85 HORIZONTAL QP

Mode:a; Polarization:Horizontal; Modulation:GFSK; Channel:Low

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit Pol/Phase	Remark
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	3958.309	29.61	29.42	8.95	40.06	27.92	54.00	-26.08 HORIZONTAL Average
2	3958.309	40.75	29.42	8.95	40.06	39.06	74.00	-34.94 HORIZONTAL Peak
3	4804.110	32.64	30.79	9.95	40.21	33.17	54.00	-20.83 HORIZONTAL Average
4	4804.110	43.05	30.79	9.95	40.21	43.58	74.00	-30.42 HORIZONTAL Peak
5	6322.136	30.42	33.68	11.52	39.67	35.95	54.00	-18.05 HORIZONTAL Average
6	6322.136	40.84	33.68	11.52	39.67	46.37	74.00	-27.63 HORIZONTAL Peak
7	7206.292	27.52	35.45	12.73	39.25	36.45	54.00	-17.55 HORIZONTAL Average
8	7206.292	36.67	35.45	12.73	39.25	45.60	74.00	-28.40 HORIZONTAL Peak
9	9608.741	23.16	37.51	14.48	37.97	37.18	54.00	-16.82 HORIZONTAL Average
10	9608.741	32.97	37.51	14.48	37.97	46.99	74.00	-27.01 HORIZONTAL Peak
11	12010.250	19.61	39.50	15.80	38.08	36.83	54.00	-17.17 HORIZONTAL Average
12	12010.250	32.17	39.50	15.80	38.08	49.39	74.00	-24.61 HORIZONTAL Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; Channel:Low

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit Pol/Phase	Remark
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	31.731	42.42	14.05	0.60	27.00	30.07	40.00	-9.93 VERTICAL QP
2	51.481	43.20	14.46	0.74	27.00	31.40	40.00	-8.60 VERTICAL QP
3	55.609	44.88	14.25	0.80	27.00	32.93	40.00	-7.07 VERTICAL QP
4	70.584	42.11	12.60	0.90	27.00	28.61	40.00	-11.39 VERTICAL QP
5	130.379	42.45	12.16	1.23	26.88	28.96	43.50	-14.54 VERTICAL QP
6	270.375	38.24	13.21	1.70	26.40	26.75	46.00	-19.25 VERTICAL QP

Mode:a; Polarization:Vertical; Modulation:GFSK; Channel:Low

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit Pol/Phase	Remark
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	4804.110	43.52	30.79	9.95	40.21	44.05	54.00	-9.95 VERTICAL Average
2	4804.110	52.94	30.79	9.95	40.21	53.47	74.00	-20.53 VERTICAL Peak
3	5864.443	32.52	32.22	10.97	39.95	35.76	54.00	-18.24 VERTICAL Average
4	5864.443	41.30	32.22	10.97	39.95	44.54	74.00	-29.46 VERTICAL Peak
5	7206.019	26.06	35.45	12.73	39.25	34.99	54.00	-19.01 VERTICAL Average
6	7206.019	37.11	35.45	12.73	39.25	46.04	74.00	-27.96 VERTICAL Peak
7	8319.836	25.63	36.22	13.71	38.95	36.61	54.00	-17.39 VERTICAL Average
8	8319.836	35.19	36.22	13.71	38.95	46.17	74.00	-27.83 VERTICAL Peak
9	9608.005	21.91	37.51	14.48	37.97	35.93	54.00	-18.07 VERTICAL Average
10	9608.005	31.03	37.51	14.48	37.97	45.05	74.00	-28.95 VERTICAL Peak
11	12010.100	20.52	39.50	15.80	38.08	37.74	54.00	-16.26 VERTICAL Average
12	12010.100	31.81	39.50	15.80	38.08	49.03	74.00	-24.97 VERTICAL Peak

Mode:a; Polarization:Horizontal; Modulation:GFSK; Channel:middle

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit Pol/Phase	Remark
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	4884.151	31.63	30.95	10.02	40.22	32.38	54.00	-21.62 HORIZONTAL Average
2	4884.151	44.52	30.95	10.02	40.22	45.27	74.00	-28.73 HORIZONTAL Peak
3	6679.040	28.15	34.57	11.97	39.43	35.26	54.00	-18.74 HORIZONTAL Average
4	6679.040	41.94	34.57	11.97	39.43	49.05	74.00	-24.95 HORIZONTAL Peak
5	7326.763	24.96	35.74	12.93	39.22	34.41	54.00	-19.59 HORIZONTAL Average
6	7326.763	37.66	35.74	12.93	39.22	47.11	74.00	-26.89 HORIZONTAL Peak
7	9768.925	17.68	37.74	14.44	37.90	31.96	54.00	-22.04 HORIZONTAL Average
8	9768.925	32.91	37.74	14.44	37.90	47.19	74.00	-26.81 HORIZONTAL Peak
9	11076.100	17.51	39.91	15.08	37.97	34.53	54.00	-19.47 HORIZONTAL Average
10	11076.100	31.70	39.91	15.08	37.97	48.72	74.00	-25.28 HORIZONTAL Peak
11	12210.970	18.32	39.21	16.05	38.10	35.48	54.00	-18.52 HORIZONTAL Average
12	12210.970	32.83	39.21	16.05	38.10	49.99	74.00	-24.01 HORIZONTAL Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; Channel:middle

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit Pol/Phase	Remark
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	4884.043	42.62	30.95	10.02	40.22	43.37	54.00	-10.63 VERTICAL Average
2	4884.043	51.18	30.95	10.02	40.22	51.93	74.00	-22.07 VERTICAL Peak
3	6698.373	29.62	34.61	12.01	39.41	36.83	54.00	-17.17 VERTICAL Average
4	6698.373	41.22	34.61	12.01	39.41	48.43	74.00	-25.57 VERTICAL Peak
5	7326.040	27.63	35.74	12.93	39.22	37.08	54.00	-16.92 VERTICAL Average
6	7326.040	39.17	35.74	12.93	39.22	48.62	74.00	-25.38 VERTICAL Peak
7	9768.540	23.16	37.74	14.44	37.90	37.44	54.00	-16.56 VERTICAL Average
8	9768.540	33.04	37.74	14.44	37.90	47.32	74.00	-26.68 VERTICAL Peak
9	11076.100	21.05	39.91	15.08	37.97	38.07	54.00	-15.93 VERTICAL Average
10	11076.100	31.80	39.91	15.08	37.97	48.82	74.00	-25.18 VERTICAL Peak
11	12210.010	21.52	39.21	16.05	38.10	38.68	54.00	-15.32 VERTICAL Average
12	12210.010	32.93	39.21	16.05	38.10	50.09	74.00	-23.91 VERTICAL Peak

Mode:a; Polarization:Horizontal; Modulation:GFSK; Channel:High

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit Pol/Phase	Remark
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	4960.993	34.54	31.05	10.07	40.23	35.43	54.00	-18.57 HORIZONTAL Average
2	4960.993	43.30	31.05	10.07	40.23	44.19	74.00	-29.81 HORIZONTAL Peak
3	6507.536	28.01	34.30	11.70	39.53	34.48	54.00	-19.52 HORIZONTAL Average
4	6507.536	39.63	34.30	11.70	39.53	46.10	74.00	-27.90 HORIZONTAL Peak
5	7440.542	27.10	35.92	13.04	39.20	36.86	54.00	-17.14 HORIZONTAL Average
6	7440.542	37.49	35.92	13.04	39.20	47.25	74.00	-26.75 HORIZONTAL Peak
7	9920.432	21.02	37.92	14.41	37.84	35.51	54.00	-18.49 HORIZONTAL Average
8	9920.432	33.31	37.92	14.41	37.84	47.80	74.00	-26.20 HORIZONTAL Peak
9	11172.560	20.56	39.75	15.22	37.99	37.54	54.00	-16.46 HORIZONTAL Average
10	11172.560	31.49	39.75	15.22	37.99	48.47	74.00	-25.53 HORIZONTAL Peak
11	12400.010	20.71	38.93	16.29	38.12	37.81	54.00	-16.19 HORIZONTAL Average
12	12400.010	32.66	38.93	16.29	38.12	49.76	74.00	-24.24 HORIZONTAL Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; Channel:High


Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit Pol/Phase	Remark
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	4960.993	40.10	31.05	10.07	40.23	40.99	54.00	-13.01 VERTICAL Average
2	4960.993	49.91	31.05	10.07	40.23	50.80	74.00	-23.20 VERTICAL Peak
3	6640.542	29.94	34.49	11.89	39.45	36.87	54.00	-17.13 VERTICAL Average
4	6640.542	41.09	34.49	11.89	39.45	48.02	74.00	-25.98 VERTICAL Peak
5	7440.879	26.42	35.92	13.04	39.20	36.18	54.00	-17.82 VERTICAL Average
6	7440.879	38.05	35.92	13.04	39.20	47.81	74.00	-26.19 VERTICAL Peak
7	9920.580	24.07	37.92	14.41	37.84	38.56	54.00	-15.44 VERTICAL Average
8	9920.580	35.31	37.92	14.41	37.84	49.80	74.00	-24.20 VERTICAL Peak
9	11012.250	22.09	40.00	15.00	37.96	39.13	54.00	-14.87 VERTICAL Average
10	11012.250	33.17	40.00	15.00	37.96	50.21	74.00	-23.79 VERTICAL Peak
11	12400.450	20.98	38.93	16.29	38.12	38.08	54.00	-15.92 VERTICAL Average
12	12400.450	32.87	38.93	16.29	38.12	49.97	74.00	-24.03 VERTICAL Peak


8 Appendix

8.1 Appendix 15.247

1.6dB Bandwidth


Test Mode	Test Channel	Ant	6 dB bandwidth[MHz]	Limit[MHz]	Verdict
BLE	2402	Ant1	0.6655	0.5	PASS
BLE	2442	Ant1	0.6727	0.5	PASS
BLE	2480	Ant1	0.6866	0.5	PASS

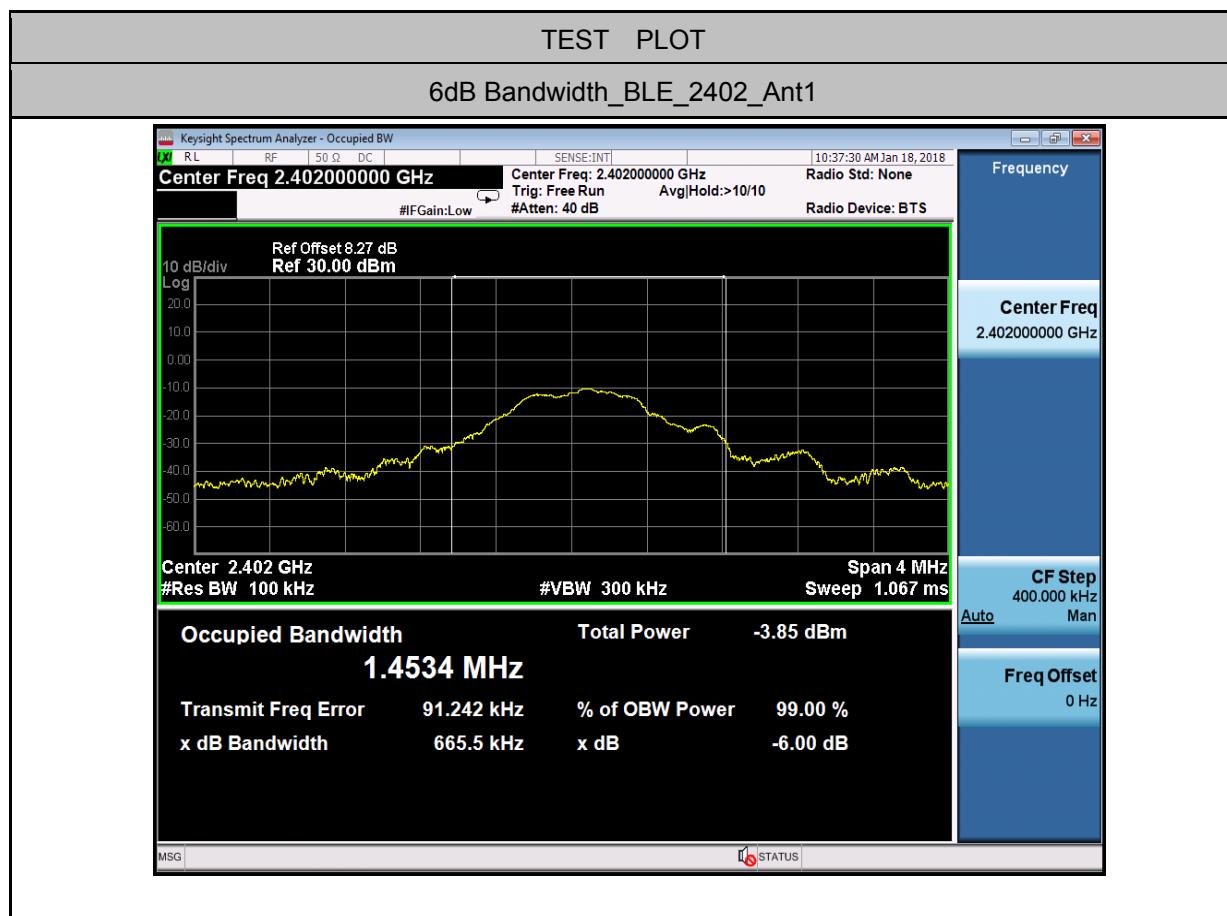


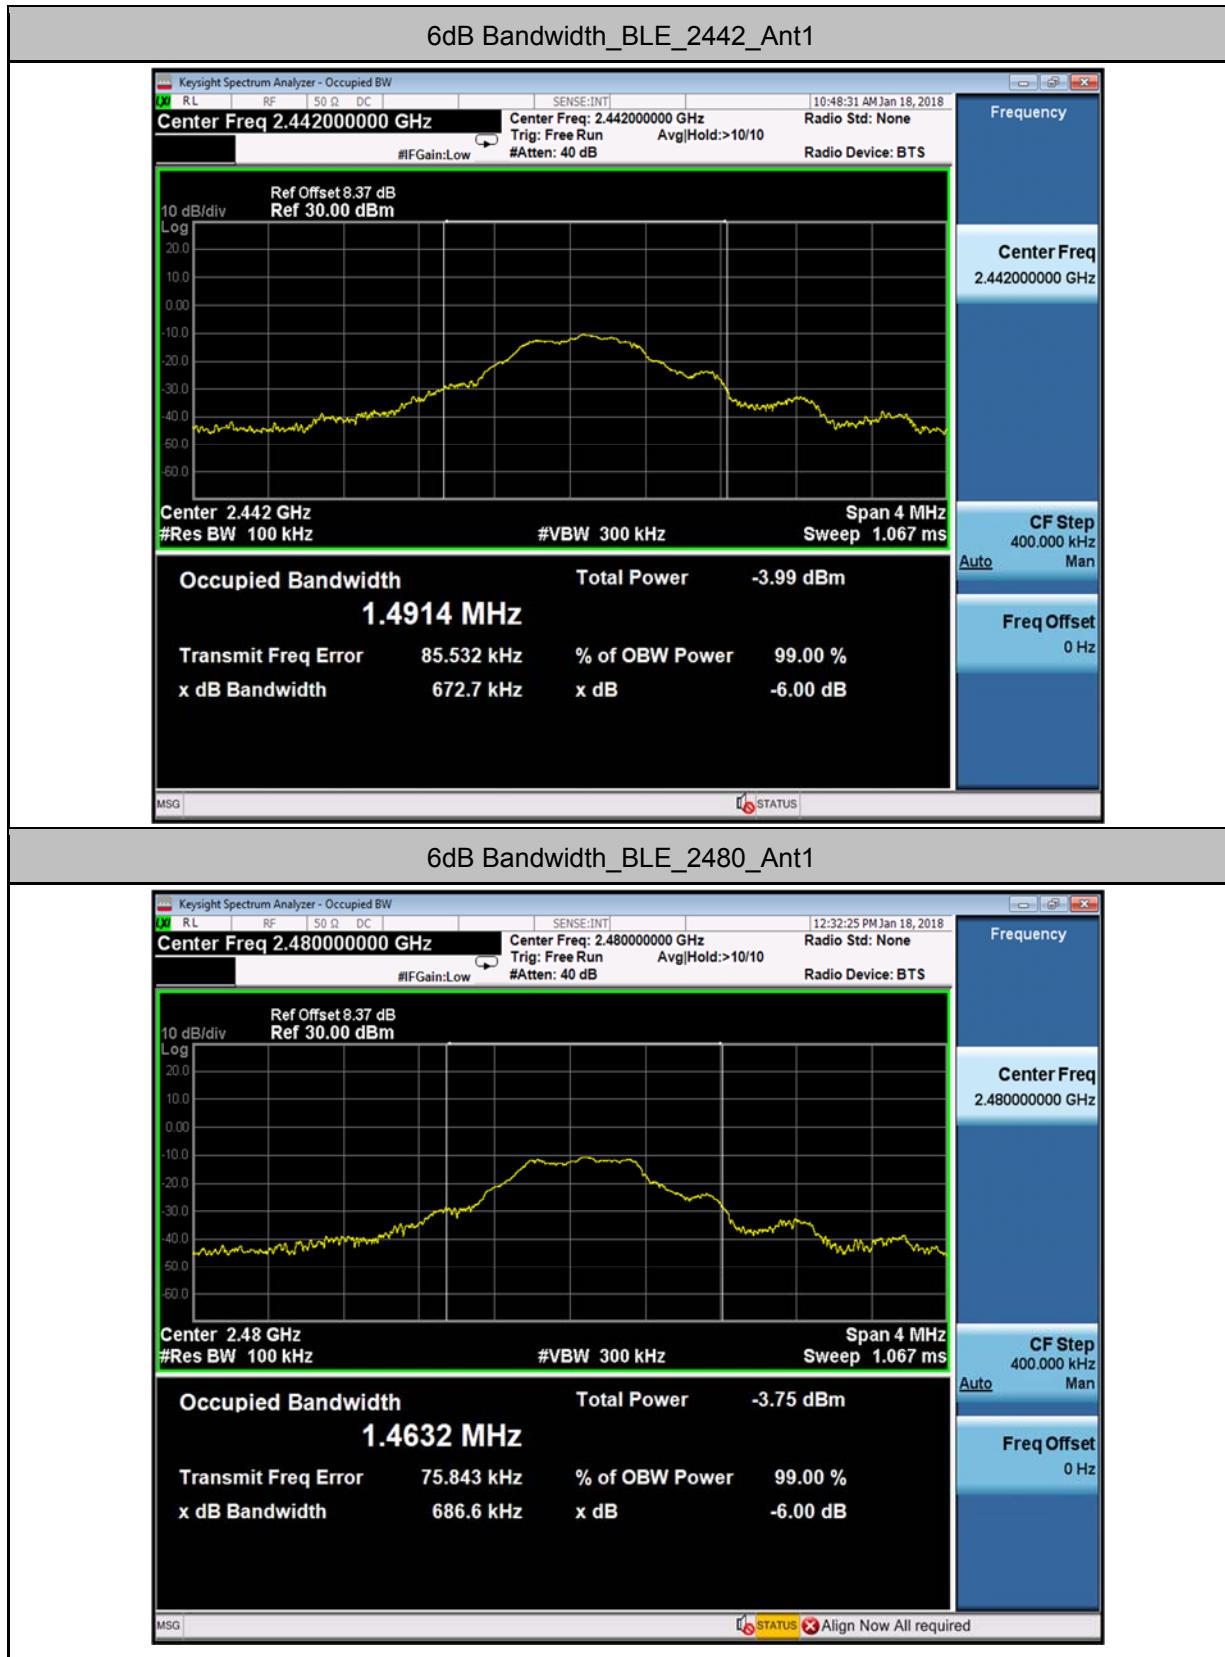

2. Maximum peak conducted output power


Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	Ant1	-9.221	30	PASS
BLE	2442	Ant1	-9.401	30	PASS
BLE	2480	Ant1	-9.491	30	PASS

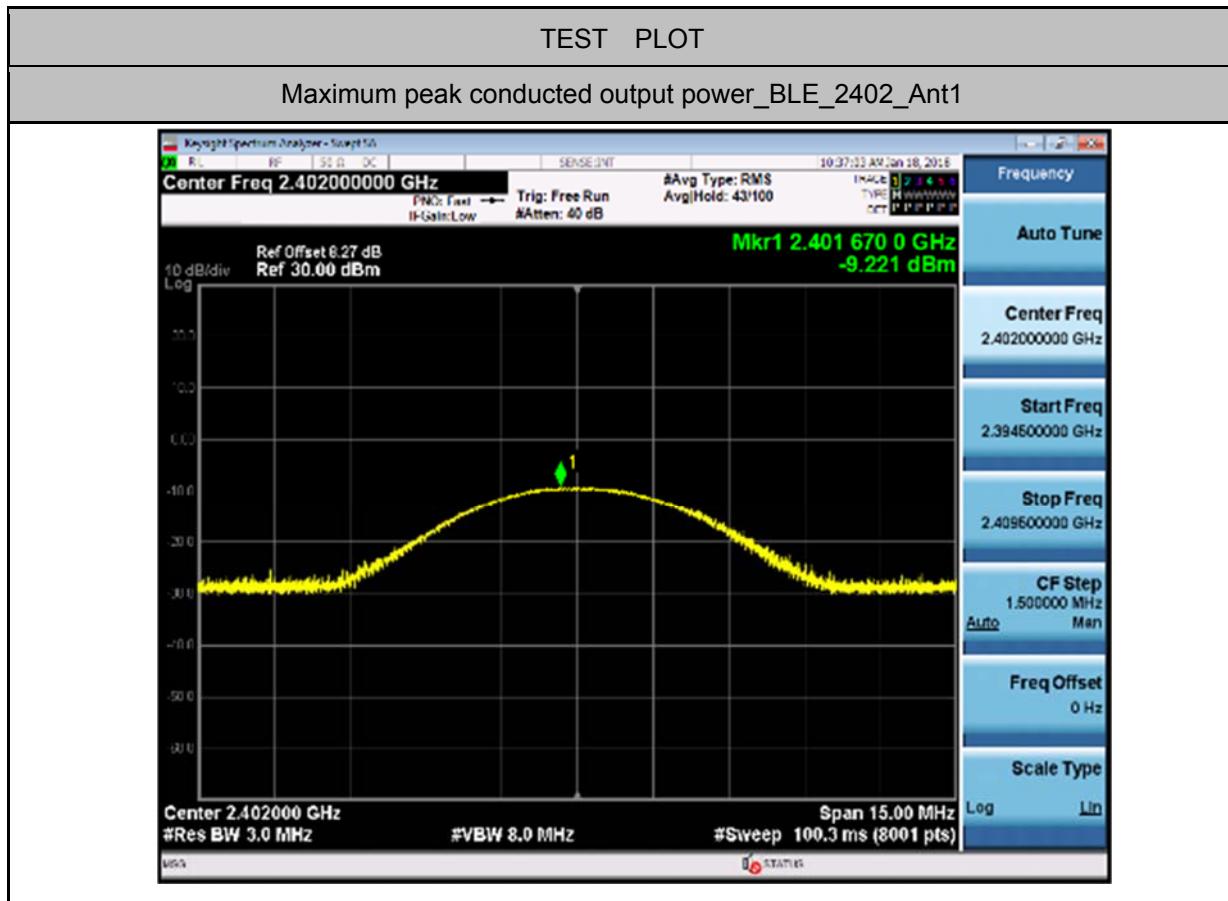


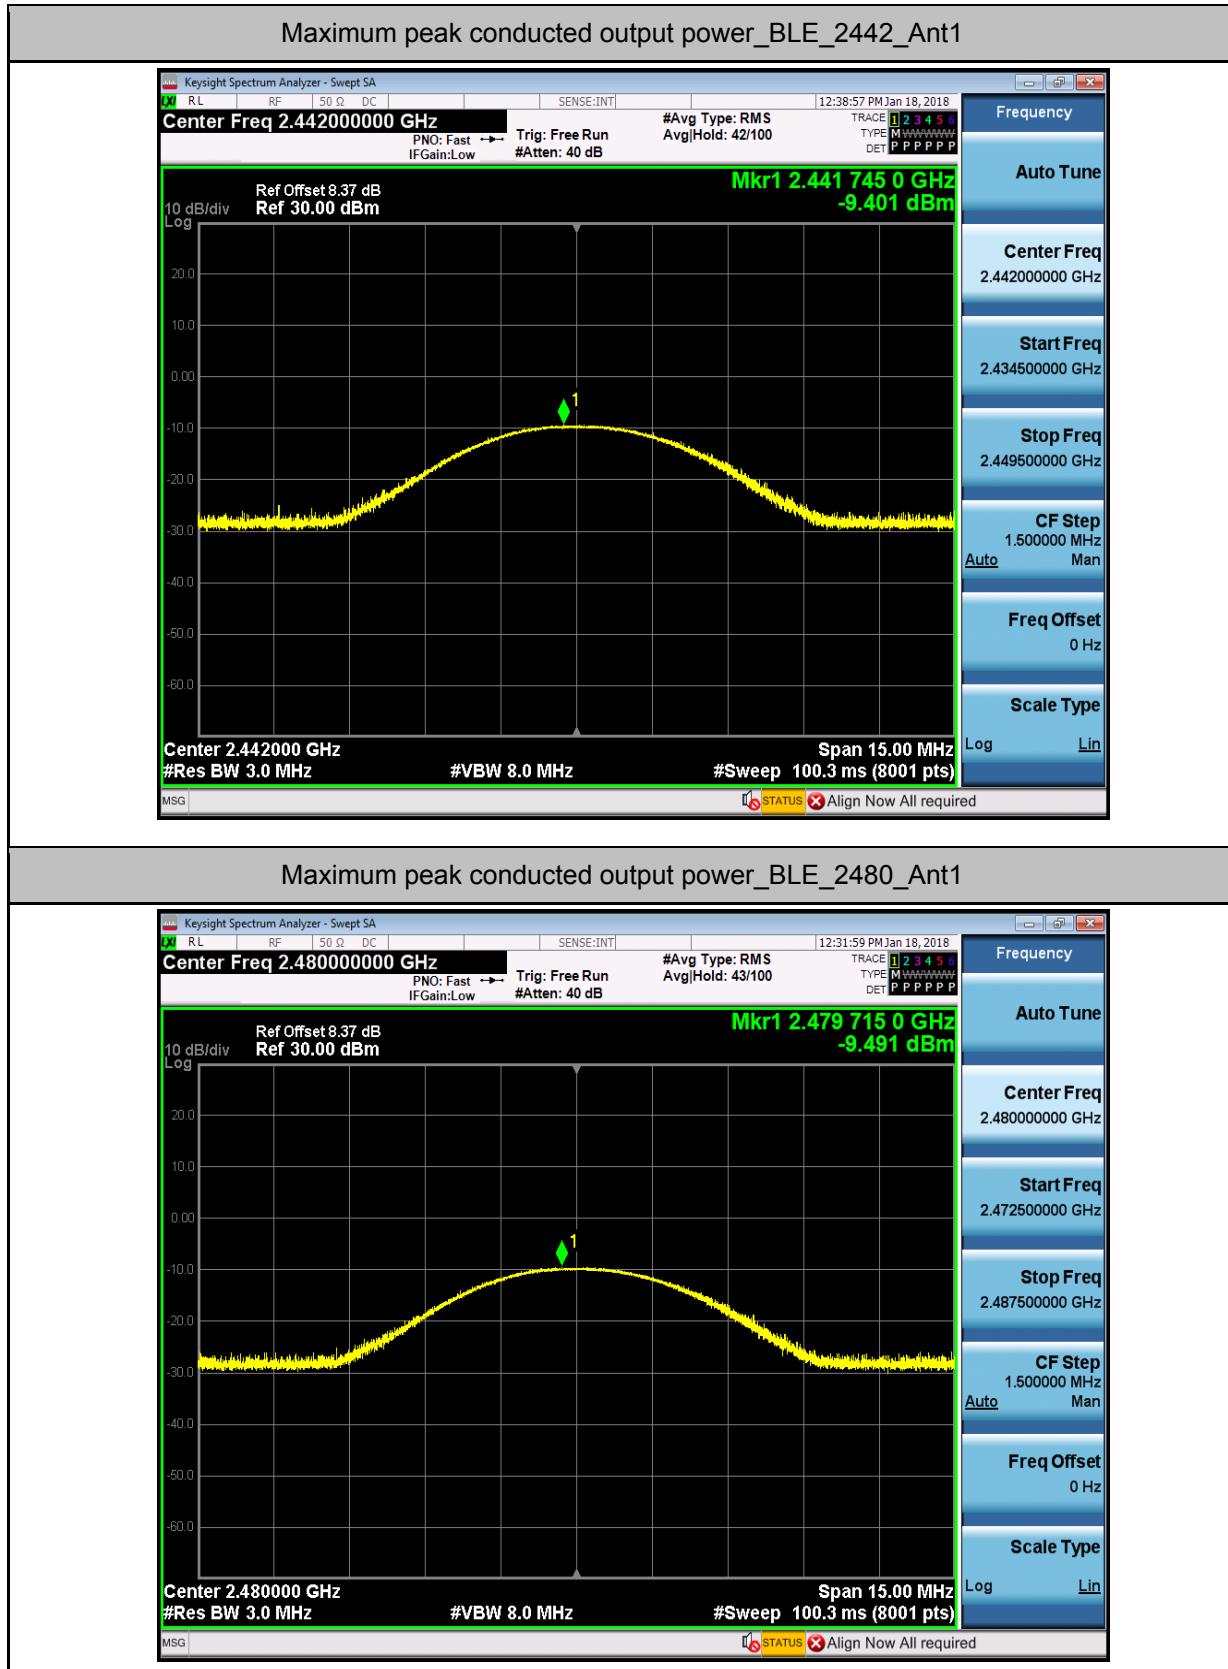

3. Maximum Peak power spectral density


Test Mode	Test Channel	Ant	Result	Limit[dBm/3kHz]	Verdict
BLE	2402	Ant1	-10.072	8.00	PASS
BLE	2442	Ant1	-10.31	8.00	PASS
BLE	2480	Ant1	-10.481	8.00	PASS

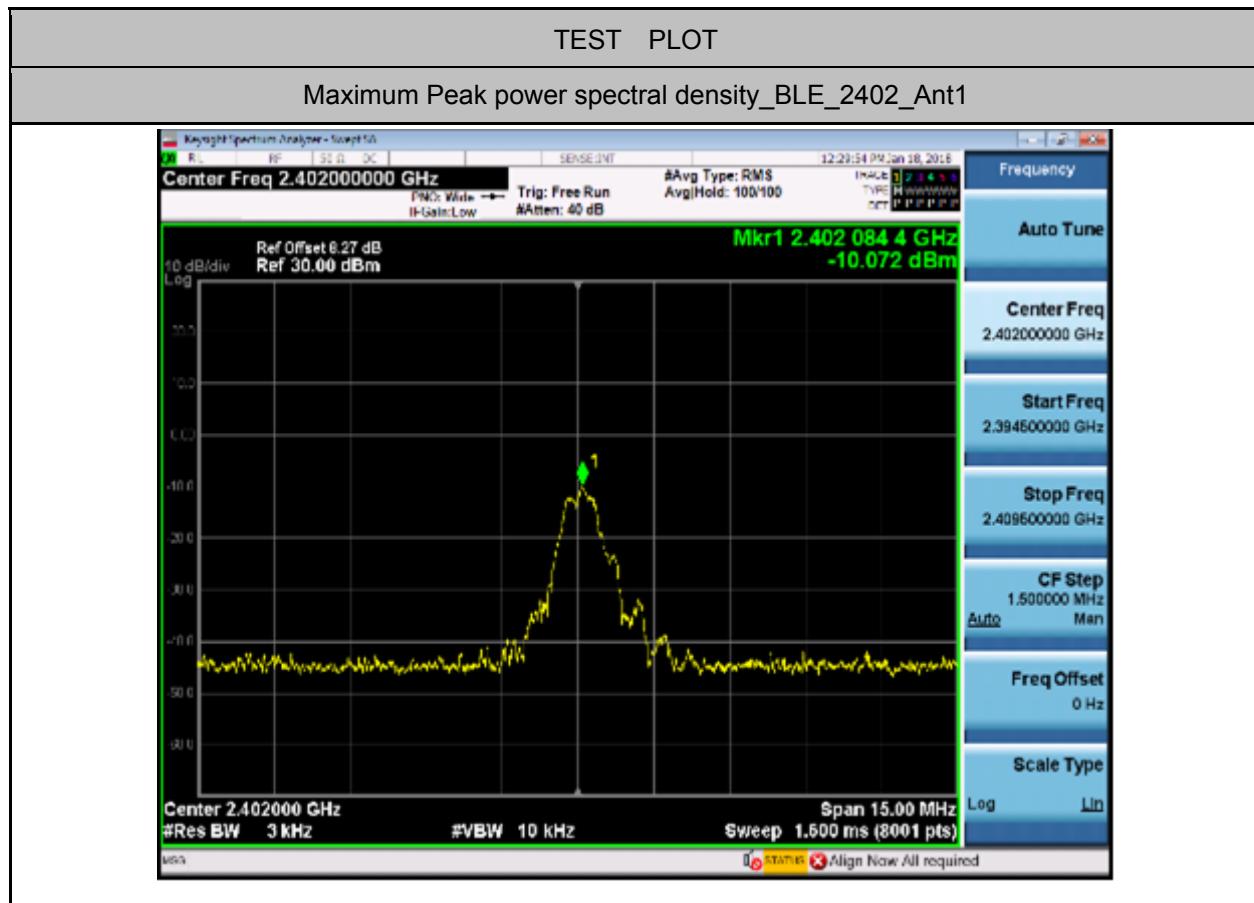


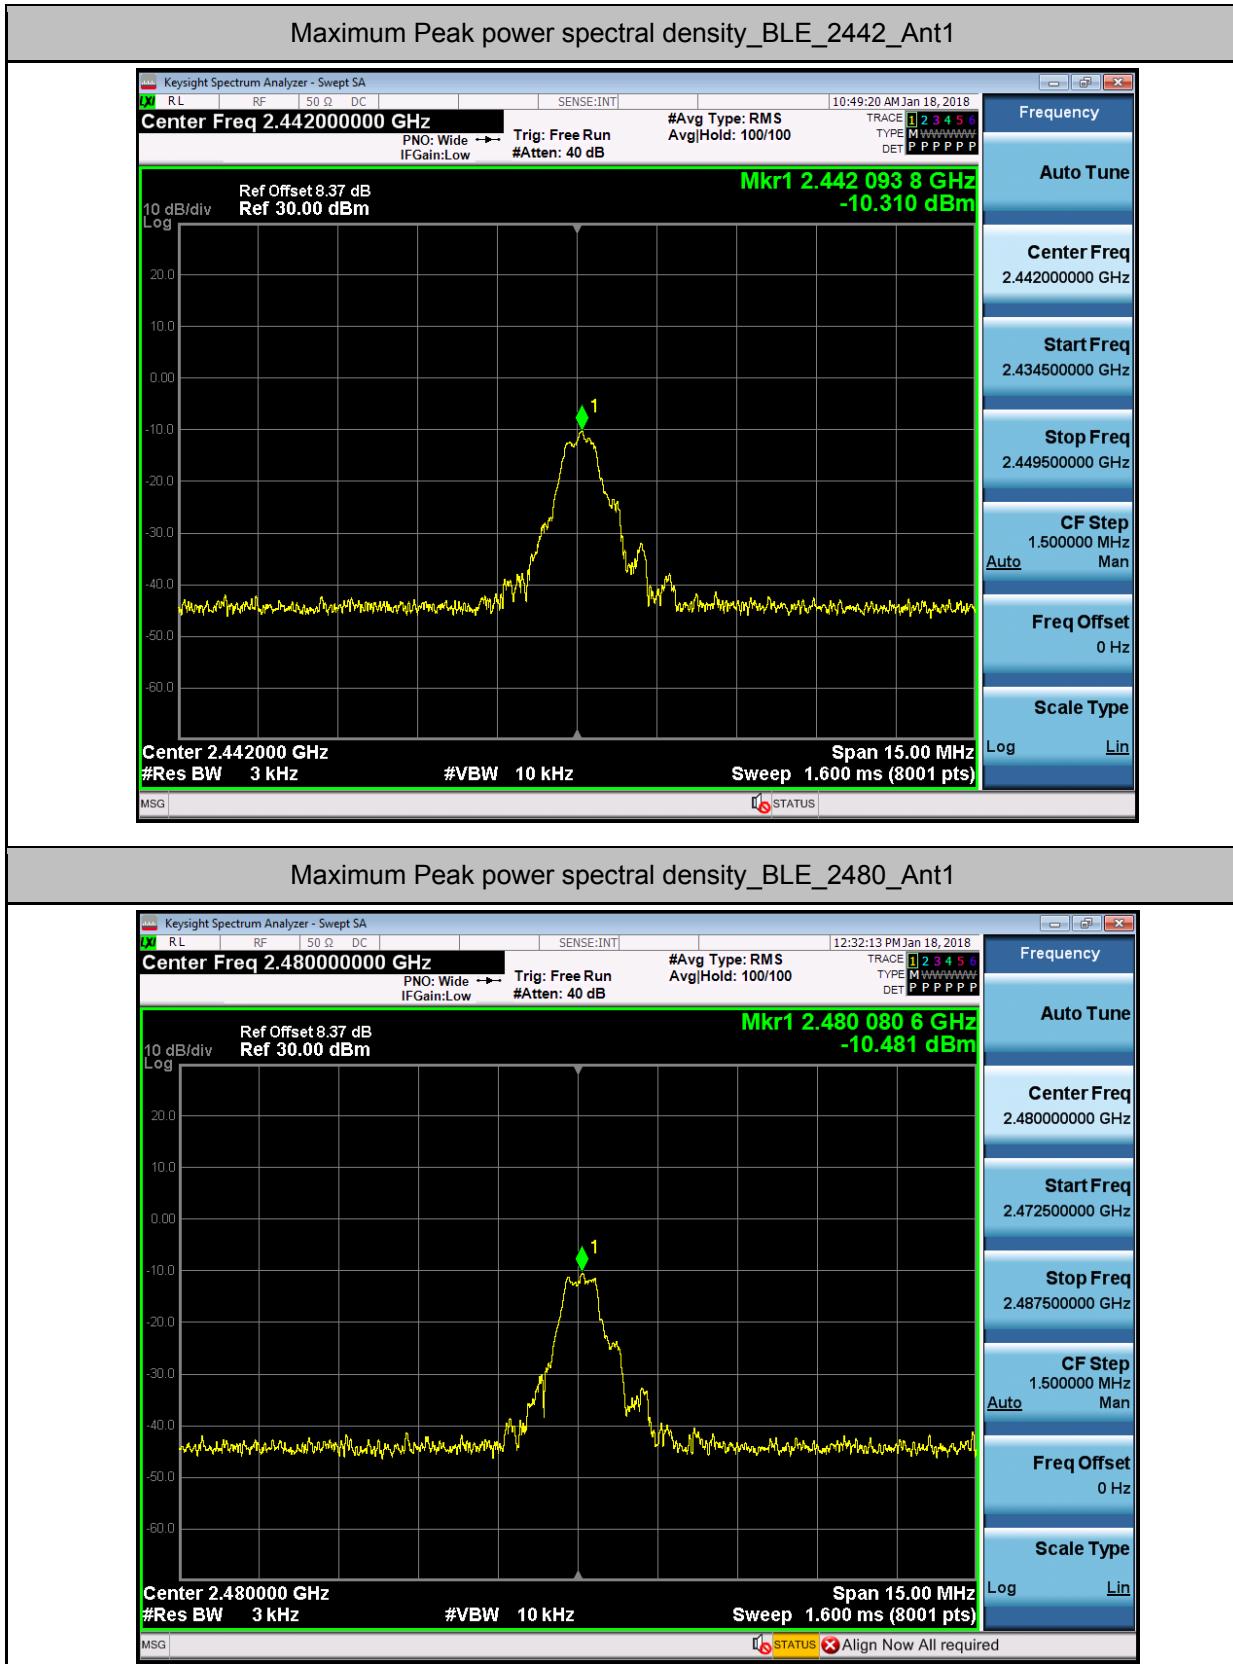

4. Band-edge for RF Conducted Emissions


Test Mode	Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	-10.228	-42.324	-30.23	PASS
BLE	2480	Ant1	-10.569	-41.042	-30.57	PASS

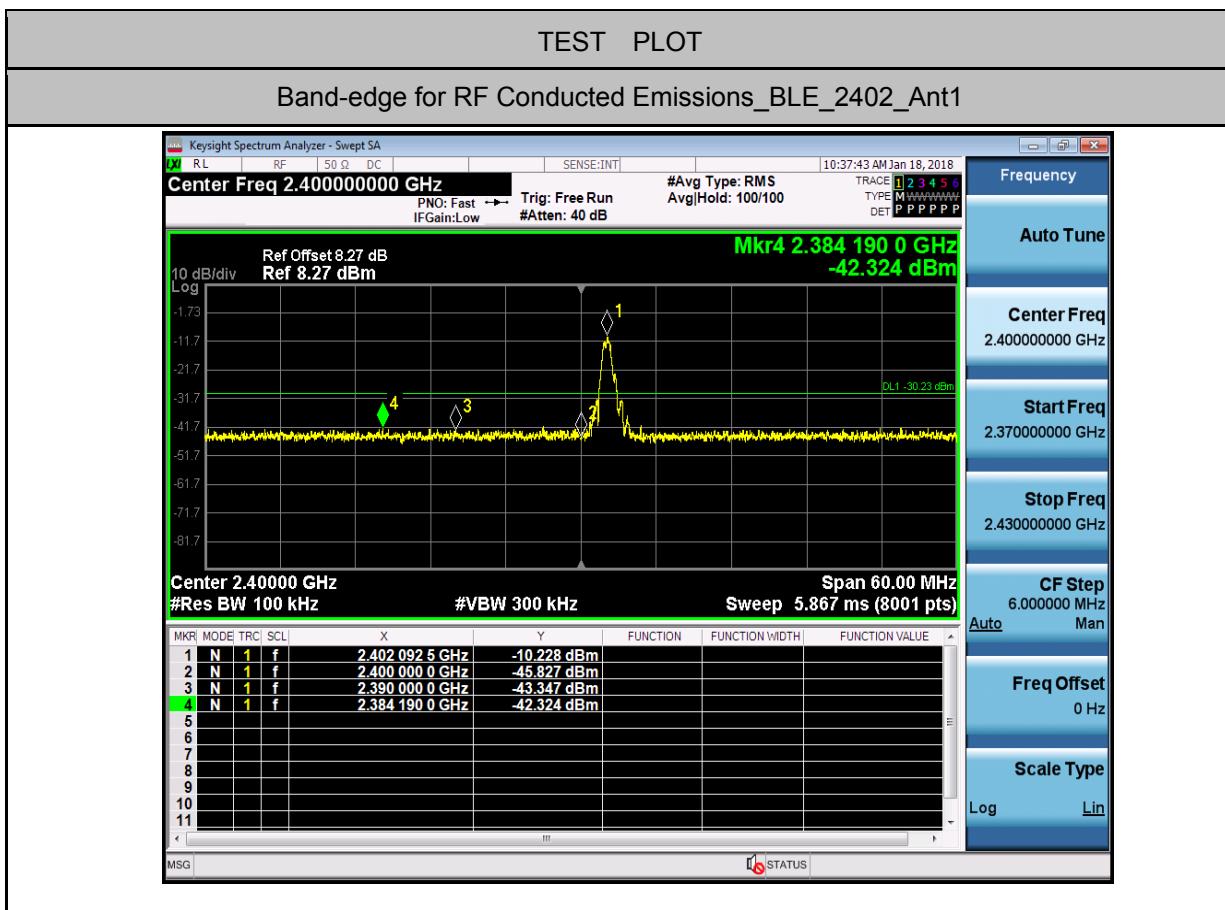


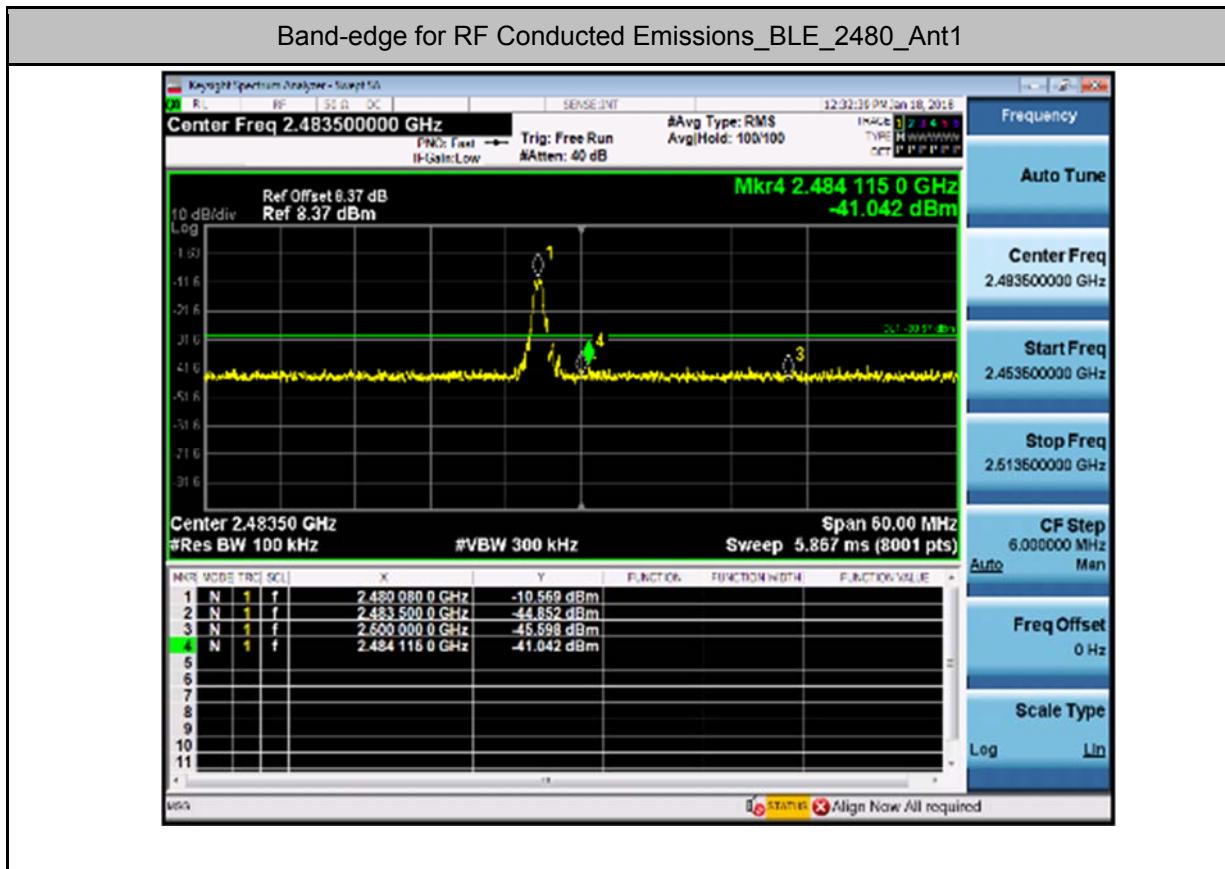



5.RF Conducted Spurious Emissions


Test Mode	Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	30	10000	100	300	-10.192	-46.232	<-30.19	PASS
BLE	2402	Ant1	10000	26000	100	300	-10.192	-44.671	<-30.19	PASS
BLE	2442	Ant1	30	10000	100	300	-10.409	-37.152	<-30.41	PASS
BLE	2442	Ant1	10000	26000	100	300	-10.409	-44.688	<-30.41	PASS
BLE	2480	Ant1	30	10000	100	300	-10.696	-34.054	<-30.70	PASS
BLE	2480	Ant1	10000	26000	100	300	-10.696	-43.840	<-30.70	PASS

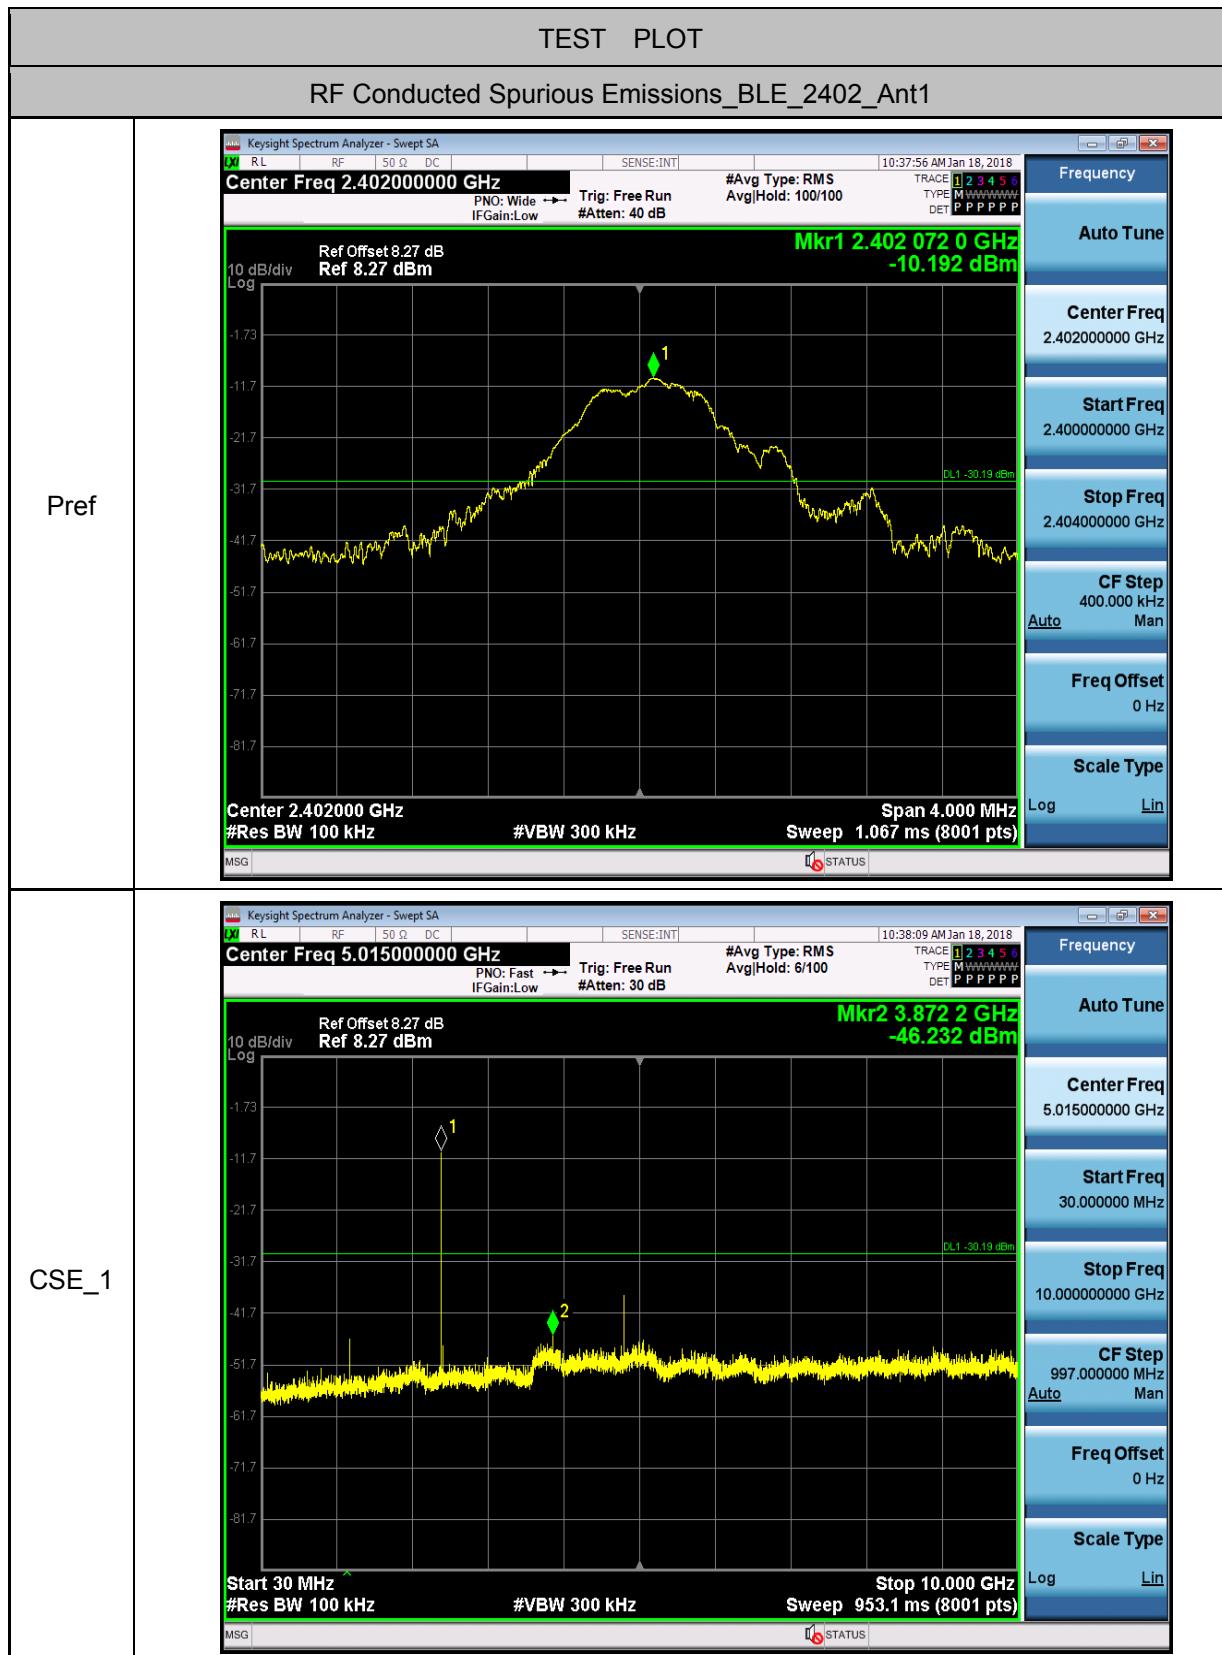

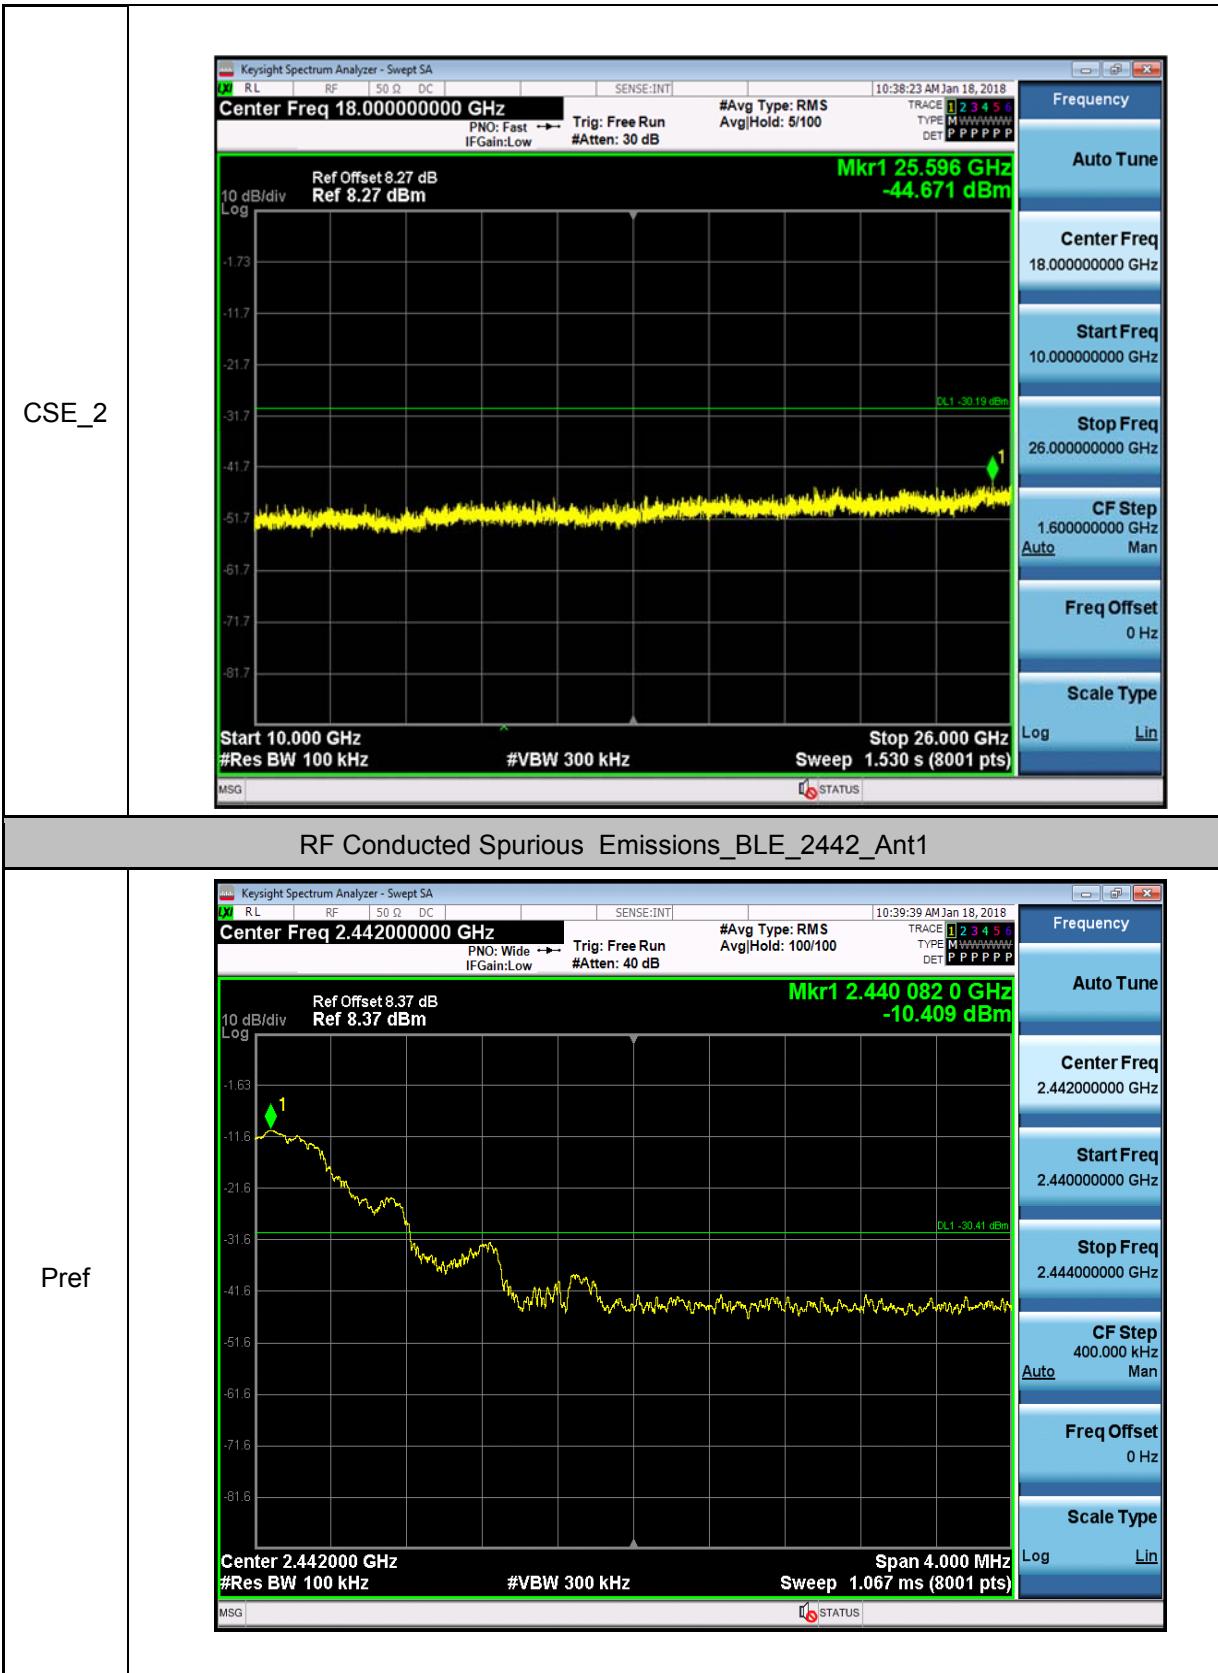

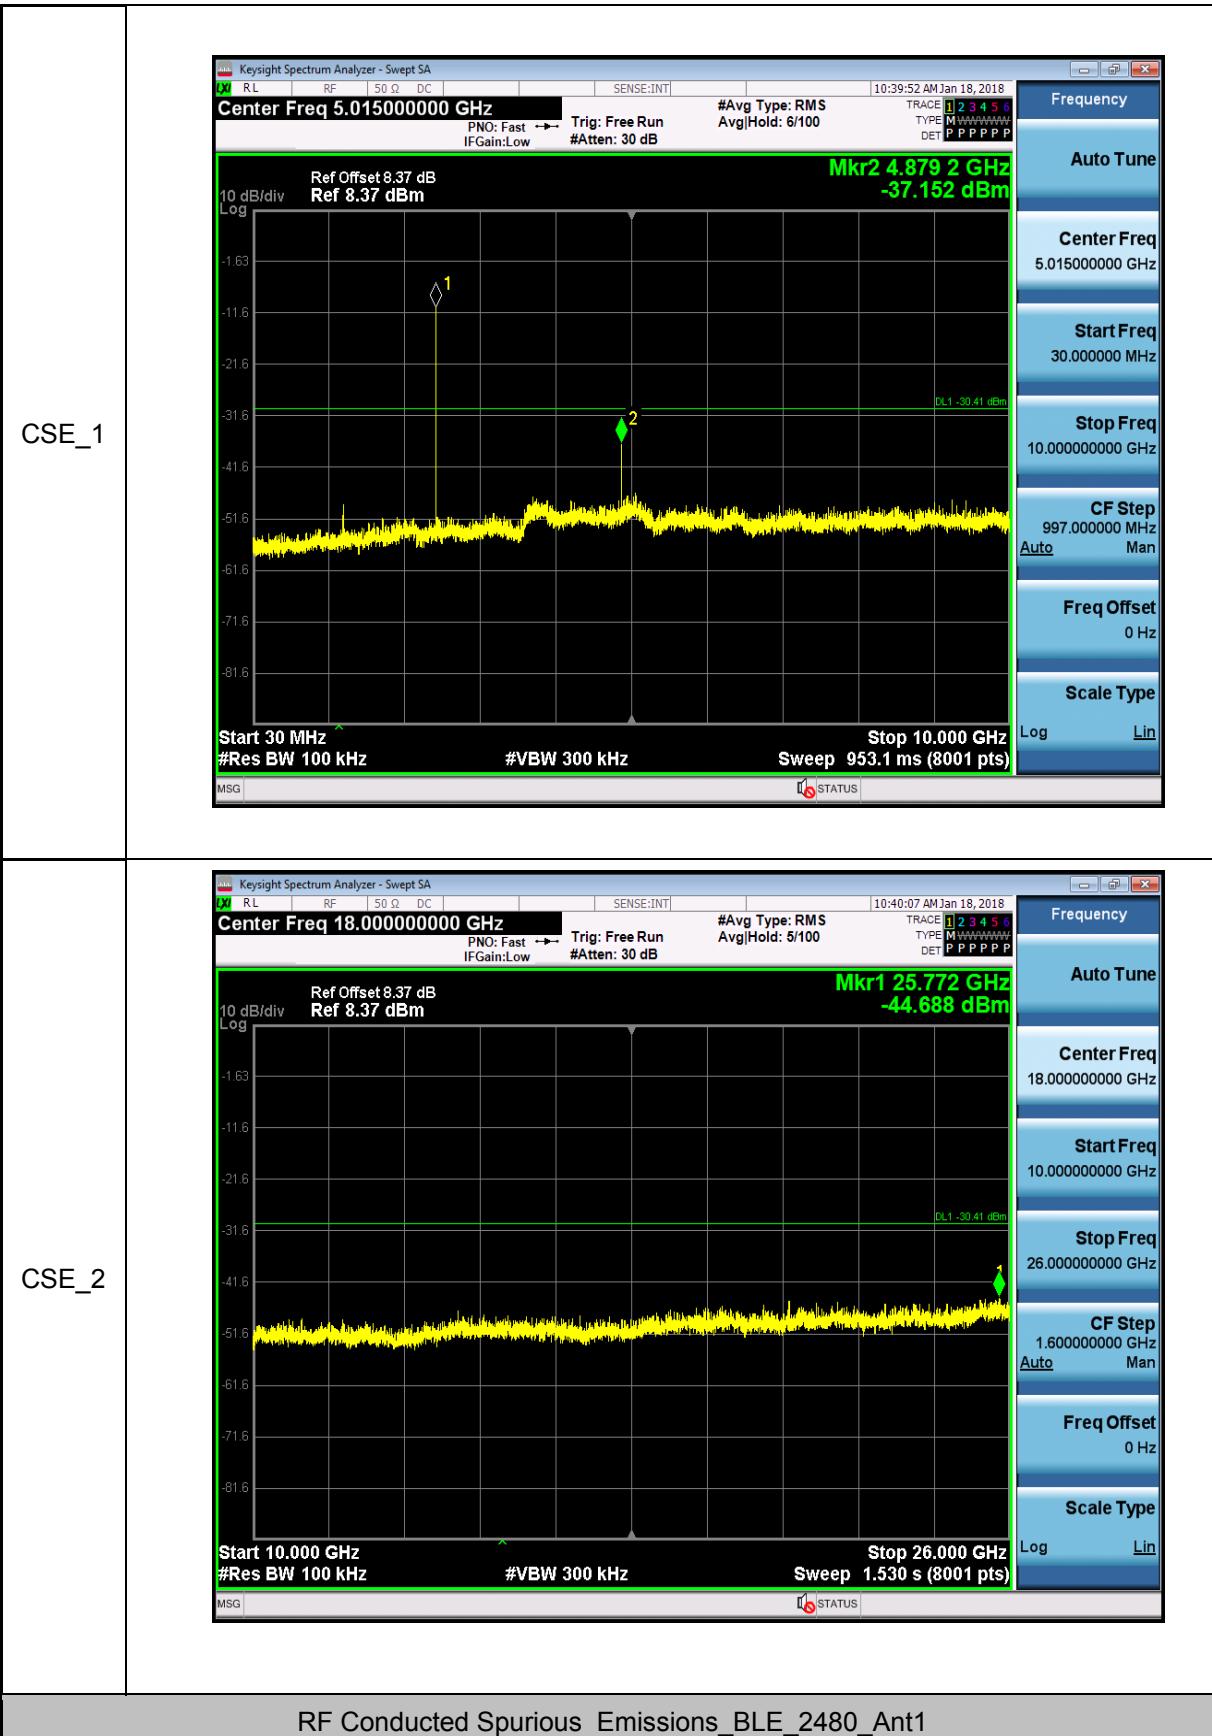

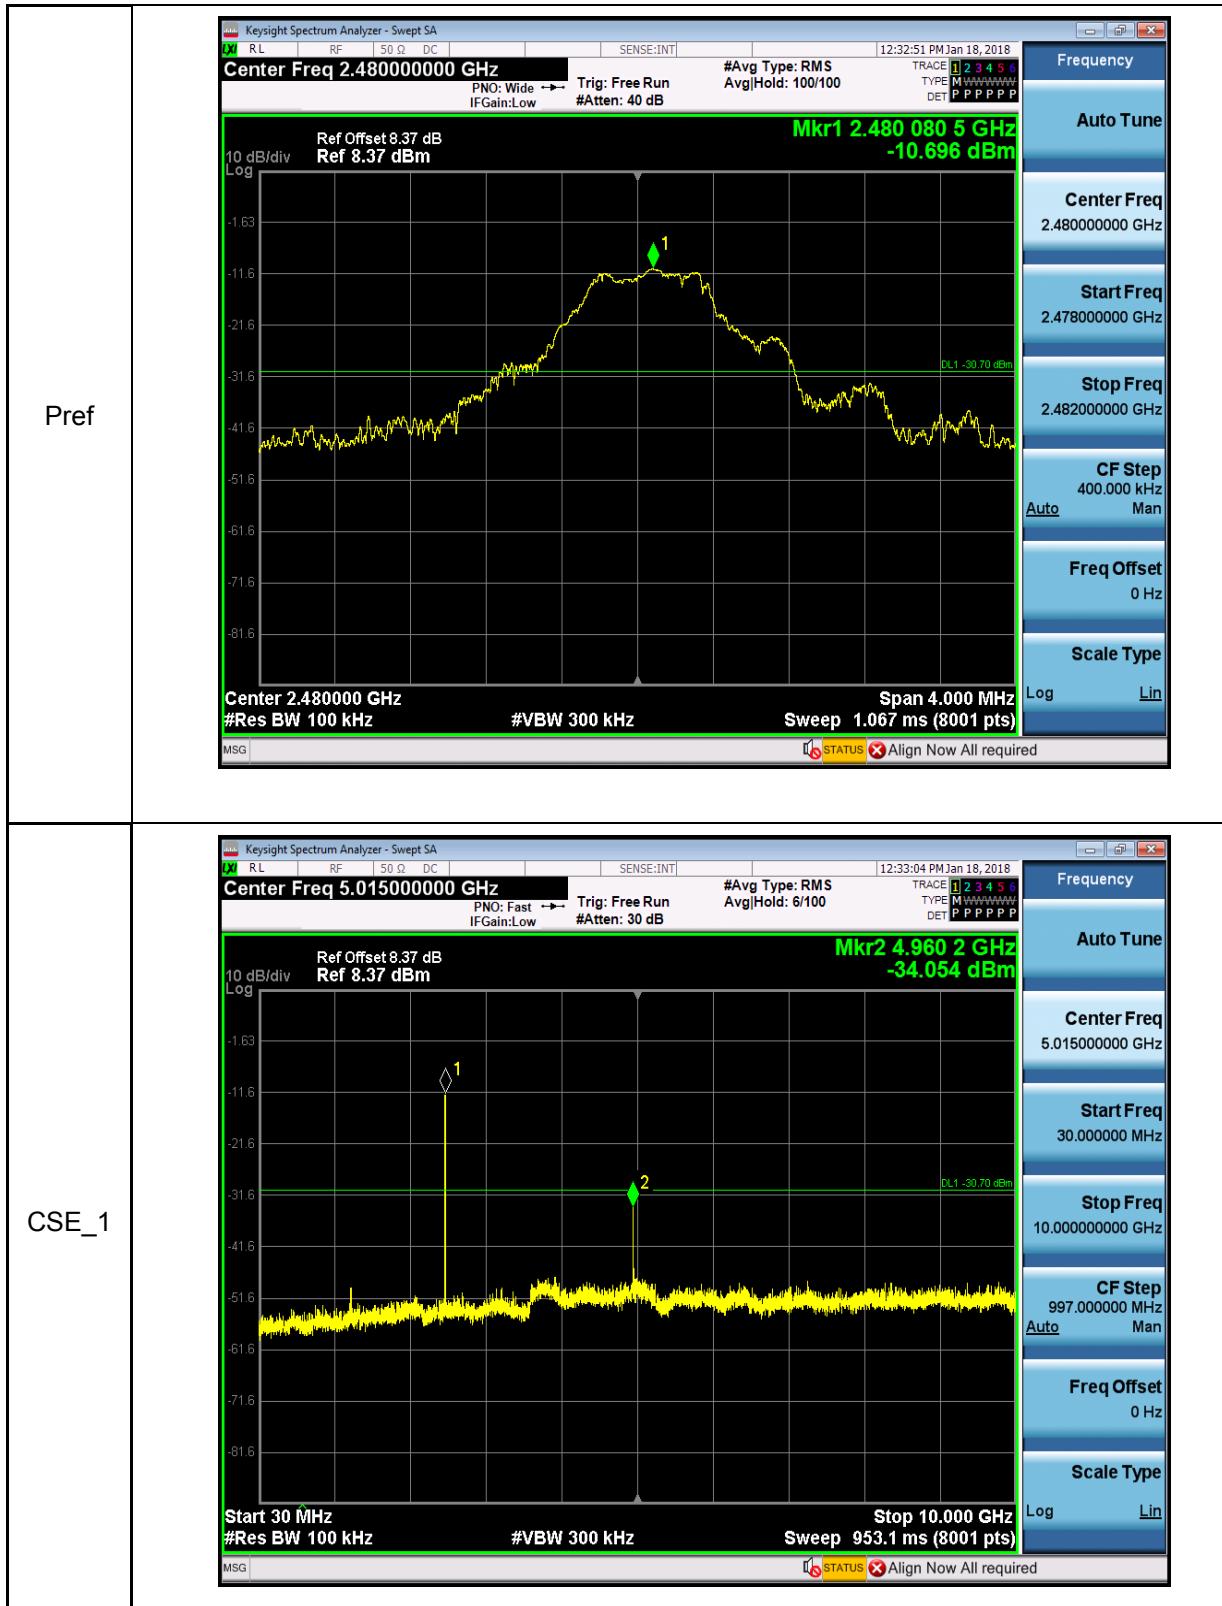

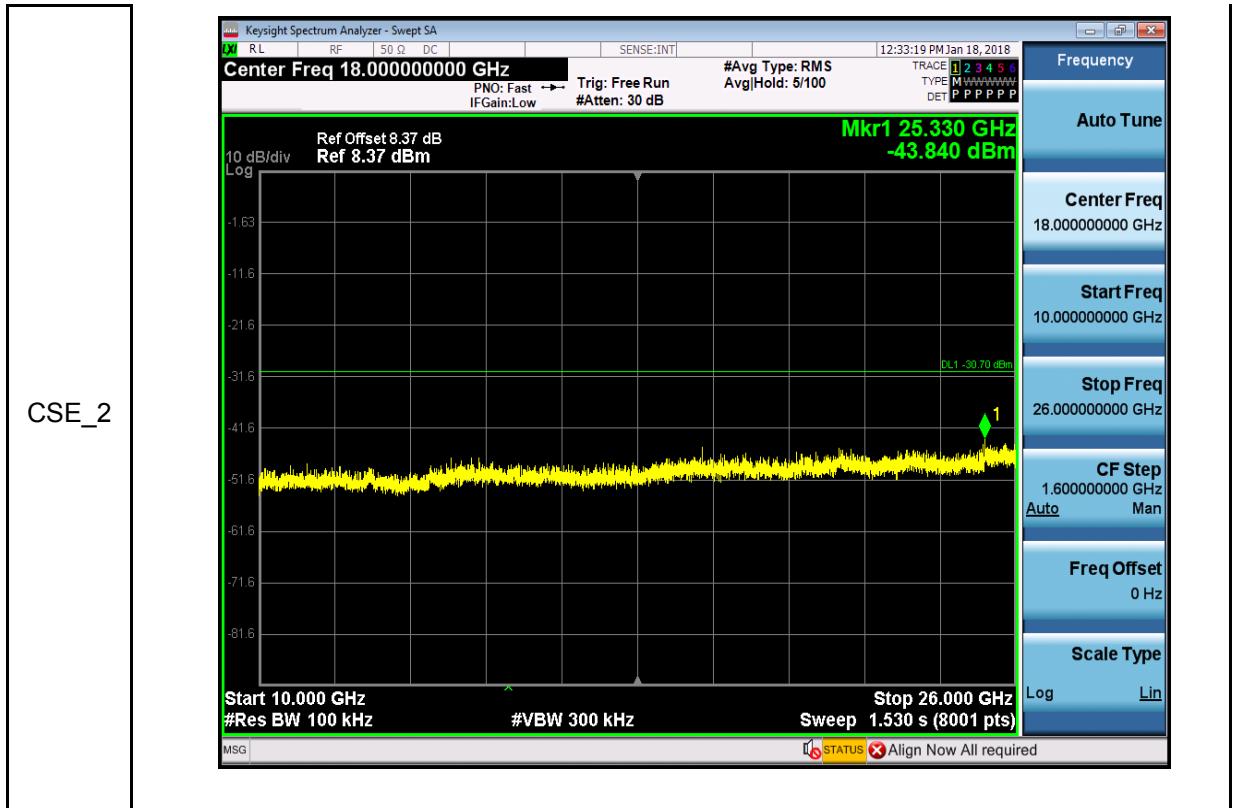**--End of Report--**