



TEST REPORT

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr		Report No.: KR19-SRF0144 Page (1) of (52)	
1. Client ◦ Name : EM-Tech Co., Ltd. ◦ Address : 40, Changwon-daero 1144beon-gil, Seongsan-gu, Changwon-si, Gyeonsangnam-do, 51539, Korea ◦ Date of Receipt : 2019-07-24			
2. Use of Report : -			
3. Name of Product and Model : Wearable Wireless Speaker/ SP-A7W			
4. Manufacturer and Country of Origin : EM-TECH VIETNAM CO., LTD / VIETNAM			
5. FCC ID : 2AOIKSP-A7W			
6. IC Certification : 25200-SPA7W			
7. Date of Test : 2019-09-17 to 2019-09-19			
8. Test Standards : FCC Part 15 Subpart C, 15.247 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019			
9. Test Results : Refer to the test result in the test report			
Affirmation	Tested by Name : Myeongjun Kwon		Technical Manager Name : Jaehyong Lee
2019-09-23			
KCTL Inc.			
As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.			

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Frequency/channel operations.....	5
3.	Antenna requirement	6
4.	Summary of tests	7
5.	Measurement uncertainty	8
6.	Measurement results explanation example	9
7.	Test results	10
7.1.	Maximum peak output power.....	10
7.2.	Carrier frequency separation	13
7.3.	20dB channel bandwidth (Occupied bandwidth).....	16
7.4.	Number of hopping channels.....	20
7.5.	Time of occupancy(Dwell time).....	22
7.6.	Radiated spurious emissions & band edge.....	26
7.7.	Conducted Spurious Emission.....	45
7.8.	AC Conducted emission	50
8.	Measurement equipment	52

1. General information

Client : EM-Tech Co., Ltd.
 Address : 40, Changwon-daero 1144beon-gil, Seongsan-gu, Changwon-si,
 Gyeongsangnam-do, 51539, Korea
 Manufacturer : EM-TECH VIETNAM CO., LTD
 Address : Yen phong industrials zone Bac ninh province, Vietnam
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849
 Industry Canada Registration No. : 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : Wearable Wireless Speaker
 Model : SP-A7W
 Frequency range : 2 402 MHz ~ 2 480 MHz
 Modulation technique : GFSK, $\pi/4$ -DQPSK, 8DPSK
 Number of channels : 79 ch
 Power source : DC 3.70 V
 Antenna specification : Chip Antenna
 Antenna gain : 5.06 dBi
 Software version : 1.0
 Hardware version : 1.0
 Test device serial No. : N/A
 Operation temperature : -10 °C ~ 50 °C

2.1. Frequency/channel operations

This device contains the following capabilities:
 Bluetooth(BDR/EDR)

Ch.	Frequency (MHz)
00	2 402
.	.
39	2 441
.	.
78	2 480

Table 2.1.1. Bluetooth (BDR/EDR) mode

15.247 Requirements for Bluetooth transmitter:

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - 1) This system is hopping pseudo-randomly.
 - 2) Each frequency is used equally on the average by each transmitter.
 - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
 - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Requirement of RSS-Gen Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

- The transmitter has permanently attached Chip Antenna (internal antenna) on board.
- The EUT Complies with the requirement of §15.203, §15.247.

4. Summary of tests

FCC Part section(s)	IC Rule Reference	Parameter	Test results
15.247(b)(1),(4)	RSS-247, 5.4 (b)	Maximum peak output power	Pass
15.247(a)(1)	RSS-247, 5.1 (b)	Carrier frequency separation	Pass
15.247(a)(1)	RSS-247, 5.1 (a)	20dB channel bandwidth	Pass
-	RSS-Gen, 6.7	Occupied bandwidth	Pass
15.247(a)(iii) 15.247(b)(1)	RSS-247, 5.1(d)	Number of hopping channel	Pass
15.247(a) (iii)	RSS-247, 5.1 (d)	Time of occupancy(dwel time)	Pass
15.205(a), 15.209(a)	RSS-247, 5.5 RSS-Gen, 8.9, 8.10	Spurious emission	Pass
15.247(d),		Band-edge, restricted band	Pass
15.207	RSS-Gen 8.8	Conducted Emissions	Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation
4. The test procedure(s) in this report were performed in accordance as following.
 - ♦ ANSI C63.10-2013
 - ♦ KDB 558074 D01 v05r02

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (\pm)	
Conducted RF power	1.76 dB	
Conducted spurious emissions	4.03 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.28 dB
	30 MHz ~ 300 MHz	4.98 dB
	300 MHz ~ 1 000 MHz	5.14 dB
	1 GHz ~ 6 GHz	6.70 dB
	Above 6 GHz	6.60 dB
Conducted emissions	9 kHz ~ 150 kHz	3.66 dB
	150 kHz ~ 30 MHz	3.26 dB



6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	5.85	10 000	8.17
100	5.95	11 000	8.18
200	6.03	12 000	8.39
300	6.13	13 000	8.90
400	6.17	14 000	9.37
500	6.94	15 000	9.59
600	6.29	16 000	9.70
700	6.36	17 000	9.76
800	6.41	18 000	10.18
900	6.46	19 000	10.88
1 000	6.50	20 000	10.88
2 000	6.81	21 000	10.42
3 000	7.02	22 000	10.99
4 000	7.23	23 000	11.48
5 000	7.47	24 000	11.06
6 000	7.78	25 000	11.80
7 000	7.96	26 000	11.02
8 000	8.23	26 500	11.56
9 000	8.06		


Note.

Offset(dB) = RF cable loss(dB) + Power Divider(dB)

7. Test results

7.1. Maximum peak output power

Test setup

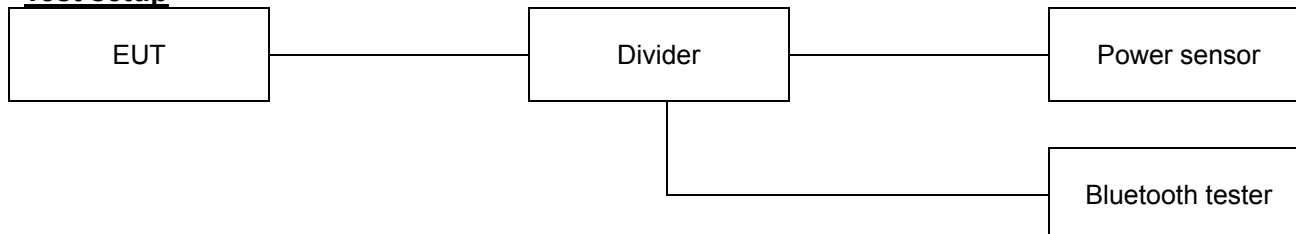

Limit

FCC

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), for frequency hopping systems operating in the 2 400-2 483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725-5 850 MHz band: 1 watt. For all other frequency hopping systems in the 2 400-2 483.5 MHz band: 0.125 watts.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC

According to RSS-247 5.4(b), for FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels.

The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test procedure

ANSI C63.10-2013 - Section 7.8.5

Test settings

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW \geq RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.
- 7) Allow trace to stabilize.

Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

KCTL

Test results

Frequency (MHz)	Data rate (Mbps)	Conducted output power (dBm)		Conducted Power Limit (dBm)	Ant. Gain (dBi)	Max. e.i.r.p. (dB m)		Max. e.i.r.p. Limit (dBm)
		Peak	Average			Peak	Average	
2 402	1	-1.86	-3.65	20.97	5.06	3.20	1.41	36.02
2 441	1	-1.46	-3.20		5.06	3.60	1.86	
2 480	1	-2.96	-4.60		5.06	2.10	0.46	
2 402	2	1.25	-2.64	20.97	5.06	6.31	2.42	36.02
2 441	2	1.85	-2.03		5.06	6.91	3.03	
2 480	2	0.45	-3.30		5.06	5.51	1.76	
2 402	3	1.75	-2.62	20.97	5.06	6.81	2.44	36.02
2 441	3	2.35	-1.96		5.06	7.41	3.10	
2 480	3	1.15	-3.13		5.06	6.21	1.93	


Notes:

1. e.i.r.p. Calculation: $\text{e.i.r.p. (dB m)} = \text{Conducted output power (dB m)} + \text{Antenna gain (dB i)}$



7.2. Carrier frequency separation

Test setup

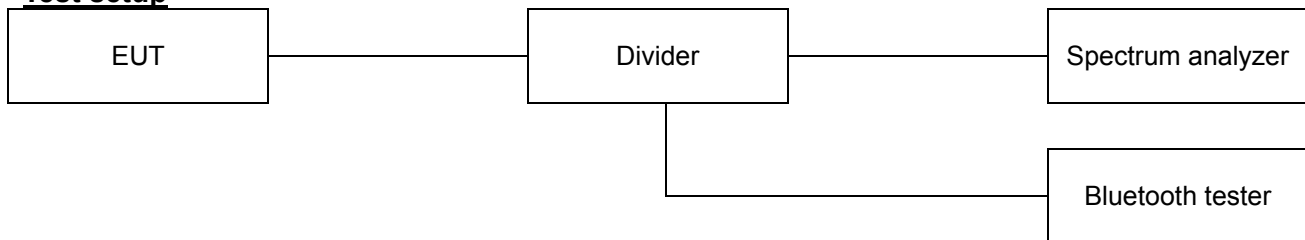

Limit

According to §15.247(a)(1) and RSS-247 5.1(b), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test procedure

ANSI C63.10-2013 - Section 7.8.2

Test settings

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0144

Page (14) of (52)

KCTL**Test results**

Frequency(MHz)	Data rate(Mbps)	Carrier frequency separation(MHz)	Limit(MHz)
2 402	1	1.004	0.639
2 441	1	1.007	0.637
2 480	1	0.998	0.639
2 402	3	1.046	0.867
2 441	3	1.184	0.867
2 480	3	1.061	0.860

KCTL

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0144

Page (15) of (52)



GFSK / Low ch.

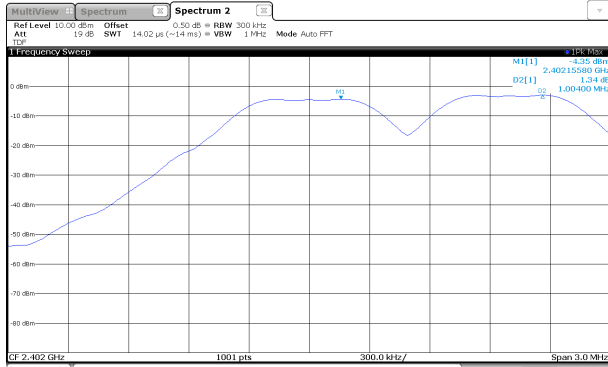


8DPSK / Low ch.




GFSK / Mid ch.




8DPSK / Mid ch.

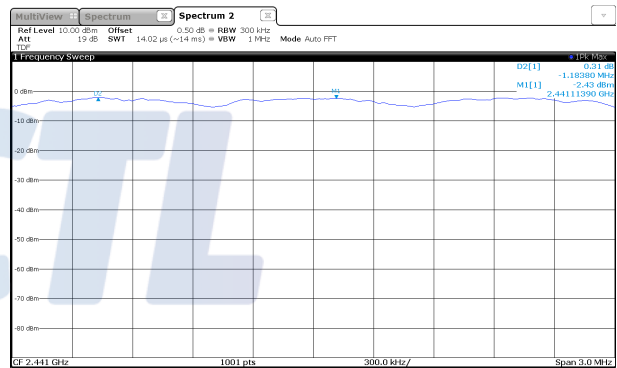

GFSK / High ch.

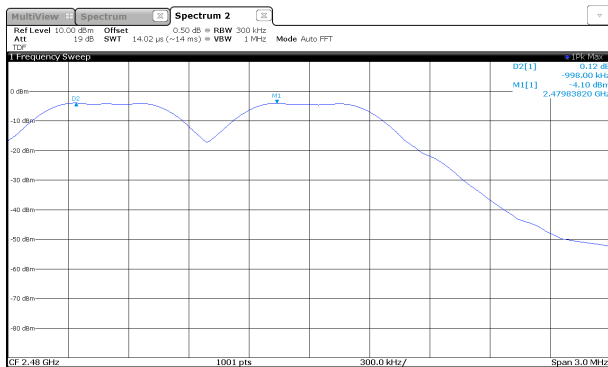


8DPSK / High ch.

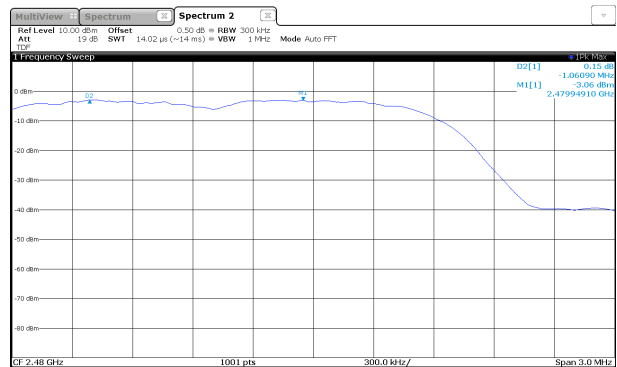

7.3. 20dB channel bandwidth (Occupied bandwidth)

Test setup

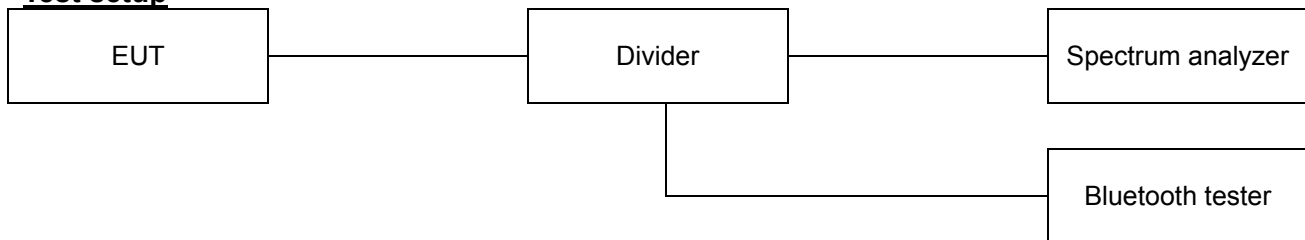

Limit

According to §15.247(a)(1) and RSS-247 5.1(a), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test procedure

ANSI C63.10-2013 - Section 6.9.2

Test settings

20dB channel bandwidth and Occupied bandwidth

The occupied bandwidth is measured as the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by a specified ratio (or in decibels, a specified number of dB down from the reference value). Typical ratios, expressed in dB, are -6 dB, -20 dB, and -26 dB, corresponding to 6 dB BW, 20 dB BW, and 26 dB BW, respectively. In this subclause, the ratio is designated by “-xx dB.” The reference value is either the level of the unmodulated carrier or the highest level of the spectral envelope of the modulated signal, as stated by the applicable requirement. Some requirements might specify a specific maximum or minimum value for the “-xx dB” bandwidth; other requirements might specify that the “-xx dB” bandwidth be entirely contained within the authorized or designated frequency band.

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
- Span: Two times and five times the OBW.
- RBW = 1 % to 5 % of the OBW and VBW ≥ 3 x RBW
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation.
- The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- Detector: peak
- Trace mode: max hold.
- Allow the trace to stabilize.
- Determine the “-xx dB down amplitude” using ((reference value) - xx). Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow

the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

- k) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

Test results

20 dB Bandwidth

Frequency(MHz)	Data rate (Mbps)	20 dB Bandwidth (MHz)	Minimum Bandwidth (MHz)
2 402	1	0.959	0.5
2 441	1	0.956	
2 480	1	0.959	
2 402	3	1.300	
2 441	3	1.300	
2 480	3	1.290	

99% Bandwidth

Frequency(MHz)	Data rate (Mbps)	99% bandwidth(MHz)
2 402	1	0.881
2 441	1	0.879
2 480	1	0.876
2 402	3	1.170
2 441	3	1.171
2 480	3	1.165

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0144

Page (18) of (52)




20 dB bandwidth


GFSK / Low ch.

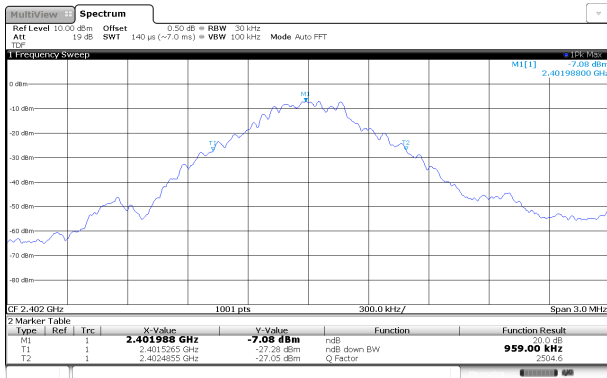


8DPSK / Low ch.

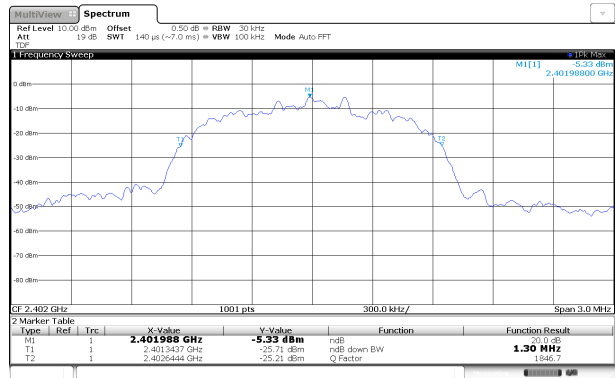


GFSK / Mid ch.

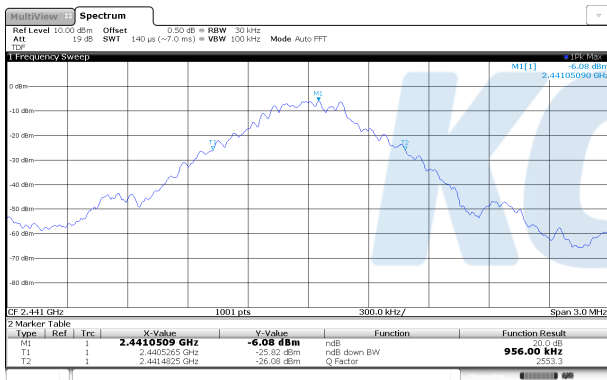


8DPSK / Mid ch.

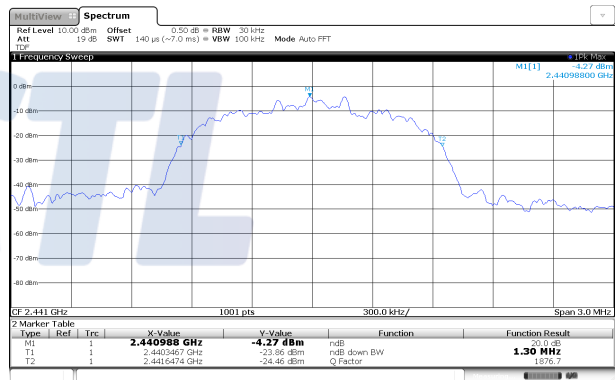

GFSK / High ch.

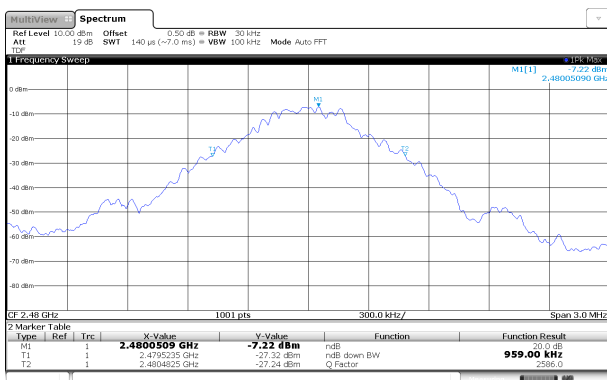

8DPSK / High ch.

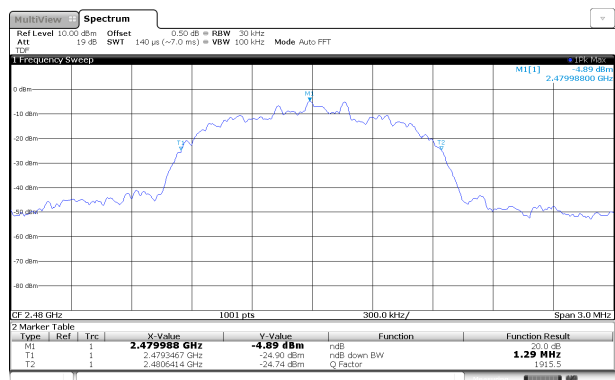

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0144

Page (19) of (52)




99 % bandwidth


GFSK / Low ch.

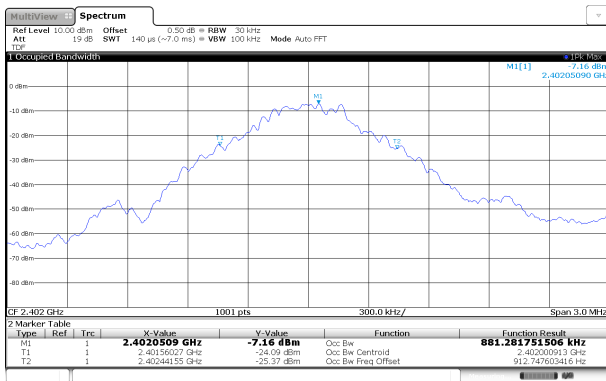


8DPSK / Low ch.

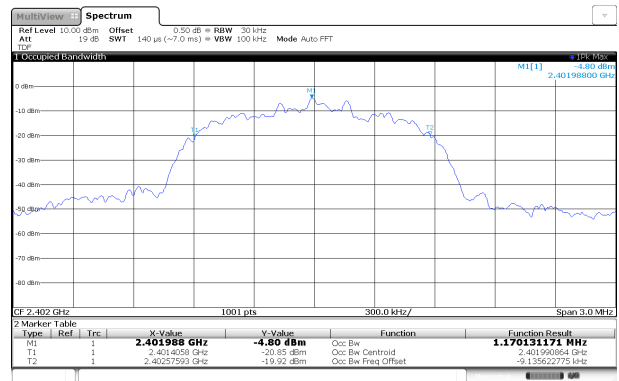


GFSK / Mid ch.

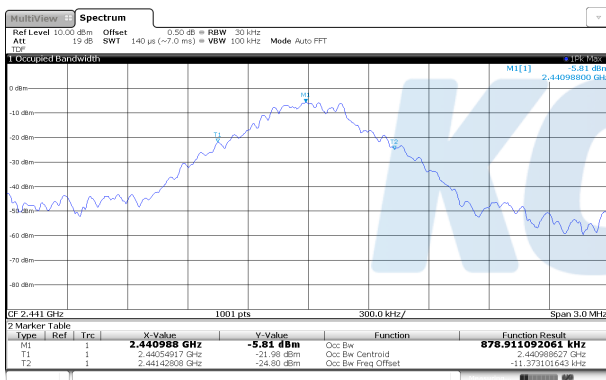


8DPSK / Mid ch.

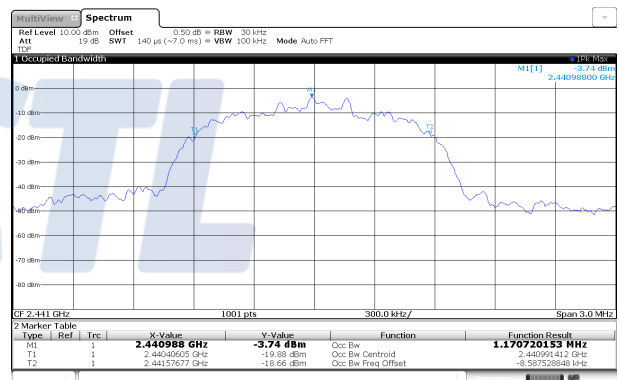

GFSK / High ch.

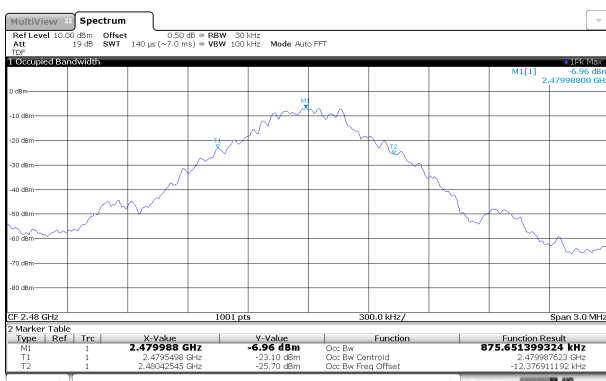

8DPSK / High ch.

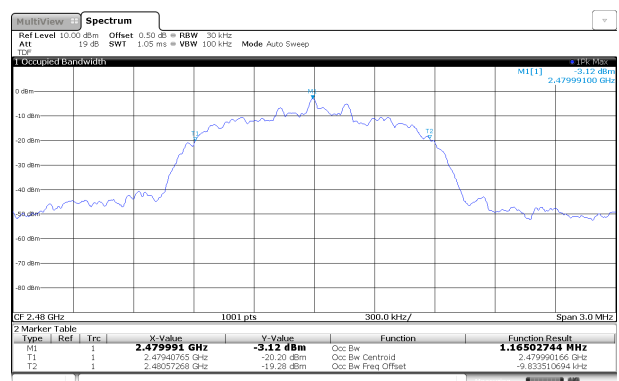


This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

7.4. Number of hopping channels

Test setup

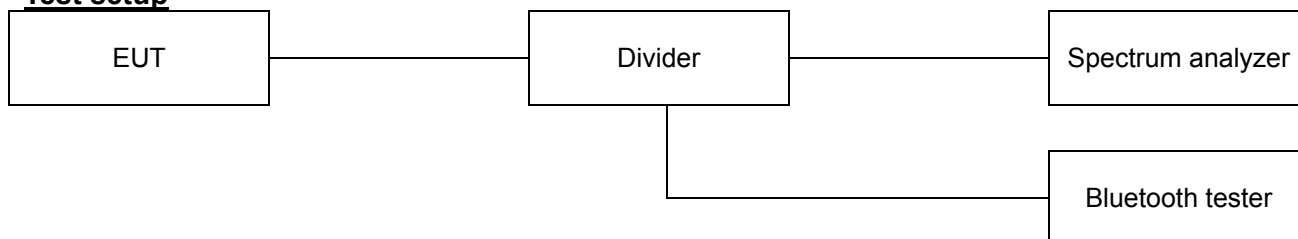

Limit

According to §15.247(a)(1)(iii) and RSS-247 5.1(d), frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels.

Test procedure

ANSI C63.10-2013 - Section 7.8.3

Test settings

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Test results

Mode	Number of hopping channel	Limit
GFSK	79	≥ 15
$\pi/4$ -DQPSK	79	≥ 15
8DPSK	79	≥ 15

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0144


Page (21) of (52)

KCTL


GFSK

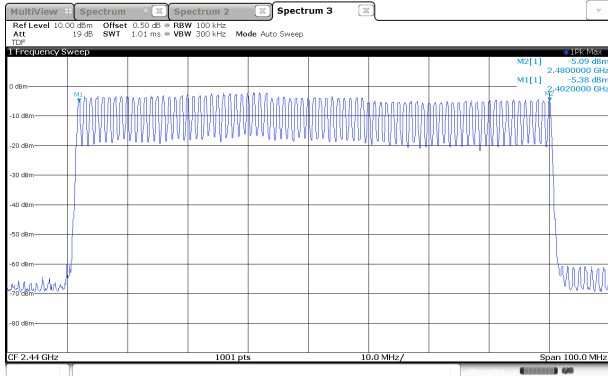

$\pi/4$ -DQPSK

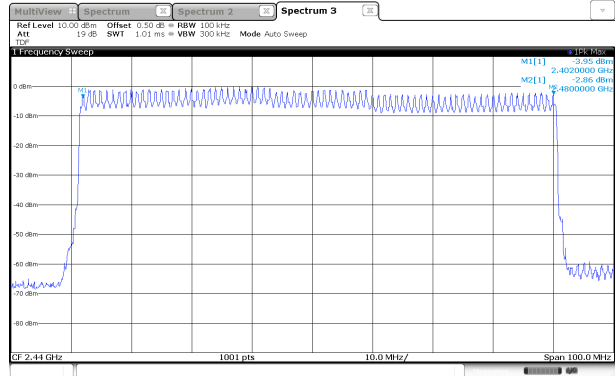


8DPSK

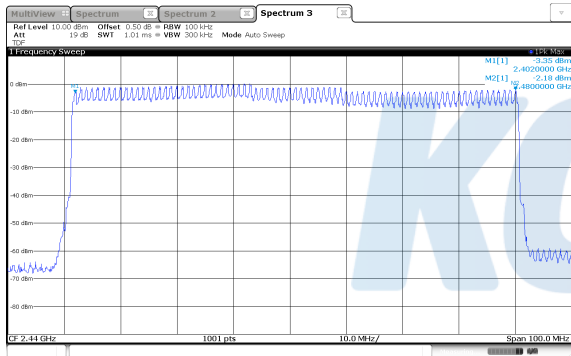

Blank

7.5. Time of occupancy(Dwell time)

Test setup

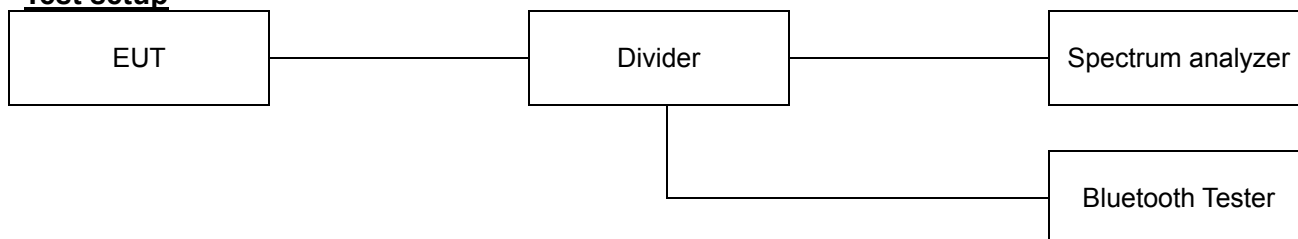

Limit

According to §15.247(a)(1)(iii) and RSS-247 5.1(d), frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test procedure

ANSI C63.10-2013 - Section 7.8.4

Test settings

- Span: Zero span, centered on a hopping channel.
- RBW \leq channel spacing and $\gg 1 / T$, where T is the expected dwell time per channel.
- Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- Detector function: Peak.
- Trace: Max hold.
- Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Test results**- Non-AFH**

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.378	800.000	79	0.121	0.400
DH3	2 441	1.636	400.000	79	0.262	0.400
DH5	2 441	2.884	266.667	79	0.308	0.400
2-DH1	2 441	0.397	800.000	79	0.127	0.400
2-DH3	2 441	1.652	400.000	79	0.264	0.400
2-DH5	2 441	2.891	266.667	79	0.308	0.400
3-DH1	2 441	0.397	800.000	79	0.127	0.400
3-DH3	2 441	1.648	400.000	79	0.264	0.400
3-DH5	2 441	2.898	266.667	79	0.309	0.400

- AFH

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.378	400.000	20	0.060	0.400
DH3	2 441	1.636	200.000	20	0.131	0.400
DH5	2 441	2.884	133.333	20	0.154	0.400
2-DH1	2 441	0.397	400.000	20	0.064	0.400
2-DH3	2 441	1.652	200.000	20	0.132	0.400
2-DH5	2 441	2.891	133.333	20	0.155	0.400
3-DH1	2 441	0.397	400.000	20	0.064	0.400
3-DH3	2 441	1.648	200.000	20	0.132	0.400
3-DH5	2 441	2.898	133.333	20	0.155	0.400

Notes:

1. Non-AFH

- Period Time: 0.4 sec x 79 channels = 31.6 sec
- Result (s)= (Hopping rate (hop/s/slot) / 79 channels) x 31.6 sec x Pulse width (ms)

2. AFH

- Period Time: 0.4 sec x 20 channels = 8 sec
- Result (s)= (Hopping rate (hop/s/slot) / 20 channels) x 8 sec x Pulse width (ms)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0144


Page (24) of (52)




GFSK / DH1




$\pi/4$ -DQPSK / 2-DH1

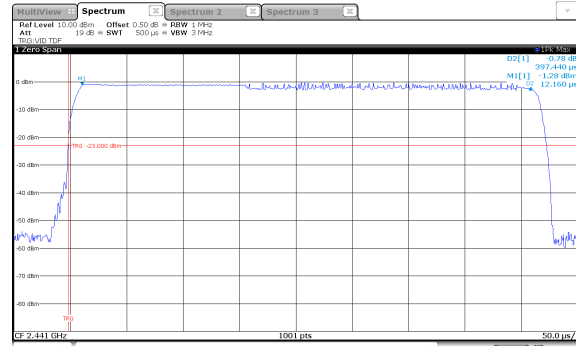


GFSK / DH3

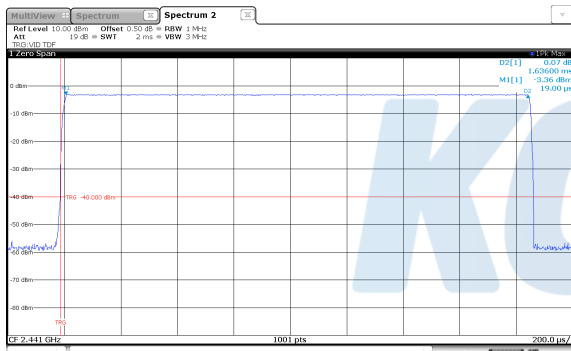


$\pi/4$ -DQPSK / 2-DH3

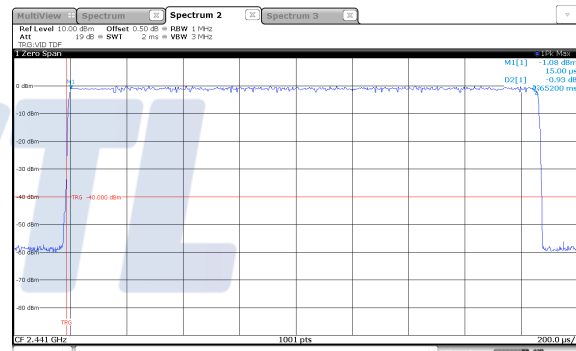

GFSK / DH5

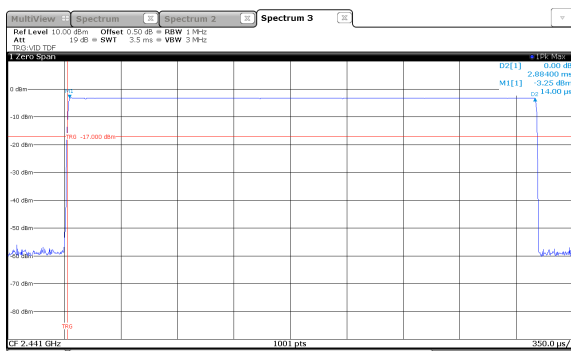

$\pi/4$ -DQPSK / 2-DH5

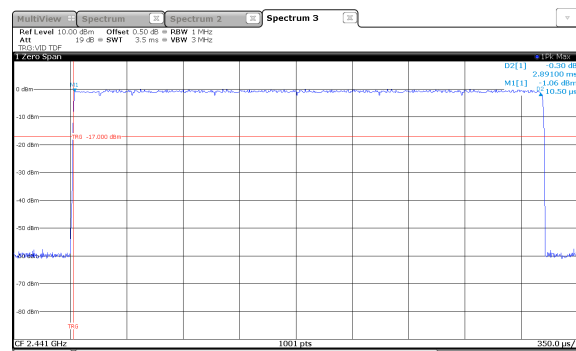

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0144


Page (25) of (52)

KCTL


8DPSK / 3-DH1

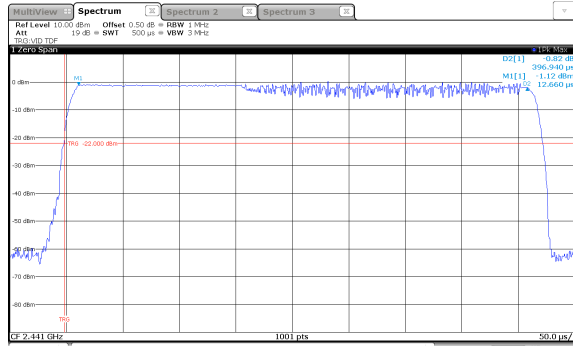

8DPSK / 3-DH3

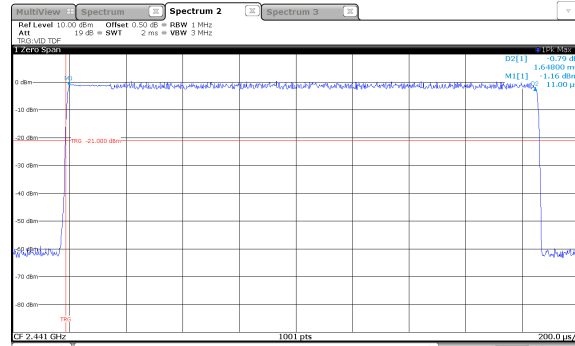

8DPSK / 3-DH5

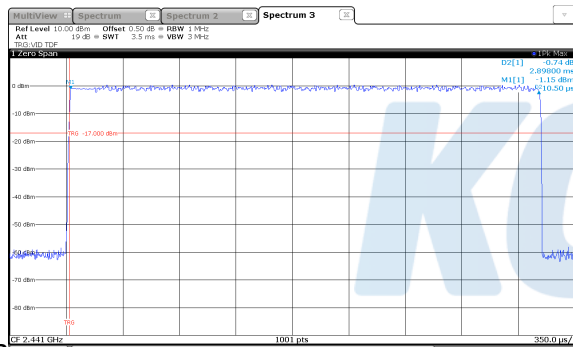


Blank


7.6. Radiated spurious emissions & band edge

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

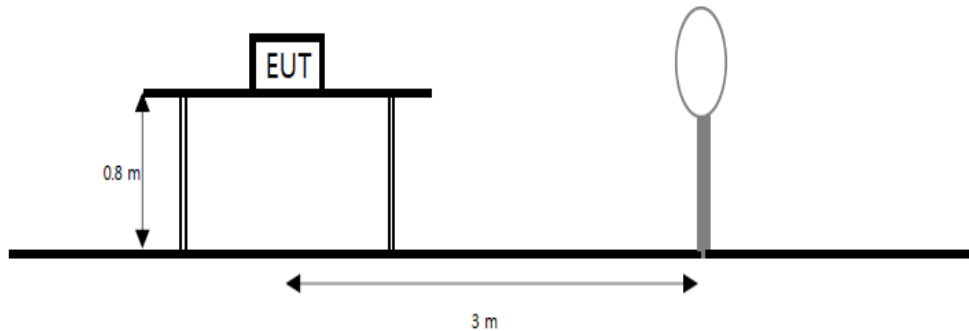

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

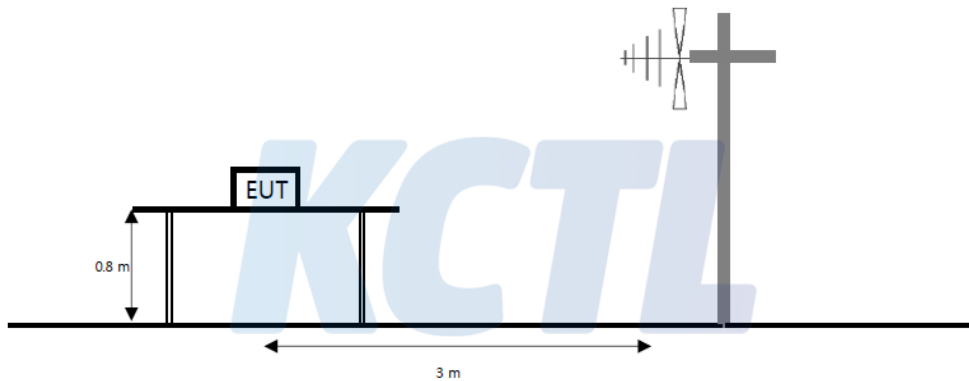

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

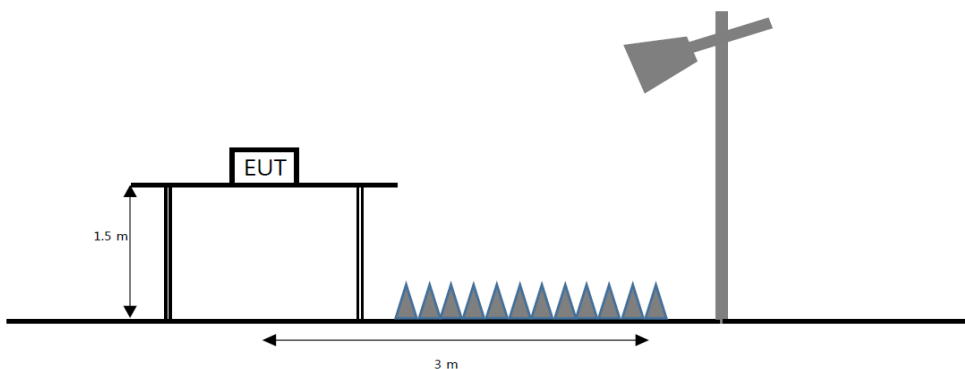

Limit

According to section 15.209(a), RSS-Gen(8.9) except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), RSS-Gen(8.10) only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	Above 38.6
13.36 - 13.41			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR19-SRF0144</p> <p>Page (28) of (52)</p>	
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------	-------------------------------------------------------------------------------------

According to section 15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

KCTL

Test procedure

ANSI C63.10-2013 Section 12.7.7.2, 12.7.5, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test settings**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW \geq (3 \times RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements**Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW \geq (3 \times RBW).
3. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW \geq [3 \times RBW].
5. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this

condition cannot be satisfied, then the detector mode shall be set to peak.

6. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $[20 \log (1 / D)]$, where D is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz ($\geq 1/T$) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)
2. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
5. Average test would be performed if the peak result were greater than the average limit.
6. ¹⁾ means restricted band.
7. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3 m.
8. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: "No spurious emissions were detected within 20 dB of the limit."

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0144

Page (31) of (52)


KCTL**Test results (Below 30 MHz) – Worst case: 8DPSK Middle frequency**

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
No spurious emissions were detected within 20 dB of the limit.									

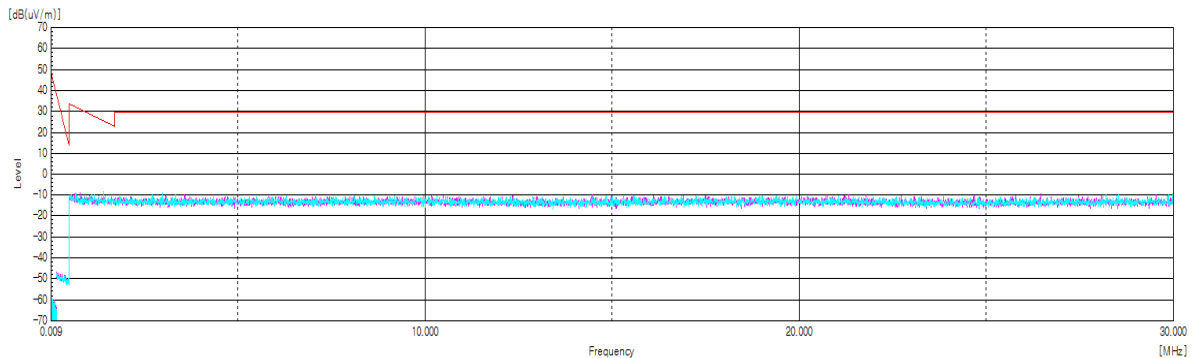Horizontal/Vertical**KCTL**


Test results (Below 1 000 MHz) – Worst case: 8DPSK Middle frequency




Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Quasi peak data								
35.82	V	44.30	17.56	-30.87	-	30.99	40.00	9.01
75.71	H	21.60	15.26	-30.23	-	6.63	40.00	33.37
232.00	H	33.70	16.98	-28.68	-	22.00	46.00	24.00
356.28 ¹⁾	H	22.40	20.49	-27.82	-	15.07	46.00	30.93
560.23	H	22.70	24.51	-26.71	-	20.50	46.00	25.50
709.12	H	19.60	26.90	-25.90	-	20.60	46.00	25.40

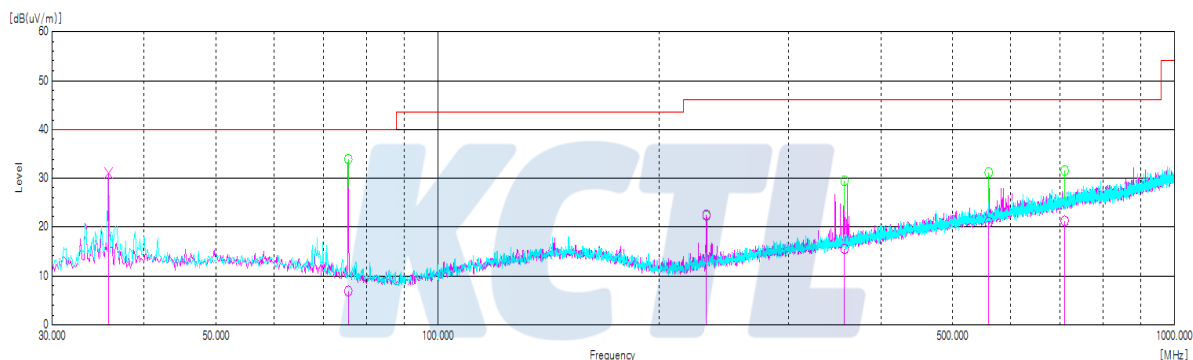Horizontal/Vertical

Test results (Above 1 000 MHz)**GFSK****Low Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ N/m))	(dB(μ N/m))	(dB)
Peak data								
2 388.36 ¹⁾	H	66.14	32.01	-48.80	-	49.35	74.00	24.65
4 803.64 ¹⁾	V	58.50	33.78	-53.12	-	39.16	74.00	34.84
Average Data								
No spurious emissions were detected within 20 dB of the limit.								



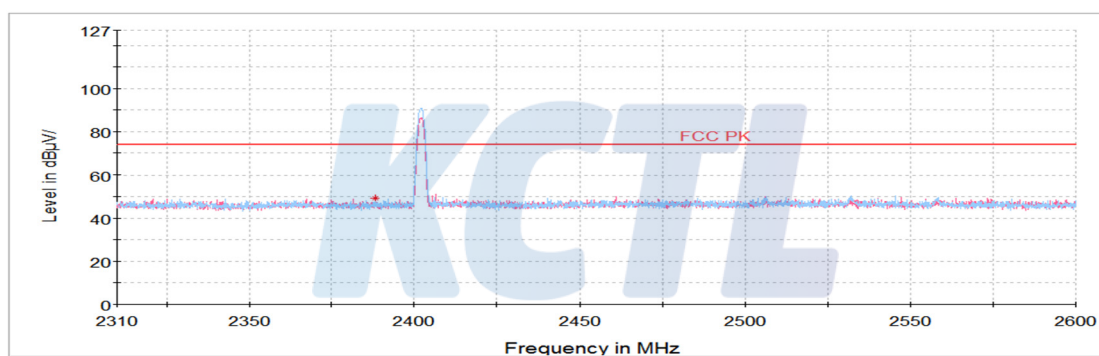
Horizontal/Vertical for Band-edge

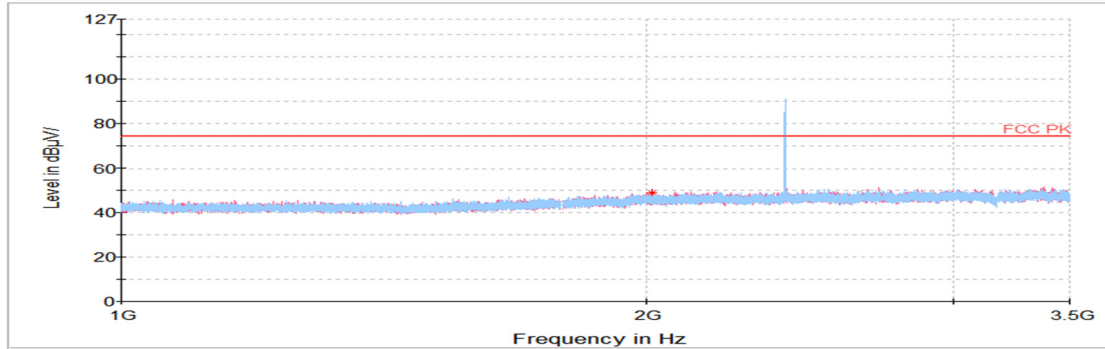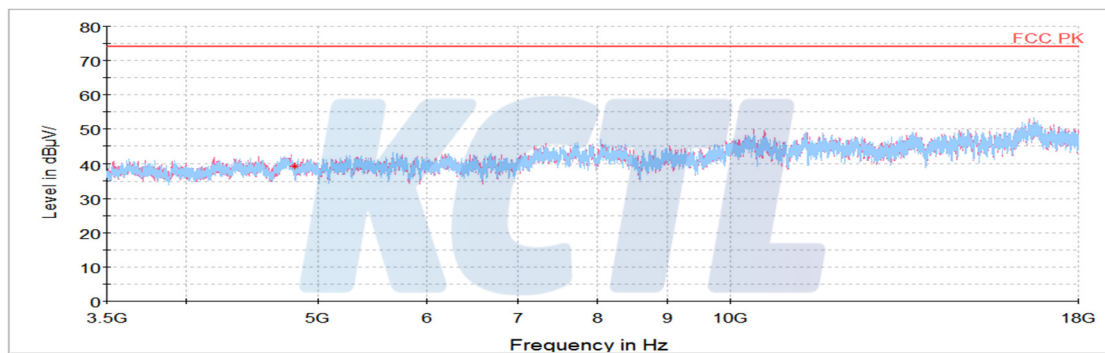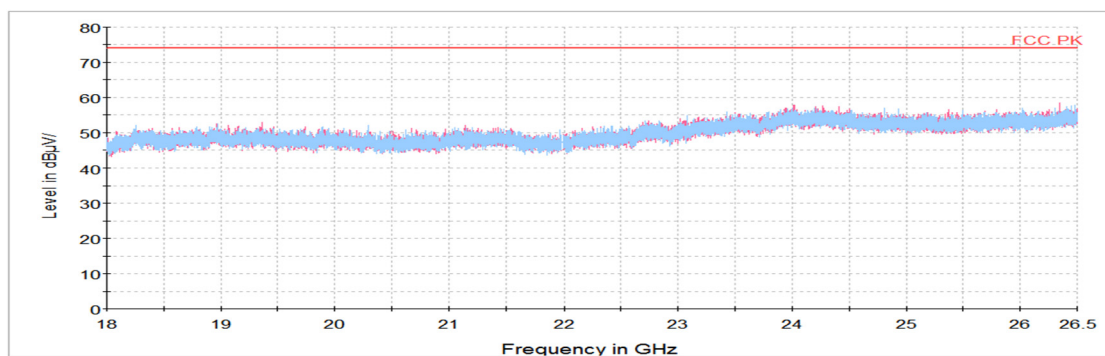Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 880.22 ¹⁾	H	60.72	33.83	-54.56	-	39.99	74.00	34.01
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

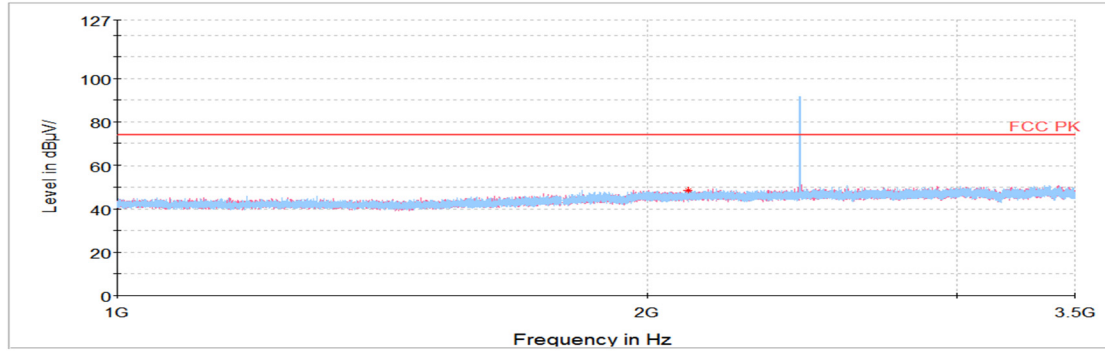
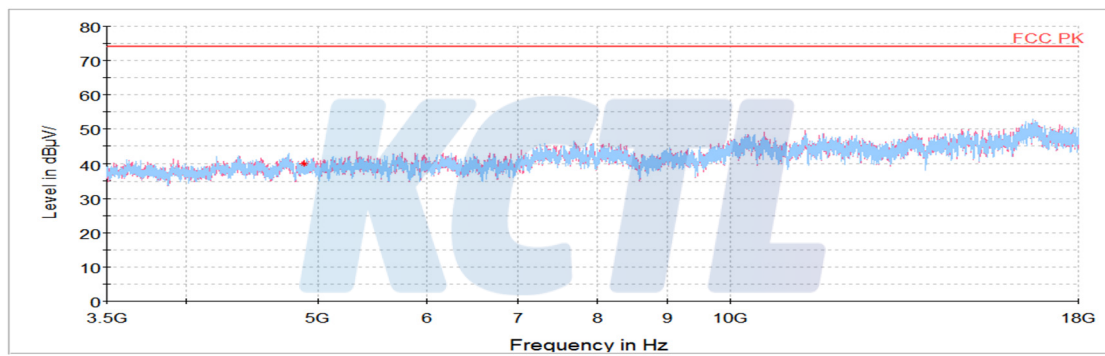
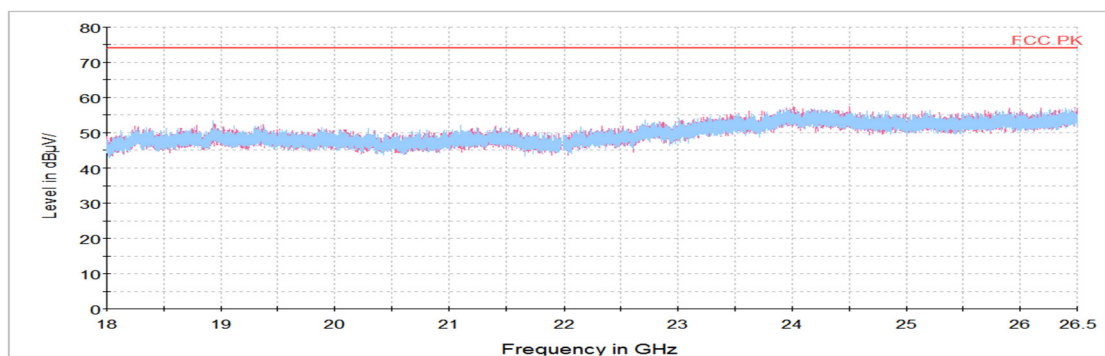


Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

High Channel

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 484.56 ¹⁾	V	68.92	32.09	-48.19	-	52.82	74.00	21.18
4 962.69 ¹⁾	V	62.05	33.88	-54.58	-	41.35	74.00	32.65
Average Data								

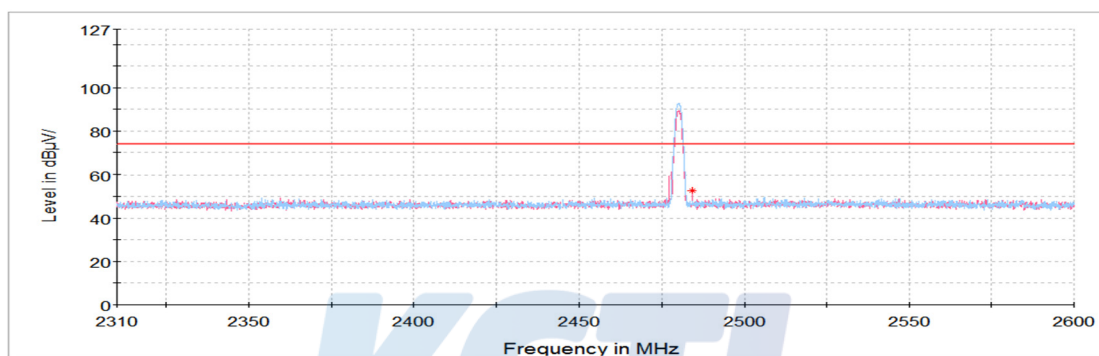Horizontal/Vertical for Band-edge

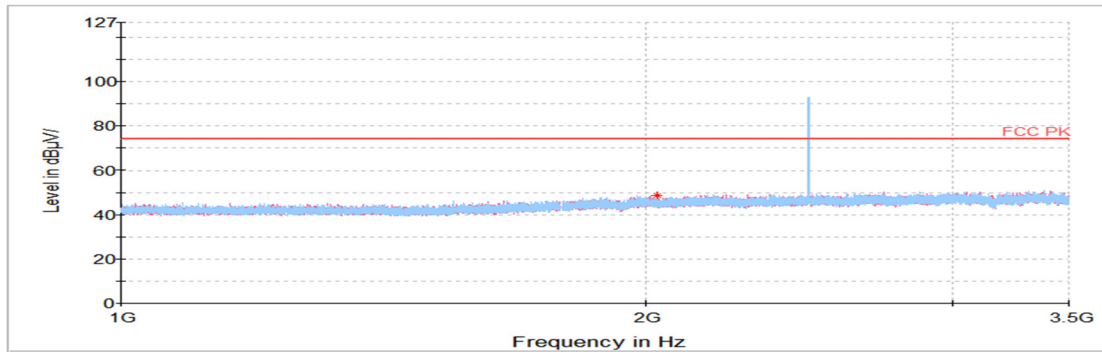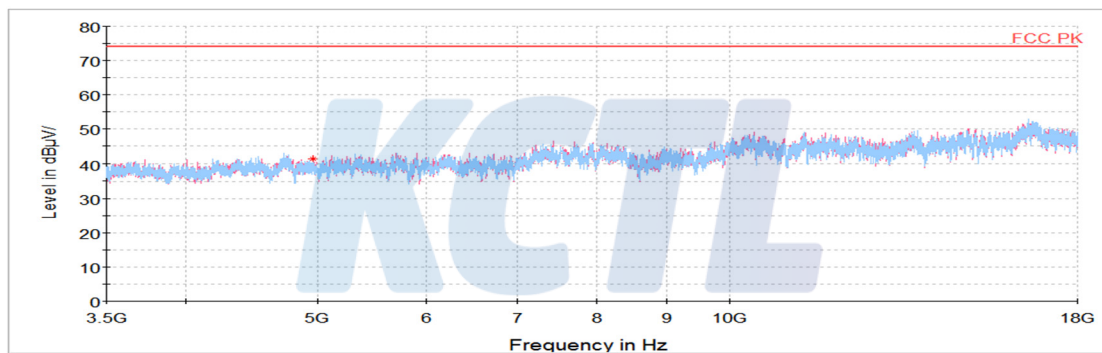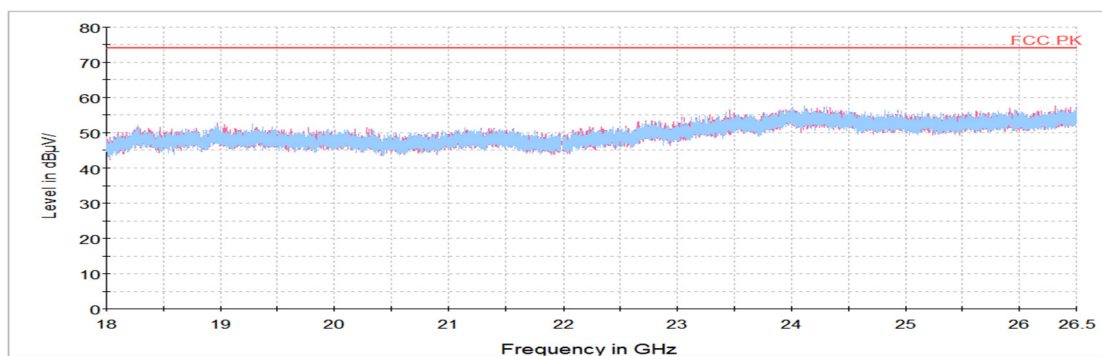Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr




Report No.:
KR19-SRF0144

Page (39) of (52)

KCTL**8DPSK****Low Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
2 388.67 ¹⁾	H	65.09	32.01	-48.79	-	48.31	74.00	25.69
4 804.09 ¹⁾	V	57.85	33.78	-53.13	-	38.50	74.00	35.50
Average Data								
No spurious emissions were detected within 20 dB of the limit.								



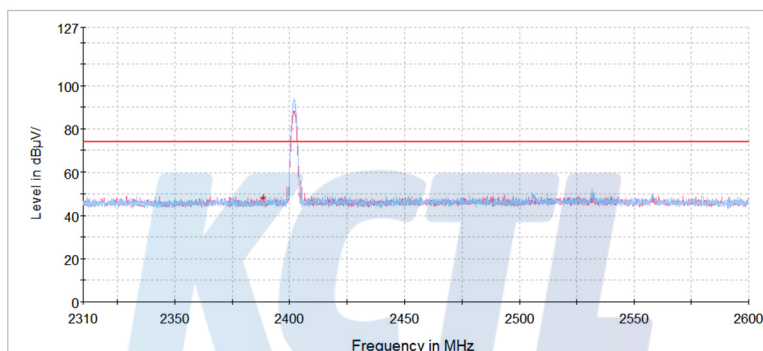
Horizontal/Vertical for Band-edge

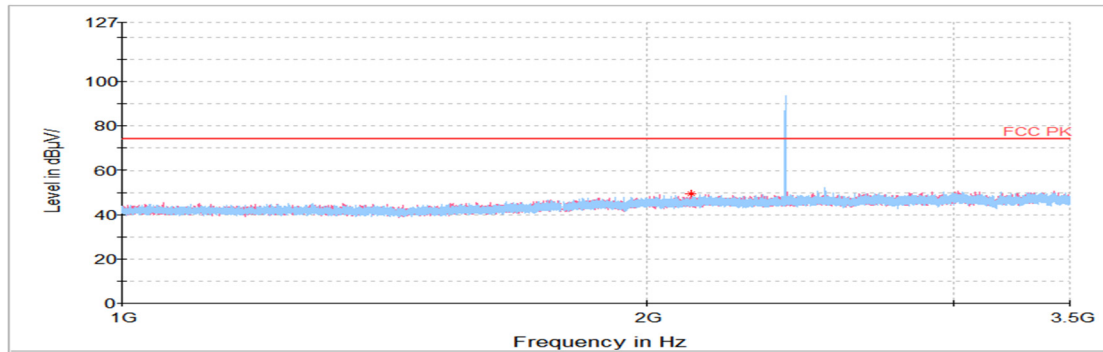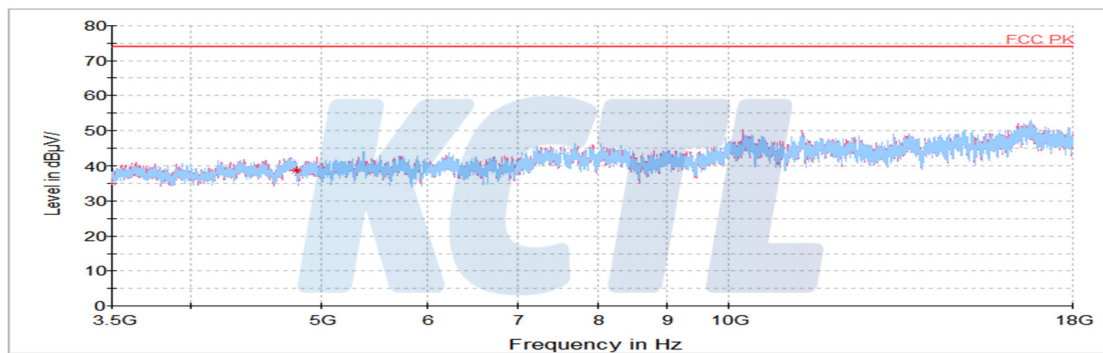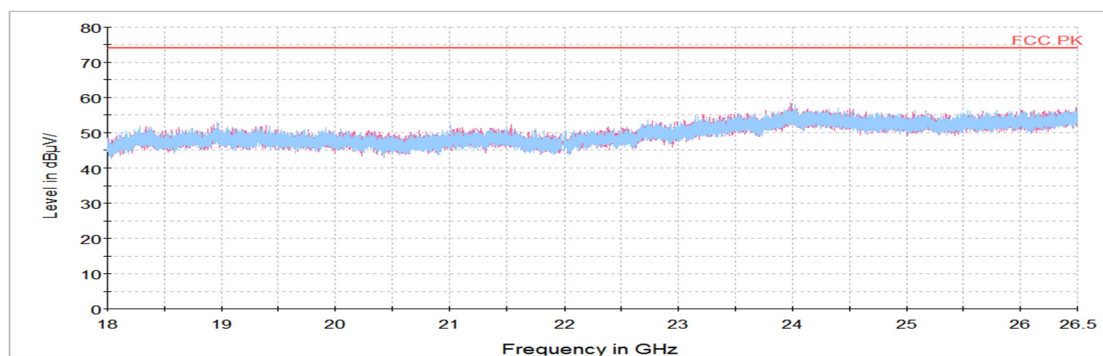Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 879.31 ¹⁾	H	60.49	33.83	-54.54	-	39.78	74.00	34.22
Average Data								
No spurious emissions were detected within 20 dB of the limit.								




KCTL

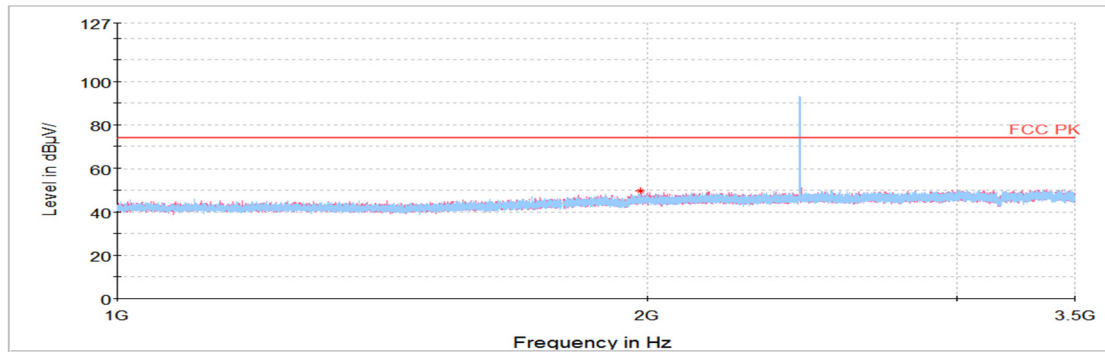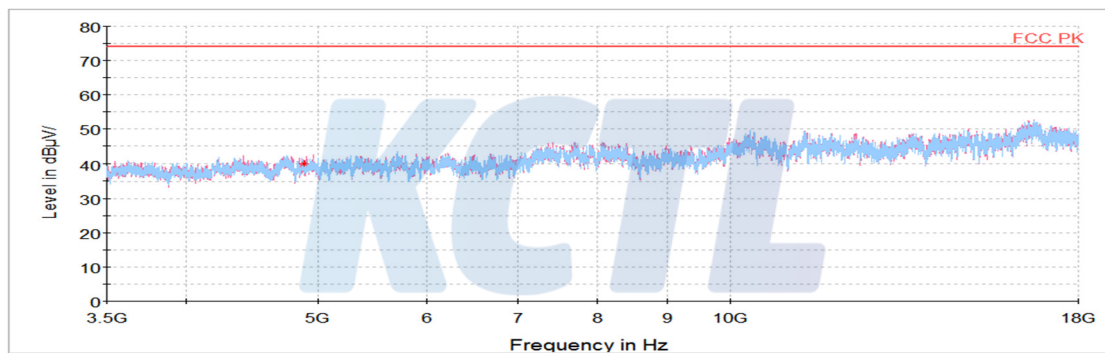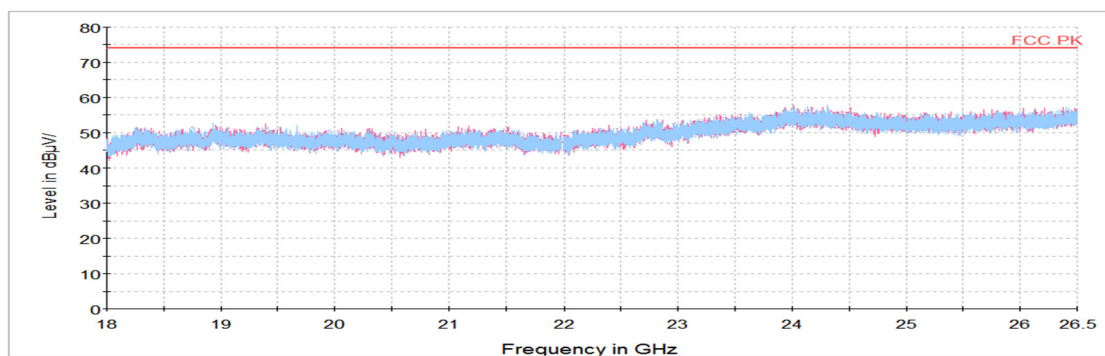Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

High Channel


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.59 ¹⁾	H	65.71	32.09	-48.19	-	49.61	74.00	24.39
4 959.06 ¹⁾	H	61.77	33.88	-54.6	-	41.05	74.00	32.95
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

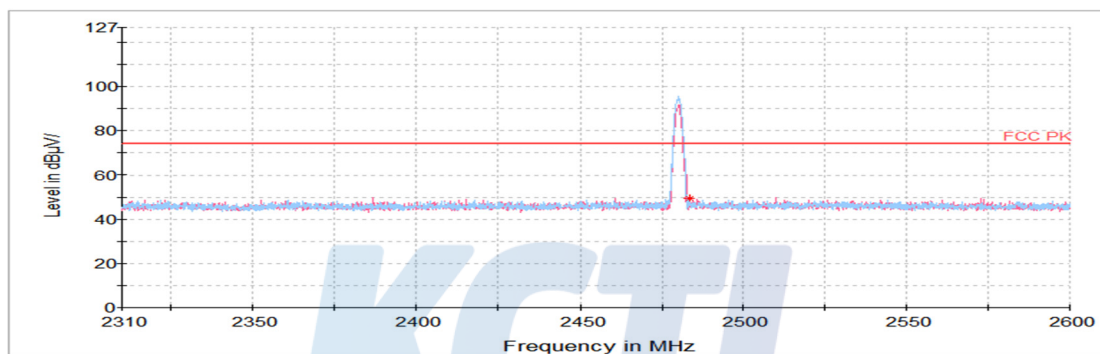Horizontal/Vertical for Band-edge

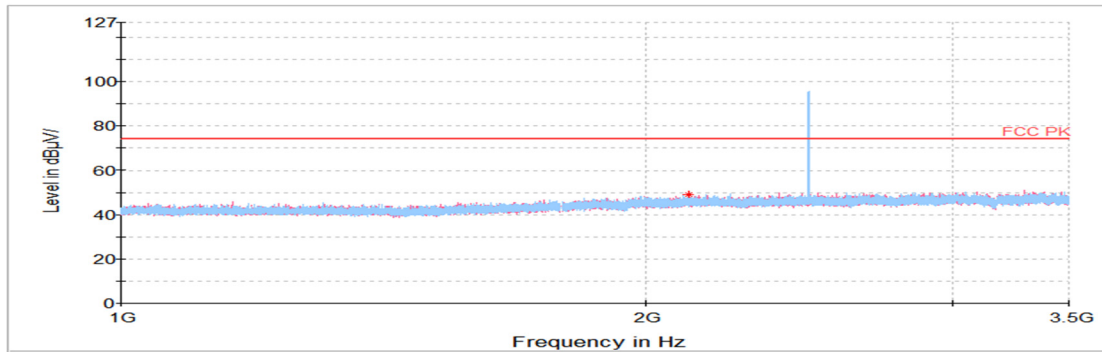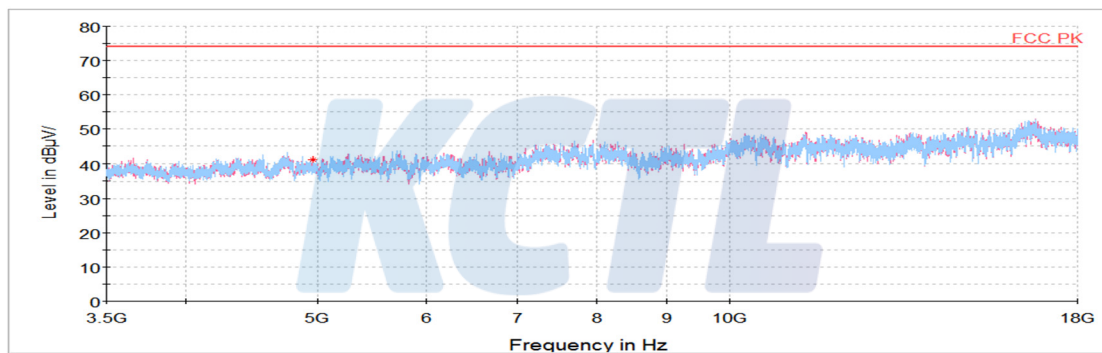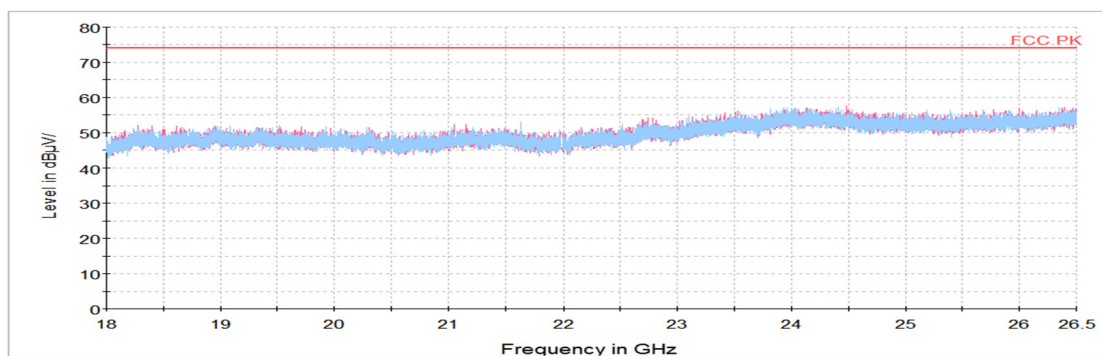Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

7.7. Conducted Spurious Emission

Test setup



Limit

According to §15.247(d), RSS-247(5.5), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operation, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation specified in §15.209(a) is not required. In addition, radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limit : 20 dBc

Test procedure

ANSI C63.10-2013 - Section 11.11.3, 14.3.3

KDB 558074 D01 v05 - Section 8.5

KDB 662911 D01 v02r01 – section (E)(3)(b)

Test settings

Set the spectrum analyzer as follows:

- 1) Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
Typically, several plots are required to cover this entire span.
- 2) RBW = 100 kHz
- 3) VBW ≥ RBW
- 4) Sweep = auto
- 5) Detector function = peak
- 6) Trace = max hold
- 7) Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
- 8) Each frequency found during preliminary measurements was re-examined and investigated.
The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0144

Page (46) of (52)


KCTL

Test results


Test mode : GFSK

Band-edge


Low ch.

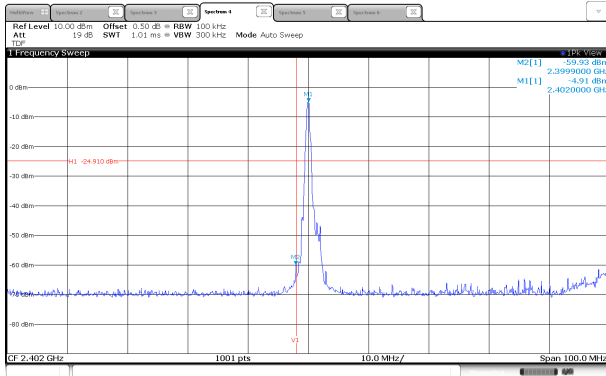

High ch.

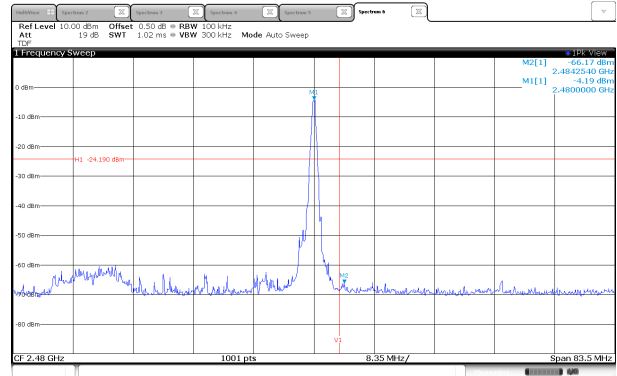

With Hopping

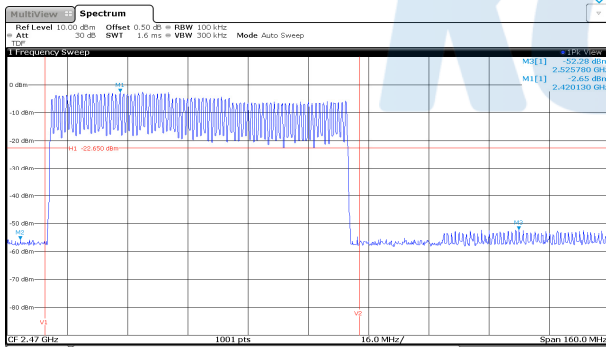

Blank

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0144

Page (47) of (52)


KCTL

Conducted emission


Low ch.

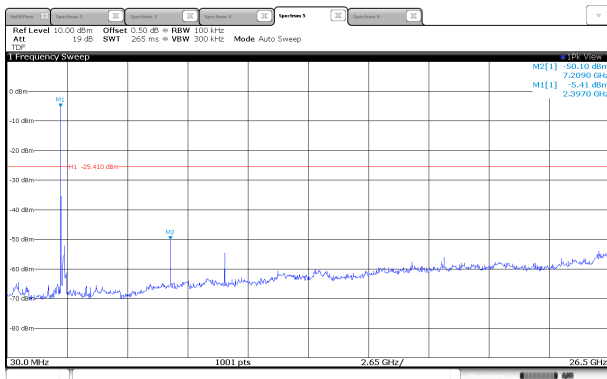

Mid ch.

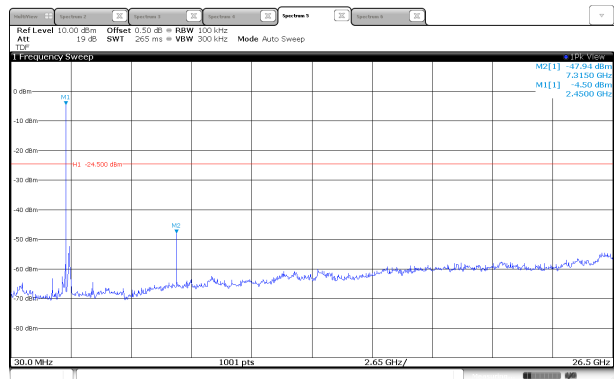

High ch.

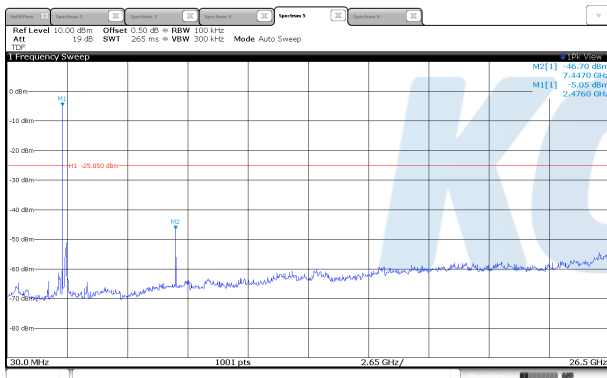

Blank

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0144


Page (48) of (52)

KCTL


Test mode : 8DPSK

Band edge


Low ch.

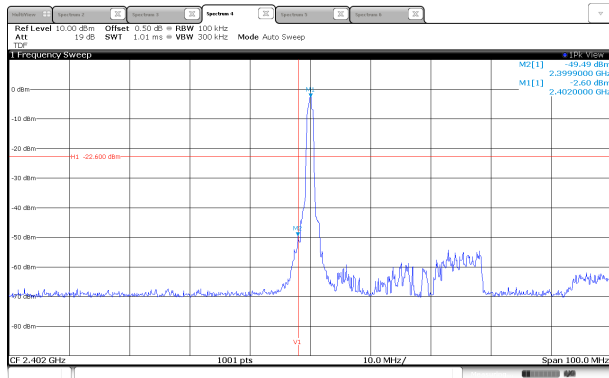

High ch.

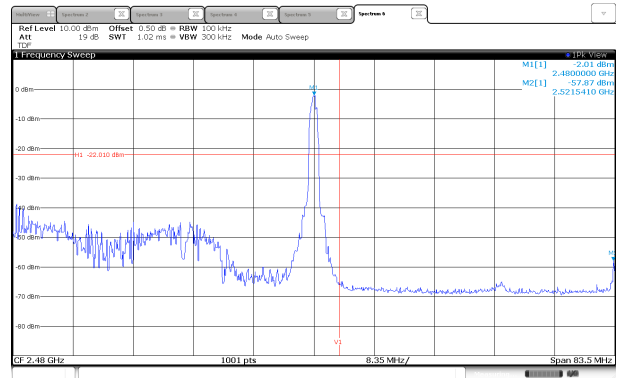

With Hopping

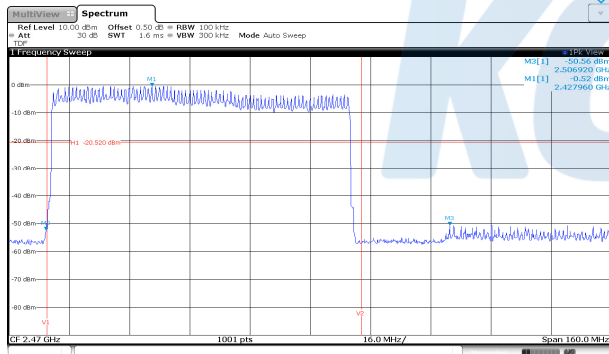

Blank

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0144

Page (49) of (52)


KCTL

Conducted emission


Low ch.

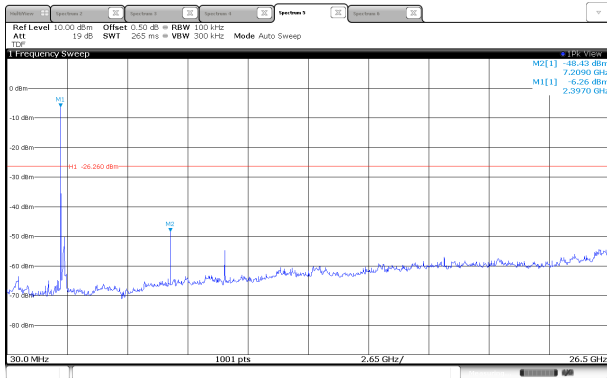

Mid ch.

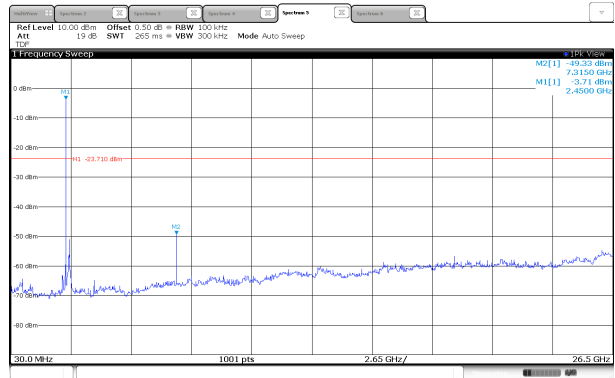


High ch.

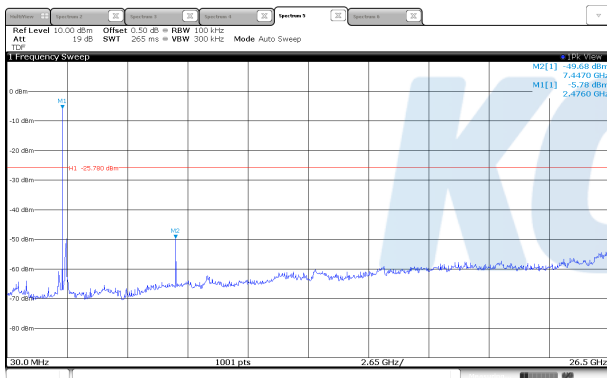

Blank

7.8. AC Conducted emission

Test setup

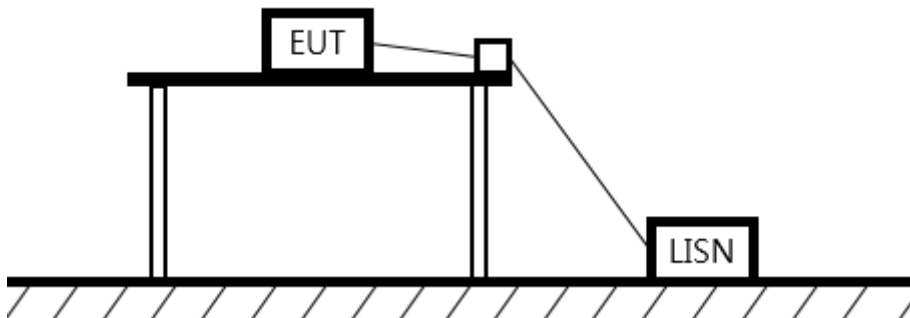

Limit

According to 15.207(a) and RSS-Gen(8.8), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dBμV/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50μH LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity —Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSW50	101013	20.05.13
Spectrum Analyzer	R&S	FSV40	100988	20.01.04
Bluetooth Tester	TESCOM	TC-3000C	3000C000270	20.07.31
Power Divider	AGILENT	11636B	54456	20.01.08
Wideband Power Sensor	R&S	NRP-Z81	102398	20.01.25
ATTENUATOR	R&S	DNF Dämpfungsglied 10 dB in N-50 Ohm	31212	20.05.13
EMI TEST RECEIVER	R&S	ESCI7	100732	20.08.22
Bi-Log Antenna	SCHWARZBECK	VULB 9168	583	20.05.04
Amplifier	SONOMA INSTRUMENT	310N	284608	20.08.22
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	20.05.04
Horn antenna	ETS.lindgren	3116	00086632	20.02.15
Horn antenna	ETS.lindgren	3117	155787	19.10.23
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	20.07.30
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800 -22-10P	2031196	20.02.21
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33 -8P	2000997	20.08.01
LOOP Antenna	R&S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	20.05.14
TWO-LINE V - NETWORK	R&S	ENV216	101358	20.04.05
EMI TEST RECEIVER	R&S	ESCI	100001	20.08.22
Vector Signal Generator	R&S	SMBV100A	257566	20.01.04
Signal Generator	R&S	SMB100A	176206	20.01.25
Cable Assembly	HUBER+SUHNER	SUCOFLEX 102	38488/2	-
Cable Assembly	Radiall	2301762000PJ	1724.66	-
Cable Assembly	HUER+SUHNER	SUCOFLEX 104	MY4342/4	-

End of test report