



FCC Test Report

Report No: FCS202409231W01

Issued for

Applicant:	TRMNL Holdings LLC
Address:	480 Stewart Road, LaGrange, GA 30241
Product Name:	TRMNL
Brand Name:	TRMNL
Model Name:	OG
Series Model:	N/A
FCC ID:	2BFWO-OG
<p>Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com</p>	

TEST RESULT CERTIFICATION

Applicant's Name.....: TRMNL Holdings LLC
Address.....: 480 Stewart Road, LaGrange, GA 30241
Manufacture's Name.....: TRMNL Holdings LLC
Address.....: 480 Stewart Road, LaGrange, GA 30241

Product Description

Product Name.....: TRMNL
Model Name.....: TRMNL
Brand Name.....: OG
Series Model.....: N/A
Test Standards.....: FCC Part15.247
Test Procedure.....: ANSI C63.10-2013

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test.....:


Date (s) of performance of tests.: September 13, 2024 ~ September 18, 2024

Date of Issue.....: September 18, 2024

Test Result.....: Pass

Tested by : 

(Scott Shen)

Reviewed by : 

(Duke Qian)

Approved by : 

(Jack Wang)




Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.4 EQUIPMENTS LIST	12
3. 6DB BANDWIDTH	13
3.1 Limit	13
3.2 Test Procedure	13
3.3 Test setup	13
3.4 Test results	14
4 CONDUCTED OUTPUT POWER	18
4.1 limit	18
4.2 test procedure	18
4.3 TEST SETUP	18
4.5 test results	18
5. POWER SPECTRAL DENSITY	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	19
5.3 TEST SETUP	19
5.4 TEST RESULTS	20
5.5 original test data	21
6. Band edge and spurious(conducted)	26
6.1 LIMIT	26
6.2 TEST PROCEDURE	26
6.3 TEST SETUP	26
6.5 TEST RESULTS	27
6.5 Original test data	27
6.6 Spurious emissions	31

Table of Contents	Page
7 RADIATED EMISSION MEASUREMENT	33
8 CONDUCTED EMISSION TEST	48
9. ANTENNA REQUIREMENT	52
9.1 STANDARD REQUIREMENT	52
9.2 RESULT	52



Revision History

Rev.	Issue Date	Effect Page	Contents
00	October 24, 2024	N/A	Initial Issue

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC 15.247 (a) (2)	6dB Bandwidth	PASS	--
FCC 15.247 (b) (3)	Conducted Output Power	PASS	--
FCC 15.247 (e)	Power Spectral Density	PASS	--
FCC 15.247 (d)	Band-edge and Spurious Emissions (Conducted)	PASS	--
FCC 15.247 (d) FCC 15.209 FCC 15.205	Radiated Spurious Emissions	PASS	--
FCC 15.247 (d) FCC 15.209 FCC 15.205	Radiated Band Edge Compliance	PASS	--
FCC 15.207	Power Line Conducted Emission	PASS	--
FCC 15.203	Antenna requirement	PASS	--
15.205	Restricted Band Edge Emission	PASS	--

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory	
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan	
Telephone:	+86-769-27280901	
Fax:	+86-769-27280901	
Laboray Accreditations:		
FCC Test Firm Registration Number:	514908	
CNAS Number:	L15566	
Designation number:	CN0127	
A2LA accreditation number:	5545.01	
ISED Number:	25801	
CAB ID:	CN0097	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.988 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions radiated (9KHz -30MHz)	± 3.1 dB
6	All emissions,radiated(<1G) 30MHz-1000MHz	± 5.2 dB
7	All emissions,radiated 1GHz -18GHz	± 4.66 dB
8	All emissions,radiated 18GHz -40GHz	± 4.31 dB
9	Occupied bandwidth	± 0.3 dB
10	PSD	± 0.48 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	TRMNL
Trade Name	TRMNL
Model Name	OG
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Operation frequency	IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz
Modulation:	IEEE 802.11b: DSSS (CCK, QPSK, BPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20,: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate:	IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: up to 20MHz max 65Mbps, 40MHz max
Power supply	INPUT:DC 5V=1A
Battery	3.7V 1800mAh 6.66Wh and 3.7V 2500mAh 9.25Wh According to customer needs with different capacity of battery use
Number of samples	FCS202409231
Sample number	803160:Battey 3.7V 1800mAh 6.66Wh 603659:Battey 3.7V 2500mAh 9.25Wh
Hardware version number	1.5.4
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

3. Table for Filed Antenna


Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	ESP-ANT D-H	PCB antenna	N/A	4.16	Antenna

1


2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Block diagram of EUT configuration for test

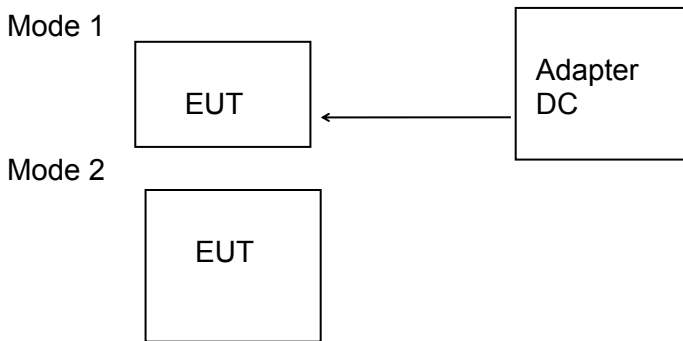

Test software:



The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	8	1	LCHCH1	2412
	8	1	MCH: CH6	2437
	8	1	HCH:CH11	2462
IEEE 802.11g	20	6	LCH: CH1	2412
	20	6	MCH: CH6	2437
	20	6	HCH: CH11	2462
IEEE 802.11n HT20	20	MCS8	LCH:CH1	2412
	20	MCS8	MCH: CH6	2437
	20	MCS8	HCHCH11	2462

Note:

- (1) According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test,
- (2) During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	Xiaomi	AD652G	N/A	Test use
2	USB cable	N/A	0.25m	N/A	Test use

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2024. 08.28	2025. 08.27
Signal Analyzer	R&S	FSV40-N	FCS-E012	2024. 08.28	2025. 08.27
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2024. 08.28	2025. 08.27
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2024. 08.28	2025. 08.27
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2024. 08.28	2025. 08.27
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2024. 08.28	2025. 08.27
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2024. 08.28	2025. 08.27
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2024. 08.28	2025. 08.27
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2024. 08.28	2025. 08.27
Temperature & Humidity	HTC-1	victor	FCS-E005	2024. 08.28	2025. 08.27

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2024. 08.28	2025. 08.27
LISN	R&S	ENV216	FCS-E007	2024. 08.28	2025. 08.27
LISN	ETS	3810/2NM	FCS-E009	2024. 08.28	2025. 08.27
Temperature & Humidity	HTC-1	victor	FCS-E008	2024. 08.28	2025. 08.27

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2024. 08.28	2025. 08.27
Spectrum Analyzer	Agilent	E4447A	MY50180039	2024. 08.28	2025. 08.27
Spectrum Analyzer	R&S	FSV-40	101499	2024. 08.28	2025. 08.27
Power Sensor	Agilent	UX2021XA	FCS-E021	2024. 08.28	2025. 08.27

3. 6DB BANDWIDTH

3.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz

3.2 Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows

RBW:	100kHz
VBW:	300kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission


3.3 Test setup















3.4 Test results





TestMode	Channel (MHz)	99%OBW (MHz)	6dB Bandwidth (MHz)	Frequency Range(MHz)	Verdict
802.11b	2412MHz	12.817	10.170	2400-2483.5	Pass
802.11b	2437MHz	13.067	10.200	2400-2483.5	Pass
802.11b	2462MHz	12.916	9.690	2400-2483.5	Pass
802.11g	2412MHz	16.968	15.960	2400-2483.5	Pass
802.11g	2437MHz	17.352	16.410	2400-2483.5	Pass
802.11g	2462MHz	16.994	15.810	2400-2483.5	Pass
802.11n 20	2412MHz	17.794	16.380	2400-2483.5	Pass
802.11n 20	2437MHz	17.935	17.640	2400-2483.5	Pass
802.11n 20	2462MHz	17.827	16.440	2400-2483.5	Pass

3.5 Original Test Data

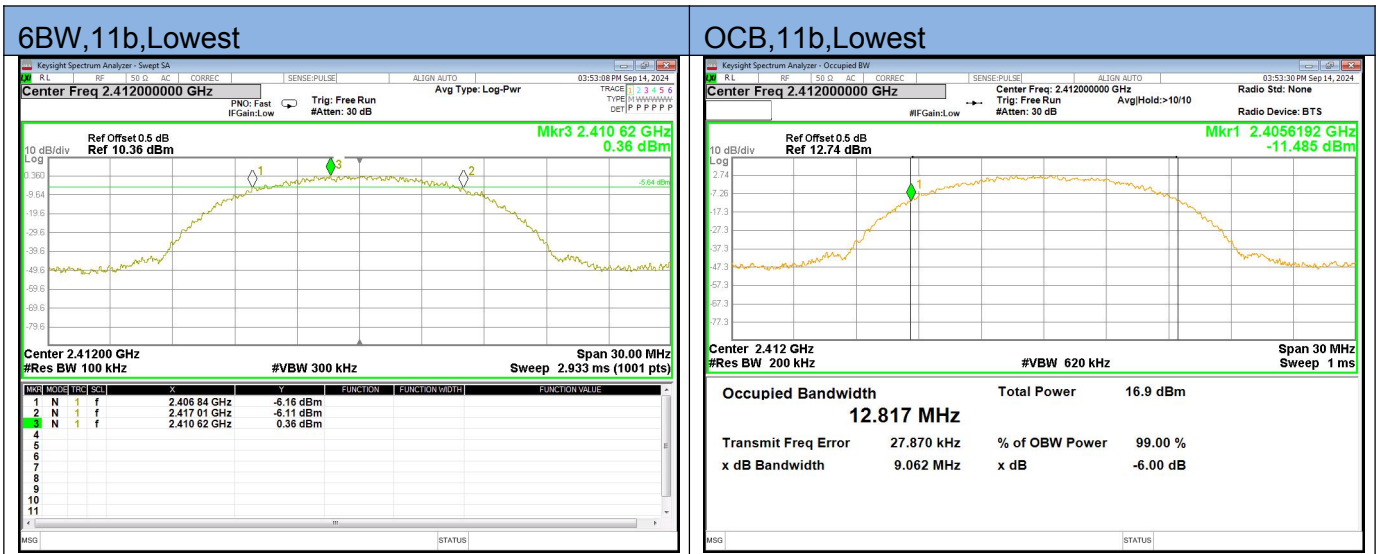

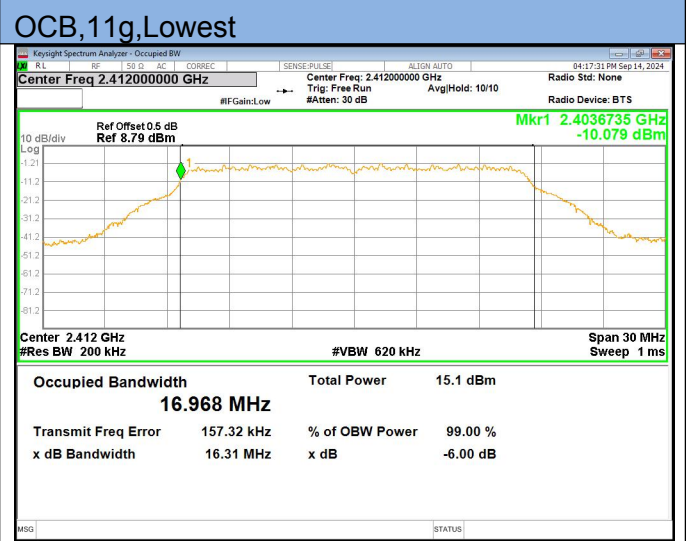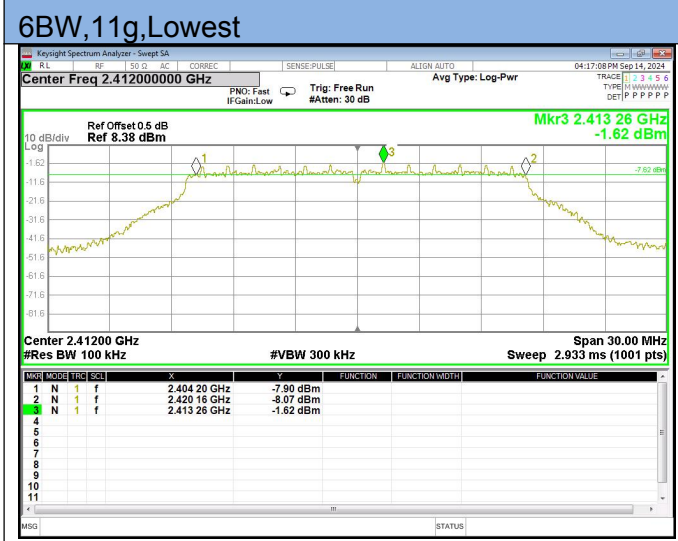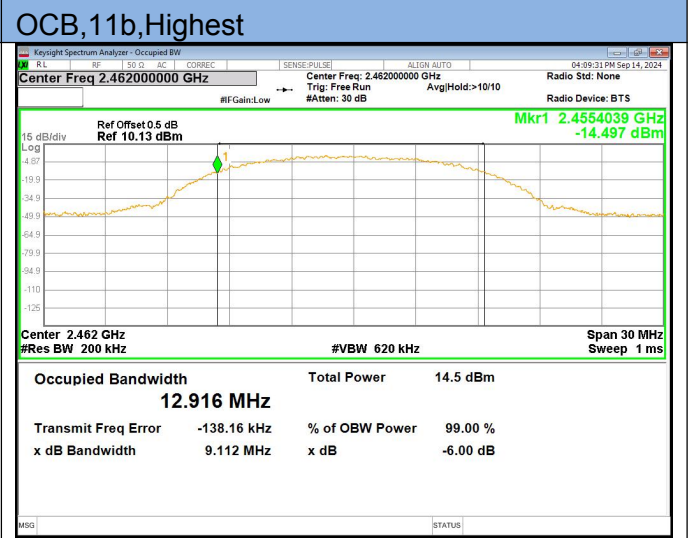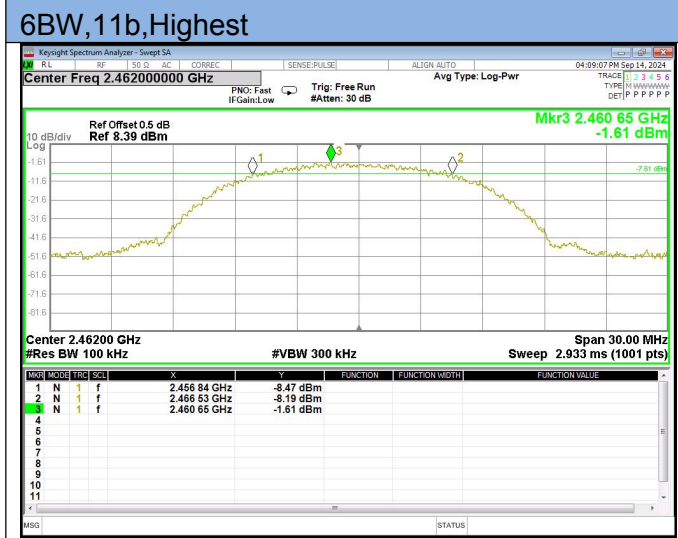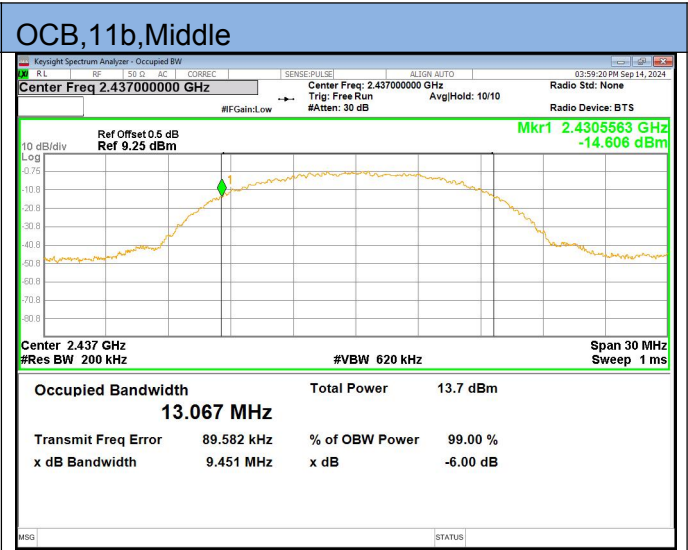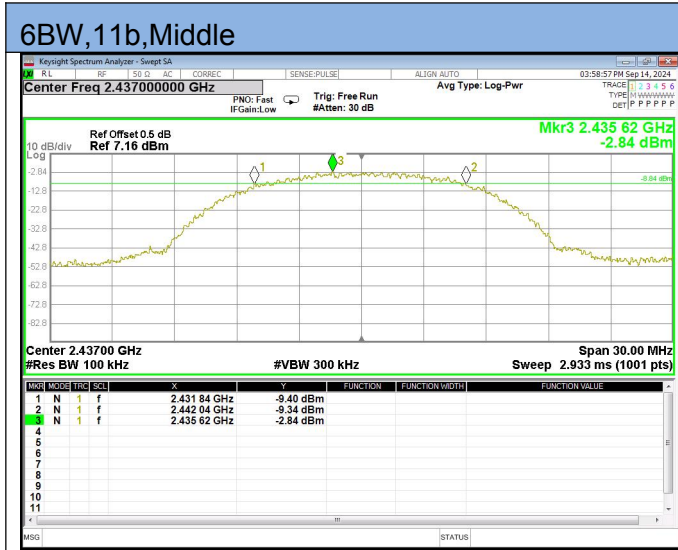

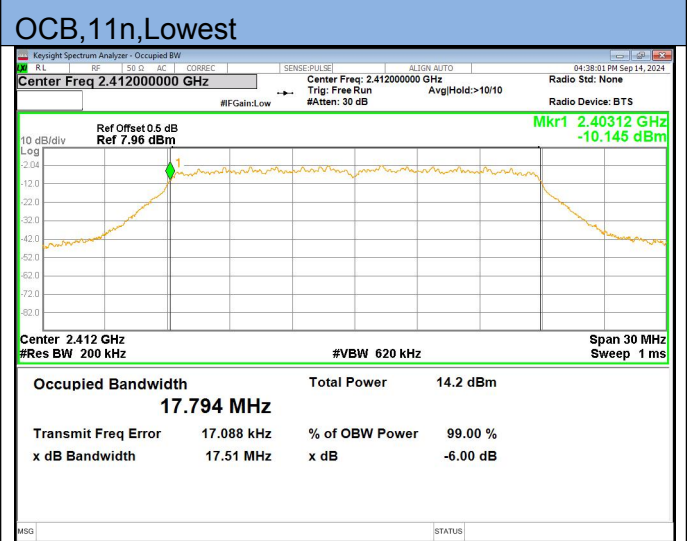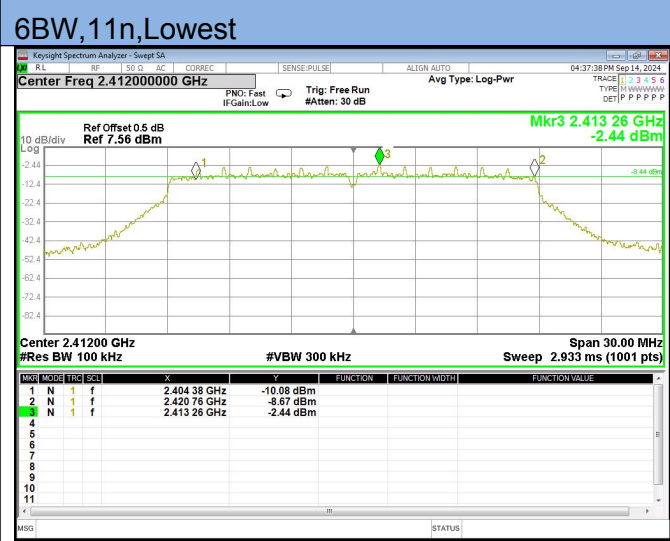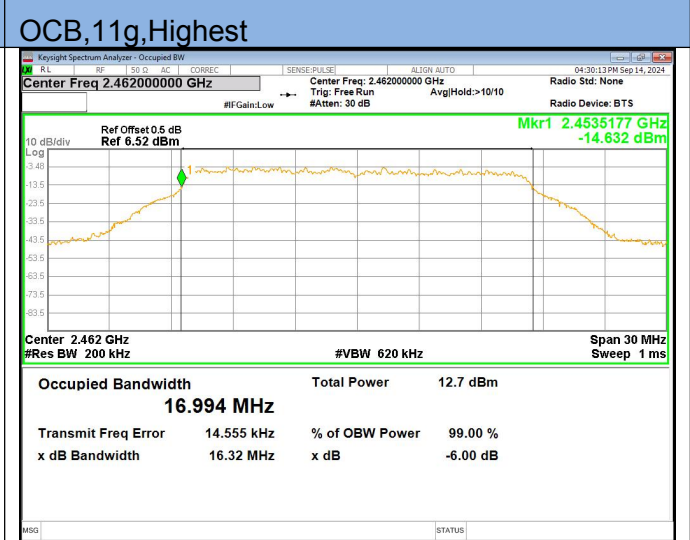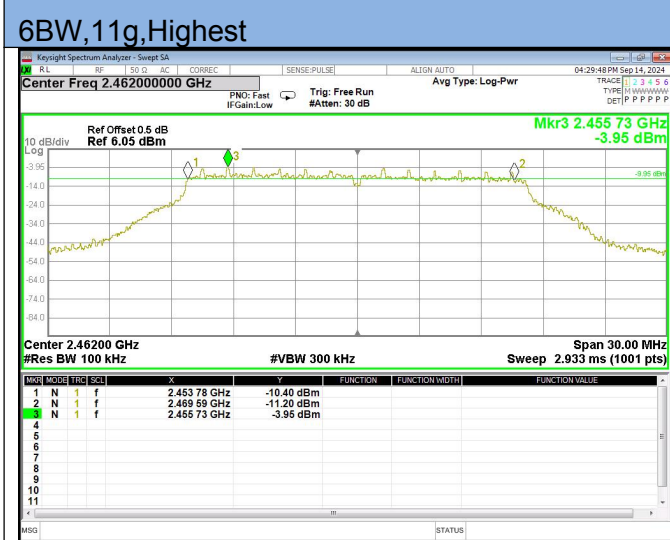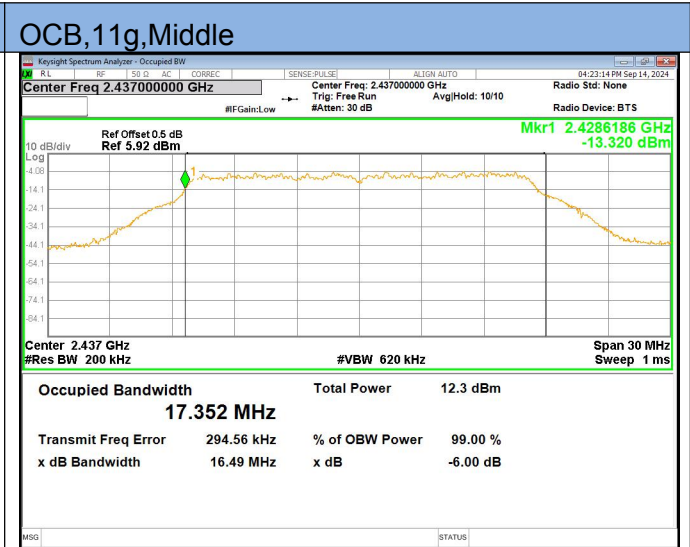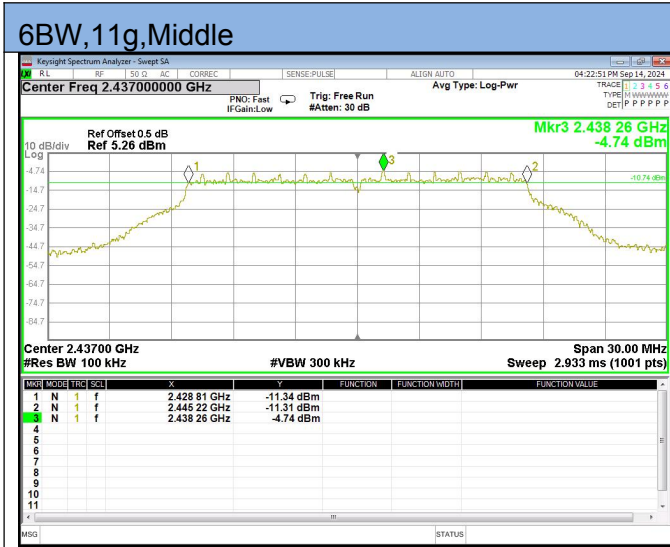

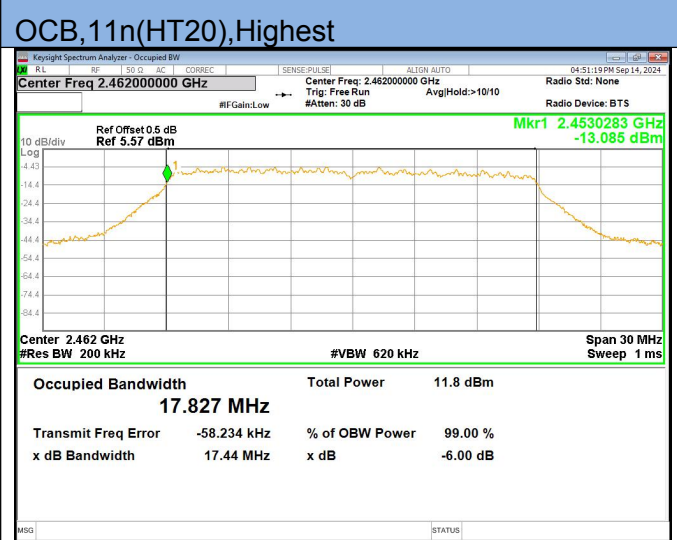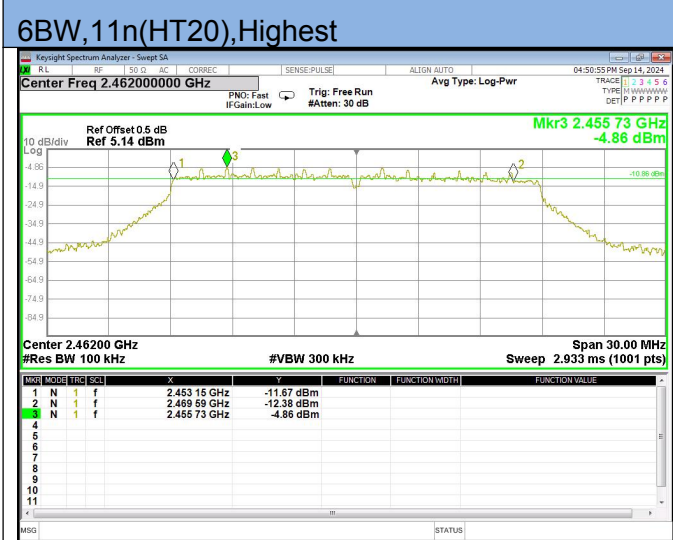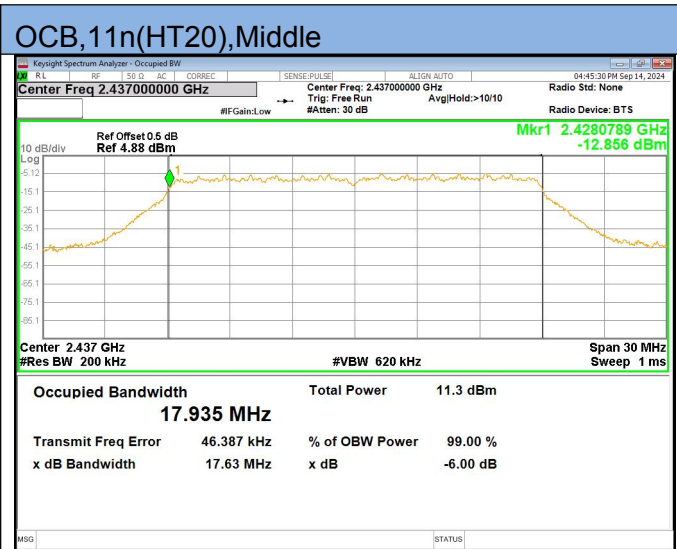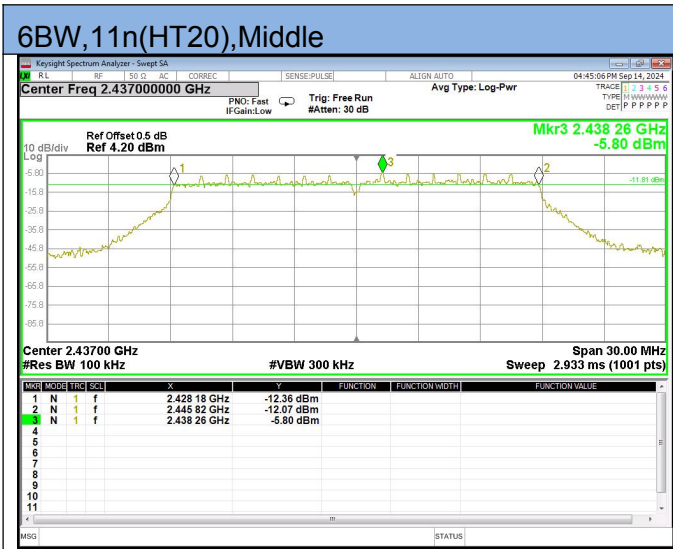

4 CONDUCTED OUTPUT POWER

4.1 limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 test procedure

- a. Connect each EUT's antenna output to power sensor by RF cable and attenuator
- b. Measure the PK output power of each antenna port by power sensor.

4.3 TEST SETUP



4.5 test results

TestMode	Channel (MHz)	Result (dBm)	Limit (dBm)	Verdict
802.11b	2412MHz	14.56	30	Pass
802.11b	2437MHz	11.38	30	Pass
802.11b	2462MHz	12.12	30	Pass
802.11g	2412MHz	16.72	30	Pass
802.11g	2437MHz	13.92	30	Pass
802.11g	2462MHz	14.32	30	Pass
802.11n 20	2412MHz	15.64	30	Pass
802.11n 20	2437MHz	12.77	30	Pass
802.11n 20	2462MHz	13.26	30	Pass

5. POWER SPECTRAL DENSITY

5.1 LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 TEST SETUP




5.4 TEST RESULTS


TestMode	Channel (MHz)	Result (dBm/3KHz)	Limit (dBm/3KHz)	Verdict
802.11b	2412MHz	-14.57	8	Pass
802.11b	2437MHz	-17.82	8	Pass
802.11b	2462MHz	-17.21	8	Pass
802.11g	2412MHz	-16.88	8	Pass
802.11g	2437MHz	-19.43	8	Pass
802.11g	2462MHz	-19.06	8	Pass
802.11n 20	2412MHz	-17.16	8	Pass
802.11n 20	2437MHz	-20.01	8	Pass
802.11n 20	2462MHz	-19.59	8	Pass

5.5 original test data


802.11b-2412MHz

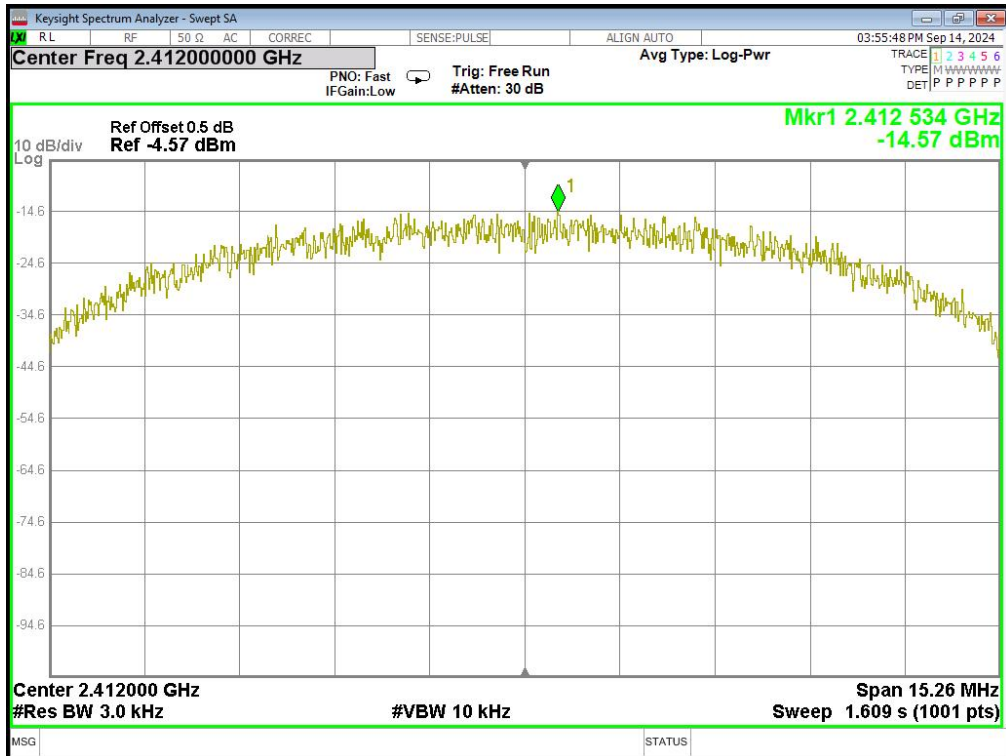

802.11b-2437MHz

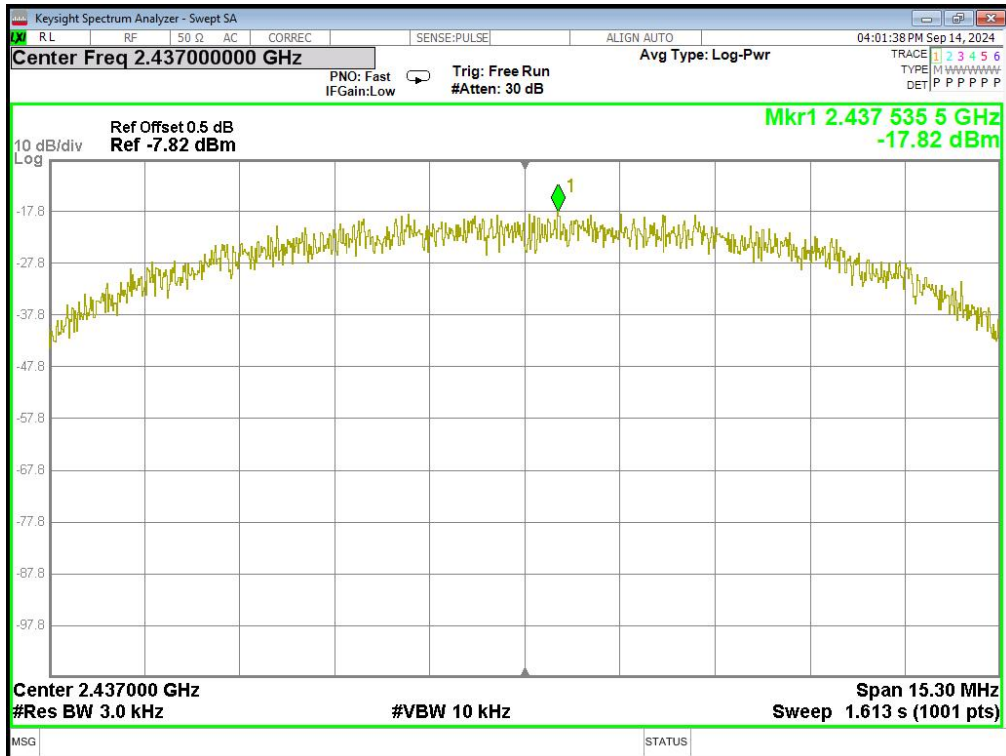


802.11b-2462MHz

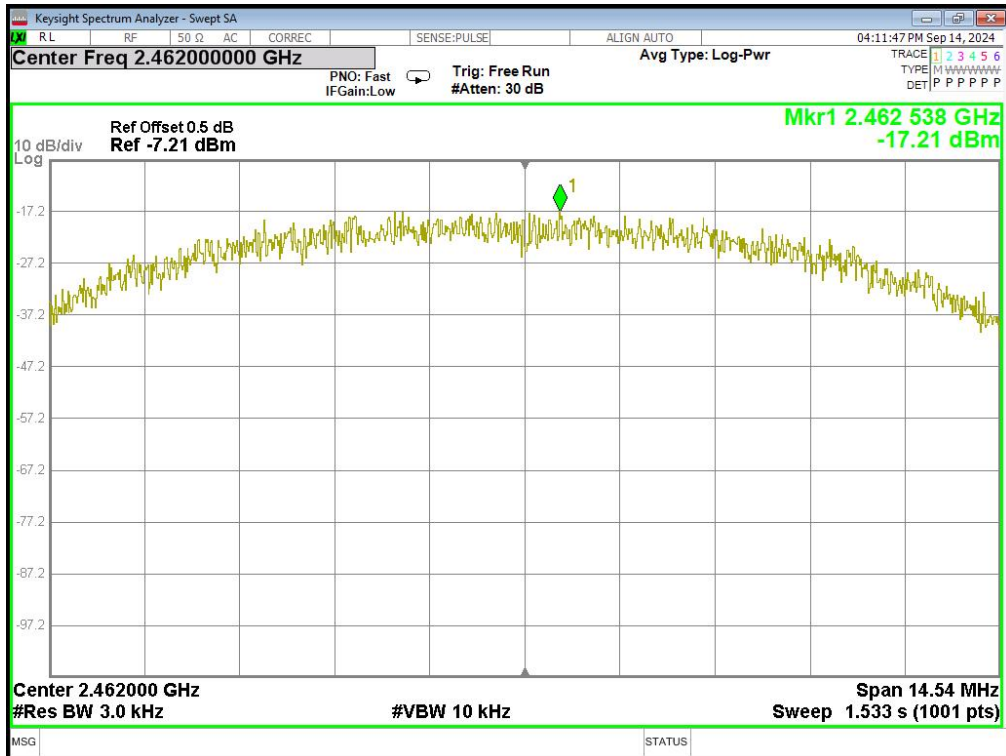


802.11g-2412MHz




802.11g-2437MHz

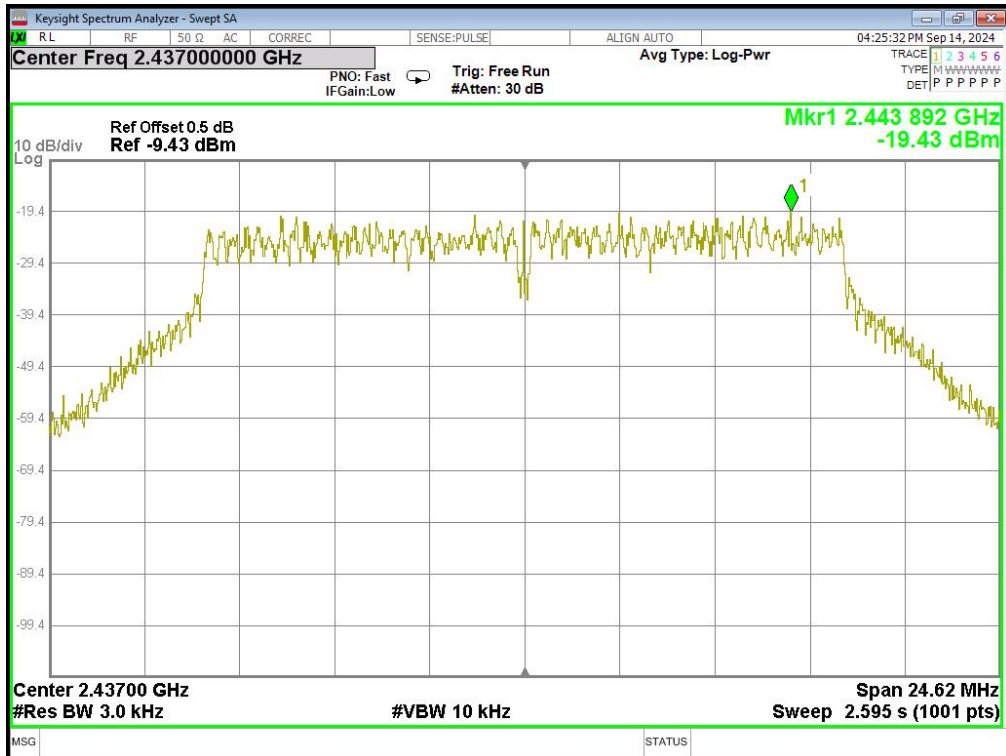


802.11g-2462MHz

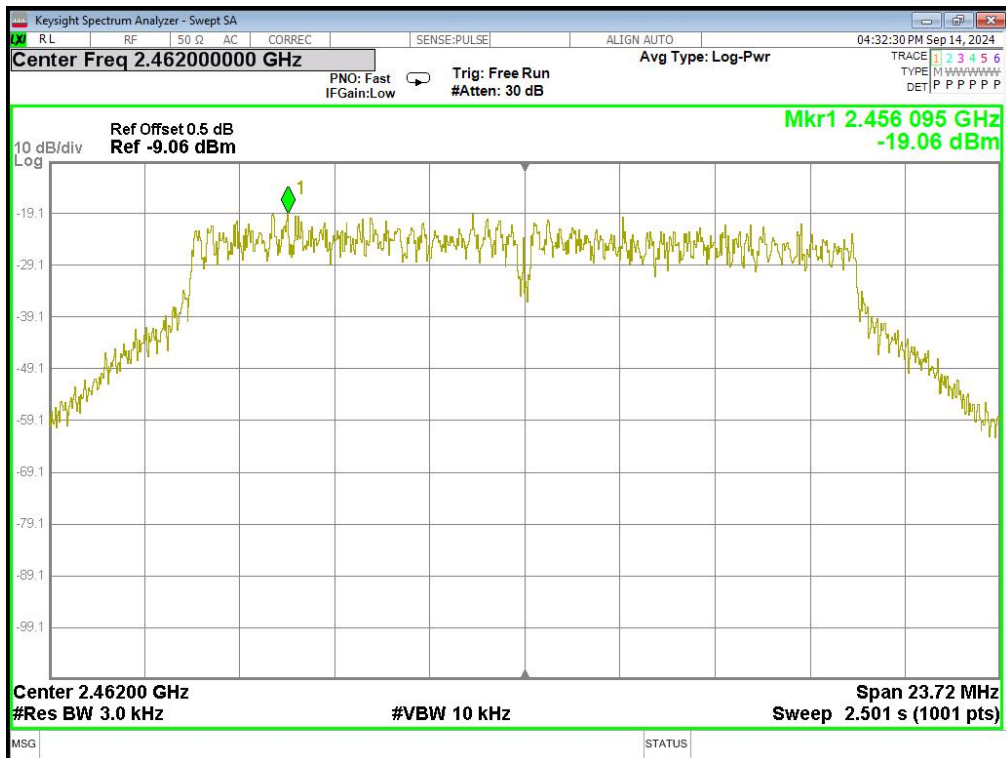

802.11n 20-2412MHz

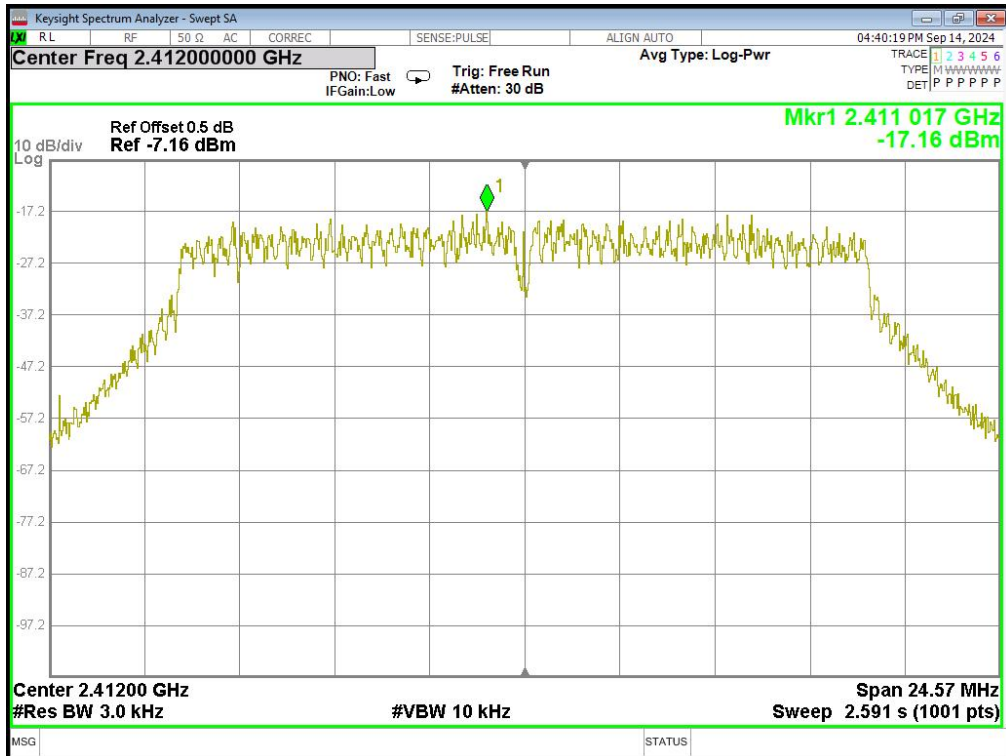

802.11n 20-2437MHz

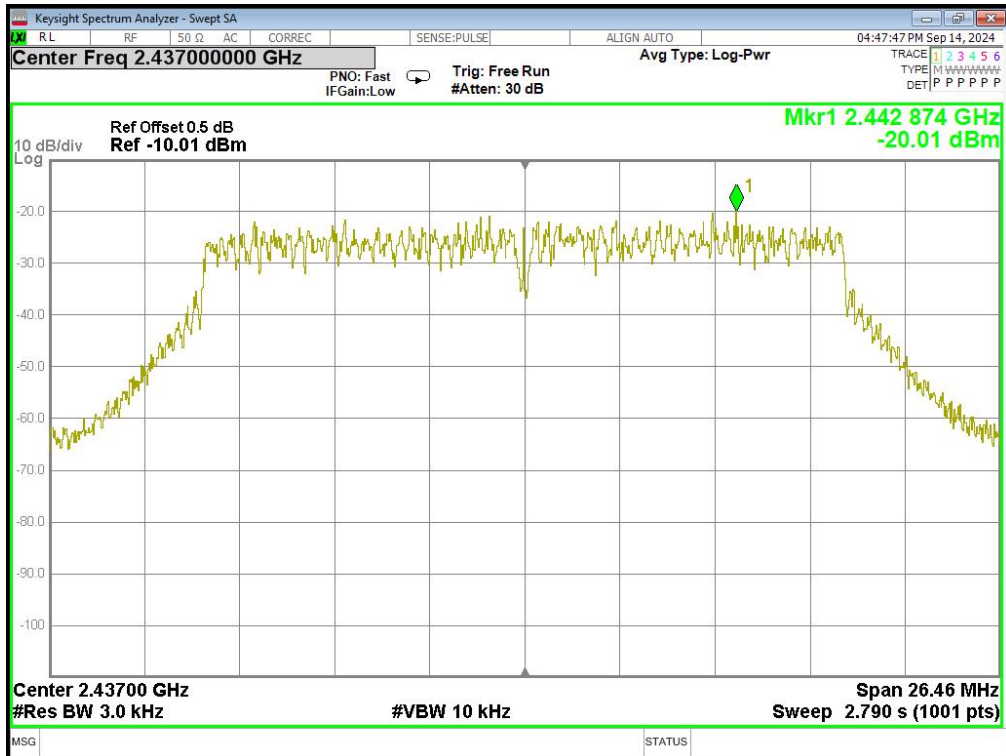

802.11n 20-2462MHz

