

6.4 Peak Power Spectral Density – 802.11a/n §15.407 (a)(1),(5) / RSS-210 [A9.2]

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in a continuous transmission mode at the appropriate center frequencies. Method SA-1, as defined in KDB 789033, was used to measure the power spectral density.

The maximum achievable duty cycle was found to be 93.5%. A video trigger over 100 traces was used to ensure that average measurements were made only at times during which the transmitter was at its maximum power level. The minimum number of sweep points required to ensure that the bin-to-bin spacing is such that narrowband emissions are not lost is equal to $2 \times \text{Span} / \text{RBW} = 2 \times 20\text{MHz} / 1\text{MHz} = 40$ sweep points.

The maximum permissible peak power spectral density is 4dBm/MHz in the 5.15GHz – 5.25GHz band and 11dBm/MHz in the 5.25GHz – 5.35 GHz and 5.47 – 5.725GHz bands.









Figure 6-3. Test Instrument & Measurement Setup

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 27 of 84	


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	1.86	4.0	-2.15
	5200	40	a	6	1.74	4.0	-2.26
	5240	48	a	6	1.85	4.0	-2.15
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	1.62	4.0	-2.38
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	1.84	4.0	-2.16
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	2.15	4.0	-1.85
	5190	38	n (40MHz)	13.5/15 (MCS0)	-2.41	4.0	-6.41
	5230	46	n (40MHz)	13.5/15 (MCS0)	-2.36	4.0	-6.36
Band II	5260	52	a	6	1.68	11.0	-9.32
	5280	56	a	6	2.37	11.0	-8.63
	5320	64	a	6	1.93	11.0	-9.07
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	2.96	11.0	-8.04
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	1.70	11.0	-9.31
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	2.53	11.0	-8.47
	5270	54	n (40MHz)	13.5/15 (MCS0)	-2.43	11.0	-13.43
	5310	62	n (40MHz)	13.5/15 (MCS0)	-2.45	11.0	-13.45
Band III	5500	100	a	6	2.49	11.0	-8.51
	5580	116	a	6	2.23	11.0	-8.77
	5700	140	a	6	2.24	11.0	-8.76
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	1.79	11.0	-9.21
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	1.99	11.0	-9.01
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	2.02	11.0	-8.98
	5510	102	n (40MHz)	13.5/15 (MCS0)	-2.92	11.0	-13.92
	5550	110	n (40MHz)	13.5/15 (MCS0)	-3.42	11.0	-14.42
	5670	134	n (40MHz)	13.5/15 (MCS0)	-3.50	11.0	-14.50

Table 6-6. Conducted Power Spectral Density Measurements

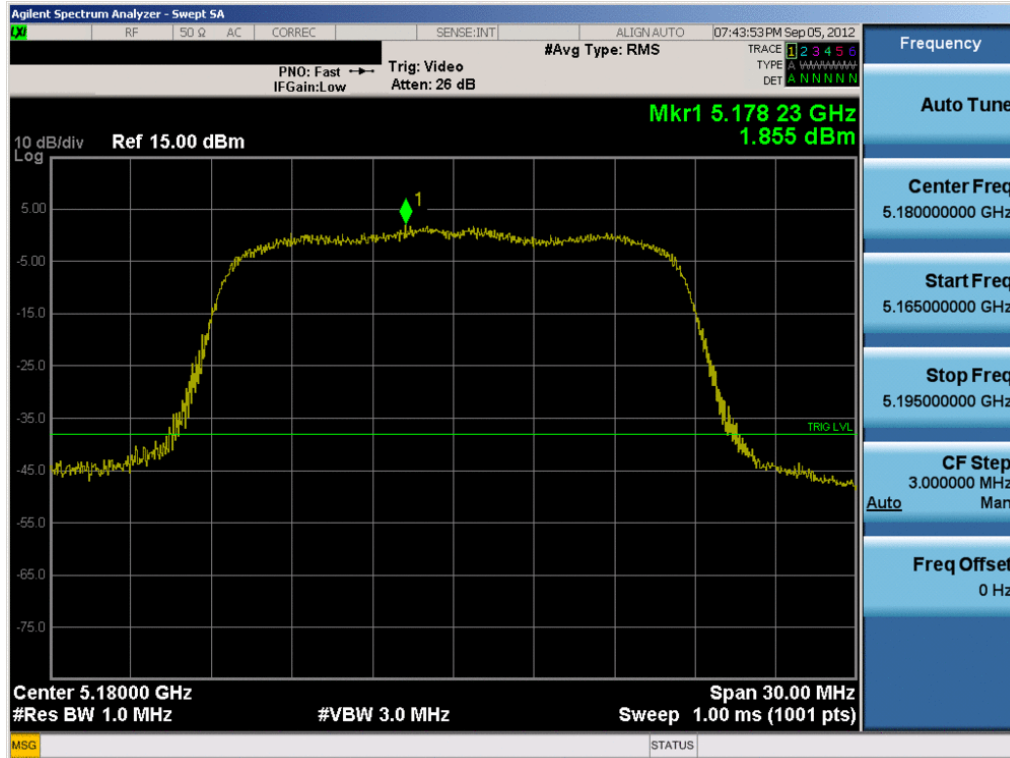

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 28 of 84

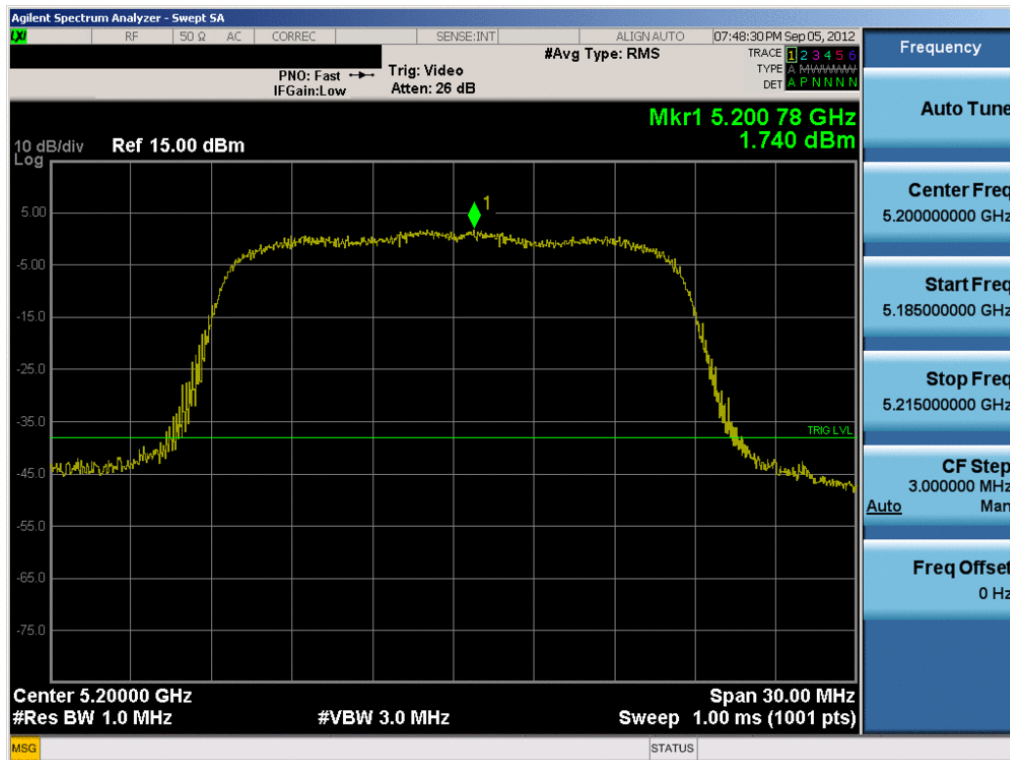


Plot 6-26. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)




Plot 6-27. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 29 of 84

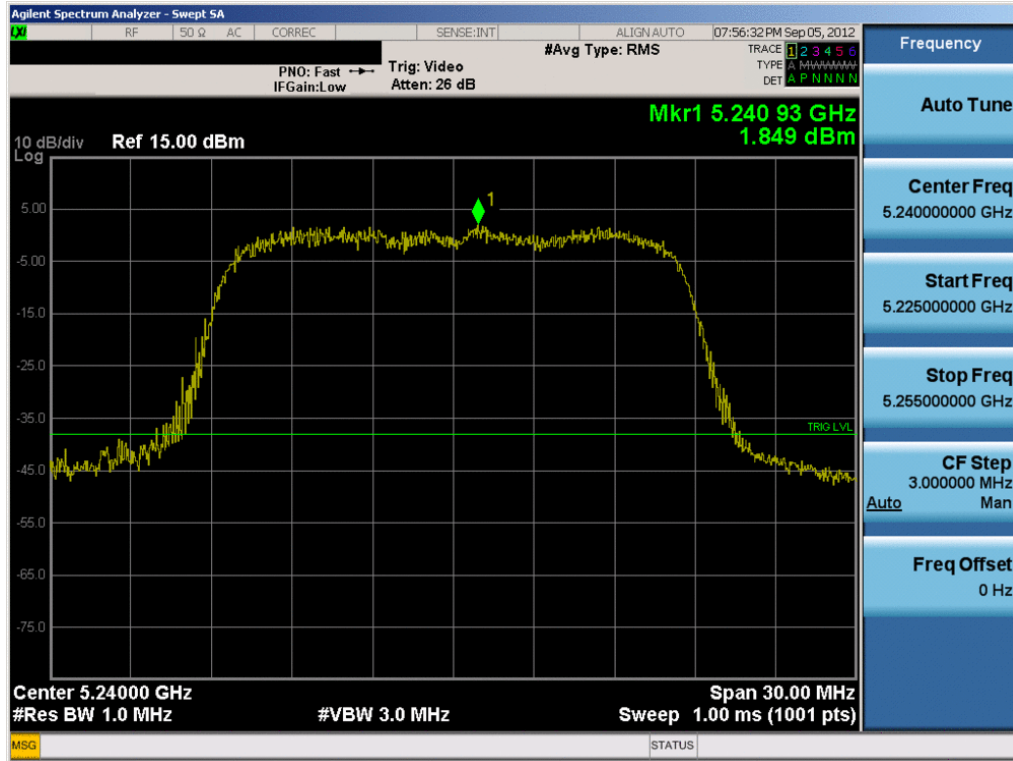


Plot 6-28. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

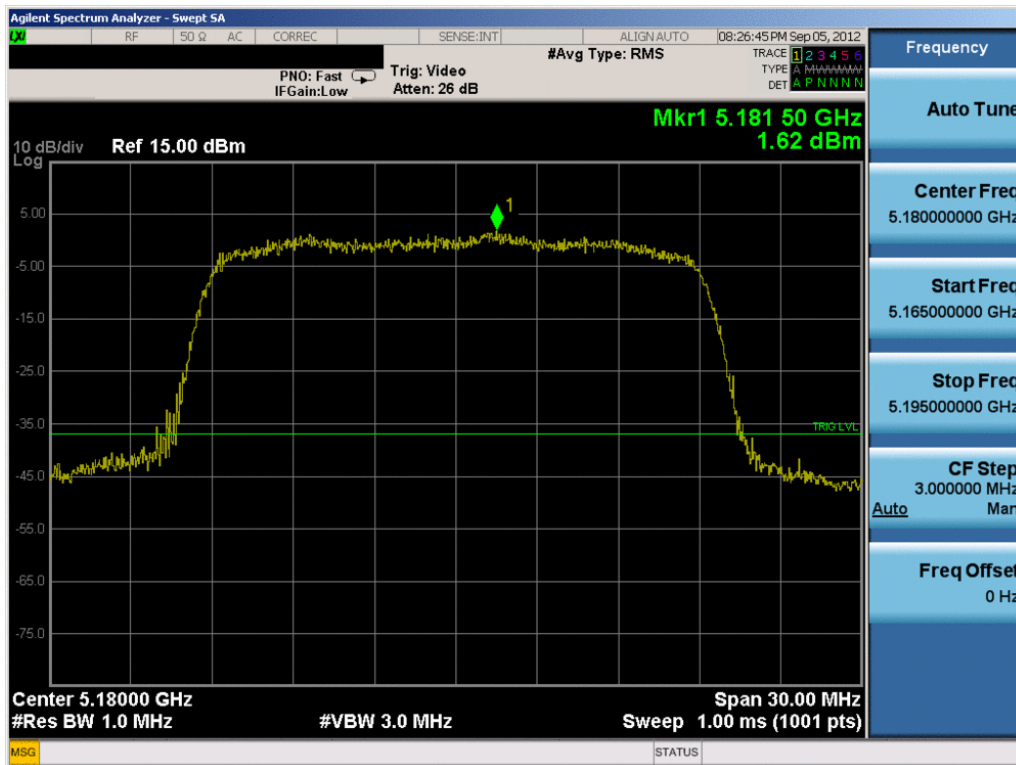


Plot 6-29. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 30 of 84

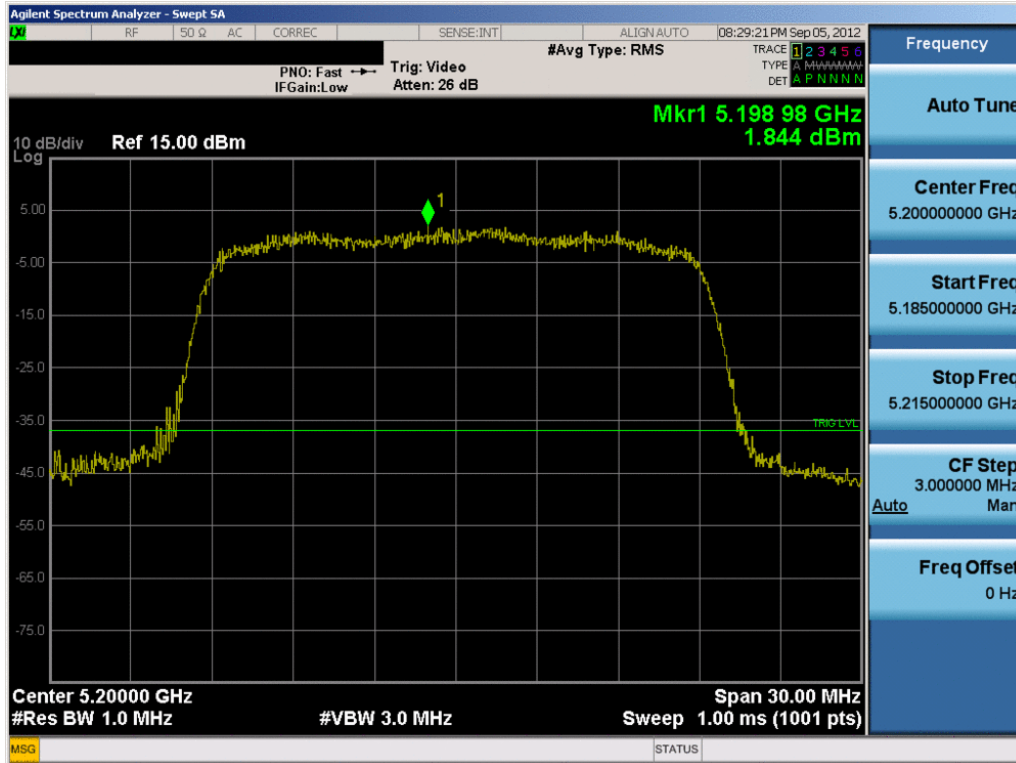


Plot 6-30. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

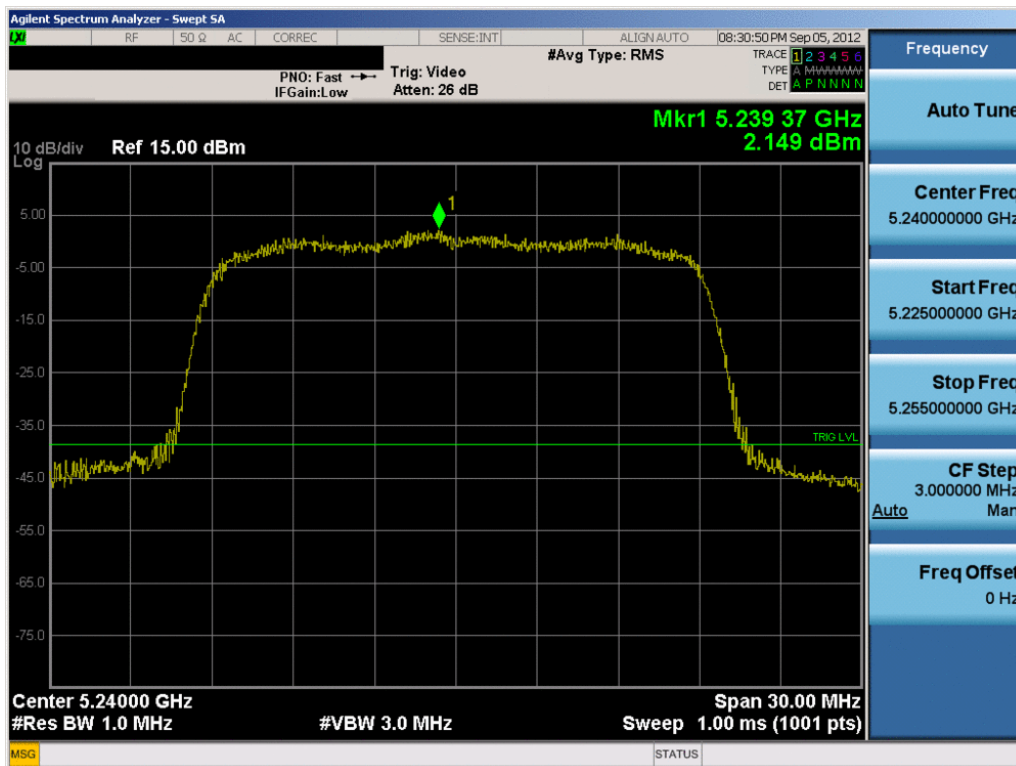


Plot 6-31. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 31 of 84

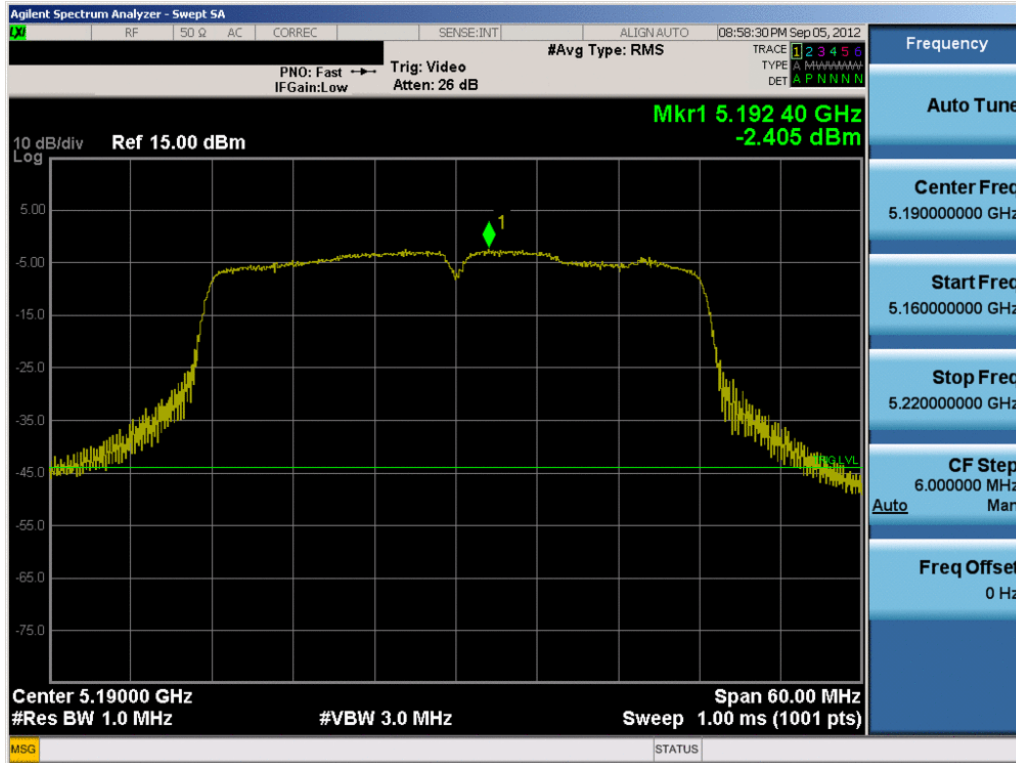


Plot 6-32. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

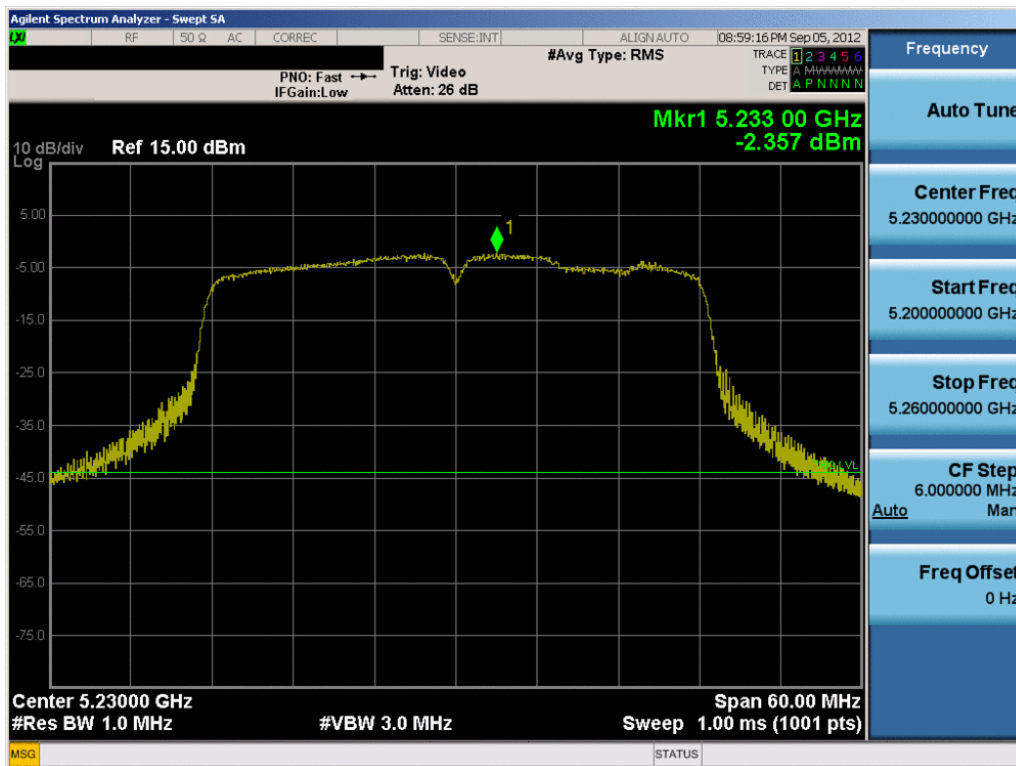


Plot 6-33. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 32 of 84

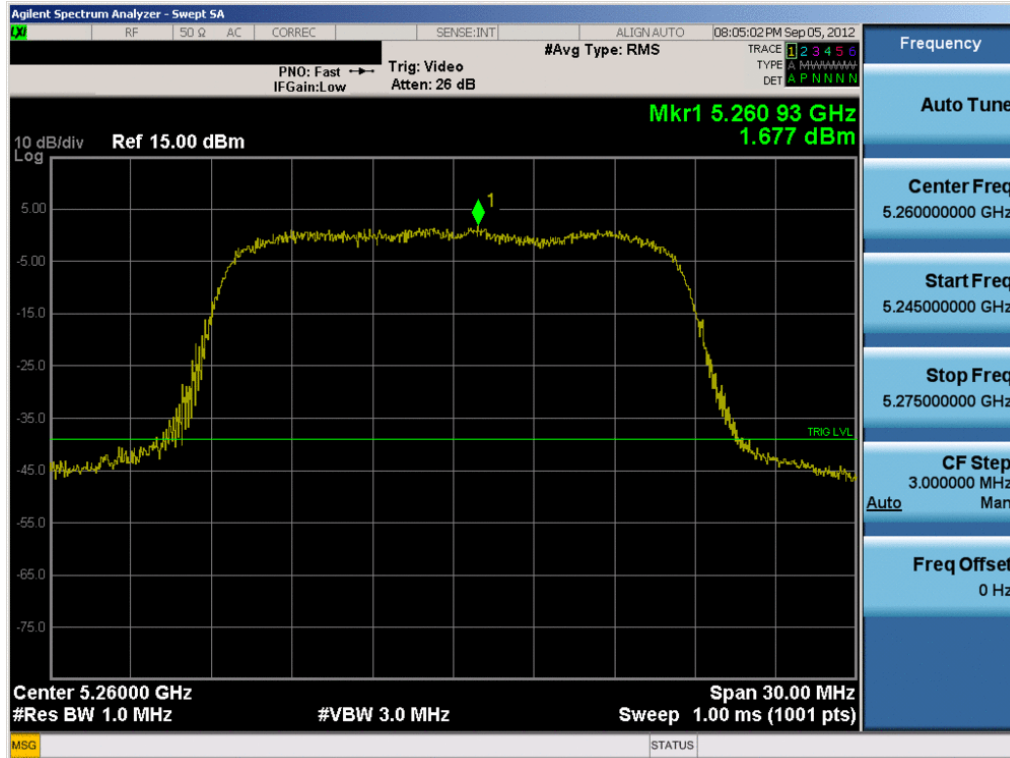


Plot 6-34. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 52)

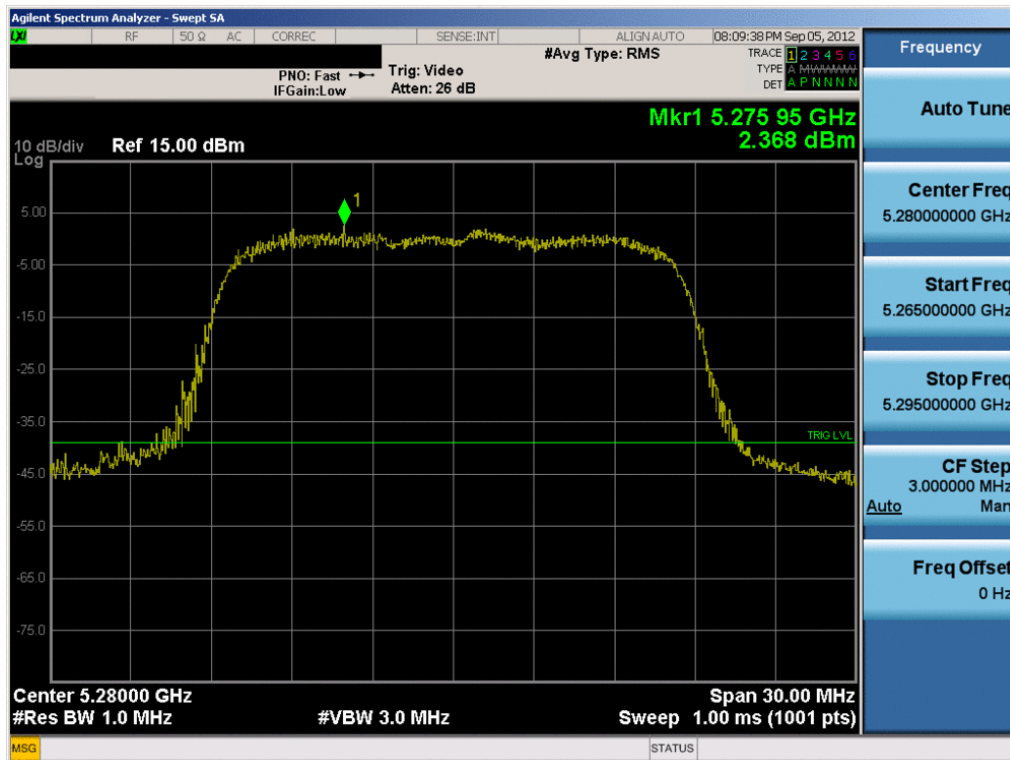


Plot 6-35. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 33 of 84

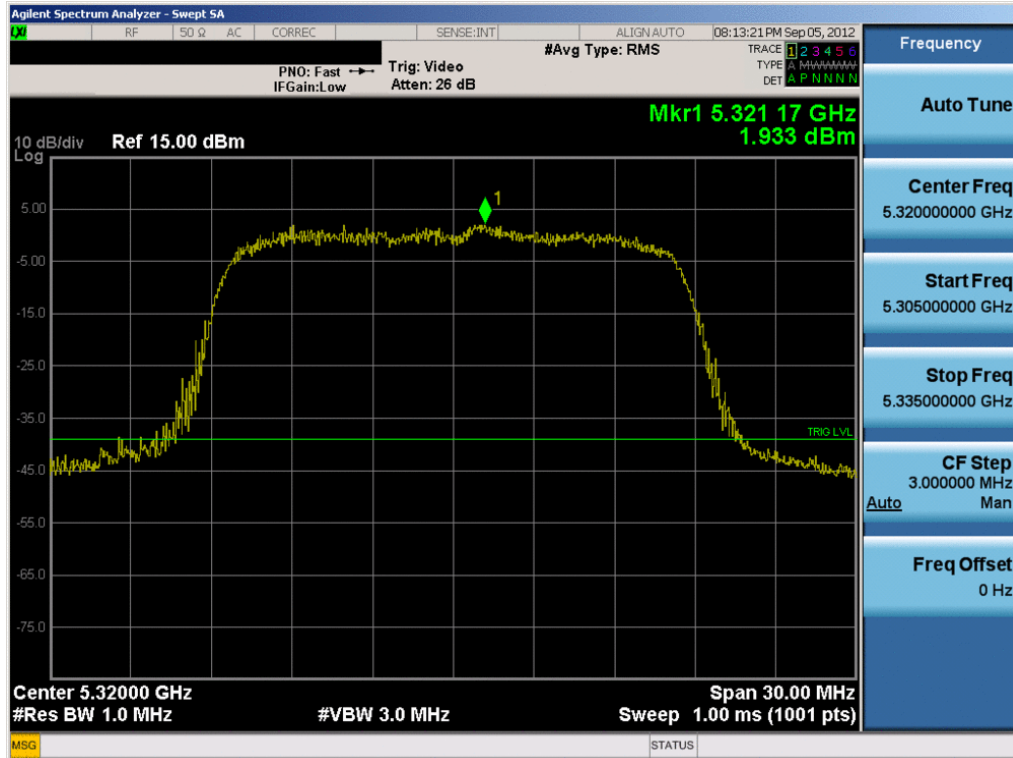


Plot 6-36. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 64)

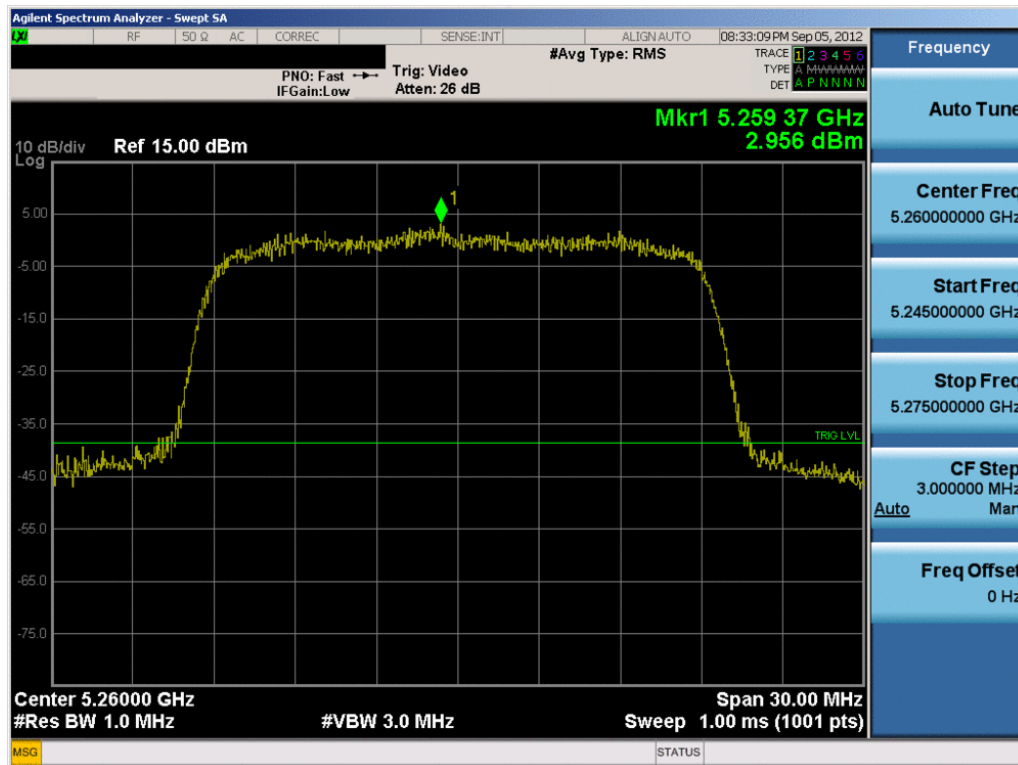


Plot 6-37. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 34 of 84

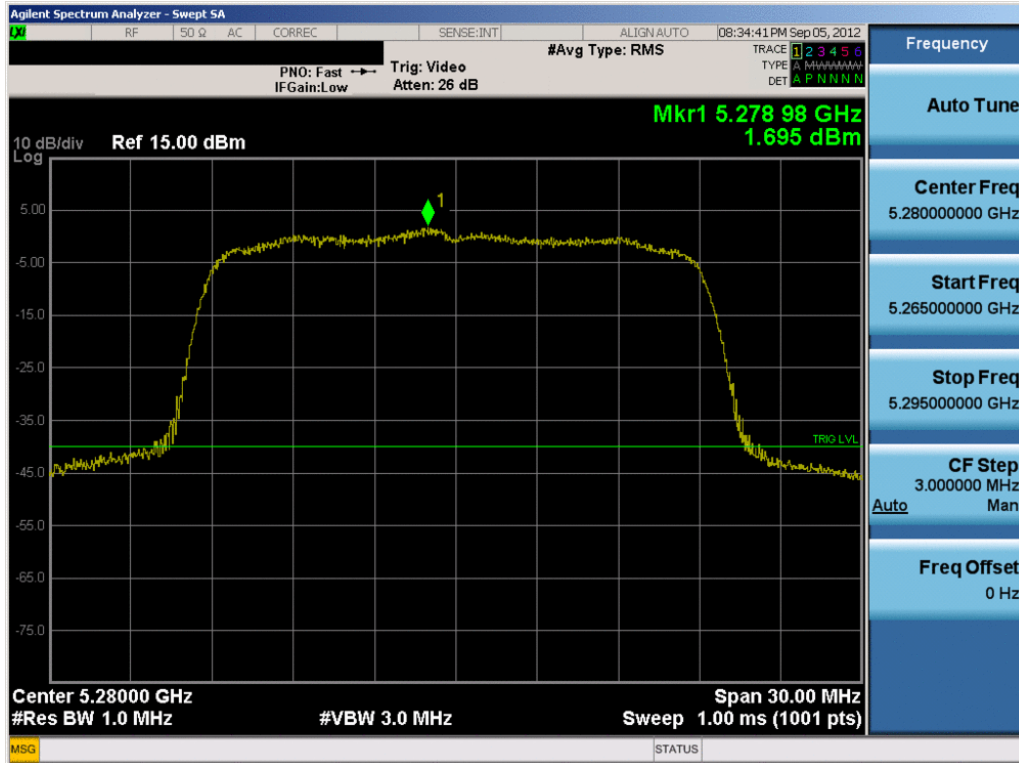


Plot 6-38. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

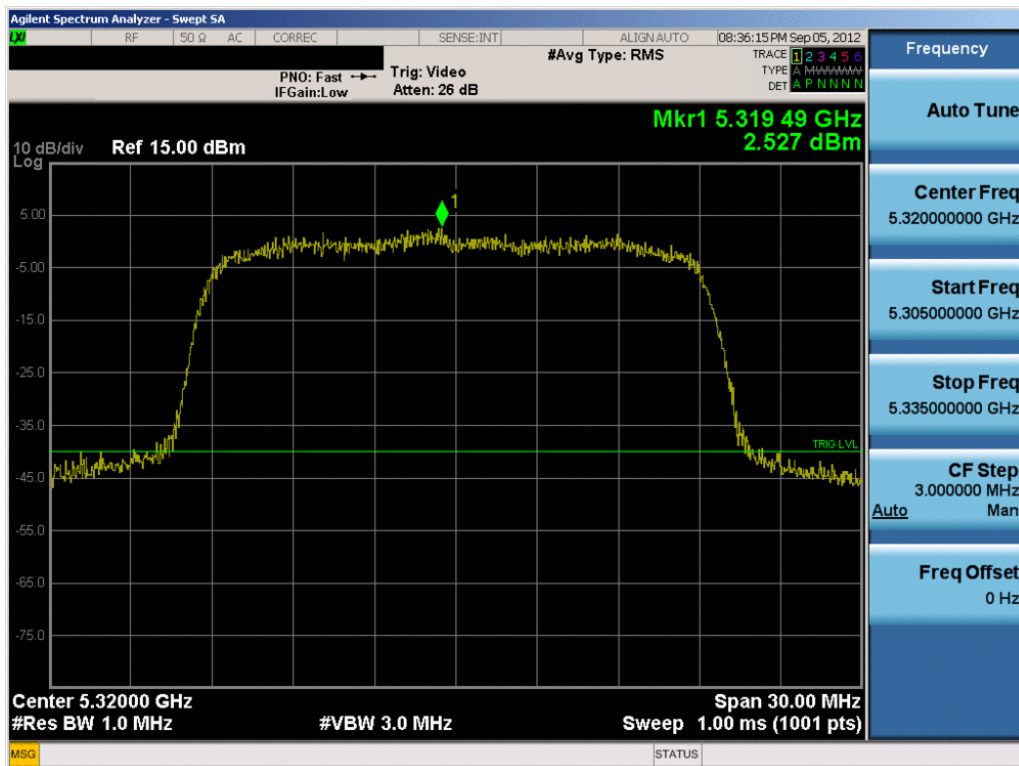


Plot 6-39. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 35 of 84

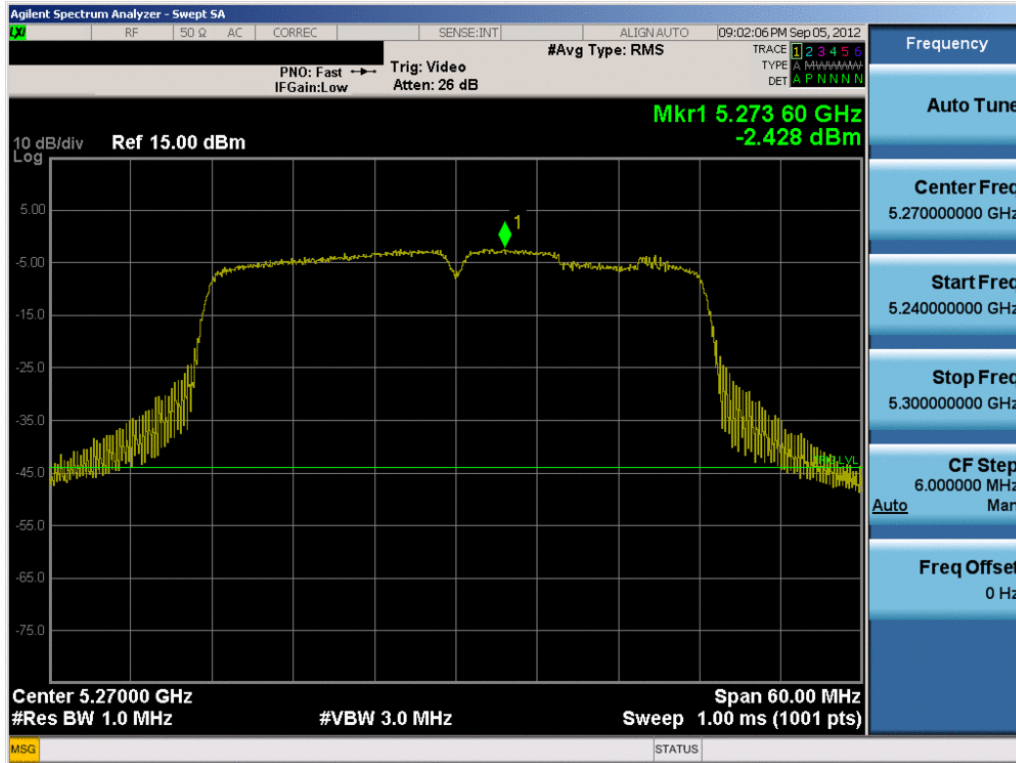


Plot 6-40. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

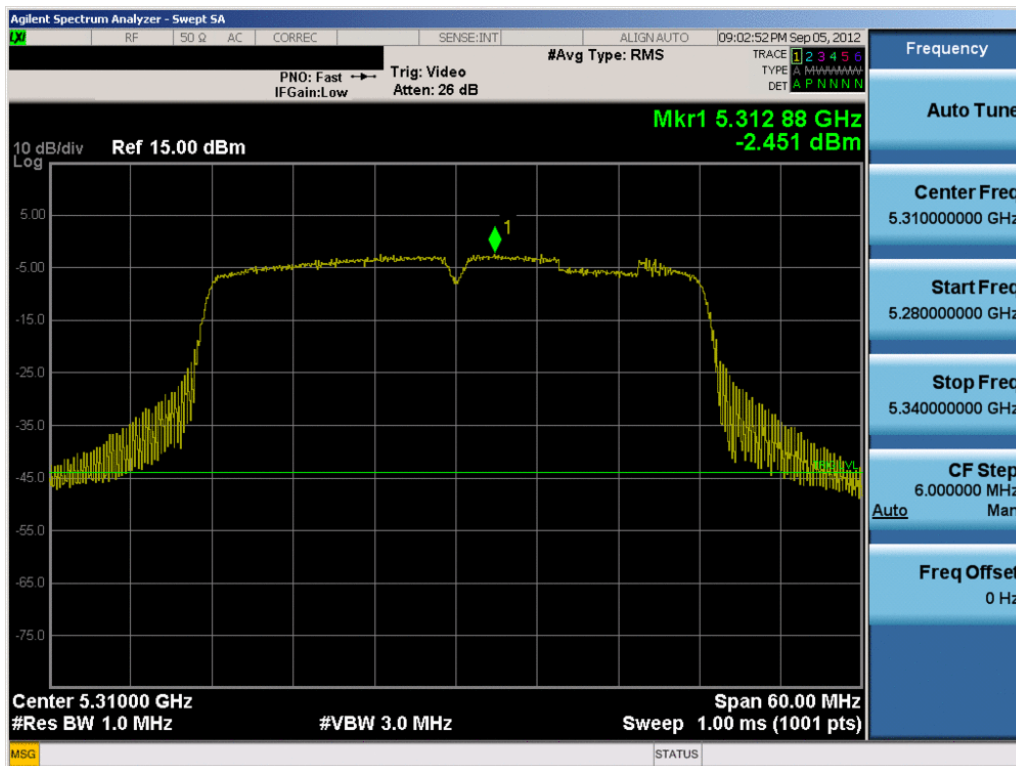


Plot 6-41. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 36 of 84

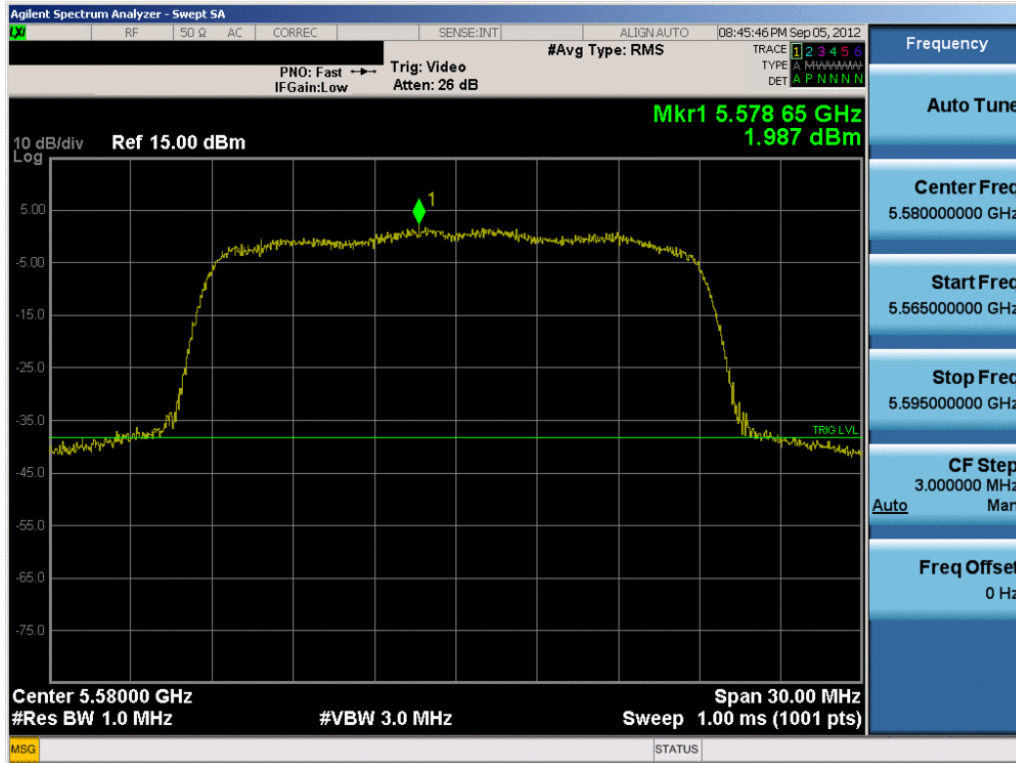


Plot 6-46. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

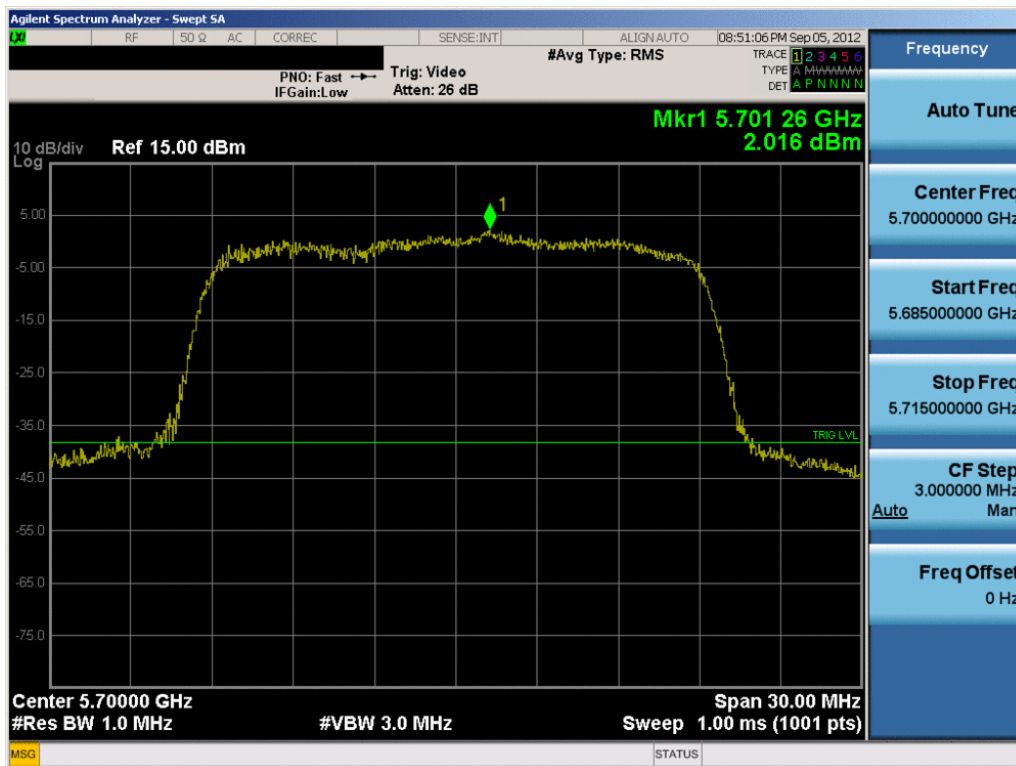


Plot 6-47. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 39 of 84

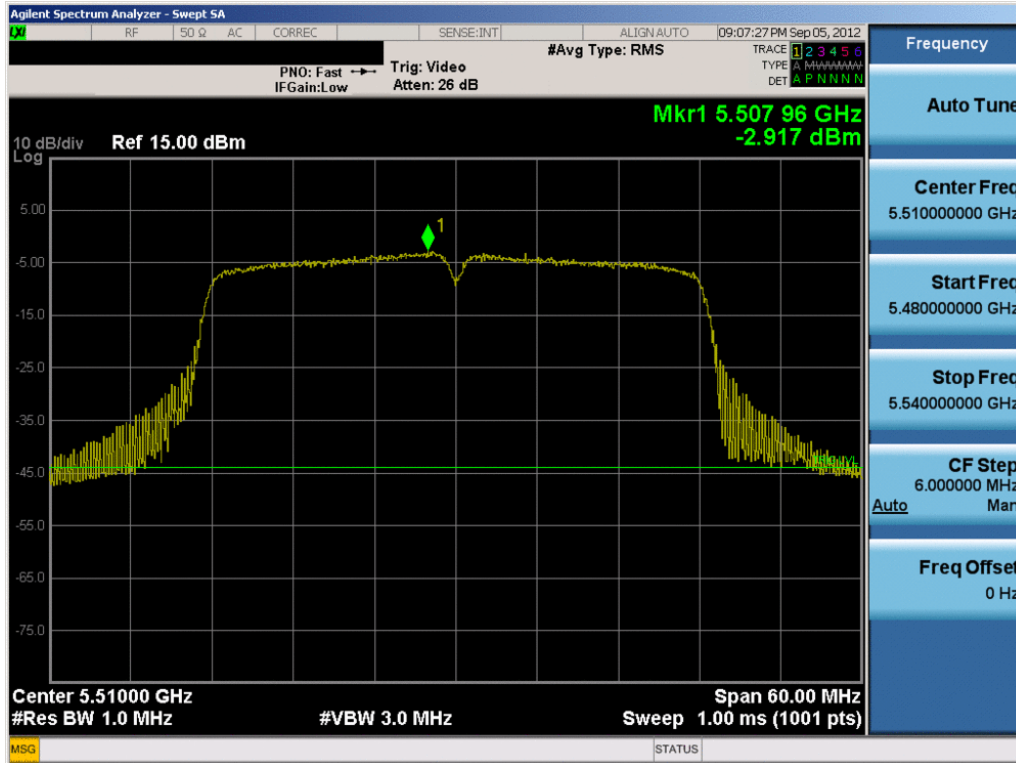


Plot 6-48. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)

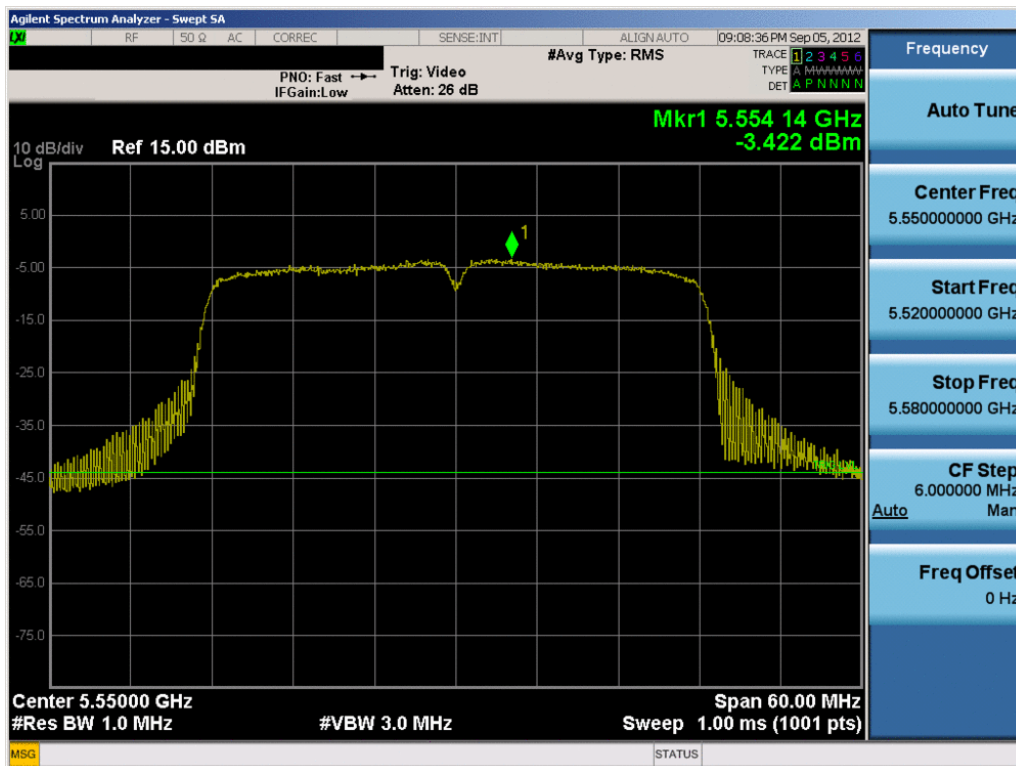



Plot 6-49. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

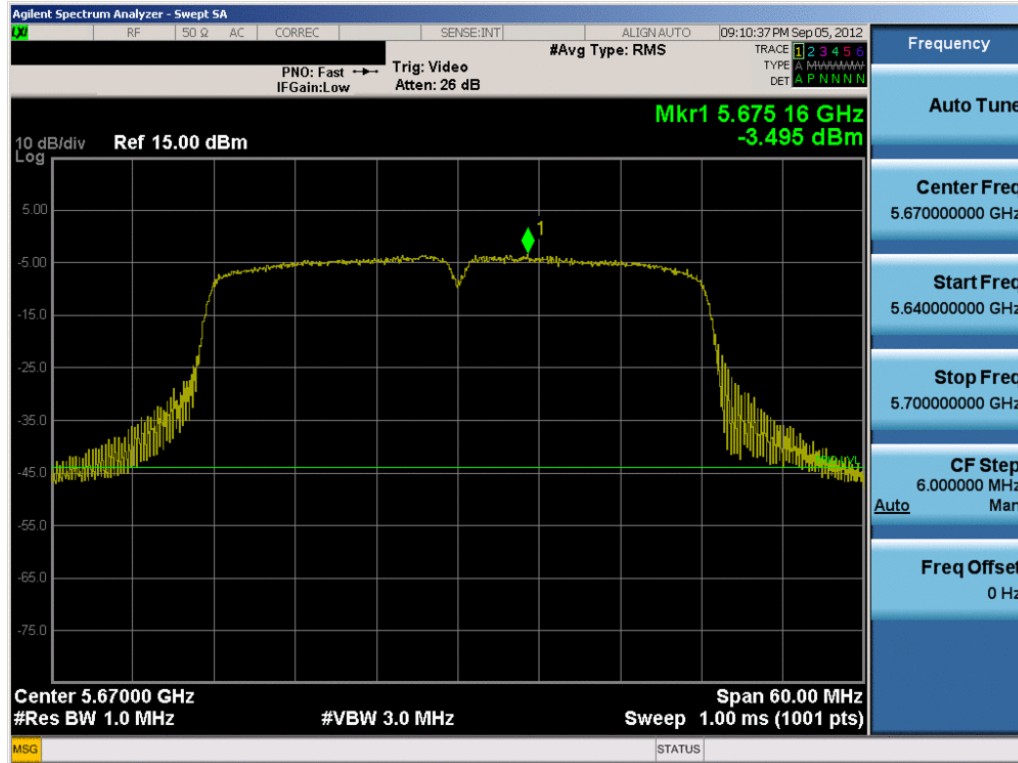FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 40 of 84



Plot 6-50. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 41 of 84

6.5 Peak Excursion Ratio – 802.11a/n §15.407(a)(6)

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies.

Method SA-1, as defined in KDB 789033 and with the settings described in Section 6.4 of this test report, was used to generate the average signal trace and the procedure outlined in section F) was used to generate the peak signal trace. A minimum of 100 trace averages were used for the average signal. The peak and average traces are then used to determine the peak excursion.

The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum conducted output power is 13 dBm/MHz.









Figure 6-4. Test Instrument & Measurement Setup

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 42 of 84	


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	8.26	13.0	-4.74
	5200	40	a	6	7.20	13.0	-5.80
	5240	48	a	6	7.39	13.0	-5.61
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	7.22	13.0	-5.78
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.96	13.0	-6.04
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	6.55	13.0	-6.45
	5190	38	n (40MHz)	13.5/15 (MCS0)	8.00	13.0	-5.00
	5230	46	n (40MHz)	13.5/15 (MCS0)	7.73	13.0	-5.27
Band II	5260	52	a	6	7.45	13.0	-5.55
	5280	56	a	6	6.99	13.0	-6.01
	5320	64	a	6	7.36	13.0	-5.64
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	7.41	13.0	-5.59
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	8.02	13.0	-4.98
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	6.29	13.0	-6.71
	5270	54	n (40MHz)	13.5/15 (MCS0)	8.35	13.0	-4.65
	5310	62	n (40MHz)	13.5/15 (MCS0)	8.03	13.0	-4.97
Band III	5500	100	a	6	7.66	13.0	-5.34
	5580	116	a	6	7.70	13.0	-5.30
	5700	140	a	6	7.24	13.0	-5.76
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	7.56	13.0	-5.44
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	7.11	13.0	-5.89
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	7.00	13.0	-6.00
	5510	102	n (40MHz)	13.5/15 (MCS0)	7.79	13.0	-5.22
	5550	110	n (40MHz)	13.5/15 (MCS0)	8.36	13.0	-4.64
	5670	134	n (40MHz)	13.5/15 (MCS0)	8.57	13.0	-4.43

Table 6-7. Conducted Peak Excursion Ratio Measurements

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 43 of 84

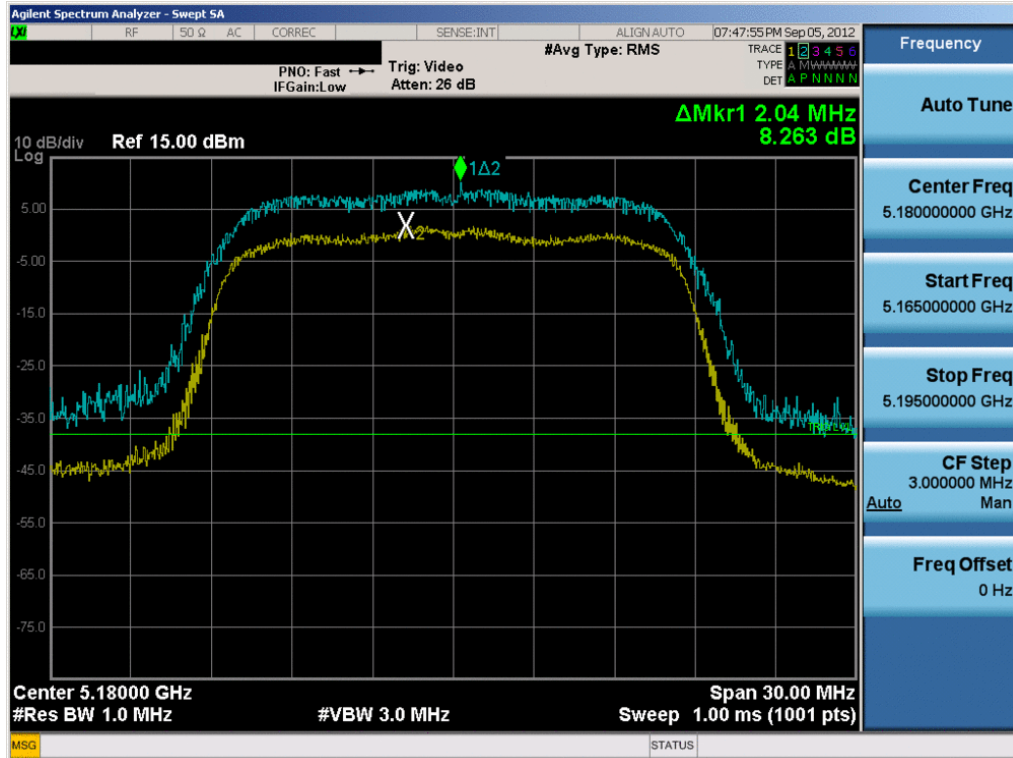


Plot 6-51. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 36)

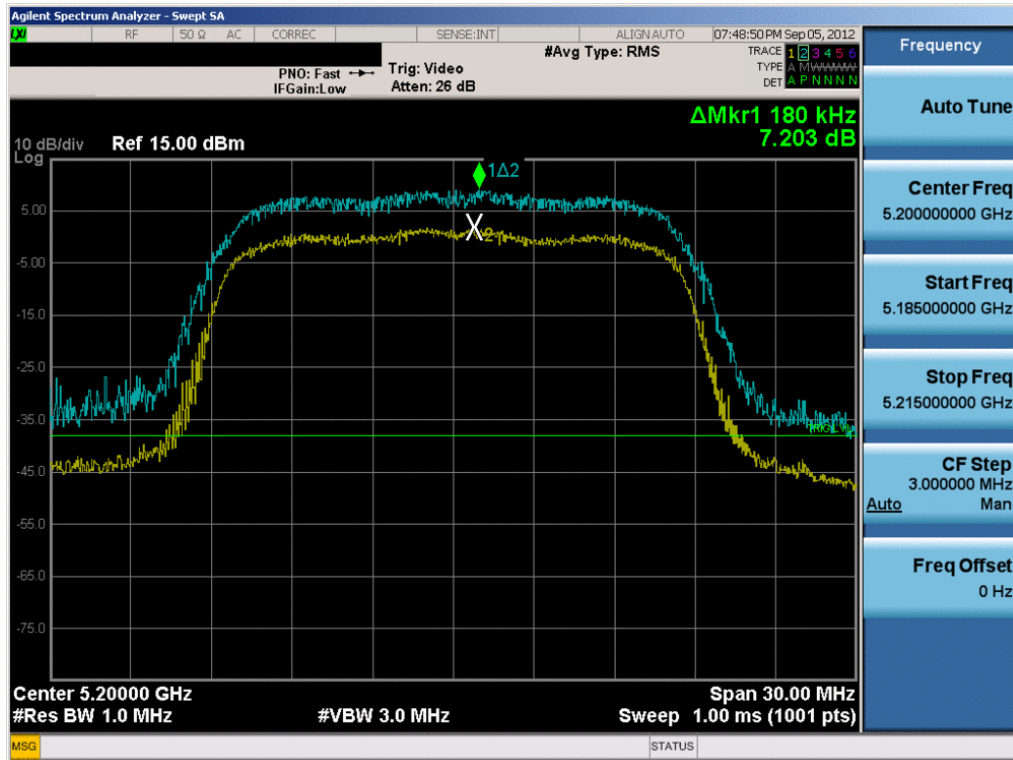


Plot 6-52. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 44 of 84

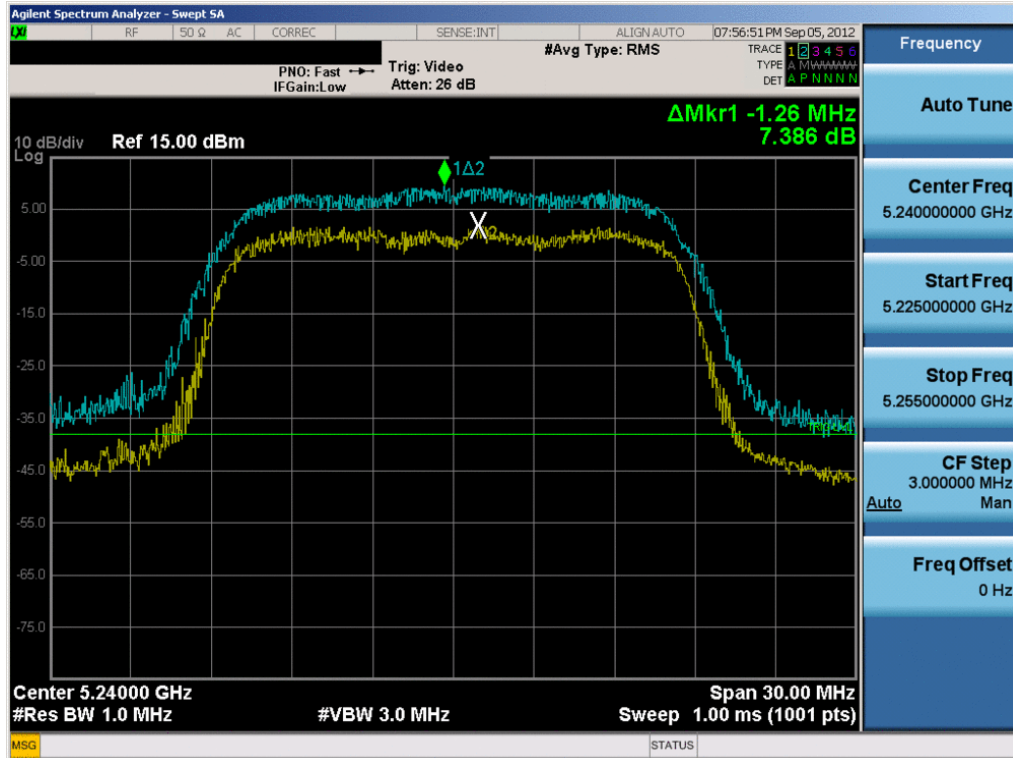


Plot 6-53. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 48)

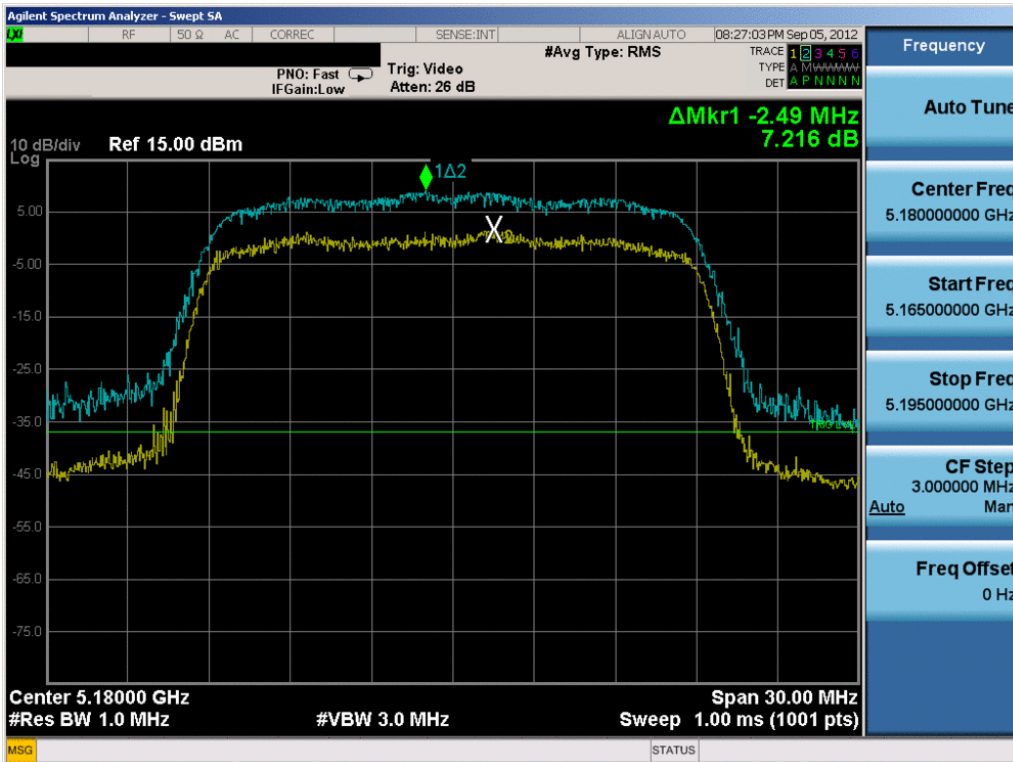


Plot 6-54. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

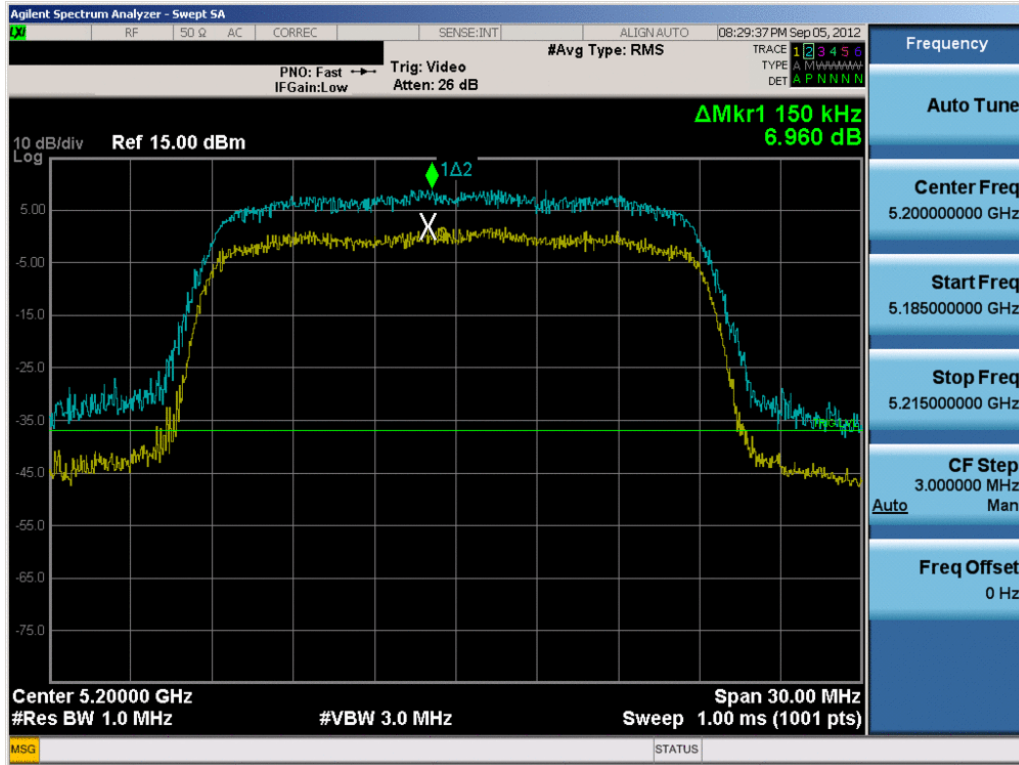

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 45 of 84

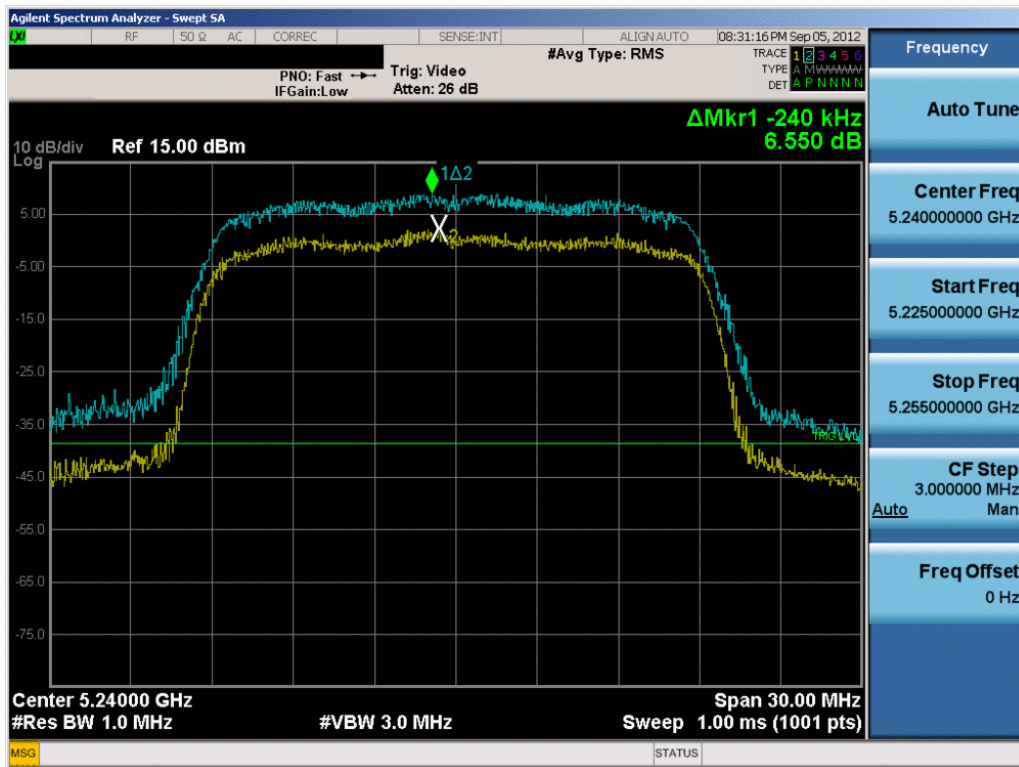


Plot 6-55. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)




Plot 6-56. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

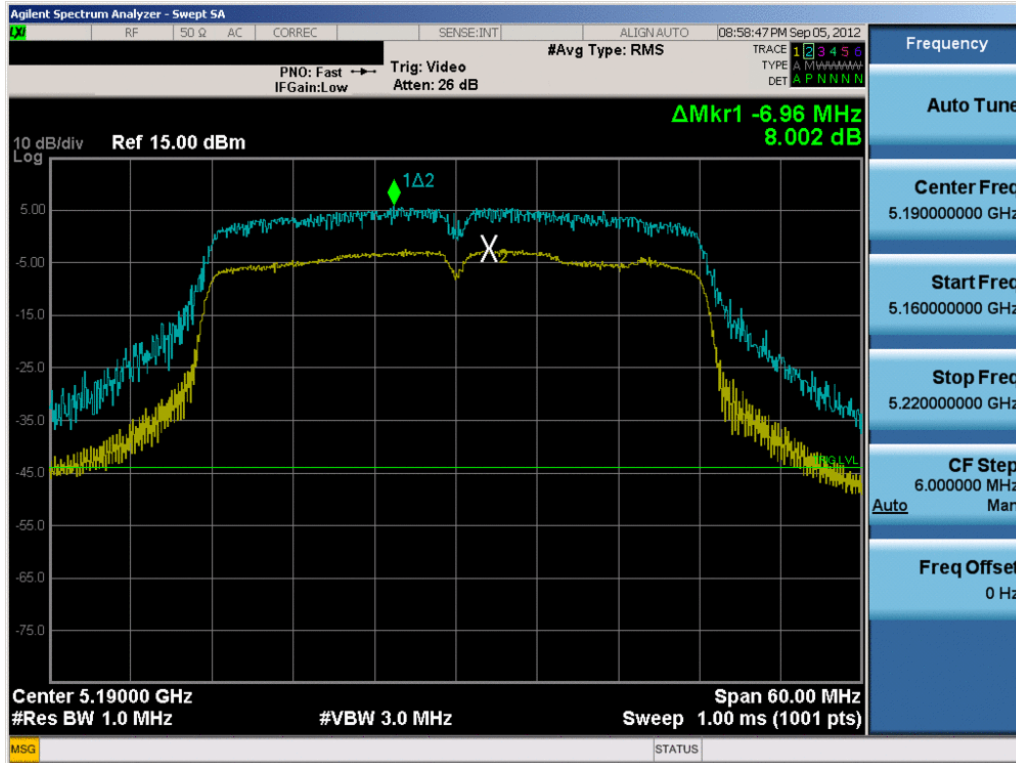

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 46 of 84

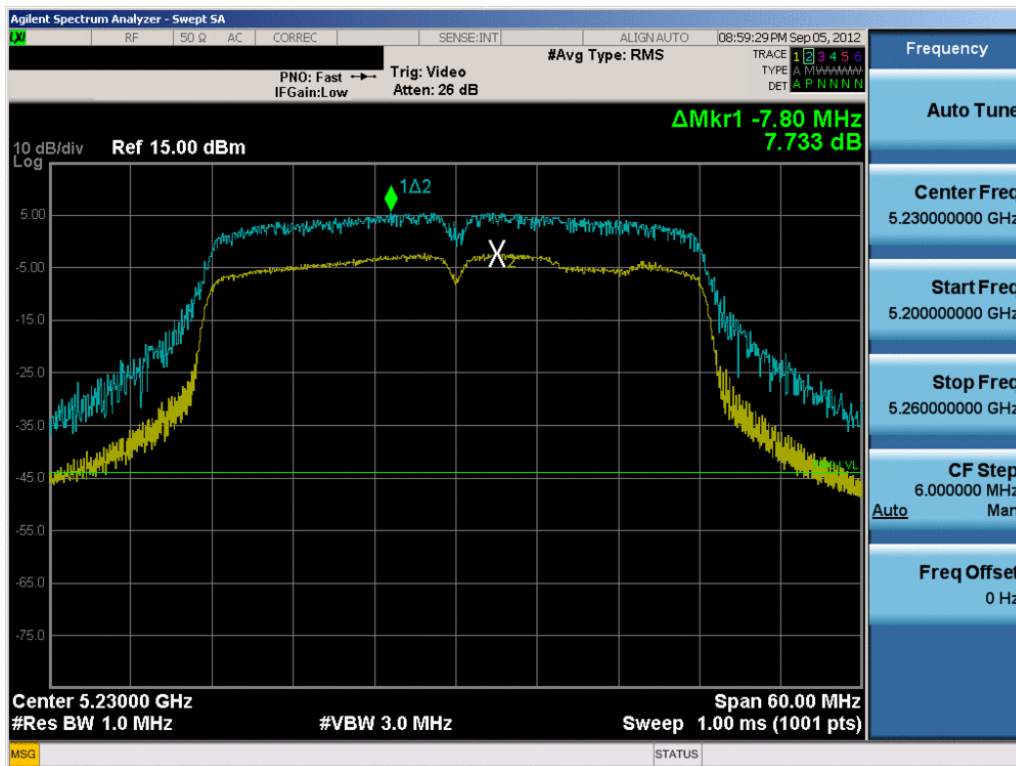


Plot 6-57. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)




Plot 6-58. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 47 of 84

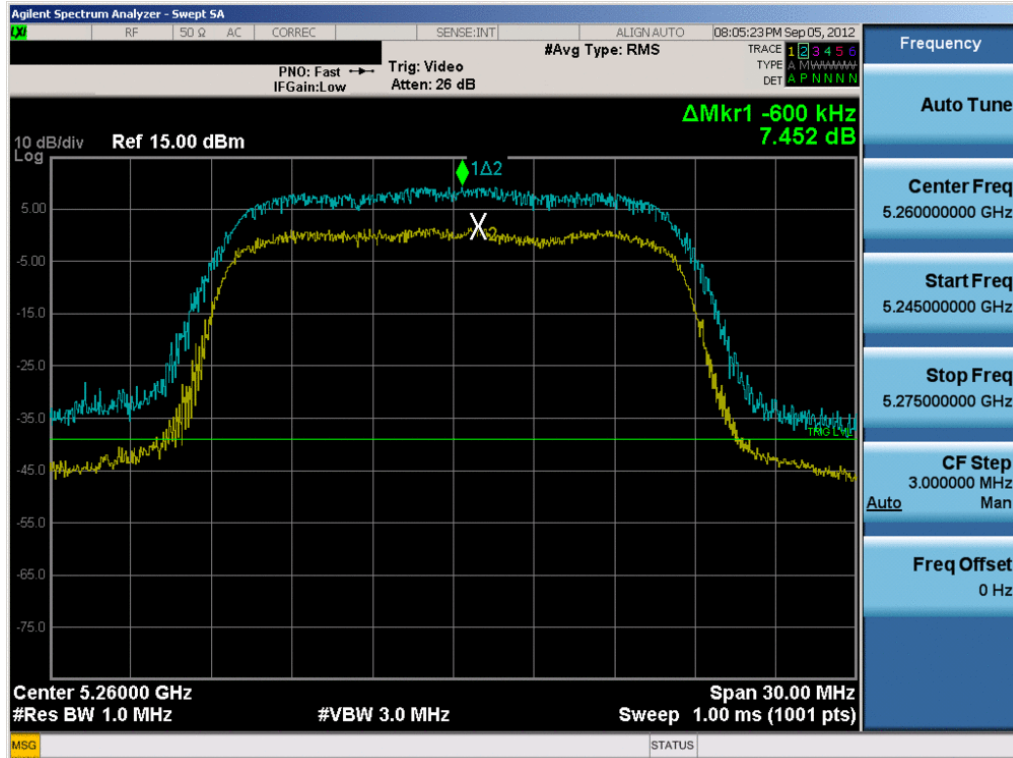


Plot 6-59. Peak Excursion Ratio Plot (802.11a (UNII Band 2) – Ch. 52)

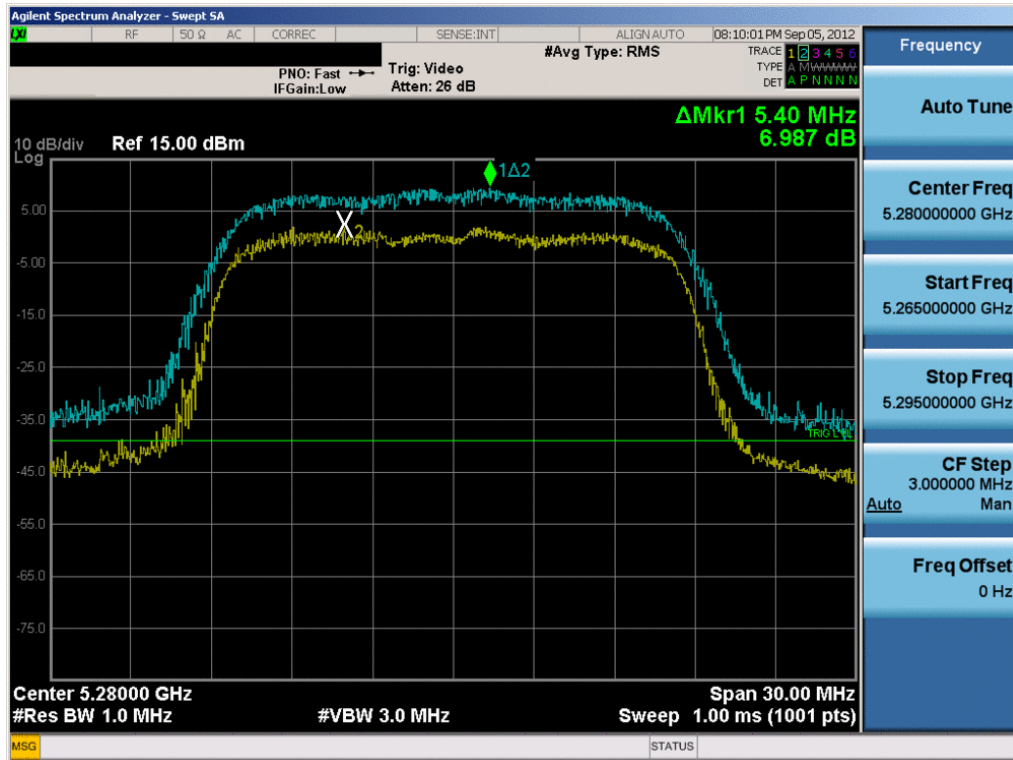


Plot 6-60. Peak Excursion Ratio Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 48 of 84

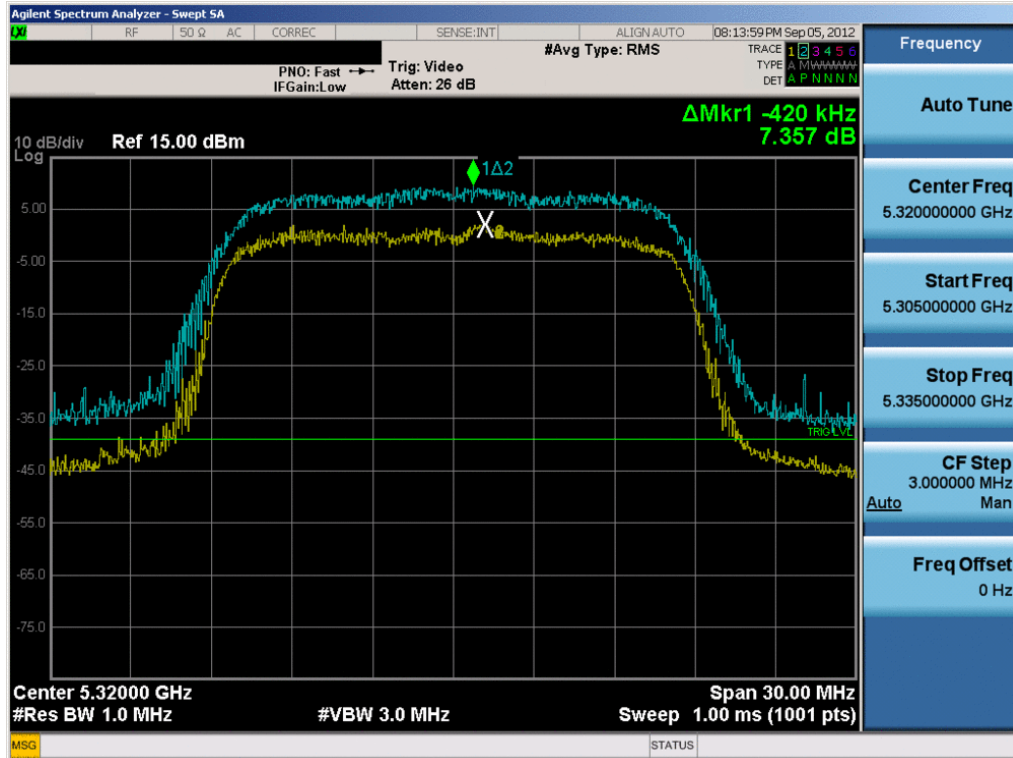


Plot 6-61. Peak Excursion Ratio Plot (802.11a (UNII Band 2) – Ch. 64)

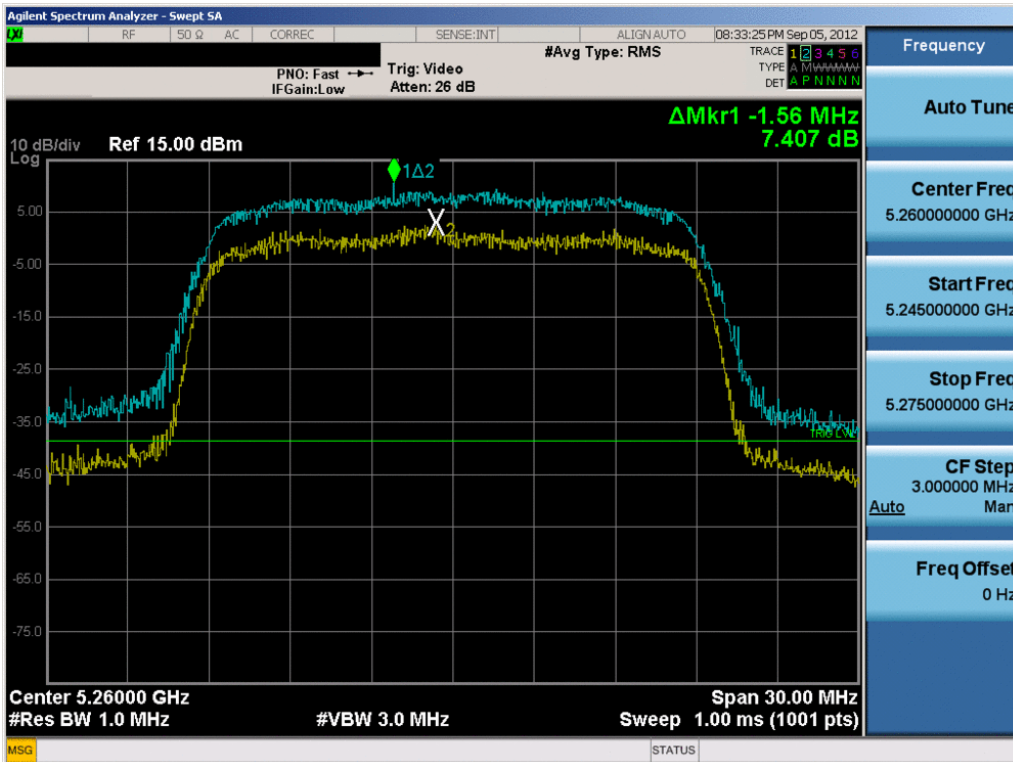


Plot 6-62. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 49 of 84

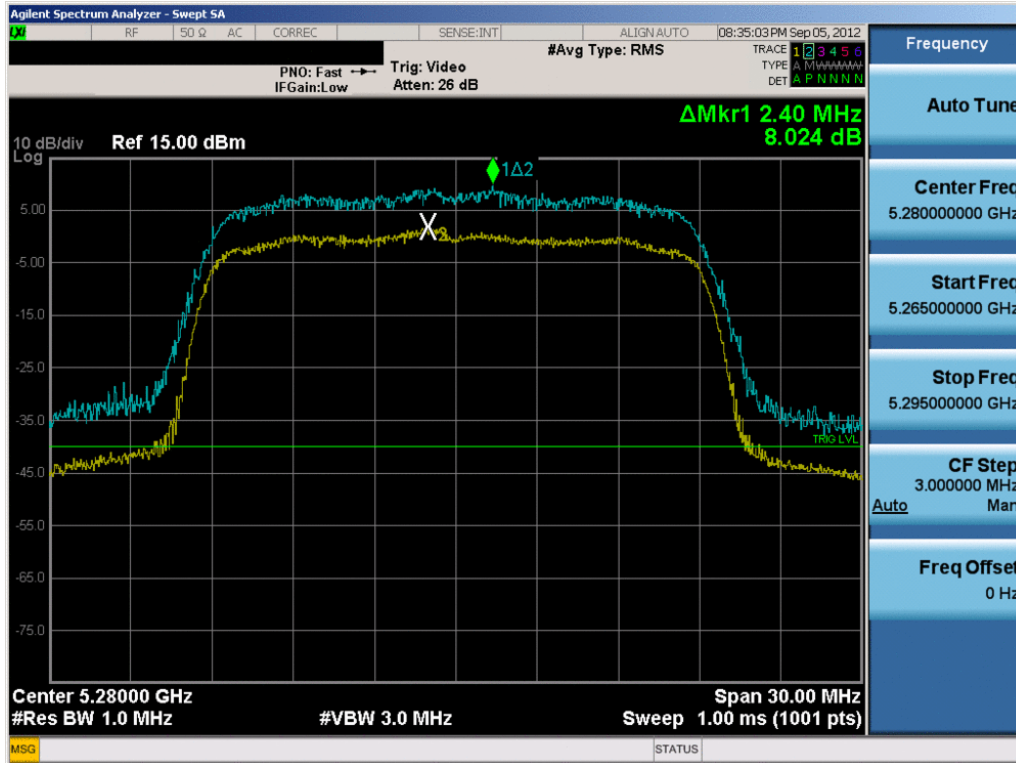


Plot 6-63. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

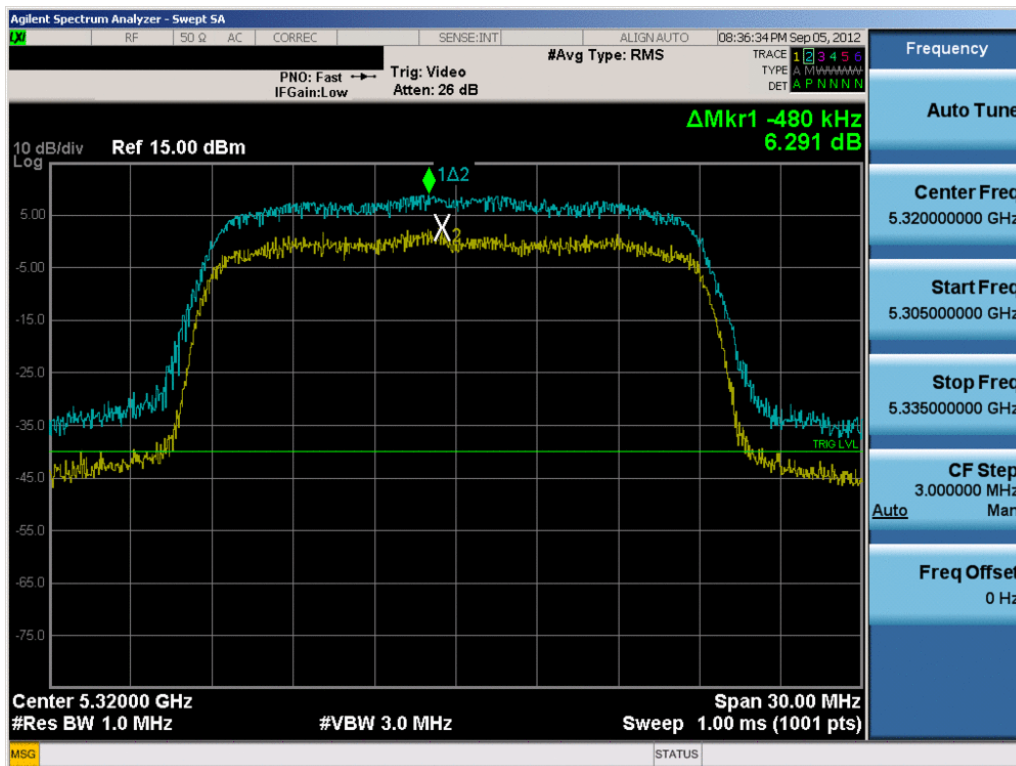


Plot 6-64. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

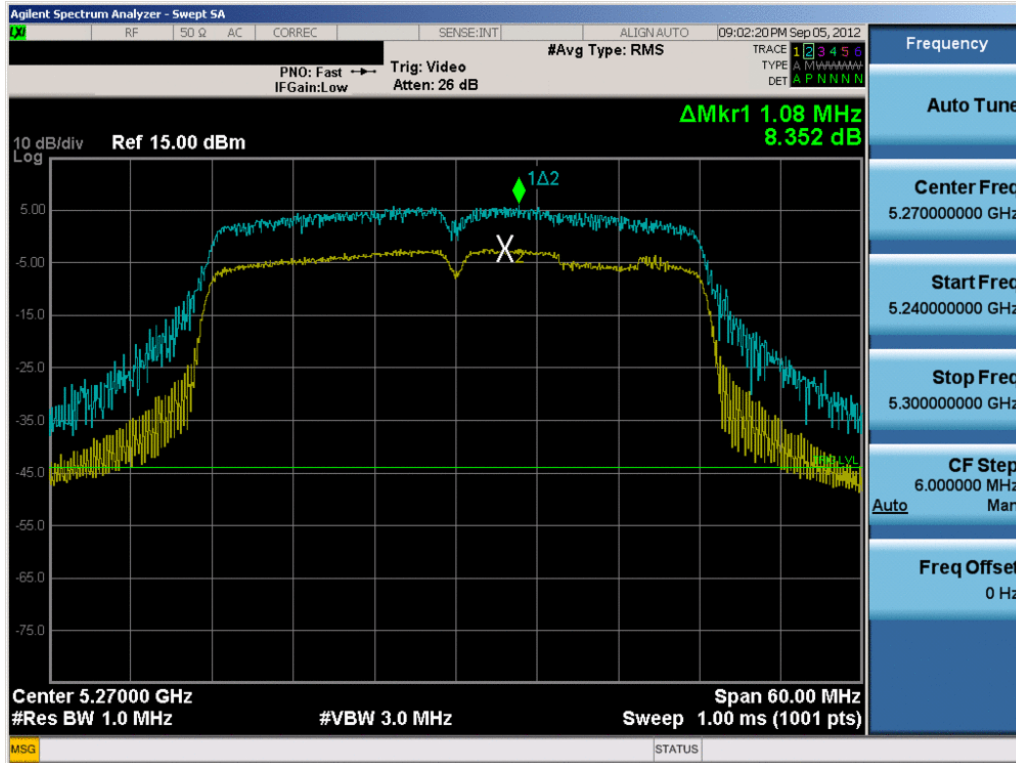

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 50 of 84

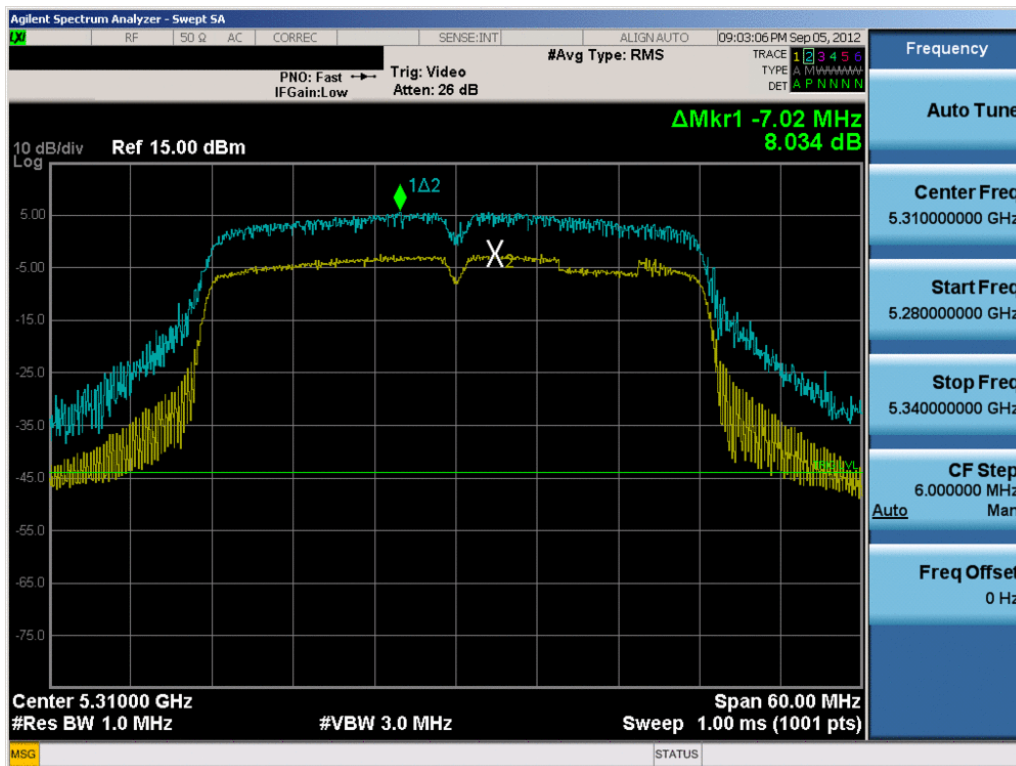


Plot 6-65. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)




Plot 6-66. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 51 of 84

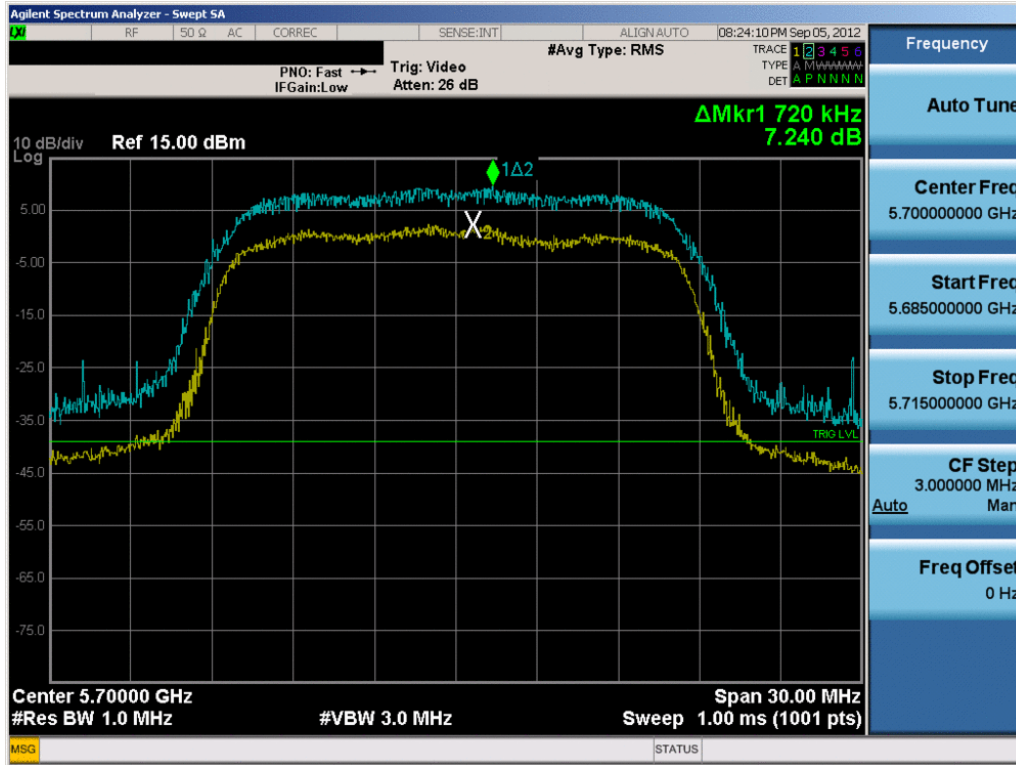


Plot 6-69. Peak Excursion Ratio Plot (802.11a (UNII Band 3) – Ch. 140)

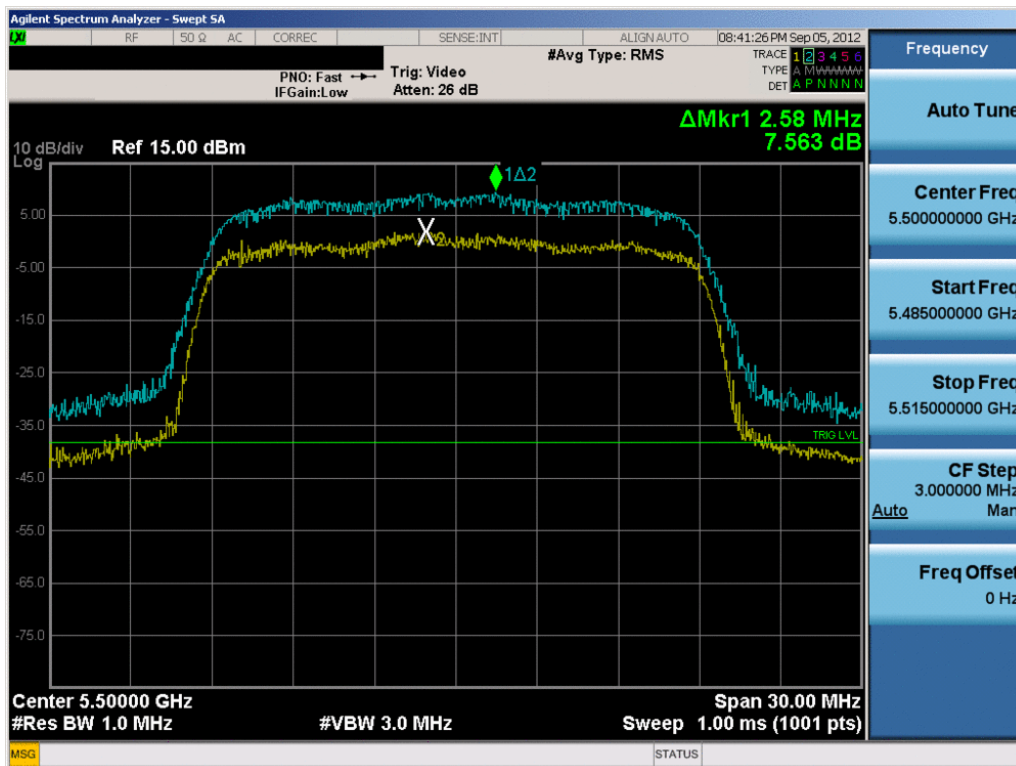


Plot 6-70. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 53 of 84

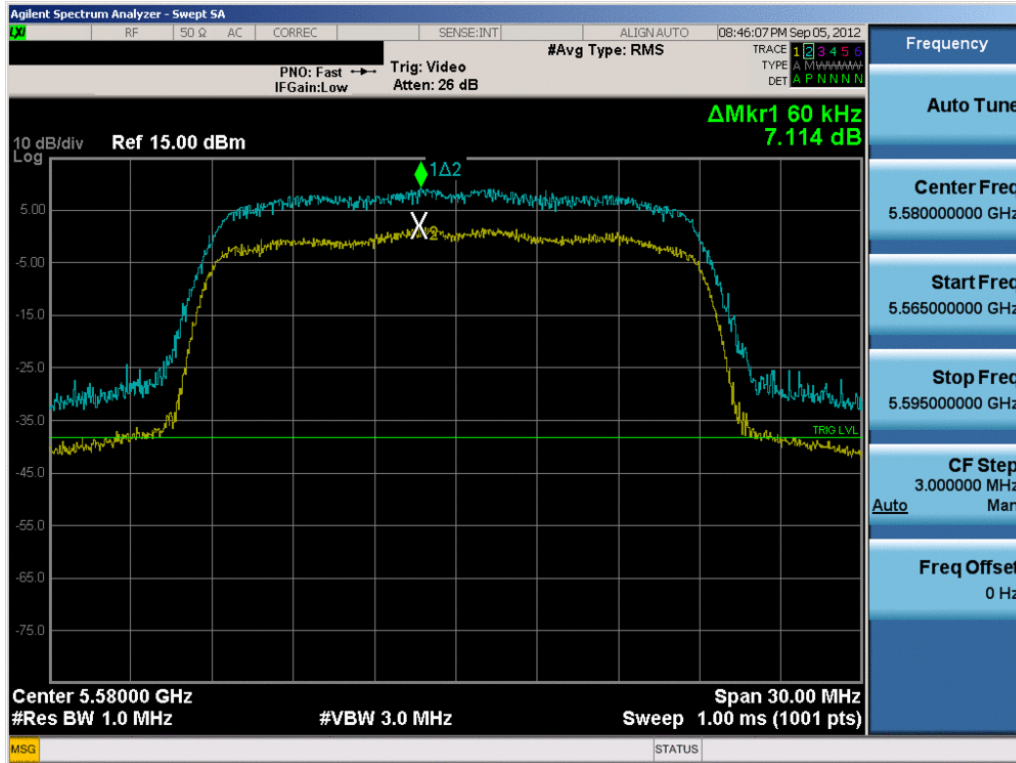


Plot 6-71. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

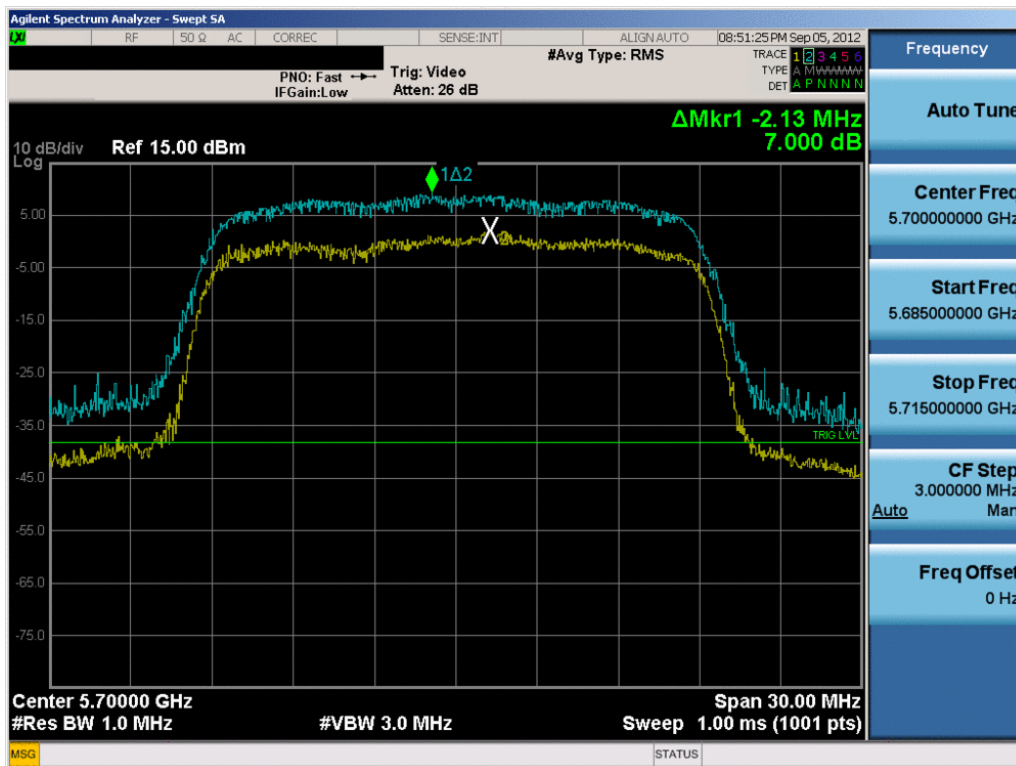


Plot 6-72. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 140)

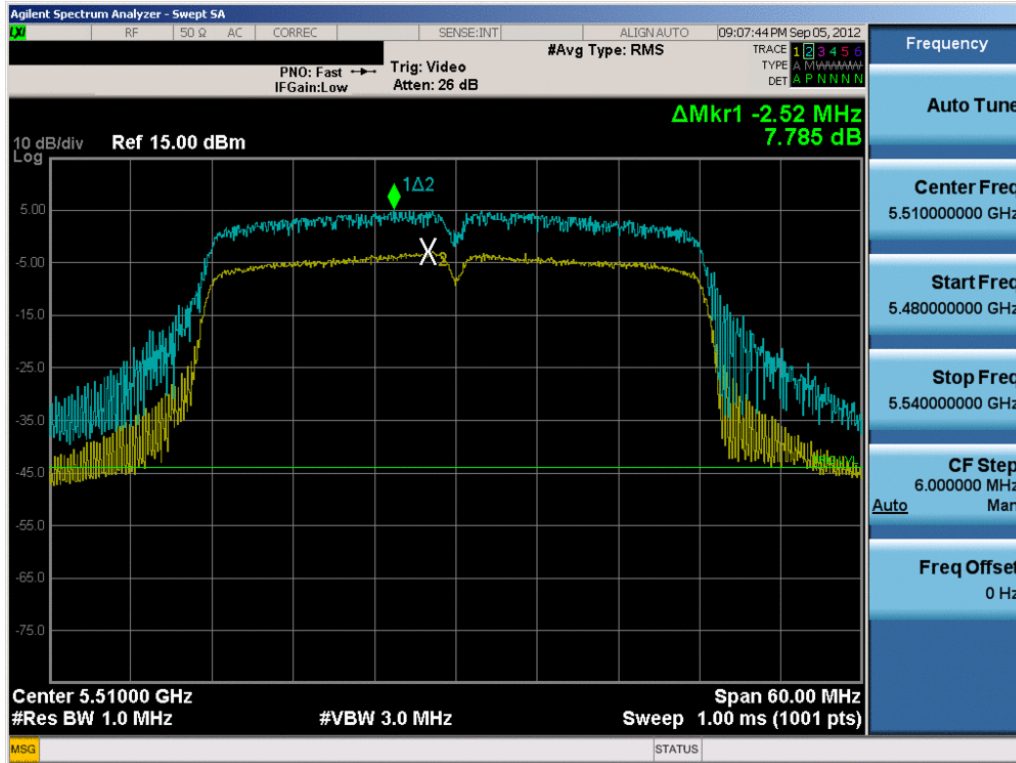

FCC ID: A3LEKGC100A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 54 of 84

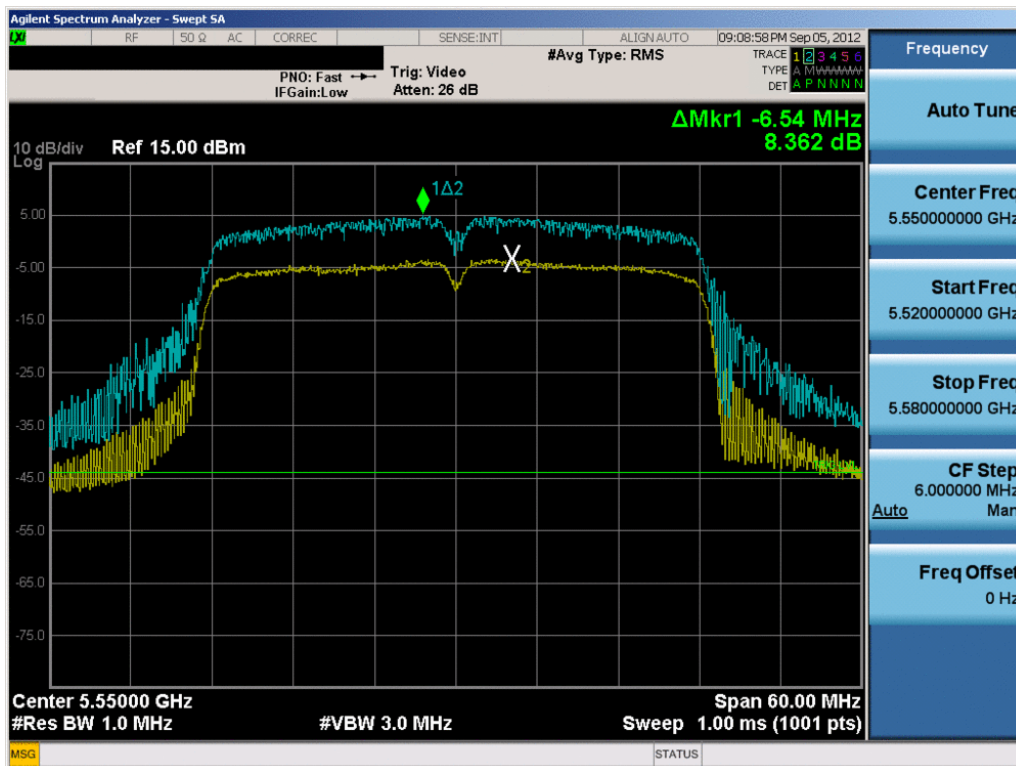


Plot 6-73. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)





Plot 6-74. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

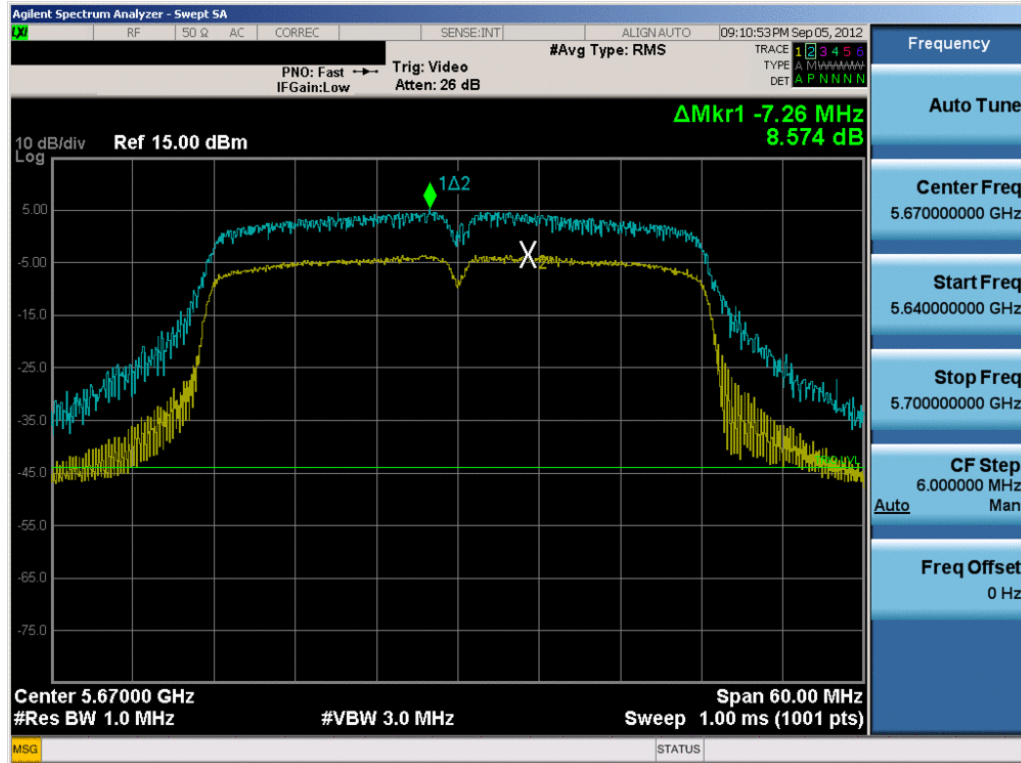FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 55 of 84



Plot 6-75. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 56 of 84

6.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz

CHANNEL: 36



REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	5,179,999,980	-20	-0.00000039
100 %		- 30	5,179,999,999	-1	-0.00000002
100 %		- 20	5,179,999,997	-3	-0.00000006
100 %		- 10	5,179,999,993	-7	-0.00000014
100 %		0	5,179,999,989	-11	-0.00000021
100 %		+ 10	5,179,999,981	-19	-0.00000037
100 %		+ 20	5,179,999,990	-10	-0.00000020
100 %		+ 30	5,179,999,983	-17	-0.00000033
100 %		+ 40	5,179,999,981	-19	-0.00000036
100 %		+ 50	5,179,999,996	-4	-0.00000007
115 %	4.26	+ 20	5,179,999,983	-17	-0.00000032
BATT. ENDPOINT	3.40	+ 20	5,179,999,993	-7	-0.00000013

Table 6-8. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 57 of 84	

Frequency Stability (Cont'd)
§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz

CHANNEL: 52



REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	5,259,999,983	-17	-0.00000032
100 %		- 30	5,259,999,988	-12	-0.00000023
100 %		- 20	5,259,999,982	-18	-0.00000034
100 %		- 10	5,259,999,993	-7	-0.00000014
100 %		0	5,259,999,992	-8	-0.00000015
100 %		+ 10	5,259,999,986	-14	-0.00000028
100 %		+ 20	5,259,999,997	-3	-0.00000006
100 %		+ 30	5,259,999,994	-6	-0.00000011
100 %		+ 40	5,259,999,999	-1	-0.00000002
100 %		+ 50	5,259,999,997	-3	-0.00000006
115 %	4.26	+ 20	5,259,999,987	-13	-0.00000024
BATT. ENDPOINT	3.40	+ 20	5,259,999,982	-18	-0.00000033

Table 6-9. Frequency Stability Measurements for UNII Band 2 (Ch. 52)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 58 of 84	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz

CHANNEL: 100



REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	5,499,999,995	-5	-0.00000010
100 %		- 30	5,499,999,986	-14	-0.00000026
100 %		- 20	5,499,999,993	-7	-0.00000013
100 %		- 10	5,499,999,991	-9	-0.00000016
100 %		0	5,499,999,984	-16	-0.00000029
100 %		+ 10	5,499,999,985	-15	-0.00000027
100 %		+ 20	5,499,999,992	-8	-0.00000015
100 %		+ 30	5,499,999,989	-11	-0.00000020
100 %		+ 40	5,499,999,982	-18	-0.00000033
100 %		+ 50	5,499,999,997	-3	-0.00000005
115 %	4.26	+ 20	5,499,999,984	-16	-0.00000030
BATT. ENDPOINT	3.40	+ 20	5,499,999,993	-7	-0.00000012

Table 6-10. Frequency Stability Measurements for UNII Band 3 (Ch. 100)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 59 of 84	

6.7 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A9.2]

The EUT was tested from 9kHz and up to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, peak measurements were taken using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation (“Method AD”) per KDB 789033 and linearly polarized horn antennas. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-11 per Section 15.209.



All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section. All measurements shown in this section were obtained using traditional radiated test methods as defined in C63.10-2009. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 789033 were not used to evaluate this device.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-11. Radiated Limits

Sample Calculation

- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 60 of 84	

Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meter
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-89.68	Peak	H	45.89	63.22	68.20	-4.98
* 15540.00	-135.00	Average	H	58.35	30.35	53.98	-23.63
* 15540.00	-125.00	Peak	H	58.35	40.35	73.98	-33.63
* 20720.00	-135.00	Average	H	42.11	14.11	53.98	-39.87
* 20720.00	-125.00	Peak	H	42.11	24.11	73.98	-49.87
25900.00	-125.00	Peak	H	42.58	24.58	68.20	-43.62

Table 6-12. Radiated Measurements @ 3 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation (“Method AD”) per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the second harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 61 of 84

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meter

Operating Frequency: 5200MHz



Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10400.00	-91.42	Peak	H	45.98	61.56	68.20	-6.64
* 15600.00	-135.00	Average	H	58.64	30.64	53.98	-23.34
* 15600.00	-125.00	Peak	H	58.64	40.64	73.98	-33.34
* 20800.00	-135.00	Average	H	42.04	14.04	53.98	-39.94
* 20800.00	-125.00	Peak	H	42.04	24.04	73.98	-49.94
26000.00	-125.00	Peak	H	42.67	24.67	68.20	-43.53

Table 6-13. Radiated Measurements @ 3 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m). At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the second harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 62 of 84	

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meter

Operating Frequency: 5240MHz



Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10480.00	-94.69	Peak	H	46.14	58.45	68.20	-9.75
* 15720.00	-135.00	Average	H	59.21	31.21	53.98	-22.77
* 15720.00	-125.00	Peak	H	59.21	41.21	73.98	-32.77
* 20960.00	-135.00	Average	H	41.92	13.92	53.98	-40.06
* 20960.00	-125.00	Peak	H	41.92	23.92	73.98	-50.06
26200.00	-125.00	Peak	H	42.53	24.53	68.20	-43.67

Table 6-14. Radiated Measurements @ 3 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m). At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the second harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 63 of 84	

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meter

Operating Frequency: 5260MHz



Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10520.00	-92.84	Peak	H	46.23	60.38	68.20	-7.82
* 15780.00	-135.00	Average	H	59.53	31.53	53.98	-22.45
* 15780.00	-125.00	Peak	H	59.53	41.53	73.98	-32.45
* 21040.00	-135.00	Average	H	41.92	13.92	53.98	-40.06
* 21040.00	-125.00	Peak	H	41.92	23.92	73.98	-50.06
26300.00	-125.00	Peak	H	42.55	24.55	68.20	-43.65

Table 6-15. Radiated Measurements @ 3 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m). At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the second harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 64 of 84	

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meter

Operating Frequency: 5280MHz



Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10560.00	-93.79	Peak	H	46.32	59.54	68.20	-8.66
* 15840.00	-135.00	Average	H	59.88	31.88	53.98	-22.09
* 15840.00	-125.00	Peak	H	59.88	41.88	73.98	-32.09
* 21120.00	-135.00	Average	H	41.93	13.93	53.98	-40.05
* 21120.00	-125.00	Peak	H	41.93	23.93	73.98	-50.05
26400.00	-125.00	Peak	H	42.47	24.47	68.20	-43.73

Table 6-16. Radiated Measurements @ 3 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m). At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the second harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 65 of 84	

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meter

Operating Frequency: 5320MHz



Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 10640.00	-101.41	Average	H	46.52	52.10	53.98	-1.87
* 10640.00	-89.76	Peak	H	46.52	63.75	73.98	-10.22
* 15960.00	-135.00	Average	H	62.27	34.27	53.98	-19.71
* 15960.00	-125.00	Peak	H	62.27	44.27	73.98	-29.71
* 21280.00	-135.00	Average	H	42.01	14.01	53.98	-39.97
* 21280.00	-125.00	Peak	H	42.01	24.01	73.98	-49.97
26600.00	-125.00	Peak	H	42.35	24.35	68.20	-43.85

Table 6-17. Radiated Measurements @ 3 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m). At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the second harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 66 of 84	

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meter

Operating Frequency: 5500MHz



Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11000.00	-105.23	Average	H	46.98	48.75	53.98	-5.23
* 11000.00	-95.61	Peak	H	46.98	58.37	73.98	-15.61
16500.00	-125.00	Peak	H	60.10	42.10	68.20	-26.10
22000.00	-125.00	Peak	H	42.40	24.40	68.20	-43.80
27500.00	-125.00	Peak	H	42.09	24.09	68.20	-44.11

Table 6-18. Radiated Measurements @ 3 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m). At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the second harmonic for this device.
- Levels at -135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 67 of 84	

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meter

Operating Frequency: 5580MHz



Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11160.00	-104.30	Average	H	49.42	52.13	53.98	-1.85
* 11160.00	-93.18	Peak	H	49.42	63.25	73.98	-10.73
16740.00	-125.00	Peak	H	58.53	40.53	68.20	-27.67
* 22320.00	-135.00	Average	H	42.43	14.43	53.98	-39.55
* 22320.00	-125.00	Peak	H	42.43	24.43	73.98	-49.55
27900.00	-125.00	Peak	H	42.01	24.01	68.20	-44.19

Table 6-19. Radiated Measurements @ 3 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m). At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the second harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 68 of 84	

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meter

Operating Frequency: 5700MHz



Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11400.00	-105.34	Average	H	47.61	49.27	53.98	-4.71
* 11400.00	-93.17	Peak	H	47.61	61.44	73.98	-12.54
17100.00	-125.00	Peak	H	56.08	38.08	68.20	-30.12
* 22800.00	-135.00	Average	H	42.58	14.58	53.98	-39.40
* 22800.00	-125.00	Peak	H	42.58	24.58	73.98	-49.40
28500.00	-125.00	Peak	H	41.81	23.81	68.20	-44.39

Table 6-20. Radiated Measurements @ 3 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m). At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the second harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 69 of 84	

6.8 Radiated Band Edge Measurements (20MHz)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meter

Operating Frequency: 5180MHz



Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4573.45	-105.30	Average	H	38.73	40.43	53.98	-13.55
4573.45	-95.21	Peak	H	38.73	50.52	73.98	-23.46
4956.95	-105.78	Average	H	39.05	40.27	53.98	-13.71
4956.95	-95.30	Peak	H	39.05	50.75	73.98	-23.23
5150.00	-104.84	Average	H	39.27	41.43	53.98	-12.55
5150.00	-96.59	Peak	H	39.27	49.68	73.98	-24.30

Table 6-21. Radiated Restricted Band Measurements at 3-meter (4.5 – 5.15GHz)

NOTES:

- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 70 of 84

Radiated Band Edge Measurements (20MHz) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meter
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
5350.00	-105.45	Average	H	39.53	41.08	53.98	-12.90
5350.00	-96.56	Peak	H	39.53	49.97	73.98	-24.01
5392.67	-105.51	Average	H	39.58	41.08	53.98	-12.90
5392.67	-95.42	Peak	H	39.58	51.17	73.98	-22.81
5445.70	-105.80	Average	H	39.65	40.85	53.98	-13.13
5445.70	-95.00	Peak	H	39.65	51.65	73.98	-22.33

Table 6-22. Radiated Restricted Band Measurements at 3 Meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)

NOTES:

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz (68.2dBµV/m) EIRP limit specified in §15.407.
2. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation (“Method AD”) per KDB 789033.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
6. Above 960MHz the limit is 500 µV/m (54dBµ/m) at 3 meters radiated for emissions that lie in restricteds band specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 71 of 84	

Radiated Band Edge Measurements (20MHz) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meter
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5416.77	-104.88	Average	H	39.61	41.74	53.98	-12.24
5416.77	-94.34	Peak	H	39.61	52.28	73.98	-21.70
5460.00	-105.39	Average	H	39.67	41.28	53.98	-12.70
5460.00	-97.15	Peak	H	39.67	49.52	73.98	-24.46
5465.28	-94.41	Peak	H	39.68	52.27	68.20	-15.93

Table 6-23. Radiated Restricted Band Measurements at 3 Meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)

NOTES:

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz (68.2dBμV/m) EIRP limit specified in §15.407.
2. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation (“Method AD”) per KDB 789033.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
6. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 72 of 84

Radiated Band Edge Measurements (20MHz) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meter
 Operating Frequency: 5700MHz
 Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5725.00	-97.02	Peak	H	40.18	50.16	68.20	-18.04
5732.78	-95.62	Peak	H	40.19	51.57	68.20	-16.63
5745.18	-96.00	Peak	H	40.22	51.21	68.20	-16.99

Table 6-24. Radiated Restricted Band Measurements at 3 Meter

NOTES:

1. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
5. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 73 of 84

6.9 Radiated Band Edge Measurements (40MHz)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meter

Operating Frequency: 5190MHz



Channel: 38

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4577.35	-105.11	Average	H	38.73	40.62	53.98	-13.36
4577.35	-94.33	Peak	H	38.73	51.40	73.98	-22.58
5049.25	-105.58	Average	H	39.14	40.56	53.98	-13.42
5049.25	-94.40	Peak	H	39.14	51.74	73.98	-22.24
5150.00	-105.05	Average	H	39.27	41.22	53.98	-12.55
5150.00	-97.41	Peak	H	39.27	48.86	73.98	-24.30

Table 6-25. Radiated Restricted Band Measurements at 3 Meter (4.5 – 5.15GHz)

NOTES:

- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 74 of 84

Radiated Band Edge Measurements (40MHz) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meter
 Operating Frequency: 5310MHz
 Channel: 62

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
5350.00	-105.44	Average	H	39.53	41.09	53.98	-12.89
5350.00	-96.85	Peak	H	39.53	49.68	73.98	-24.30
5352.09	-105.46	Average	H	39.53	41.07	53.98	-12.91
5352.09	-95.30	Peak	H	39.53	51.23	73.98	-22.75
5411.71	-105.04	Average	H	39.61	41.57	53.98	-12.41
5411.71	-94.58	Peak	H	39.61	52.03	73.98	-21.95

Table 6-26. Radiated Restricted Band Measurements at 3 Meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)

NOTES:

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz (68.2dBµV/m) EIRP limit specified in §15.407.
2. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation (“Method AD”) per KDB 789033.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
6. Above 960MHz the limit is 500 µV/m (54dBµ/m) at 3 meters radiated for emissions that lie in restricteds band specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 75 of 84	

Radiated Band Edge Measurements (40MHz) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meter
 Operating Frequency: 5510MHz
 Channel: 102

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
5397.41	-103.25	Average	H	39.59	43.34	53.98	-10.64
5397.41	-92.49	Peak	H	39.59	54.10	73.98	-19.88
5460.00	-103.53	Average	H	39.67	43.14	53.98	-10.84
5460.00	-95.21	Peak	H	39.67	51.46	73.98	-22.52
5464.39	-92.93	Peak	H	39.68	53.75	68.20	-14.45

Table 6-27. Radiated Restricted Band Measurements at 3 Meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)

NOTES:

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz (68.2dBµV/m) EIRP limit specified in §15.407.
2. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation (“Method AD”) per KDB 789033.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
6. Above 960MHz the limit is 500 µV/m (54dBµ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 76 of 84

Radiated Band Edge Measurements (40MHz) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meter
 Operating Frequency: 5670MHz
 Channel: 134

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5725.00	-96.87	Peak	H	40.18	50.31	68.20	-17.89
5727.18	-92.59	Peak	H	40.18	54.59	68.20	-13.61
5729.75	-92.82	Peak	H	40.18	54.37	68.20	-13.83

Table 6-28. Radiated Restricted Band Measurements at 3 Meter

NOTES:

1. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 100 trace averages under continuous operation ("Method AD") per KDB 789033.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
5. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.


FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 77 of 84

6.10 Line-Conducted Test Data
§15.207; RSS-Gen [7.2.2]

PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics Co., Ltd.
 Model Number : EK-GC100, EK-KC100
 FCC ID Code : A3LEKGC100
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
 Tested Date : 09/04/2012
 Note : Tested with 802.11a
 UNII Band 1 ON

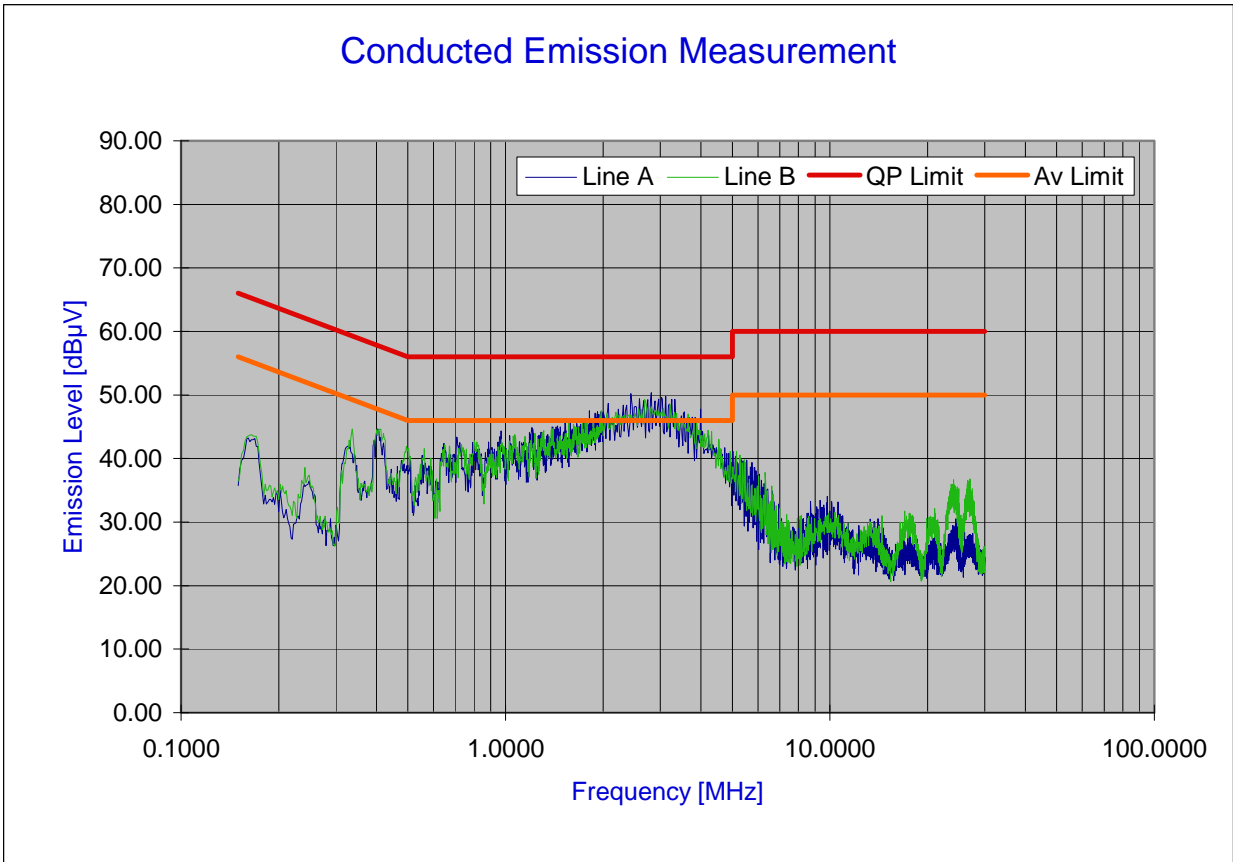



Ver.1.1 ©PCTEST 2006.08

Plot 6-76. Line Conducted Plot with 802.11a (UNII Band 1)

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 78 of 84	



Line-Conducted Test Data (Cont'd)
§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	2.084	7.16	37.18	56.00	-18.82	27.15	46.00	-18.85
2	A	2.327	7.20	38.50	56.00	-17.50	28.94	46.00	-17.06
3	A	2.407	7.21	38.27	56.00	-17.73	29.56	46.00	-16.44
4	A	2.645	7.23	38.80	56.00	-17.20	29.95	46.00	-16.05
5	A	2.843	7.26	39.34	56.00	-16.66	29.45	46.00	-16.55
6	A	2.925	7.26	39.21	56.00	-16.79	30.03	46.00	-15.97
7	A	2.954	7.27	39.00	56.00	-17.00	29.77	46.00	-16.23
8	A	3.042	7.28	39.20	56.00	-16.80	28.85	46.00	-17.15
9	A	3.297	7.30	38.23	56.00	-17.77	29.15	46.00	-16.85
10	A	3.376	7.31	37.79	56.00	-18.21	28.39	46.00	-17.61
11	B	1.561	7.11	33.63	56.00	-22.37	23.95	46.00	-22.05
12	B	1.732	7.13	35.94	56.00	-20.06	25.50	46.00	-20.50
13	B	1.773	7.13	34.31	56.00	-21.69	25.06	46.00	-20.94
14	B	1.880	7.14	35.01	56.00	-20.99	25.24	46.00	-20.76
15	B	1.967	7.15	36.98	56.00	-19.02	26.31	46.00	-19.69
16	B	2.056	7.16	37.18	56.00	-18.82	26.95	46.00	-19.05
17	B	2.680	7.23	39.09	56.00	-16.91	28.84	46.00	-17.16
18	B	2.789	7.24	38.50	56.00	-17.50	29.02	46.00	-16.98
19	B	3.205	7.28	37.95	56.00	-18.05	28.16	46.00	-17.84
20	B	3.890	7.34	35.07	56.00	-20.93	24.87	46.00	-21.13

Table 6-29. Line Conducted Data with 802.11a (UNII Band 1)

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
6. Margin (dB) = QP/AV Level (dBμV) – Limit (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.


FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 79 of 84	

Line-Conducted Test Data (Cont'd)
§15.207; RSS-Gen [7.2.2]

PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics Co., Ltd.
 Model Number : EK-GC100, EK-KC100
 FCC ID Code : A3LEKGC100
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
 Tested Date : 09/04/2012
 Note : Tested with 802.11a
 UNII Band 2 ON

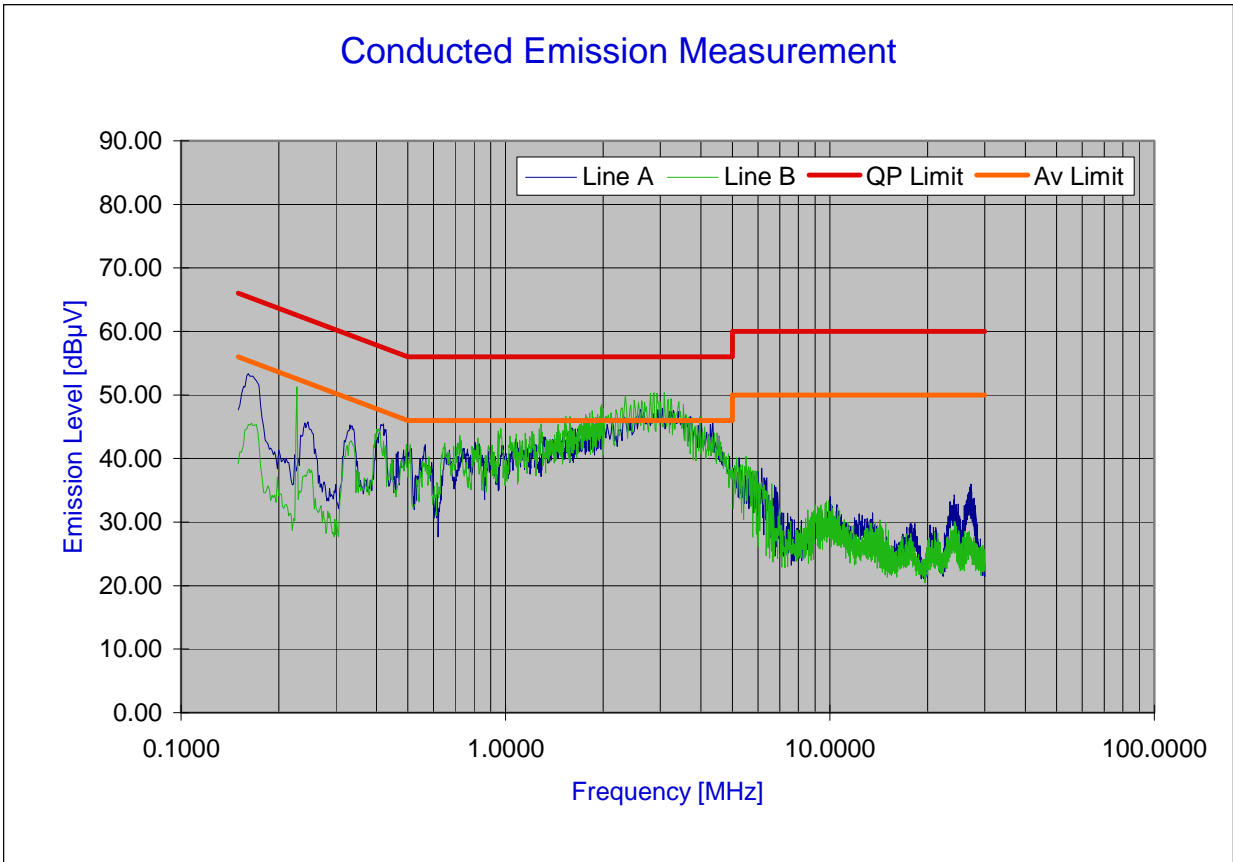

Ver.1.1 ©PCTEST 2006.08

Plot 6-77. Line Conducted Plot with 802.11a (UNII Band 2)

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 80 of 84	

Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	1.774	7.13	34.56	56.00	-21.44	24.38	46.00	-21.62
2	A	1.959	7.15	35.28	56.00	-20.72	25.45	46.00	-20.55
3	A	2.571	7.22	37.82	56.00	-18.18	28.22	46.00	-17.78
4	A	3.050	7.27	37.79	56.00	-18.21	28.39	46.00	-17.61
5	A	3.293	7.29	37.28	56.00	-18.72	27.38	46.00	-18.62
6	A	3.476	7.31	37.06	56.00	-18.94	27.45	46.00	-18.55
7	A	3.676	7.32	38.67	56.00	-17.33	25.80	46.00	-20.20
8	A	3.891	7.34	34.51	56.00	-21.49	25.28	46.00	-20.72
9	A	3.971	7.34	35.27	56.00	-20.73	24.11	46.00	-21.89
10	A	4.295	7.37	34.68	56.00	-21.32	23.82	46.00	-22.18
11	B	1.994	7.15	36.21	56.00	-19.79	27.61	46.00	-18.39
12	B	2.328	7.20	38.12	56.00	-17.88	29.28	46.00	-16.72
13	B	2.488	7.22	39.20	56.00	-16.80	29.59	46.00	-16.41
14	B	2.505	7.22	38.81	56.00	-17.19	29.46	46.00	-16.54
15	B	2.593	7.23	38.98	56.00	-17.02	29.45	46.00	-16.55
16	B	2.890	7.26	39.02	56.00	-16.98	29.86	46.00	-16.14
17	B	3.043	7.28	39.21	56.00	-16.79	29.69	46.00	-16.31
18	B	3.204	7.29	39.05	56.00	-16.95	29.43	46.00	-16.57
19	B	3.377	7.31	37.88	56.00	-18.12	28.47	46.00	-17.53
20	B	3.478	7.32	37.42	56.00	-18.58	27.60	46.00	-18.40

Table 6-30. Line Conducted Data with 802.11a (UNII Band 2)

Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Line A = Phase; Line B = Neutral
- Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
- Margin (dB) = QP/AV Level (dBμV) – Limit (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.


FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 81 of 84

Line-Conducted Test Data (Cont'd)
§15.207; RSS-Gen [7.2.2]

PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics Co., Ltd.
 Model Number : EK-GC100, EK-KC100
 FCC ID Code : A3LEKGC100
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
 Tested Date : 09/04/2012
 Note : Tested with 802.11a
 UNII Band 3 ON

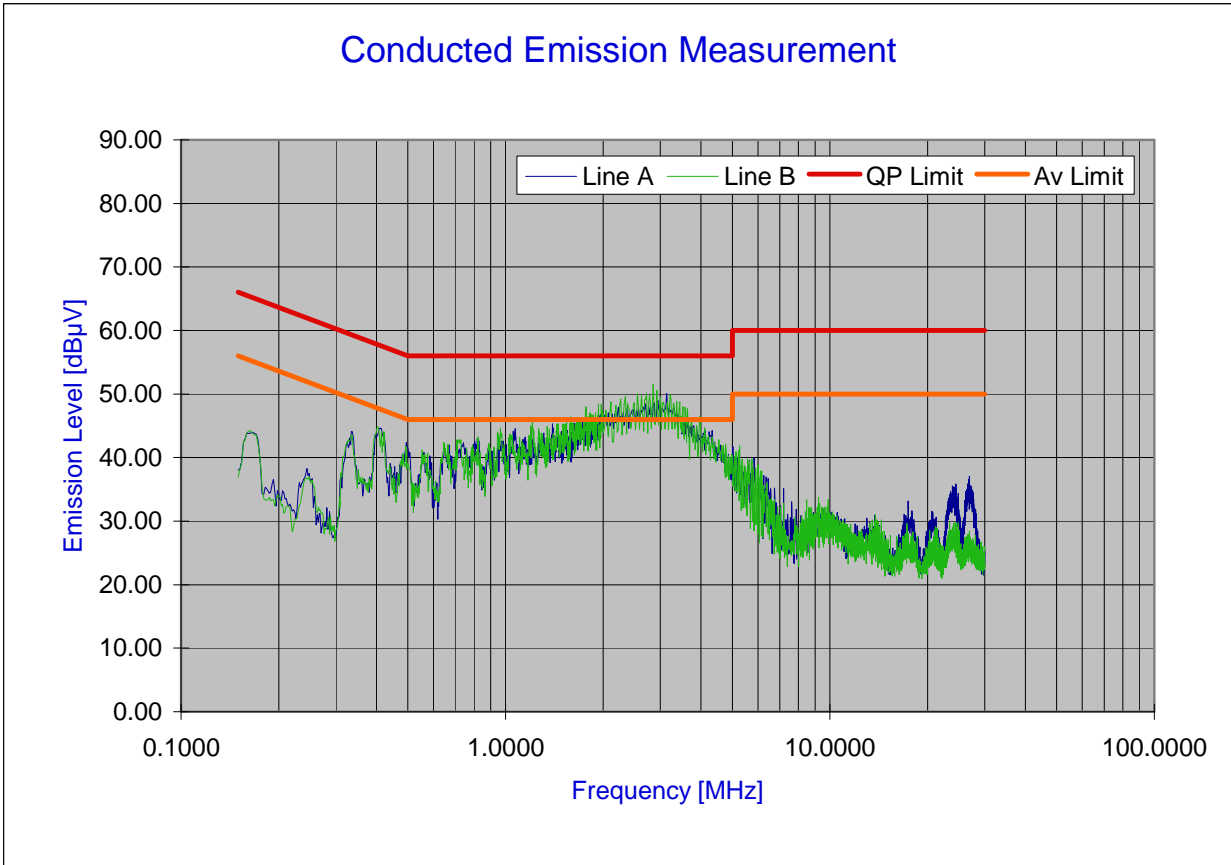



Ver.1.1 ©PCTEST 2006.08

Plot 6-78. Line Conducted Plot with 802.11a (UNII Band 3)

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera	Page 82 of 84	

Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	1.728	7.13	36.05	56.00	-19.95	25.83	46.00	-20.17
2	A	1.953	7.15	35.73	56.00	-20.27	26.27	46.00	-19.73
3	A	1.973	7.15	37.07	56.00	-18.93	26.94	46.00	-19.06
4	A	1.974	7.15	37.27	56.00	-18.73	26.58	46.00	-19.42
5	A	2.677	7.23	39.08	56.00	-16.92	29.20	46.00	-16.80
6	A	2.875	7.25	38.94	56.00	-17.06	29.56	46.00	-16.44
7	A	3.037	7.27	38.44	56.00	-17.56	28.76	46.00	-17.24
8	A	3.141	7.28	38.55	56.00	-17.45	28.64	46.00	-17.36
9	A	3.572	7.31	36.43	56.00	-19.57	26.24	46.00	-19.76
10	A	1.968	7.15	37.13	56.00	-18.87	26.93	46.00	-19.07
11	B	2.096	7.16	38.17	56.00	-17.83	28.03	46.00	-17.97
12	B	2.337	7.20	38.72	56.00	-17.28	29.46	46.00	-16.54
13	B	2.488	7.22	38.82	56.00	-17.18	30.26	46.00	-15.74
14	B	2.574	7.23	39.66	56.00	-16.34	30.29	46.00	-15.71
15	B	2.785	7.25	39.55	56.00	-16.45	30.17	46.00	-15.83
16	B	2.898	7.26	39.29	56.00	-16.71	30.08	46.00	-15.92
17	B	2.991	7.27	39.39	56.00	-16.61	29.69	46.00	-16.31
18	B	3.223	7.29	38.84	56.00	-17.16	29.47	46.00	-16.53
19	B	3.294	7.30	39.22	56.00	-16.78	28.57	46.00	-17.43
20	B	3.380	7.31	38.09	56.00	-17.91	28.11	46.00	-17.89

Table 6-31. Line Conducted Data with 802.11a (UNII Band 3)



Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
6. Margin (dB) = QP/AV Level (dBμV) – Limit (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 83 of 84

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Camera FCC ID: A3LEKGC100A** is in compliance with Part 15E of the FCC Rules and RSS-210 of the Industry Canada Rules.

FCC ID: A3LEKGC100A		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1210031463.A3L	Test Dates: 9/4 - 9/6/12, 9/20/12	EUT Type: Portable Camera		Page 84 of 84