

# TEST REPORT

OF

FCC CFR 47 part 1, 1.1307(b), 1.1310

FCC ID : A3LEPPN920

Equipment Under Test : WIRELESS CHARGER  
Model Name : EP-PN920  
Applicant : Samsung Electronics Co., Ltd.  
Manufacturer : Samsung Electronics Co., Ltd.  
Date of Receipt : 2016.09.28  
Date of Test(s) : 2016.09.30 ~ 2016.10.14  
Date of Issue : 2016.10.17

In the configuration tested, the EUT complied with the standards specified above.

Tested By:

  
Jinhyoung Cho

Date:

2016.10.17

Technical  
Manager:

  
Hyunchae You

Date:

2016.10.17

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Table of contents

1. General information -----	3
2. Test Result -----	6

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 1. General information

### 1.1. Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

### 1.2. Details of applicant

Applicant : Samsung Electronics Co., Ltd.  
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea  
Contact Person : Kim, Kyung-Won  
Phone No. : +82 31 301 0274

### 1.3. Description of EUT

<b>Kind of Product</b>	WIRELESS CHARGER
<b>Model Name</b>	EP-PN920
<b>Power Supply</b>	DC 5.0 V, DC 9.0 V
<b>Frequency Range</b>	110 kHz ~ 148 kHz
<b>Antenna Type</b>	Inductive loop coil antenna
<b>Operating Temperature</b>	-20 °C ~ 60 °C
<b>H/W Version</b>	REV0.6
<b>S/W Version</b>	0923

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 1.4. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Spectrum Analyzer	R&S	FSV30	100768	Mar. 30, 2016	Annual	Mar. 30, 2017
Mobile Test Unit	R&S	CMW 500	144034	Feb. 29, 2016	Annual	Feb. 28, 2017
E-Field Probe	D.A.R.E!! Instruments	RadiSense 4	13I00444SNO04	Aug. 02, 2016	Annual	Aug. 02, 2017
Magnetic Field Sensor	HIOKI	0850-B1	3471	Jul. 22, 2016	Annual	Jul. 22, 2017
Magnetic Field Hitester	HIOKI	FT3470-50	140430999	Jul. 22, 2016	Annual	Jul. 22, 2017
DC Power Supply	Agilent	U8002A	MY50060028	Mar. 21, 2016	Annual	Mar. 21, 2017
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.

## ► Support equipment

Description	Manufacturer	Model	FCC ID
Smart Wearable Device	Samsung Electronics Co., Ltd.	SM-G935F	A3LSMG935F

## 1.5. Test report revision

Revision	Report number	Date of Issue	Description
0	F690501/RF-RTL10414	2016.10.17	Initial

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 1.6. Worst case of test configurations

In order to check all kinds of possible configurations, EUT was evaluated with appropriate client and under each charging condition as below table.

EUT configuration	Description
Charging Mode with client device (Model : SM-G935F, FCC ID : A3LSMG935F)	Less than 1 % of battery
	Less than 50 % of battery
	100 % full charging of battery


### EUT setup configuration:

- The EUT can be capable of charging one client at a time.
- The measurement is performed with a typical WPT client device on the power transfer zone.

### Operating configurations :

#### Client device (SM- G935F)

- While the client device was connected to an active data connection (Trace#1 "M1")  
The device was tested under all modes and bands like 2G and 3G.  
In the result, **PCS GSM / GPRS1900 / 1 TX** was found in **Middle channel**.
- While the client device was in airplane mode (Trace#2 "M2")
- While the wireless charger is charging with the client device turned off. (Trace#3 "M3")

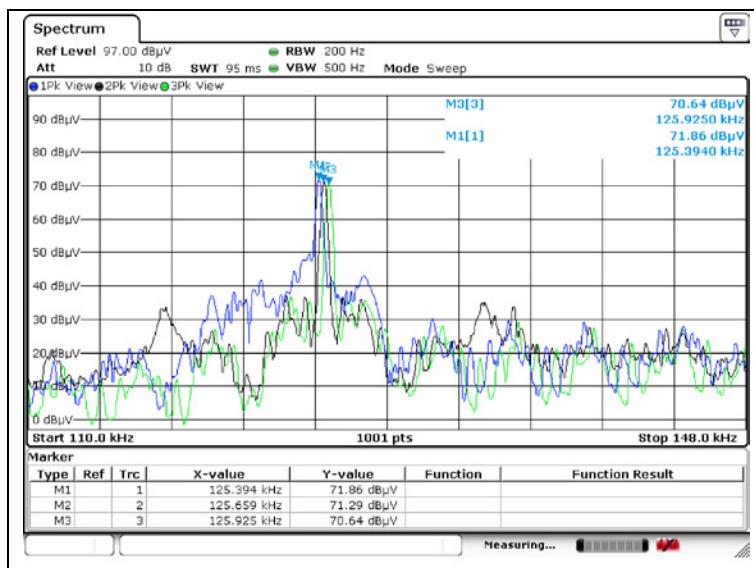

Plot – fundamental emission comparison


- The level of Trace#1 was higher than Trace#2 and 3 so Trace#1 was selected.
- Trace#1 as **PCS GSM / GPRS1900 / 1 TX** which was found in **Middle channel** should be tested with the client device as a worst case.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 2. Test Result

### 2.1. Test Setup

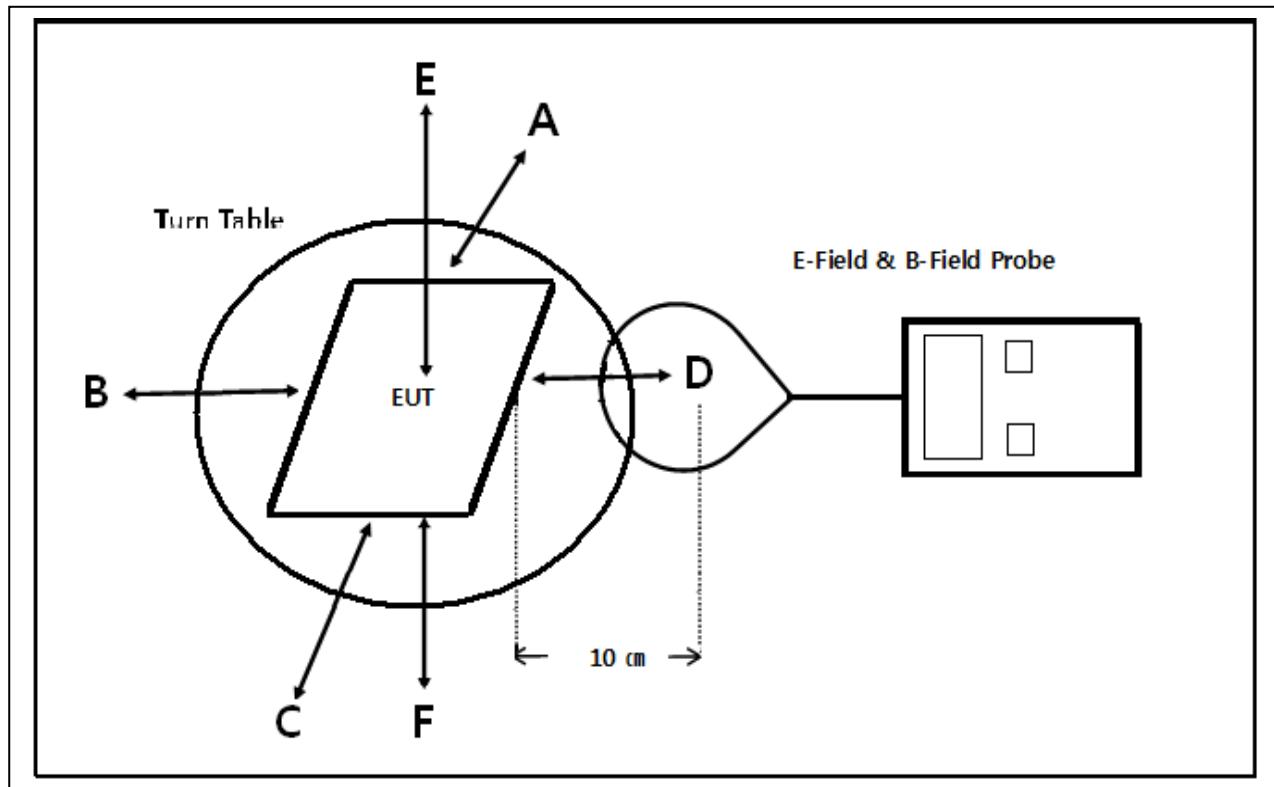

### 2.2. Measurement procedure

- The RF exposure test was performed in anechoic chamber.
- The measurement probe was placed at test distance (10 cm) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- The EUT was measured according to the dictates of KDB 680106 D01v02.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**2.3. Equipment Approval Considerations item 5.2 of KDB 680106 D01v02.**

- a) Power transfer frequency is less than 1 **MHz**.
  - The device operates at a frequency of 110 **kHz** to 148 **kHz**.
- b) Output power from each primary coil is less than 5 watts.
  - DC 5 V condition → Output power from each primary coil : 5 W(Max.)
  - DC 9 V condition → Output power from each primary coil : 9 W(Max.)
- c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
  - The transfer system includes only single primary and secondary coils. Refer to a photo in the internal photos.
- d) Client device is inserted in or placed directly in contact with the transmitter.
  - Client device is placed directly in contact with the transmitter.
- e) The maximum coupling surface area of the transmit (charging) device:
  - The EUT coupling surface area :  $10.2 \text{ cm(W)} \times 10.2 \text{ cm(D)} = 104.04 \text{ cm}^2$ ,  
 $60 \text{ cm}^2 < 104.04 \text{ cm}^2 < 400 \text{ cm}^2$ .
- f) Aggregate leakage fields at 10 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30 % of the MPE limit.
  - Refer to following test results.  
The EUT field strength levels < MPE limit 1.63 A/m.

0.197 A/m (Max.) < 1.63 A/m

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**2.4. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310**

§1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter

**TABLE 1 - LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
(A) Limits for Occupational /Control Exposures				
0.3 – 3.0	614	1.63	*(100)	6
3.0 – 30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30 – 300	61.4	0.163	1.0	6
300 – 1 500			f/300	6
1 500 – 100 000			5	6
(B) Limits for General Population / Uncontrol Exposures				
<u>0.3 – 1.34</u>	<u>614</u>	<u>1.63</u>	*(100)	30
1.34 – 30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30 – 300	27.5	0.073	0.2	30
300 – 1 500			f/1 500	30
1 500 – 100 000			1.0	30

f = frequency in MHz

\* = Plane wave equivalent power density

Note 1 to Table 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2 to Table 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 2.5. E and H field strength

Ambient temperature :  $(23 \pm 1)$  °C

Relative humidity : 47 % R.H.

### 2.5.1. E-Field Strength at 10 cm from the edges surrounding the EUT

#### Test Mode : Charging mode with client device (DC 5 V)

Test mode: Charging mode (less than 1 % battery status of client device)

Frequency Range (kHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Probe Position F (V/m)	Limits (V/m)
110 ~ 148	4.60	8.90	12.40	10.90	9.40	6.60	614.00

Test mode: Charging mode (less than 50 % battery status of client device)

Frequency Range (kHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Probe Position F (V/m)	Limits (V/m)
110 ~ 148	8.70	10.10	11.30	12.60	14.70	7.10	614.00

Test mode: Charging mode (100 % battery status of client device)

Frequency Range (kHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Probe Position F (V/m)	Limits (V/m)
110 ~ 148	8.40	11.70	13.50	11.60	13.90	5.40	614.00

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**Test Mode : Charging mode with client device (DC 9 V)**

Test mode: Charging mode (less than 1 % battery status of client device)

Frequency Range (kHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Probe Position F (V/m)	Limits (V/m)
110 ~ 148	9.20	12.40	11.70	12.60	13.80	7.50	614.00

Test mode: Charging mode (less than 50 % battery status of client device)

Frequency Range (kHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Probe Position F (V/m)	Limits (V/m)
110 ~ 148	10.10	13.40	13.20	15.90	18.60	8.30	614.00

Test mode: Charging mode (100 % battery status of client device)

Frequency Range (kHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Probe Position F (V/m)	Limits (V/m)
110 ~ 148	7.60	9.20	18.60	13.50	14.60	7.80	614.00

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

**2.5.2. H-Field Strength at 10 cm from the edges surrounding the EUT****Test Mode : Charging mode with client device (DC 5 V)**

Test condition: Charging mode (less than 1 % battery status of client device)

Frequency Range (kHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Probe Position F (A/m)	Limits (A/m)
110 ~ 148	0.035	0.062	0.045	0.043	0.050	0.076	1.630

Test condition: Charging mode (less than 50 % battery status of client device)

Frequency Range (kHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Probe Position F (A/m)	Limits (A/m)
110 ~ 148	0.059	0.070	0.072	0.074	0.034	0.082	1.630

Test condition: Charging mode (100 % battery status of client device)

Frequency Range (kHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Probe Position F (A/m)	Limits (A/m)
110 ~ 148	0.090	0.083	0.083	0.054	0.069	0.128	1.630

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**Test Mode : Charging mode with client device (DC 9 V)**

Test condition: Charging mode (less than 1 % battery status of client device)

Frequency Range (kHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Probe Position F (A/m)	Limits (A/m)
110 ~ 148	0.107	0.079	0.093	0.083	0.101	0.197	1.630

Test condition: Charging mode (less than 50 % battery status of client device)

Frequency Range (kHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Probe Position F (A/m)	Limits (A/m)
110 ~ 148	0.089	0.110	0.158	0.058	0.142	0.166	1.630

Test condition: Charging mode (100 % battery status of client device)

Frequency Range (kHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Probe Position F (A/m)	Limits (A/m)
110 ~ 148	0.100	0.122	0.117	0.074	0.132	0.150	1.630

**- End of the Test Report -**

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)