



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctest.com



MEASUREMENT REPORT FCC PART 15.247 / RSS-247 Zigbee

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
5/9-6/13/2018
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M1805080100-07.A3L

FCC ID:	A3LETWV525
IC:	649E-ETWV525
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type:	Certification
Model / HVIN:	ET-WV525
EUT Type:	Indoor Access Point
Max. RF Output Powers:	53.438 mW (17.36 dBm) Peak Conducted
Frequency Range:	2405 – 2480MHz
FCC Classification:	Digital Transmission System (DTS)
FCC Rule Part(s):	Part 15 Subpart C (15.247)
ISED Specification:	RSS-247 Issue 2
Test Procedure(s):	ANSI C63.10-2013, KDB 558074 D01 v04, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v04. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President



FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 1 of 45	

TABLE OF CONTENTS

1.0	INTRODUCTION.....	3
1.1	Scope	3
1.2	PCTEST Test Location.....	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications	4
3.0	DESCRIPTION OF TESTS	5
3.1	Evaluation Procedure	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions.....	6
3.4	Environmental Conditions.....	6
4.0	ANTENNA REQUIREMENTS	7
5.0	MEASUREMENT UNCERTAINTY.....	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST RESULTS.....	10
7.1	Summary	10
7.2	6dB Bandwidth Measurement	11
7.3	Output Power Measurement.....	14
7.4	Power Spectral Density	18
7.5	Conducted Emissions at the Band Edge	22
7.6	Conducted Spurious Emissions.....	25
7.7	Radiated Spurious Emission Measurements – Above 1 GHz.....	30
7.7.1	Radiated Spurious Emission Measurements	33
7.7.2	Radiated Restricted Band Edge Measurements	37
7.8	Radiated Spurious Emissions Measurements – Below 1GHz	38
7.9	Line-Conducted Test Data.....	42
8.0	CONCLUSION	45

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 2 of 45	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 3 of 45	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Indoor Access Point FCC ID: A3LETWV525**. The test data found in this report was taken with the EUT operating in Zigbee mode.

Test Device Serial No.: 5HX3S, 79YX3S, 1VX3S, AWX3S, BNX3S, 6PX3S, 5HX3S

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, Bluetooth (LE), Zigbee, Zwave

Ch.	Frequency (MHz)
0	2405
:	:
18	2440
:	:
26	2480

Table 2-1. Frequency/ Channel Operations

2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 4 of 45	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v04 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 0. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 5 of 45	

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 6 of 45	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 7 of 45	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 8 of 45	

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	6/14/2017	Annual	6/14/2018	WL25-1
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	5/25/2018	Annual	5/25/2019	MY52350166
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Keysight Technologies	N9038A	MXE EMI Receiver (3Hz-44GHz)	4/30/2018	Annual	4/30/2019	MY5640070
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/23/2018	Annual	1/23/2019	NMLC-2
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102133
Rohde & Schwarz	TS-PR8	Preamplifier (30MHz-8GHz)	10/19/2017	Annual	10/19/2018	102324
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	1/24/2018	Annual	1/24/2019	100040
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	1/22/2018	Annual	1/22/2019	N/A
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	8/14/2017	Biennial	8/14/2019	310233
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol Sciences	JB6	JB6 Antenna	9/27/2016	Biennial	9/27/2018	A082816

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 9 of 45	

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LETWV525
 IC: 649E-ETWV525
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “WLAN Automation,” Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 0.2.8.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 10 of 45	

7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2
KDB 558074 D01 v04 – Section 8.2 Option 2

Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The “X” dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 11 of 45	


Frequency [MHz]	Channel No.	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2405	11	1.650	0.500
2440	18	1.640	0.500
2480	26	1.648	0.500

Table 7-2. Conducted Bandwidth Measurements SISO ANT1

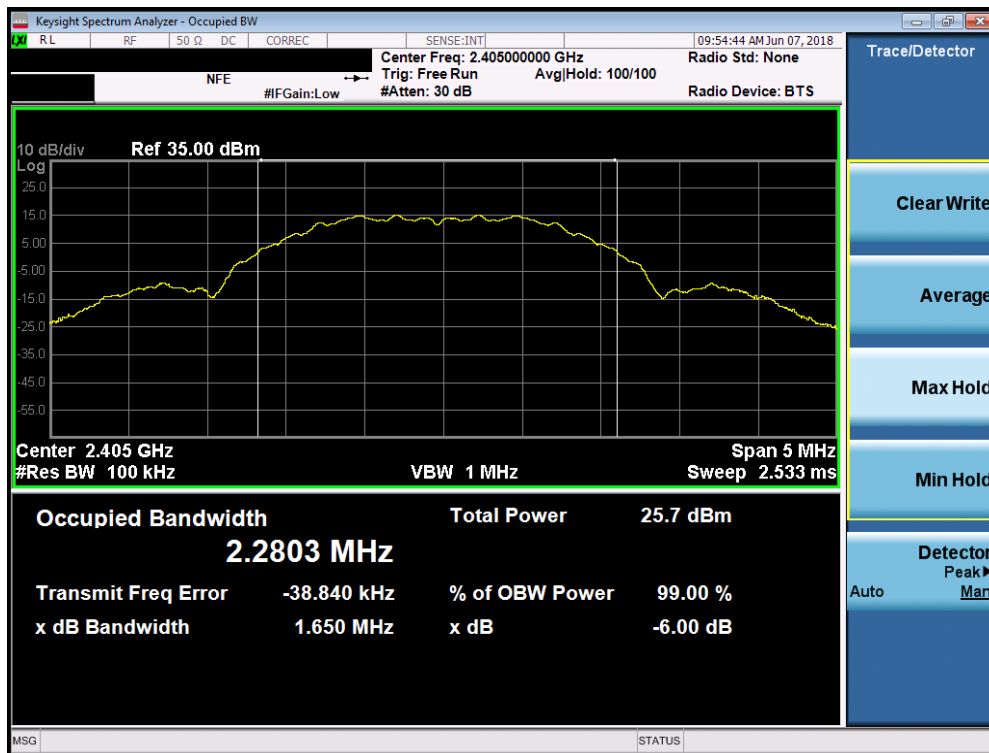


Plot 7-1. 6dB Bandwidth Plot (Zigbee – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 12 of 45	

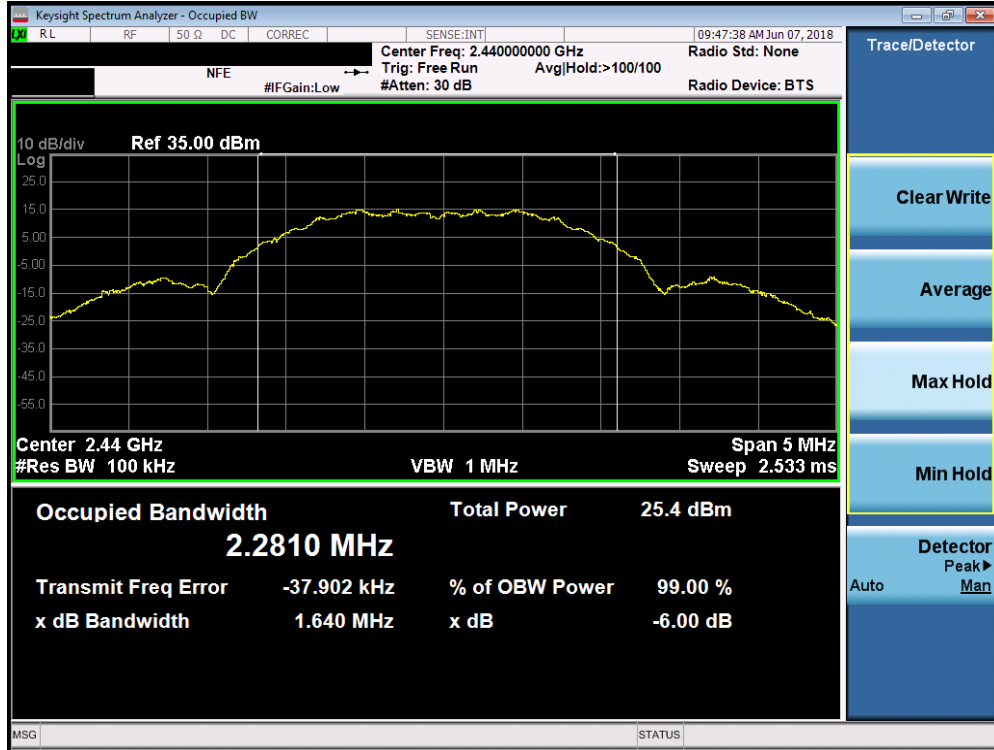

Plot 7-2. 6dB Bandwidth Plot (Zigbee – Ch. 18)

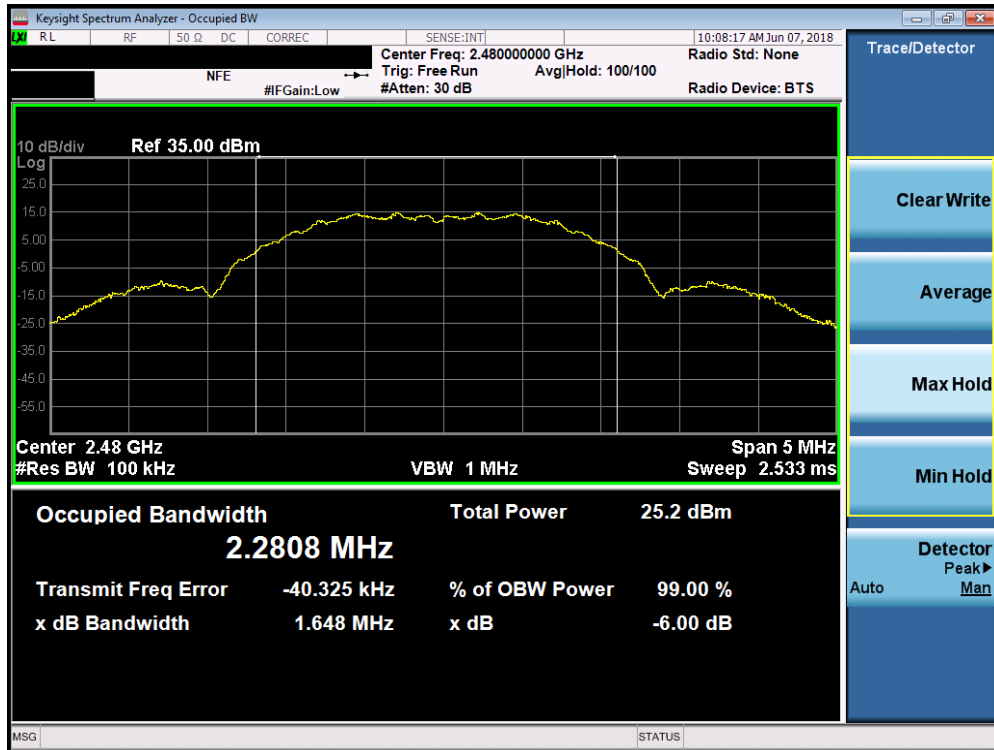

Plot 7-3. 6dB Bandwidth Plot (Zigbee – Ch. 26)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 13 of 45

7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Test Overview and Limits

The transmitter antenna terminal of the EUT is connected to the input of a spectrum analyzer. Measurements are made while the EUT is operating at maximum power and at the appropriate frequencies.

The maximum permissible conducted output power is 1W. The maximum permissible e.i.r.p is 4W.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.1

Test Settings

1. RBW > 6dB bandwidth of emission being measured
2. VBW ≥ 3 x RBW
3. Span ≥ 3 x RBW
4. Sweep = auto couple
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 14 of 45	

Final results were obtained using calibrated couplers, attenuators and cables. The following formula was used:

$$\text{Output Power (dBm)} = \text{Raw Analyzer Level (dBm)} + \text{Cable Loss (dB)} + \text{Loss in Directional Coupler/Insertion Loss (dB)}$$


Frequency [MHz]	Channel No.	Peak Conducted Power		Ant. Gain [dBi]	EIRP	Limit	Margin
		[dBm]	[mW]				
2405	11	17.31	53.827	-1.10	16.21	36.02	-19.81
2440	18	16.74	47.250	-0.70	16.04	36.02	-19.98
2475	25	17.36	54.438	-1.50	15.86	36.02	-20.16
2480	26	4.97	3.139	-1.50	3.47	36.02	-32.55

Table 7-3. Conducted Output Power / EIRP Measurements

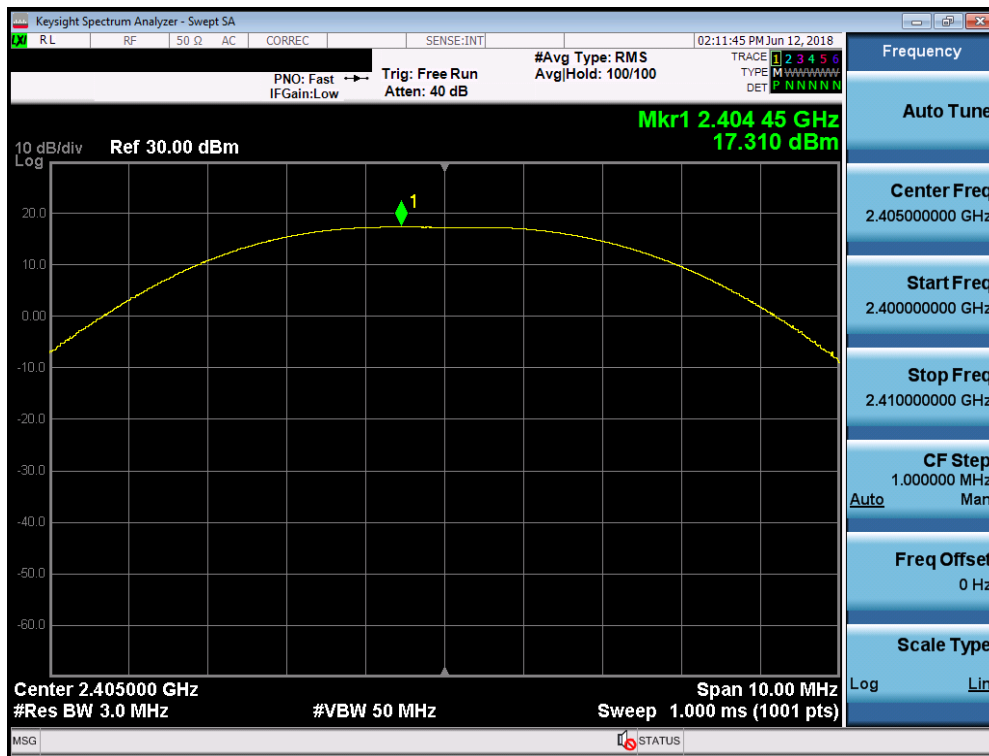


Plot 7-4. Peak Power Plot (Zigbee – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 15 of 45

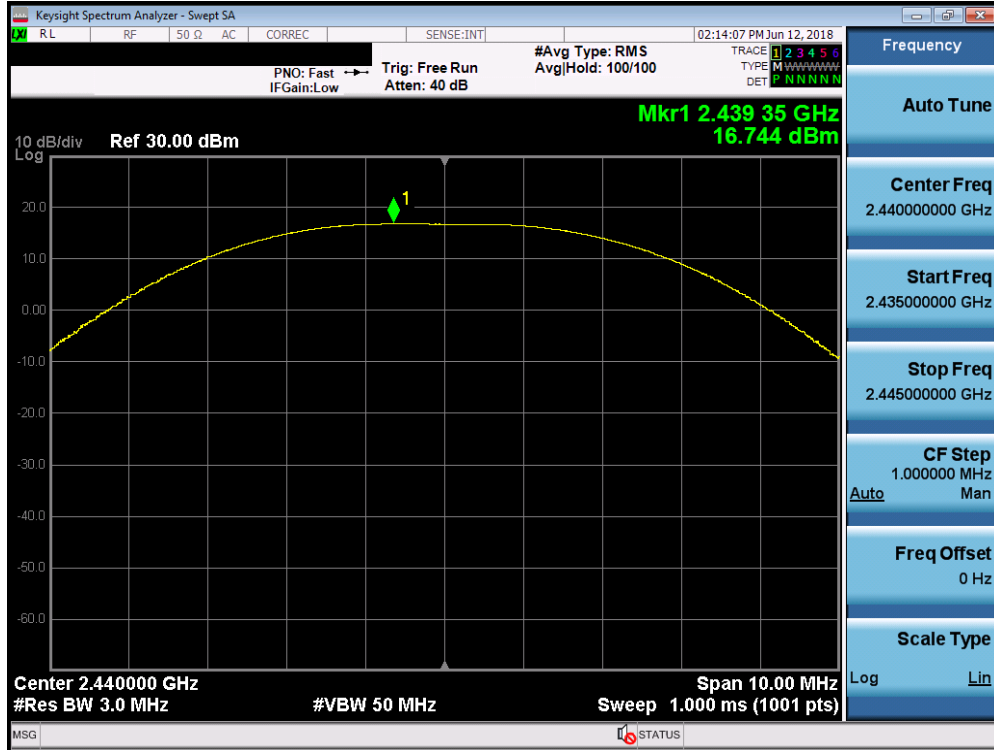


Plot 7-5. Peak Power Plot (Zigbee – Ch. 18)

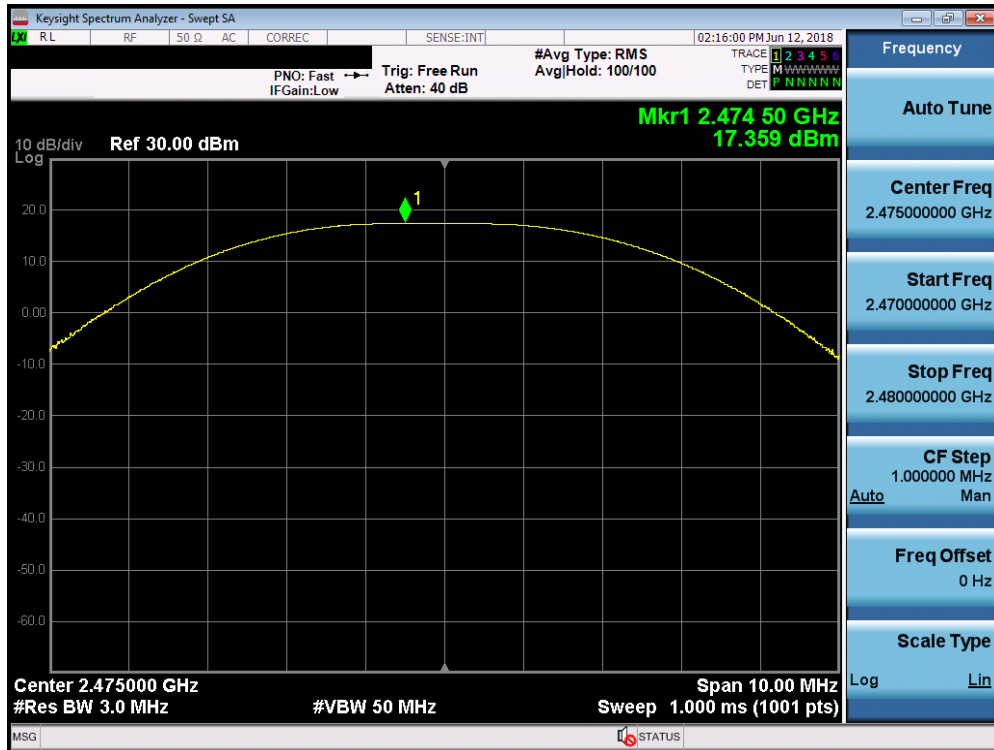

Plot 7-6. Peak Power Plot (Zigbee – Ch. 25)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 16 of 45

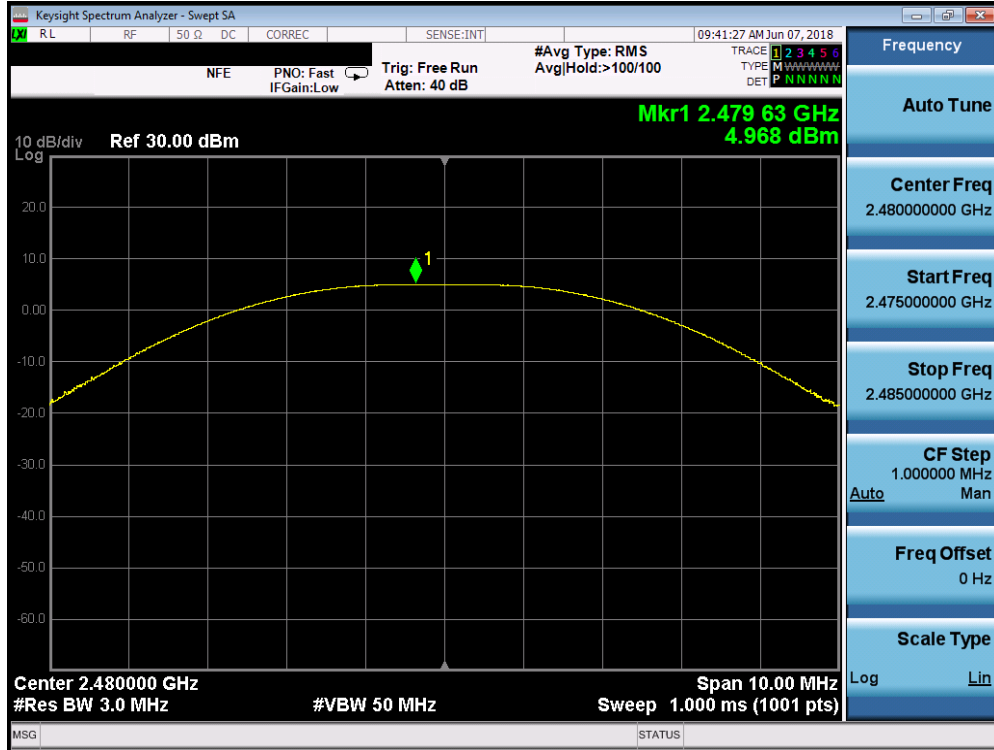

Plot 7-7. Peak Power Plot (Zigbee – Ch. 26)

Sample e.i.r.p. Calculation:

At 2480MHz, the peak conducted output power was measured to be 4.968 dBm with antenna gain of -1.5 dBi.
 EIRP (dBm) = Conducted Output Power (dBm) + Ant gain (dBi)

$$= 4.968 \text{ dBm} - 1.5 \text{ dBi}$$

$$= 3.47 \text{ dBm}$$

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 17 of 45

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD
 KDB 558074 D01 v04 – Section 10.2 Method PKPSD
 ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 18 of 45	

SISO Antenna-1 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2405	11	7.47	8.00	-0.53	Pass
2440	18	7.15	8.00	-0.85	Pass
2475	25	7.20	8.00	-0.81	Pass
2480	26	-7.24	8.00	-15.24	Pass

Table 7-4. Conducted Power Density Measurements SISO ANT1

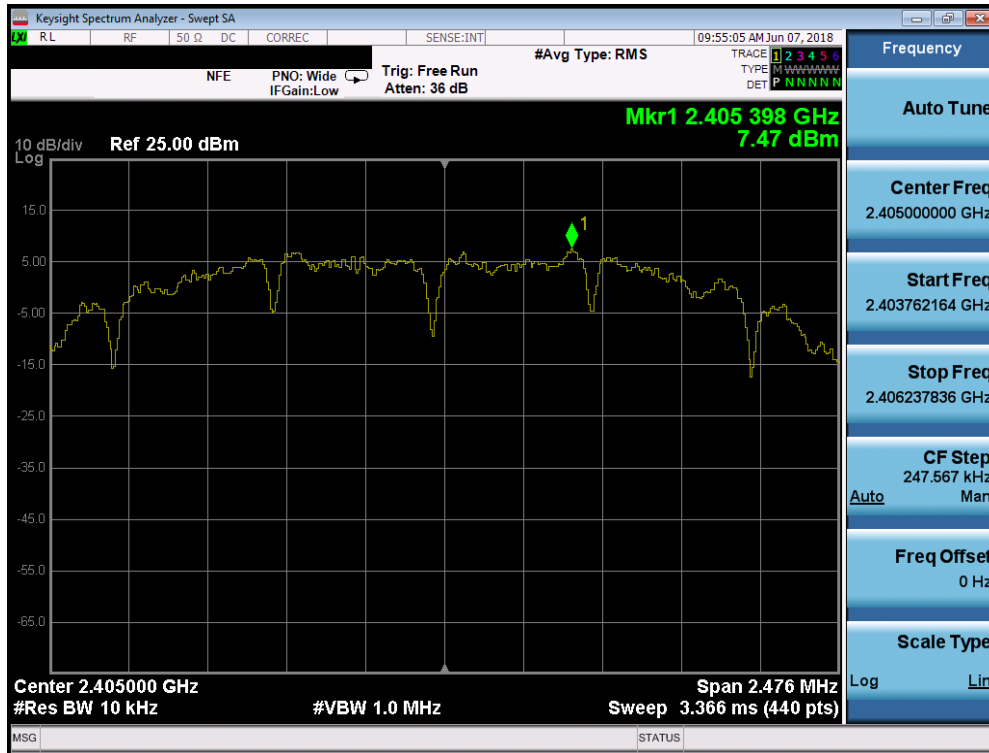


Plot 7-8. Power Spectral Density Plot (Zigbee – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 19 of 45

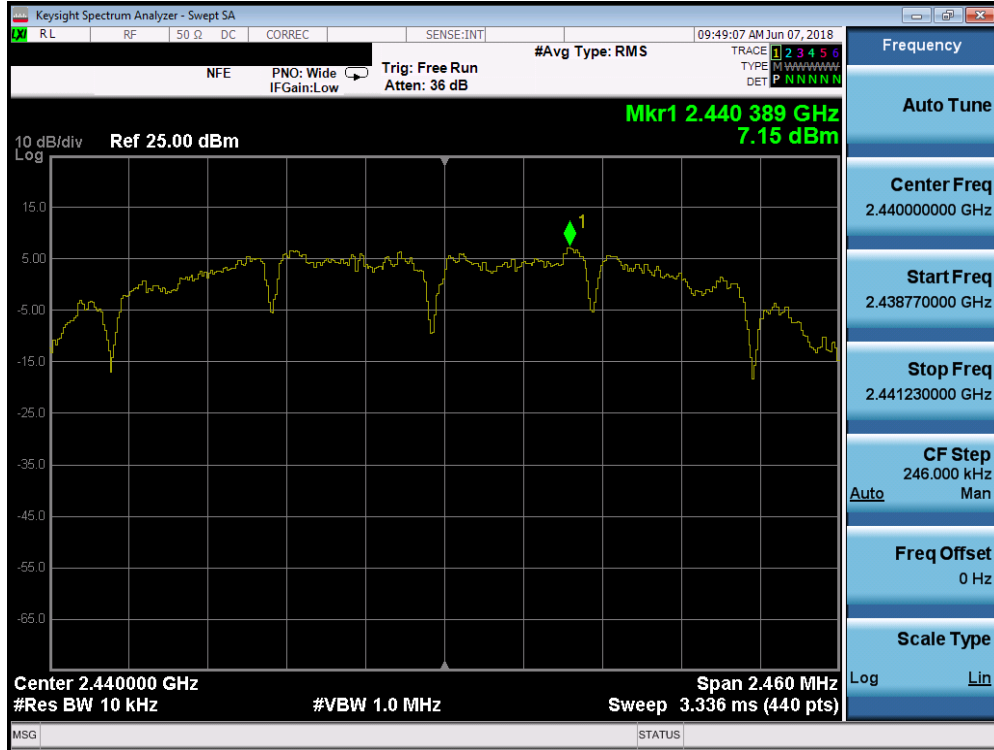

Plot 7-9. Power Spectral Density Plot (Zigbee – Ch. 18)

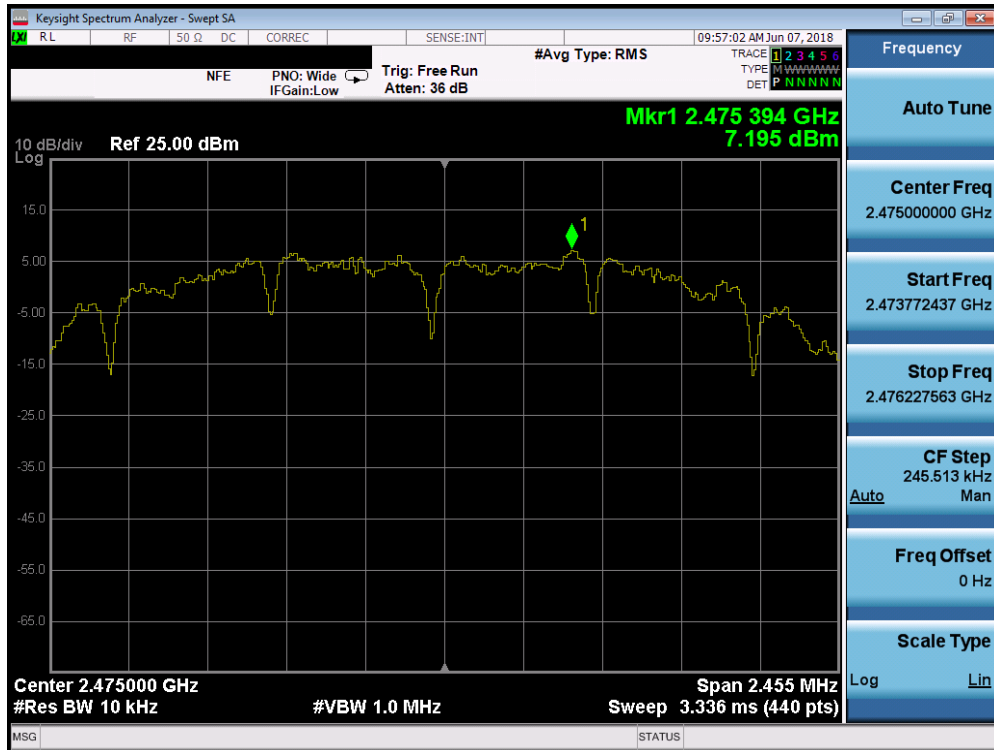

Plot 7-10. Power Spectral Density Plot (Zigbee – Ch. 25)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 20 of 45



Plot 7-11. Power Spectral Density Plot (Zigbee – Ch. 26)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 21 of 45

7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, and 6.5/7.2Mbps for “n” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v04 – Section 11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 22 of 45	

Conducted Emissions at the Band Edge

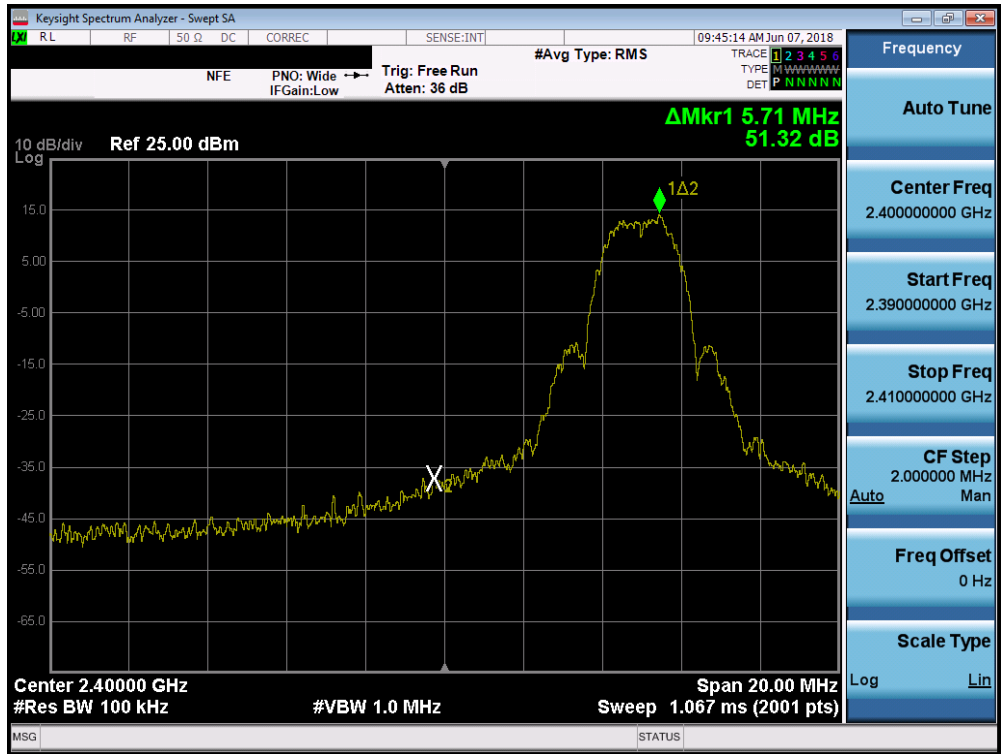


Plot 7-12. Band Edge Plot (Zigbee – Ch. 11)

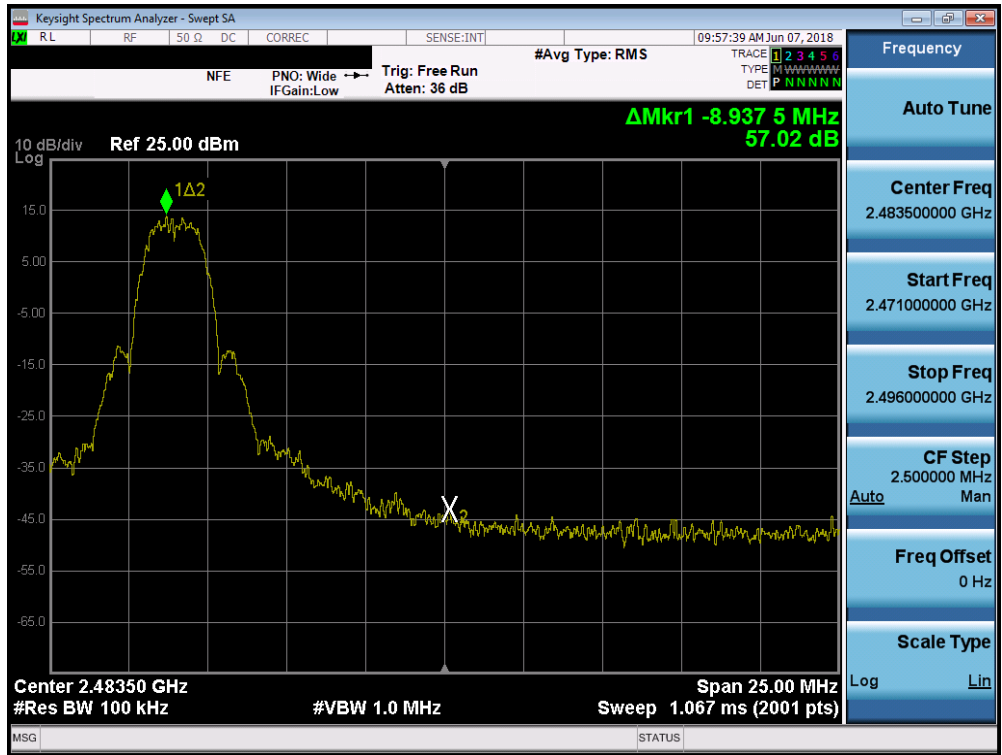

Plot 7-13. Band Edge Plot (Zigbee – Ch. 25)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 23 of 45

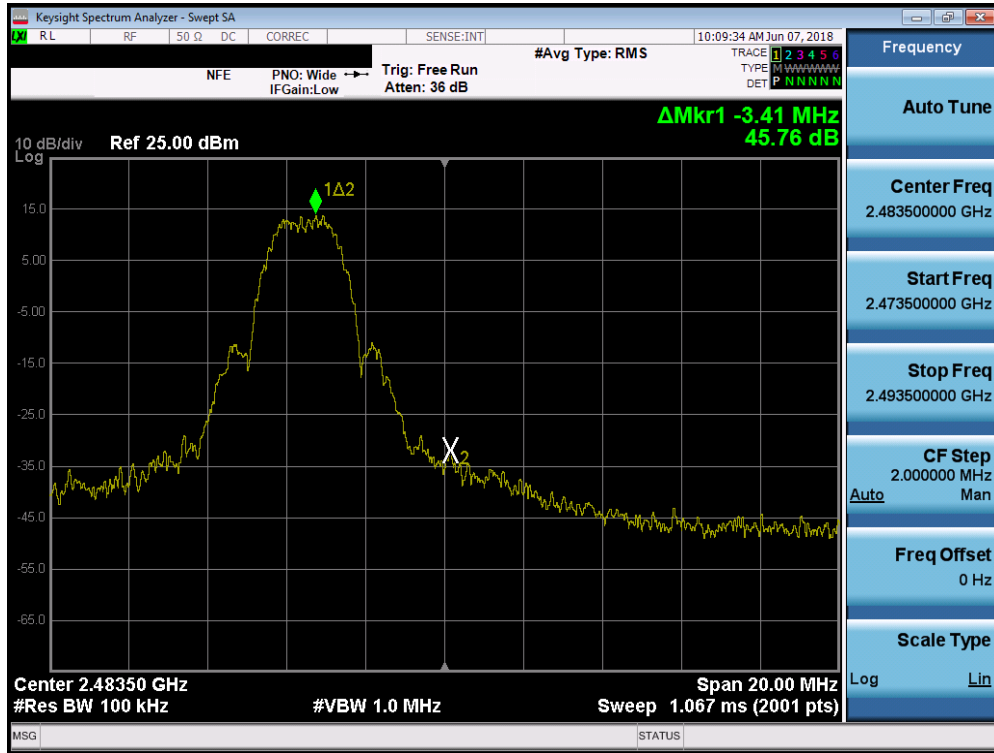

Plot 7-14. Band Edge Plot (Zigbee – Ch. 26)

FCC ID: A3LETWV525 IC: 649E-ETWV525	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 24 of 45	

7.6 Conducted Spurious Emissions

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, and “n” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of ANSI C63.10-2013 and KDB 558074 D01 v04.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
 KDB 558074 D01 v04 – Section 11.3
 ANSI C63.10-2013 – Section 14.3.3
 KDB 662911 D01 v02r01 – Section E)3)b)

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 25 of 45	

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)3)b), it was unnecessary to show compliance through the summation of test results of the individual outputs.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 26 of 45	

Conducted Spurious Emission

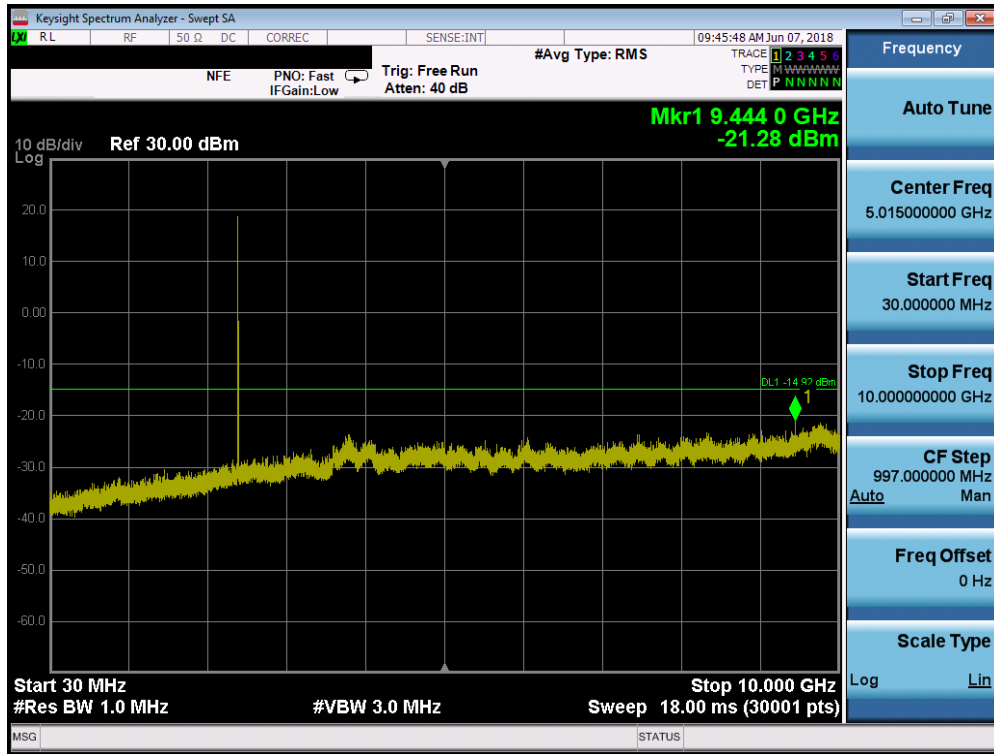


Plot 7-15. Conducted Spurious Plot (ZigBee – Ch. 11)

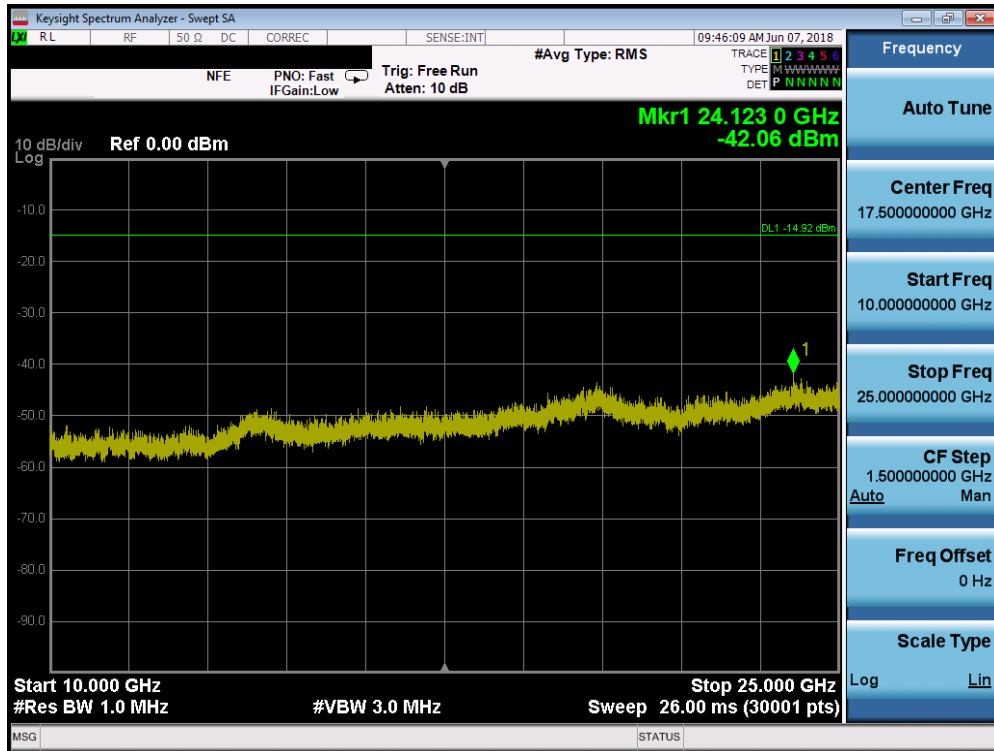


Plot 7-16. Conducted Spurious Plot (ZigBee – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 27 of 45

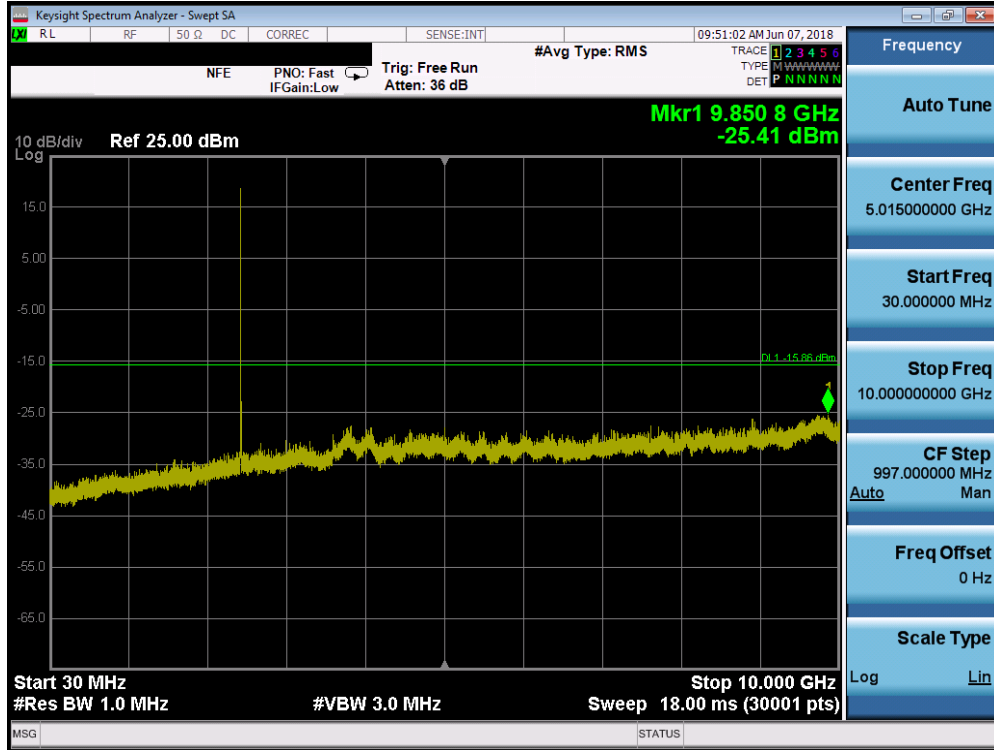


Plot 7-17. Conducted Spurious Plot (ZigBee – Ch. 18)

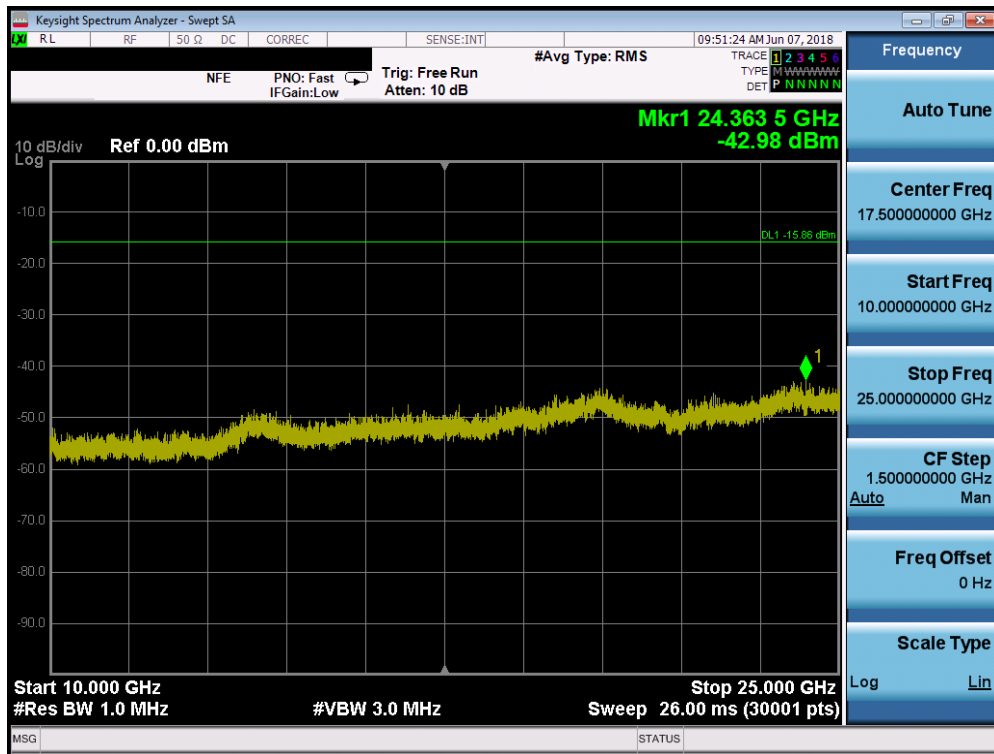


Plot 7-18. Conducted Spurious Plot (ZigBee – Ch. 18)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 28 of 45

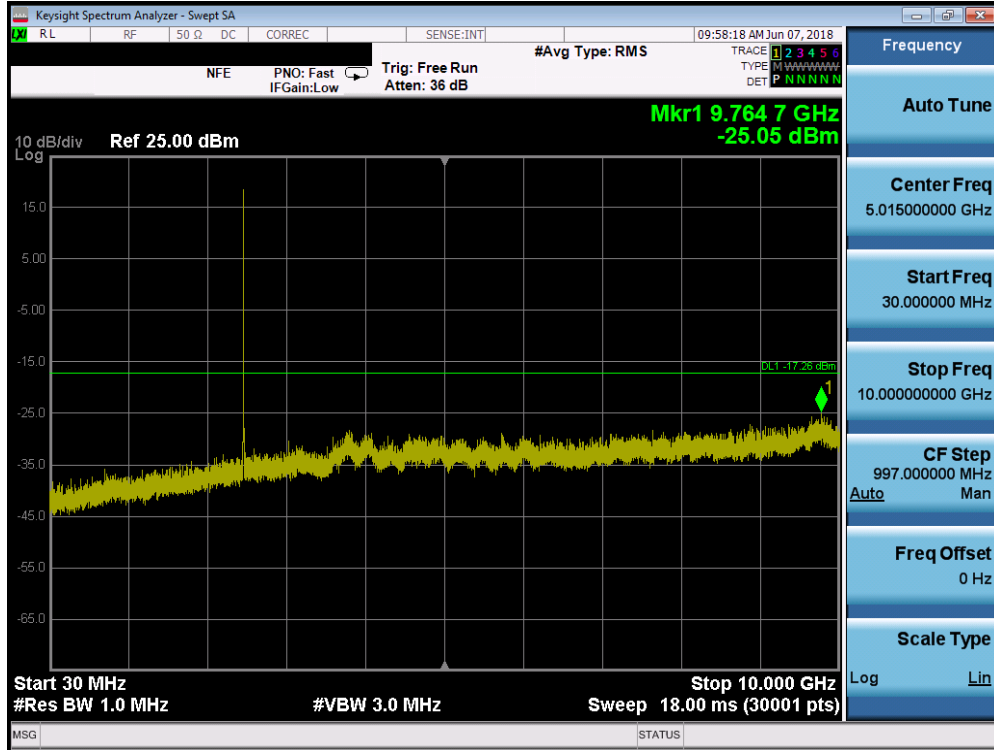

Plot 7-19. Conducted Spurious Plot (ZigBee – Ch. 26)

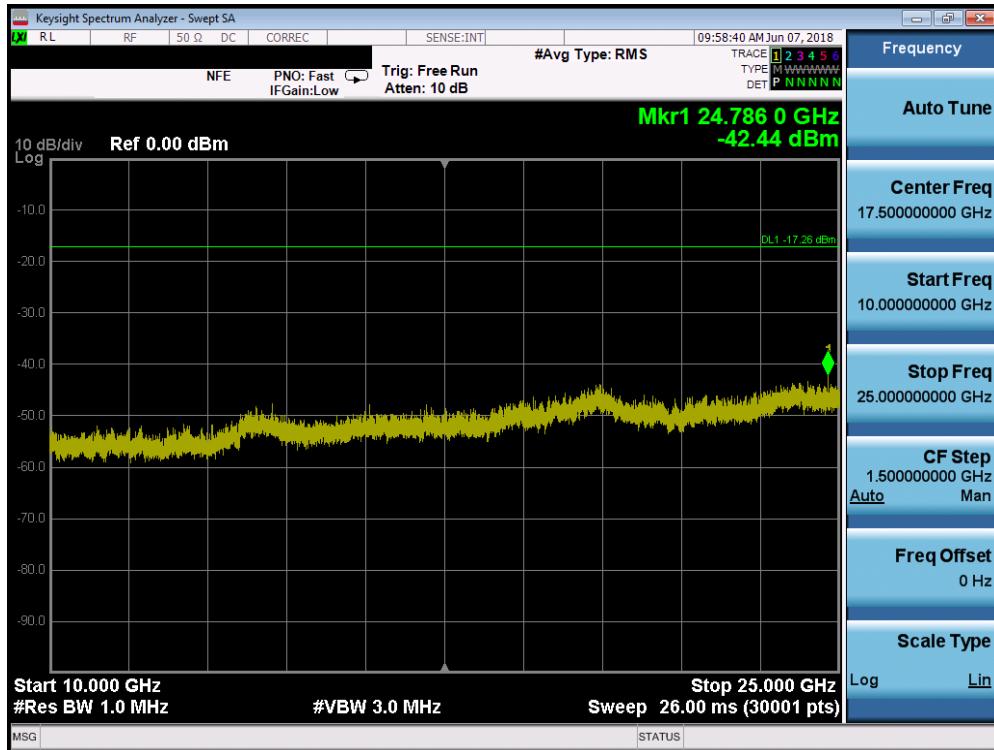

Plot 7-20. Conducted Spurious Plot (ZigBee – Ch. 26)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 29 of 45

7.7 Radiated Spurious Emission Measurements – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-5 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-5. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3
KDB 558074 D01 v04 – Section 12.1, 12.2.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 30 of 45	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

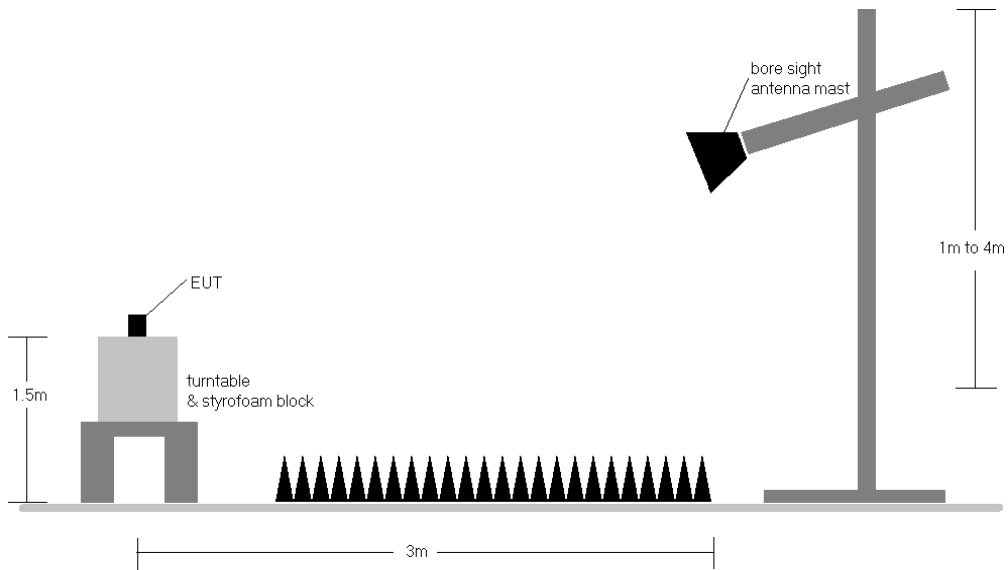


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v04 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-5.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested while powered by an AC power source.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 31 of 45	

produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.

8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- o Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- o $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- o $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset


- o The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 32 of 45	

7.7.1 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

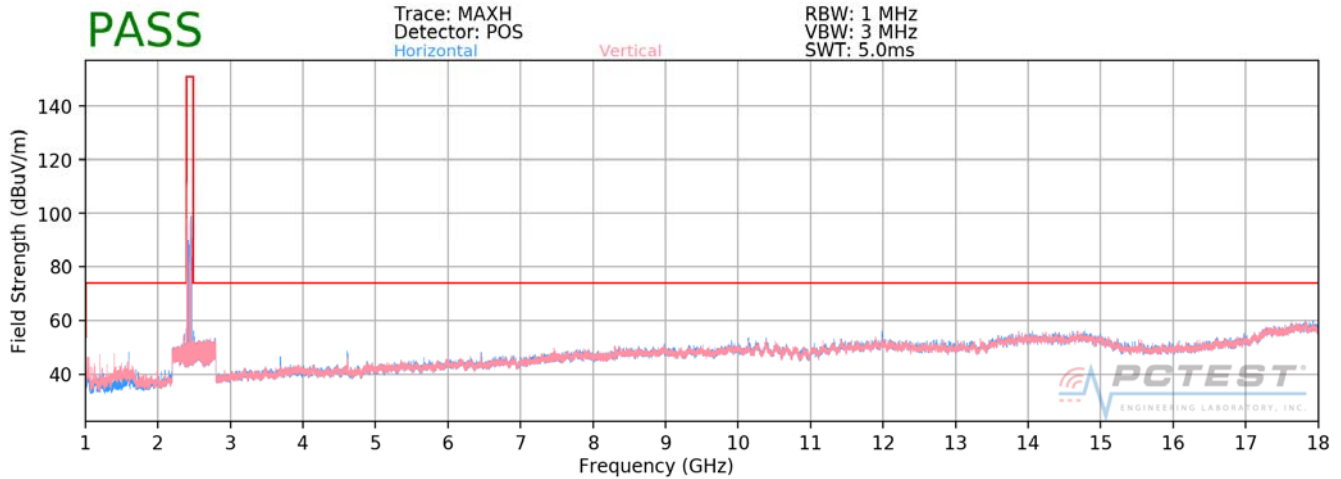

Plot 7-21. Radiated Spurious Plot above 1GHz (Zigbee – Ch. 11)

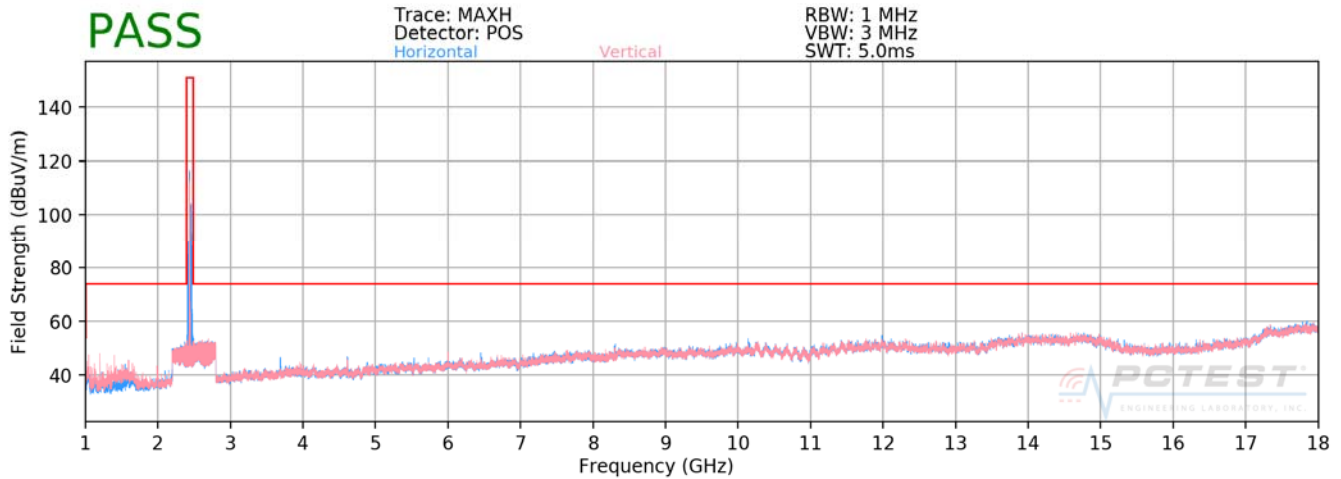


Plot 7-22. Radiated Spurious Plot above 1GHz (Zigbee – Ch. 18)

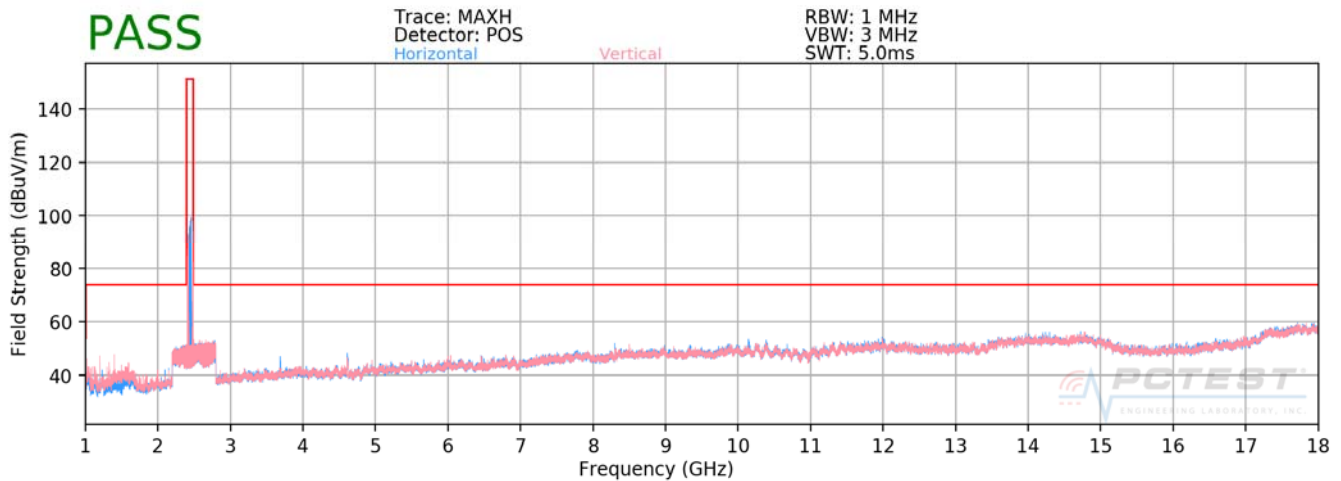

Plot 7-23. Radiated Spurious Plot above 1GHz (Zigbee – Ch. 26)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 33 of 45

Radiated Spurious Emissions Measurements (Above 18GHz)
§15.209; RSS-Gen [8.9]

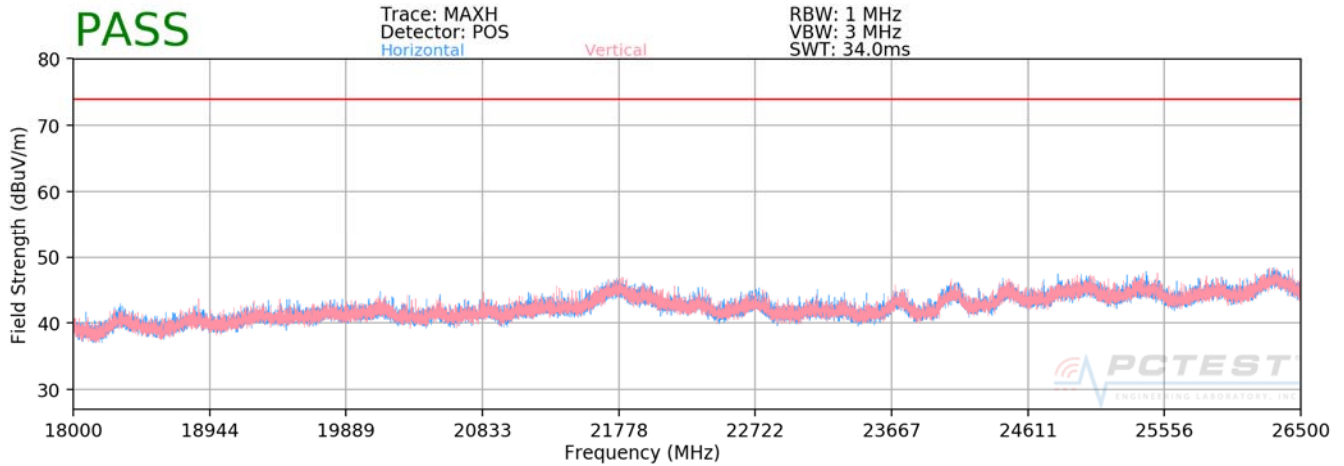

Plot 7-24. Radiated Spurious Plot above 18GHz SISO ANT1

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 34 of 45	

Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Mode: Zigbee
 Distance of Measurements: 3 Meters
 Operating Frequency: 2405MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4810.00	Avg	H	154	223	-75.15	2.95	34.80	53.98	-19.18
4810.00	Peak	H	154	223	-64.58	2.95	45.37	73.98	-28.61
12025.00	Avg	H	-	-	-79.39	16.21	43.82	53.98	-10.16
12025.00	Peak	H	-	-	-68.51	16.21	54.70	73.98	-19.28

Table 7-6. Radiated Measurements

Mode: Zigbee
 Distance of Measurements: 3 Meters
 Operating Frequency: 2440MHz
 Channel: 18

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	H	250	191	-72.51	4.52	39.01	53.98	-14.97
4880.00	Peak	H	250	191	-64.24	4.52	47.28	73.98	-26.70
7320.00	Avg	H	304	206	-77.58	9.18	38.60	53.98	-15.38
7320.00	Peak	H	304	206	-66.28	9.18	49.90	73.98	-24.08
12200.00	Avg	H	-	-	-79.63	15.40	42.77	53.98	-11.21
12200.00	Peak	H	-	-	-67.85	15.40	54.55	73.98	-19.43

Table 7-7. Radiated Measurements

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 35 of 45	

Mode: Zigbee
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 26

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-77.12	4.12	34.00	53.98	-19.98
4960.00	Peak	H	-	-	-65.22	4.12	45.90	73.98	-28.08
7440.00	Avg	H	-	-	-77.82	8.99	38.17	53.98	-15.81
7440.00	Peak	H	-	-	-66.27	8.99	49.72	73.98	-24.26
12400.00	Avg	H	-	-	-79.52	15.69	43.17	53.98	-10.81
12400.00	Peak	H	-	-	-67.90	15.69	54.79	73.98	-19.19


Table 7-8. Radiated Measurements

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 36 of 45	


7.7.2 Radiated Restricted Band Edge Measurements §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Mode: Zigbee
 Distance of Measurements: 3 Meters
 Operating Frequency: 2475MHz
 Channel: 25

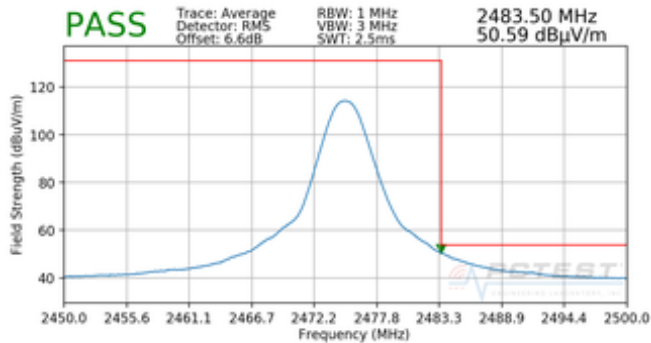


Plot 7-25. Radiated Restricted Lower Band Edge Measurement (Average)

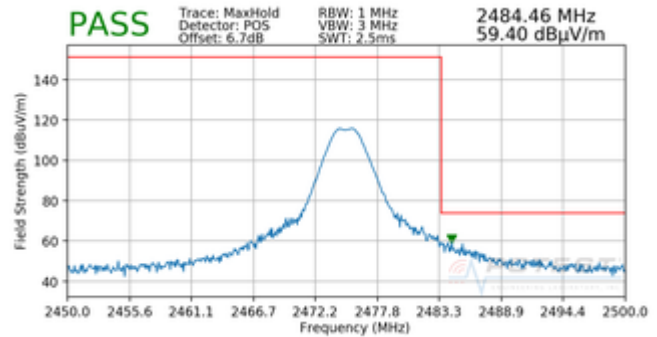


Plot 7-26. Radiated Restricted Lower Band Edge Measurement (Peak)

Mode: Zigbee
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 26

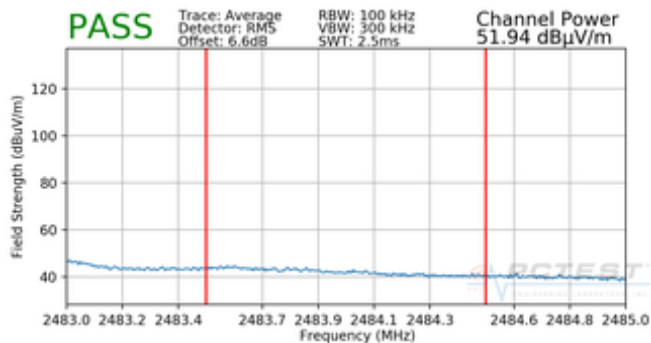

Plot 7-27. Radiated Restricted Upper Band Edge Measurement (Average)

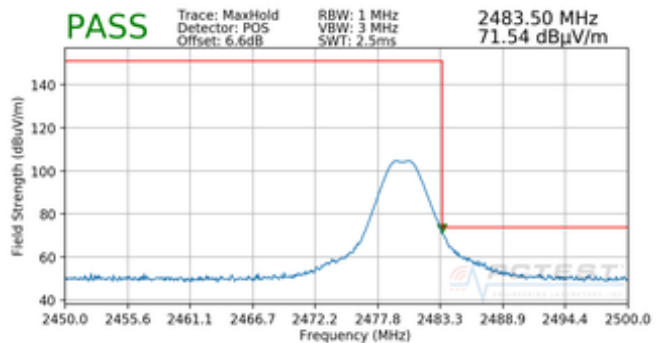

Plot 7-28. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 37 of 45

7.8 Radiated Spurious Emissions Measurements – Below 1GHz §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-9 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-9. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 38 of 45	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

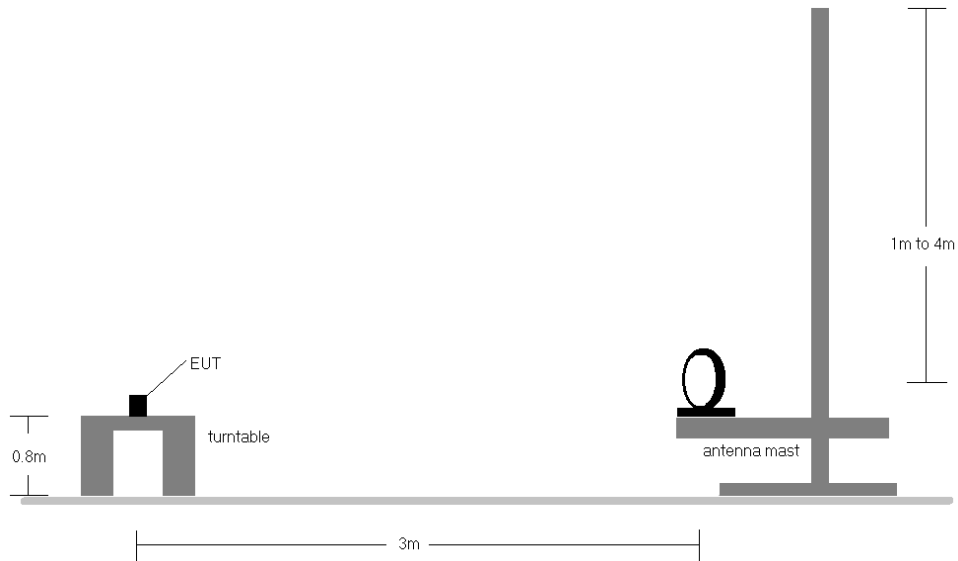


Figure 7-7. Radiated Test Setup < 30Mhz

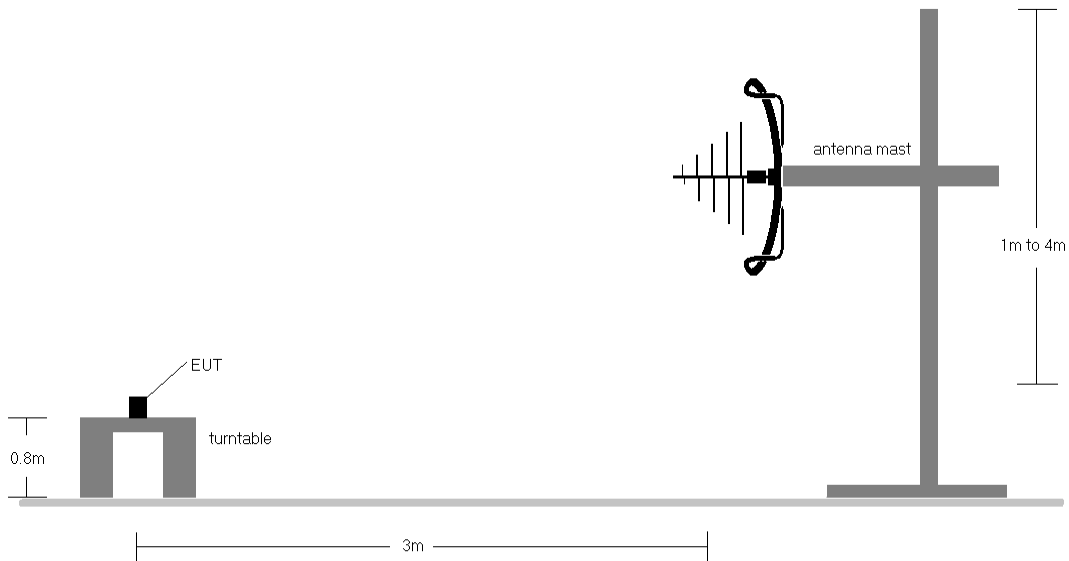


Figure 7-8. Radiated Test Setup < 1GHz


FCC ID: A3LETWV525 IC: 649E-ETWV525	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 39 of 45

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-9.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested while powered by an AC power source.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 40 of 45	

Radiated Spurious Emissions Measurements (Below 1GHz)
 §15.209; RSS-Gen [8.9]

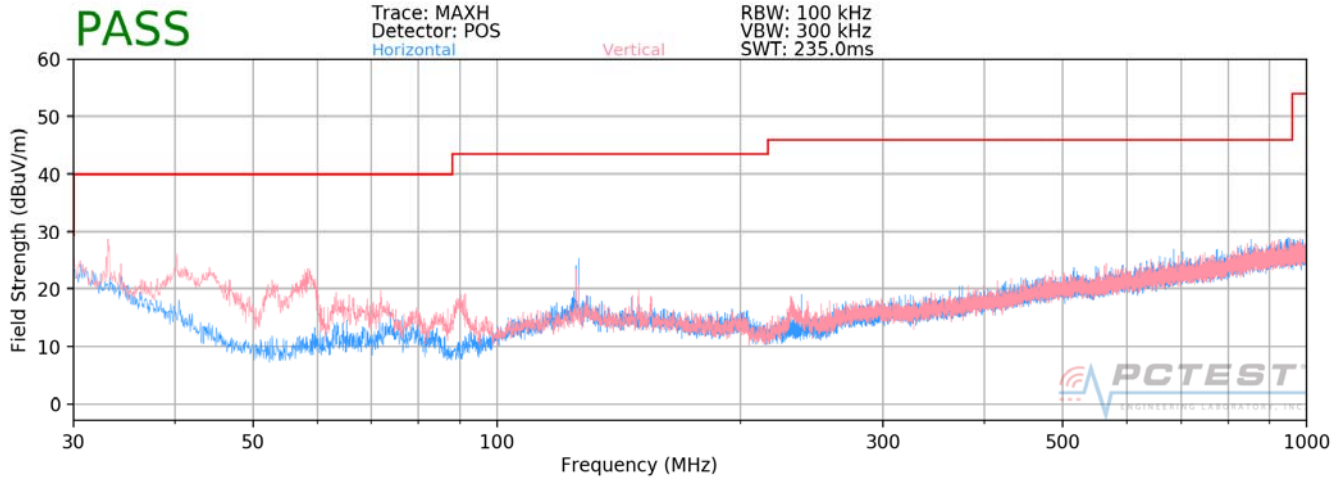

Plot 7-29. Radiated Spurious Plot below 1GHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
34.00	Quasi-Peak	V	138	321	-70.05	-12.36	24.59	40.00	-15.41
126.36	Quasi-Peak	V	122	184	-69.97	-16.86	20.17	43.52	-23.35

Table 7-10. Radiated Spurious Emissions below 1GHz

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 41 of 45

7.9 Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-11. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 42 of 45	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


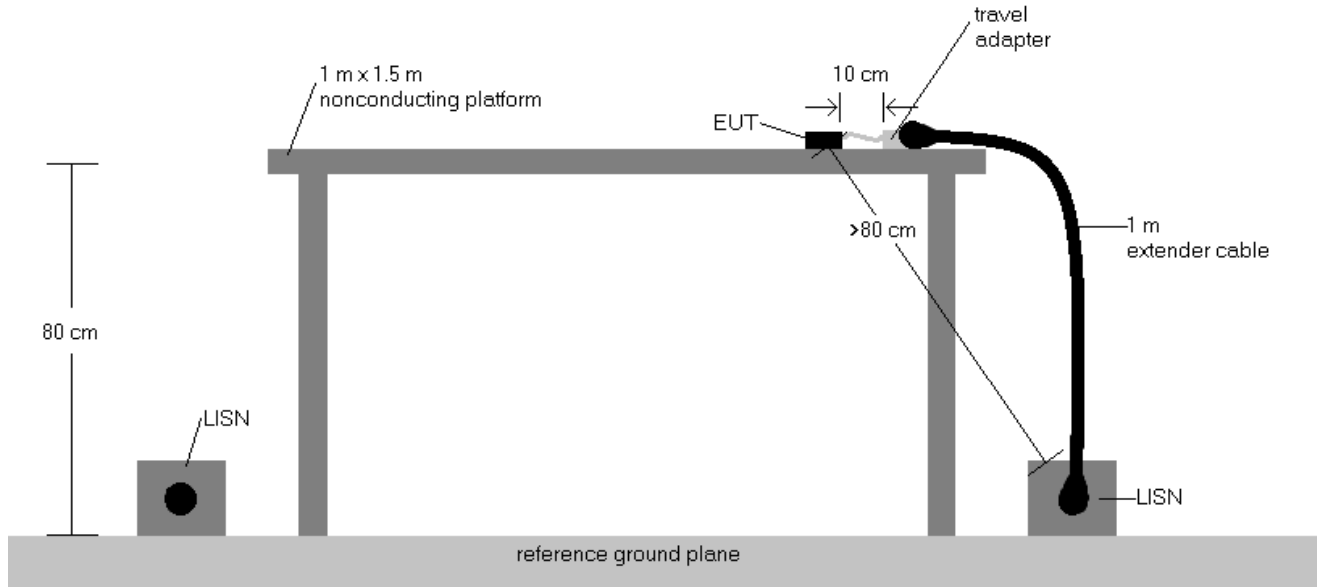


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 43 of 45	

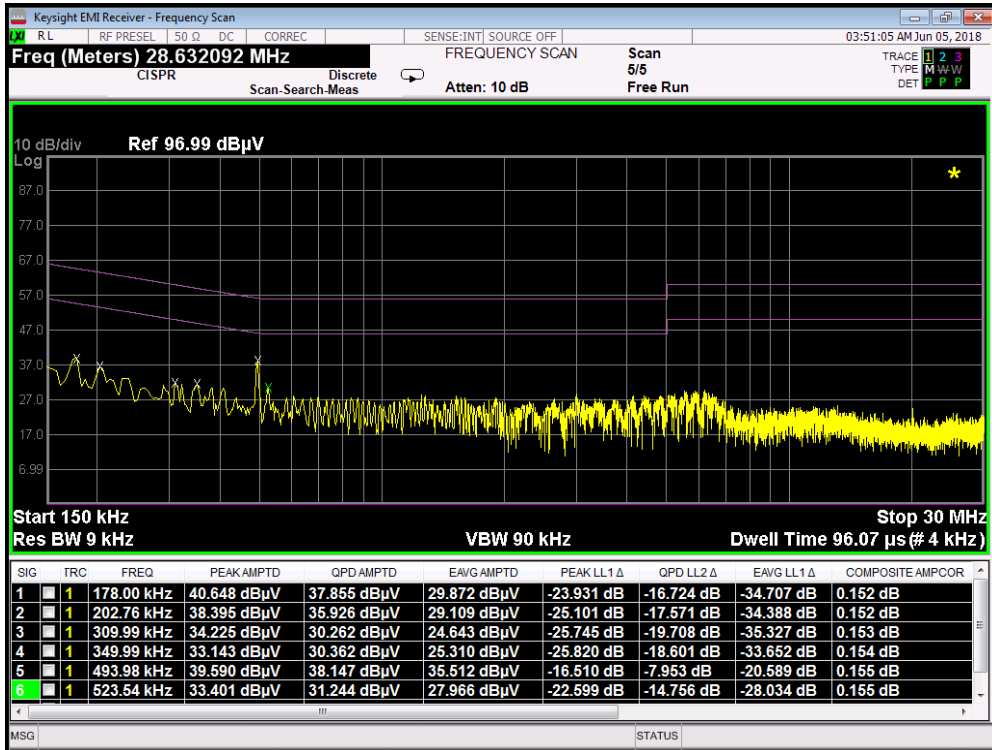

Plot 7-30. Line Conducted Plot with 802.11b (L1)

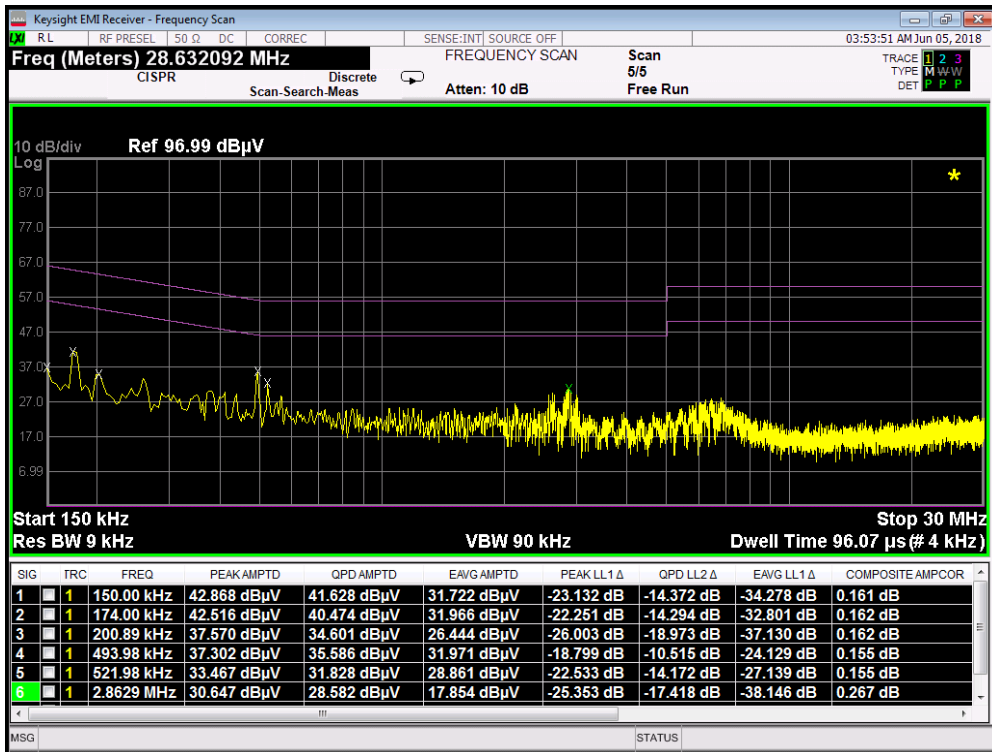

Plot 7-31. Line Conducted Plot with 802.11b (N)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 44 of 45

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Indoor Access Point FCC ID: A3LETWV525** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-07.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 45 of 45