



SAMSUNG ELECTRONICS Co., Ltd.,  
Regulatory Compliance Group  
IT R&D Center  
416 Maetan3-Dong,  
Yeongtong-gu, Suwon city,  
Gyeonggi-Do, Korea 443-742

## FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested: GT-I9020A  
FCC ID (Requested): A3LGTI9020A  
Report No: FI-004-R2  
Job No: FI-004  
Date issued: January 26, 2011

- Abstract -

All measurement reported here in accordance with FCC Rules, 47CFR  
Part2, Part22, Part24

**Prepared By**

---

KJ KWON - Test Engineer

**Authorized By**

---

WT JANG - Technical Manager

© Copyright SAMSUNG Electronics 2011



# TABLE OF CONTENT

<b>MEASUREMENT REPORT</b>	<b>Page</b>
<b>1. FCC Certification Information</b> .....	<b>3</b>
1.1 §2.1033 General Information .....	3
<b>2. INTRODUCTION</b> .....	<b>4</b>
2.1 General .....	4
<b>3. MEASURING INSTRUMENT CALIBRATION</b> .....	<b>5</b>
<b>4. TEST EQUIPMENT LIST</b> .....	<b>6</b>
<b>5. FCC 3G MEASUREMENT PROCEDURES</b> .....	<b>7</b>
5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power .....	8
5.2 Radiated Spurious & Harmonic Emission .....	9
5.3 Occupied Bandwidth .....	11
5.4 Peak-Average Ratio .....	11
5.5 Spurious and Harmonic Emissions at Antenna Terminal .....	11
5.5.1 Occupied Bandwidth Emission Limits .....	11
5.5.2 Conducted Spurious Emission .....	13
5.6 Frequency Stability / Temperature Variation .....	14
<b>6. TEST DATA</b> .....	<b>15</b>
6.1 Conducted Output Power .....	15
6.2 Effective Radiated Power(E.R.P.) .....	16
6.3 Equivalent Isotropic Radiated Power(E.I.R.P.) .....	17
6.4 Cellular WCDMA Radiated Spurious & Harmonic measurement .....	18
6.5 PCS WCDMA Radiated Spurious & Harmonic measurement .....	19
6.6 Cellular WCDMA Radiated Spurious & Harmonic Conversion Table .....	20
6.7 PCS WCDMA Radiated Spurious & Harmonic Conversion Table .....	21
6.8 Frequency Stability .....	22
6.8.1 Cellular WCDMA Frequency Stability Table .....	22
6.8.2 PCS WCDMA Frequency Stability Table .....	23
6.8.3 Cellular WCDMA Frequency Stability Graph .....	24
6.8.4 PCS WCDMA Frequency Stability Graph .....	26
<b>7. SAMPLE CALCULATION</b> .....	<b>28</b>
7.1 Emission Designator .....	28
<b>8. CONCLUSION</b> .....	<b>29</b>
<b>9. TEST PLOT</b> .....	<b>30</b>



# MEASUREMENT REPORT

## 1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

### 1.1 §2.1033 General Information

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416 Maetan3-Dong, Yeongtong-gu, Suwon City  
Gyeonggi-Do, Korea 443-742
  
- FCC ID: A3LGTI9020A
  
- Model: GT-I9020A
  
- Quantity: Quantity production is planned
- Emission Designators: 4M06F9W(Cellular WCDMA), 4M07F9W(PCS WCDMA)
  
- Tx Freq. Range: 826.4 - 846.6 MHz (Cellular WCDMA)  
1852.4 - 1907.6 MHz (PCS WCDMA)
  
- Rx Freq. Range: 871.4 - 891.6 MHz (Cellular WCDMA)  
1932.4 - 1987.6 MHz (PCS WCDMA)
  
- Max. Power Rating: 0.063 W Cellular WCDMA (18.01 dBm)  
0.112 W PCS WCDMA(20.50 dBm)
  
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
  
- Equipment (EUT) Type: 850/1900 GSM/EDGE/GPRS/WCDMA Phone with Bluetooth, WLAN  
and HSDPA, RFID
- Modulation(s): WCDMA
- Frequency Tolerance:  $\pm 0.00025\%$  (2.5ppm)
- FCC Rule Part(s): §24(E), §22(H), §2.
- Dates of Test: January 12-14, 2011
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FI-004-R2

## 2. INTRODUCTION

### 2.1 General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

### Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

### **3. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

- End of page -

#### 4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2011-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2011-03-08
	E4440A(3Hz~26.5GHz)	MY41000236	2011-04-13
Network Analyzer	8753E	JP38160590	2011-06-18
Pre-Amplifier	8449B	3008A00691	2011-12-15
Communication test set	8960	MY47510060	2011-03-08
	8960	GB42360886	2011-08-06
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2011-09-23
	HF906	360306/011	2012-06-13
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	3121C-DB4	9007-587	2011-04-15
Receive Antenna	HL040	353255/019	2011-10-26
Power Supply	E3640A	MY40003594	2011-06-17
	E3640A	MY40003595	2011-05-17
	E3632A	MY40022438	2011-03-05
Divider	11636B	51946	2011-06-25
	11636B	51942	2011-07-09
	11636B	56918	2011-08-31
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2011-11-15
	SH-241	92000548	2011-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

## 5. FCC 3G MEASUREMENT PROCEDURES

The maximum output power is a measure of the maximum power the UE can transmit (i.e. the actual power as would be measured assuming no measurement error) in a band width of at least  $(1+\alpha)$  times the chip rate of the radio access mode

The default test configuration is configure an established radio link between the UE and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. Maximum output is verified according to 3GPP TS 34.121 Section 5.2

1. Configure TCP (Transmit Power Control) set to "All 1"s.
2. RMC and AMR connections at 12.2kbps are measured under 3.4kbps SRB (signaling radio bearer)
3. Measure the mean power of the UE in a bandwidth of at least  $(1+\alpha)$  times the chip rate of the radio access mode. The mean power shall be averaged over at least one timeslot.


Table 1  
3GPP TS 34.121 Nominal Maximum Output Power

Operating Band	Power Class 3		Power Class 4	
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)
Band II	+24	+1/-3	+21	+2/-2
Band V	+24	+1/-3	+21	+2/-2

## 5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power

### Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

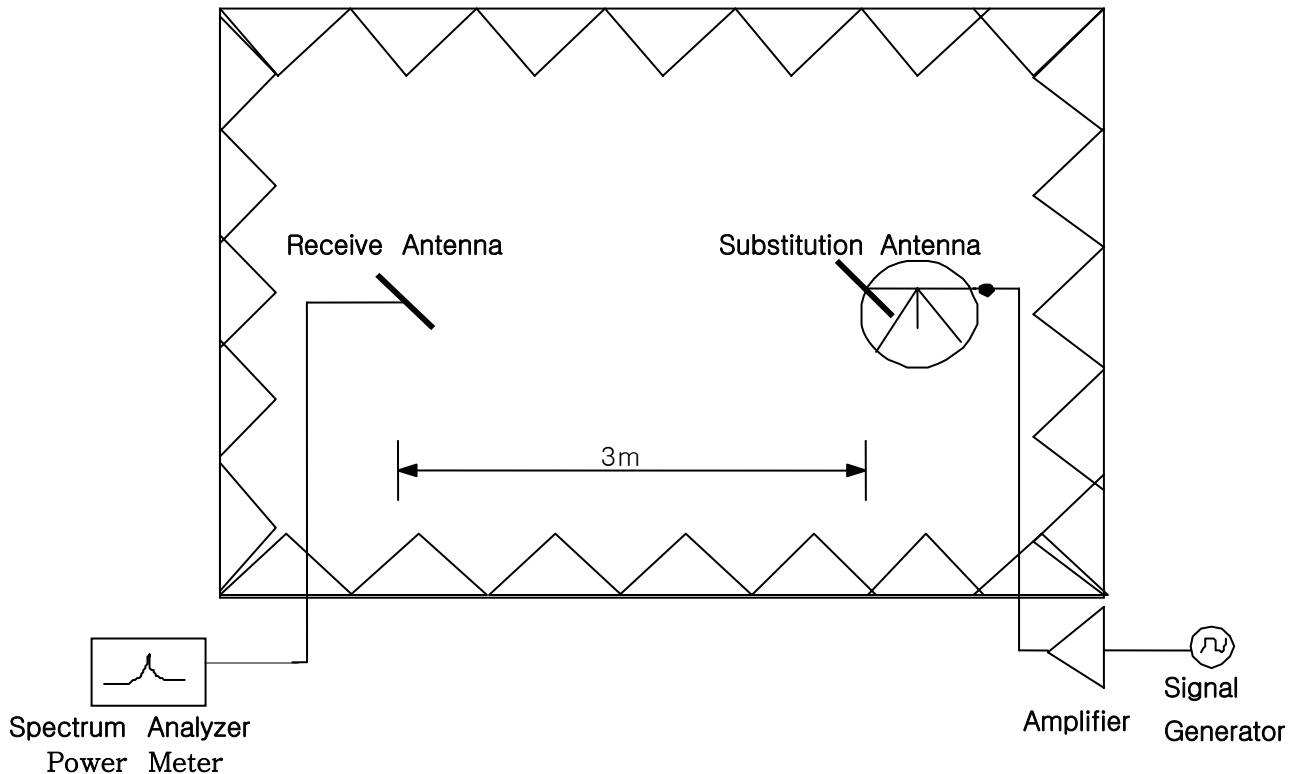


**Figure 3. Diagram of ERP/EIRP test Set-up**

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## 5.2 Radiated Spurious & Harmonic Emission

### Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

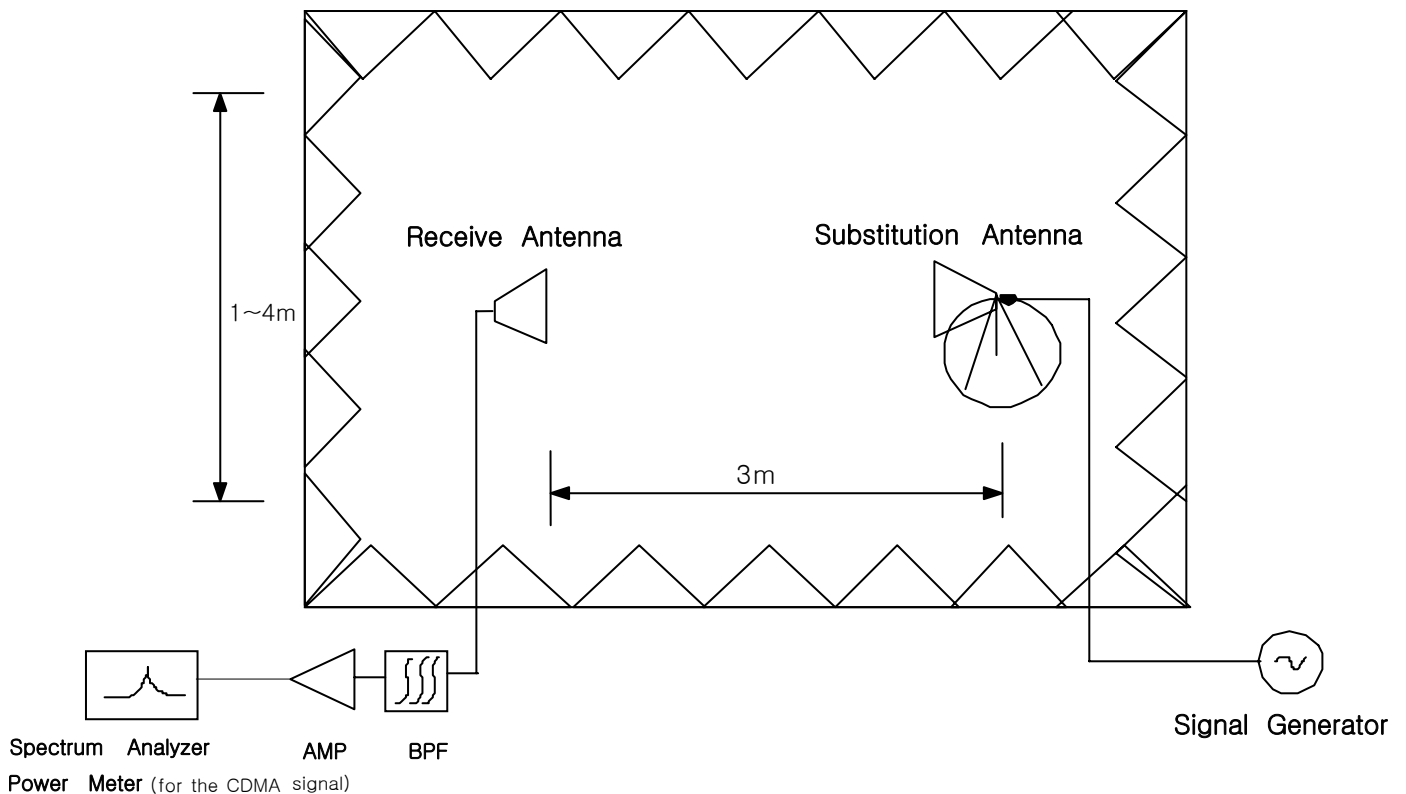

**Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up**

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10<sup>th</sup> Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

### SAMPLE CALCULATION

#### **Example: Channel 600 PCS Mode 2<sup>nd</sup> Harmonic(3760MHz)**

The receive analyzer reading at 3meters with the EUT on the turntable was  $-81.0\text{dBm}$ . The gain of the substituted antenna is  $8.1\text{dBi}$ . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0\text{dBm}$  of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0\text{dB}$  at  $3760\text{MHz}$ . So  $6.1\text{dB}$  is added to the signal generator reading of  $-30.9\text{dBm}$  yielding  $-24.8\text{dBm}$ . The fundamental EIRP was  $25.5\text{dBm}$  so this harmonic was  $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$ .

- End of page -

## 5.3 Occupied Bandwidth

### **Test Procedure**

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

## 5.4 Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function(CCDF) measurement profile is used to determine the largest deviation between the An average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

## 5.5 Spurious and Harmonic Emissions at Antenna Terminal

### 5.5.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

- End of page -

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

**Table 1. Broadband PCS Service Frequency Blocks**

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 – 835	869 – 880
B	835 – 845	880 – 890
A* High	845 – 846.5	890 – 891.5
B*	846.5 – 849	891.5 – 894

**Table 2. Cellular Service Frequency Blocks**

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1710 – 1720	2110 – 2120
B	1720 – 1730	2120 – 2130
C	1730 – 1735	2130 – 2135
D	1735 – 1740	2135 – 2140
E	1740 – 1745	2140 – 2145
F	1745 – 1755	2145 – 2155

**Table 3. Broadband AWS Service Frequency Blocks**

### 5.5.2 Conducted Spurious Emission

#### **Minimum standard:**

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least  $43+10\log (P)$ dB. Limit equivalent to  $-13$ dBm, calculation shown below.

$$43 + 10\log ( 0.333 \text{ W} ) = 38.22\text{dB}$$

$$25.22 \text{ dBm} - 38.22 \text{ dB} = -13 \text{ dBm}$$

#### **Test Procedure:**

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the  $-13$ dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (PCS Mode : 10MHz to 20GHz). A display line was placed at  $-13$ dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

## 5.6 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature ( $25^{\circ}\text{C}$  to  $27^{\circ}\text{C}$  to provide a reference).
2. The equipment is subjected to an overnight "soak" at  $-30^{\circ}\text{C}$  without any power applied.
3. After the overnight "soak" at  $-30^{\circ}\text{C}$  (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at  $10^{\circ}\text{C}$  interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at  $-30^{\circ}\text{C}$  up to  $+50^{\circ}\text{C}$  allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

- End of page -

## 6. TEST DATA

### 6.1 Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/EDGE/GPRS/WCDMA Phone with Bluetooth, WLAN and HSDPA,RFID FCC ID: A3LGTI9020A. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA inactive at 12.2 kbps RMC. The WCDMA conducted powers are reported below, respectively.

BAND	Channel	UMTS RF Conducted Power Table		
		HSDPA Inactive		HSDPA Active
		12.2 kbps RMC[dBm]	12.2 kbps AMR[dBm]	12.2 kbps AMR[dBm]
Cellular	4132	23.42	23.03	22.91
	4183	23.30	22.80	22.65
	4233	23.23	22.76	22.61
PCS	9262	23.58	23.50	22.86
	9400	23.55	23.44	22.72
	9538	23.32	23.35	22.65

Table 6.1 WCDMA Conducted Output Powers

## 6.2 Effective Radiated Power(E.R.P.)

Supply Voltage : 3.7VDC

Modulation : Cellular WCDMA

### ■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBd)	Ref level (dBm)
826.4	16.00	H	-20.57	-0.67	-19.90
		V	-21.37	-0.67	-20.70
836.6	17.00	H	-20.04	-0.73	-19.31
		V	-20.30	-0.73	-19.57
846.6	18.00	H	-21.23	-0.79	-20.44
		V	-20.38	-0.79	-19.59

### ■ Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
826.4	-19.44	H	290/110	16.46	0.044	Standard
836.6	-19.50	H	288/90	16.81	0.048	Standard
846.6	-20.43	H	286/90	18.01	0.063	Standard

**NOTE :** Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

**Radiated measurements at 3 meters by Substitution Method**



### 6.3 Equivalent Isotropic Radiated Power(E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS WCDMA

#### ■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBi)	Ref level (dBm)
1852.4	20.00	H	-19.29	9.60	-28.89
		V	-18.93	9.60	-28.53
1880.0	20.00	H	-19.00	9.60	-28.60
		V	-19.30	9.60	-28.90
1907.6	20.00	H	-19.43	9.60	-29.03
		V	-19.21	9.60	-28.81

#### ■ Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1852.4	-28.26	V	316/90	20.27	0.106	Standard
1880.0	-28.40	V	211/80	20.50	0.112	Standard
1907.6	-29.20	V	322/90	19.61	0.091	Standard

**NOTE : Standard batteries are the only battery options for this phone**

- All modes of operation were investigated, and the worst-case results are reported.

**Radiated measurements at 3 meters by Substitution Method**

## 6.4 Cellular WCDMA Radiated Spurious & Harmonic measurement

Operating Frequency : 826.4 MHz(Low), 836.4 MHz(Middle), 846.6 MHz(High)

Measured Output Power : **18.01 dBm = 0.063 W**

Modulation Signal : CDMA

**Limit :  $43 + 10\log_{10}(P) = 31.01\text{dBc}$**

### ■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
4132	2	1652.80	-68.39	H	73.94
	3	2479.20	-68.64	H	69.29
	4	3305.60	-68.36	V	65.90
	5	4132.00	-	-	-
	6	4958.40	-	-	-
	7	5784.80	-	-	-
4175	2	1672.80	-68.88	H	73.92
	3	2509.20	-68.27	H	68.75
	4	3345.60	-66.40	V	62.85
	5	4182.00	-	-	-
	6	5018.40	-	-	-
	7	5854.80	-	-	-
4233	2	1693.20	-68.93	H	72.88
	3	2539.80	-68.51	V	69.07
	4	3386.40	-68.63	H	65.47
	5	4233.00	-	-	-
	6	5079.60	-	-	-
	7	5926.20	-	-	-

#### NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and All modes of operation were investigated, and the worst-case results are reported..

### Radiated Spurious Emission measurements at 3 meters by Substitution Method

## 6.5 PCS WCDMA Radiated Spurious & Harmonic measurement

Operating Frequency : 1852.4 MHz(Low), 1880.00 MHz(Middle), 1907.60 MHz(High)

Measured Output Power : 20.50 dBm = 0.112 W

Modulation Signal : PCS

Limit :  $43 + 10\log_{10}(P) = 33.5\text{dBc}$

### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
9262	2	3704.80	-67.08	H	63.16
	3	5557.20	-68.21	V	59.20
	4	7409.60	-70.35	V	56.53
	5	9262.00	-	-	-
	6	11114.40	-	-	-
	7	12966.80	-	-	-
9400	2	3760.00	-67.19	H	62.76
	3	5640.00	-68.28	V	59.05
	4	7520.00	-70.27	H	56.58
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
9538	2	3815.20	-65.24	H	60.50
	3	5722.80	-68.36	V	58.97
	4	7630.40	-70.08	V	56.05
	5	9538.00	-	-	-
	6	11445.60	-	-	-
	7	13353.20	-	-	-

#### NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and All modes of operation were investigated, and the worst-case results are reported..

### Radiated Spurious Emission measurements at 3 meters by Substitution Method



## 6.6 Cellular WCDMA Radiated Spurious & Harmonic Conversion Table

Date : January 14, 2011

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+ 2.15 - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Test ed EUT Level : H dBm	⑤Test ed EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
4132	2	1652.80	-9.34	9.50	-13.20	-27.60	-27.25	-68.39	-69.10	73.94	75.00
	3	2479.20	-11.66	10.70	-12.00	-32.50	-32.00	-68.64	-69.22	69.29	70.37
	4	3305.60	-13.53	12.30	-11.80	-36.01	-35.61	-68.94	-68.36	66.08	65.90
	5	4132.00	-15.09	12.50	-10.40	-38.76	-38.44	-	-	-	-
	6	4958.40	-16.89	12.70	-8.80	-41.87	-40.99	-	-	-	-
	7	5784.80	-18.42	12.90	-7.50	-43.37	-43.42	-	-	-	-
4183	2	1673.20	-9.39	9.50	-13.10	-28.11	-28.27	-68.88	-69.20	73.92	74.08
	3	2509.80	-11.68	10.70	-12.00	-32.67	-32.25	-68.27	-68.51	68.75	69.41
	4	3346.40	-13.62	12.30	-11.70	-36.28	-36.70	-68.62	-66.40	65.49	62.85
	5	4183.00	-15.33	12.50	-10.20	-38.60	-38.48	-	-	-	-
	6	5019.60	-17.17	12.70	-8.50	-42.15	-41.72	-	-	-	-
	7	5856.20	-18.51	12.90	-7.40	-44.68	-44.47	-	-	-	-
4233	2	1693.20	-9.42	9.50	-13.10	-29.20	-28.39	-68.93	-69.44	72.88	74.20
	3	2539.80	-11.69	10.70	-12.00	-32.66	-32.59	-68.59	-68.51	69.08	69.07
	4	3386.40	-13.58	12.30	-11.70	-36.31	-35.95	-68.63	-68.88	65.47	66.08
	5	4233.00	-15.43	12.50	-10.10	-39.14	-39.12	-	-	-	-
	6	5079.60	-17.20	12.70	-8.50	-42.76	-42.76	-	-	-	-
	7	5926.20	-18.66	12.90	-7.20	-44.34	-44.02	-	-	-	-

## 6.7 PCS WCDMA Radiated Spurious & Harmonic Conversion Table

Date : January 14, 2011.

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
9262	2	3704.80	-14.27	12.40	-11.10	-37.42	-37.29	-67.08	-69.12	63.16	65.33
	3	5557.20	-17.89	12.90	-8.00	-42.43	-42.51	-68.60	-68.21	59.67	59.20
	4	7409.60	-20.68	10.50	-2.80	-47.70	-47.31	-70.73	-70.35	56.53	56.54
	5	9262.00	-24.00	11.20	-0.20	-51.55	-50.34	-	-	-	-
	6	11114.40	-27.10	11.60	2.50	-55.14	-55.44	-	-	-	-
	7	12966.80	-29.17	12.90	3.30	-58.61	-58.58	-	-	-	-
9400	2	3760.00	-14.42	12.40	-11.00	-37.93	-37.89	-67.19	-68.21	62.76	63.82
	3	5640.00	-18.03	12.90	-7.90	-42.58	-42.73	-68.56	-68.28	59.48	59.05
	4	7520.00	-20.87	10.60	-2.70	-47.19	-47.22	-70.27	-70.34	56.58	56.62
	5	9400.00	-23.58	11.60	-1.00	-51.70	-51.98	-	-	-	-
	6	11280.00	-26.58	12.10	1.50	-55.95	-56.35	-	-	-	-
	7	13160.00	-28.58	12.80	2.80	-58.92	-59.14	-	-	-	-
9538	2	3815.20	-14.46	12.40	-10.90	-38.24	-38.04	-65.24	-65.64	60.50	61.10
	3	5722.80	-18.26	13.00	-7.70	-43.05	-42.89	-68.85	-68.36	59.30	58.97
	4	7630.40	-21.26	11.20	-2.90	-47.42	-47.53	-70.51	-70.08	56.59	56.05
	5	9538.00	-23.84	11.70	-0.90	-52.67	-51.88	-	-	-	-
	6	11445.60	-27.12	11.70	2.40	-56.20	-55.97	-	-	-	-
	7	13353.20	-28.83	12.30	3.50	-60.16	-59.86	-	-	-	-

## 6.8 Frequency Stability

### 6.8.1 Cellular WCDMA Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 4183

Reference Voltage : 3.7VDC

**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-14.10	836,599,986	-0.000002	
100%		-30	35.60	836,600,036	0.000004	
100%		-20	14.10	836,600,014	0.000002	
100%		-10	11.70	836,600,012	0.000001	
100%		0	9.10	836,600,009	0.000001	
100%		+10	-33.80	836,599,966	-0.000004	
100%		+20	-14.10	836,599,986	-0.000002	
100%		+30	-24.50	836,599,976	-0.000003	
100%		+40	30.20	836,600,030	0.000004	
100%		+50	-13.00	836,599,987	-0.000002	
85%	3.25	+20	-20.00	836,599,980	-0.000002	
115%	4.26	+20	14.80	836,600,015	0.000002	
Batt. Endpoint	3.25	+20	-20.00	836,599,980	-0.000002	

**Note :** The temperature is varied from -30 °C to +50 °C using an environmental chamber.

**The EUT is tested down to the battery end point**



6.8.2 PCS WCDMA Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 9400

Reference Voltage : 3.7VDC


**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-33.50	1,879,999,967	-0.000002	
100%		-30	20.60	1,880,000,021	0.000001	
100%		-20	-26.40	1,879,999,974	-0.000001	
100%		-10	-15.50	1,879,999,985	-0.000001	
100%		0	-6.40	1,879,999,994	0.000000	
100%		+10	18.90	1,880,000,019	0.000001	
100%		+20	-33.50	1,879,999,967	-0.000002	
100%		+30	-1.10	1,879,999,999	0.000000	
100%		+40	35.50	1,880,000,036	0.000002	
100%		+50	-5.90	1,879,999,994	0.000000	
85%	3.25	+20	32.10	1,880,000,032	0.000002	
115%	4.26	+20	4.00	1,880,000,004	0.000000	
Batt. Endpoint	3.25	+20	32.10	1,880,000,032	0.000002	

**Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.**


**The EUT is tested down to the battery end point**

### 6.8.3 Cellular WCDMA Frequency Stability Graph

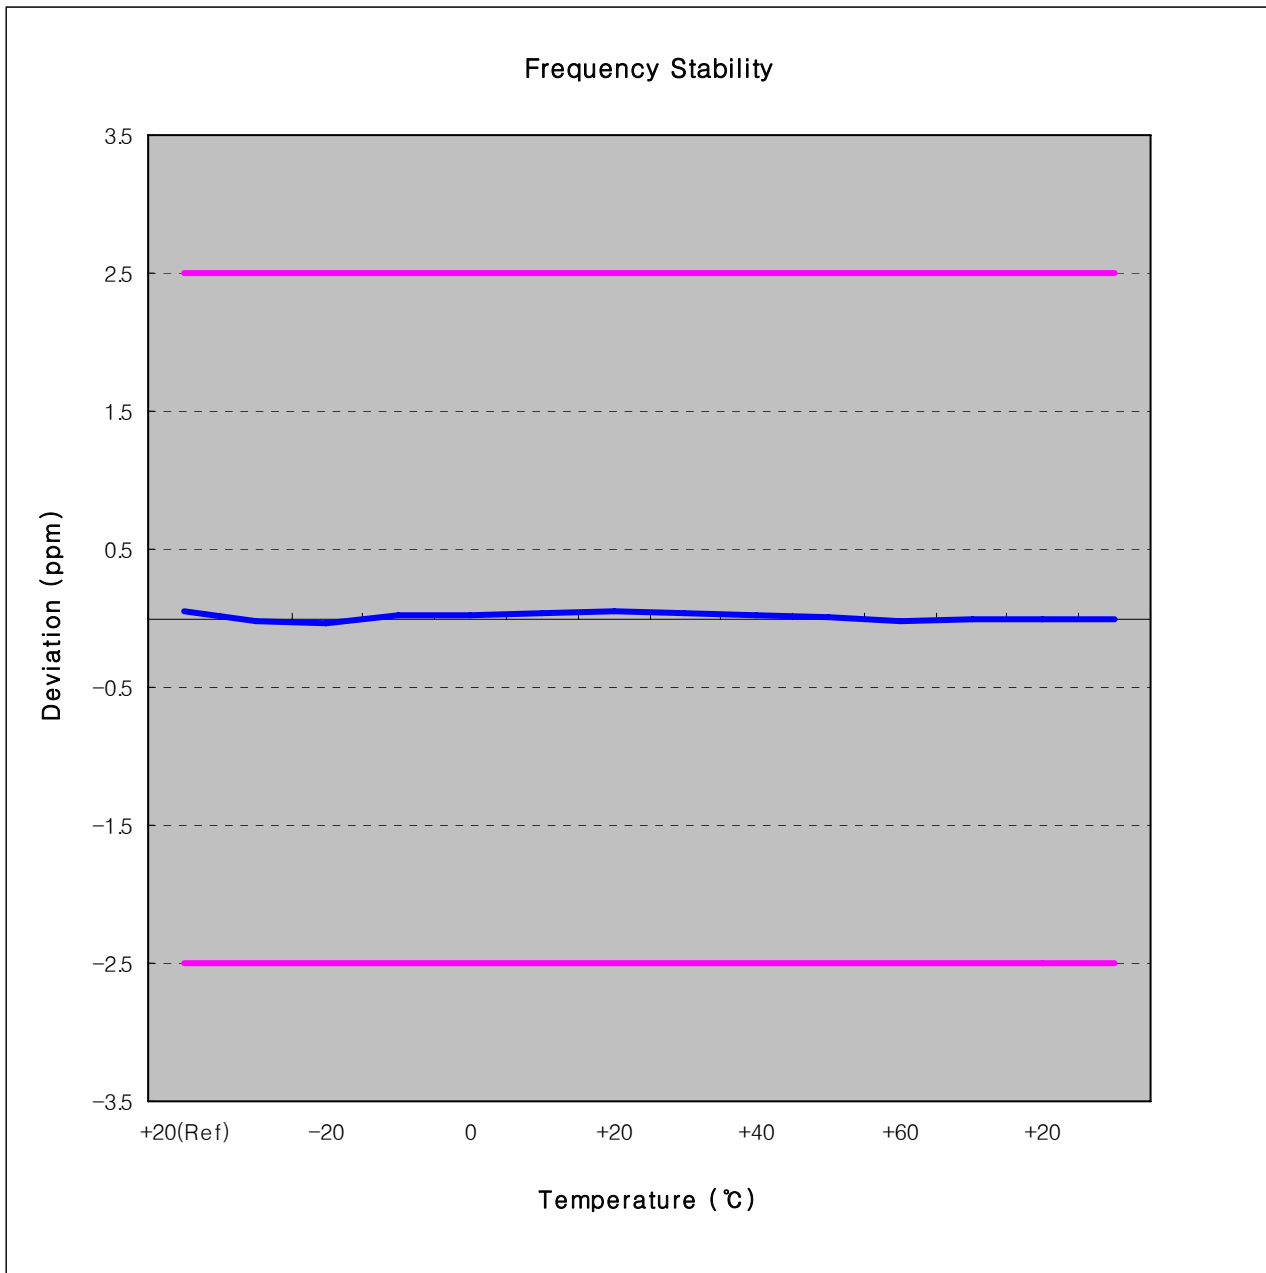


- End of page -

**Zoom In**

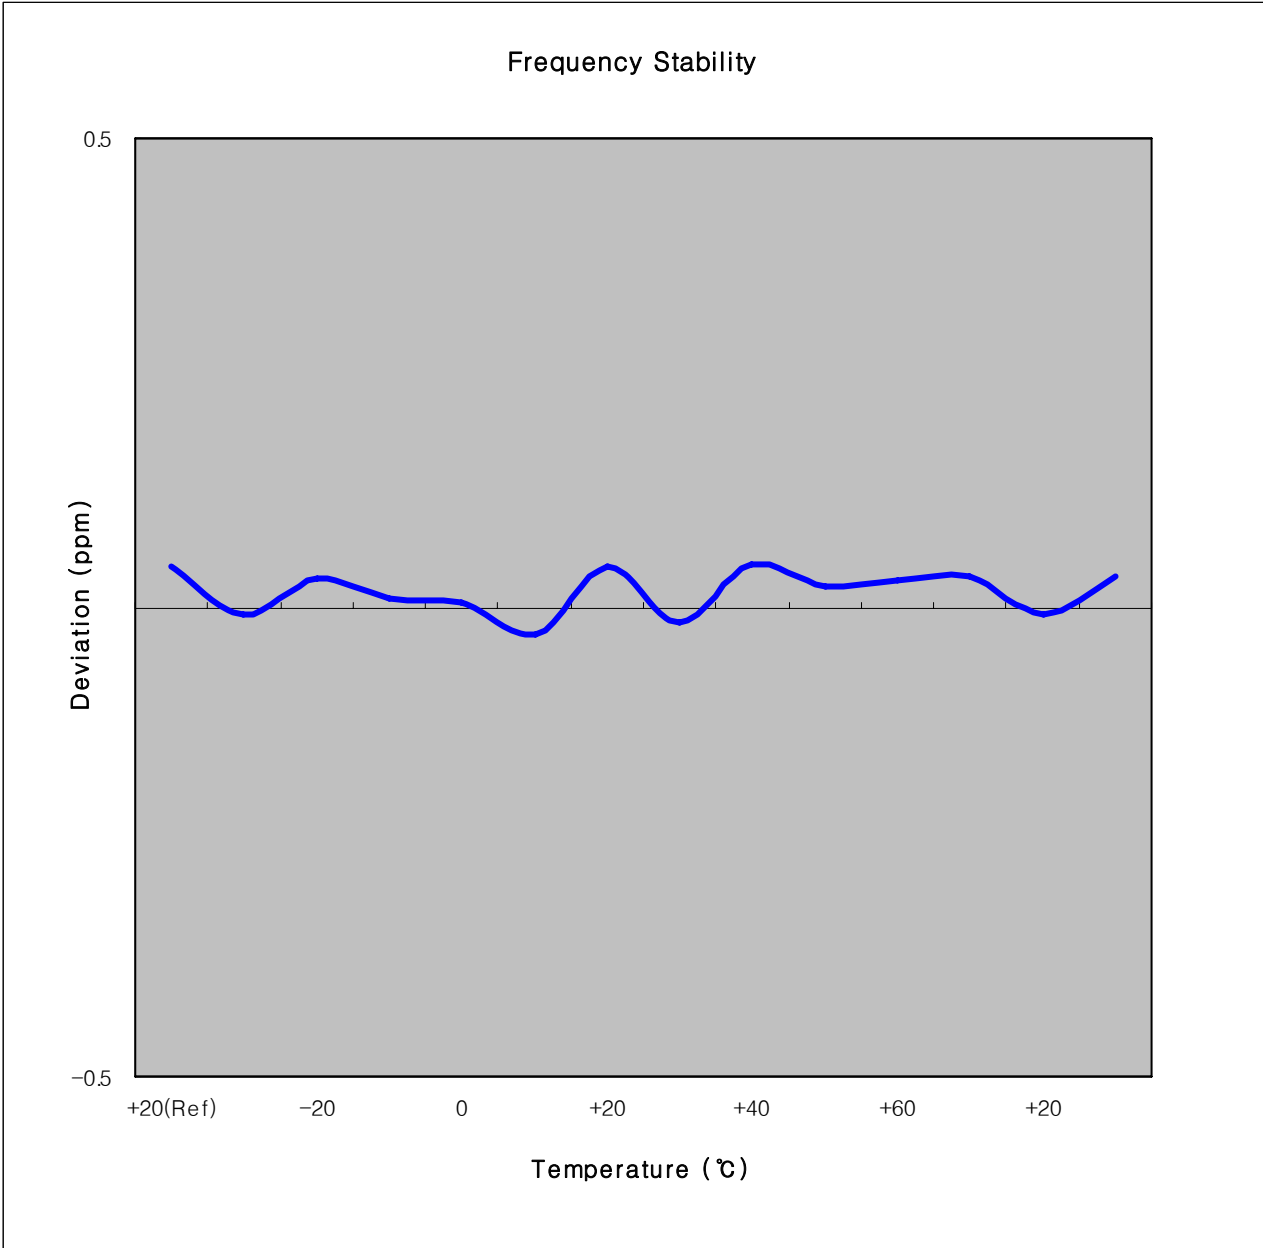


- End of page -

### 6.8.4 PCS WCDMA Frequency Stability Graph

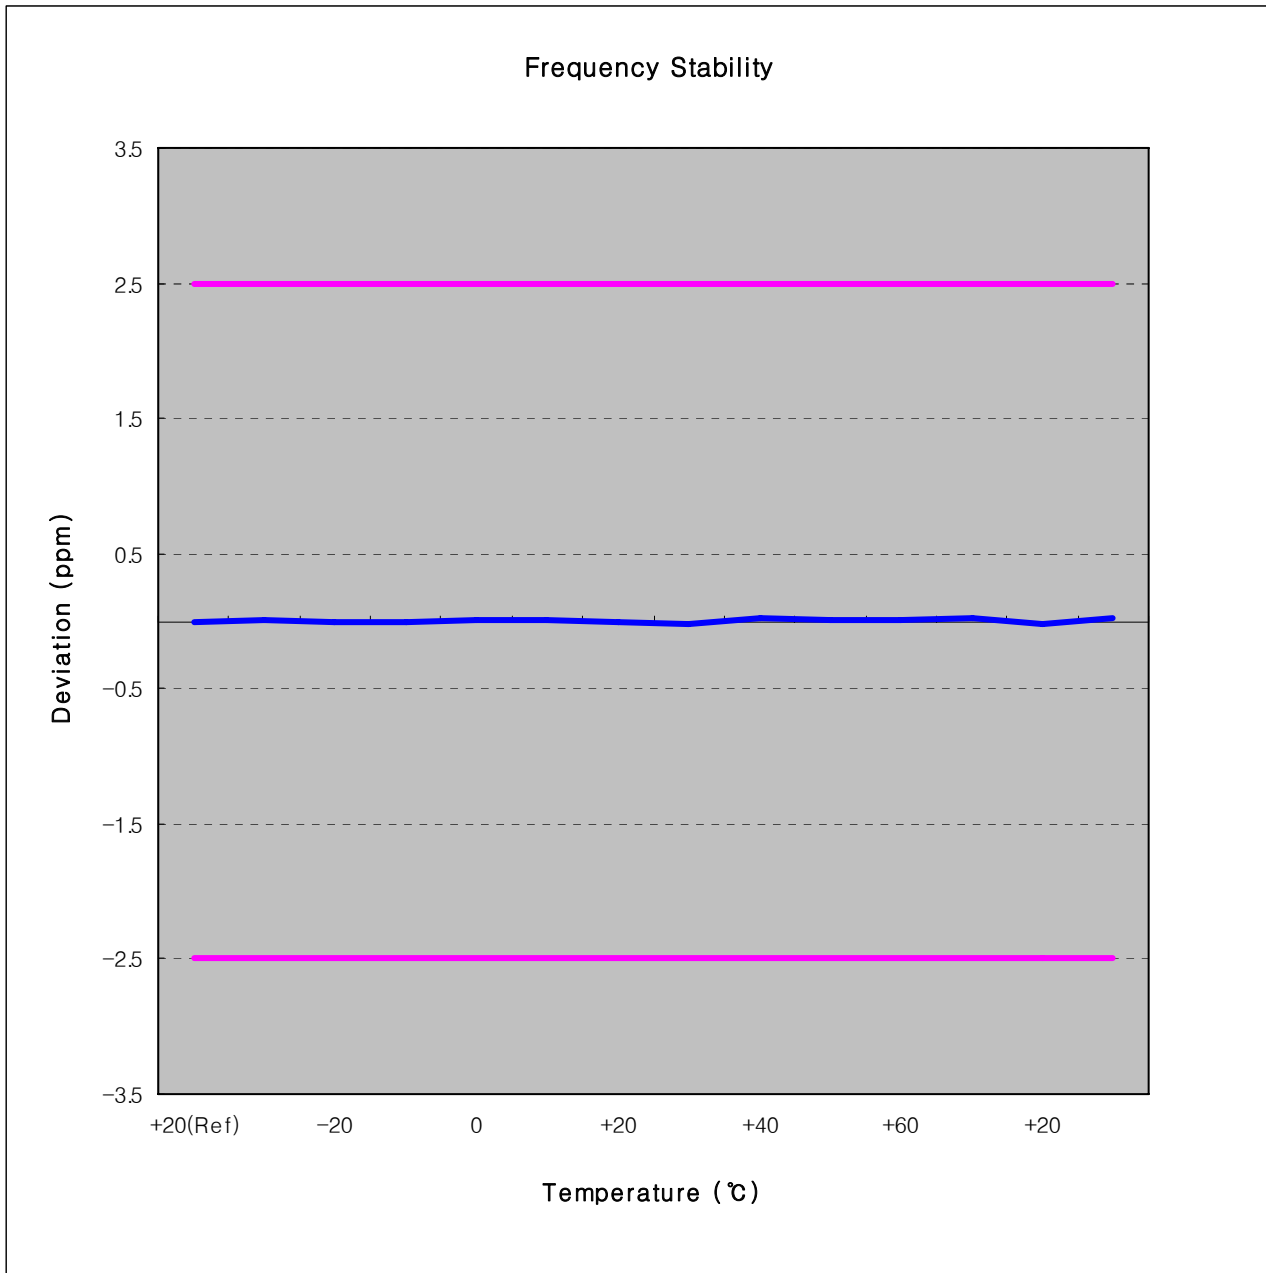

- End of page -

**Zoom In**

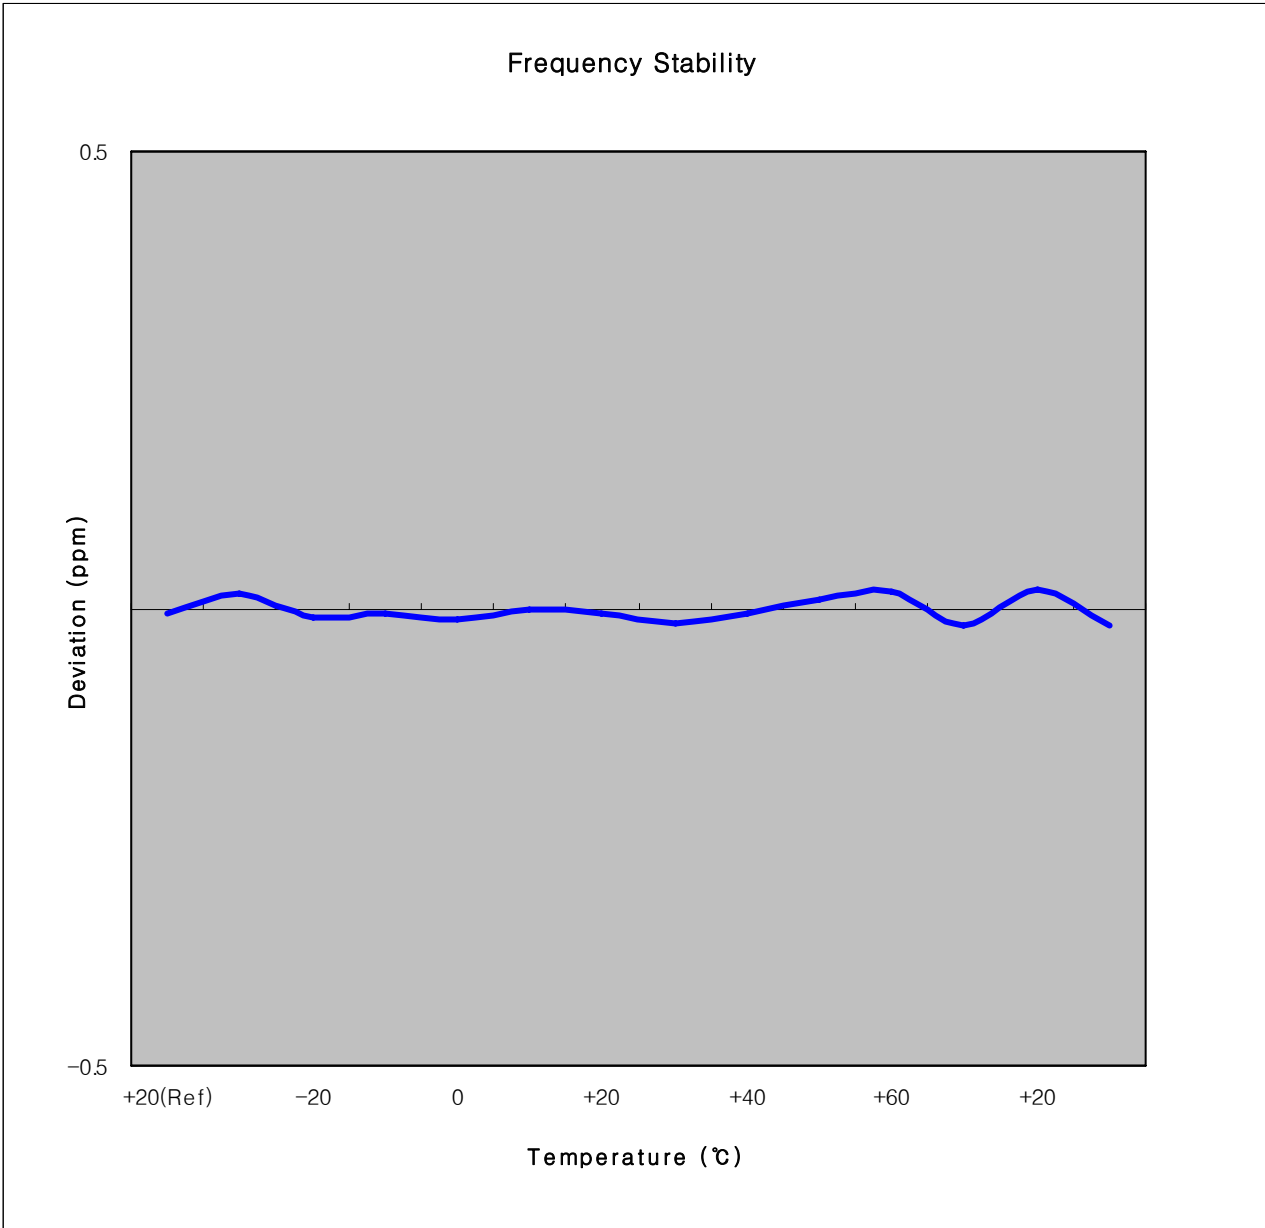

- End of page -

## 7. SAMPLE CALCULATION

### 7.1 Emission Designator

Emission Designator = 4M19F9W

CDMA BW = 4.19MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination(Audio/Data)

(Measured at the 99.75% power bandwidth)

- End of page -



## **8. CONCLUSION**

The data collected shows that the SAMSUNG 850/1900 GSM/EDGE/GPRS/WCDMA Phone with Bluetooth, WLAN and HSDPA, RFID  
FCC ID : A3LGTI9020A complies with all the requirements of Parts 2, 22, 24 of the FCC Rules.

- End of page -

## 9. TEST PLOT

A3LGTI9020ABAND 5

Uplink Channel: 4132 (DownLink Channel: 4357)

Measurement/Instrument Screen										
Control	Thermal Power						Call Parms			
Thermal Power Setup ▾	Thermal Power <b>22.91 dBm</b>  Continuous						Cell Power	-86.00		
							dBm/3.84 MHz			
							Channel Type	12.2k R1C		
							Paging Service	RB Test Mode		
							HSDPA Parameters			
							34,121 Preset Call Configs ▾			
							Channel (UARFCN) Parms			
			Active Cell Connected			Sys Type: UTRA FDD				
1 of 2				IntRef	Offset	T				1 of 3

Uplink Channel: 4183 (DownLink Channel: 4408)

Measurement/Instrument Screen										
Control	Thermal Power						Call Parms			
Thermal Power Setup ▾	Thermal Power <b>22.65 dBm</b>  Continuous						Cell Power	-86.00		
							dBm/3.84 MHz			
							Channel Type	12.2k R1C		
							Paging Service	RB Test Mode		
							HSDPA Parameters			
							34,121 Preset Call Configs ▾			
							Channel (UARFCN) Parms			
			Active Cell Connected			Sys Type: UTRA FDD				
1 of 2				IntRef	Offset	T				1 of 3

Uplink Channel: 4233 (DownLink Channel: 4458)


Measurement/Instrument Screen						
Control	Thermal Power				Call Parm	
Thermal Power Setup ▾	Thermal Power <b>22.61 dBm</b> Continuous				Cell Power	
					-86.00	
			dBm/3.84 MHz		Channel Type	
			12.2k RMC		Paging Service	
					RB Test Mode	
					HSDPA Parameters	
					34.121 Preset Call Configs ▾	
					Channel (UARFCN) Parm	
			Active Cell Connected		Sys Type: UTRA FDD	
1 of 2			IntRef	Offset	T	1 of 3

Uplink Channel: 4132 (DownLink Channel: 4357)

Agilent		R	T	Freq/Channel	
Base	Ch Freq	826.4 MHz		Center Freq	
Occupied Bandwidth		*3GPP W-CDMA		826.400000 MHz	
FCC ID:A3LGTI9020A 0BW Ch.4357		Ref 25 dBm Atten 30 dB		Start Freq	
				821.400000 MHz	
				Stop Freq	
				831.400000 MHz	
				CF Step	
				1.00000000 MHz	
				Auto Man	
				Freq Offset	
				0.00000000 Hz	
				Signal Track	
				On Off	
<b>Occupied Bandwidth</b> <b>3.9861 MHz</b>		<b>Occ BW % Pwr</b> <b>99.00 %</b>		<b>x dB</b> <b>-26.00 dB</b>	
<b>Transmit Freq Error</b> <b>-7.404 kHz</b>		<b>x dB Bandwidth</b> <b>4.486 MHz*</b>			
File Operation Status, C:\TEMP.GIF file saved					


Uplink Channel: 4183 (DownLink Channel: 4408)

**Agilent** R T

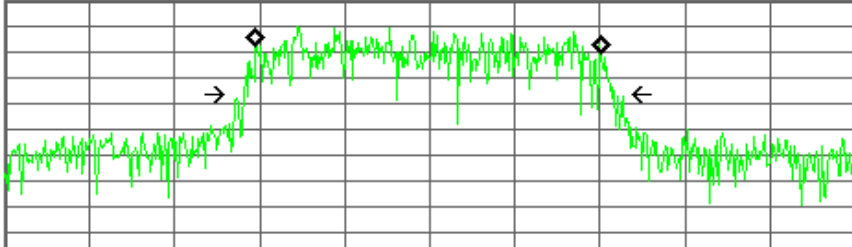
<b>Base</b>	<b>Ch Freq</b> 836.6 MHz	<b>Trig</b> Free	<b>Freq/Channel</b>
Occupied Bandwidth <b>*3GPP W-CDMA</b>			<b>Center Freq</b> 836.600000 MHz
FCC ID:A3LGTI9020A 0BW Ch.4408 Ref 25 dBm Atten 30 dB			<b>Start Freq</b> 831.600000 MHz
<div style="display: flex; align-items: center;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg); font-size: small; margin-right: 5px;">                 #Samp Log 10 dB/ Offst 7.77 dB             </div>  </div>			<b>Stop Freq</b> 841.600000 MHz
Center 836.60 MHz Span 10 MHz #Res BW 100 kHz #VBW 1 MHz Sweep 2.92 ms (601 pts)			<b>CF Step</b> 1.00000000 MHz Auto Man
<b>Occupied Bandwidth</b> <span style="float: right;"><b>Occ BW % Pwr</b> 99.00 %</span> <span style="font-size: 1.2em; font-weight: bold;">4.0639 MHz</span> <span style="float: right;"><b>x dB</b> -26.00 dB</span> <b>Transmit Freq Error</b> -19.100 kHz <b>x dB Bandwidth</b> 4.361 MHz*			<b>Freq Offset</b> 0.00000000 Hz
			<b>Signal Track</b> On Off
<b>File Operation Status, C:\TEMP.GIF file saved</b>			

Uplink Channel: 4233 (DownLink Channel: 4458)


**Agilent** R T
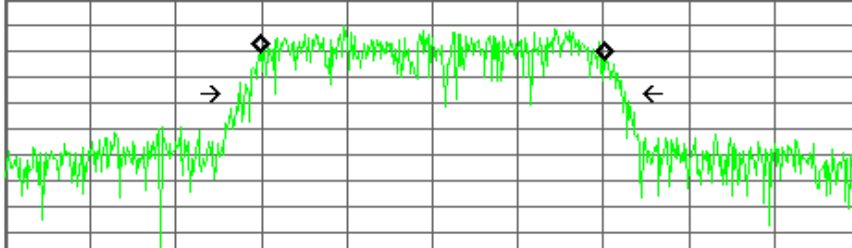
<b>Base</b>	<b>Ch Freq</b> 846.6 MHz	<b>Trig</b> Free	<b>Freq/Channel</b>
Occupied Bandwidth <b>*3GPP W-CDMA</b>			<b>Center Freq</b> 846.600000 MHz
FCC ID:A3LGTI9020A 0BW Ch.4458 Ref 25 dBm Atten 30 dB			<b>Start Freq</b> 841.600000 MHz
<div style="display: flex; align-items: center;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg); font-size: small; margin-right: 5px;">                 #Samp Log 10 dB/ Offst 7.77 dB             </div>  </div>			<b>Stop Freq</b> 851.600000 MHz
Center 846.60 MHz Span 10 MHz #Res BW 100 kHz #VBW 1 MHz Sweep 2.92 ms (601 pts)			<b>CF Step</b> 1.00000000 MHz Auto Man
<b>Occupied Bandwidth</b> <span style="float: right;"><b>Occ BW % Pwr</b> 99.00 %</span> <span style="font-size: 1.2em; font-weight: bold;">4.0454 MHz</span> <span style="float: right;"><b>x dB</b> -26.00 dB</span> <b>Transmit Freq Error</b> 2.294 kHz <b>x dB Bandwidth</b> 4.516 MHz*			<b>Freq Offset</b> 0.00000000 Hz
			<b>Signal Track</b> On Off
<b>File Operation Status, C:\TEMP.GIF file saved</b>			


Uplink Channel: 4132 (DownLink Channel: 4357)

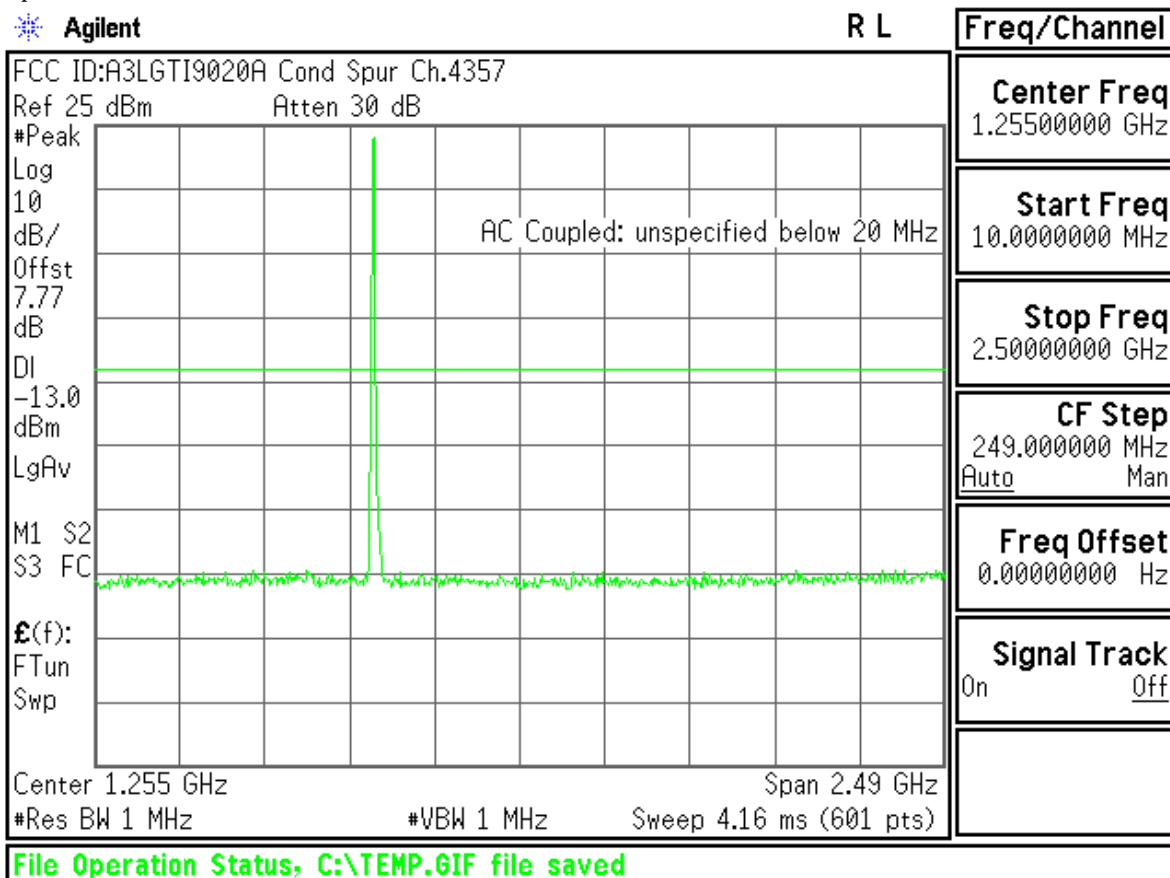


Uplink Channel: 4132 (DownLink Channel: 4357)

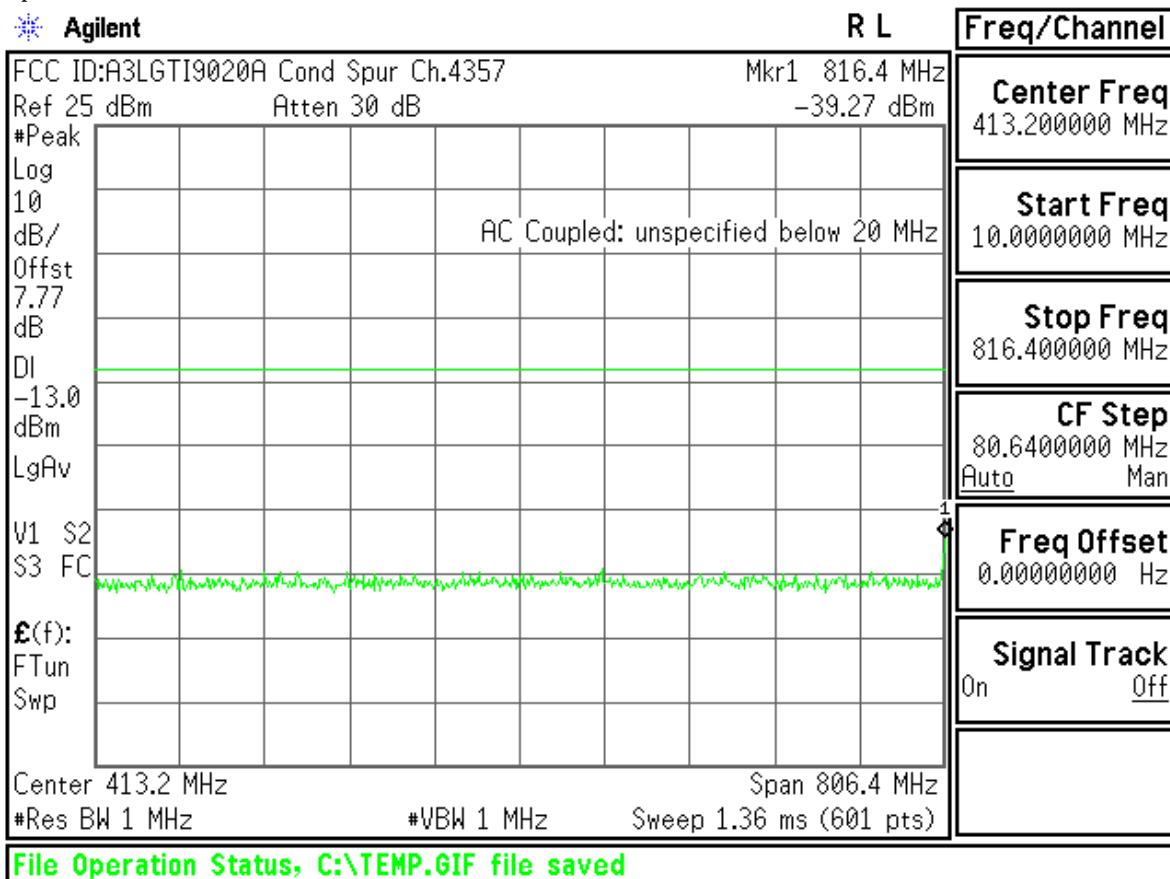


Uplink Channel: 4132 (DownLink Channel: 4357)

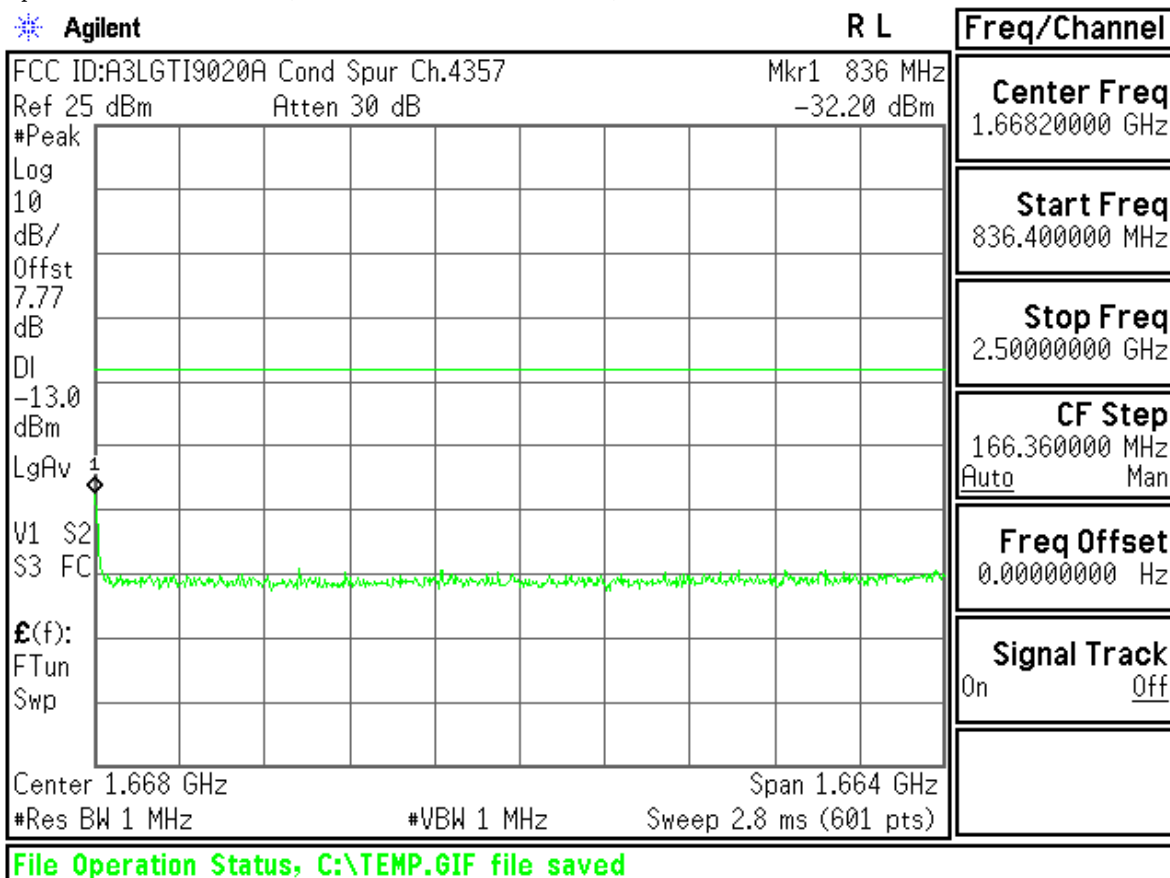


Uplink Channel: 4132 (DownLink Channel: 4357)

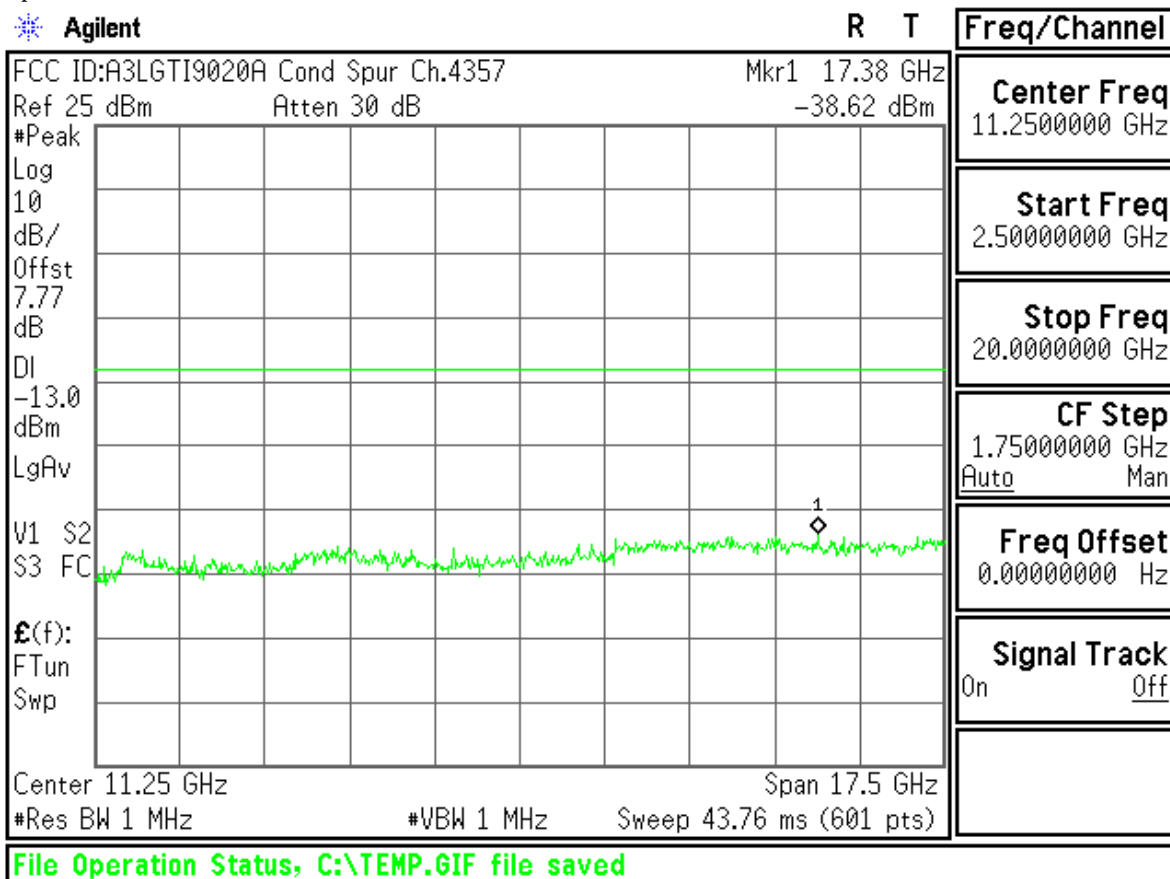


Uplink Channel: 4183 (DownLink Channel: 4408)

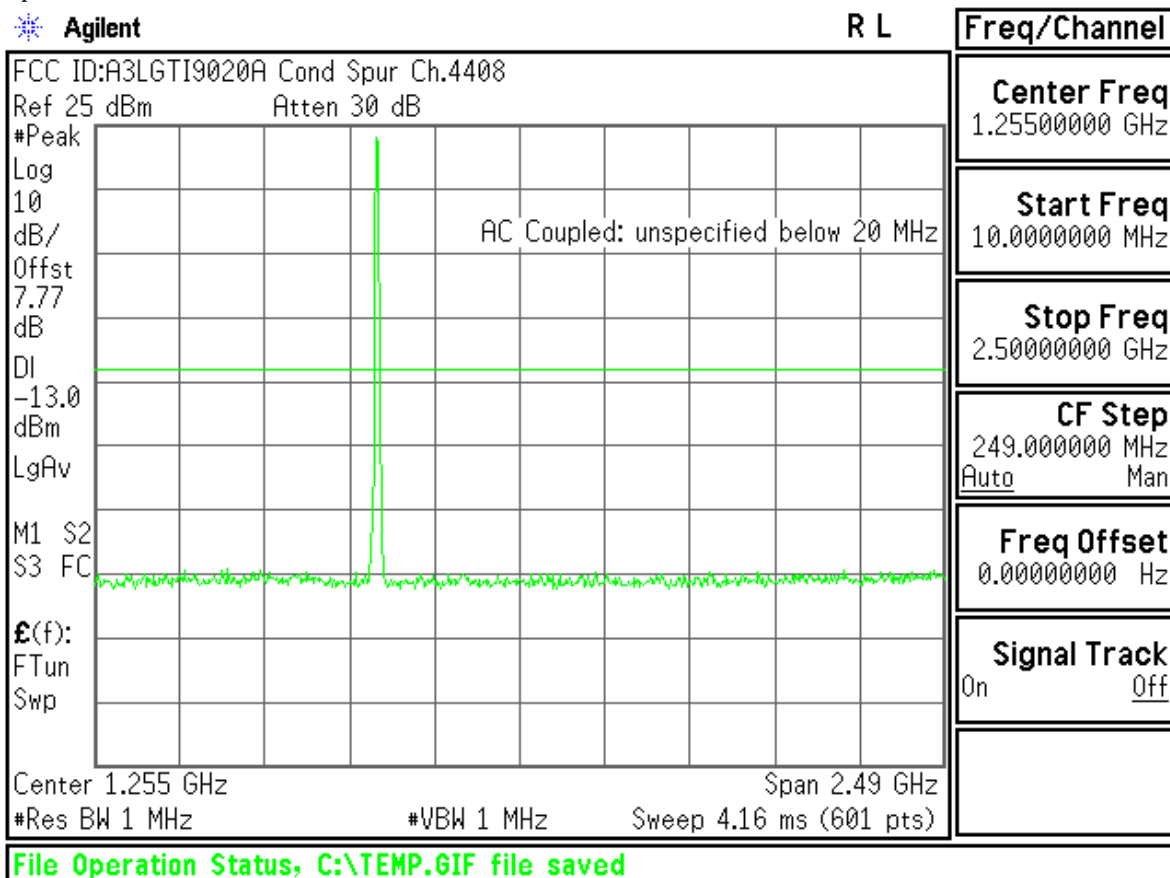


Uplink Channel: 4183 (DownLink Channel: 4408)

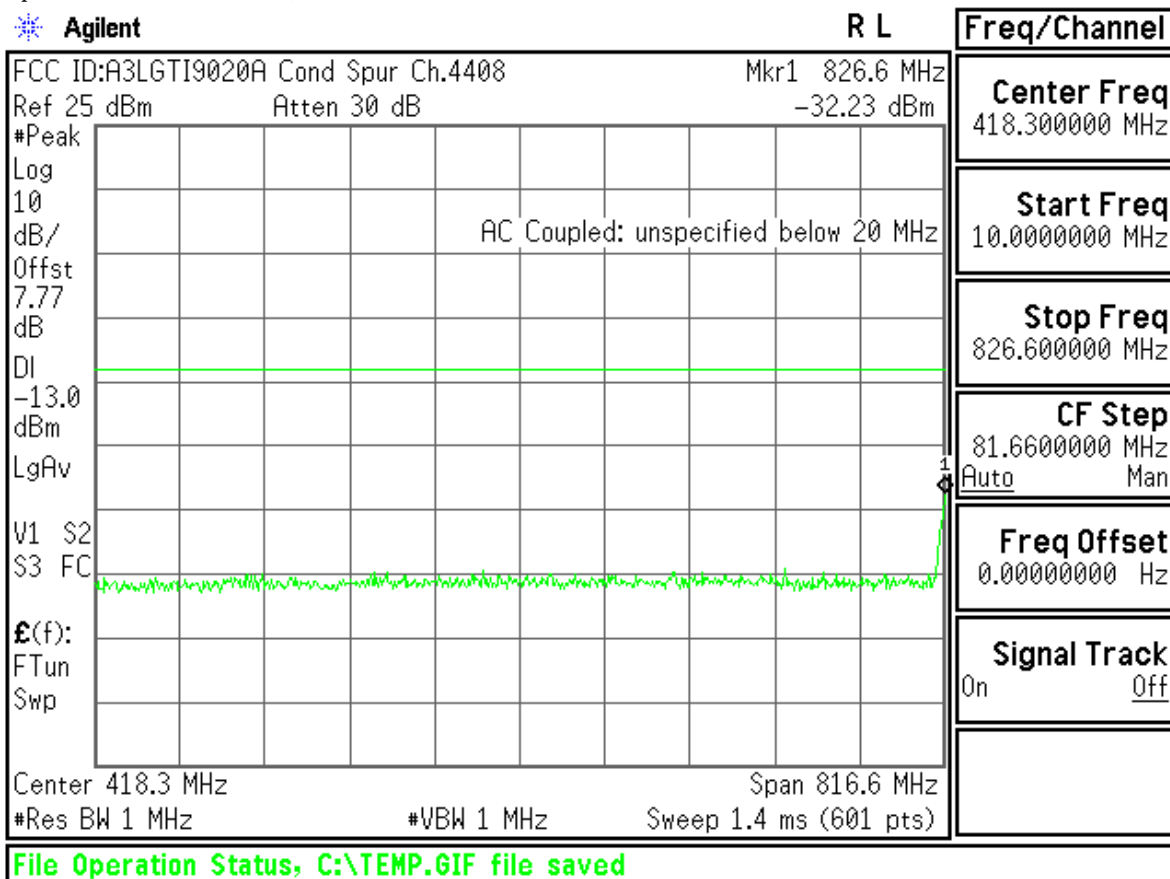


Uplink Channel: 4183 (DownLink Channel: 4408)

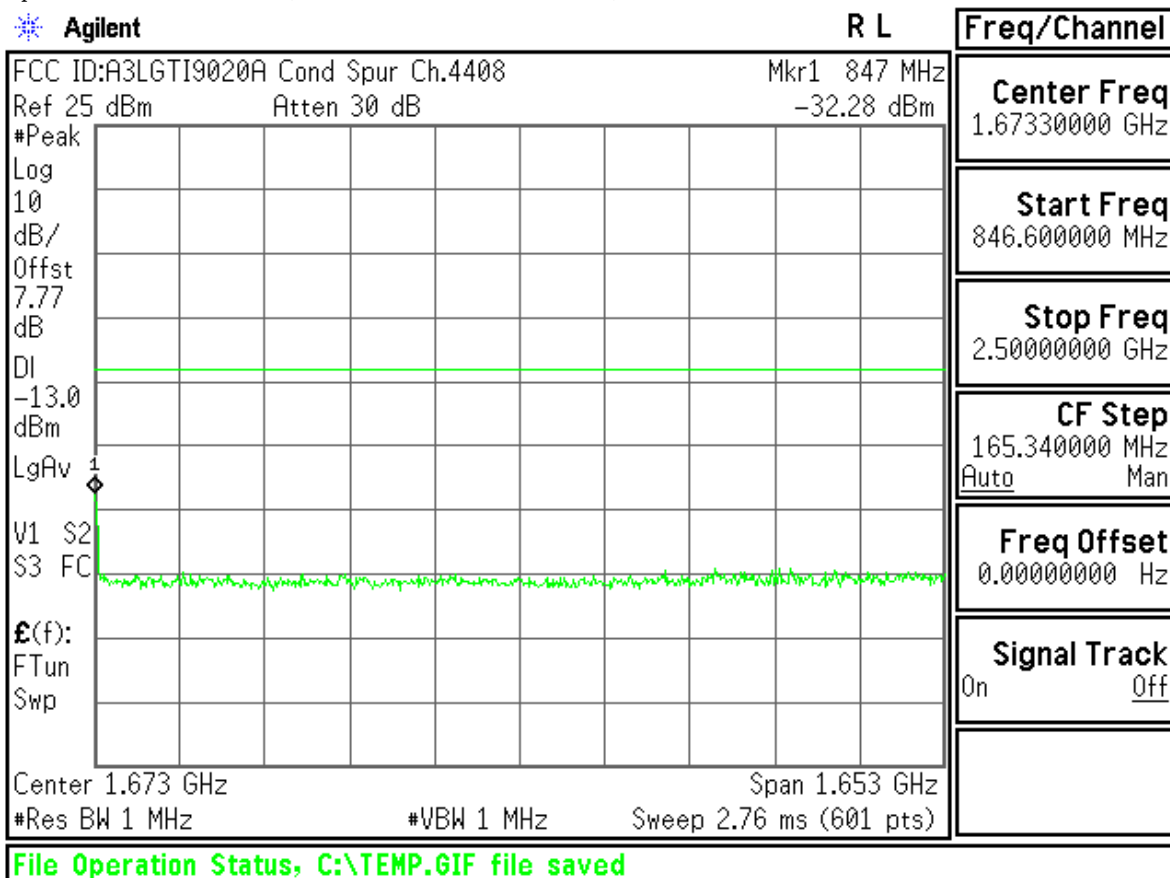


Uplink Channel: 4183 (DownLink Channel: 4408)

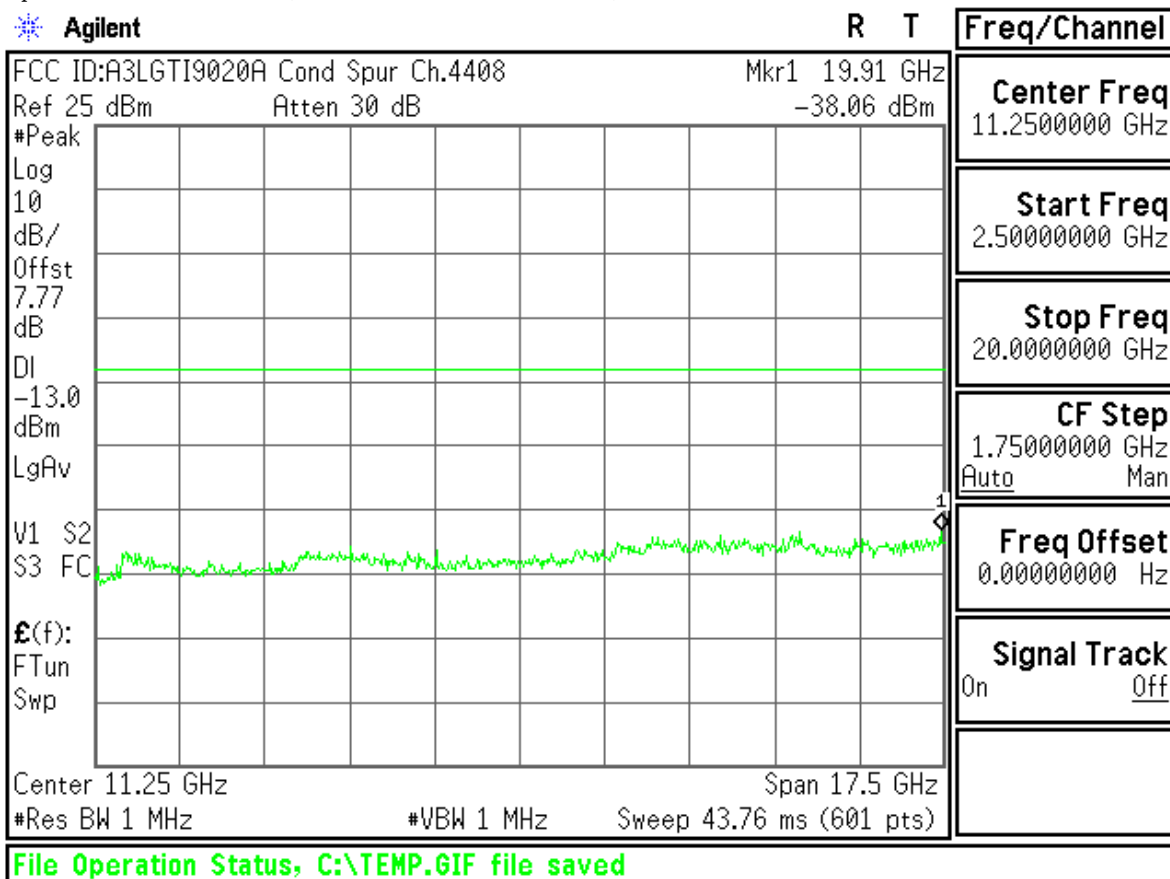


Uplink Channel: 4233 (DownLink Channel: 4458)

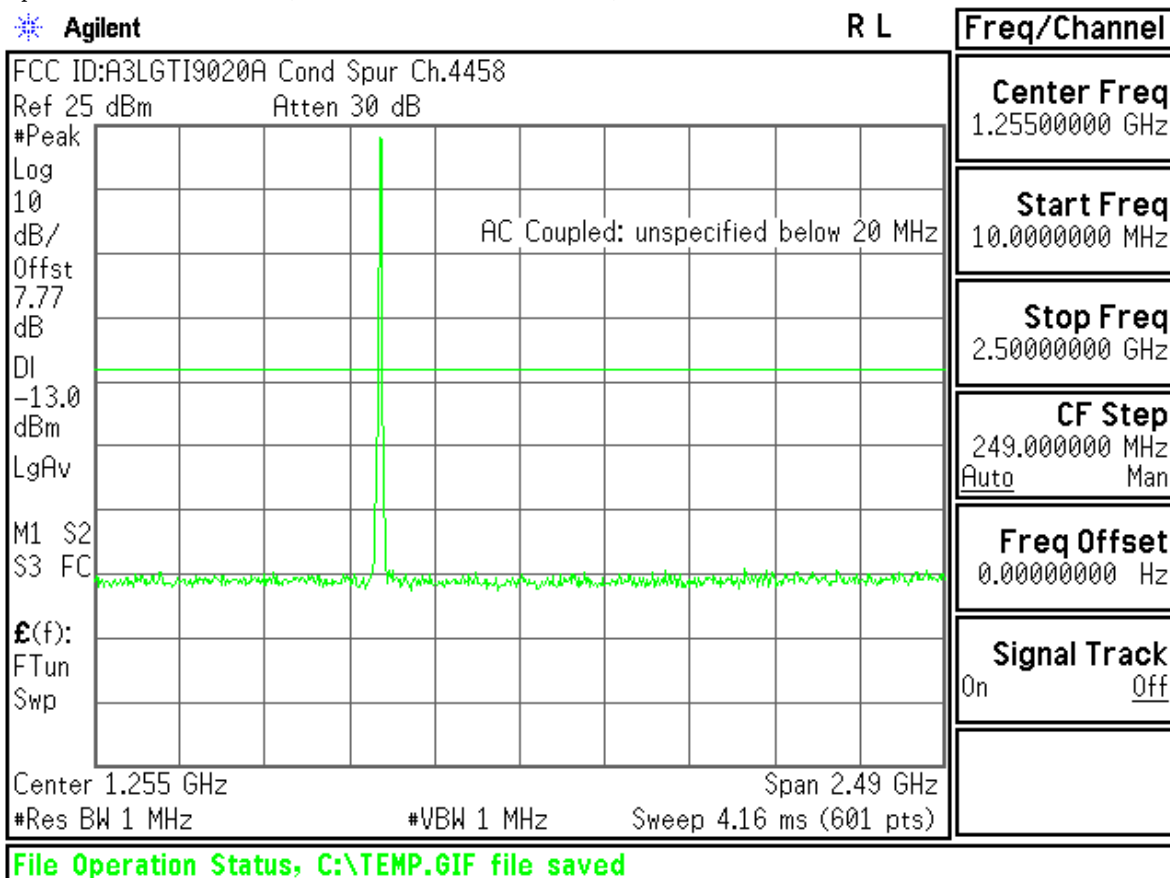


Uplink Channel: 4233 (DownLink Channel: 4458)

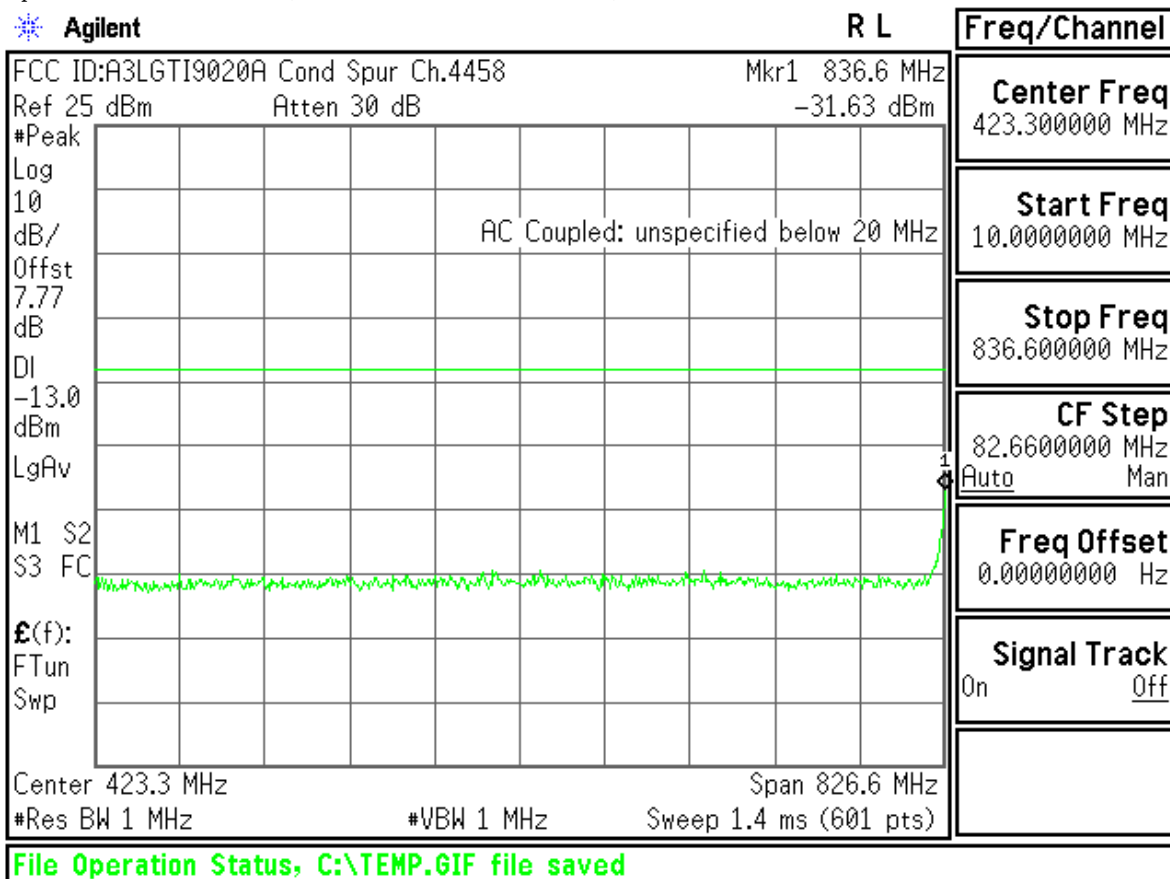


Uplink Channel: 4233 (DownLink Channel: 4458)

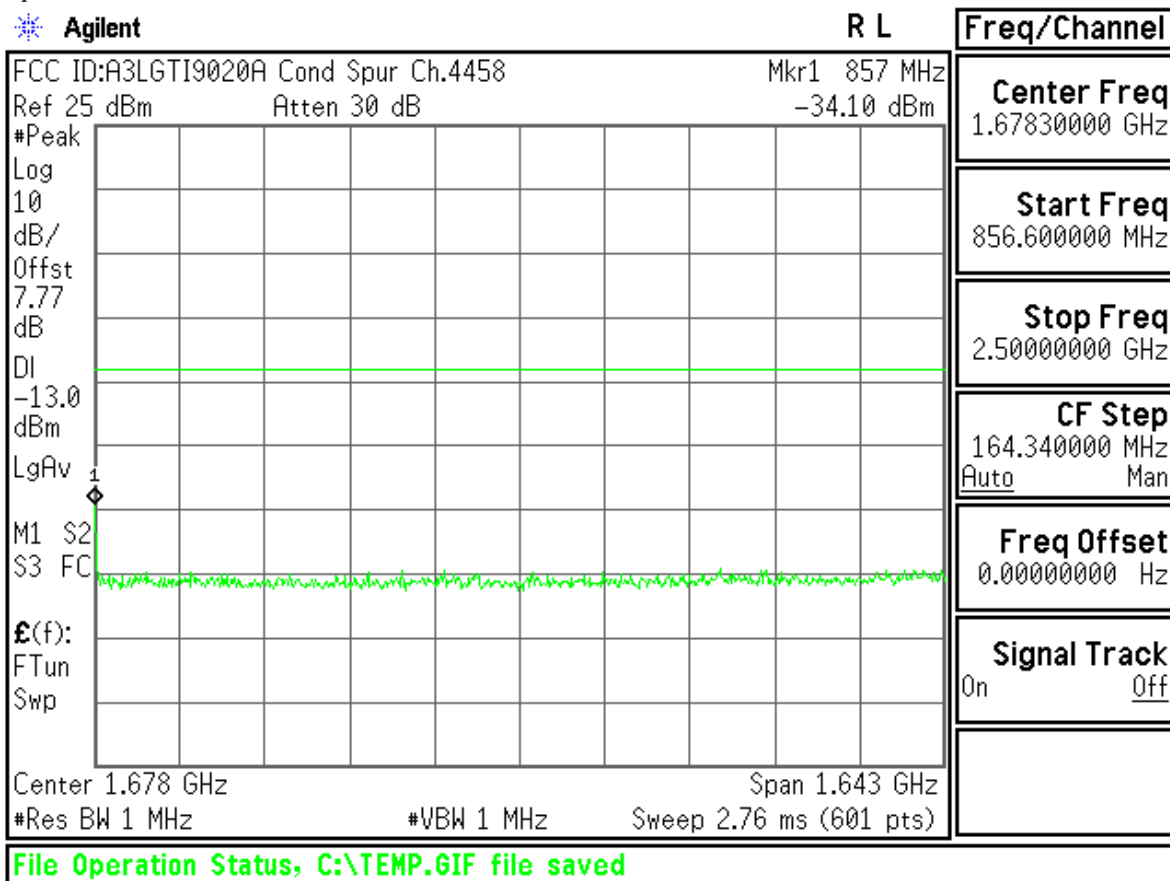


Uplink Channel: 4233 (DownLink Channel: 4458)

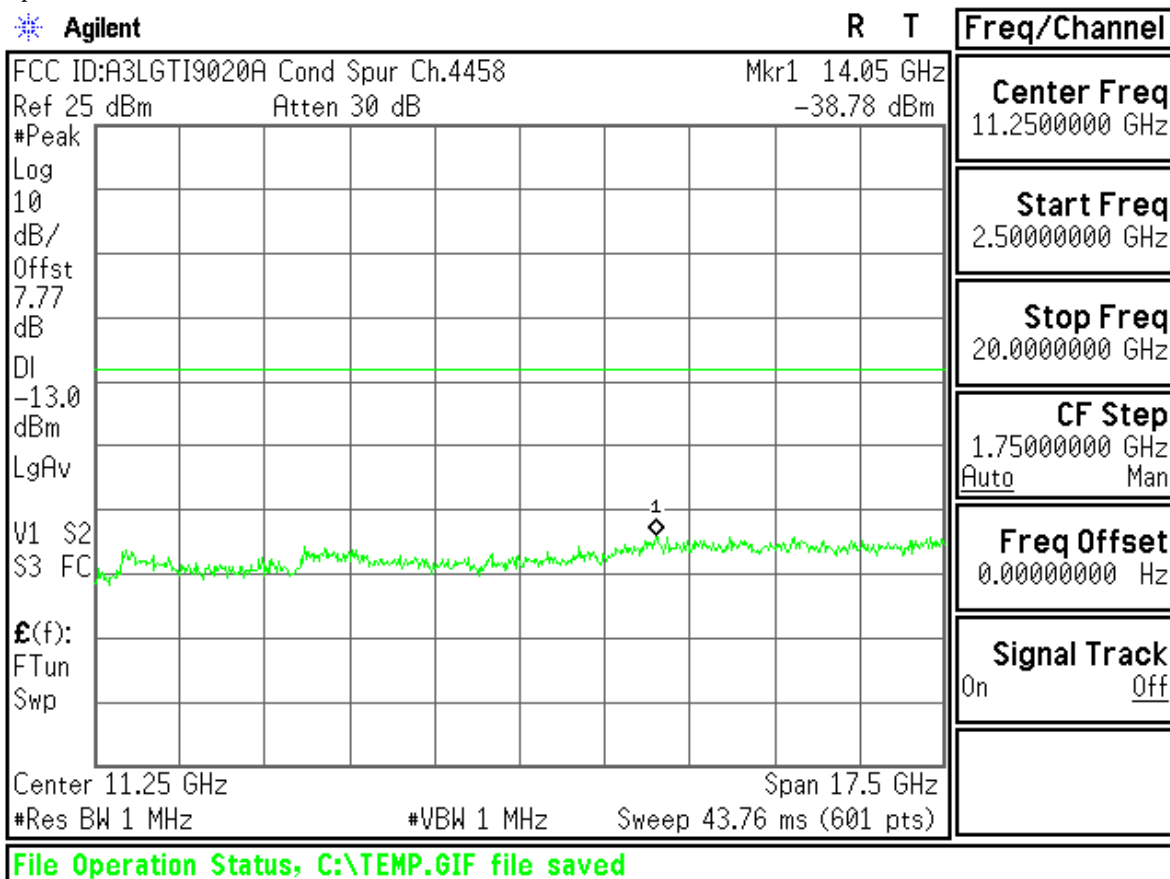


Uplink Channel: 4132 (DownLink Channel: 4357)

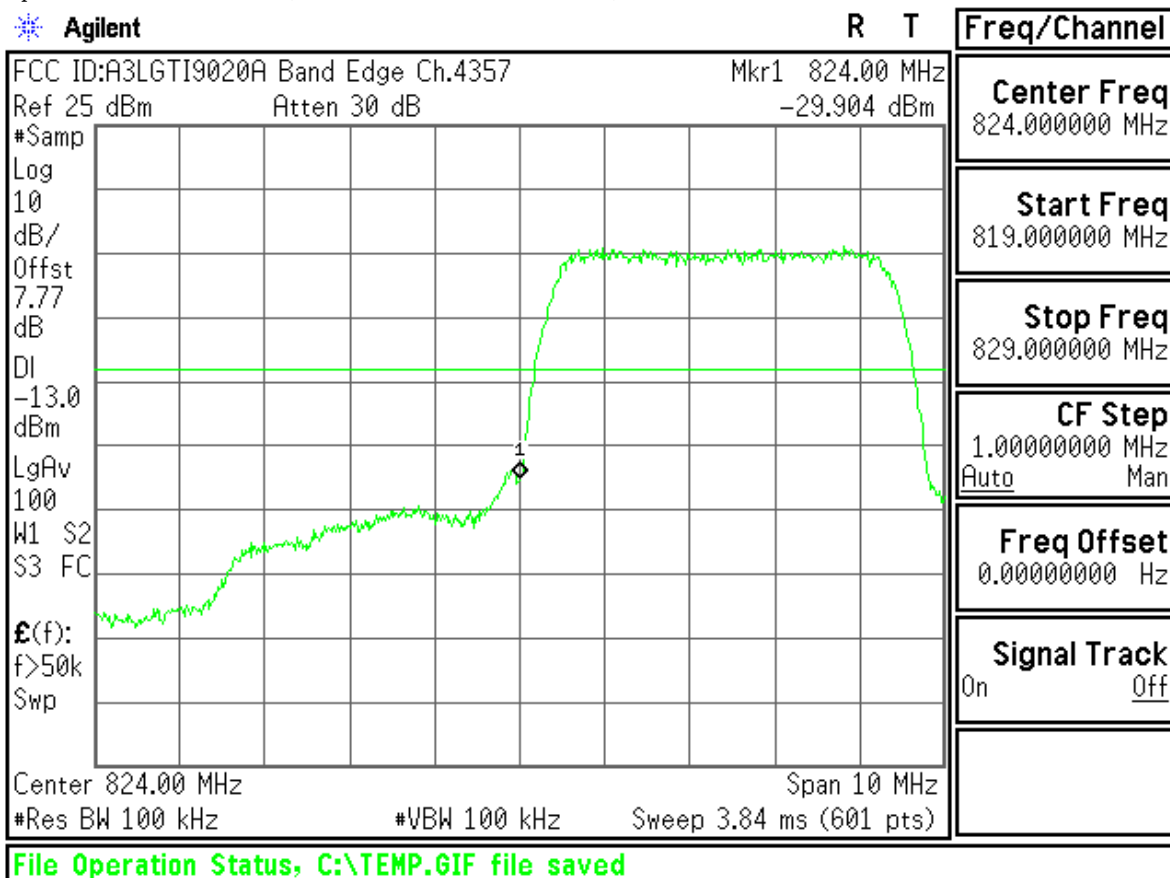


Uplink Channel: 4233 (DownLink Channel: 4458)

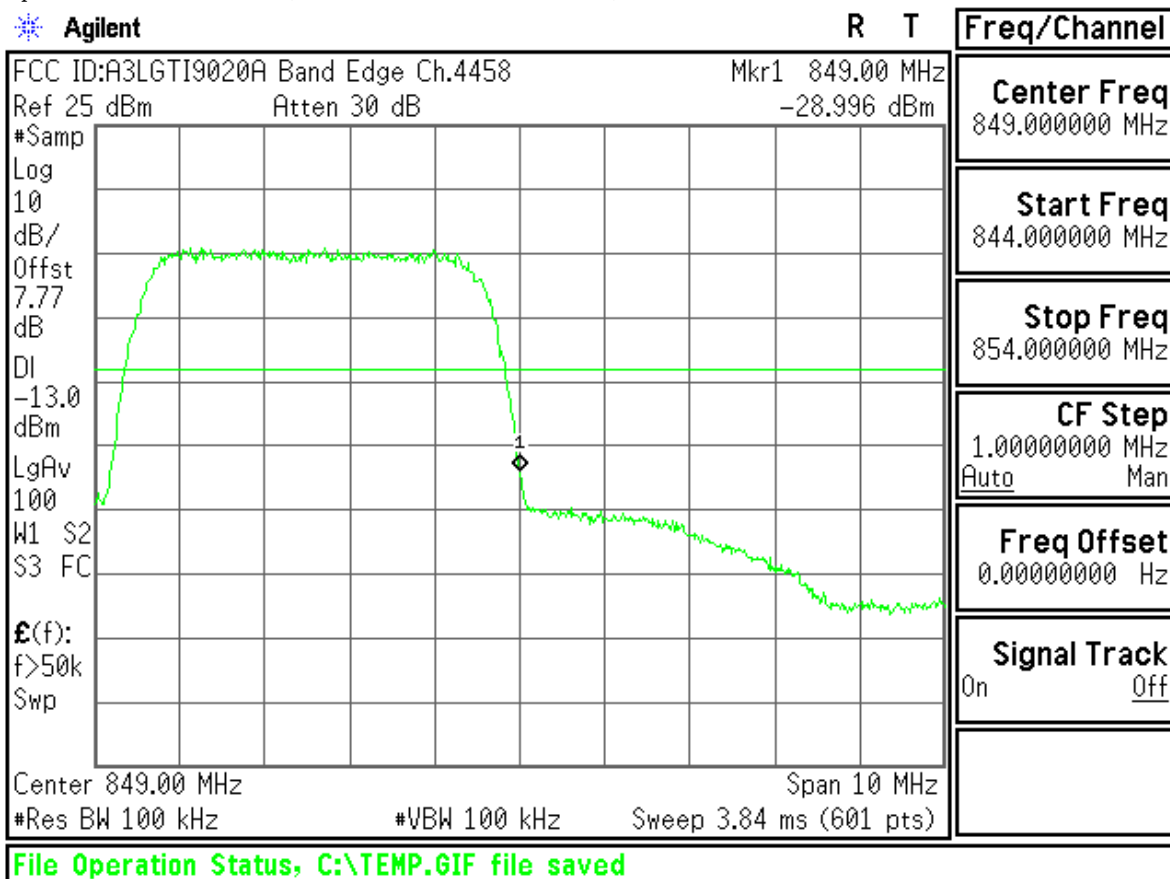

Uplink Channel: 4132 (DownLink Channel: 4357)

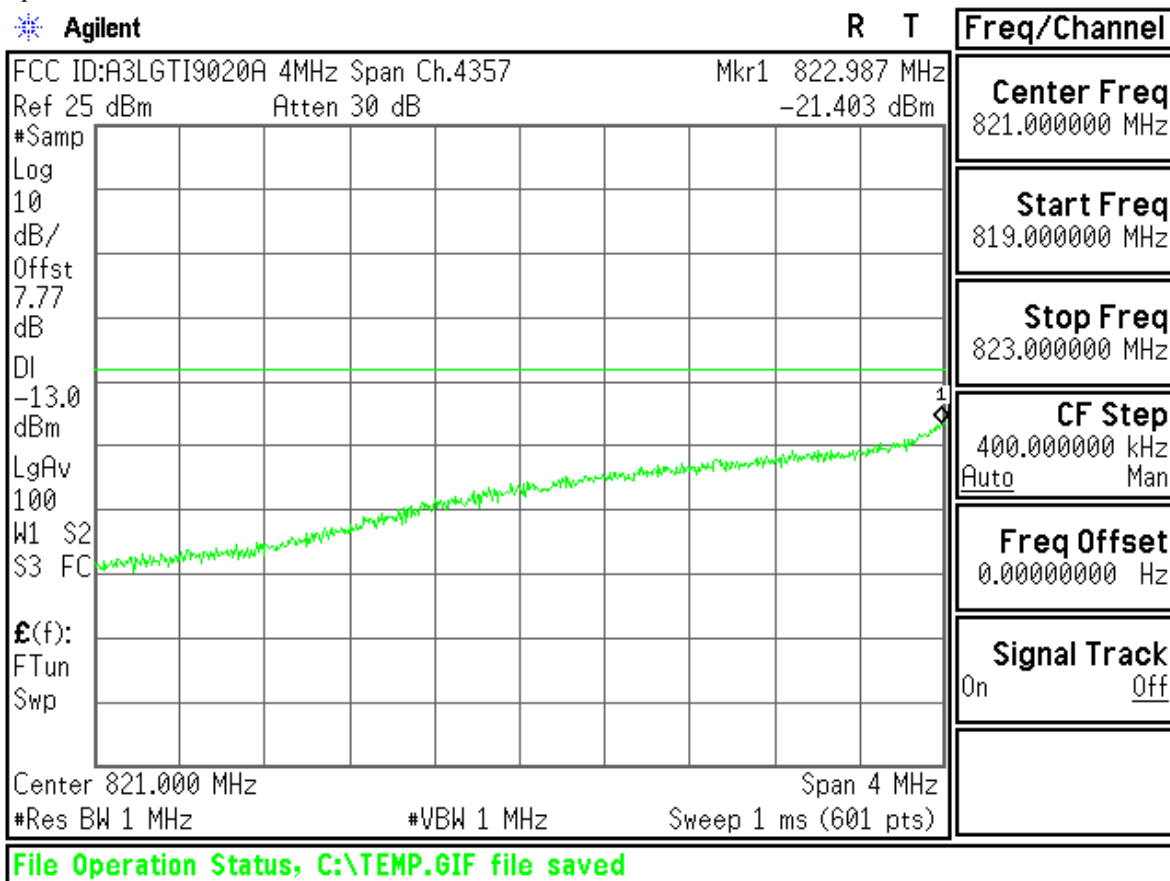

Uplink Channel: 4233 (DownLink Channel: 4458)

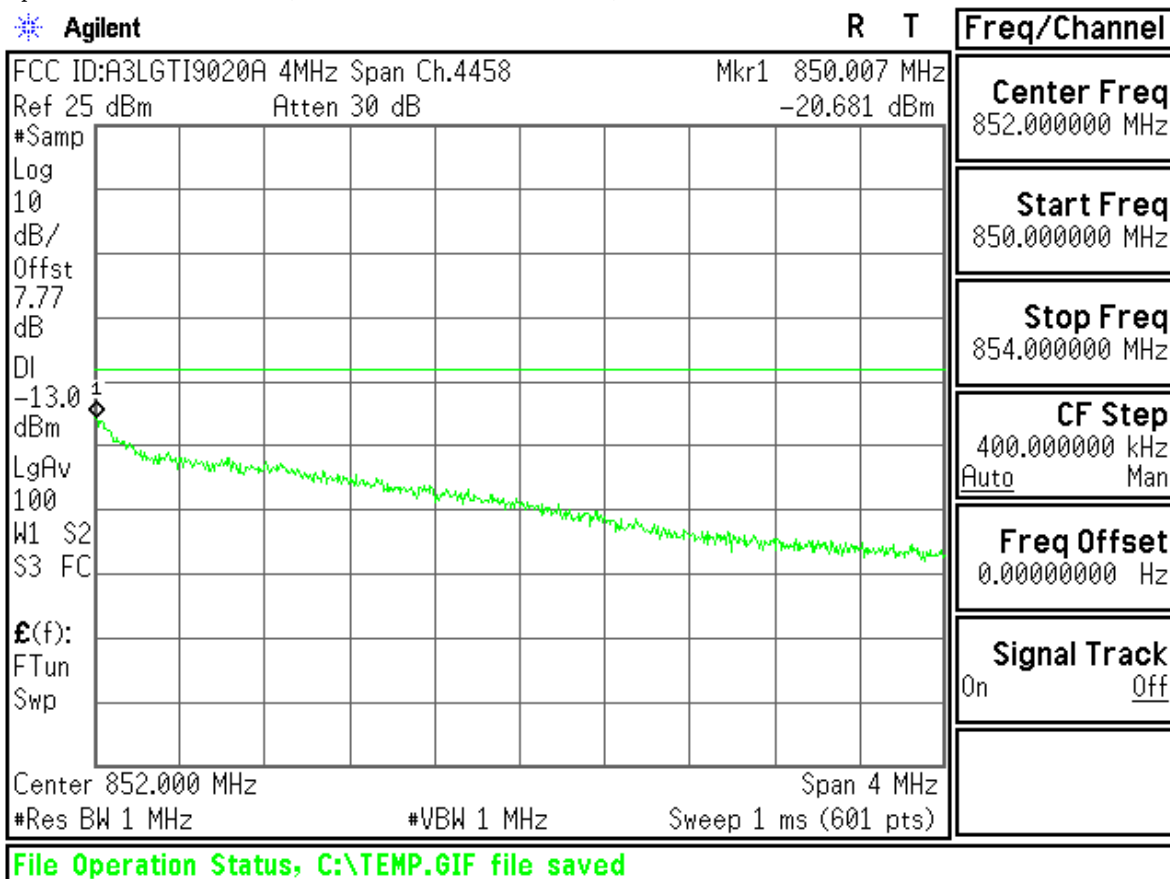

A3LGTI9020ABAND 2

Uplink Channel: 9262 (DownLink Channel: 9662)

Measurement/Instrument Screen										
Control		Thermal Power						Call Parms		
Thermal Power Setup ▾		Thermal Power <b>23.58 dBm</b> Continuous						Cell Power		
								-86.00		
								Channel Type		
								12.2k RMC		
								Paging Service		
								RB Test Mode		
								HSDPA Parameters		
								34.121 Preset Call Configs ▾		
								Channel (UARFCN) Parms		
		Active Cell Connected			Sys Type: UTRA FDD					
1 of 2				IntRef	Offset	T			1 of 3	

Uplink Channel: 9400 (DownLink Channel: 9800)

Measurement/Instrument Screen										
Control		Thermal Power						Call Parms		
Thermal Power Setup ▾		Thermal Power <b>23.55 dBm</b> Continuous						Cell Power		
								-86.00		
								Channel Type		
								12.2k RMC		
								Paging Service		
								RB Test Mode		
								HSDPA Parameters		
								34.121 Preset Call Configs ▾		
								Channel (UARFCN) Parms		
		Active Cell Connected			Sys Type: UTRA FDD					
1 of 2				IntRef	Offset	T			1 of 3	

Uplink Channel: 9538 (DownLink Channel: 9938)

Measurement/Instrument Screen						
Control	Thermal Power				Call Parms	
Thermal Power Setup	Thermal Power <b>23.32 dBm</b>				Cell Power	
					-86.00	
					dBm/3.84 MHz	
					Channel Type	
					12.2k R1C	
					Paging Service	
					RB Test Mode	
					HSDPA Parameters	
					34.121 Preset Call Configs	
					Channel (UARFCN) Parms	
	Active Cell Connected		Sys Type: UTRA FDD			
1 of 2	IntRef	Offset	T			1 of 3

Uplink Channel: 9262 (DownLink Channel: 9662)

Agilent		R	T	Freq/Channel
Base	Ch Freq	1.8524 GHz		Center Freq
Occupied Bandwidth		#3GPP W-CDMA		1.85240000 GHz
FCC ID:A3LGTI9020A 0BW Ch.9662		Trig Free		Start Freq
Ref 25 dBm Atten 30 dB				1.84740000 GHz
#Samp				Stop Freq
Log				1.85740000 GHz
10				CF Step
dB/				1.00000000 MHz
Offst				Auto Man
8.75				Freq Offset
dB				0.00000000 Hz
Center 1.852 40 GHz	Span 10 MHz			
#Res BW 100 kHz	#VBW 1 MHz	Sweep 2.92 ms (601 pts)		Signal Track
Occupied Bandwidth		Occ BW % Pwr	99.00 %	On Off
4.0715 MHz		x dB	-26.00 dB	
Transmit Freq Error	21.443 kHz			
x dB Bandwidth	4.523 MHz*			
File Operation Status, C:\TEMP.GIF file saved				

Uplink Channel: 9400 (DownLink Channel: 9800)

**Agilent** R T


<b>Base</b>	<b>Ch Freq</b> 1.88 GHz	<b>Trig</b> Free	<b>Freq/Channel</b>
Occupied Bandwidth <b>*3GPP W-CDMA</b>			<b>Center Freq</b> 1.88000000 GHz
FCC ID:A3LGTI9020A 0BW Ch.9800 Ref 25 dBm Atten 30 dB			<b>Start Freq</b> 1.87500000 GHz
			<b>Stop Freq</b> 1.88500000 GHz
			<b>CF Step</b> 1.00000000 MHz Auto Man
Center 1.880 00 GHz Span 10 MHz			<b>Freq Offset</b> 0.00000000 Hz
#Res BW 100 kHz #VBW 1 MHz Sweep 2.92 ms (601 pts)			<b>Signal Track</b> On Off
<b>Occupied Bandwidth</b>		<b>Occ BW % Pwr</b> 99.00 %	
4.0491 MHz		<b>x dB</b> -26.00 dB	
<b>Transmit Freq Error</b> 22.253 kHz			
<b>x dB Bandwidth</b> 4.516 MHz*			
<b>File Operation Status, C:\TEMP.GIF file saved</b>			

Uplink Channel: 9538 (DownLink Channel: 9938)


**Agilent** R T

<b>Base</b>	<b>Ch Freq</b> 1.9076 GHz	<b>Trig</b> Free	<b>Freq/Channel</b>
Occupied Bandwidth <b>*3GPP W-CDMA</b>			<b>Center Freq</b> 1.90760000 GHz
FCC ID:A3LGTI9020A 0BW Ch.9938 Ref 25 dBm Atten 30 dB			<b>Start Freq</b> 1.90260000 GHz
			<b>Stop Freq</b> 1.91260000 GHz
			<b>CF Step</b> 1.00000000 MHz Auto Man
Center 1.907 60 GHz Span 10 MHz			<b>Freq Offset</b> 0.00000000 Hz
#Res BW 100 kHz #VBW 1 MHz Sweep 2.92 ms (601 pts)			<b>Signal Track</b> On Off
<b>Occupied Bandwidth</b>		<b>Occ BW % Pwr</b> 99.00 %	
4.0546 MHz		<b>x dB</b> -26.00 dB	
<b>Transmit Freq Error</b> 43.288 kHz			
<b>x dB Bandwidth</b> 4.552 MHz*			
<b>File Operation Status, C:\TEMP.GIF file saved</b>			


Uplink Channel: 9262 (DownLink Channel: 9662)

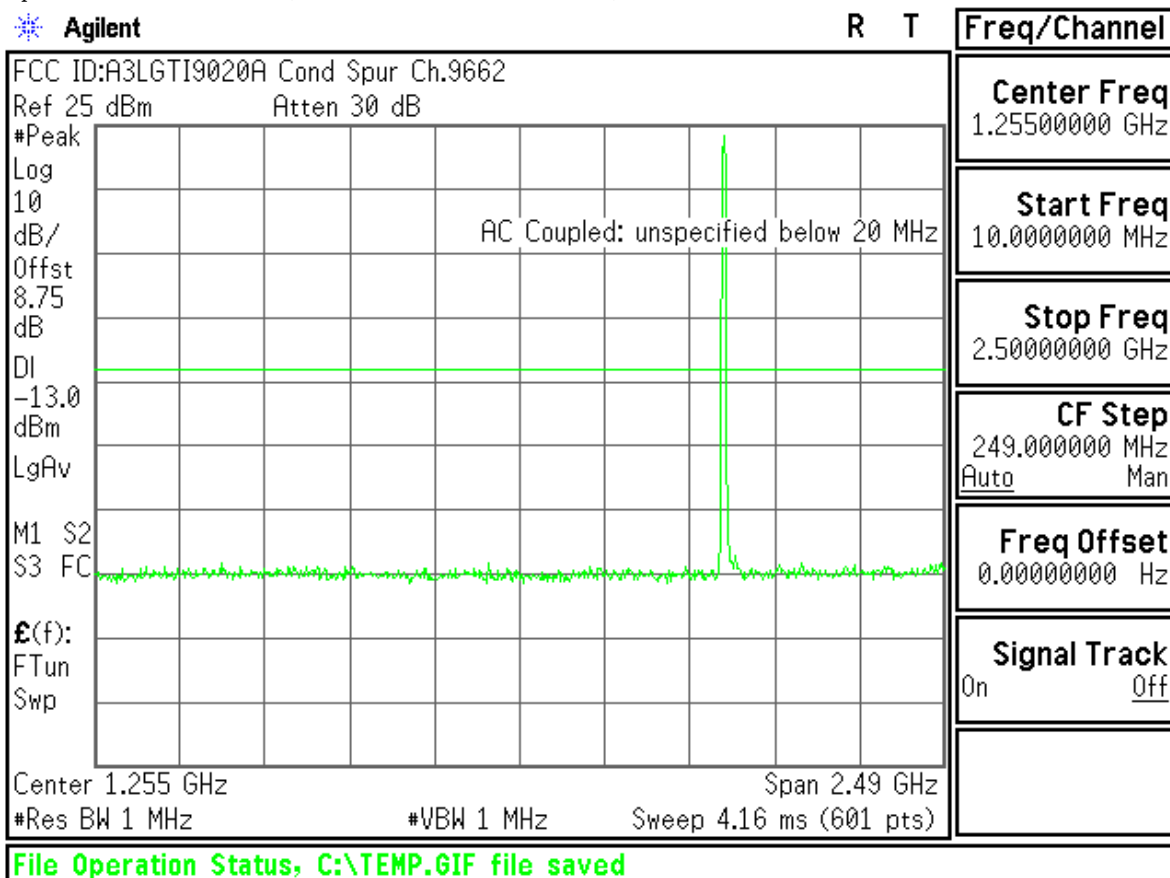


Uplink Channel: 9262 (DownLink Channel: 9662)

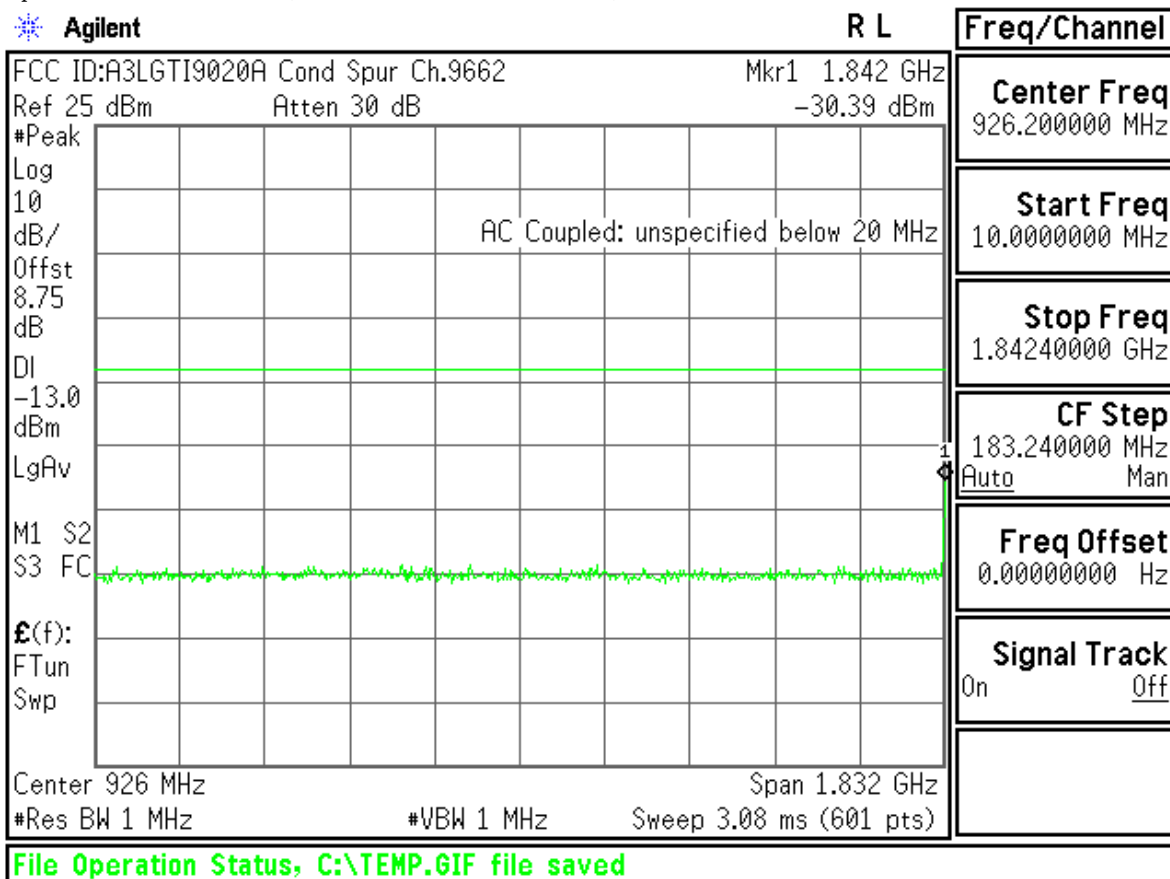


Uplink Channel: 9262 (DownLink Channel: 9662)

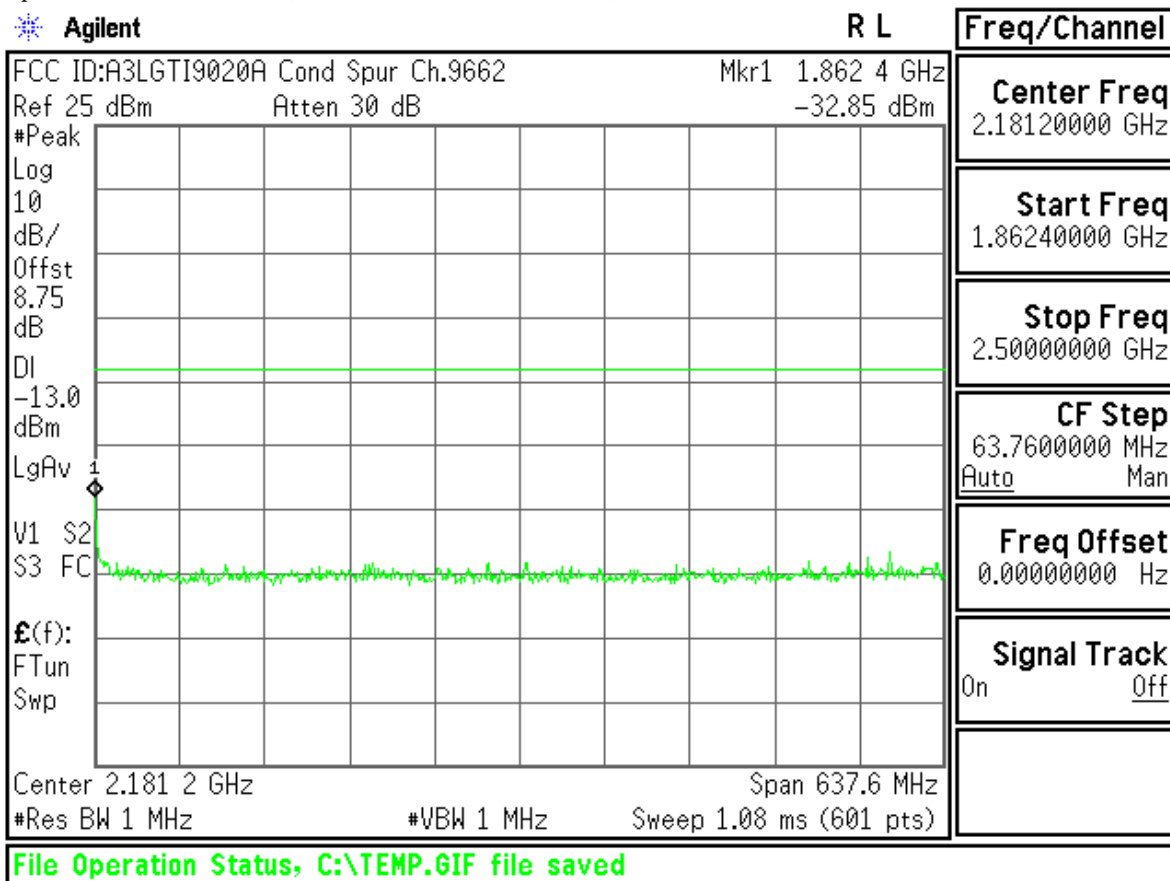


Uplink Channel: 9262 (DownLink Channel: 9662)

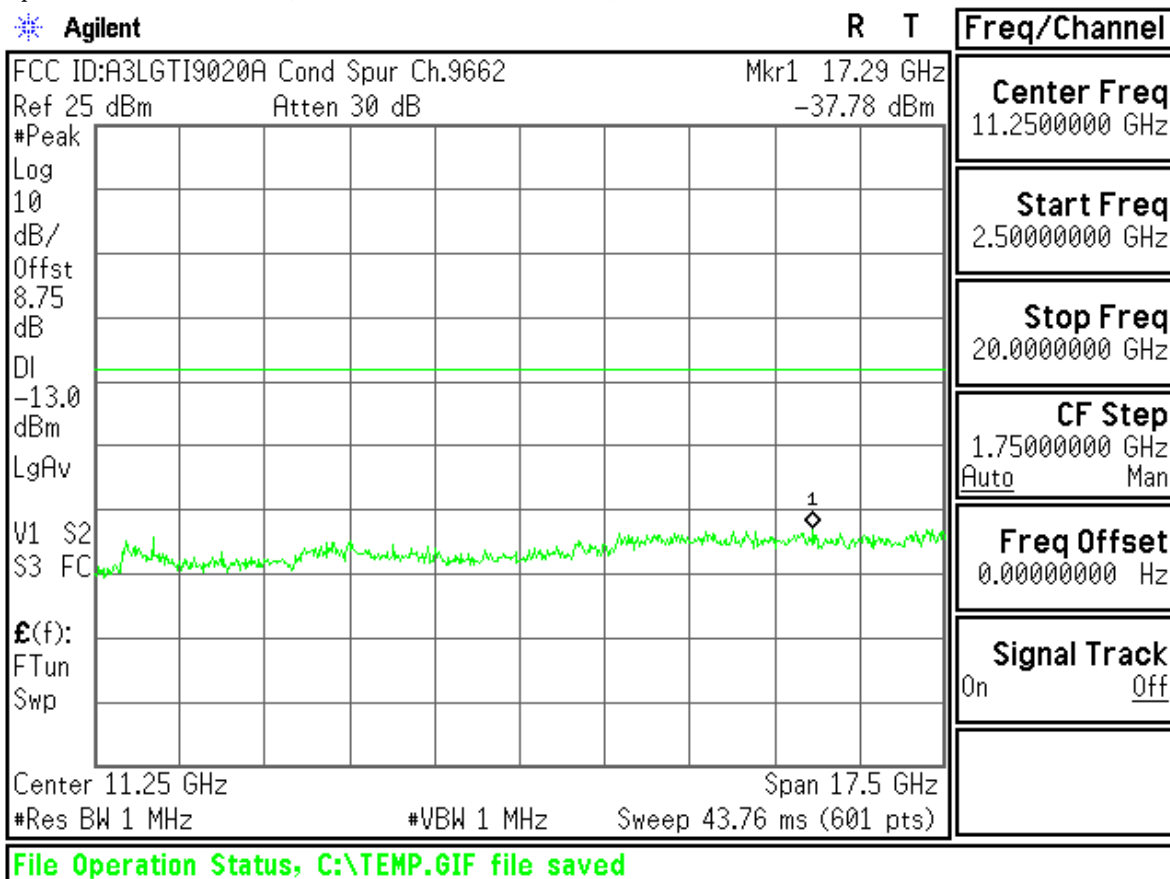


Uplink Channel: 9400 (DownLink Channel: 9800)

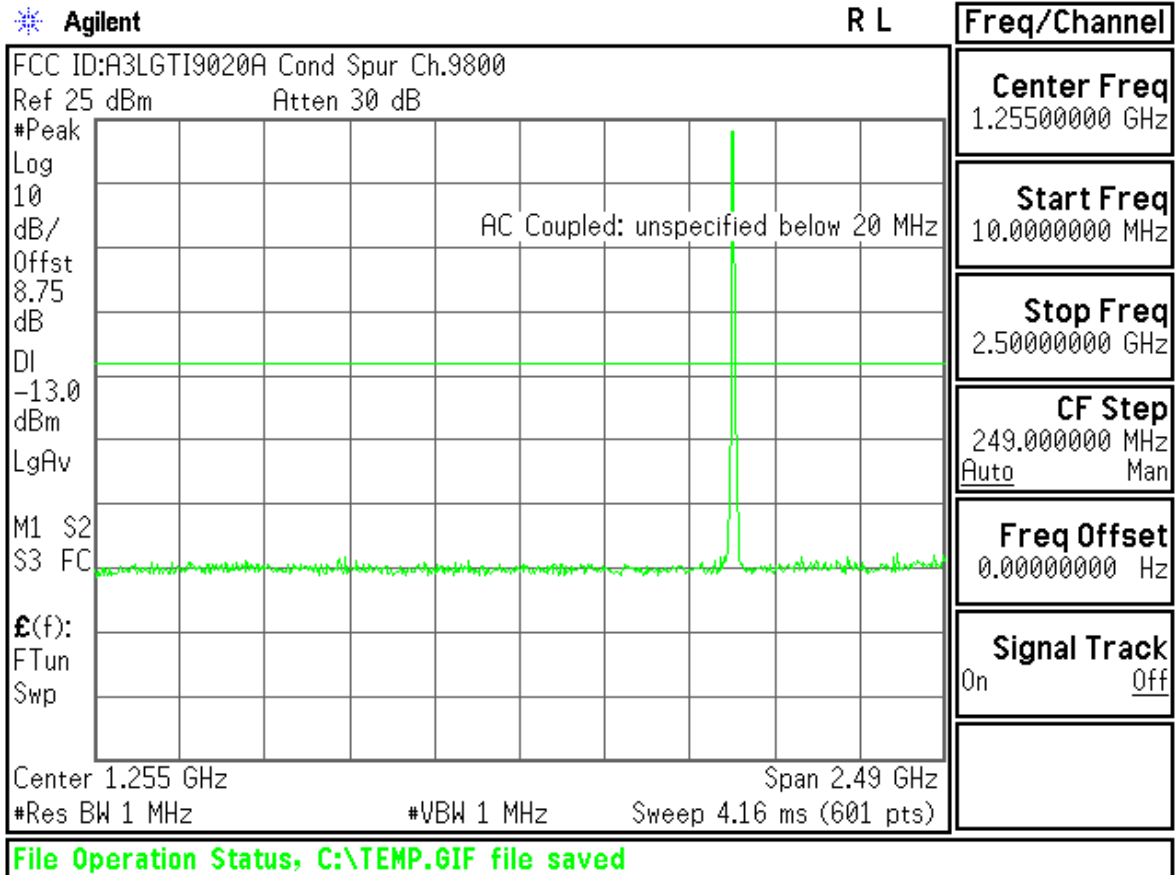


Uplink Channel: 9400 (DownLink Channel: 9800)

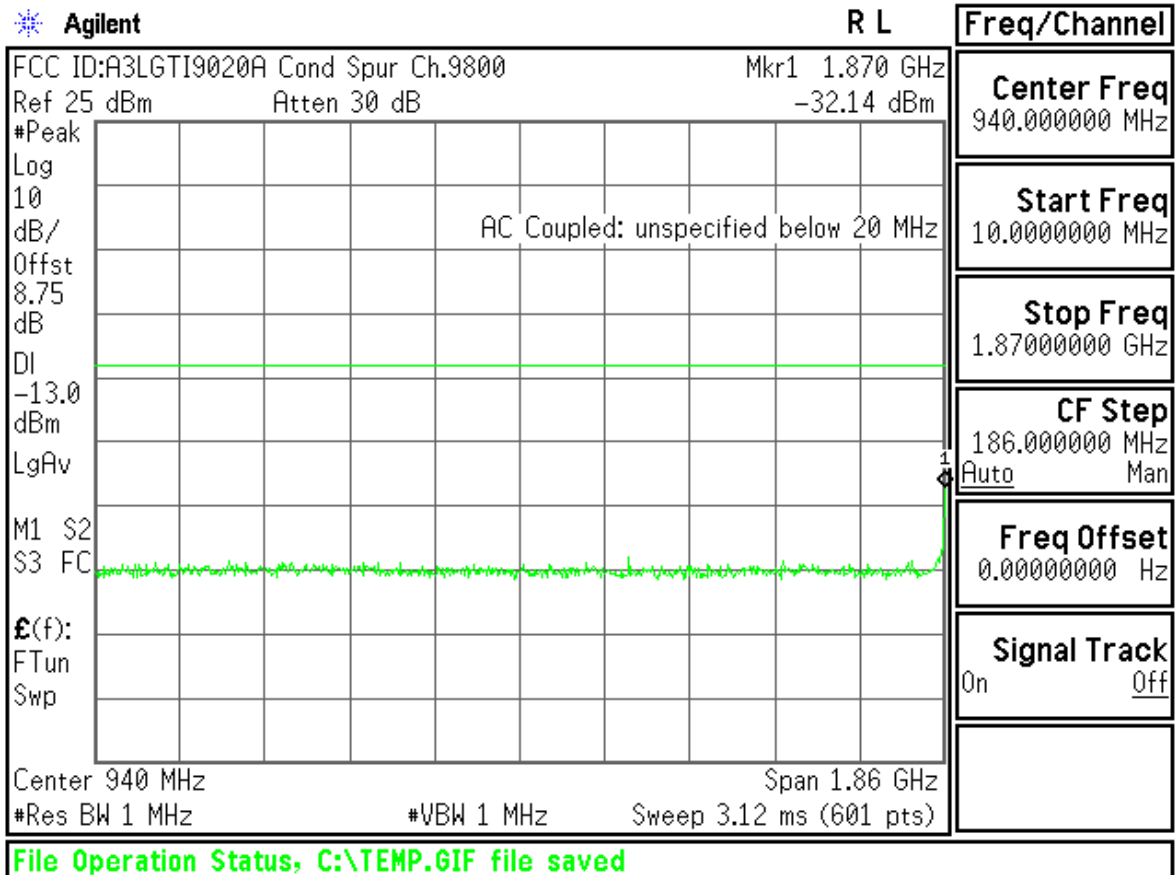


Uplink Channel: 9400 (DownLink Channel: 9800)

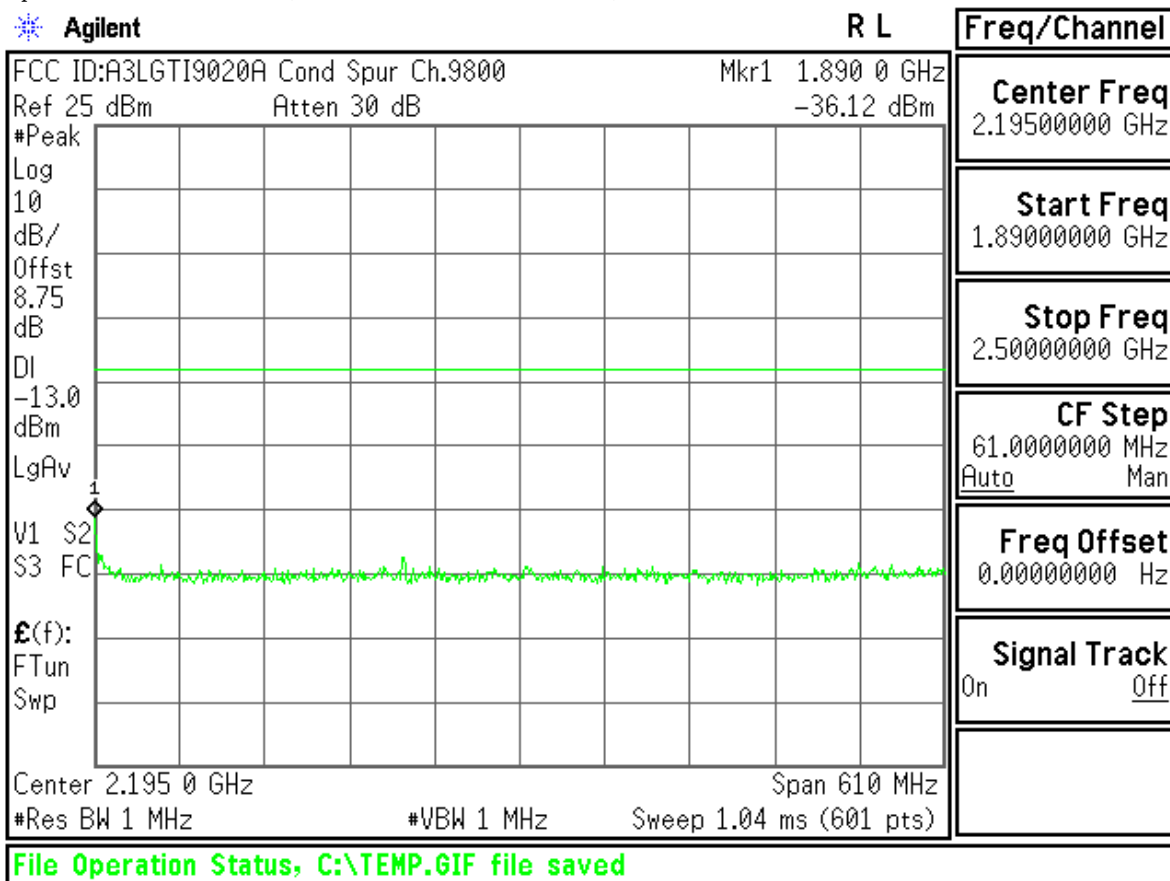


Uplink Channel: 9400 (DownLink Channel: 9800)

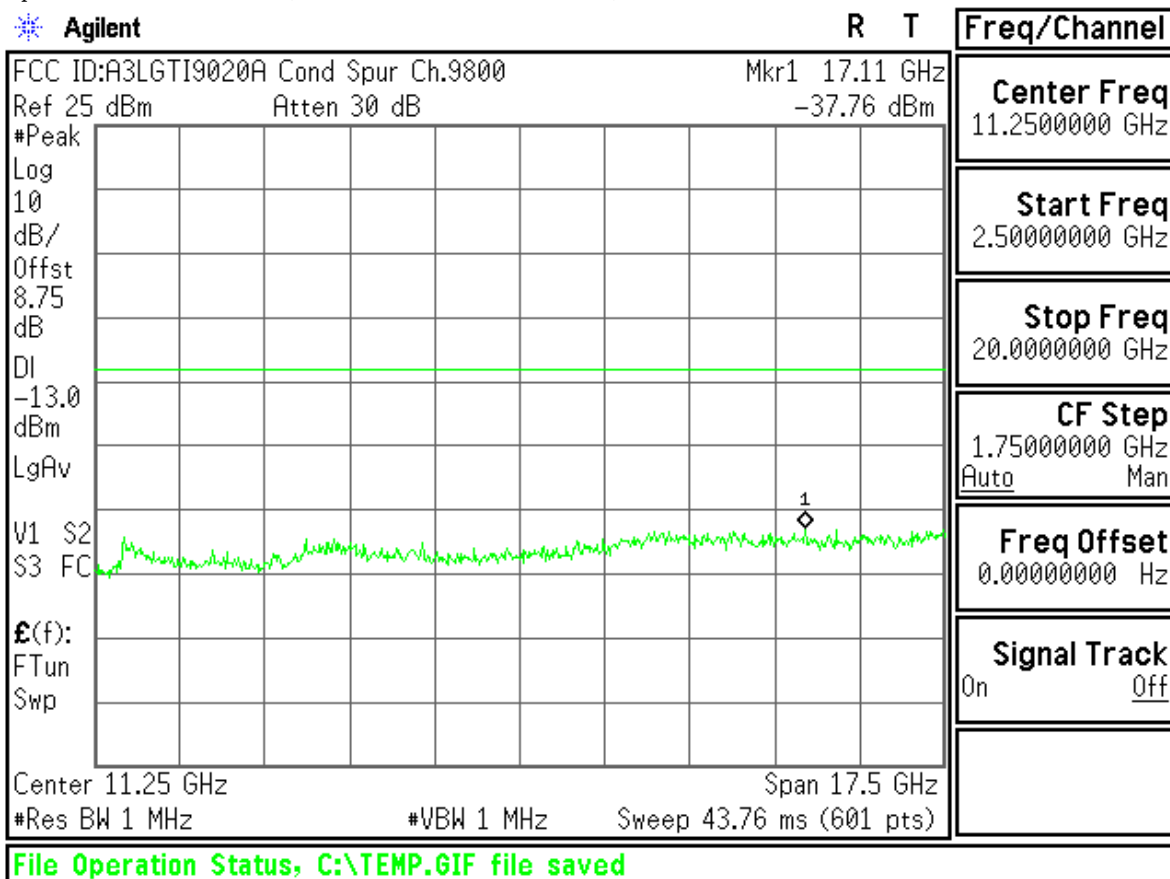


Uplink Channel: 9538 (DownLink Channel: 9938)

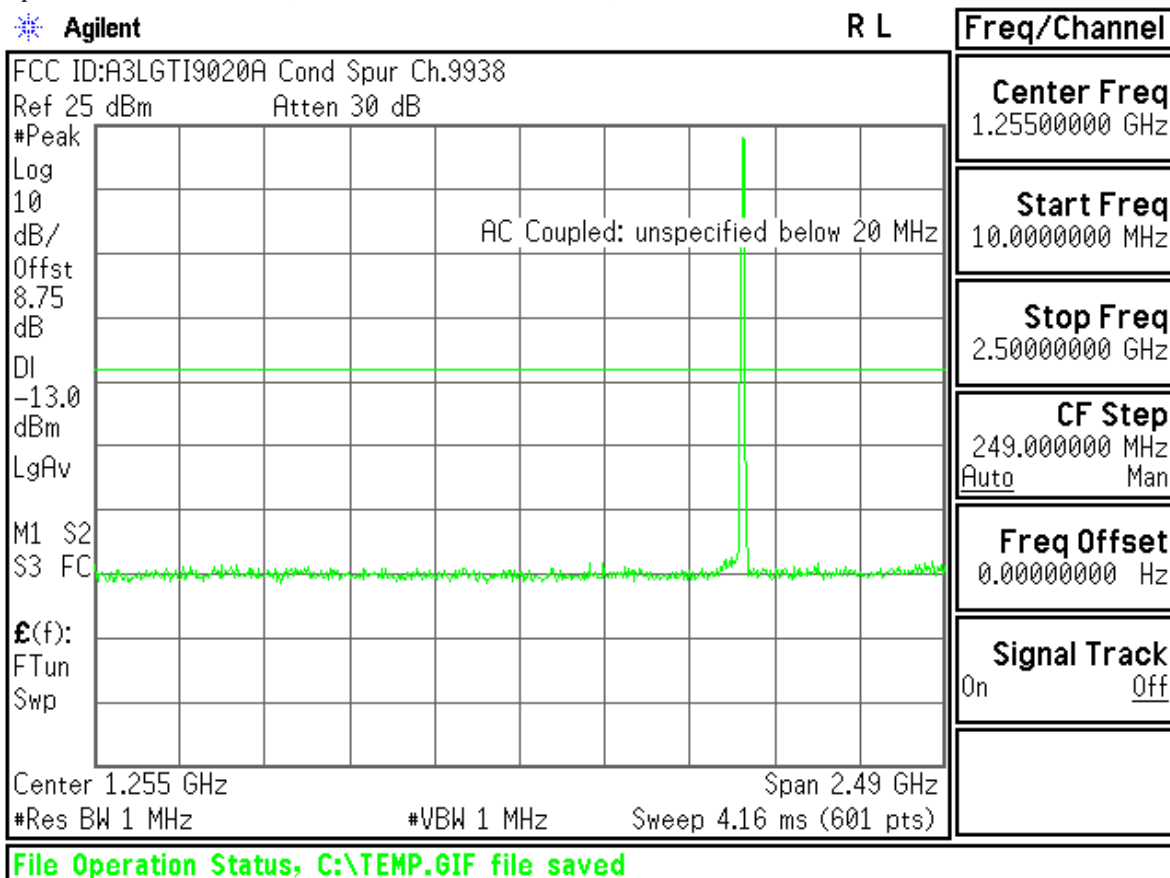


Uplink Channel: 9538 (DownLink Channel: 9938)

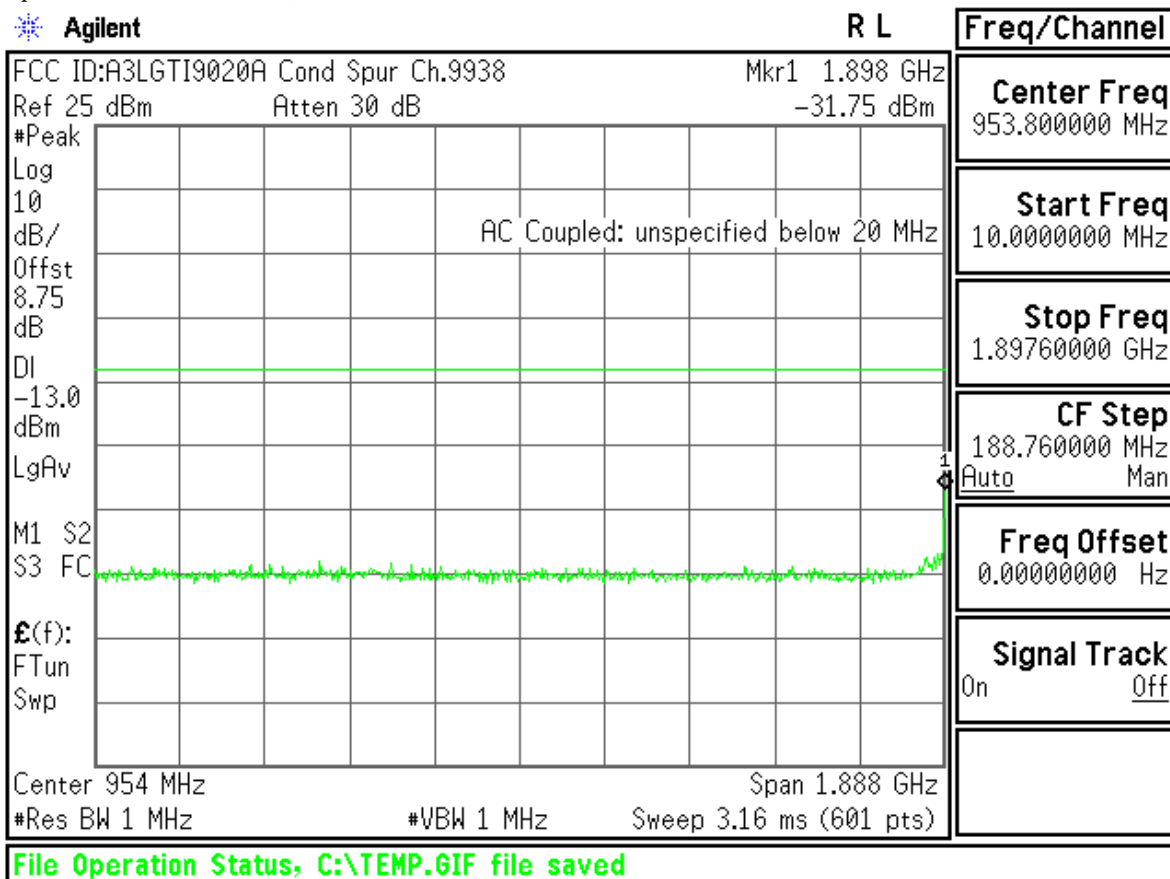


Uplink Channel: 9538 (DownLink Channel: 9938)

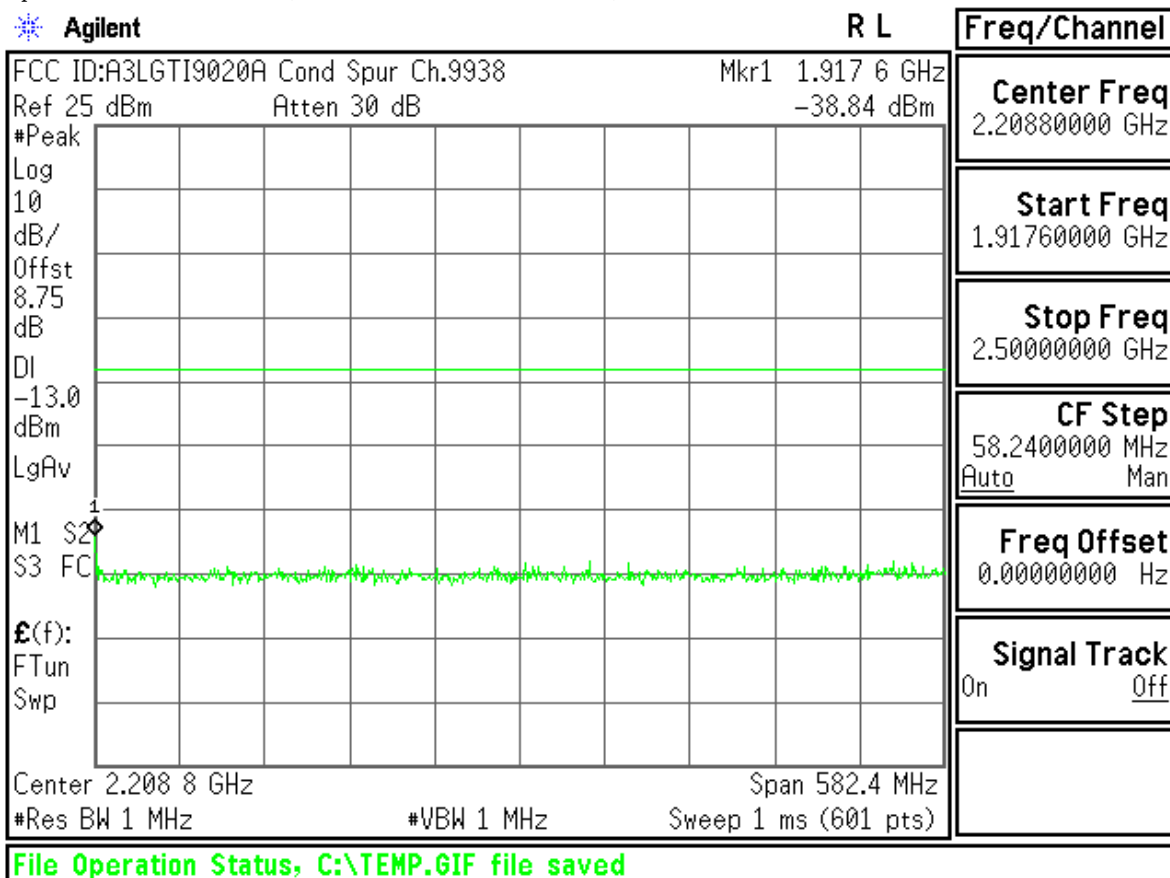


Uplink Channel: 9538 (DownLink Channel: 9938)

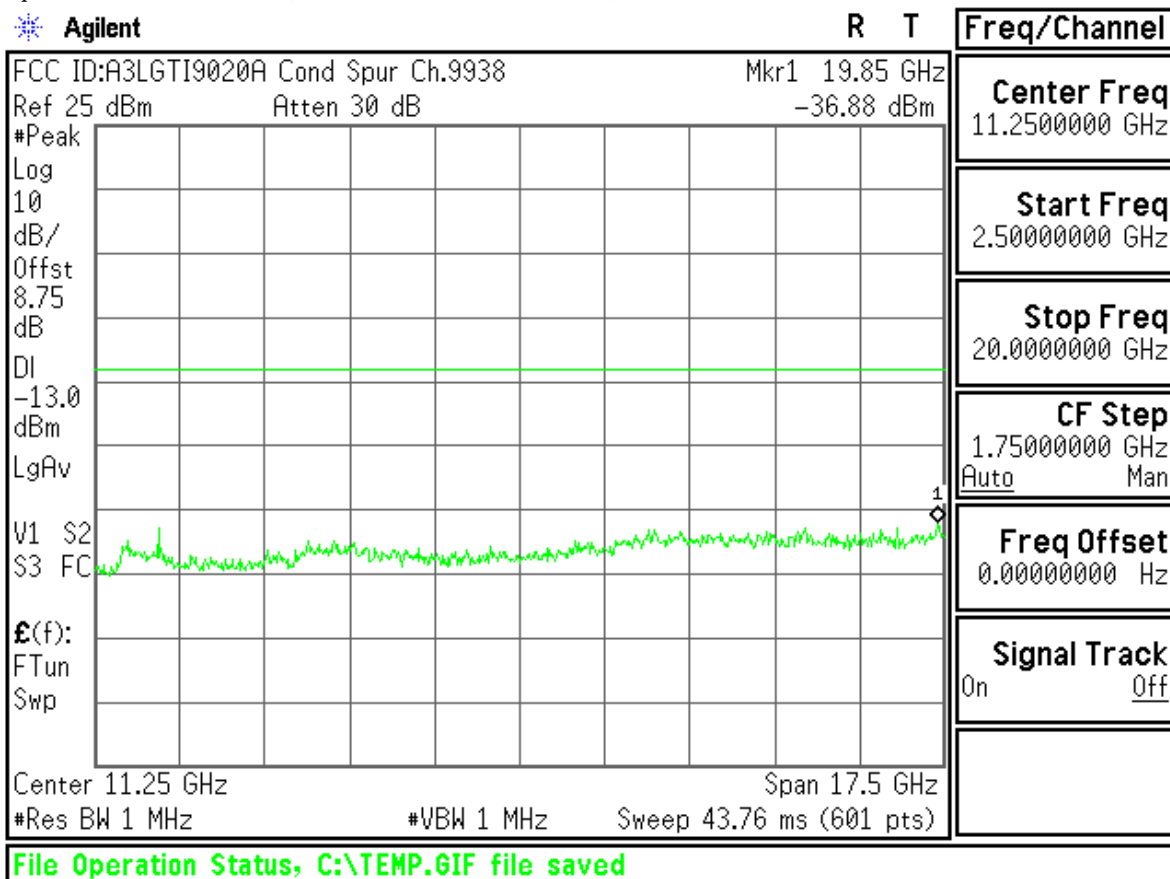


Uplink Channel: 9262 (DownLink Channel: 9662)

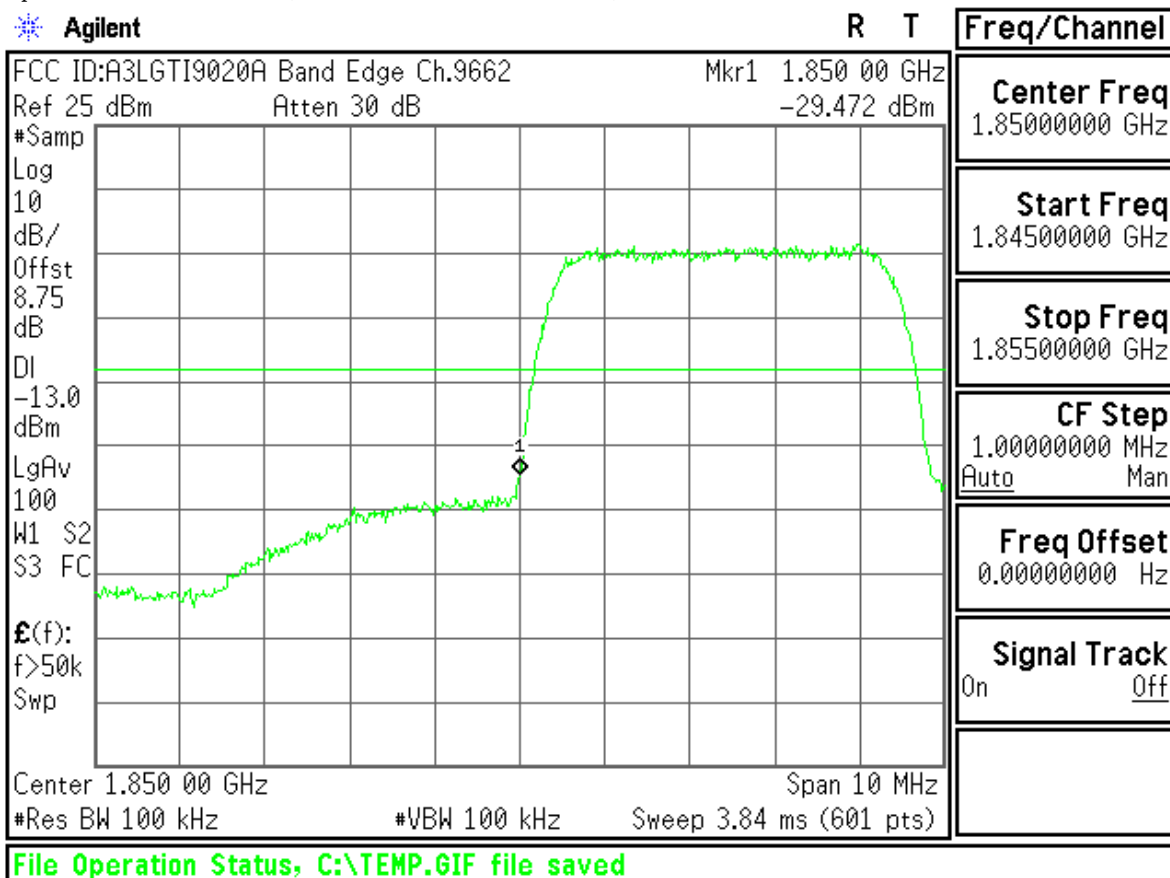


Uplink Channel: 9538 (DownLink Channel: 9938)

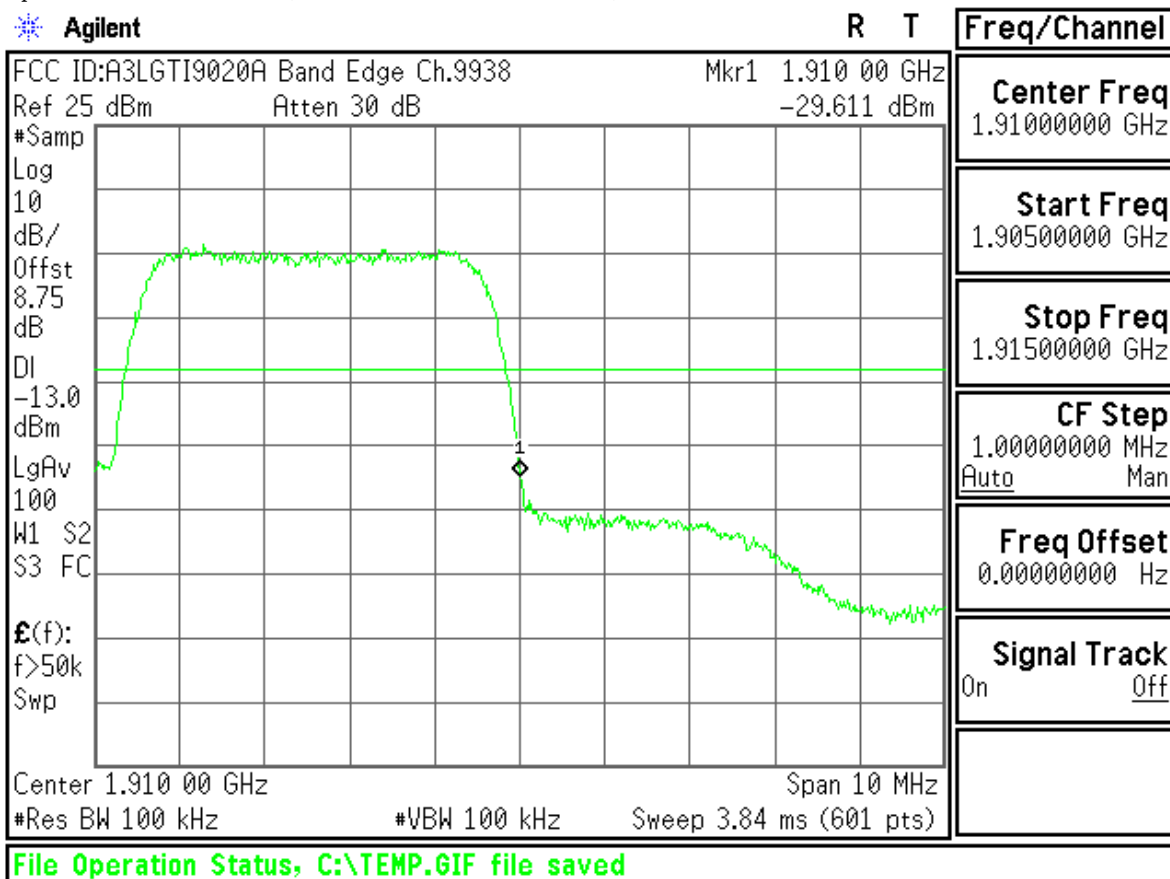

Uplink Channel: 9262 (DownLink Channel: 9662)

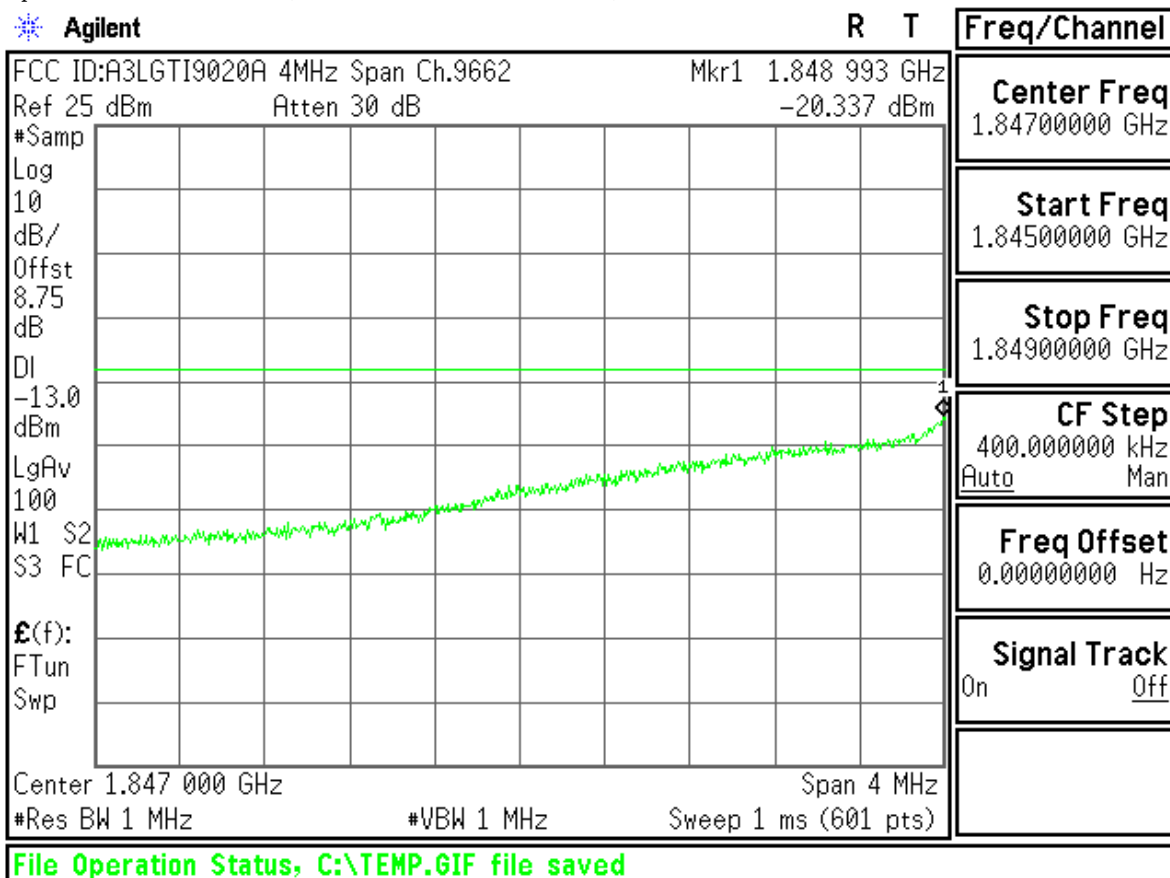


Uplink Channel: 9538 (DownLink Channel: 9938)

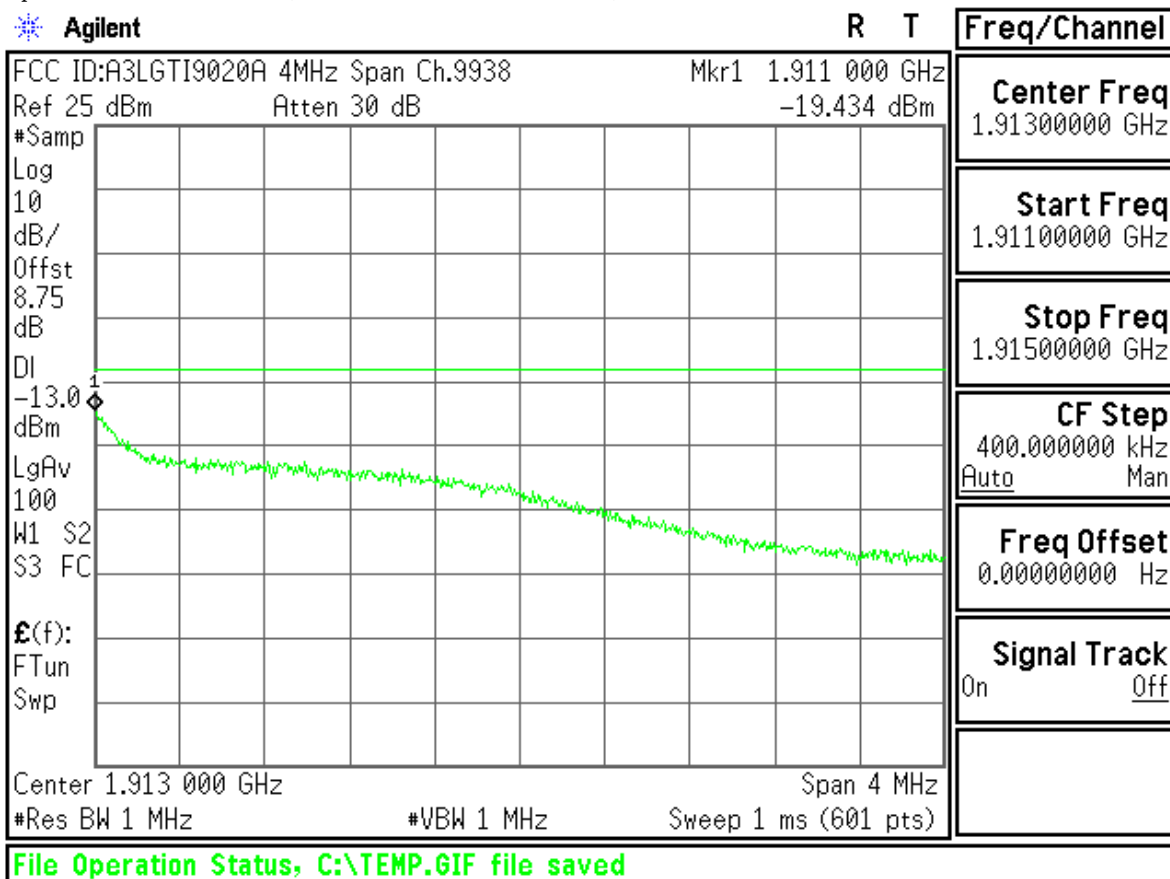

Uplink Channel: 9400 (DownLink Channel: 9800)

 Agilent

R L
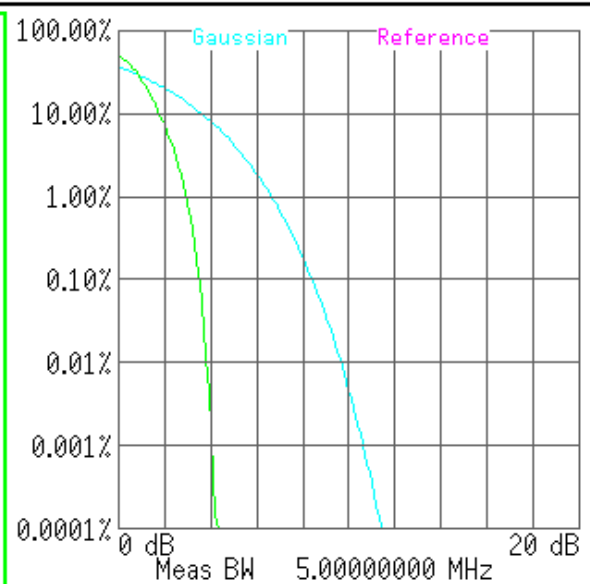
<b>Mobile</b> <b>Ch Freq</b> 1.88 GHz <b>Trig</b> Free		<b>Freq/Channel</b> <b>Center Freq</b> 1.88000000 GHz														
CCDF <b>3GPP W-CDMA</b> Counts(k): 10000		<b>Start Freq</b> 1.88000000 GHz														
<div style="border: 2px solid green; padding: 5px;"> <p><b>Average Power</b> 22.51 dBm</p> <p><b>51.90%</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 15%;">10.0%</td><td style="width: 15%;">1.77 dB</td></tr> <tr><td>1.0%</td><td>2.93 dB</td></tr> <tr><td>0.1%</td><td>3.49 dB</td></tr> <tr><td>0.01%</td><td>3.82 dB</td></tr> <tr><td>0.001%</td><td>4.04 dB</td></tr> <tr><td>0.0001%</td><td>4.23 dB</td></tr> <tr><td>Peak</td><td>4.33 dB</td></tr> </table> </div>		10.0%	1.77 dB	1.0%	2.93 dB	0.1%	3.49 dB	0.01%	3.82 dB	0.001%	4.04 dB	0.0001%	4.23 dB	Peak	4.33 dB	<b>Stop Freq</b> 1.88000000 GHz
10.0%	1.77 dB															
1.0%	2.93 dB															
0.1%	3.49 dB															
0.01%	3.82 dB															
0.001%	4.04 dB															
0.0001%	4.23 dB															
Peak	4.33 dB															
		<b>CF Step</b> 5.00000000 MHz Auto    Man														
<p>Meas BW 5.00000000 MHz</p>		<b>Freq Offset</b> 0.00000000 Hz														
<p>Copyright 2000-2005 Agilent Technologies</p>		<b>Signal Track</b> On <u>Off</u>														