



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC PART 15.247 WLAN 802.11a/ac/b/g/n

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro, Yeongtong-gu
Suwon-city, Gyeonggi-do, 443-803
Republic of Korea

Date of Testing:
03/20/13 - 04/09/13
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1303210521.A3L

| | |
|-------------------|--------------------------------------|
| FCC ID: | A3LGTI9200 |
| APPLICANT: | Samsung Electronics Co., Ltd. |

Application Type: Certification
Model(s): GT-I9200
EUT Type: Portable Handset
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15.247
Test Procedure(s): ANSI C63.10-2009, KDB 558074 v02

| Mode | Tx Frequency (MHz) | Avg Conducted | | Peak Conducted | |
|-----------------|--------------------|-----------------|------------------|-----------------|------------------|
| | | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 802.11b | 2412 - 2462 | 56.364 | 17.51 | 100.231 | 20.01 |
| 802.11g | 2412 - 2462 | 33.651 | 15.27 | 128.529 | 21.09 |
| 802.11n | 2412 - 2462 | 32.285 | 15.09 | 132.130 | 21.21 |
| 802.11a | 5745 - 5825 | 42.756 | 16.31 | 172.982 | 22.38 |
| 802.11n (20MHz) | 5745 - 5825 | 43.152 | 16.35 | 194.089 | 22.88 |
| 802.11n (40MHz) | 5755 - 5795 | 39.174 | 15.93 | 172.187 | 22.36 |
| 802.11n (80MHz) | 5775 | 24.774 | 13.94 | 116.681 | 20.67 |

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2009 and KDB 558074. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




| | | | | |
|---|---|---|--------------|--|
| FCC ID: A3LGTI9200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 1 of 66 | |

TABLE OF CONTENTS

| | | |
|--|--|----|
| FCC PART 15.247 MEASUREMENT REPORT..... | | 3 |
| 1.0 INTRODUCTION..... | | 4 |
| 1.1 SCOPE..... | | 4 |
| 1.2 PCTEST TEST LOCATION..... | | 4 |
| 2.0 PRODUCT INFORMATION..... | | 5 |
| 2.1 EQUIPMENT DESCRIPTION..... | | 5 |
| 2.2 DEVICE CAPABILITIES..... | | 5 |
| 2.3 TEST CONFIGURATION..... | | 5 |
| 2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS..... | | 5 |
| 2.5 LABELING REQUIREMENTS..... | | 5 |
| 3.0 DESCRIPTION OF TEST..... | | 6 |
| 3.1 EVALUATION PROCEDURE..... | | 6 |
| 3.2 AC LINE CONDUCTED EMISSIONS..... | | 6 |
| 3.3 RADIATED EMISSIONS..... | | 7 |
| 4.0 ANTENNA REQUIREMENTS..... | | 8 |
| 5.0 TEST EQUIPMENT CALIBRATION DATA..... | | 9 |
| 6.0 TEST RESULTS..... | | 10 |
| 6.1 SUMMARY..... | | 10 |
| 6.2 6DB BANDWIDTH MEASUREMENT – 802.11A/AC/B/G/N..... | | 11 |
| 6.3 OUTPUT POWER MEASUREMENT – 802.11B/G/N (2.4GHZ)..... | | 22 |
| 6.4 OUTPUT POWER MEASUREMENT – 802.11A/N (5GHZ)..... | | 24 |
| 6.5 POWER SPECTRAL DENSITY (802.11A/AC/B/G/N)..... | | 25 |
| 6.6 CONDUCTED EMISSIONS AT THE BAND EDGE..... | | 36 |
| 6.7 CONDUCTED SPURIOUS EMISSIONS..... | | 44 |
| 6.8 RADIATED SPURIOUS EMISSION MEASUREMENTS..... | | 52 |
| 6.9 RADIATED RESTRICTED BAND EDGE MEASUREMENTS..... | | 58 |
| 6.10 LINE-CONDUCTED TEST DATA..... | | 62 |
| 7.0 CONCLUSION..... | | 66 |

| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 2 of 66 |



MEASUREMENT REPORT

FCC Part 15.247



§ 2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.

APPLICANT ADDRESS: 129, Samsung-ro, Yeongtong-gu
Suwon-city, Gyeonggi-do, 443-803, Republic of Korea

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.247

IC SPECIFICATION(S): RSS-210 Issue 8

MODEL NAME: GT-I9200

FCC ID: A3LGTI9200

Test Device Serial No.: R31D30VE9JH, Production Pre-Production Engineering
R31D30VENNE


FCC CLASSIFICATION: Digital Transmission System (DTS)

DATE(S) OF TEST: 03/20/13 - 04/09/13



TEST REPORT S/N: 0Y1303210521.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGTI9200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 3 of 66 | |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'tl (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

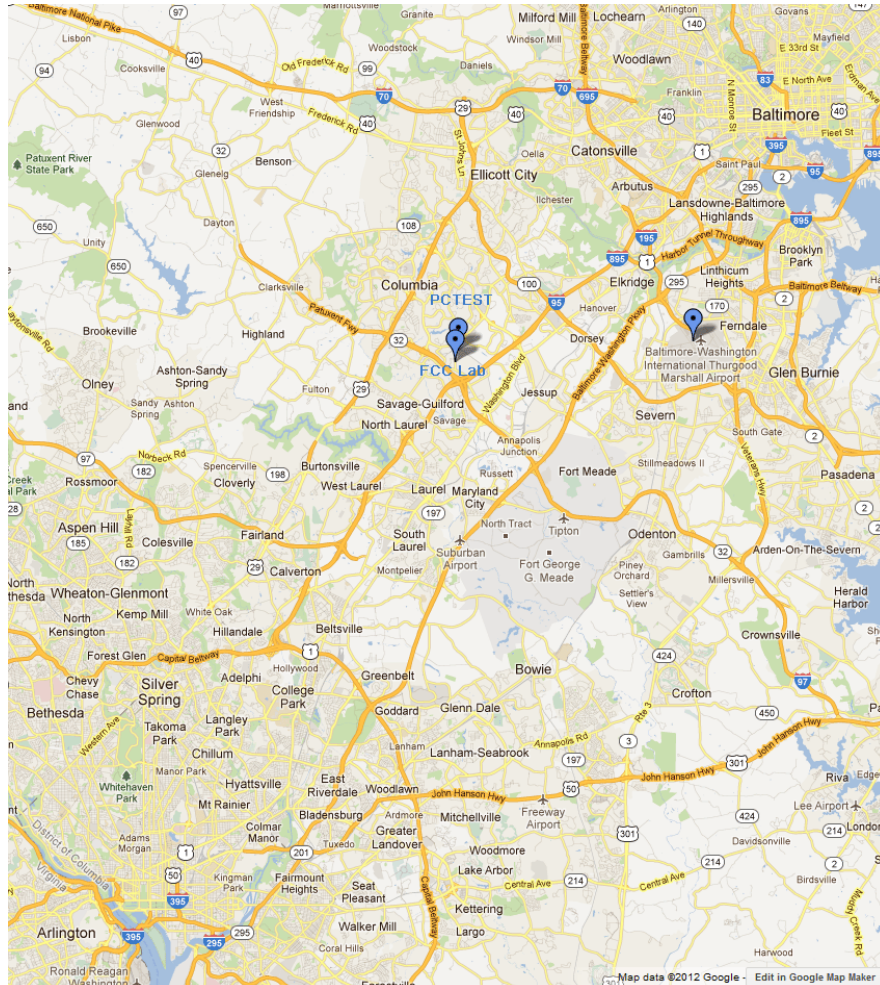




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 4 of 66 | |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LGTI9200**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x, EDR, LE), NFC

Note: 5GHz WLAN (DTS/NII) operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles are as follows:

- 20MHz Bandwidth – 99.1%
- 40MHz Bandwidth – 98.8%
- 80MHz Bandwidth – 98.4%

2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LGTI9200 was tested per the guidance of ANSI C63.10-2009 and KDB 558074. See Sections 3.2, 3.3, and 6.1 of this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups, respectively.

2.4 EMI Suppression Device(s)/Modifications



No EMI suppression device(s) were added and/or no modifications were made during testing.

2.5 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGTI9200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 5 of 66 |

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009), and the guidance provided in KDB 558074 were used in the measurement of the **Samsung Portable Handset FCC ID: A3LGTI9200**.

Deviation from measurement procedure.....None



3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 0. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 8.51.0.



| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGTI9200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 6 of 66 |

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by varying: the mode of operation or resolution, clock or data rate, scrolling H pattern to the EUT and/or support equipment, and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 7 of 66 | |

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:



The **Samsung Portable Handset FCC ID: A3LGTI9200** unit complies with the requirement of §15.203.

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1 | 2412 | 7 | 2442 |
| 2 | 2417 | 8 | 2447 |
| 3 | 2422 | 9 | 2452 |
| 4 | 2427 | 10 | 2457 |
| 5 | 2432 | 11 | 2462 |
| 6 | 2437 | | |

| Ch. | BW (MHz) | Frequency (MHz) |
|-----|----------|-----------------|
| 149 | 20 | 5745 |
| 151 | 20 / 40 | 5755 |
| 153 | 20 | 5765 |
| 155 | 20 | 5775 |
| 157 | 20 | 5785 |

| Ch. | BW (MHz) | Frequency (MHz) |
|-----|----------|-----------------|
| 159 | 20 / 40 | 5795 |
| 161 | 20 | 5805 |
| 163 | 20 | 5815 |
| 165 | 20 | 5825 |
| | | |

Table 4-1. Frequency/ Channel Operations



| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGTI9200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 8 of 66 |

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-------------------|------------------|--|------------|--------------|------------|---------------|
| - | RE1 | Radiated Emissions Cable Set (UHF/EHF) | 7/10/2012 | Annual | 7/10/2013 | N/A |
| - | WL25-1 | Conducted Cable Set (25GHz) | 1/16/2013 | Annual | 1/16/2014 | N/A |
| - | 40G-1R | 40GHz Radiated Cable Set | 2/22/2013 | Annual | 2/22/2014 | N/A |
| - | WL40-1 | Conducted Cable Set (40GHz) | 1/17/2013 | Annual | 1/17/2014 | N/A |
| Agilent | N9030A | PXA Signal Analyzer (44GHz) | 1/11/2013 | Annual | 1/11/2014 | MY52350166 |
| Anritsu | MA2411B | Pulse Sensor | 9/19/2012 | Annual | 9/19/2013 | 1027293 |
| Anritsu | ML2495A | Power Meter | 10/11/2012 | Annual | 10/11/2013 | 1039008 |
| ETS Lindgren | 3117 | 1-18 GHz DRG Horn (Medium) | 7/22/2011 | Biennial | 7/22/2013 | 125518 |
| ETS Lindgren | 3160-09 | 18-26.5 GHz Standard Gain Horn | 5/30/2012 | Biennial | 5/30/2014 | 135427 |
| ETS Lindgren | 3160-10 | 26.5-40 GHz Standard Gain Horn | 6/6/2012 | Biennial | 6/6/2014 | 130993 |
| Mini-Circuits | VHF-3100+ | High Pass Filter | 1/17/2013 | Annual | 1/17/2014 | 30841 |
| Mini-Circuits | VHF-8400+ | 3.4GHz - 9.9GHz High Pass Filter | 1/17/2013 | Annual | 1/17/2014 | 31048 |
| Rohde & Schwarz | TS-PR18 | 1-18 GHz Pre-Amplifier | 6/26/2012 | Annual | 6/26/2013 | 100071 |
| Rohde & Schwarz | TS-PR26 | 18-26.5 GHz Pre-Amplifier | 5/30/2012 | Annual | 5/30/2013 | 100040 |
| Rohde & Schwarz | TS-PR40 | 26.5-40 GHz Pre-Amplifier | 6/6/2012 | Annual | 6/6/2013 | 100037 |
| Rohde & Schwarz | ESU26 | EMI Test Receiver | 2/25/2013 | Annual | 2/25/2014 | 100342 |
| Solar Electronics | 8012-50-R-24-BNC | LISN | 6/23/2011 | Biennial | 6/23/2013 | 310233 |
| Sunol | JB5 | Bi-Log Antenna (30M - 5GHz) | 1/26/2012 | Biennial | 1/26/2014 | A051107 |

Table 5-1. Annual Test Equipment Calibration Schedule

| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 9 of 66 |

6.0 TEST RESULTS

6.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LGTI9200
 FCC Classification: Digital Transmission System (DTS)
 Data Rate(s) Tested: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (a/g)
6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n – 20MHz)
13.5/15Mbps, 27/30Mbps, 40.5/45Mbps, 54/60Mbps, 81/90Mbps, 108/120Mbps,
121.5/135Mbps, 135/150Mbps (n – 40MHz)
351/390Mbps, 390/433.3Mbps (ac – 80MHz)

| FCC Part Section(s) | RSS Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|------------------------------|-----------------|---|--|----------------|-------------|-------------------|
| TRANSMITTER MODE (TX) | | | | | | |
| 15.247(a)(2) | RSS-210 [A8.2] | 6dB Bandwidth | > 500kHz | CONDUCTED | PASS | Section 6.2 |
| 15.247(b)(3) | RSS-210 [A8.4] | Transmitter Output Power | < 1 Watt | | PASS | Sections 6.3, 6.4 |
| 15.247(e) | RSS-210 [A8.2] | Transmitter Power Spectral Density | < 8dBm / 3kHz Band | | PASS | Section 6.5 |
| 15.247(d) | RSS-210 [A8.5] | Band Edge / Out-of-Band Emissions | Conducted ≥ 20dBc | | PASS | Sections 0, 6.7 |
| 15.205 15.209 | RSS-210 [A8.5] | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | RADIATED | PASS | Sections 6.8, 6.9 |
| 15.207 | RSS-Gen [7.2.2] | AC Conducted Emissions 150kHz – 30MHz | < FCC 15.207 limits | LINE CONDUCTED | PASS | Section 0 |

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “WLAN Automation”, Version 1.7.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LGTI9200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 10 of 66 | |

6.2 6dB Bandwidth Measurement – 802.11a/ac/b/g/n §15.247(a)(2); RSS-210 [A8.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

KDB 558074 v02 – Section 7.2 Option 2

Test Settings

1. RBW = 100kHz
2. VBW = 1MHz
3. Detector = Peak
4. Trace mode = max hold
5. Sweep = auto couple
6. The trace was allowed to stabilize
7. The automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The “X” dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-1. Test Instrument & Measurement Setup



Test Notes


None

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 11 of 66 | |


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] | Pass / Fail |
|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|-------------|
| 2412 | 1 | b | 1 | 9.067 | 0.500 | Pass |
| 2437 | 6 | b | 1 | 8.569 | 0.500 | Pass |
| 2462 | 11 | b | 1 | 8.581 | 0.500 | Pass |
| 2412 | 1 | g | 6 | 16.38 | 0.500 | Pass |
| 2437 | 6 | g | 6 | 16.37 | 0.500 | Pass |
| 2462 | 11 | g | 6 | 16.37 | 0.500 | Pass |
| 2412 | 1 | n | 6.5/7.2 (MCS0) | 17.60 | 0.500 | Pass |
| 2437 | 6 | n | 6.5/7.2 (MCS0) | 17.61 | 0.500 | Pass |
| 2462 | 11 | n | 6.5/7.2 (MCS0) | 17.36 | 0.500 | Pass |
| 5745 | 149 | a | 6 | 16.40 | 0.500 | Pass |
| 5785 | 157 | a | 6 | 16.40 | 0.500 | Pass |
| 5825 | 165 | a | 6 | 16.40 | 0.500 | Pass |
| 5745 | 149 | n (20MHz) | 6.5/7.2 (MCS0) | 17.61 | 0.500 | Pass |
| 5785 | 157 | n (20MHz) | 6.5/7.2 (MCS0) | 17.62 | 0.500 | Pass |
| 5825 | 165 | n (20MHz) | 6.5/7.2 (MCS0) | 17.64 | 0.500 | Pass |
| 5755 | 151 | n (40MHz) | 13.5/15 (MCS0) | 35.21 | 0.500 | Pass |
| 5795 | 159 | n (40MHz) | 13.5/15 (MCS0) | 35.21 | 0.500 | Pass |
| 5775 | 155 | ac (80MHz) | 351/390 (MCS8) | 75.16 | 0.500 | Pass |

Table 6-2. Conducted Bandwidth Measurements

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LGTI9200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 12 of 66 | |

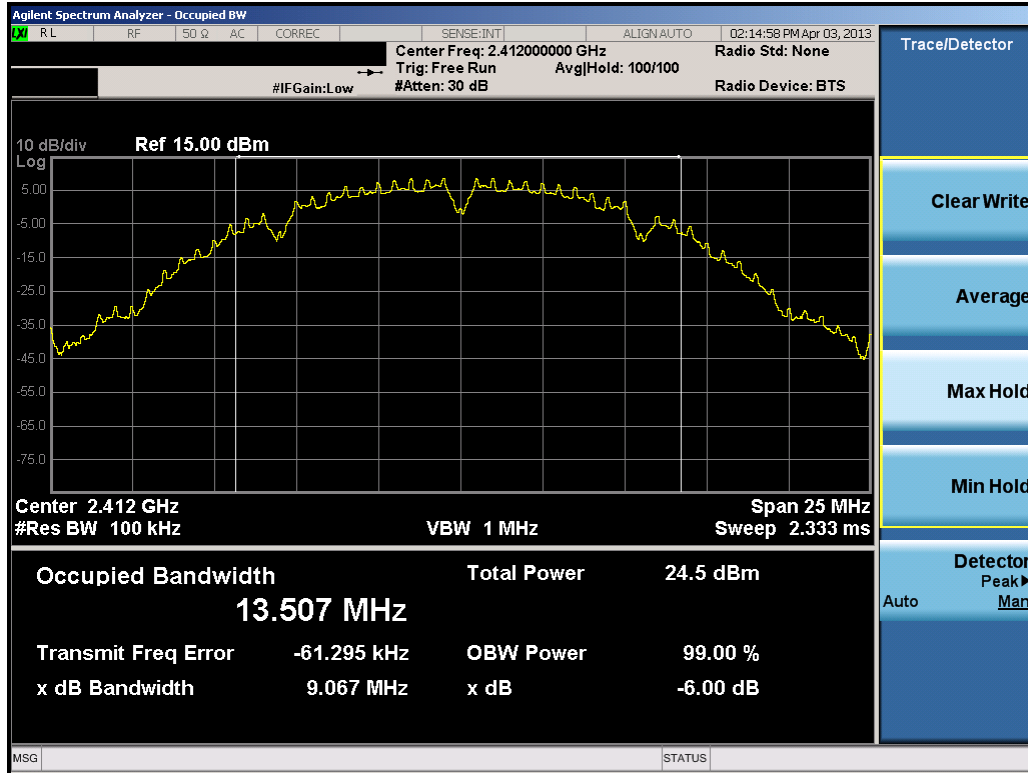


Plot 6-1. 6dB Bandwidth Plot (802.11b – Ch. 1)

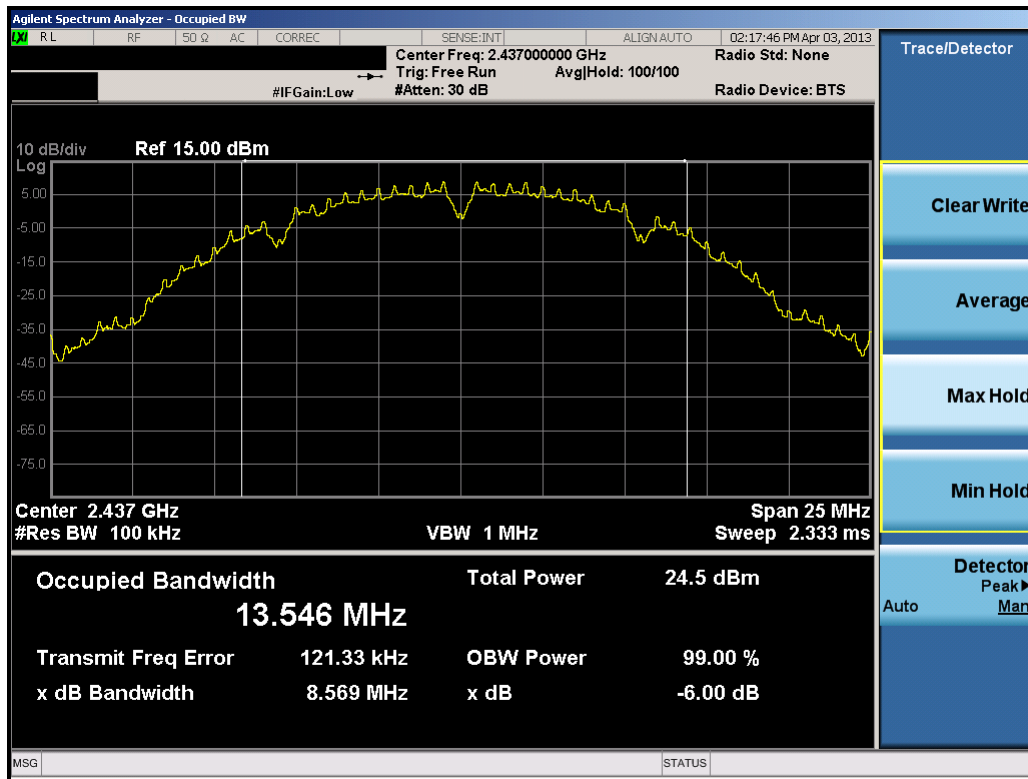


Plot 6-2. 6dB Bandwidth Plot (802.11b – Ch. 6)

| | | | | |
|--------------------------------------|------------------------------------|---|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 13 of 66 |

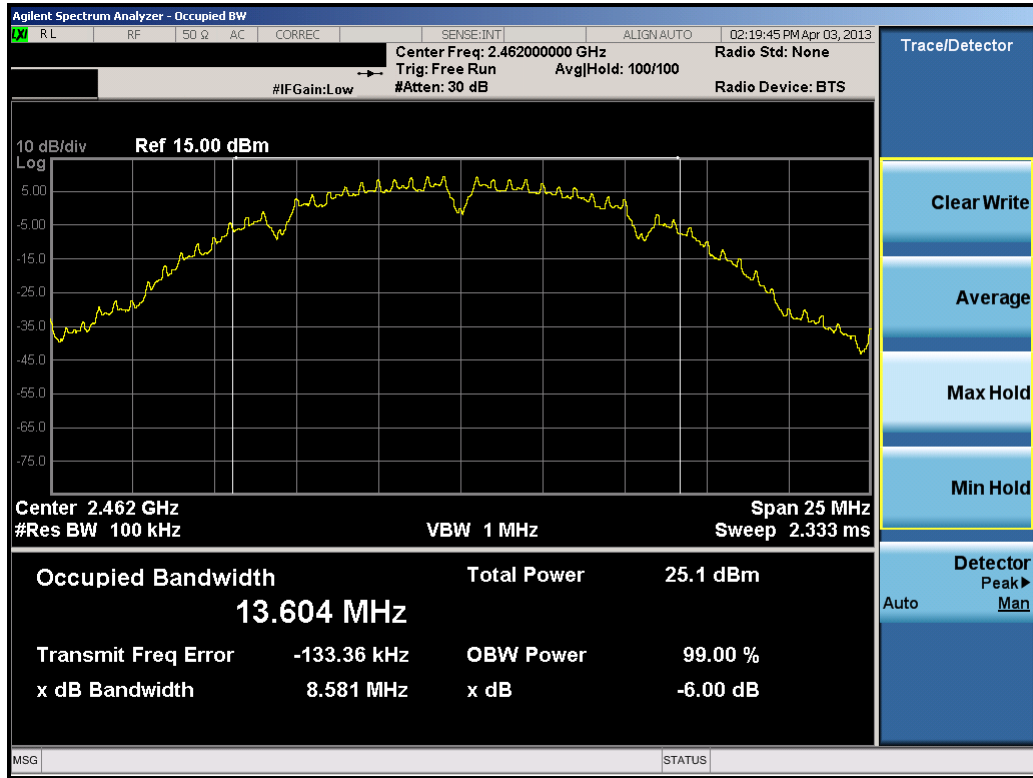


Plot 6-3. 6dB Bandwidth Plot (802.11b – Ch. 11)

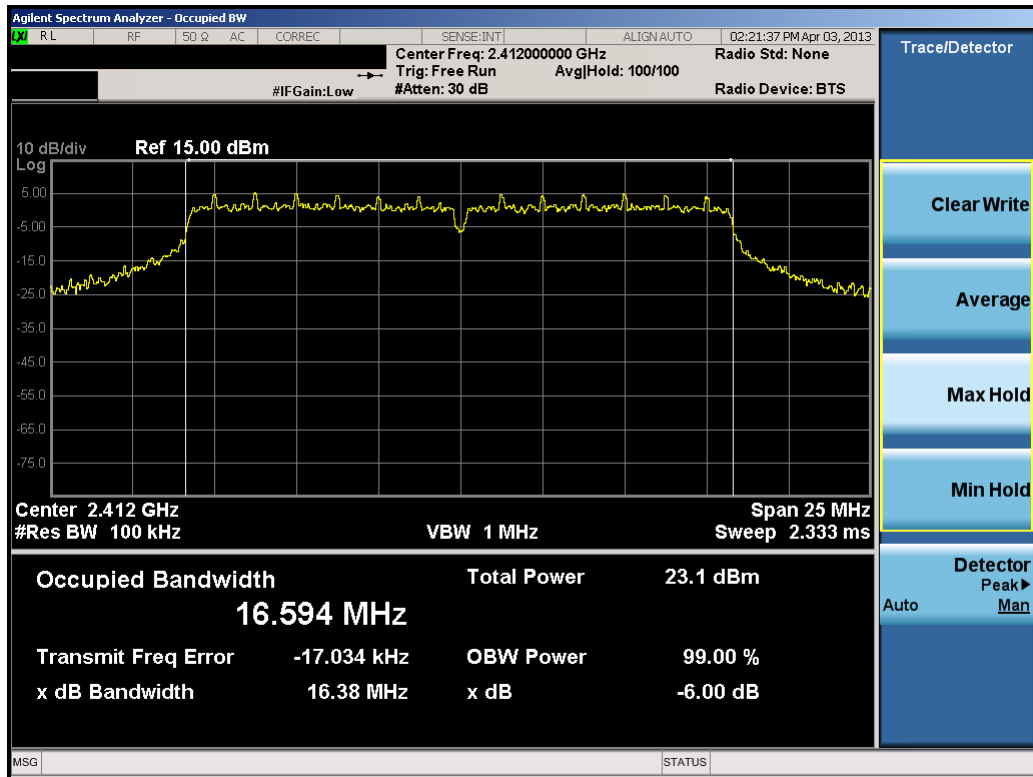


Plot 6-4. 6dB Bandwidth Plot (802.11g – Ch. 1)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT9200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 14 of 66 |

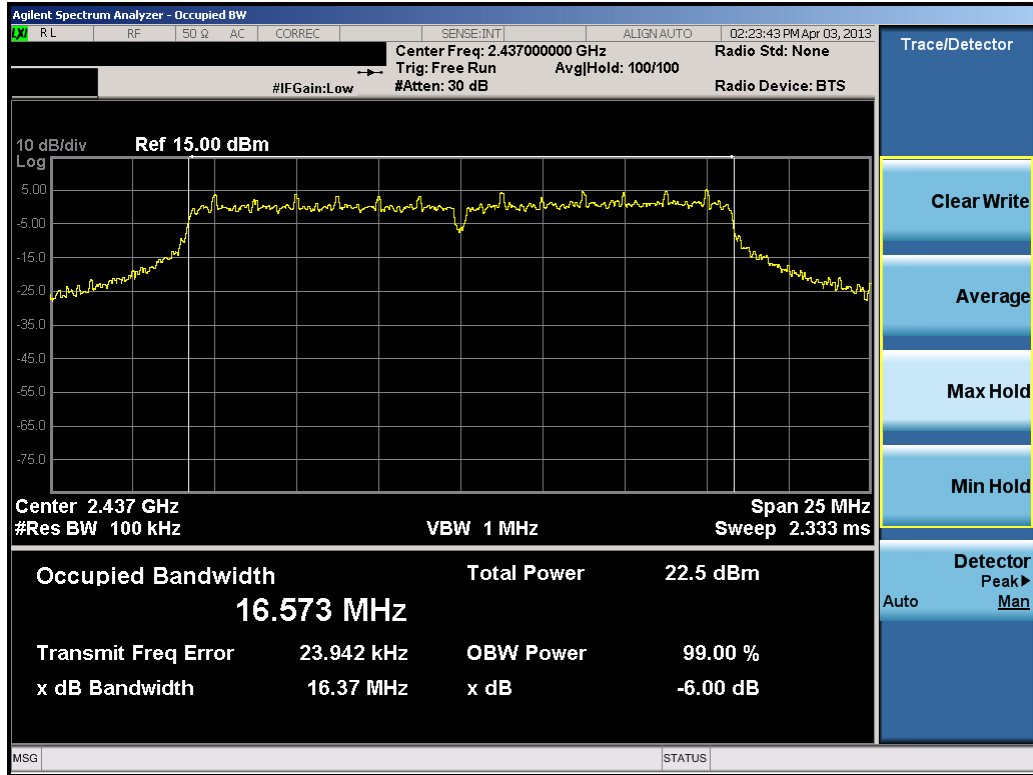


Plot 6-5. 6dB Bandwidth Plot (802.11g – Ch. 6)

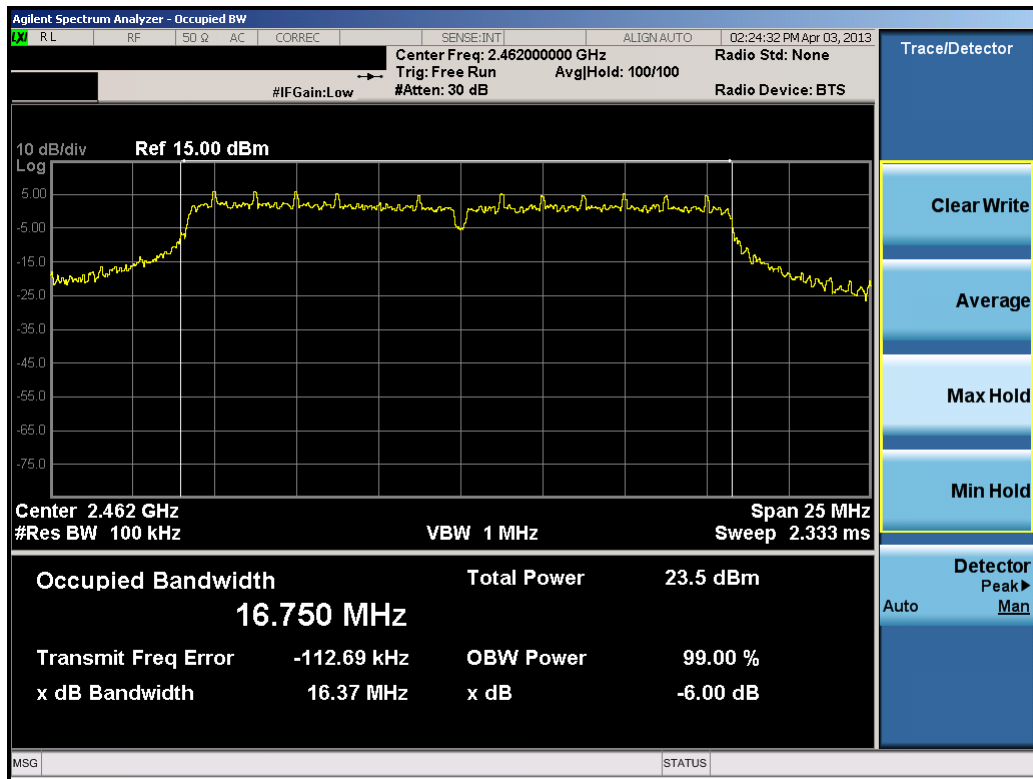


Plot 6-6. 6dB Bandwidth Plot (802.11g – Ch. 11)

| | | | | |
|--------------------------------------|------------------------------------|---|--|---------------------------------|
| FCC ID: A3LGT9200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 15 of 66 |

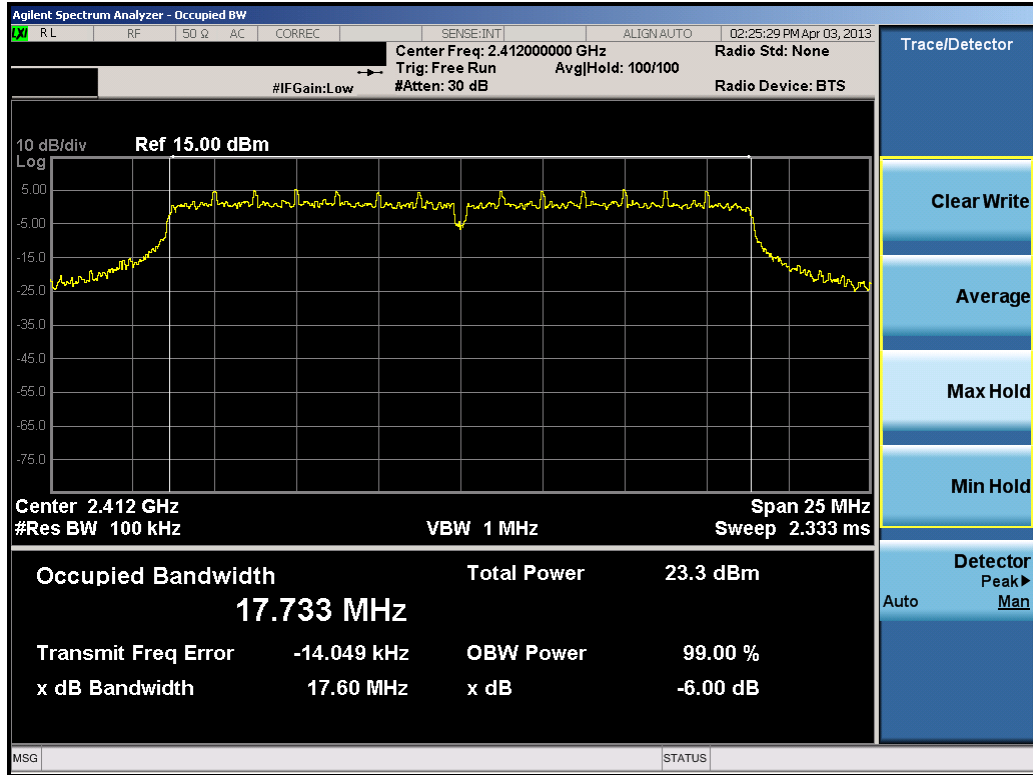


Plot 6-7. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

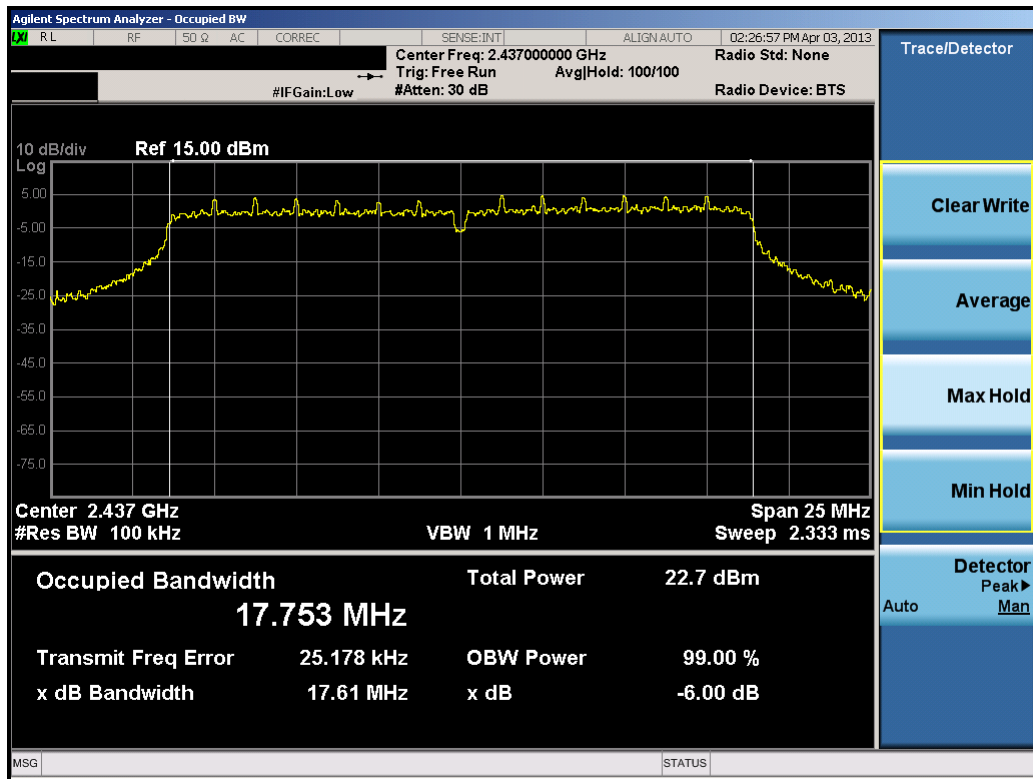


Plot 6-8. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 16 of 66 |

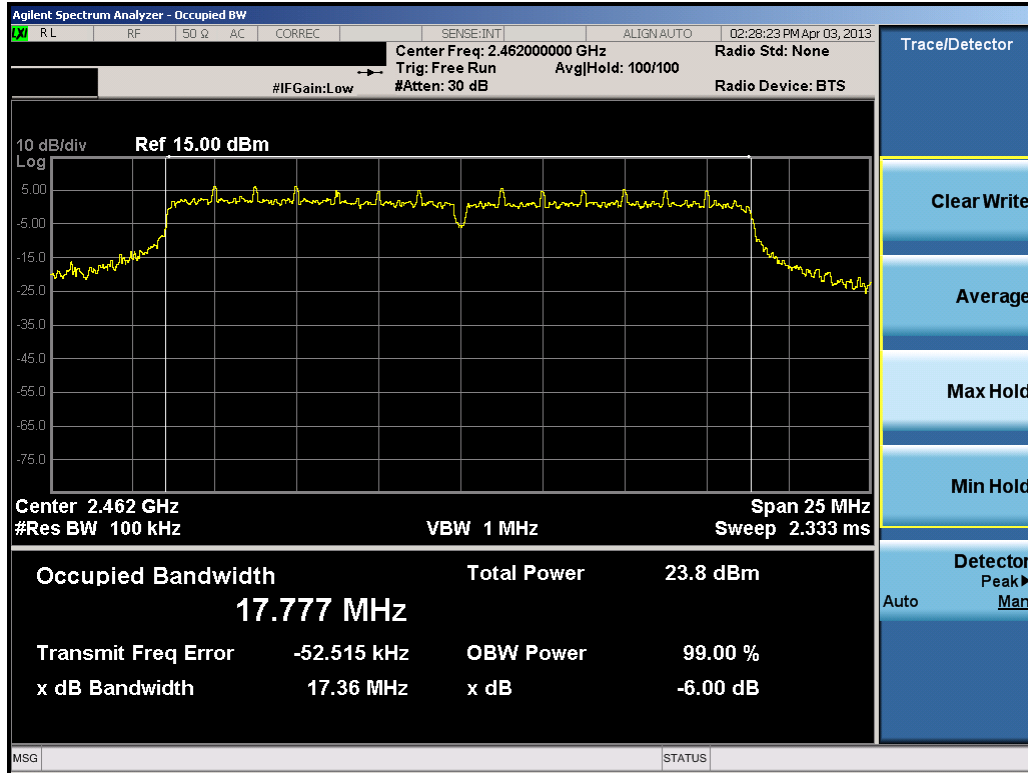


Plot 6-9. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

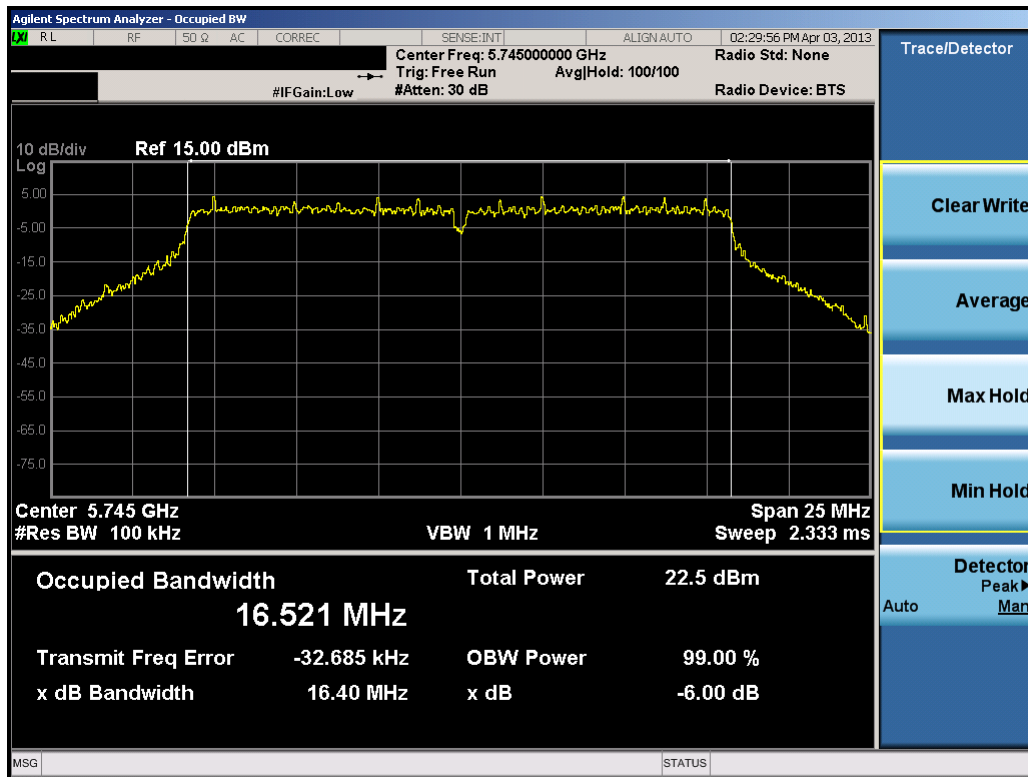


Plot 6-10. 6dB Bandwidth Plot (802.11a – Ch. 149)

| | | | | |
|--------------------------------------|------------------------------------|---|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 17 of 66 |

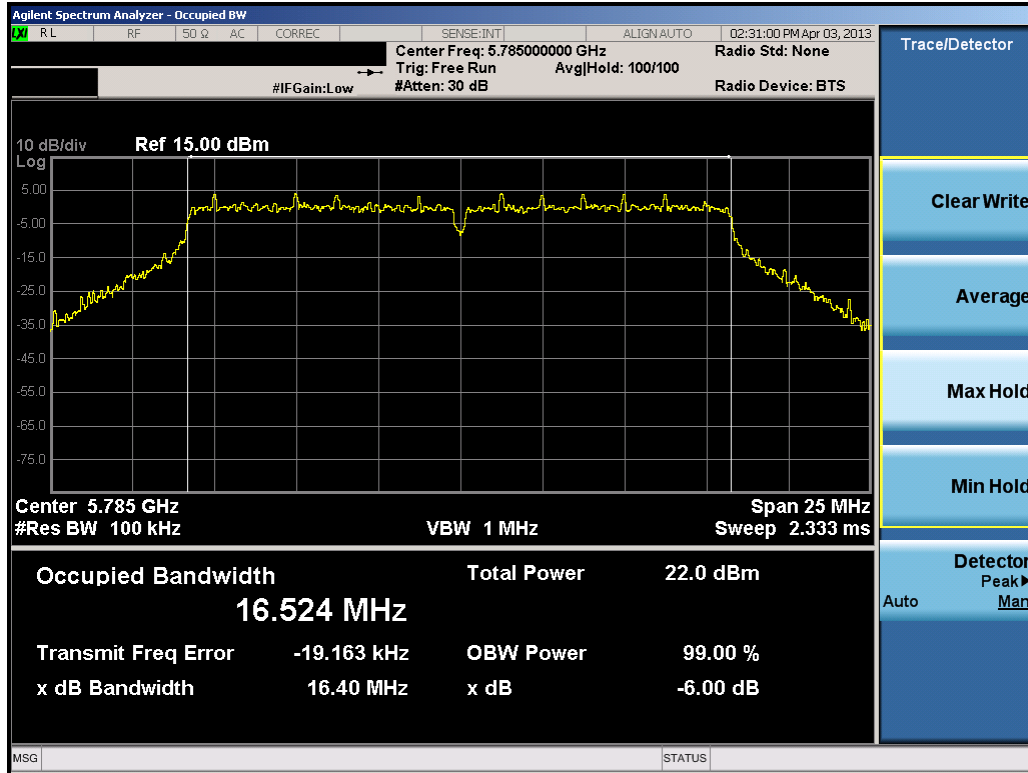


Plot 6-11. 6dB Bandwidth Plot (802.11a – Ch. 157)

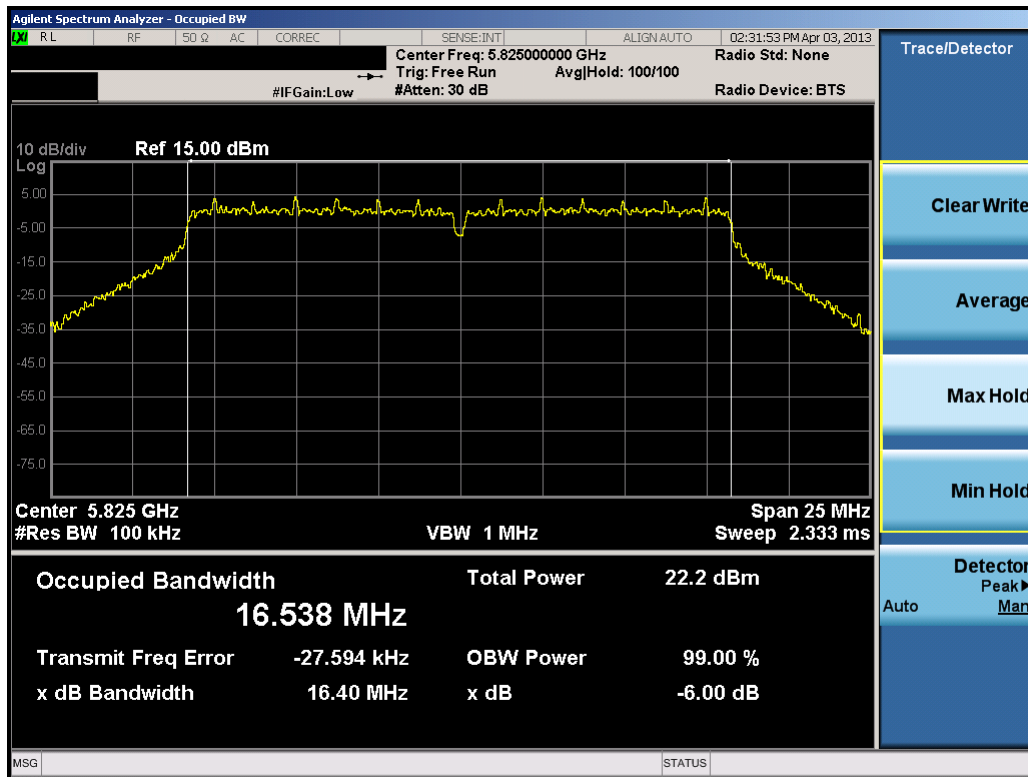


Plot 6-12. 6dB Bandwidth Plot (802.11a – Ch. 165)

| | | | | |
|--------------------------------------|--|---|--|---------------------------------|
| FCC ID: A3LGT19200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 18 of 66 |

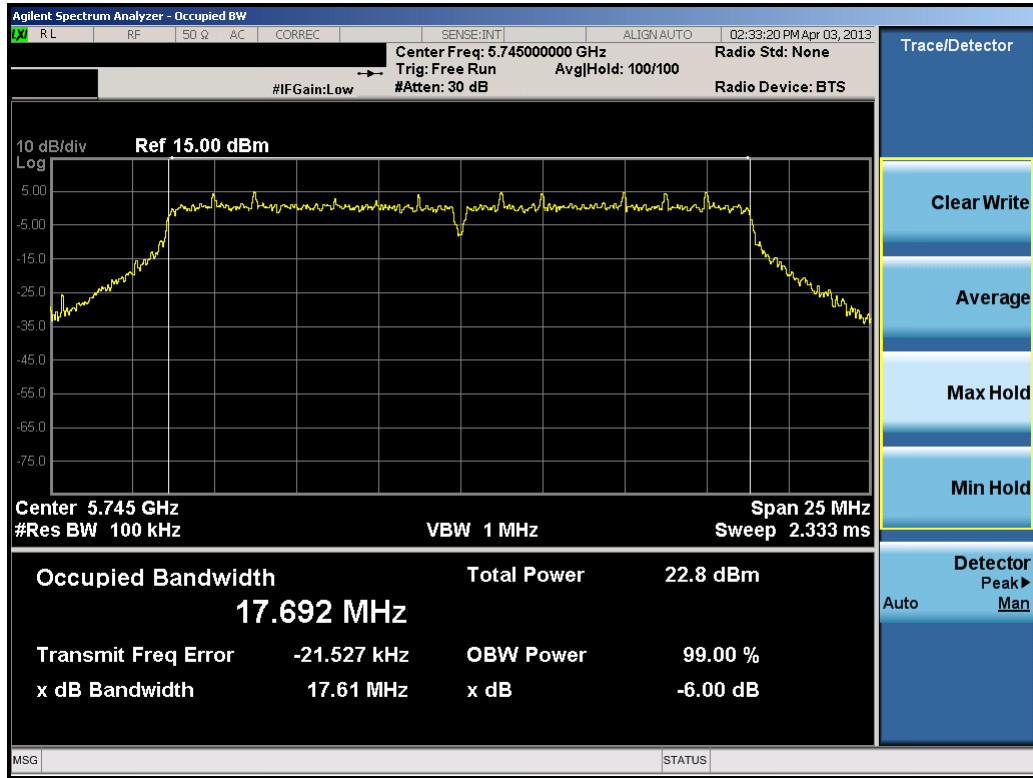


Plot 6-13. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

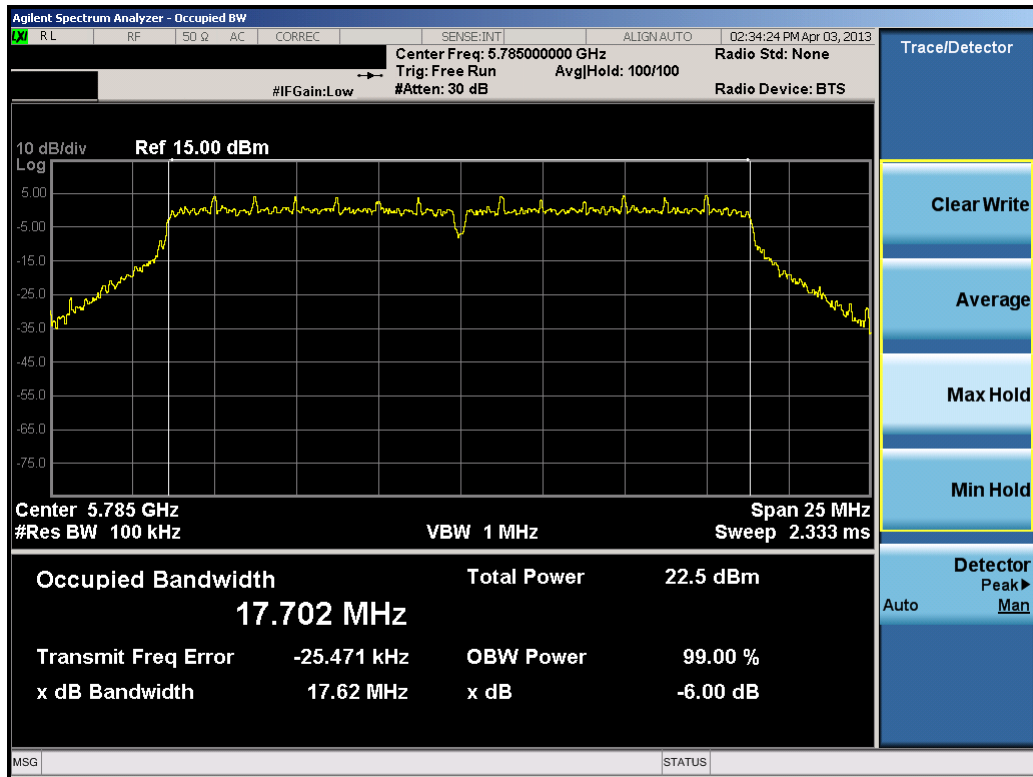


Plot 6-14. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 19 of 66 |

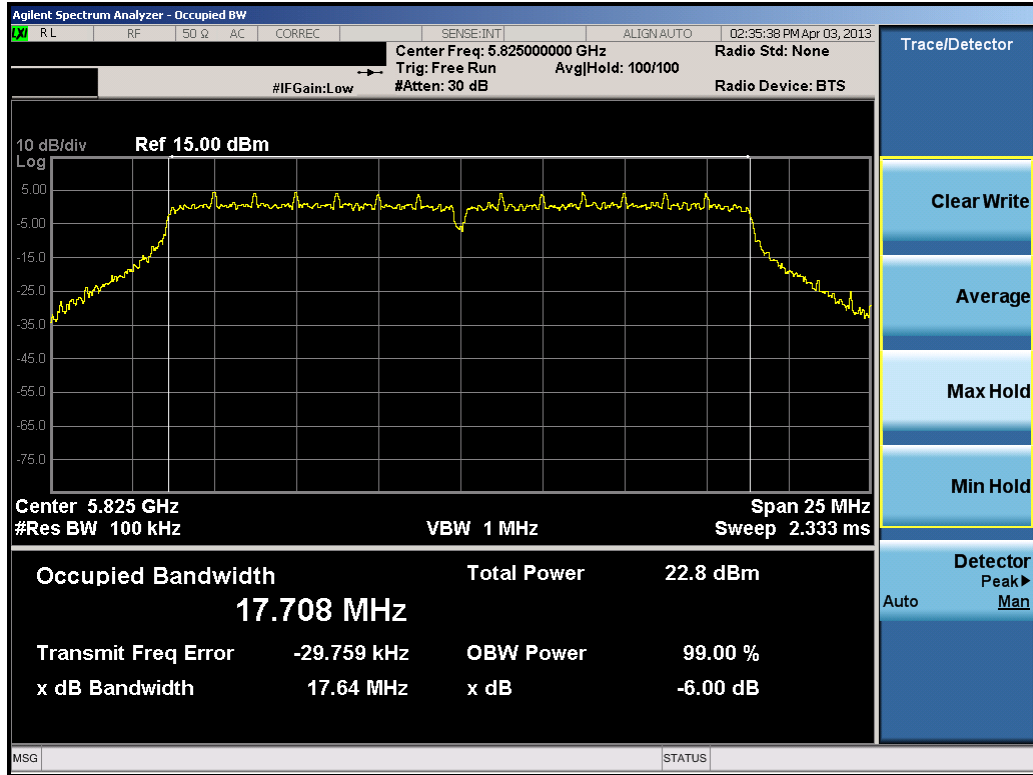


Plot 6-15. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

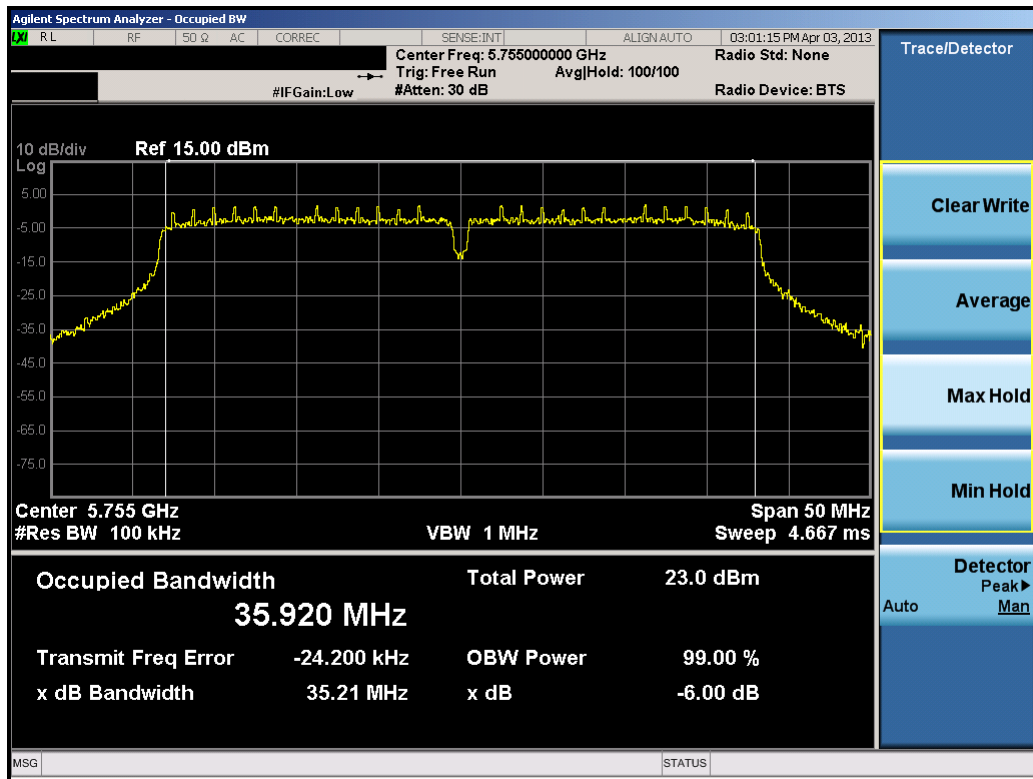


Plot 6-16. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 20 of 66 |

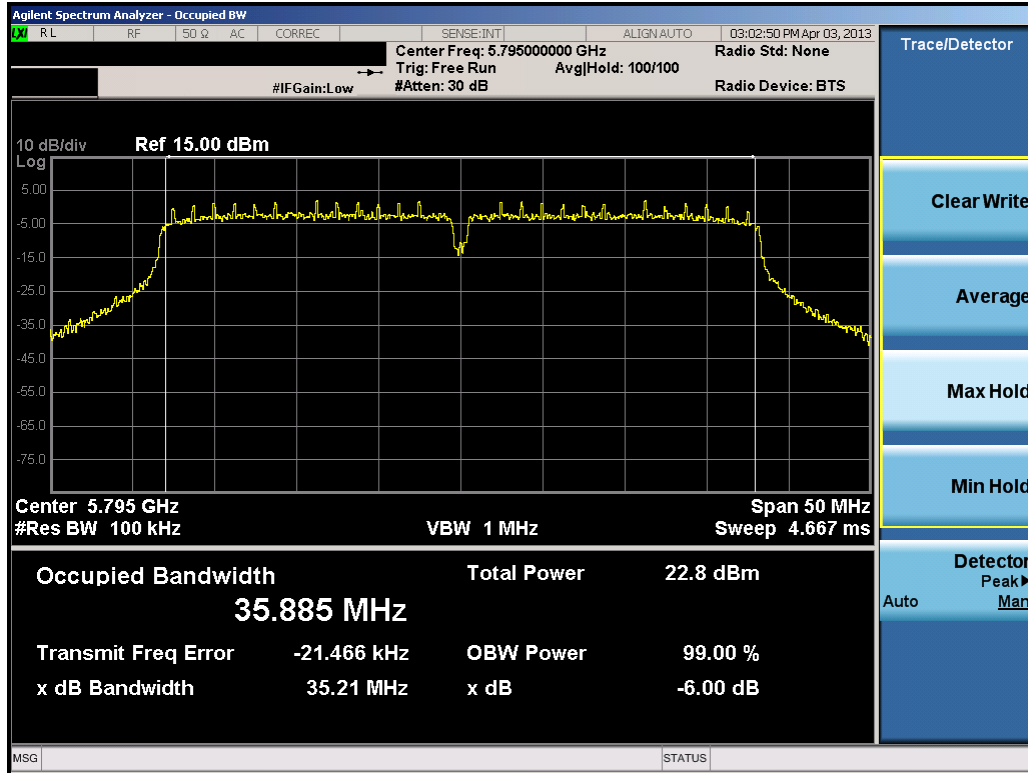

Plot 6-17. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

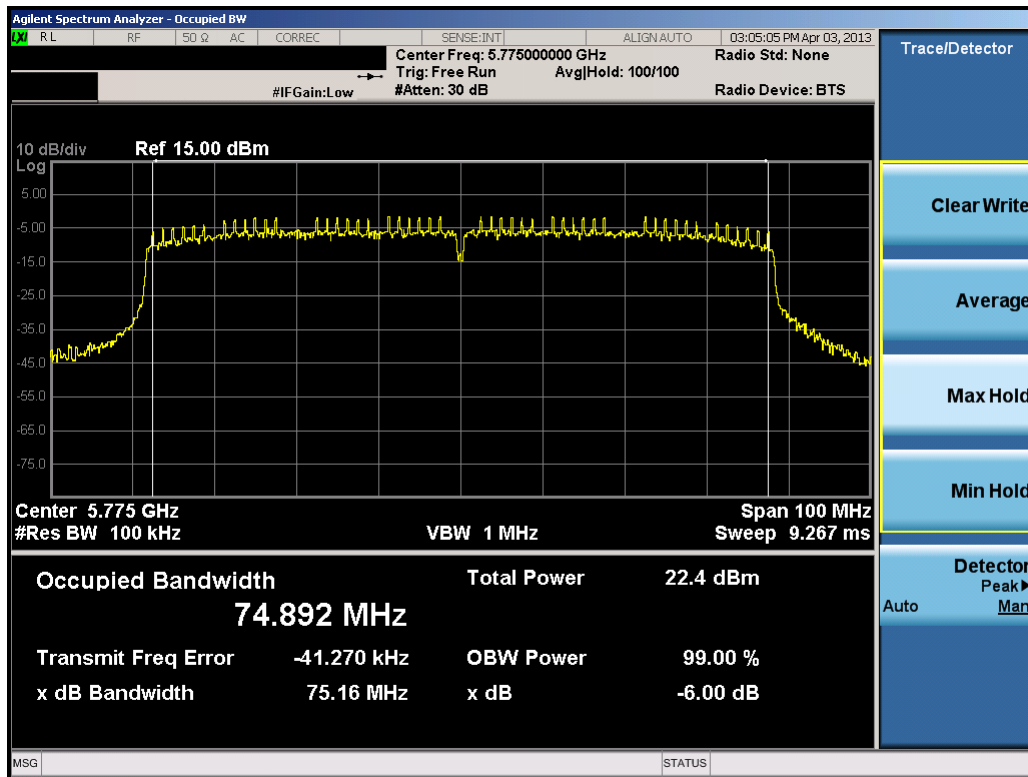

Plot 6-18. 6dB Bandwidth Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 21 of 66 |

6.3 Output Power Measurement – 802.11b/g/n (2.4GHz) §15.247(b)(3); RSS-210 [A8.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

KDB 558074 v02 – Section 8.1.3 Option 3 (peak power measurements)

KDB 558074 v02 – Section 8.2.3 Option 3 (average power measurements)

Test Settings

1. Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter and power sensor with a thermocouple detector. Signal gating was used to ensure measurements were performed at maximum power levels. The trace was averaged over 100 traces to obtain the final measured average power.
2. Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter and power sensor. The power sensor employs a VBW = 50MHz which is greater than the DTS bandwidth.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

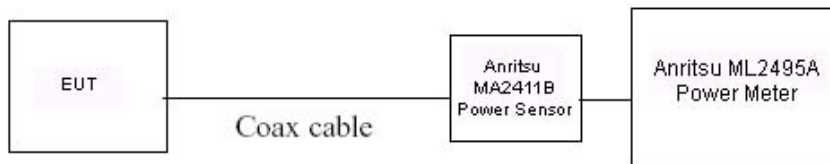




Figure 6-2. Test Instrument & Measurement Setup

Test Notes

Due to video bandwidth limitations of the power sensor, 802.11ac Output Power measurements were verified using a spectrum analyzer (KDB 558074 v02 – Section 8.2.1 Option 1).

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 22 of 66 | |

| Mode | Freq [MHz] | Channel | Detector | 802.11b Conducted Power [dBm] | | | |
|---------|---------------|---------|----------|-------------------------------|-------|-------|-------|
| | | | | Data Rate [Mbps] | | | |
| | | | | 1 | 2 | 5.5 | 11 |
| 802.11b | 2412 | 1 | AVG | 17.28 | 17.25 | 17.27 | 17.29 |
| | | | PEAK | 19.88 | 19.80 | 19.81 | 19.83 |
| 802.11b | 2437 | 6 | AVG | 17.34 | 17.20 | 17.41 | 17.51 |
| | | | PEAK | 19.80 | 19.71 | 19.81 | 20.01 |
| 802.11b | 2462 | 11 | AVG | 17.20 | 17.17 | 17.23 | 17.26 |
| | | | PEAK | 19.74 | 19.75 | 19.81 | 19.86 |



Table 6-3. 802.11b Conducted Output Power Measurements

| Mode | Freq [MHz] | Channel | Detector | 802.11g Conducted Power [dBm] | | | | | | | |
|---------|---------------|---------|----------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | | | Data Rate [Mbps] | | | | | | | |
| | | | | 6 | 9 | 12 | 18 | 24 | 36 | 48 | 54 |
| 802.11g | 2412 | 1 | AVG | 14.47 | 14.64 | 14.70 | 14.39 | 14.64 | 14.49 | 14.43 | 14.45 |
| | | | PEAK | 20.83 | 20.73 | 20.87 | 20.76 | 20.95 | 20.85 | 20.77 | 20.81 |
| 802.11g | 2437 | 6 | AVG | 15.27 | 15.26 | 15.24 | 14.59 | 14.81 | 15.16 | 14.73 | 14.63 |
| | | | PEAK | 20.99 | 20.97 | 21.07 | 20.66 | 20.73 | 21.09 | 20.83 | 20.73 |
| 802.11g | 2462 | 11 | AVG | 14.60 | 14.72 | 14.77 | 14.50 | 14.72 | 14.53 | 14.49 | 14.55 |
| | | | PEAK | 20.88 | 20.83 | 20.90 | 20.71 | 21.00 | 20.83 | 20.87 | 20.89 |

Table 6-4. 802.11g Conducted Output Power Measurements

| Mode | Freq [MHz] | Channel | Detector | 802.11n (2.4GHz) Conducted Power [dBm] | | | | | | | |
|---------|---------------|---------|----------|--|---------|-----------|---------|---------|---------|---------|---------|
| | | | | Data Rate [Mbps] | | | | | | | |
| | | | | 6.5/7.2 | 13/14.4 | 19.5/21.7 | 26/28.9 | 39/43.4 | 52/57.8 | 58.5/65 | 65/72.2 |
| 802.11n | 2412 | 1 | AVG | 14.72 | 14.70 | 14.64 | 14.58 | 14.59 | 14.50 | 14.64 | 14.52 |
| | | | PEAK | 20.89 | 20.93 | 21.02 | 20.99 | 21.14 | 20.76 | 20.88 | 21.00 |
| 802.11n | 2437 | 6 | AVG | 14.78 | 15.09 | 14.92 | 14.69 | 14.99 | 14.58 | 14.66 | 14.63 |
| | | | PEAK | 20.64 | 20.98 | 21.05 | 20.79 | 21.21 | 20.81 | 20.80 | 20.82 |
| 802.11n | 2462 | 11 | AVG | 14.74 | 14.73 | 14.70 | 14.68 | 14.63 | 14.67 | 14.71 | 14.59 |
| | | | PEAK | 20.99 | 21.07 | 20.91 | 20.95 | 21.05 | 20.96 | 21.01 | 21.03 |

Table 6-5. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 23 of 66 | |

6.4 Output Power Measurement – 802.11a/n/ac (5GHz)

§15.247(b)(3); RSS-210 [A8.4]

| Mode | Freq [MHz] | Channel | Detector | 802.11a Conducted Power [dBm] | | | | | | | |
|---------|------------|---------|----------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | | | Data Rate [Mbps] | | | | | | | |
| | | | | 6 | 9 | 12 | 18 | 24 | 36 | 48 | 54 |
| 802.11a | 5745 | 149 | AVG | 16.31 | 16.08 | 16.15 | 16.24 | 16.07 | 16.03 | 16.06 | 16.03 |
| | | | PEAK | 22.36 | 22.23 | 22.29 | 22.36 | 22.25 | 22.27 | 22.38 | 22.32 |
| 802.11a | 5765 | 153 | AVG | 15.71 | 15.74 | 15.70 | 15.69 | 15.66 | 15.66 | 15.44 | 15.67 |
| | | | PEAK | 22.08 | 22.03 | 22.06 | 22.10 | 22.12 | 22.08 | 21.99 | 22.14 |
| 802.11a | 5785 | 157 | AVG | 15.56 | 15.66 | 15.64 | 15.61 | 15.53 | 15.64 | 15.62 | 15.49 |
| | | | PEAK | 22.05 | 22.11 | 22.14 | 22.20 | 22.07 | 22.15 | 22.10 | 22.01 |
| 802.11a | 5805 | 161 | AVG | 16.15 | 16.03 | 16.10 | 16.05 | 16.01 | 15.98 | 16.07 | 16.03 |
| | | | PEAK | 22.37 | 22.10 | 22.21 | 22.30 | 22.12 | 22.20 | 22.16 | 22.24 |
| 802.11a | 5825 | 165 | AVG | 15.70 | 15.71 | 15.75 | 15.72 | 15.63 | 15.56 | 15.62 | 15.65 |
| | | | PEAK | 22.21 | 22.12 | 22.23 | 22.28 | 22.18 | 22.12 | 22.15 | 22.25 |

Table 6-6. 802.11a Conducted Output Power Measurements

| Mode | Freq [MHz] | Channel | Detector | 20MHz BW 802.11n (5GHz) Conducted Power [dBm] | | | | | | | |
|---------|------------|---------|----------|---|---------|-----------|---------|---------|---------|---------|---------|
| | | | | Data Rate [Mbps] | | | | | | | |
| | | | | 6.5/7.2 | 13/14.4 | 19.5/21.7 | 26/28.9 | 39/43.4 | 52/57.8 | 58.5/65 | 65/72.2 |
| 802.11n | 5745 | 149 | AVG | 16.35 | 16.33 | 16.18 | 16.14 | 16.25 | 16.09 | 16.19 | 16.10 |
| | | | PEAK | 22.48 | 22.50 | 22.62 | 22.60 | 22.80 | 22.45 | 22.56 | 22.62 |
| 802.11n | 5765 | 153 | AVG | 15.67 | 15.65 | 15.47 | 15.69 | 15.52 | 15.51 | 15.66 | 15.74 |
| | | | PEAK | 22.19 | 22.25 | 22.25 | 22.38 | 22.33 | 22.39 | 22.42 | 22.49 |
| 802.11n | 5785 | 157 | AVG | 15.74 | 15.70 | 15.66 | 15.47 | 15.56 | 15.70 | 15.56 | 15.52 |
| | | | PEAK | 22.27 | 22.35 | 22.33 | 22.35 | 22.33 | 22.41 | 22.38 | 22.40 |
| 802.11n | 5805 | 161 | AVG | 16.23 | 16.18 | 16.02 | 16.23 | 16.30 | 16.07 | 16.11 | 16.08 |
| | | | PEAK | 22.62 | 22.65 | 22.31 | 22.88 | 22.54 | 22.49 | 22.46 | 22.84 |
| 802.11n | 5825 | 165 | AVG | 15.86 | 15.97 | 15.71 | 15.70 | 15.88 | 15.92 | 15.94 | 15.80 |
| | | | PEAK | 22.37 | 22.3 | 22.30 | 22.44 | 22.35 | 22.44 | 22.46 | 22.61 |



Table 6-7. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements

| Mode | Freq [MHz] | Channel | Detector | 40MHz BW 802.11n (5GHz) Conducted Power [dBm] | | | | | | | |
|---------|------------|---------|----------|---|-------|---------|-------|-------|---------|-----------|---------|
| | | | | Data Rate [Mbps] | | | | | | | |
| | | | | 13.5/15 | 27/30 | 40.5/45 | 54/60 | 81/90 | 108/120 | 121.5/135 | 135/150 |
| 802.11n | 5755 | 151 | AVG | 15.74 | 15.93 | 15.67 | 15.14 | 15.21 | 15.26 | 15.01 | 15.20 |
| | | | PEAK | 22.36 | 22.29 | 22.22 | 21.88 | 22.01 | 21.94 | 21.88 | 22.08 |
| 802.11n | 5795 | 159 | AVG | 15.18 | 15.32 | 15.23 | 15.38 | 15.14 | 15.02 | 15.19 | 15.21 |
| | | | PEAK | 21.91 | 22.03 | 21.97 | 22.15 | 22.01 | 22.01 | 22.14 | 22.01 |

Table 6-8. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements

| Mode | Freq [MHz] | Channel | Detector | 80MHz BW 802.11ac (5GHz) Conducted Power [dBm] | | | | | | | | | |
|----------|------------|---------|----------|--|---------|-----------|---------|-----------|---------|-------------|-----------|---------|-----------|
| | | | | Data Rate [Mbps] | | | | | | | | | |
| | | | | 29.3/32.5 | 58.5/65 | 87.8/97.5 | 117/130 | 175.5/195 | 234/260 | 263.3/292.5 | 292.5/325 | 351/390 | 390/433.3 |
| 802.11ac | 5775 | 155 | AVG | 13.86 | 13.68 | 13.93 | 13.94 | 13.91 | 13.79 | 13.62 | 13.90 | 13.68 | 13.70 |
| | | | PEAK | 20.38 | 20.50 | 20.44 | 20.62 | 20.48 | 20.48 | 20.61 | 20.48 | 19.96 | 20.67 |

Table 6-9. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 24 of 66 |

6.5 Power Spectral Density (802.11a/ac/b/g/n) §15.247(e); RSS-210 [A8.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

KDB 558074 v02 – Section 9.1 Option 1

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

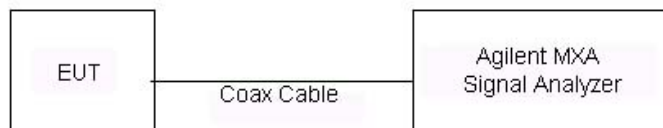




Figure 6-3. Test Instrument & Measurement Setup



Test Notes


None

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 25 of 66 | |


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|---------------------------------------|--|-------------|-------------|
| 2412 | 1 | b | 1 | 0.60 | 8.000 | -7.41 | Pass |
| 2437 | 6 | b | 1 | 0.33 | 8.000 | -7.67 | Pass |
| 2462 | 11 | b | 1 | 0.57 | 8.000 | -7.43 | Pass |
| 2412 | 1 | g | 6 | -4.74 | 8.000 | -12.74 | Pass |
| 2437 | 6 | g | 6 | -3.43 | 8.000 | -11.43 | Pass |
| 2462 | 11 | g | 6 | -2.66 | 8.000 | -10.66 | Pass |
| 2412 | 1 | n | 6.5/7.2 (MCS0) | -3.58 | 8.000 | -11.58 | Pass |
| 2437 | 6 | n | 6.5/7.2 (MCS0) | -4.12 | 8.000 | -12.12 | Pass |
| 2462 | 11 | n | 6.5/7.2 (MCS0) | -2.75 | 8.000 | -10.75 | Pass |
| 5745 | 149 | a | 6 | -3.90 | 8.000 | -11.90 | Pass |
| 5785 | 157 | a | 6 | -3.52 | 8.000 | -11.52 | Pass |
| 5825 | 165 | a | 6 | -4.46 | 8.000 | -12.46 | Pass |
| 5745 | 149 | n (20MHz) | 6.5/7.2 (MCS0) | -3.36 | 8.000 | -11.36 | Pass |
| 5785 | 157 | n (20MHz) | 6.5/7.2 (MCS0) | -3.25 | 8.000 | -11.25 | Pass |
| 5825 | 165 | n (20MHz) | 6.5/7.2 (MCS0) | -4.49 | 8.000 | -12.49 | Pass |
| 5755 | 151 | n (40MHz) | 13.5/15 (MCS0) | -6.94 | 8.000 | -14.94 | Pass |
| 5795 | 159 | n (40MHz) | 13.5/15 (MCS0) | -5.90 | 8.000 | -13.90 | Pass |
| 5775 | 155 | ac (80MHz) | 351/390 (MCS8) | -9.07 | 8.000 | -17.07 | Pass |

Table 6-10. Conducted Power Density Measurements

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 26 of 66 | |

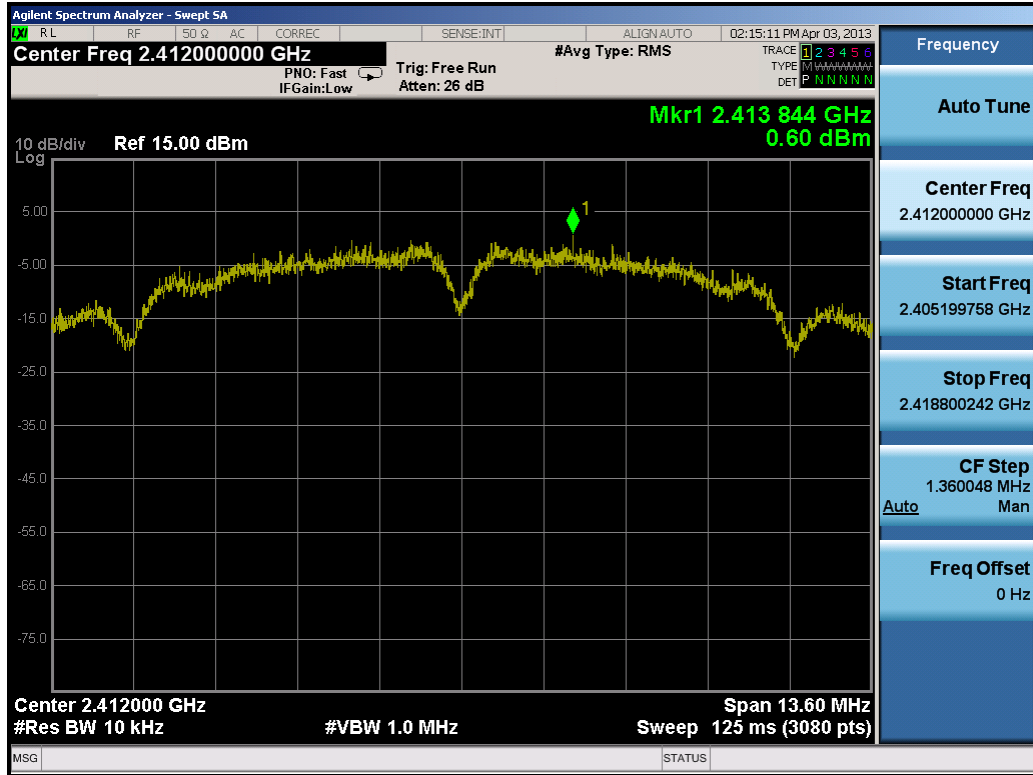


Plot 6-19. Power Spectral Density Plot (802.11b – Ch. 1)

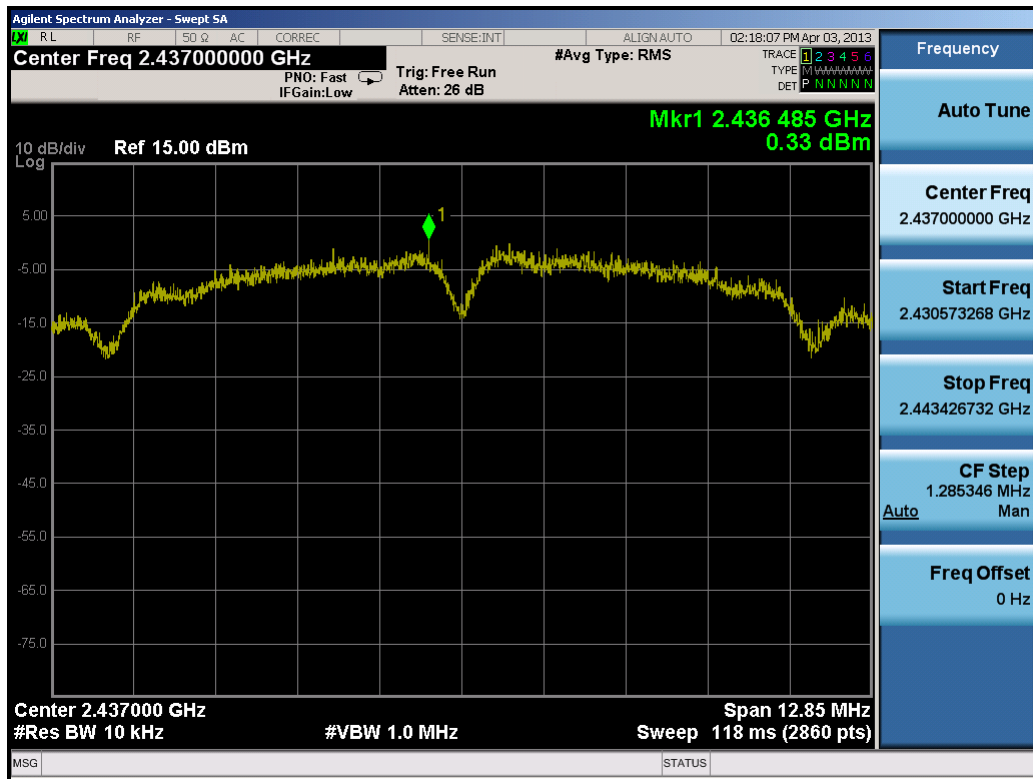


Plot 6-20. Power Spectral Density Plot (802.11b – Ch. 6)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 27 of 66 |

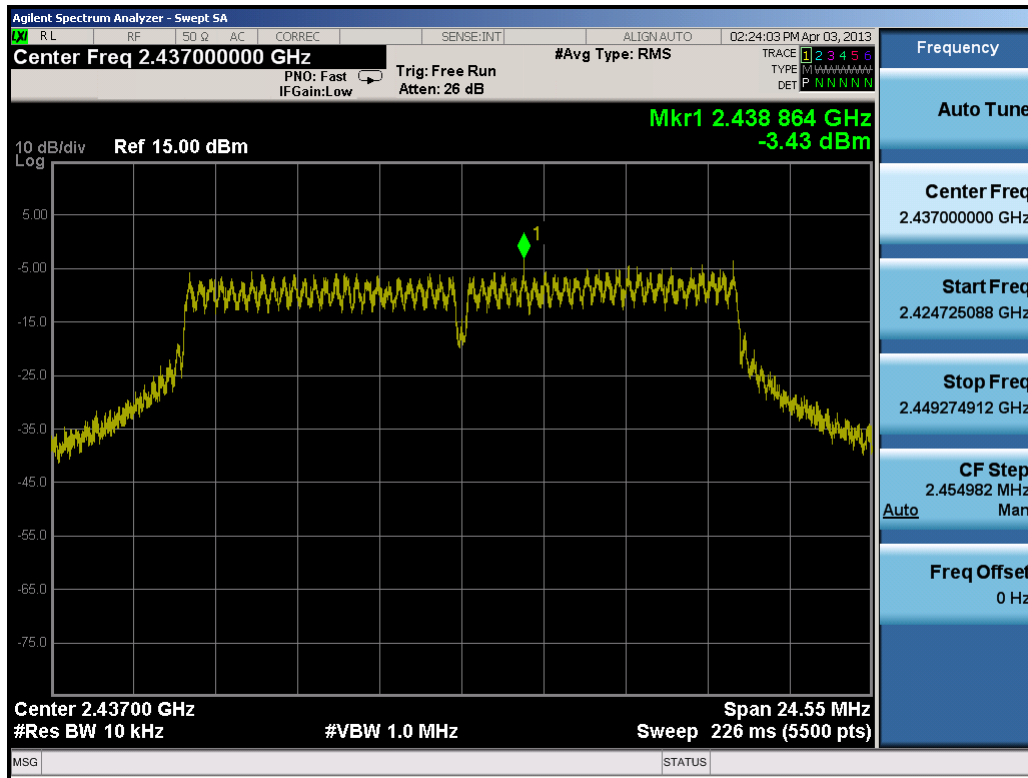


Plot 6-23. Power Spectral Density Plot (802.11g – Ch. 6)

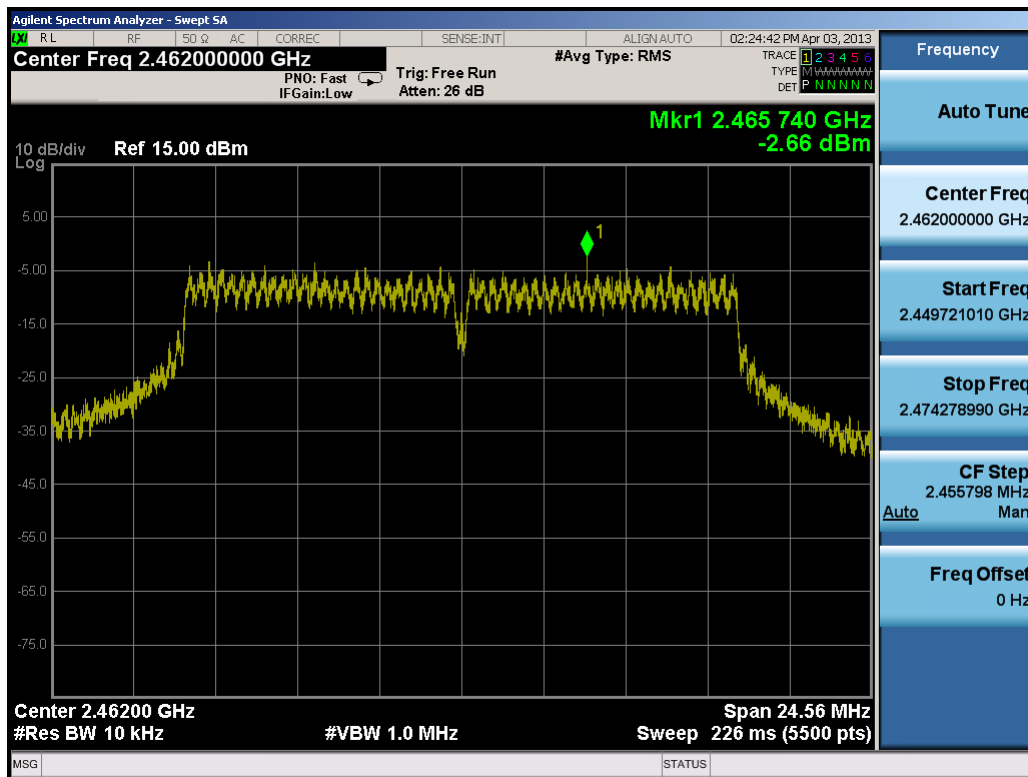


Plot 6-24. Power Spectral Density Plot (802.11g – Ch. 11)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 29 of 66 |

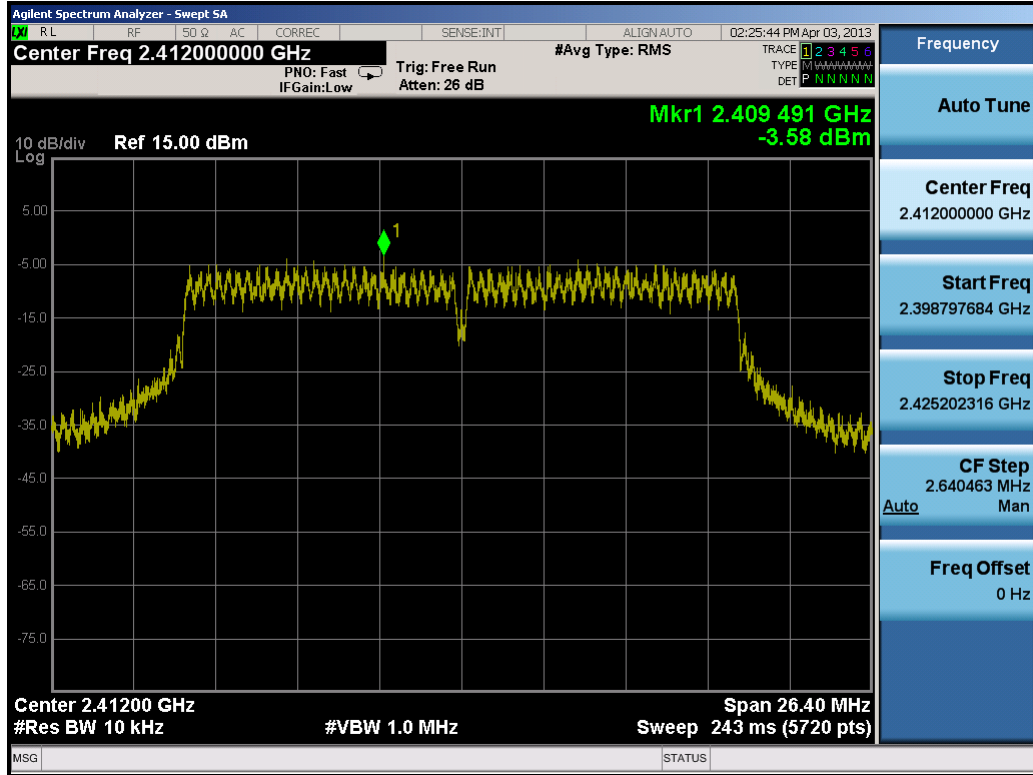


Plot 6-25. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

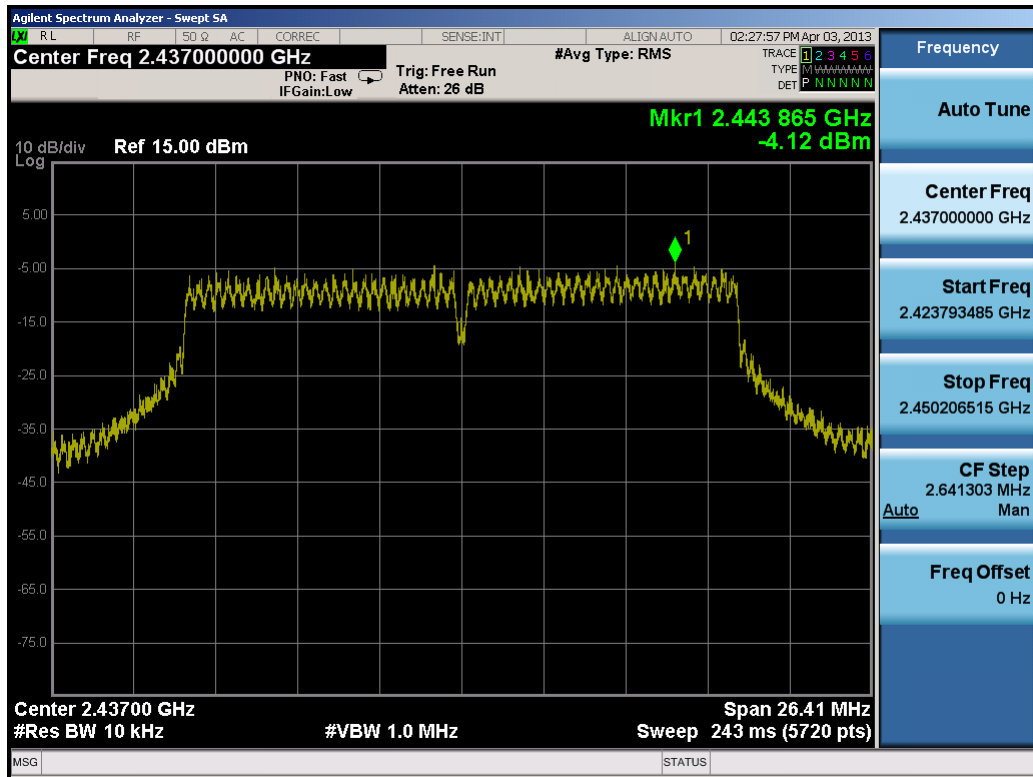


Plot 6-26. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 30 of 66 |

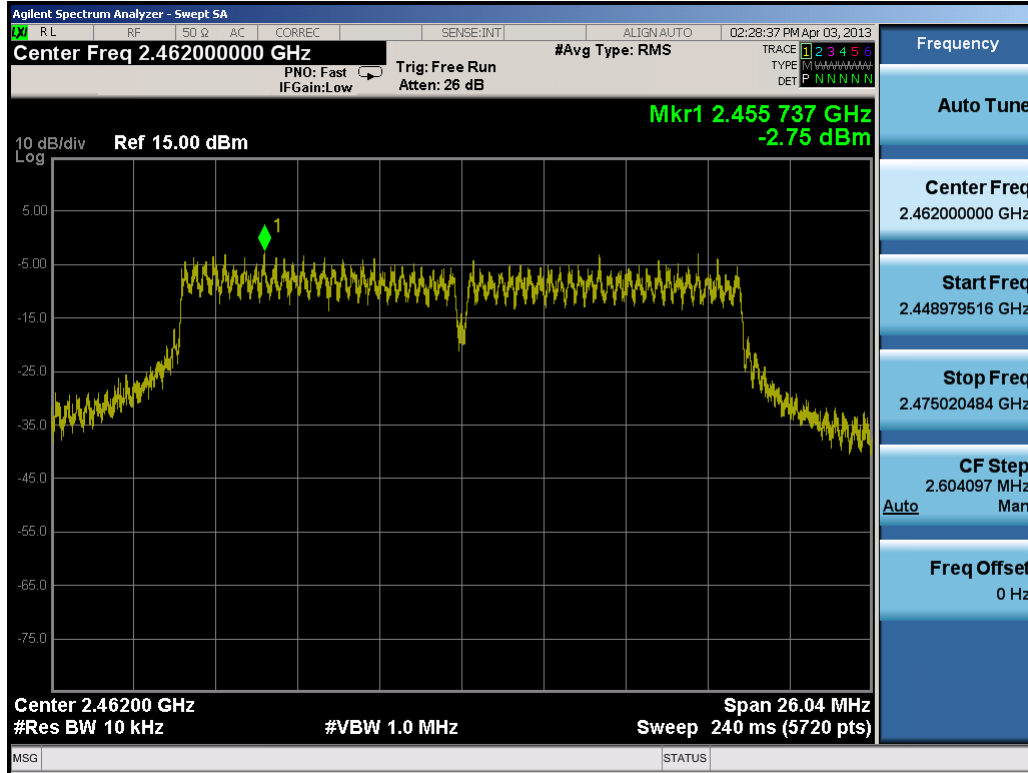


Plot 6-27. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

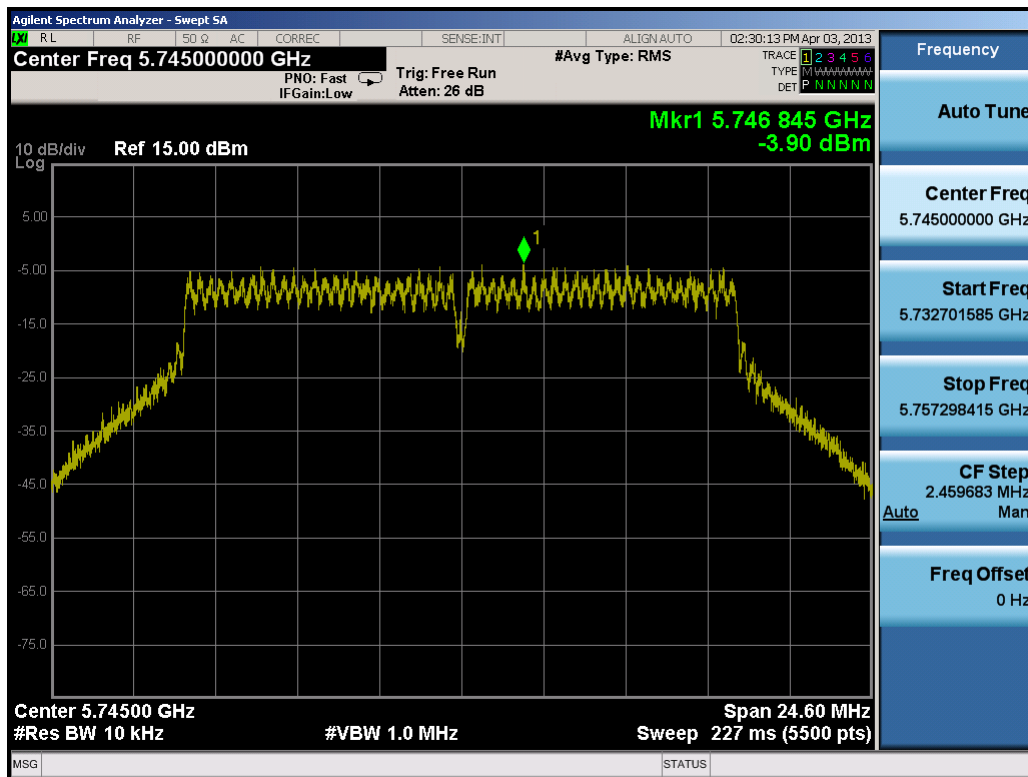


Plot 6-28. Power Spectral Density Plot (802.11a – Ch. 149)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT9200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 31 of 66 |

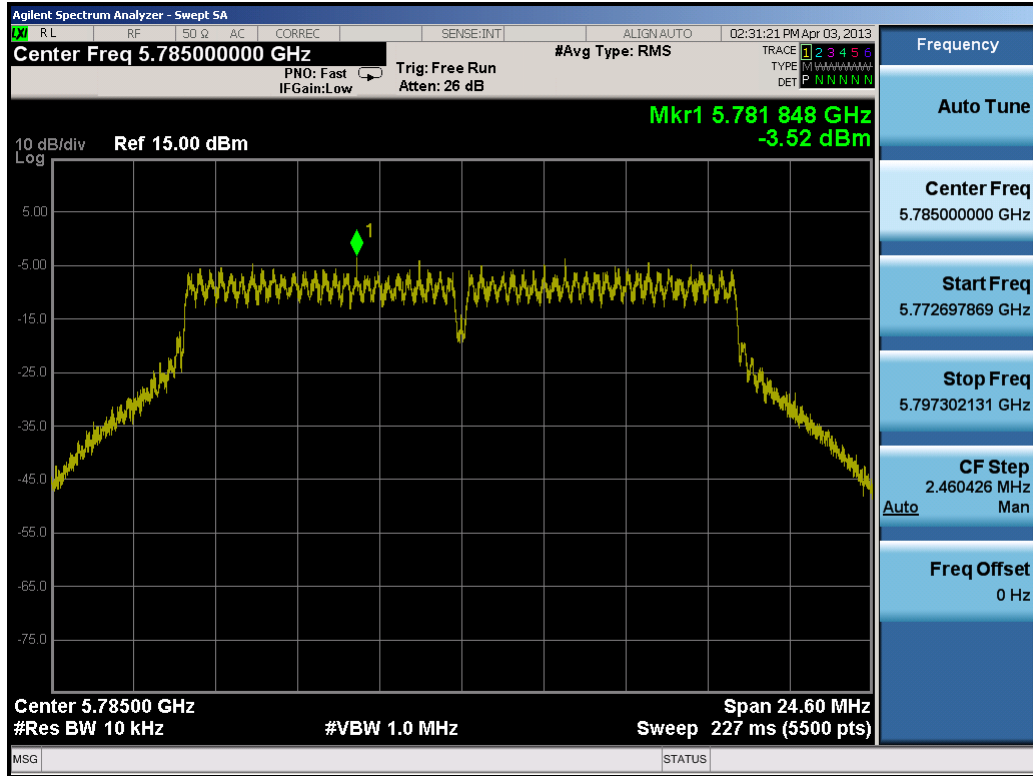


Plot 6-29. Power Spectral Density Plot (802.11a – Ch. 157)

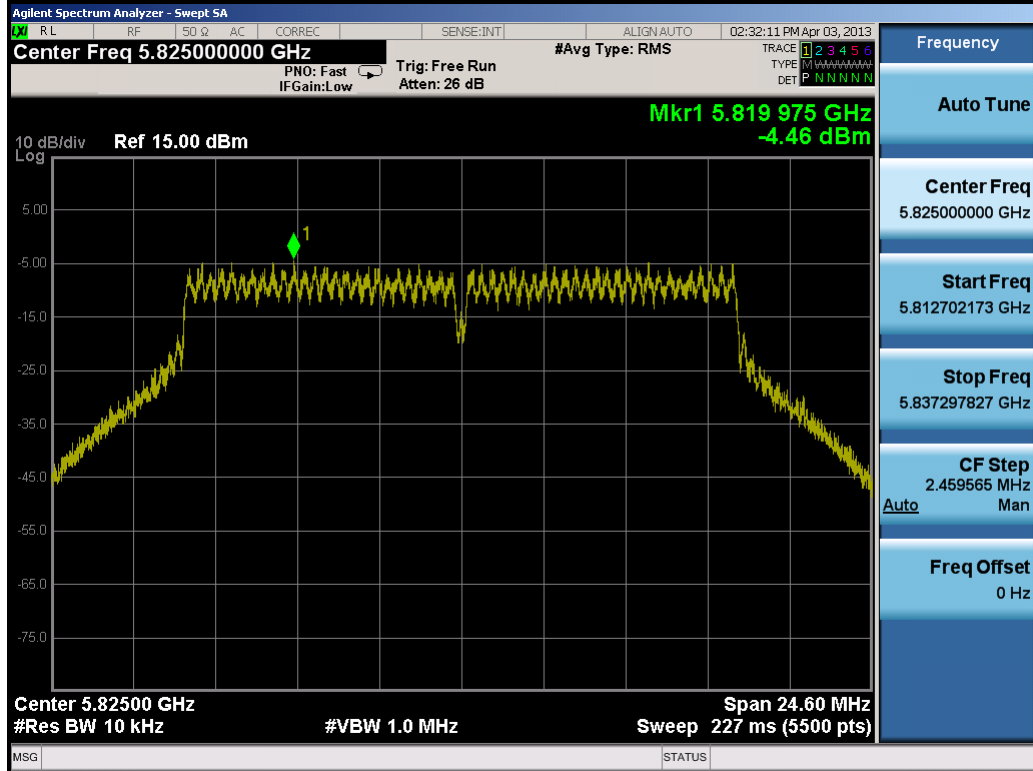


Plot 6-30. Power Spectral Density Plot (802.11a – Ch. 165)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 32 of 66 |

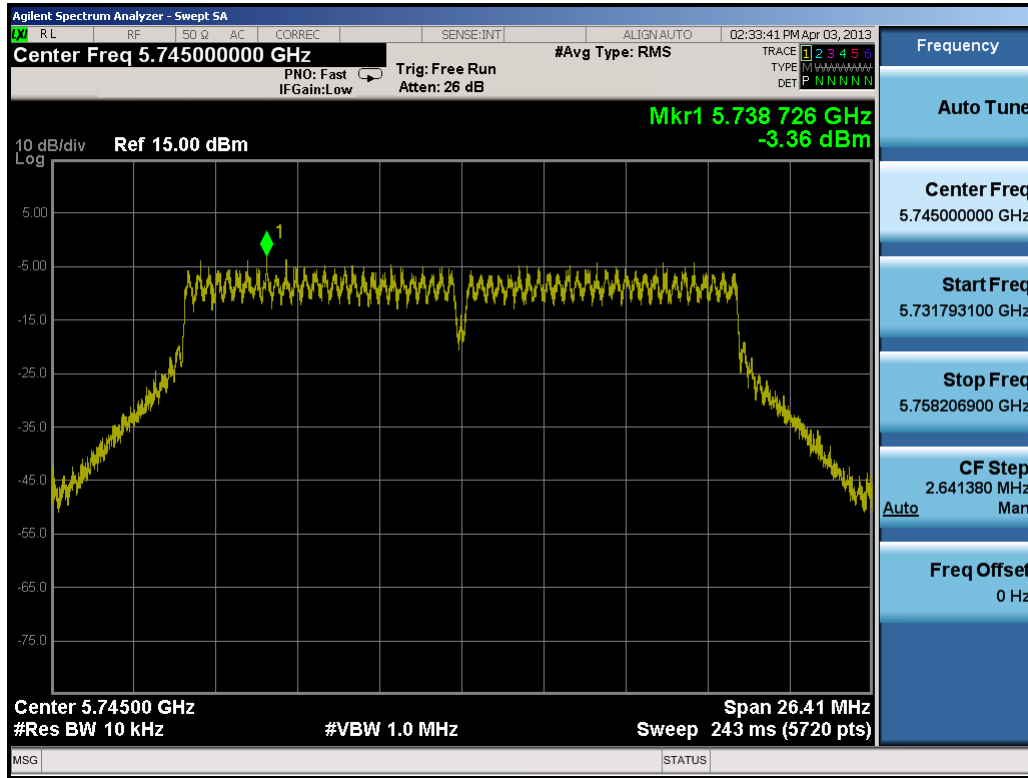


Plot 6-31. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

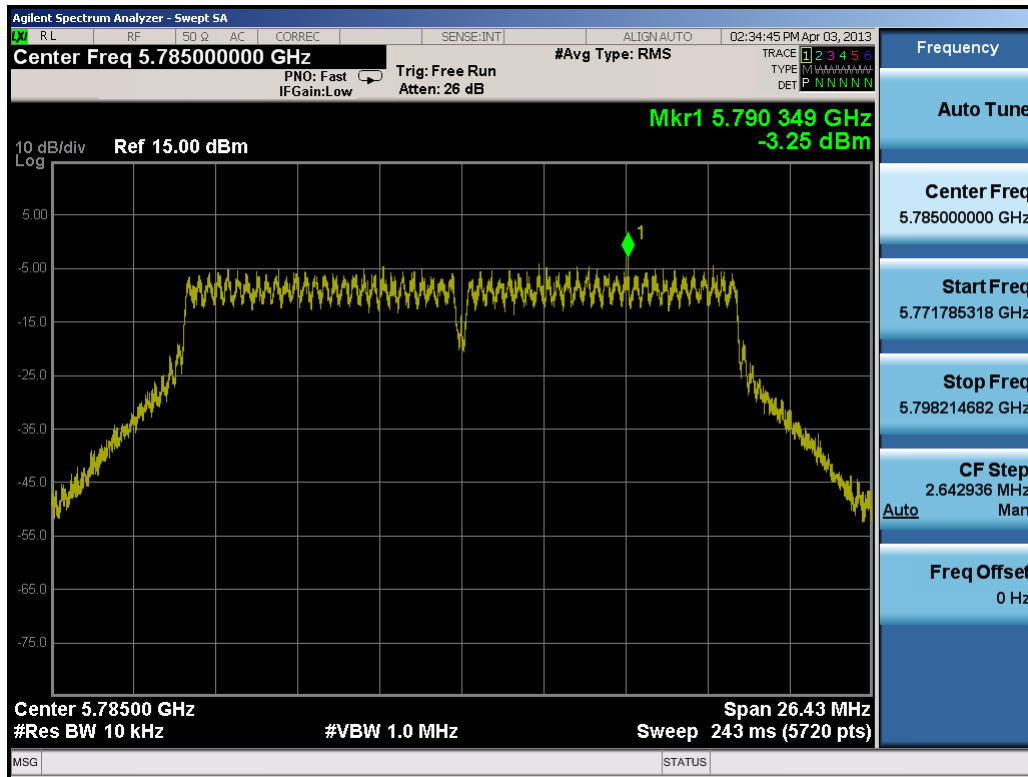


Plot 6-32. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

| | | | | |
|--------------------------------------|--|---|---------|---------------------------------|
| FCC ID: A3LGT19200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 33 of 66 |

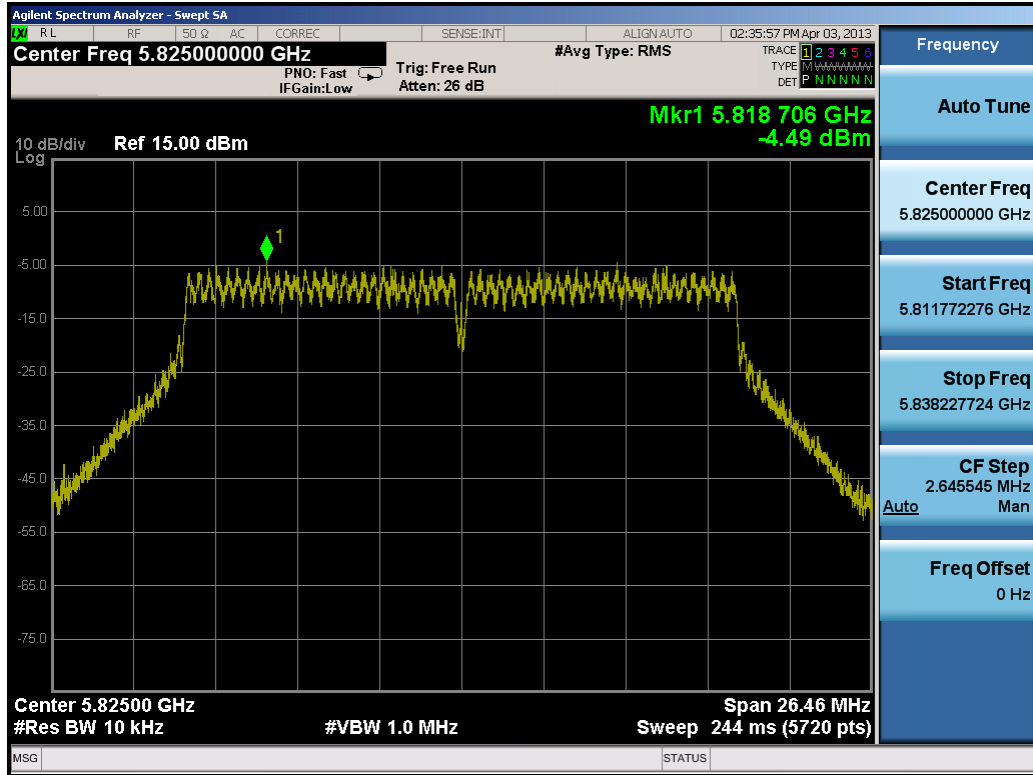


Plot 6-33. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

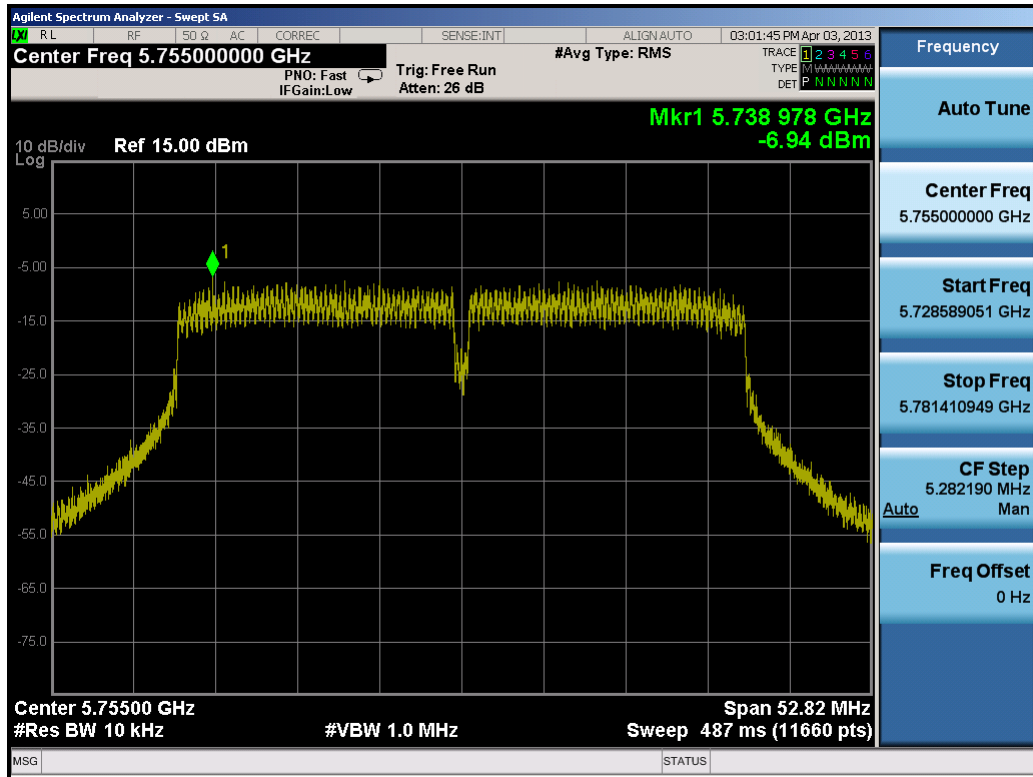


Plot 6-34. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

| | | | | |
|--------------------------------------|-------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT9200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 34 of 66 |

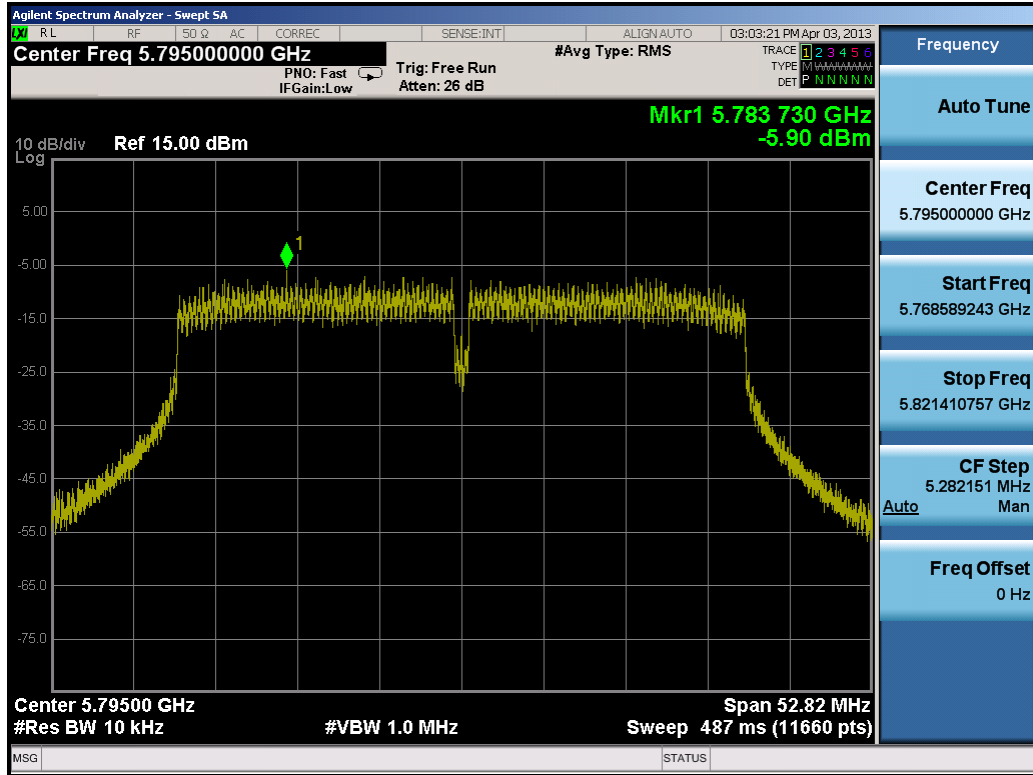

Plot 6-35. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

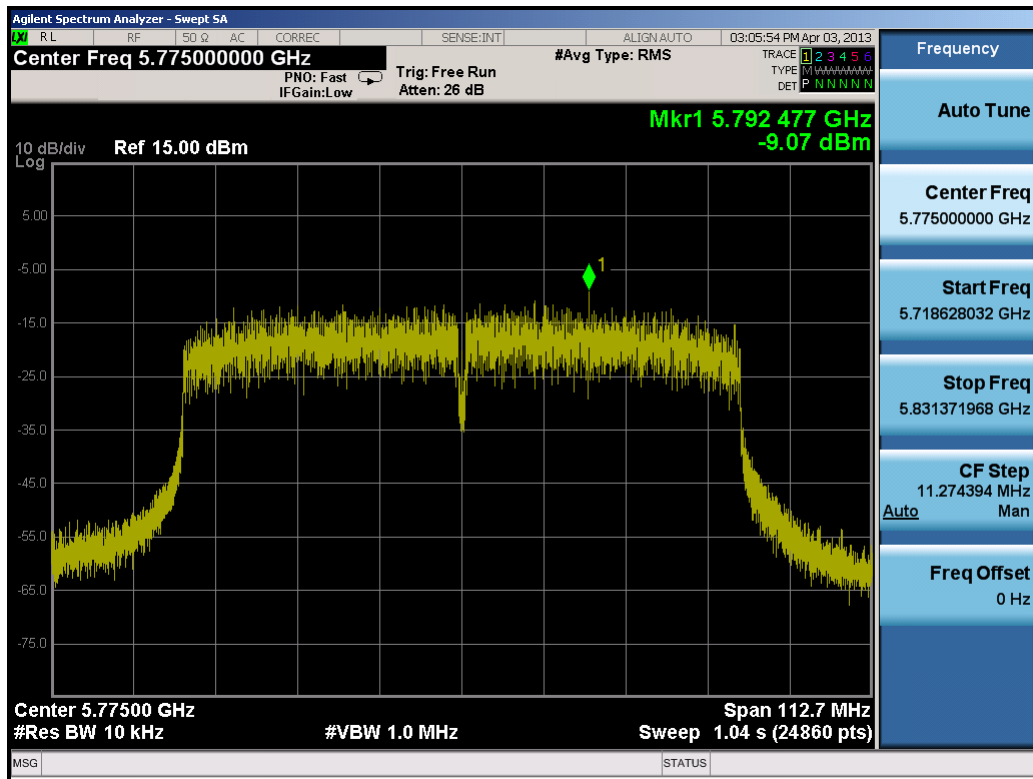

Plot 6-36. Power Spectral Density Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

| | | | | |
|--------------------------------------|--|---|---------|---------------------------------|
| FCC ID: A3LGT19200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 35 of 66 |

6.6 Conducted Emissions at the Band Edge

§15.247(d); RSS-210 [A8.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6 Mbps for “a” mode, 6.5/7.2Mbps for 20MHz BW “n” mode, and 13.5/15Mbps for 40MHz “n” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 9.1).

Test Procedure Used

KDB 558074 v02 – Section 10.1.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Trace mode = max hold
7. Sweep time = auto couple
8. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




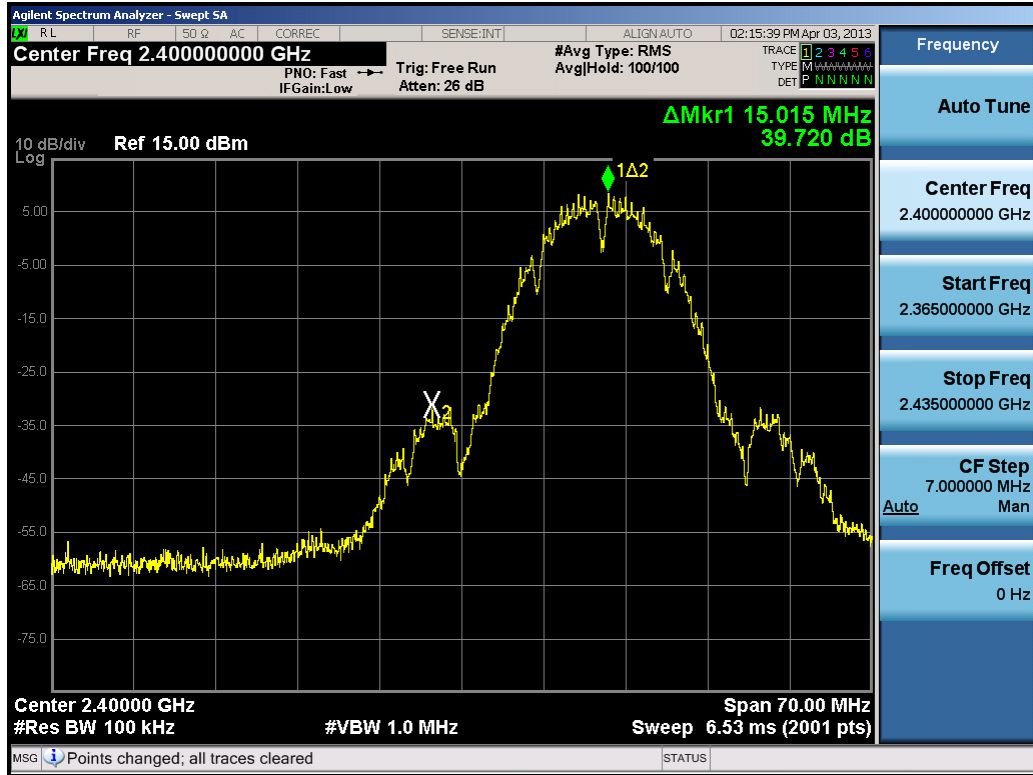


Figure 6-4. Test Instrument & Measurement Setup

Test Notes

None

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 36 of 66 | |




Plot 6-37. Band Edge Plot (802.11b – Ch. 1)




Plot 6-38. Band Edge Plot (802.11b – Ch. 11)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/c/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 37 of 66 |

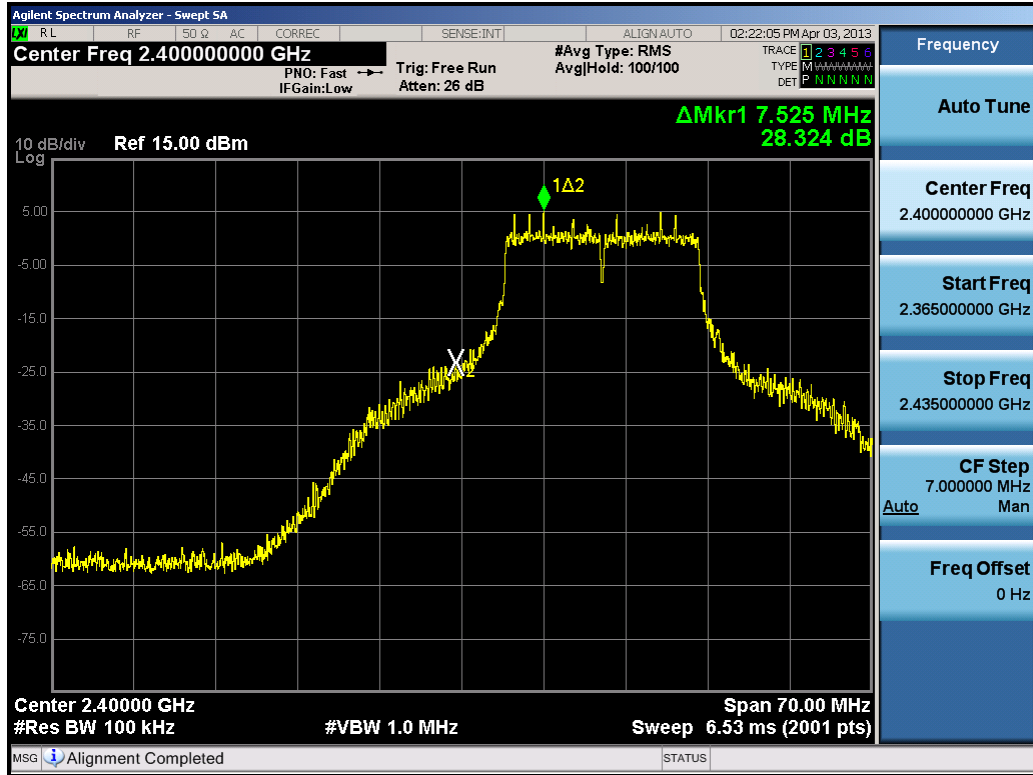


Plot 6-39. Band Edge Plot (802.11g- Ch. 1)

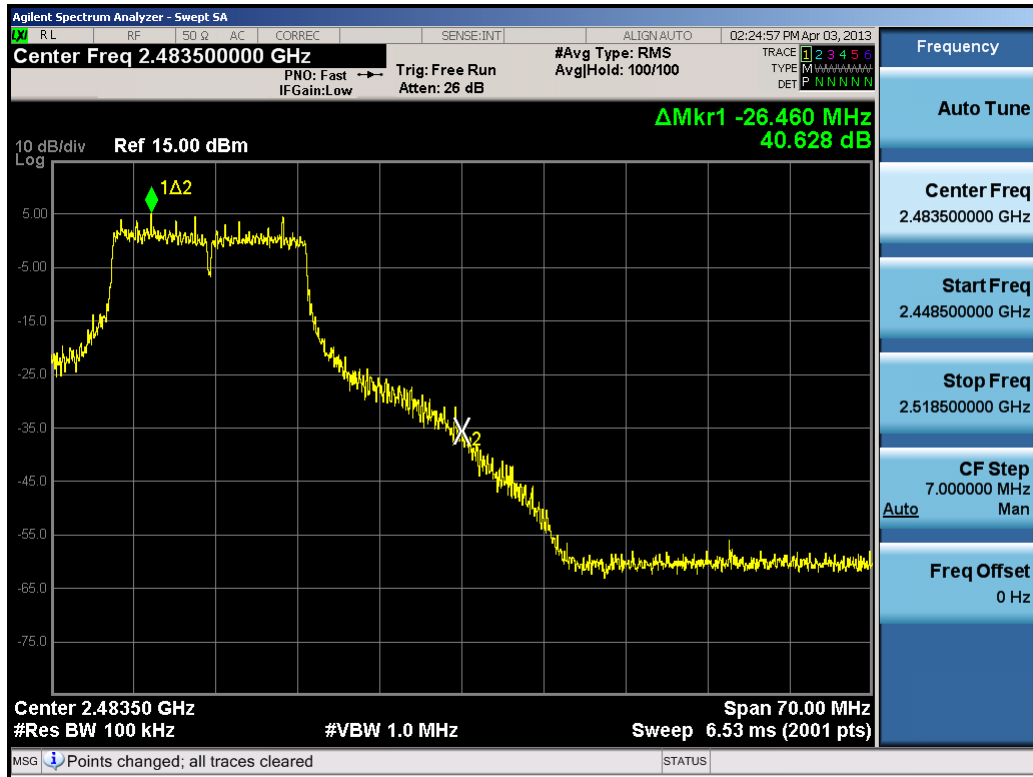


Plot 6-40. Band Edge Plot (802.11g - Ch. 11)

| | | | | |
|--------------------------------------|--|---|---------------|---------------------------------|
| FCC ID: A3LGT19200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 38 of 66 | |

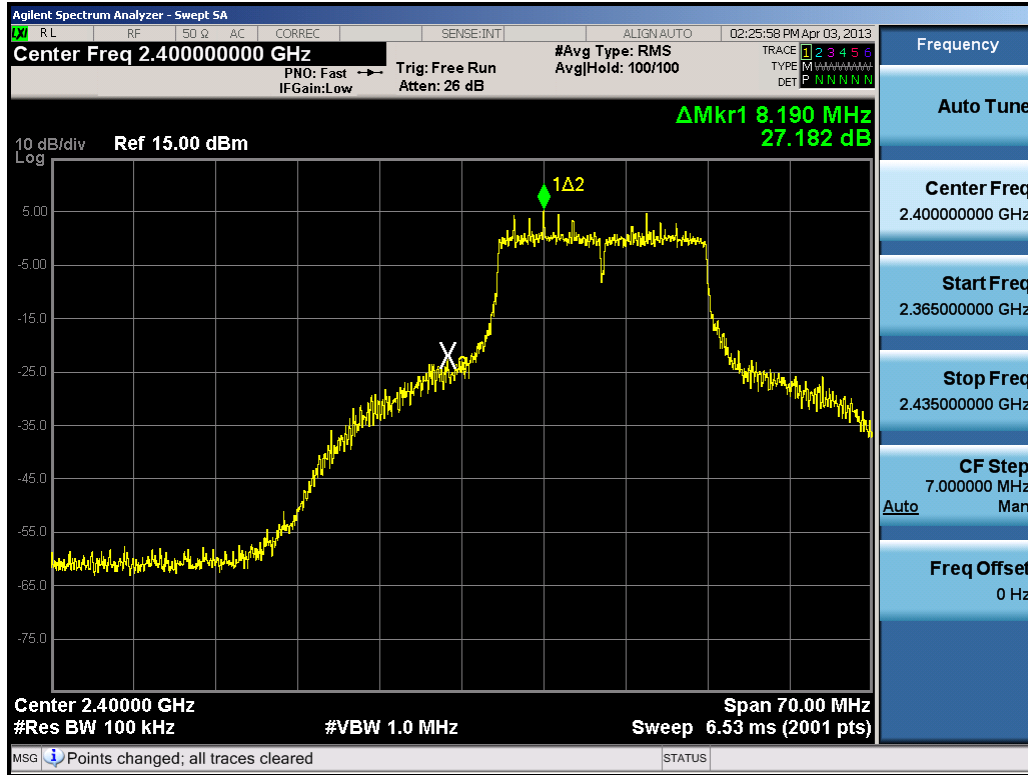


Plot 6-41. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

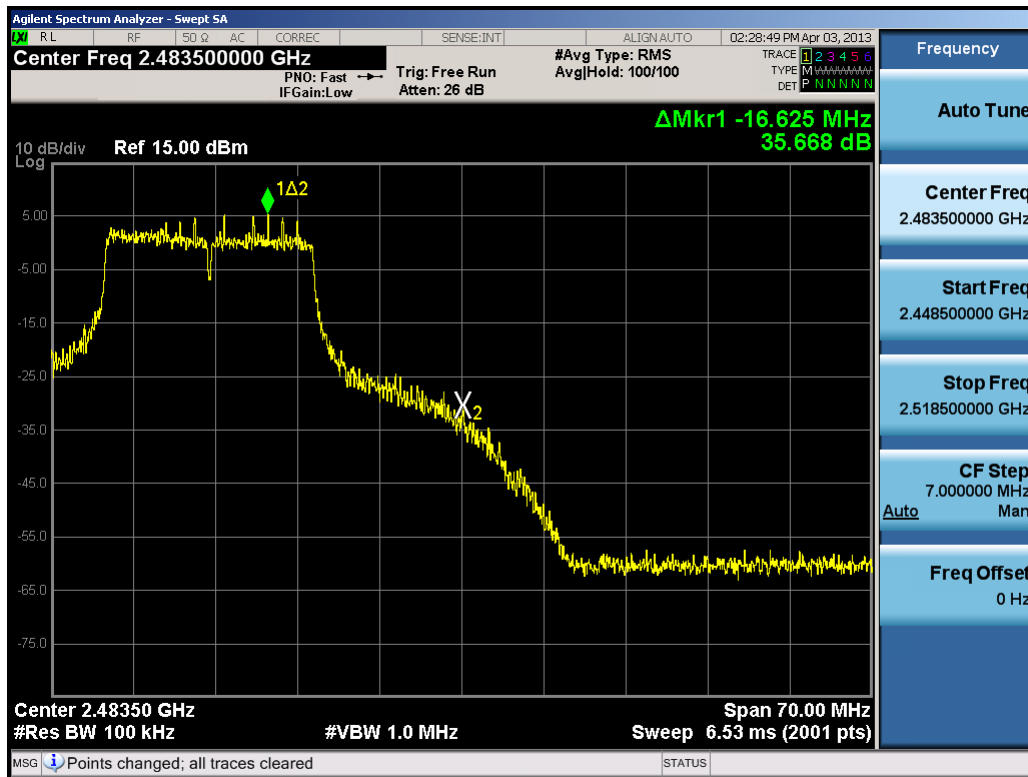


Plot 6-42. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

| | | | | |
|--------------------------------------|---|---|----------------|---------------------------------|
| FCC ID: A3LGT9200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 39 of 66 |

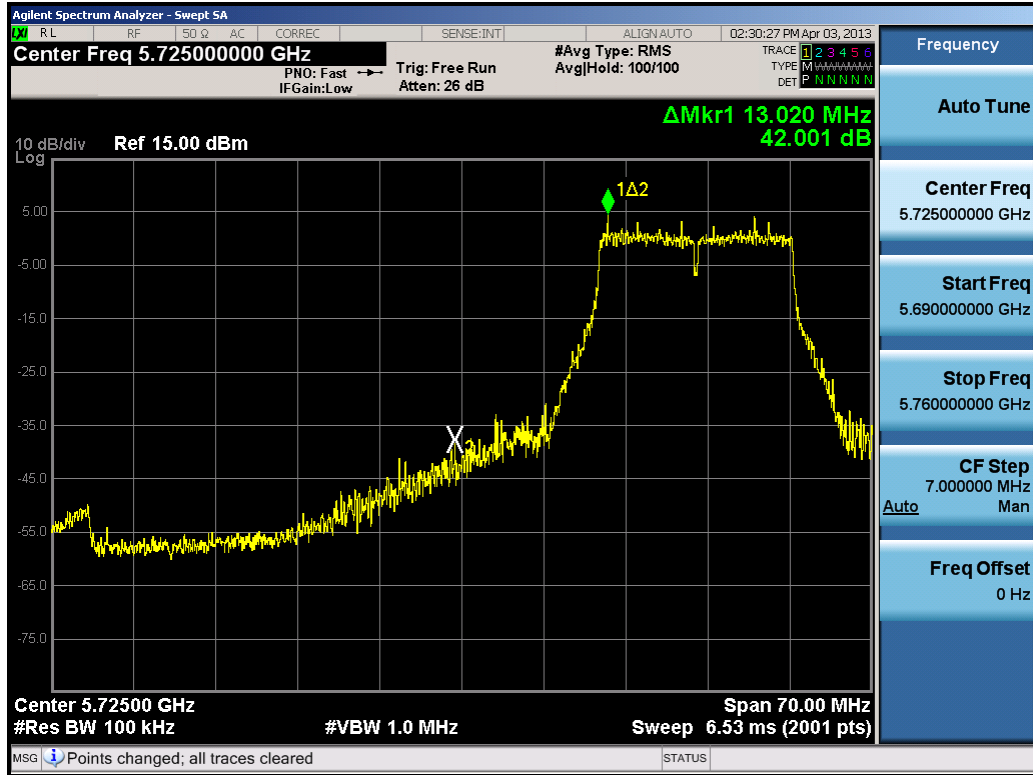


Plot 6-43. Band Edge Plot (802.11a – Ch. 149)

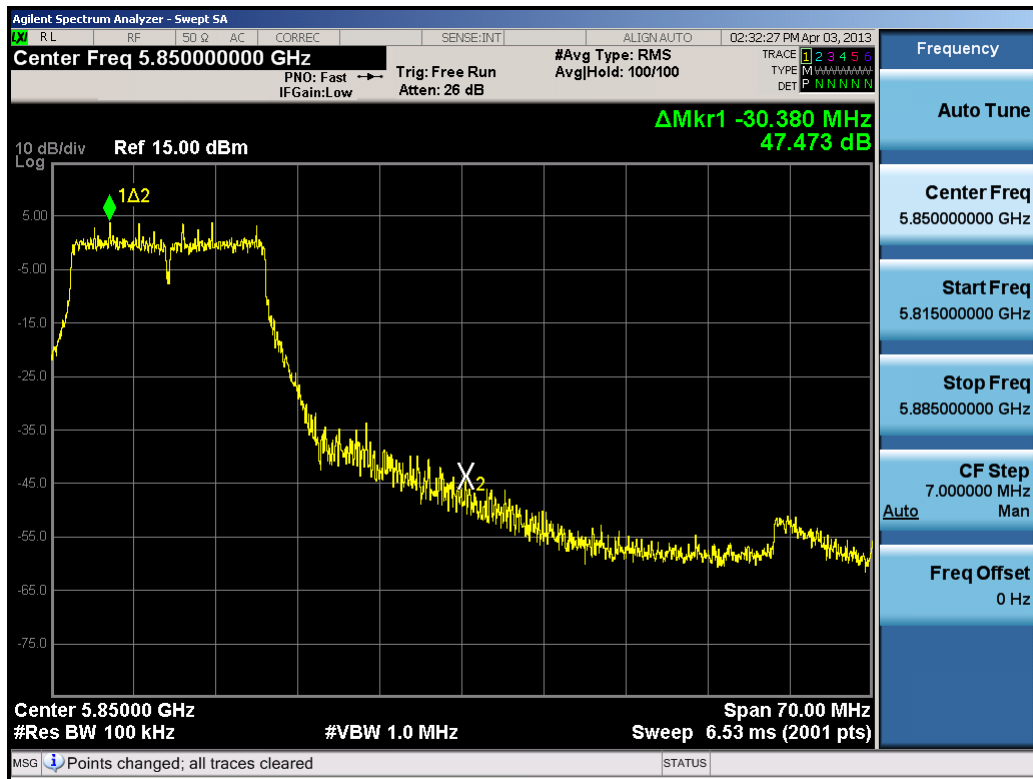


Plot 6-44. Band Edge Plot (802.11a – Ch. 165)

| | | | | |
|--------------------------------------|---|---|----------------|---------------------------------|
| FCC ID: A3LGT9200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 40 of 66 |

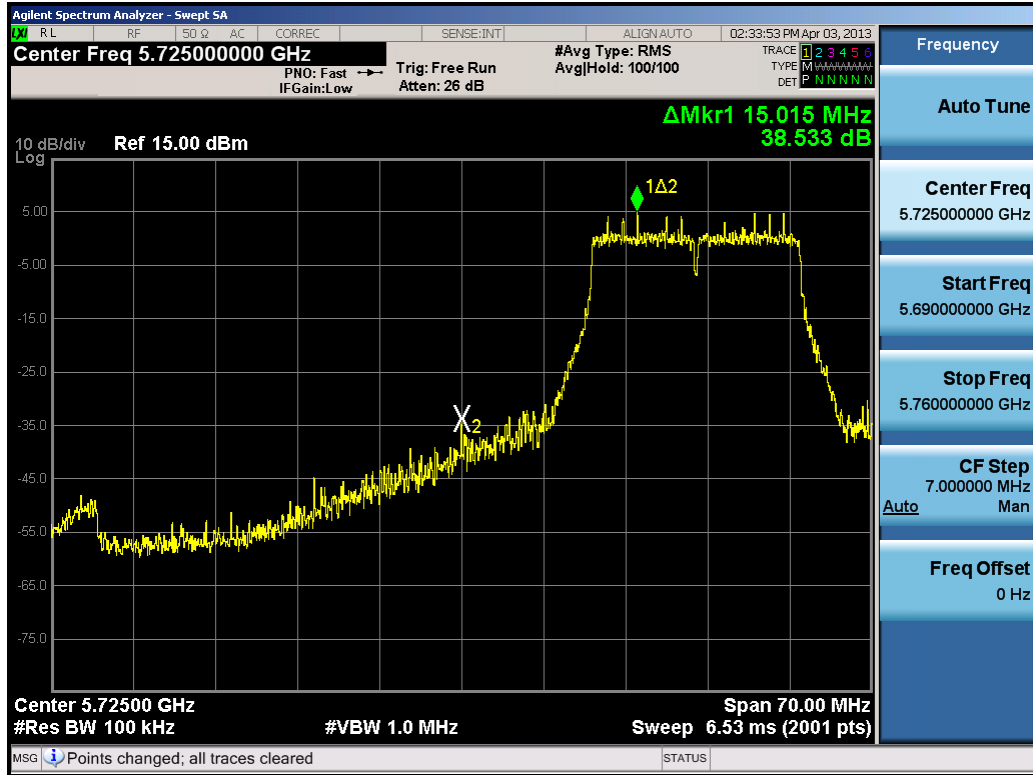


Plot 6-45. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

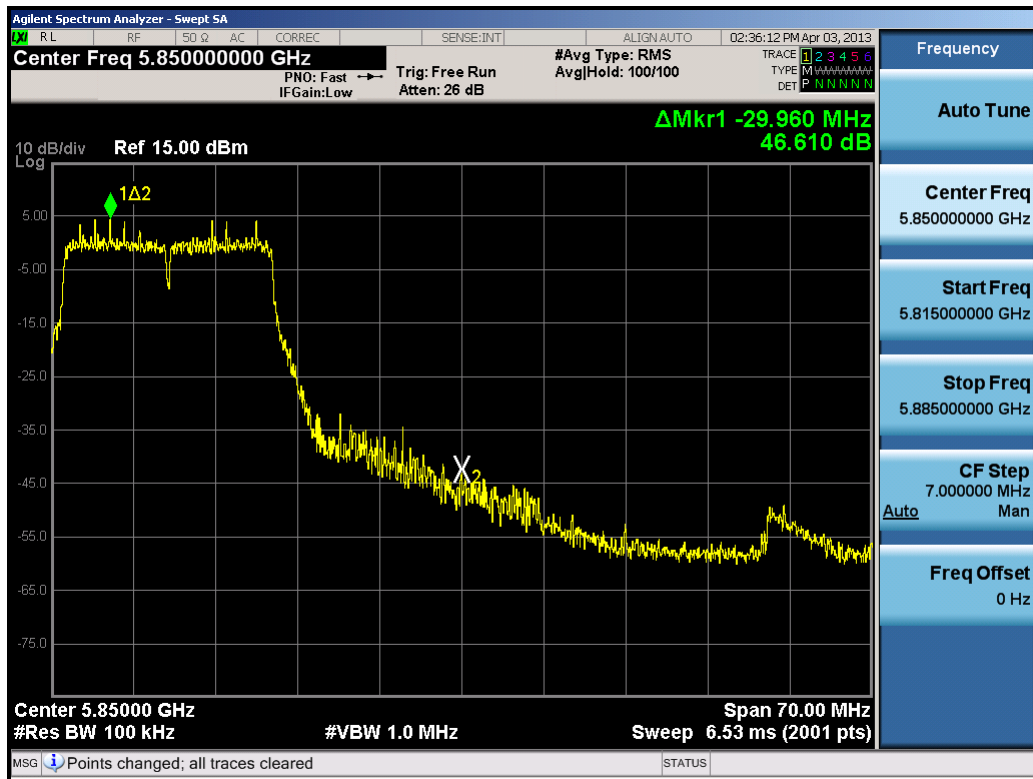


Plot 6-46. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

| | | | | |
|--------------------------------------|---|---|----------------|---------------------------------|
| FCC ID: A3LGT9200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 41 of 66 |

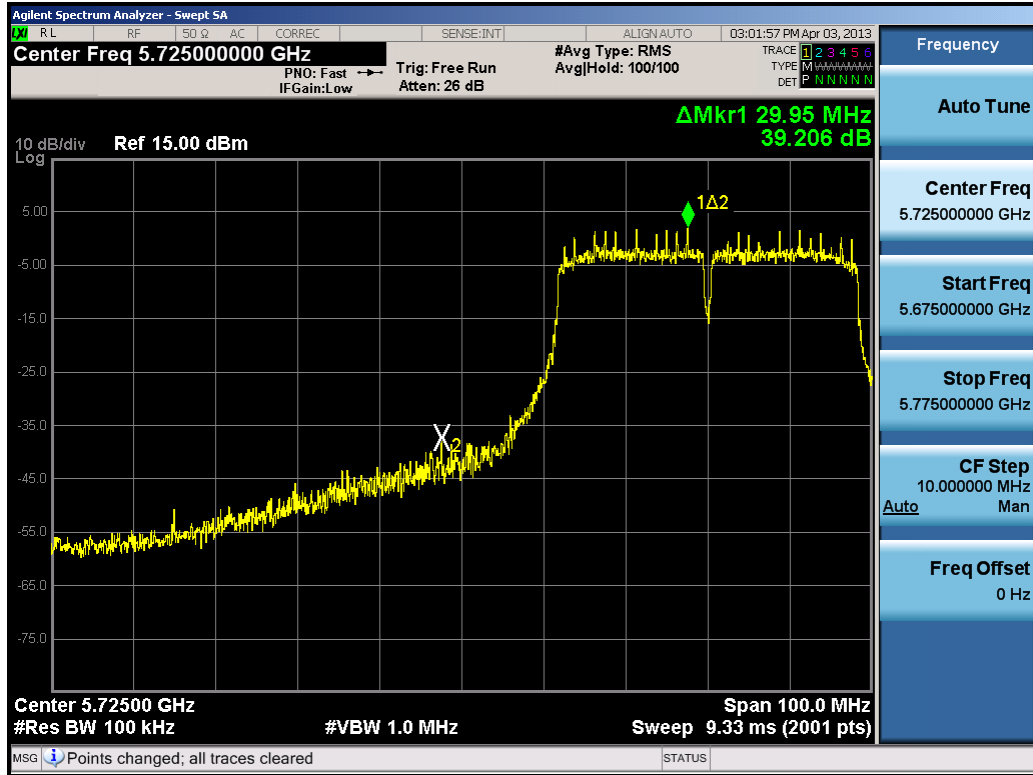


Plot 6-47. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

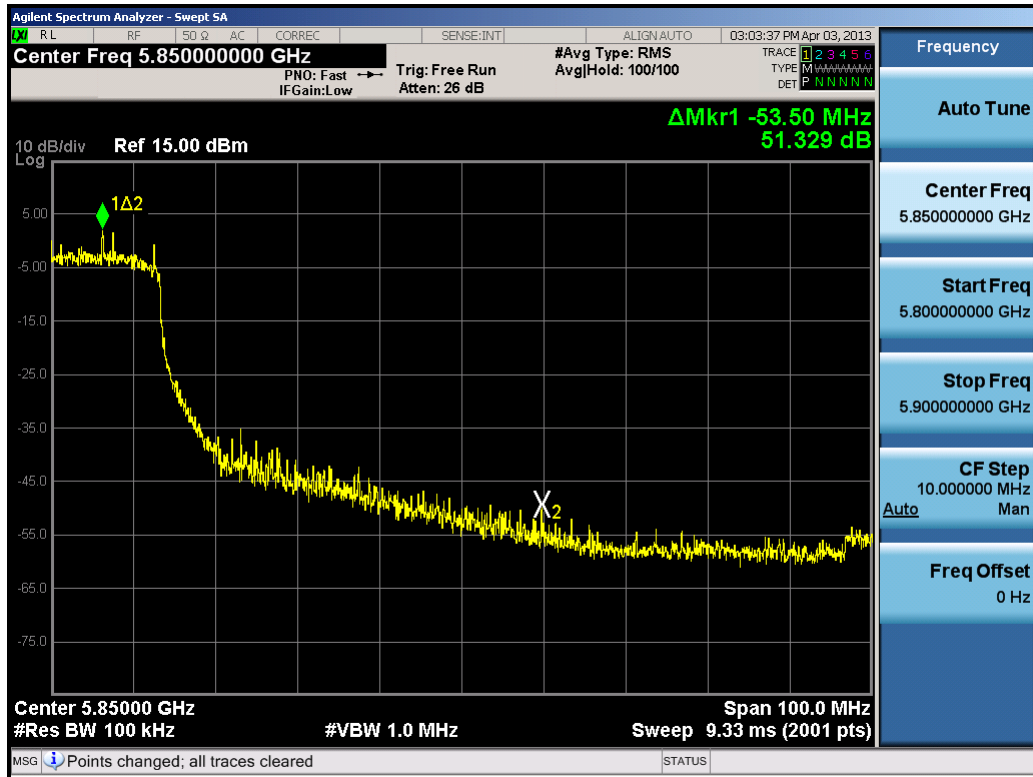


Plot 6-48. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

| | | | | |
|--------------------------------------|------------------------------------|---|--|---------------------------------|
| FCC ID: A3LGT9200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 42 of 66 |

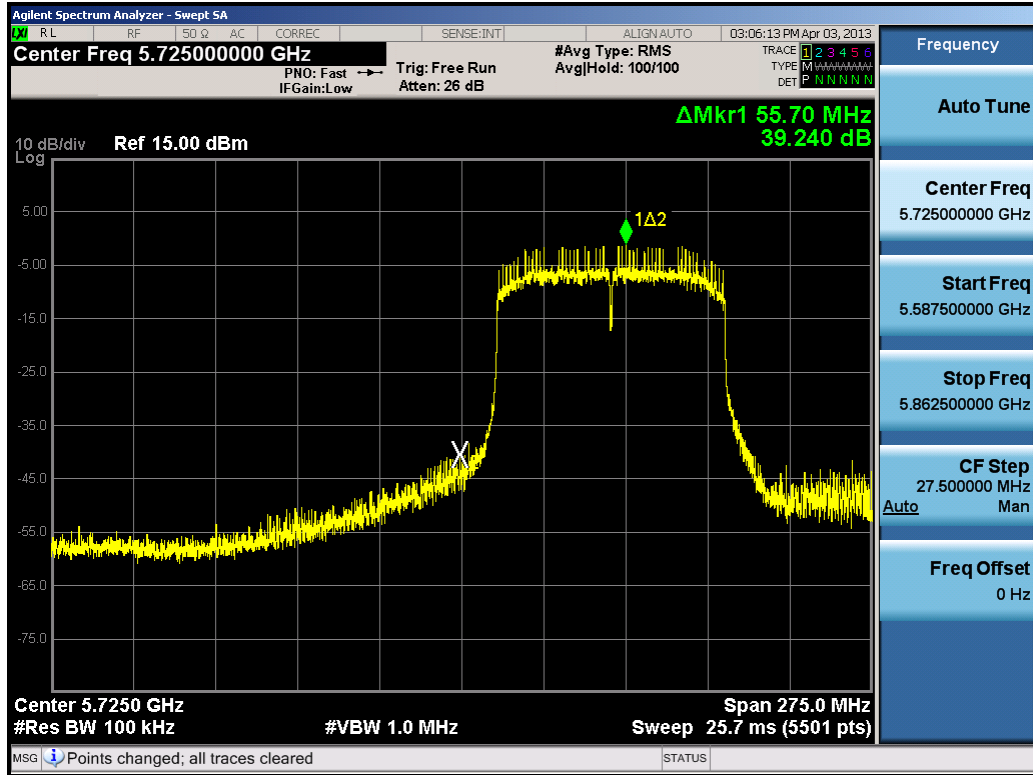

Plot 6-49. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

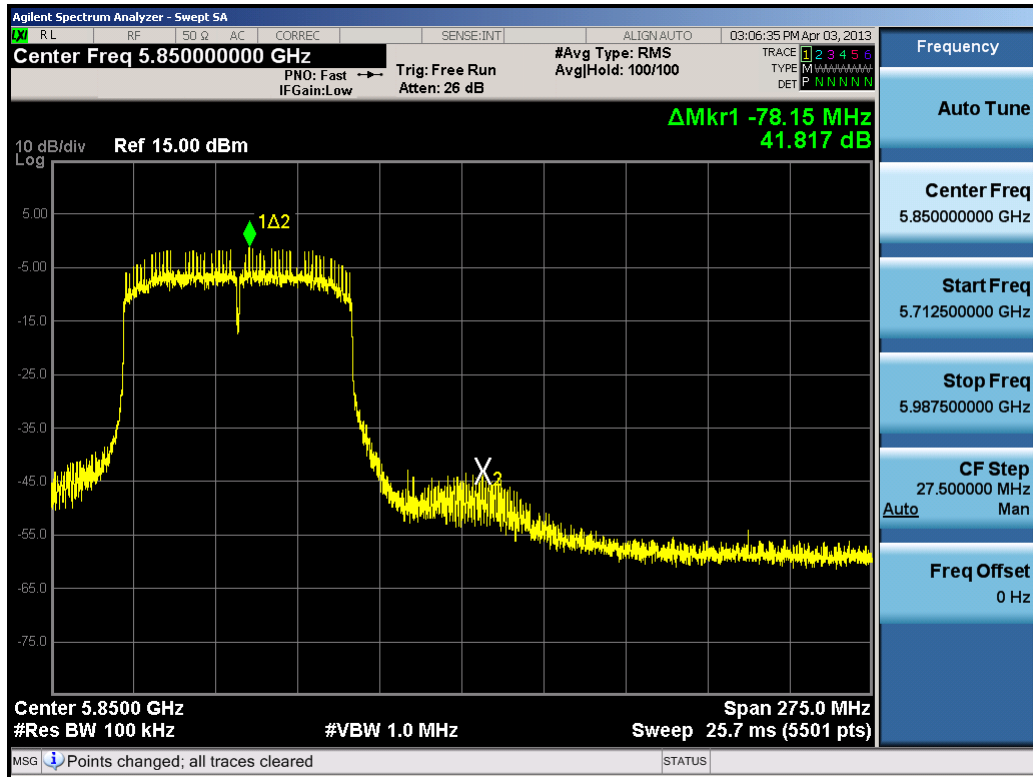

Plot 6-50. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

| | | | | |
|--------------------------------------|------------------------------------|---|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/c/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 43 of 66 |

6.7 Conducted Spurious Emissions

§15.247(d); RSS-210 [A8.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “a”, and “n” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below. The worst case spurious emissions for the 5.8GHz band were found while transmitting in “a” mode at 6 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 9.1).

Test Procedure Used

KDB 558074 v02 – Section 10.1.2

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.









Figure 6-5. Test Instrument & Measurement Setup

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 44 of 66 | |


Test Notes

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGTI9200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 45 of 66 |

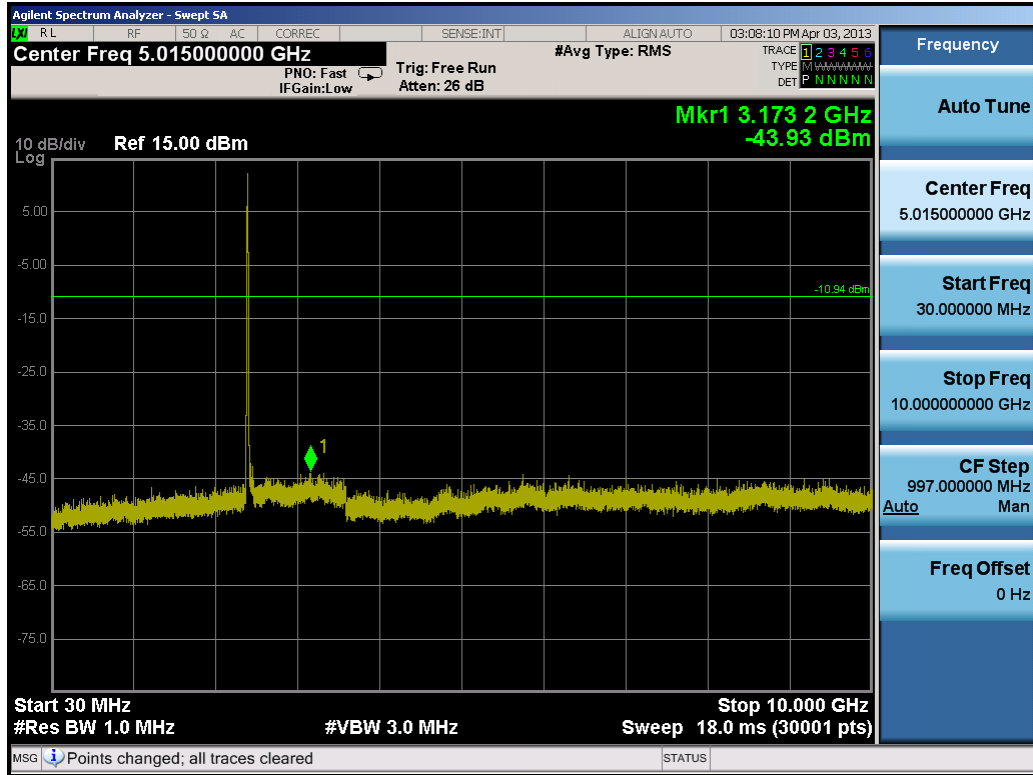


Plot 6-51. Conducted Spurious Plot (802.11b – Ch. 1)

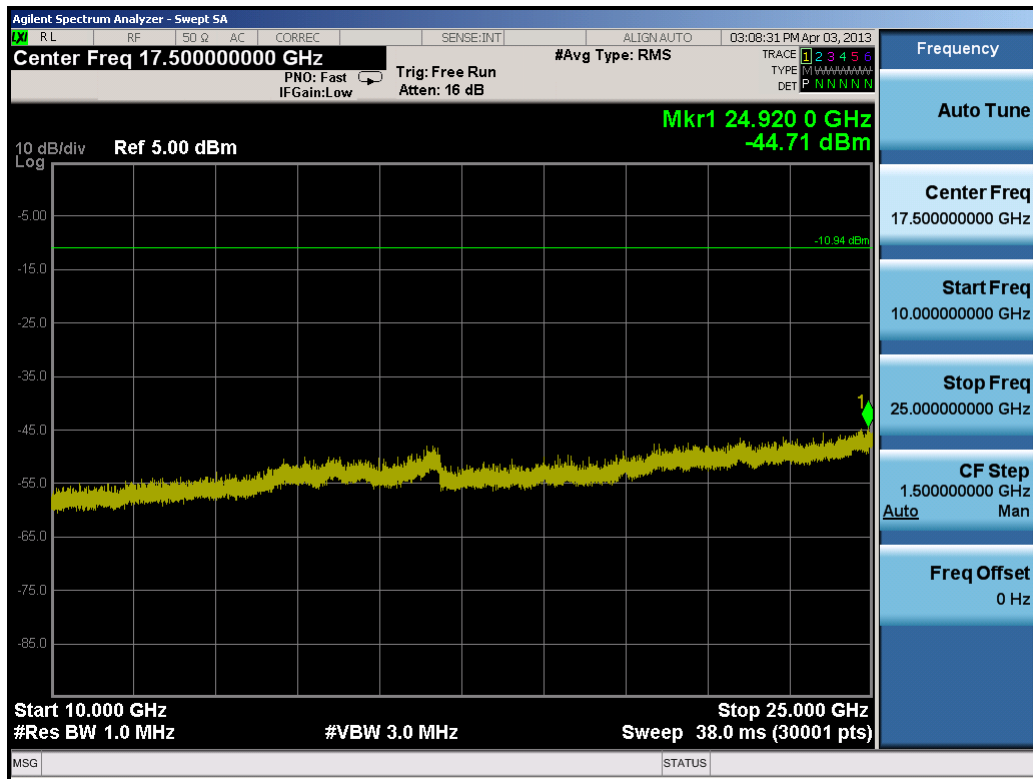


Plot 6-52. Conducted Spurious Plot (802.11b – Ch. 1)

| | | | | |
|--------------------------------------|-------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT9200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 46 of 66 |

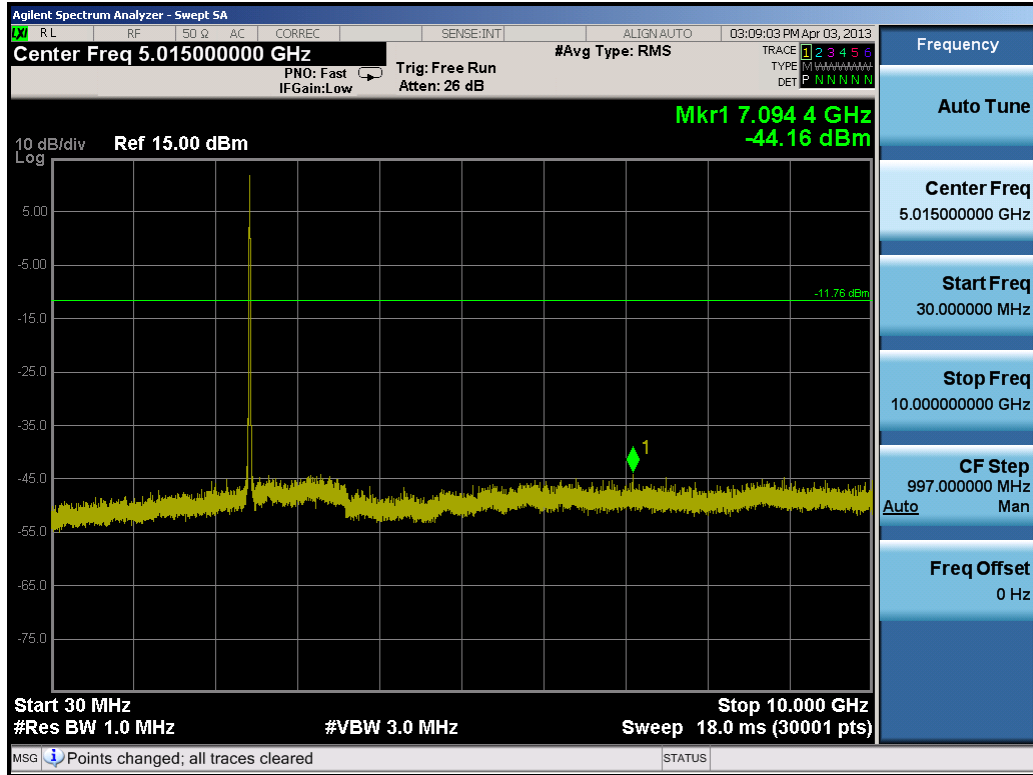


Plot 6-53. Conducted Spurious Plot (802.11b – Ch. 6)

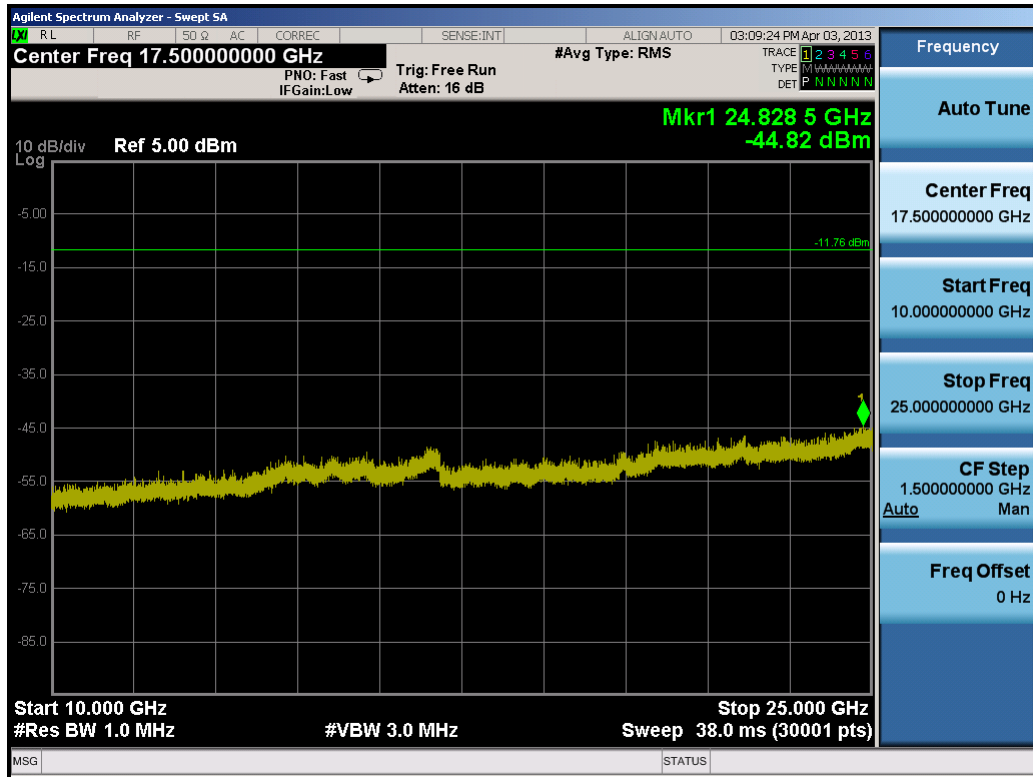


Plot 6-54. Conducted Spurious Plot (802.11b – Ch. 6)

| | | | | |
|--------------------------------------|--|---|---------|---------------------------------|
| FCC ID: A3LGT19200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 47 of 66 |

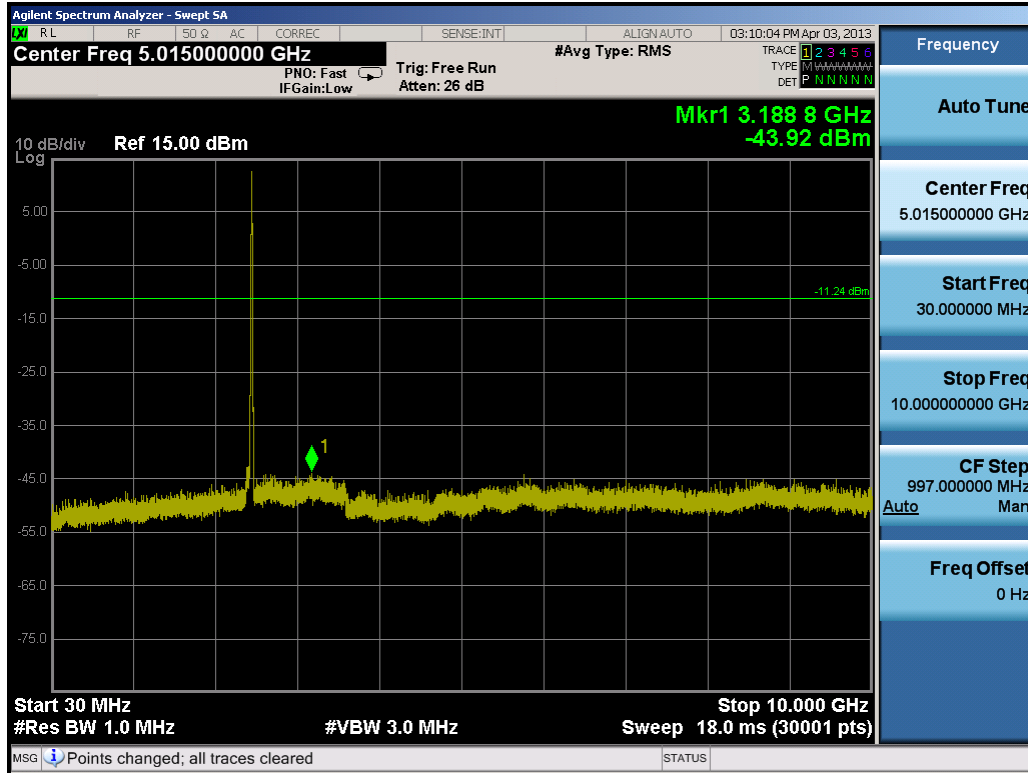


Plot 6-55. Conducted Spurious Plot (802.11b – Ch. 11)

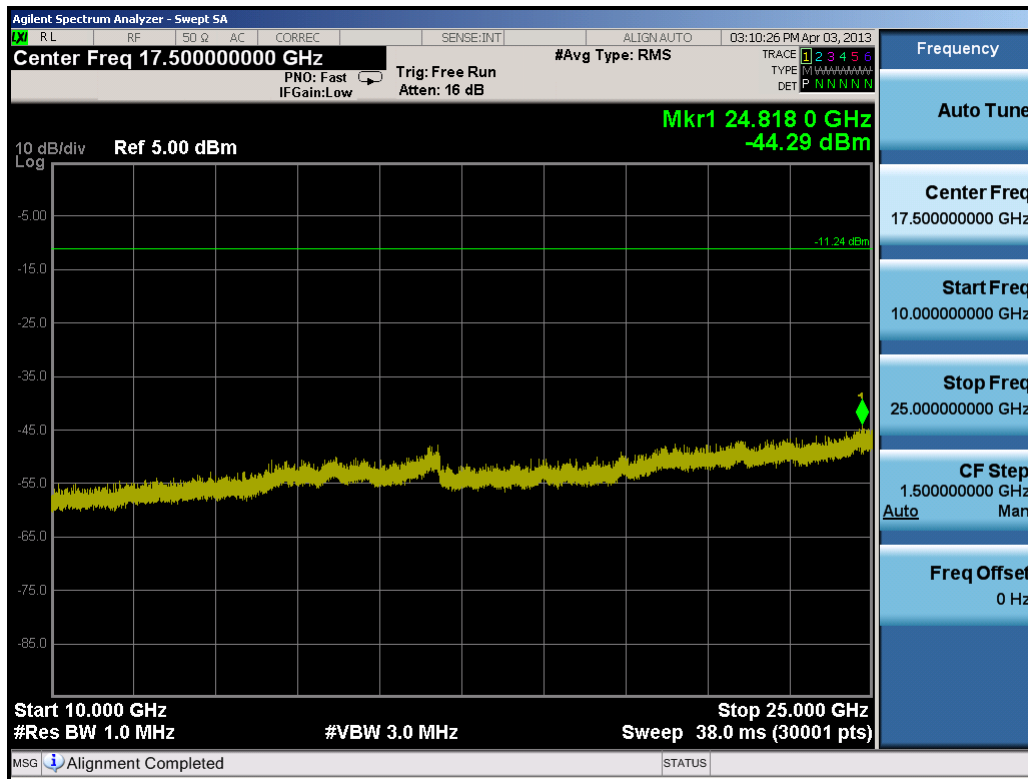


Plot 6-56. Conducted Spurious Plot (802.11b – Ch. 11)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 48 of 66 |

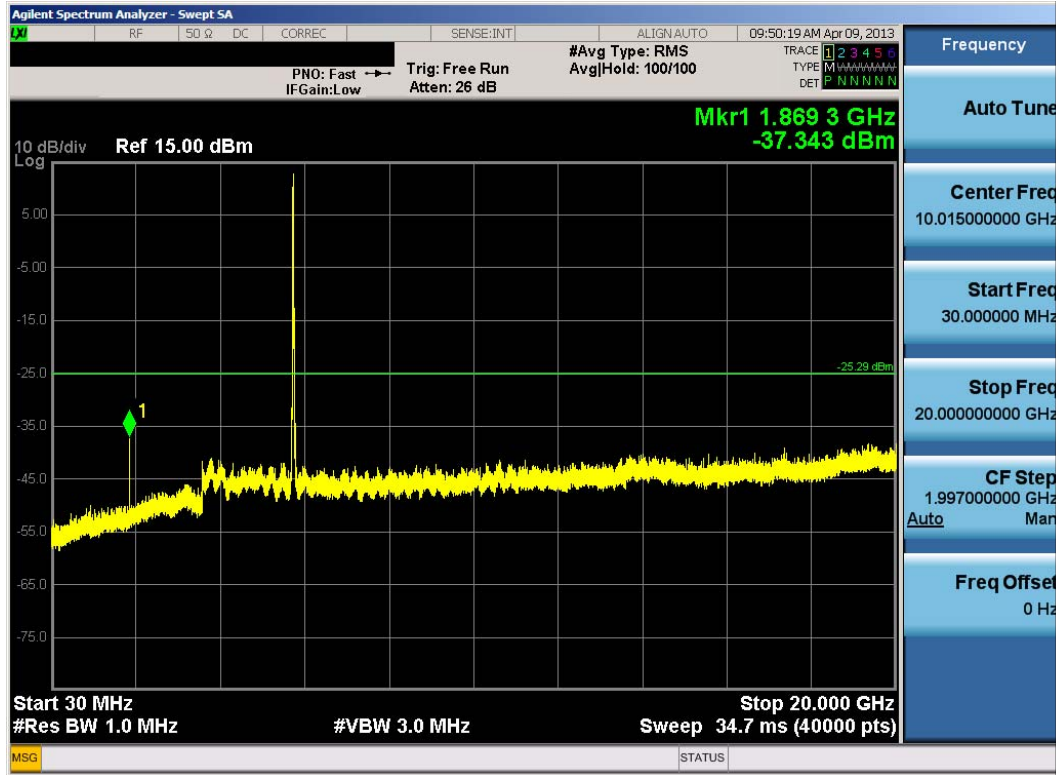


Plot 6-57. Conducted Spurious Plot (802.11a – Ch. 149)

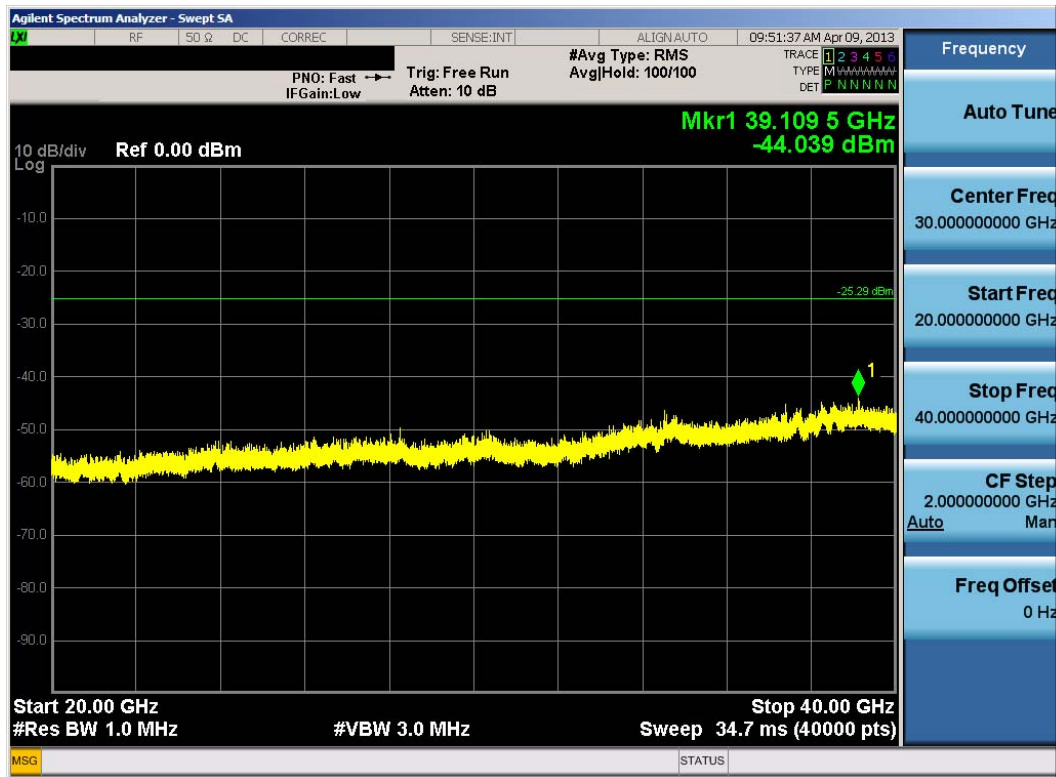


Plot 6-58. Conducted Spurious Plot (802.11a – Ch. 149)

| | | | | |
|--------------------------------------|--|---|---------|---------------------------------|
| FCC ID: A3LGT19200 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 49 of 66 |

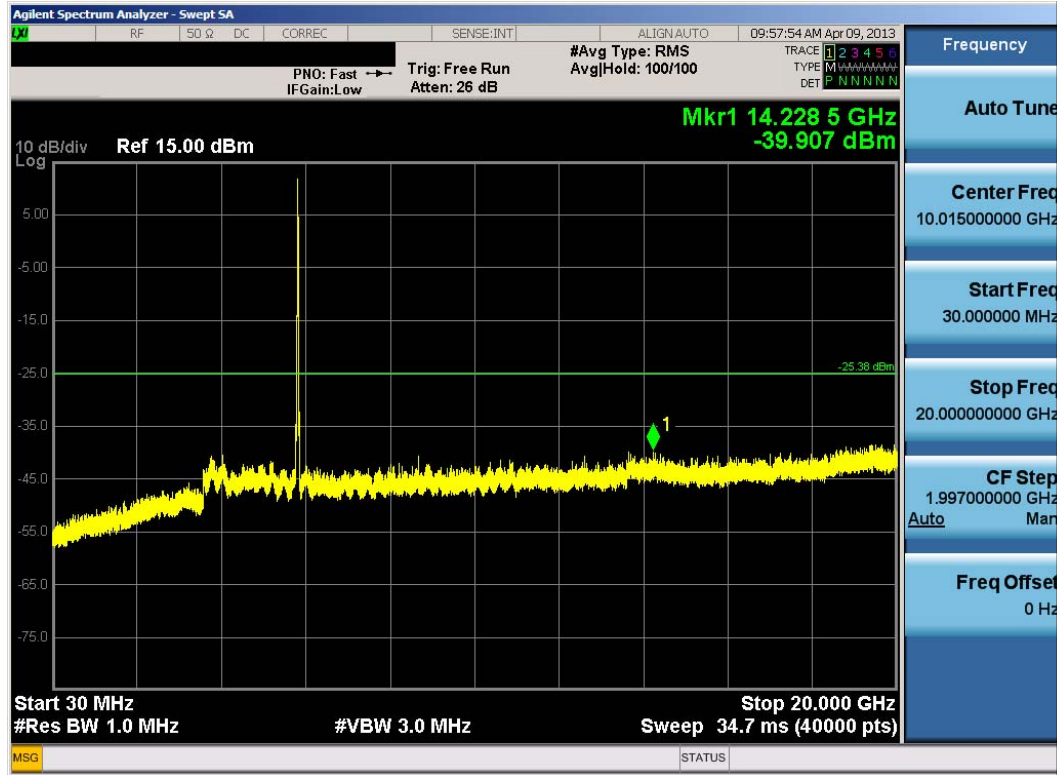

Plot 6-61. Conducted Spurious Plot (802.11a – Ch. 165)

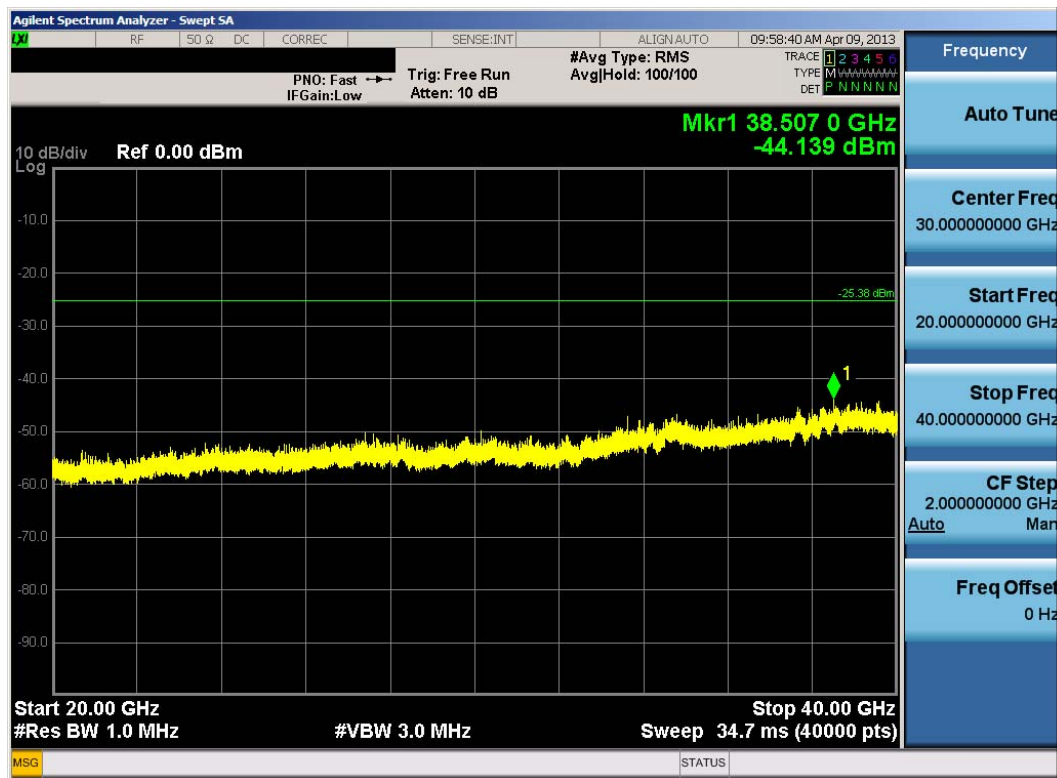

Plot 6-62. Conducted Spurious Plot (802.11a – Ch. 165)

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 51 of 66 |

6.8 Radiated Spurious Emission Measurements

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-11 per Section 15.209.

| Frequency | Field Strength [$\mu\text{V/m}$] | Measured Distance [Meters] |
|-------------------|---------------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table 6-11. Radiated Limits

Test Procedures Used

ANSI C63.10-2009



KDB 558074 v02 – Section 10.2.3.3 (average power measurements)

KDB 558074 v02 – Section 10.2.3.2 (peak power measurements)

Test Settings

Average Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz (per KDB 558074 v02 Section 10.2.3.3)
3. RBW = 1MHz
4. VBW = 3MHz
5. Detector = power average (RMS)
6. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 52 of 66 | |

7. Sweep time = 1 second (Sweep time must be $\geq 10 \times$ (number of measurement points in sweep) \times (transmission symbol period), where the transmission symbol period (in seconds) is defined as the reciprocal of the symbol rate (in bauds or symbols per second). See “Sample Calculations” section below for sample calculations on determining the minimum sweep time based on the EUT transmission data rate)
8. Measurement was performed over a single sweep

Peak Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 1MHz (per KDB 558074 v02 Section 10.2.3.2)
4. VBW = 3MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

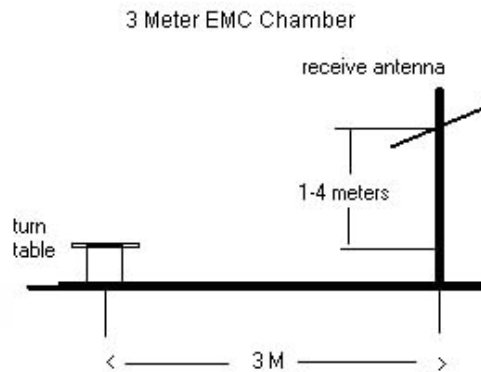




Figure 6-6. Test Instrument & Measurement Setup

| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 53 of 66 | |

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 v02 were not used to evaluate this device.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$



Determining Minimum Sweep Times

- “Transmission Symbol Period” is defined as the reciprocal of the symbol rate, R_s
- An 802.11b signal operating at 1Mbps uses BPSK modulation which uses 2 bits/symbol and, thus, has a symbol rate, R_s , of 0.5Mpsps
- $\text{Transmission Symbol Period} = 1/R_s = 2\mu s$
- $\text{Minimum sweep time} = 10 \times (\text{number of measurement points in sweep}) \times (\text{transmission symbol period}) = 10 \times 1001 \text{ points} \times 2\mu s = 20\text{ms}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Pre-amplifier Gain}$$

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 54 of 66 | |

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 4824.00 | -104.66 | Avg | H | 41.22 | 43.56 | 53.98 | -10.42 |
| 4824.00 | -100.54 | Peak | H | 41.22 | 47.68 | 73.98 | -26.30 |
| 12060.00 | -135.00 | Avg | H | 52.34 | 24.34 | 53.98 | -29.64 |
| 12060.00 | -125.00 | Peak | H | 52.34 | 34.34 | 73.98 | -39.64 |

Table 6-12. Radiated Measurements

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 4874.00 | -104.82 | Avg | H | 41.20 | 43.38 | 53.98 | -10.60 |
| 4874.00 | -100.31 | Peak | H | 41.20 | 47.89 | 73.98 | -26.09 |
| 7311.00 | -135.00 | Avg | H | 44.83 | 16.83 | 53.98 | -37.15 |
| 7311.00 | -125.00 | Peak | H | 44.83 | 26.83 | 73.98 | -47.15 |
| 12185.00 | -135.00 | Avg | H | 52.51 | 24.51 | 53.98 | -29.47 |
| 12185.00 | -125.00 | Peak | H | 52.51 | 34.51 | 73.98 | -39.47 |

Table 6-13. Radiated Measurements

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11



| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 4924.00 | -105.30 | Avg | H | 41.18 | 42.88 | 53.98 | -11.10 |
| 4924.00 | -100.96 | Peak | H | 41.18 | 47.22 | 73.98 | -26.76 |
| 7386.00 | -135.00 | Avg | H | 44.99 | 16.99 | 53.98 | -36.99 |
| 7386.00 | -125.00 | Peak | H | 44.99 | 26.99 | 73.98 | -46.99 |
| 12310.00 | -135.00 | Avg | H | 52.69 | 24.69 | 53.98 | -29.29 |
| 12310.00 | -125.00 | Peak | H | 52.69 | 34.69 | 73.98 | -39.29 |

Table 6-14. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 11490.00 | -106.01 | Avg | H | 49.11 | 50.10 | 53.98 | -3.88 |
| 11490.00 | -98.45 | Peak | H | 49.11 | 57.66 | 73.98 | -16.32 |
| 22980.00 | -135.00 | Avg | H | 57.67 | 29.67 | 53.98 | -24.31 |
| 22980.00 | -125.00 | Peak | H | 57.67 | 39.67 | 73.98 | -34.31 |

Table 6-15. Radiated Measurements

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 56 of 66 | |

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 11570.00 | -106.40 | Avg | H | 49.21 | 49.81 | 53.98 | -4.17 |
| 11570.00 | -98.90 | Peak | H | 49.21 | 57.31 | 73.98 | -16.67 |

Table 6-16. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 11650.00 | -107.56 | Avg | H | 49.34 | 48.77 | 53.98 | -5.21 |
| 11650.00 | -99.84 | Peak | H | 49.34 | 56.49 | 73.98 | -17.49 |

Table 6-17. Radiated Measurements

6.9 Radiated Restricted Band Edge Measurements

§15.205 / §15.209; RSS-210 [A8.5]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

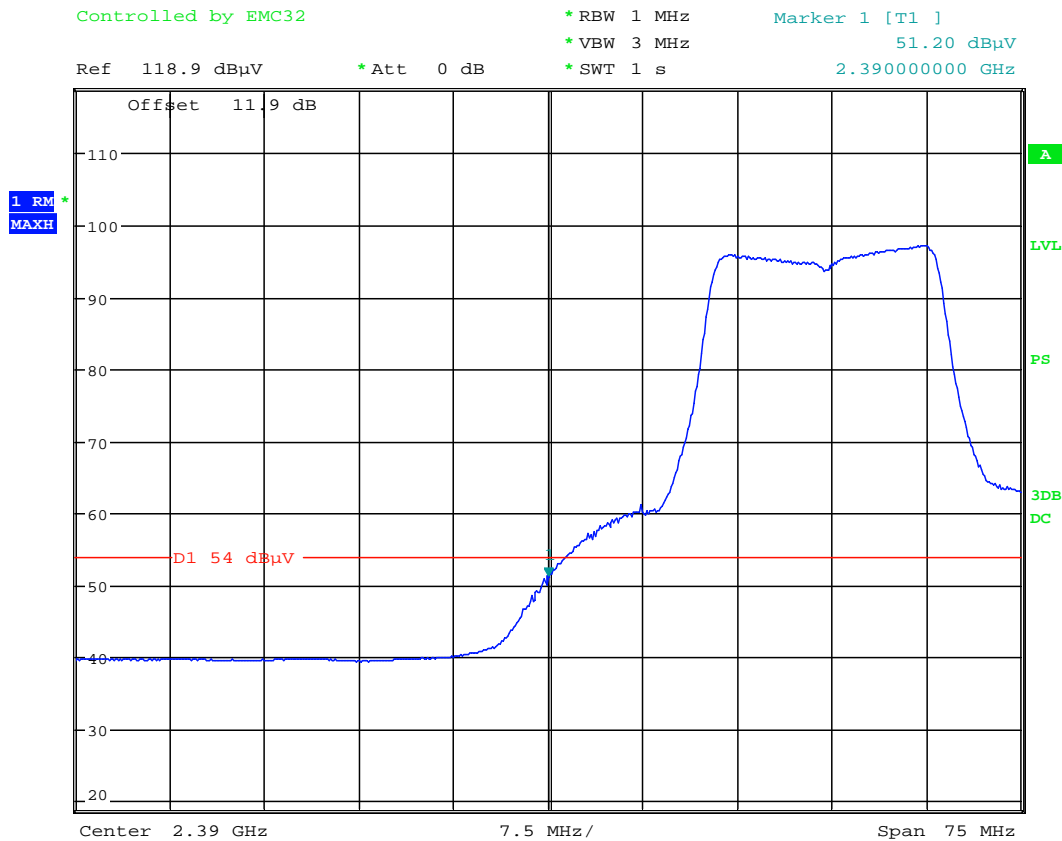
Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1




Date: 25.MAR.2013 16:47:03

Plot 6-63. Radiated Restricted Lower Band Edge Measurement (Average)



| | | | | |
|--------------------------------------|------------------------------------|---|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 58 of 66 |

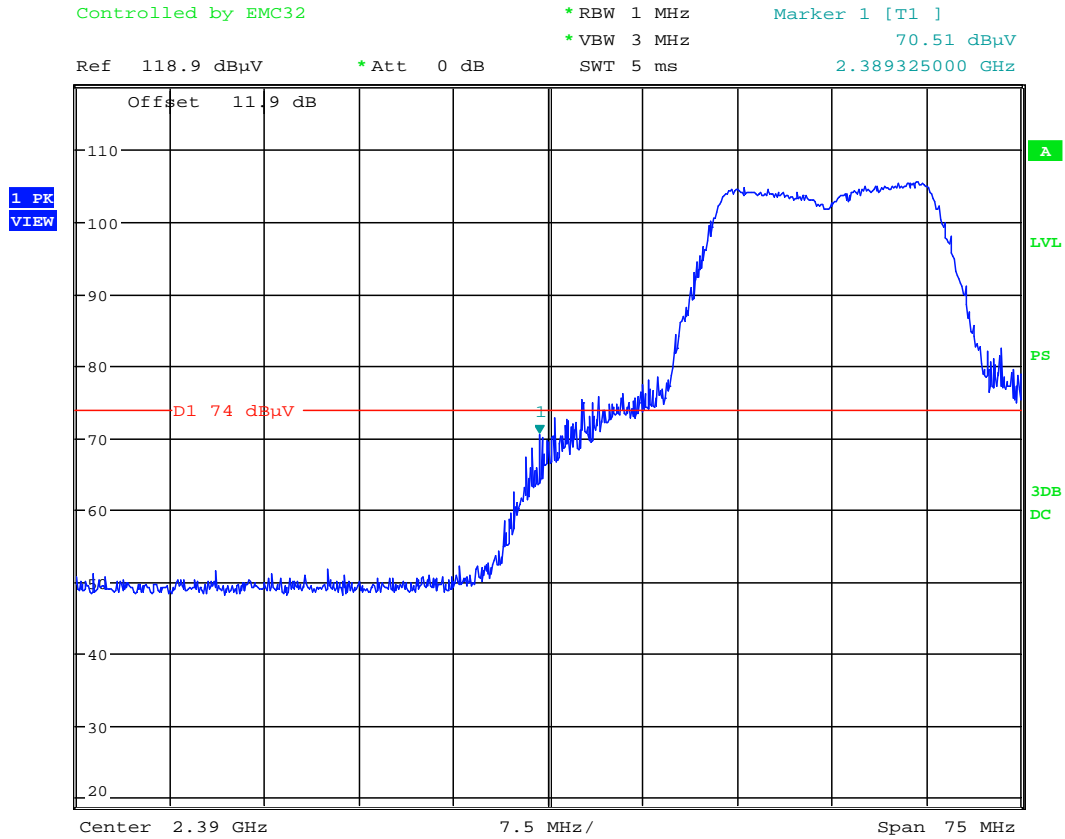Radiated Restricted Band Edge Measurements (Cont'd)
§15.205 / §15.209; RSS-210 [A8.5]



Date: 25.MAR.2013 16:46:29

Plot 6-64. Radiated Restricted Lower Band Edge Measurement (Peak)

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 59 of 66 | |

Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

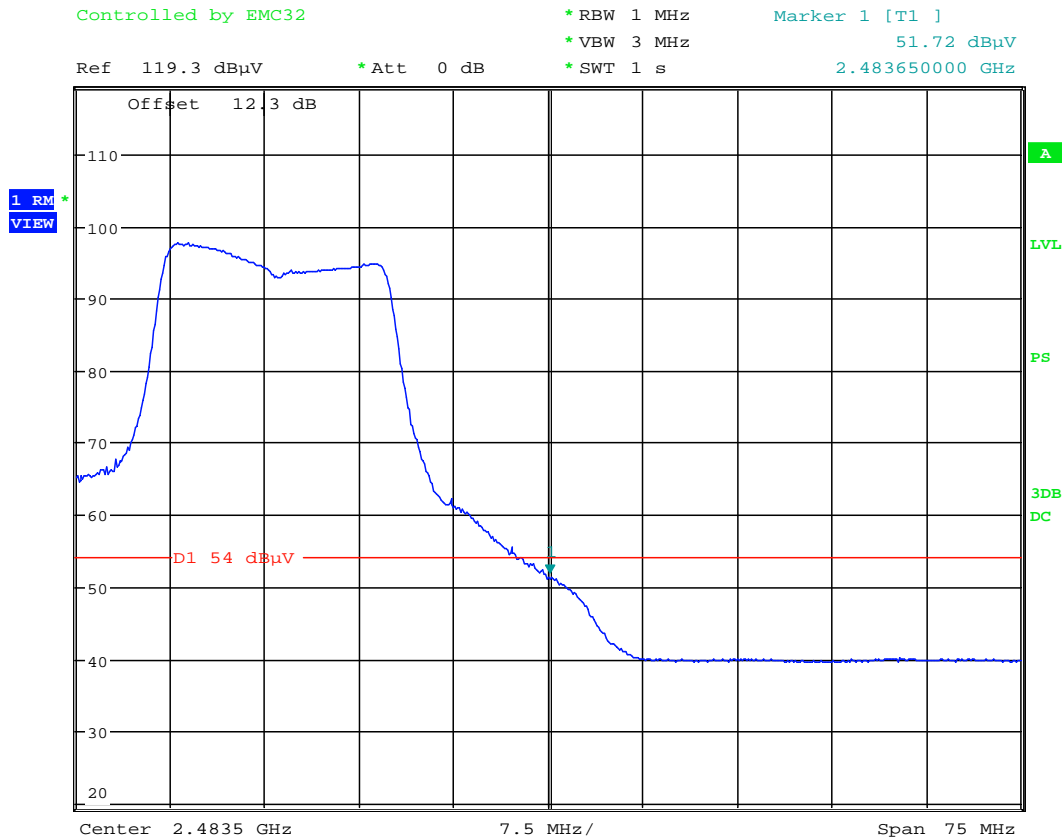
Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11




Date: 25.MAR.2013 16:02:05

Plot 6-65. Radiated Restricted Upper Band Edge Measurement (Average)



| | | | | |
|--------------------------------------|------------------------------------|---|---------------|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 60 of 66 | |

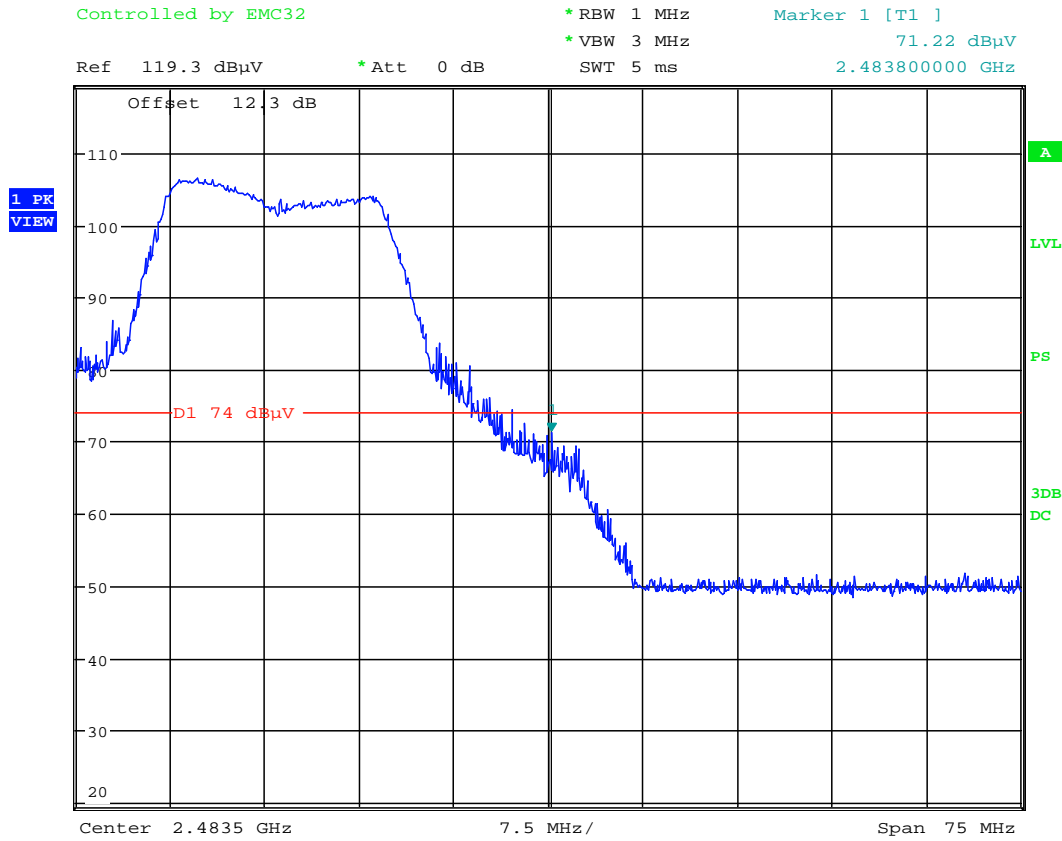Radiated Restricted Band Edge Measurements (Cont'd)
§15.205 / §15.209; RSS-210 [A8.5]




Date: 25.MAR.2013 16:01:28

Plot 6-66. Radiated Restricted Upper Band Edge Measurement (Peak)

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LGT19200 |  | FCC Pt. 15.247 802.11a/c/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | Page 61 of 66 | |

6.10 Line-Conducted Test Data

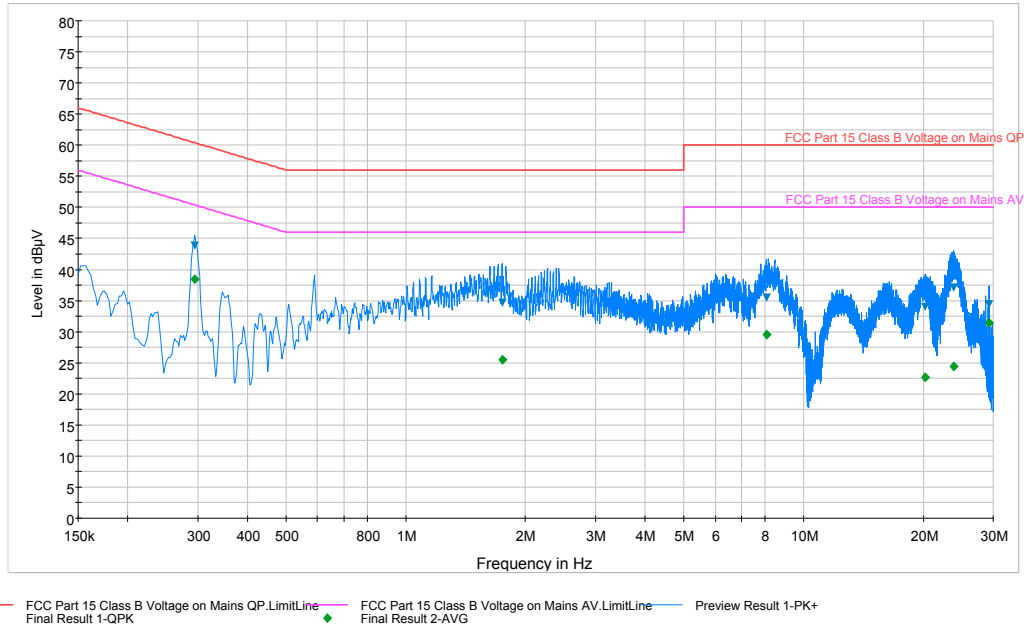§15.207; RSS-Gen [7.2.2]



Plot 6-67. Line Conducted Plot with 802.11b (L1)

| Frequency MHz | Line | Corr. dB | QuasiPeak dBµV | Limit dBµV | Margin dB | Average dBµV | Limit dBµV | Margin dB |
|---------------|------|----------|----------------|------------|-----------|--------------|------------|-----------|
| 0.294 | L1 | 0.1 | 43.80 | 60.40 | 16.60 | 38.50 | 50.40 | 11.90 |
| 1.748 | L1 | 0.2 | 34.60 | 56.00 | 21.40 | 25.50 | 46.00 | 20.50 |
| 8.066 | L1 | 0.3 | 35.50 | 60.00 | 24.50 | 29.60 | 50.00 | 20.40 |
| 20.263 | L1 | 0.7 | 34.10 | 60.00 | 25.90 | 22.70 | 50.00 | 27.30 |
| 23.933 | L1 | 0.8 | 37.10 | 60.00 | 22.90 | 24.50 | 50.00 | 25.50 |
| 29.236 | L1 | 1.0 | 34.50 | 60.00 | 25.50 | 31.40 | 50.00 | 18.60 |

Table 6-18. Line Conducted Data with 802.11b (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
- Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 62 of 66 |

Line-Conducted Test Data (Cont'd)

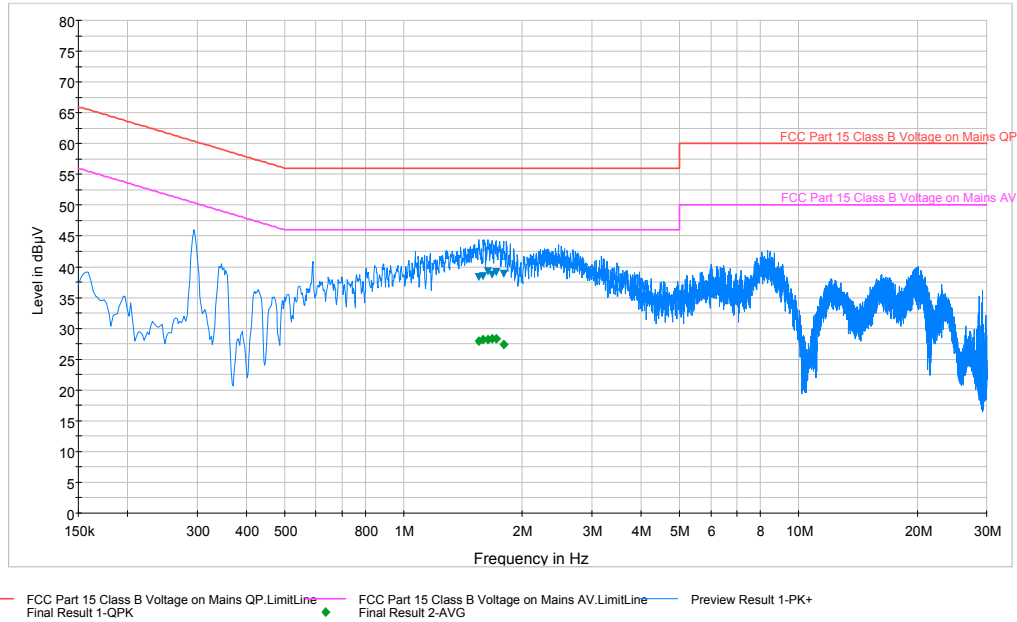§15.207; RSS-Gen [7.2.2]



Plot 6-68. Line Conducted Plot with 802.11b (N)

| Frequency MHz | Line | Corr. dB | QuasiPeak dBµV | Limit dBµV | Margin dB | Average dBµV | Limit dBµV | Margin dB |
|---------------|------|----------|----------------|------------|-----------|--------------|------------|-----------|
| 1.552 | N | 0.2 | 38.40 | 56.00 | 17.60 | 27.90 | 46.00 | 18.10 |
| 1.592 | N | 0.2 | 38.50 | 56.00 | 17.50 | 28.30 | 46.00 | 17.70 |
| 1.635 | N | 0.2 | 39.20 | 56.00 | 16.80 | 28.30 | 46.00 | 17.70 |
| 1.676 | N | 0.2 | 38.80 | 56.00 | 17.20 | 28.40 | 46.00 | 17.60 |
| 1.714 | N | 0.2 | 39.10 | 56.00 | 16.90 | 28.30 | 46.00 | 17.70 |
| 1.793 | N | 0.2 | 38.80 | 56.00 | 17.20 | 27.50 | 46.00 | 18.50 |

Table 6-19. Line Conducted Data with 802.11b (N)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT19200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 63 of 66 |

Line-Conducted Test Data (Cont'd)

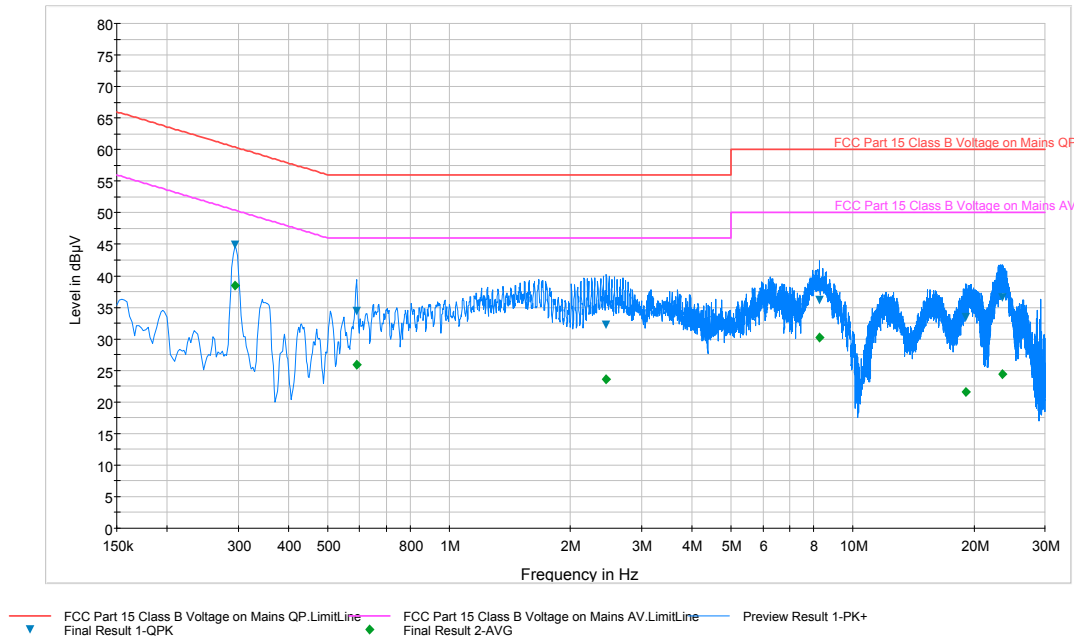§15.207; RSS-Gen [7.2.2]



Plot 6-69. Line Conducted Plot with 802.11a (L1)

| Frequency MHz | Line | Corr. dB | QuasiPeak dBµV | Limit dBµV | Margin dB | Average dBµV | Limit dBµV | Margin dB |
|---------------|------|----------|----------------|------------|-----------|--------------|------------|-----------|
| 0.294 | L1 | 0.1 | 44.90 | 60.40 | 15.50 | 38.50 | 50.40 | 11.90 |
| 0.589 | L1 | 0.1 | 34.40 | 56.00 | 21.60 | 25.90 | 46.00 | 20.10 |
| 2.454 | L1 | 0.2 | 32.30 | 56.00 | 23.70 | 23.60 | 46.00 | 22.40 |
| 8.284 | L1 | 0.3 | 36.10 | 60.00 | 23.90 | 30.20 | 50.00 | 19.80 |
| 19.133 | L1 | 0.7 | 33.50 | 60.00 | 26.50 | 21.60 | 50.00 | 28.40 |
| 23.568 | L1 | 0.8 | 36.50 | 60.00 | 23.50 | 24.40 | 50.00 | 25.60 |

Table 6-20. Line Conducted Data with 802.11a (L1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT9200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 64 of 66 |

Line-Conducted Test Data (Cont'd)

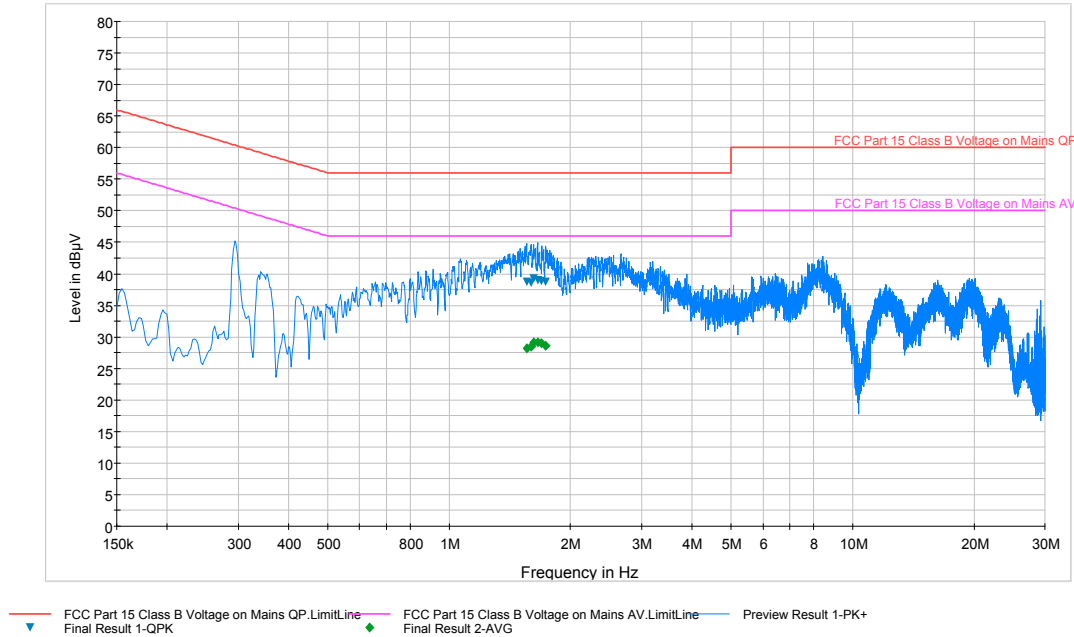§15.207; RSS-Gen [7.2.2]



Plot 6-70. Line Conducted Plot with 802.11a (N)

| Frequency MHz | Line | Corr. dB | QuasiPeak dBµV | Limit dBµV | Margin dB | Average dBµV | Limit dBµV | Margin dB |
|---------------|------|----------|----------------|------------|-----------|--------------|------------|-----------|
| 1.556 | N | 0.2 | 38.70 | 56.00 | 17.30 | 28.20 | 46.00 | 17.80 |
| 1.595 | N | 0.2 | 38.60 | 56.00 | 17.40 | 28.50 | 46.00 | 17.50 |
| 1.617 | N | 0.2 | 39.20 | 56.00 | 16.80 | 29.10 | 46.00 | 16.90 |
| 1.658 | N | 0.2 | 39.00 | 56.00 | 17.00 | 29.10 | 46.00 | 16.90 |
| 1.696 | N | 0.2 | 38.90 | 56.00 | 17.10 | 29.00 | 46.00 | 17.00 |
| 1.736 | N | 0.2 | 38.80 | 56.00 | 17.20 | 28.60 | 46.00 | 17.40 |

Table 6-21. Line Conducted Data with 802.11a (N)



Notes:

- 1.All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
- 2.The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- 3.Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- 4.QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
- 5.Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
- 6.Traces shown in plot are made using a peak detector.
- 7.Deviations to the Specifications: None.

| | | | | |
|--------------------------------------|------------------------------------|--|--|---------------------------------|
| FCC ID: A3LGT9200 | | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 65 of 66 |

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LGTI9200** is in compliance with Part 15C of the FCC Rules.

| | | | | |
|---|---|---|---|--|
| FCC ID: A3LGTI9200 |  | FCC Pt. 15.247 802.11a/ac/b/g/n MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1303210521.A3L | Test Dates: 03/20/13 - 04/09/13 | EUT Type: Portable Handset | | Page 66 of 66 |