

EMC TEST REPORT

Project No.	LBE20123684	Issue No.	0
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea	
	Date of application	July 18, 2012	
EUT	Type of device	<input checked="" type="checkbox"/> Class B personal computers and peripherals <input type="checkbox"/> All other devices	
	Equipment authorization	<input type="checkbox"/> Declaration of Conformity <input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification	
	FCC ID	A3LGTS5292	
	Kind of product	Mobile Phone	
	Model No.	GT-S5292	
	Variant Model No.	Refer to clause 4.6	
	Manufacturer	TIANJIN SAMSUNG TELECOM TECHNOLOGY CO., LTD. 300385 No.9, WeiWu Rd., Micro Electronic Industrial Park, Xiqing Dist, Tianjin, China	
Applied Standards	FCC Part 15, Subpart B, Class B / ANSI C63.4-2003		
Test Period	July 19, 2012 ~ July 20, 2012		
Issue date	July 23, 2012		

Test result : Complied

The equipment under test has found to be compliant with the applied standards.
(Refer to the attached test result for more detail.)

Tested by : Young-Jin Kim



Reviewed by : Tae-Young Jang



The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CS & Environment center.



416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea
Tel: 82 31 279 1750, Fax: 82 31 279 1745

Table of contents

1. Report Information

1.1 Revision history	3
----------------------------	---

2. Summary of test results

2.1 Emission	3
--------------------	---

3. General Information

3.1 Test facility	3
-------------------------	---

4. Test Configuration

4.1 Test Peripherals	4
4.2 EUT operating mode	4
4.3 Details of Sampling	4
4.4 Used cable description	5
4.5 Test arrangement	5
4.6 EUT Description	6
4.7 Clock Frequencies	6
4.8 Test configuration and condition	6
4.9 Measurement uncertainty	7

5. Result of individual tests

5.1 Conducted disturbance	8
5.2 Radiated disturbance	10

1. Report Information

1.1 Revision history

No	Revised detailed information
Issue 0	- LBE20123684 (SAMSUNG)

2. Summary of test results

1.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
<input checked="" type="checkbox"/>	Conducted Disturbance (Mains port)	FCC Part 15 Subpart B / ANSI C63.4-2003 (Class B)	Complied
<input checked="" type="checkbox"/>	Radiated Disturbance		Complied

3. General Information

3.1 Test facility

The CS & Environment center is located on Samsung Electronics Co., Ltd. at 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2. and Shielded rooms.

The CS & Environment center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID / DoC
A	Mobile Phone	GT-S5292	-	SAMSUNG	A3LGTS5292
B	Battery	AB463651BU	AA1BB11PS/4-B	SAMSUNG	-
C	Headset	EHS61ASFWE	-	SAMSUNG	-
D	Data Cable	ECC1DU0BBK	-	SAMSUNG	-
E	microSD Card	1GB	-	SANDISK	-
F	Desktop PC	DCME	8JBVSBX	DELL	DoC
G	LCD Monitor	GH15LS	N719HVELA11890L	SAMSUNG	DoC
H	Mouse	MOARUO	MS-S5-AR03-01	SAMSUNG	DoC
I	Keyboard	GP-K5000U	15000099	SAMSUNG	DoC
J	Router	3CGS U08	AB/9XRQAC0024825	3COM	DoC
K	Power Supply	PW150	KA1203N03	AULT	DoC

4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

Operating Mode 1	USB Mode (Data Communication)
------------------	-------------------------------

4.3 Details of Sampling


Customer selected, single unit.

4.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:

No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable	0.8	Yes	From EUT to Desktop PC
2	Headset	1.5	No	For Headset
3	USB Cable	1.6	Yes	For Keyboard
4	USB Cable	1.7	Yes	For Mouse
5	Power	1.7	No	For Desktop PC
6	Power	1.7	No	For Monitor
7	Power	3.9	No	For Power Supply with Router
8	RGB Cable	1.8	Yes	From Monitor to PC
9	LAN cable	1.5	Yes	From Desktop PC to Router
10	LAN cable	1.5	Yes	From Router to Building Network

4.5 Test arrangement

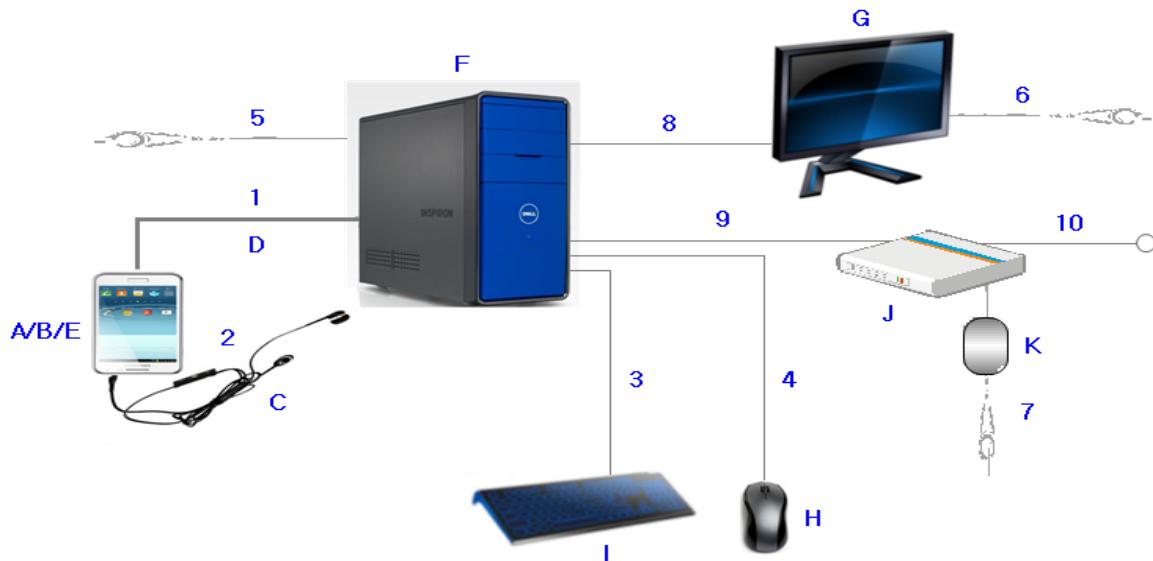

4.6 EUT Description

4.6.1 The following features describe EUT represented by this report:

Item	Specification	
Frequency Range	GSM 850	TX : 824.2 ~ 848.8 MHz RX : 869.2 ~ 893.8 MHz
	PCS 1900	TX : 1 850.2 ~ 1 909.8 MHz RX : 1 930.2 ~ 1 989.8 MHz
Operating Temperature (°C)	-20 ~ +50	
Operating Humidity (%)	0 ~ 95	

4.6.2 The variant models

- None

4.7 Clock Frequencies

Kind of Clocks	Frequency [MHz]
CPU	312

4.8 Test configuration and condition

- The EUT exercise program which is the samsung standardized emission test program for windows was used during all EMC measurements were tested. This program was contained on the PC hard disk drive. Once loaded, the program sequentially exercises each system component in turn.
- The EUT was exercised during the testing by data read and write cycles repeated with internal storage devices. At the end of the test, the copied back data was compared with original.
- The EUT was connected to the PC by using USB data cable to charge.

The system was configured for testing in a typical fashion that a customer would normally use, and was tested while in an automated non-attendant mode.

Power source for the EUT operating was supplied by CVCF made by the Pacific Power Source Corp.

- **Test Voltage : AC 120 V, 60 Hz**

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	±3.24 dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	±4.59 dB
	Vertical	±4.75 dB
Radiated Disturbance (1 GHz ~ 6 GHz)	Horizontal	±4.18 dB
	Vertical	±4.15 dB

5. Results of individual test

5.1 Conducted disturbance

Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports

Frequency range Limits MHz	Resolution Bandwidth	Limits dB(µV)	
		Quasi-peak	Average
0,15 to 0,50	9 kHz	66 to 56	56 to 46
0,50 to 5	9 kHz	56	46
5 to 30	9 kHz	60	50

NOTE 1 The lower limit shall apply at the transition frequency.
 NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E4I-093	Test Receiver	ESCI3	R&S	100086	2011-11-11	12
E3I-259	LISN	ENV216	R&S	101369	2011-10-11	12
E3I-050	LISN	ESH3-Z5	R&S	100263	2011-10-12	12

5.1.2 Temperature and humidity condition

Test date	2012-07-20	Test engineer	Young-Jin Kim
Climate condition	Ambient temperature	22.2 °C	Limit (15.0 to 35.0) °C
	Relative humidity	37.5 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	100.3 kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR8)		

5.1.3 Test results

- Operating Mode 1: AC Mains

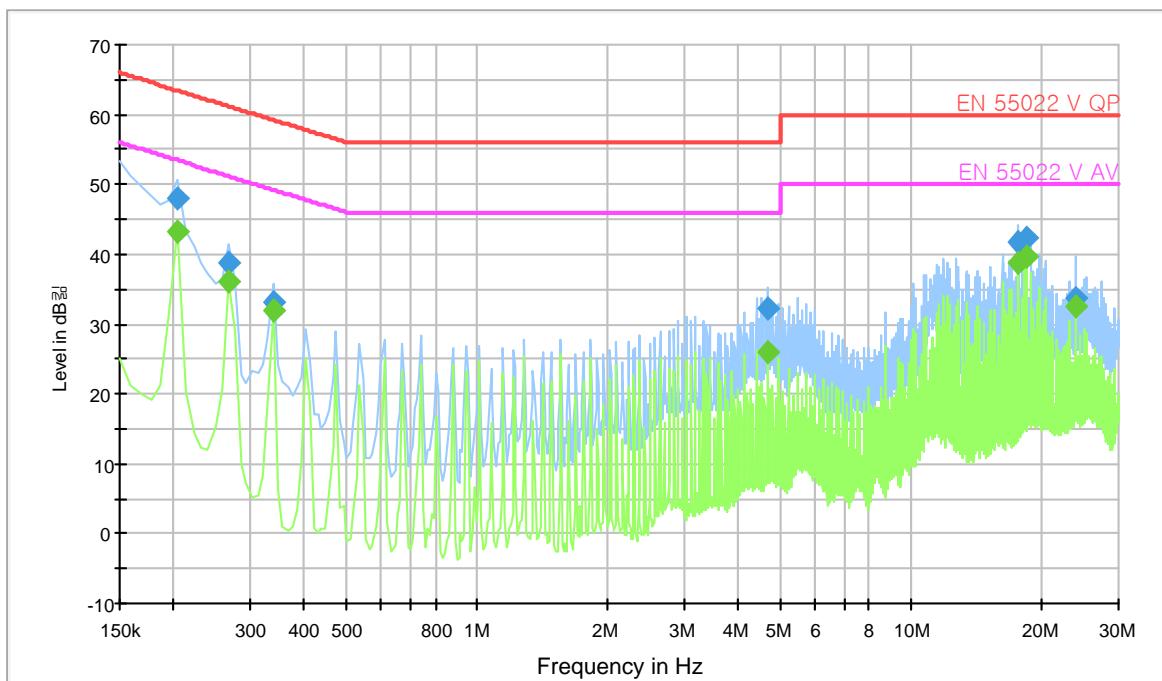

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Quasi-peak final measurement results table:

Frequency (MHz)	Level (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.204	47.9	N	10.0	15.5	63.4
0.267	38.8	N	10.0	22.4	61.2
0.339	33.1	N	10.0	26.1	59.2
4.659	32.2	L1	9.8	23.8	56.0
17.691	41.8	N	10.0	18.2	60.0
18.366	42.4	N	10.0	17.6	60.0
23.910	33.8	N	10.1	26.2	60.0

Average final measurement results table:

Frequency (MHz)	Level (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.204	43.3	N	10.0	10.2	53.4
0.267	36.2	N	10.0	15.0	51.2
0.339	31.9	N	10.0	17.3	49.2
4.659	26.0	L1	9.8	20.0	46.0
17.691	38.8	N	10.0	11.2	50.0
18.366	39.7	N	10.0	10.3	50.0
23.910	32.5	N	10.1	17.5	50.0

Note 2) Level (QP and/or AV) = Meter Reading (QP and/or AV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or AV) = Limit – Level (QP and/or AV)

QP = Quasi-Peak, AV = Average

5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [kHz]	Video Bandwidth [kHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detectors.

Peak/Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency in accordance with internal maximum operating frequency at a measurement distance of 3 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	1 (PK / AV)	3 (PK) 10 Hz (AV)	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and average detectors.

Limits for radiated disturbance of Class B ITE at a measuring distance of 3 m and 10 m

Frequency range Limits [MHz]	Field Strength		
	3 m [μ V/m]	3 m [dB(μ V/m)]	10 m [dB(μ V/m)]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Results checked manually; and points close to the limit line were re-measured.

5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E3I-130	BILOG Antenna	CBL6112D	TESEQ	25513	2010-11-12	24
E3I-213	Preamplifier	317	SONOMA	282424	2011-12-06	12
E3I-003	BILOG Antenna	Schaffner	CBL6112B	2805	2012-04-19	24
E3I-214	Preamplifier	317	SONOMA	282425	2011-12-06	12
E3I-231	Horn Antenna	3115	ETS Lindgren	00101620	2012-01-12	24
E3I-233	EMI Test Receiver	ESU-26	R&S	100364	2011-10-24	12
E4I-013	EMI Test Receiver	ESU-08	R&S	100085	2012-03-22	12


5.2.2 Temperature and humidity condition

Test date	2012-07-19	Test engineer	Young-Jin Kim
Climate condition	Ambient temperature	21.4 °C	Limit (15.0 to 35.0) °C
	Relative humidity	38.0 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	100.1 kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber (SAC4)		

5.2.3 Test results

Operating Mode 1

- Frequency range: 30 ~ 1 000 MHz

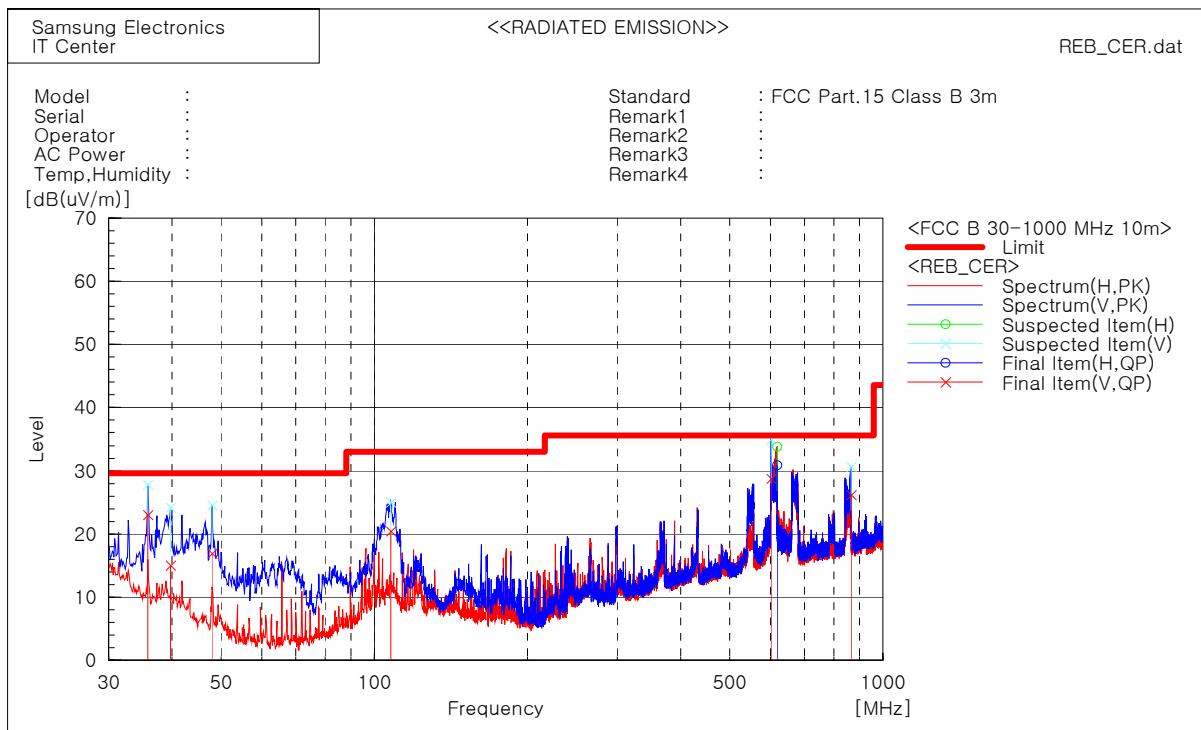

Final Result

No.	Frequency [MHz]	(P) QP [dB(uV)]	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	35.820	V	44.7	-21.7	23.0	29.5	6.5	100.0	23.0	2
2	39.700	V	38.6	-23.6	15.0	29.5	14.5	199.0	262.0	2
3	47.945	V	44.7	-27.8	16.9	29.5	12.6	100.0	271.0	2
4	107.842	V	44.6	-24.2	20.4	33.0	12.6	100.0	257.0	2
5	602.058	V	43.8	-15.0	28.8	35.5	6.7	197.0	128.0	2
6	618.669	H	44.1	-13.2	30.9	35.5	4.6	100.0	21.0	1
7	866.019	V	37.9	-11.7	26.2	35.5	9.3	299.0	144.0	2


Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Level (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit – Level (QP)

QP = Quasi-Peak

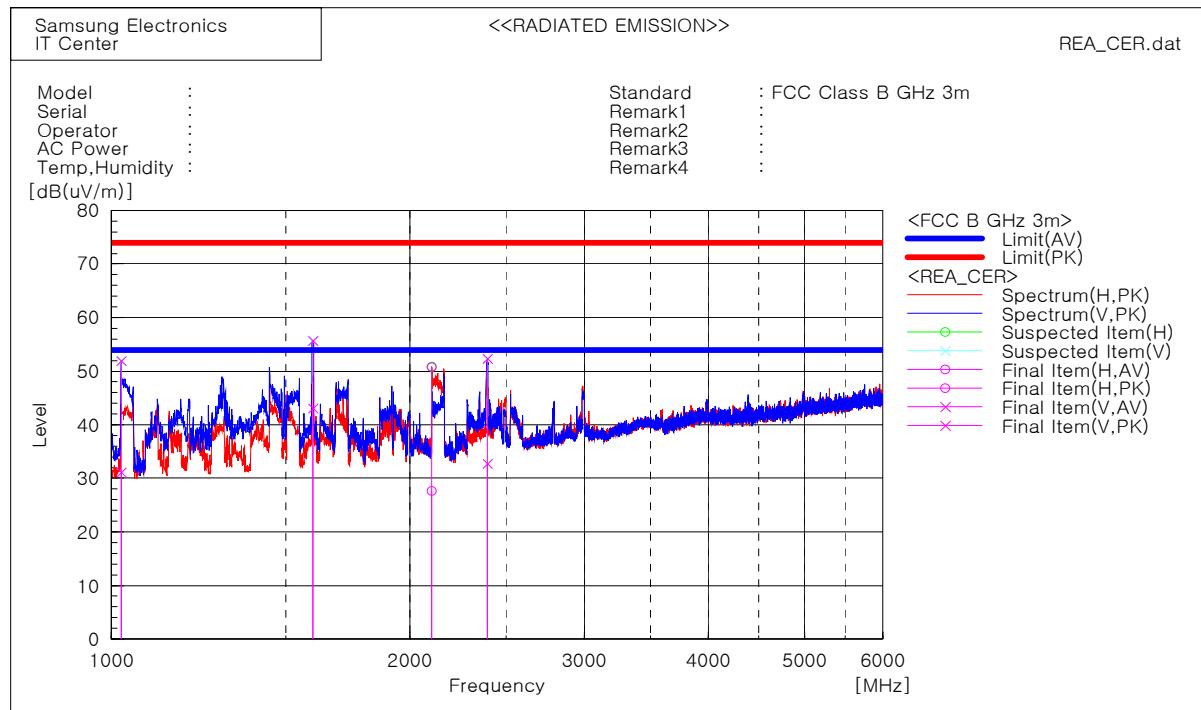- Frequency range: 1 000 ~ 6 000 MHz

Final Result
--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(uV)]	c.f [dB(1/m)]	Result [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
1	2105.231	34.3	-6.6	27.7	54.0	26.3	100.0	4.0

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(uV)]	c.f [dB(1/m)]	Result [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
1	2105.231	57.4	-6.6	50.8	74.0	23.2	100.0	4.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(uV)]	c.f [dB(1/m)]	Result [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
1	1022.500	43.4	-12.2	31.2	54.0	22.8	100.0	231.0
2	1597.325	52.8	-9.7	43.1	54.0	10.9	100.0	55.0
3	2395.632	38.0	-5.2	32.8	54.0	21.2	100.0	29.0

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(uV)]	c.f [dB(1/m)]	Result [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
1	1022.500	64.2	-12.2	52.0	74.0	22.0	100.0	231.0
2	1597.325	65.4	-9.7	55.7	74.0	18.3	100.0	55.0
3	2395.632	57.6	-5.2	52.4	74.0	21.6	100.0	29.0

Note1) Receiving antenna polarization : Horizontal, Vertical
Test Distance : 3 m, Antenna Height : 1 to 4 meters
Level (PK and/or AV) = Reading (PK and/or AV) + c.f (Antenna Factor + Cable Loss - Amp. Gain)
Margin (PK and/or AV) = Limit – Level (PK and/or AV)
PK = Peak, AV = Average