

TEST REPORT

of

FCC Part 15 Subpart B&C §15.247/RSS-210 Issue 7, RSS-Gen Issue 2

FCC ID/IC Certification: A3LHM1000/649E-HM1000

Equipment Under Test : Bluetooth Mono Headset
Model Name : HM1000
Serial No. : N / A
Applicant : SAMSUNG ELECTRONICS CO.,LTD.
Manufacturer : SAMSUNG ELECTRONICS HUIZHOU CO.,LTD.
Date of Test(s) : 2009.12.02 ~ 2009.12.10
Date of Issue : 2009.12.10

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2009.12.10

Duke Ko

Approved By



Date

2009.12.10

Charles Kim

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

INDEX

<u>Table of Contents</u>	<u>Page</u>
1. General Information -----	3
2. Transmitter AC Power Line Conducted Emission-----	7
3. Receiver AC Power Line Conducted Emission-----	12
4. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission-----	16
5. Receiver Radiated Spurious Emission-----	31
6. 20dB Bandwidth and 99% BW-----	33
7. Maximum Peak Output Power -----	41
8. Hopping Channel Separation -----	46
9. Number of Hopping Frequency -----	49
10. Time of Occupancy(Dwell Time) -----	53
11. Antenna Requirement -----	60

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

1. General Information

1.1. Testing Laboratory

SGS Testing Korea Co., Ltd.

- 705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.

www.electrolab.kr.sgs.com

Telephone : +82 +31 428 5700

FAX : +82 +31 427 2371

1.2. Details of Applicant

Applicant : SAMSUNG ELECTRONICS CO.,LTD.
Address : 416, Maetan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea
Contact Person : Kim, Jin Kyeong
Phone No. : +82 +31 301 4187
Fax No. : +82 +31 279 7609

1.3. Description of EUT

Kind of Product	Bluetooth Mono Headset
Model Name	HM1000
Serial Number	N / A
Power Supply	DC 3.7 V (Li-poly Battery)
Frequency Range	2402 ~ 2480 MHz
Modulation Technique	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels	79
Operating Conditions	-20 ~ 50 °C
Antenna Type	Integral Type (Chip Antenna)
Antenna Gain	2.38 dBi
H/W Version	REV1.0
S/W Version	HM1000_SW01

1.4. Declaration by the manufacturer

- N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

1.5. Information about the FHSS characteristics:

1.5.1. Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1600 hops/s.

1.5.2. Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

1.5.3. System Receiver Input Bandwidth

Each channel bandwidth is 1MHz

1.6. Test Equipment List

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Signal Generator	Rohde & Schwarz	SMR40	Jan. 21, 2010
Bluetooth Tester	TESOM	TC-3000B	Mar. 12, 2010
Directional Coupler	Narda	4226-20	Jan. 06, 2010
Preamplifier	H.P	8447F	Jul. 02, 2010
Preamplifier	Agilent	8449B	Apr. 01, 2010
High Pass Filter	Wainwright	WHK3.0/18G-10SS	Sep. 29, 2010
Two-Line V-Network	R & S	ENV216	Jan. 07, 2010
Test Receiver	R & S	ESHS10	Jul. 13, 2010
Test Receiver	R & S	ESU65	Apr. 21, 2010
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	Jul. 22, 2010
Horn Antenna	R & S	HF 906	Jan. 10, 2010
Horn Antenna	Schwarzbeck	BBHA 9170	Jun. 16, 2010
Antenna Master	EMCO	1050	N.C.R
Turn Table	Daeil EMC	DI-1500	N.C.R
Anechoic Chamber	SY Corporation	L × W × H (9.6 m×6.4 m×6.6 m)	Jan. 31, 2010
Anechoic Chamber	SY Corporation	L × W × H (6.5 m×3.5 m×3.5 m)	N.C.R

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.7. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD:FCC Part15, RSS-210,RSS-Gen			
Section in FCC 15	Section in RSS-210 RSS-Gen	Test Item	Result
15.207	RSS-Gen 7.2.2	Transmitter AC Power Line Conducted Emission	Complied
15.107	RSS-Gen 7.2.2	Receiver AC Power Line Conducted Emission	Complied
15.205(a) 15.209 15.247(d)	A8.5	Transmitter Radiated Spurious Emissions Conducted Spurious Emission	Complied
15.109(a)	RSS-Gen 6	Receiver Radiated Spurious Emission	Complied
15.247(a)(1)	A8.1(1)	20 dB Bandwidth and 99% BW	Complied
15.247(b)(1)	A8.4(2)	Maximum Peak Output Power	Complied
15.247(a)(1)	A8.1(2)	Frequency Separation	Complied
15.247(a)(1)(iii)	A8.1(4)	Number of Hopping Frequency	Complied
15.247(a)(1)(iii)	A8.1(4)	Time of Occupancy (Dwell Time)	Complied

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

1.8. Conclusion of worst-case and operation mode

The EUT has three type of modulation (GFSK, $\pi/4$ DQPSK and 8DPSK). Each output power as following:

Modulation Type	Ouput power(dBm)	Output power(mW)	Symbol rate
GFSK(2480 MHz)	2.33	1.71	1Mbps
$\pi/4$ DQPSK(2480 MHz)	4.81	3.03	2Mbps
8DPSK(2480 MHz)	4.85	3.05	3Mbps

Therefore all applicable requirements were tested to the two type of higher output power modulation (GFSK and 8DPSK) at high channel (2480 MHz).


The field strength of spurious emission was measured in three orthogonal EUT positions(x-axis, y-axis and z-axis). Worst case is z-axis.

1.9 Test report revision

Revision	Report number	Description
0	F690501/RF-RTL003492	Initial

2. Transmitter AC Power Line Conducted Emission

2.1. Test Setup

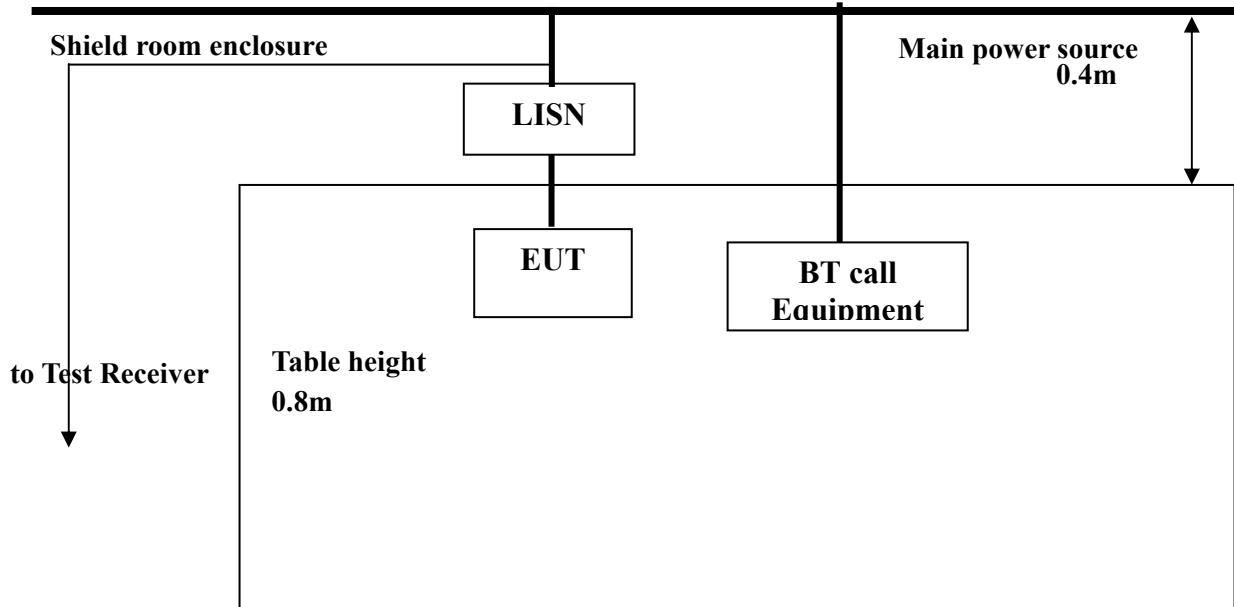

2.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.50	66-56*	56-46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

1. The test procedure is performed in a 6.5m × 3.6m × 3.6m (L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W) × 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.4. Test Results(Worst case configuration_8DPSK mode)

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : 24 °C

Relative humidity : 47 % R.H.

Frequency range : 0.15 MHz – 30 MHz

Measured Bandwidth : 9 kHz

FREQ. (MHz)	LEVEL(dBuV)		LINE	LIMIT(dBuV)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.15	33.40	14.00	H	66.00	56.00	32.60	42.00
1.72	28.30	22.10	H	56.00	46.00	27.70	23.90
3.91	27.10	26.50	H	56.00	46.00	28.90	19.50
6.01	15.80	11.40	H	60.00	50.00	44.20	38.60
13.56	20.60	18.00	H	60.00	50.00	39.40	32.00
25.06	28.80	22.40	H	60.00	50.00	31.20	27.60
0.18	32.50	12.70	N	64.72	54.72	32.22	42.02
1.65	26.30	19.20	N	56.00	46.00	29.70	26.80
3.91	32.30	30.90	N	56.00	46.00	23.70	15.10
5.96	20.90	17.60	N	60.00	50.00	39.10	32.40
13.56	23.30	19.60	N	60.00	50.00	36.70	30.40
25.06	30.10	24.60	N	60.00	50.00	29.90	25.40


Note ;

Line (H) : Hot

Line (N) : Neutral

Plot of Conducted Power line

Test mode : (Hot)

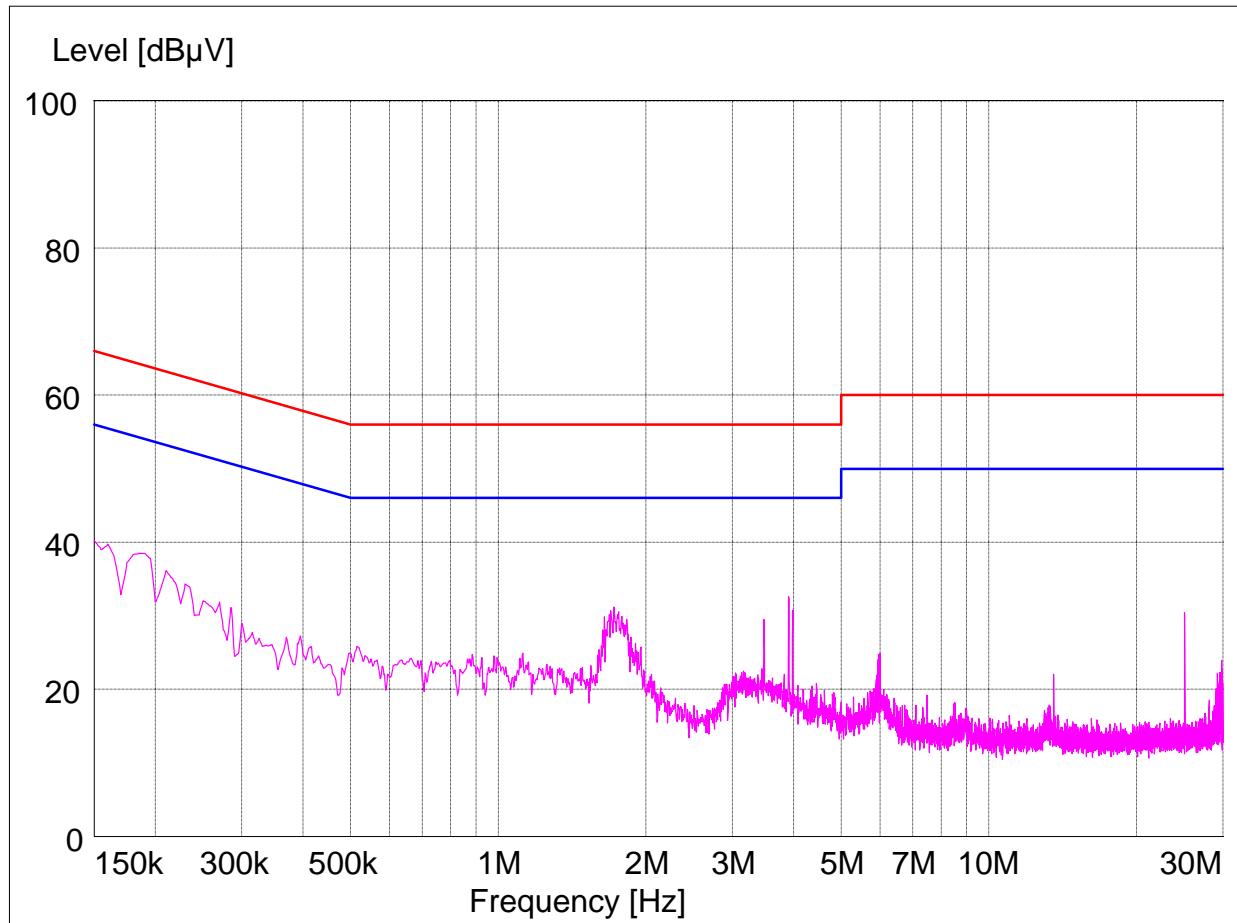


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

Test mode : (Neutral)

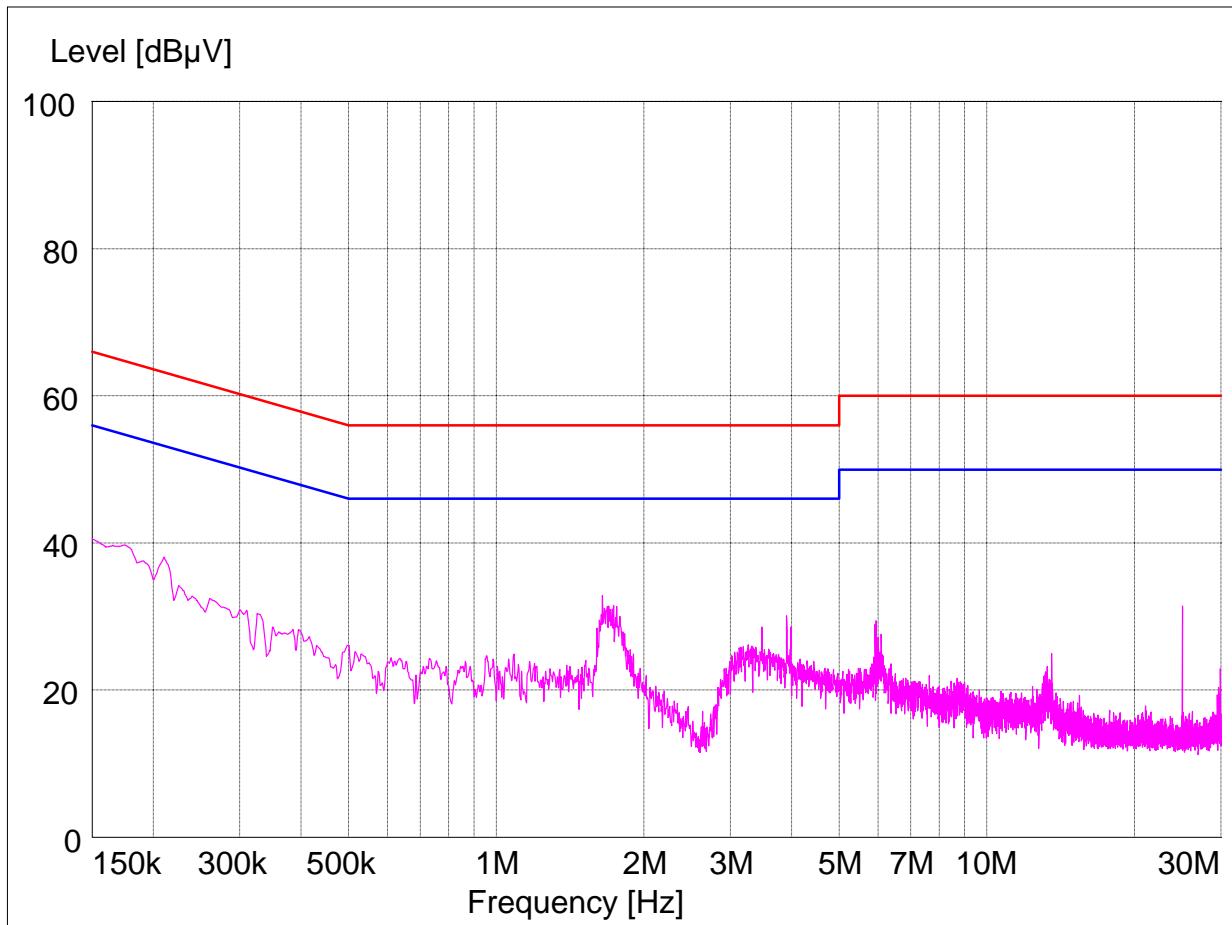

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

3. Receiver AC Power Line Conducted Emission

3.1. Test Setup- Same as clause 2.1.

3.2. Limit

According to §15.107(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.50	66-56*	56-46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

3.3. Test Procedures- Same as clause 2.3.**3.4. Test Results (Worst case configuration_8DPSK mode)**

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line; Addition,

Ambient temperature : 24 °C

Relative humidity : 47 % R.H.

Frequency range : 0.15 MHz – 30 MHz

Measured Bandwidth : 9 kHz

FREQ. (MHz)	LEVEL(dBuV)		LINE	LIMIT(dBuV)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.16	37.00	20.50	H	65.46	55.46	28.46	34.96
0.46	19.90	11.70	H	56.69	46.69	36.79	34.99
0.56	19.40	11.50	H	56.00	46.00	36.60	34.50
3.24	17.10	8.20	H	56.00	46.00	38.90	37.80
6.31	11.60	6.70	H	60.00	50.00	48.40	43.30
13.56	17.20	14.40	H	60.00	50.00	42.80	35.60
0.17	31.80	14.30	N	64.96	54.96	33.16	40.66
1.65	25.90	19.20	N	56.00	46.00	30.10	26.80
3.48	29.30	24.60	N	56.00	46.00	26.70	21.40
3.92	25.60	10.60	N	56.00	46.00	30.40	35.40
5.96	22.60	20.40	N	60.00	50.00	37.40	29.60
13.29	13.70	7.70	N	60.00	50.00	46.30	42.30


Note ;

Line (H) : Hot

Line (N) : Neutral

Plot of Conducted Power line

Test mode : (Hot)

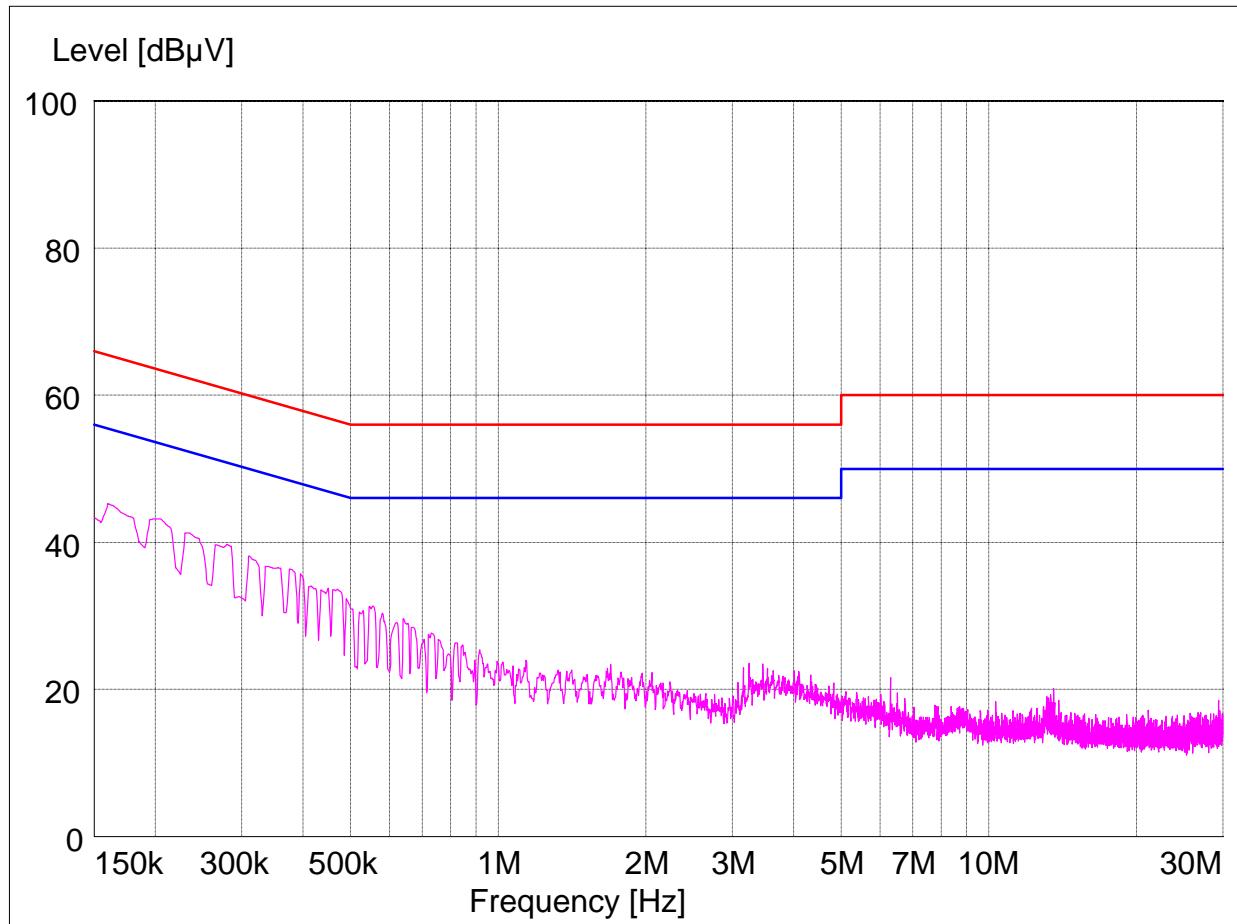


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

Test mode : (Neutral)

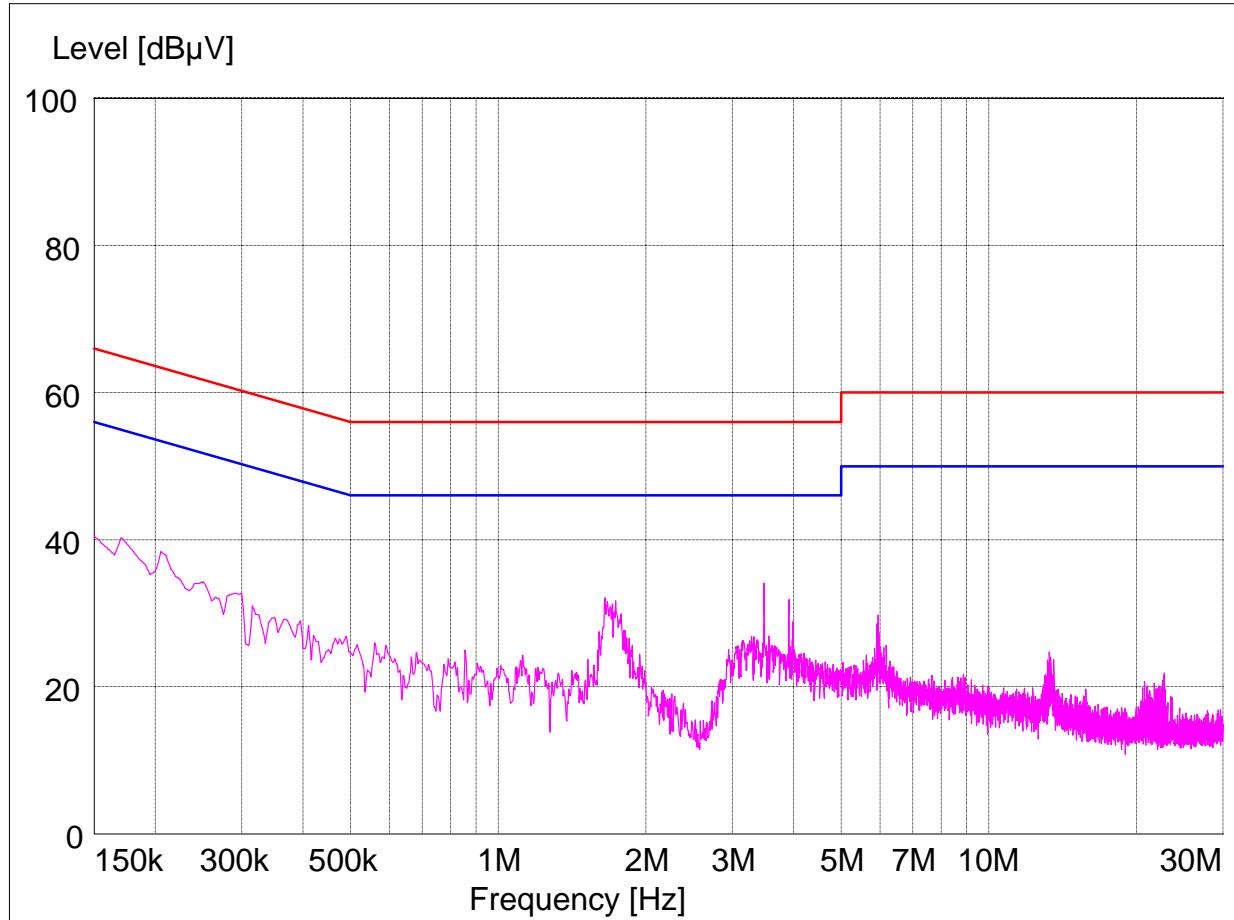

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


www.electrolab.kr.sgs.com

4. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


4.1. Test Setup

4.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

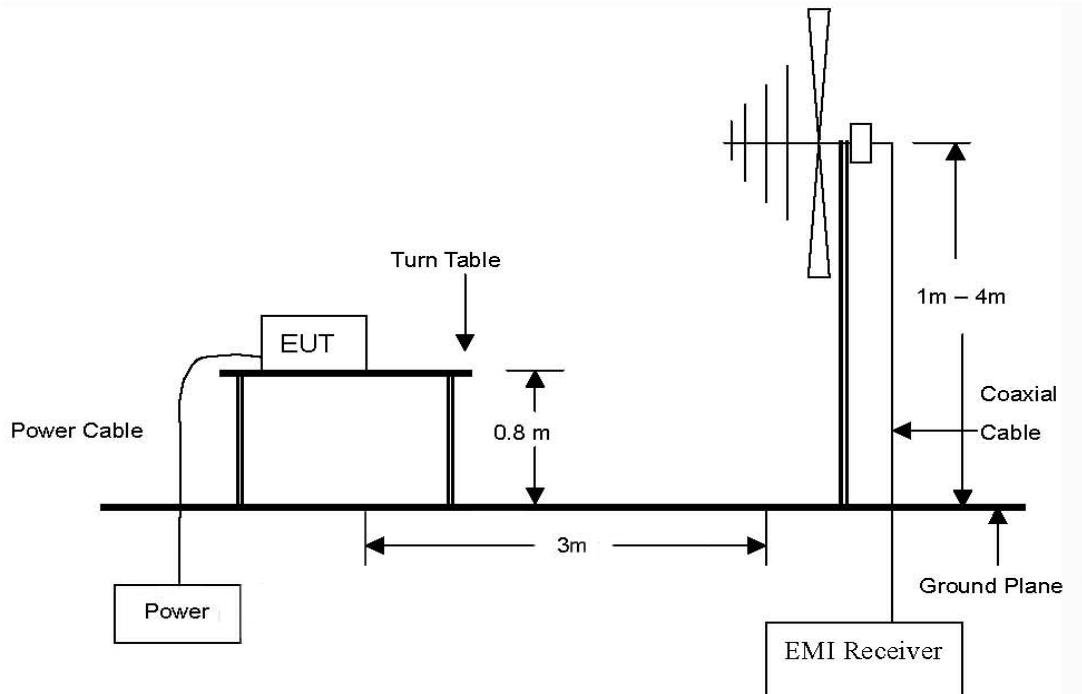


The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz Emissions.

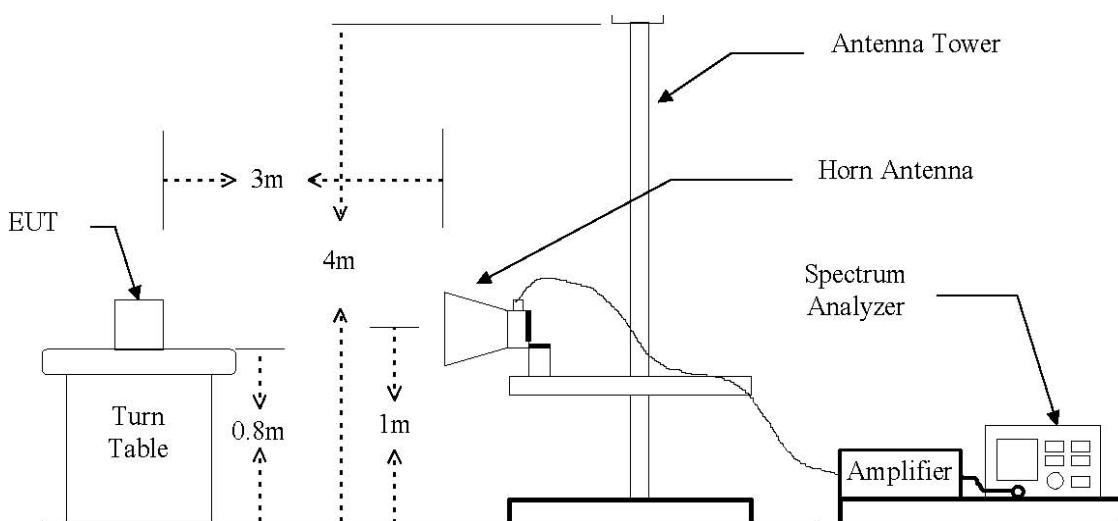

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.1.2. Conducted Spurious Emissions

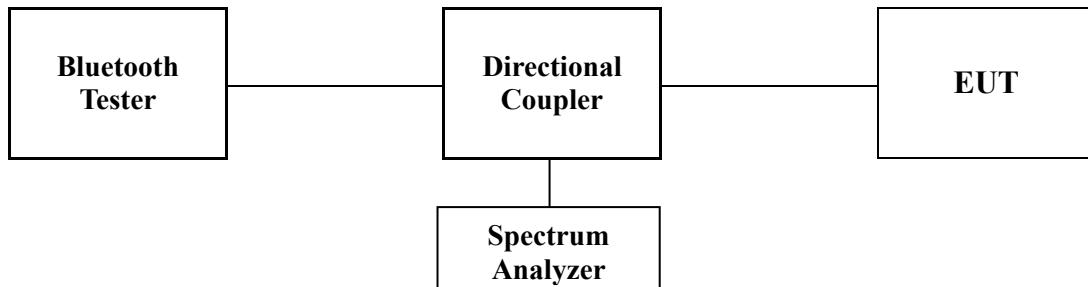

4.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)	Field Strength (μ V/m)
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

4.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

4.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

4.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=100 kHz, VBW=100 kHz.

4.4. Test Results

Ambient temperature : 24 °C

Relative humidity : 47 % R.H.

4.4.1. Spurious Radiated Emission (Worst case configuration _8DPSK mode)

The frequency spectrum from 30 MHz to 1000 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB. All reading values are peak values.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
45.278	32.50	Peak	V	12.27	-27.58	17.19	40.00	22.81
142.399	34.90	Peak	H	7.46	-26.72	15.64	43.50	27.86
261.507	32.90	Peak	H	12.21	-25.77	19.34	47.00	27.66
656.741	33.50	Peak	V	19.56	-26.28	26.78	47.00	20.22
779.891	33.30	Peak	H	21.01	-25.80	28.51	47.00	18.49
Above 800.000	Not detected	-	-	-	-	-	-	-

Remark:

1. All spurious emission at channels are almost the same below 1 GHz, so that channel was chosen at representative in final test.
2. Actual = Reading + AF + AMP + CL

4.4.2. Spurious Radiated Emission

The frequency spectrum above 1000 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB.

Operating Mode: GFSK

A. Low Channel (2402 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*2390.000	23.70	Peak	V	28.09	4.84	56.63	74.00	17.37
*2390.000	10.05	Average	V	28.09	4.84	42.98	54.00	11.02

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4804.007	56.38	Peak	V	32.59	-27.78	61.19	74.00	12.81
4804.007	38.65	Average	V	32.59	-27.78	43.46	54.00	10.54
Above 4900.000	Not detected	-	-	-	-	-	-	-

B. Middle Channel (2441 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.710	55.77	Peak	V	32.90	-27.57	61.10	74.00	12.90
4881.710	37.92	Average	V	32.90	-27.57	43.25	54.00	10.75
Above 4900.000	Not detected	-	-	-	-	-	-	-

C. High Channel (2480 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*2483.500	23.14	Peak	V	28.09	4.78	56.01	74.00	17.99
*2483.500	11.52	Average	V	28.09	4.78	44.39	54.00	9.61

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960.035	57.25	Peak	V	33.22	-27.41	63.06	74.00	10.94
4960.035	42.14	Average	V	33.22	-27.41	47.95	54.00	6.05
Above 5000.000	Not detected	-	-	-	-	-	-	-

Operating Mode: 8DPSK

A. Low Channel (2402 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*2390.000	22.97	Peak	V	28.09	4.84	55.90	74.00	18.10
*2390.000	10.11	Average	V	28.09	4.84	43.04	54.00	10.96

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4803.914	56.76	Peak	V	32.59	-27.78	61.57	74.00	12.43
4803.914	36.79	Average	V	32.59	-27.78	41.60	54.00	12.40
Above 4900.000	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

B. Middle Channel (2441 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.010	55.12	Peak	V	32.90	-27.56	60.46	74.00	13.54
4882.010	41.70	Average	V	32.90	-27.56	47.04	54.00	6.96
Above 4900.000	Not detected	-	-	-	-	-	-	-

C. High Channel (2480 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*2483.500	25.43	Peak	V	28.09	4.78	58.30	74.00	15.70
*2483.500	11.91	Average	V	28.09	4.78	44.78	54.00	9.22


Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960.084	50.13	Peak	V	33.22	-27.41	55.94	74.00	18.06
4960.084	34.38	Average	V	33.22	-27.41	40.19	54.00	13.81
Above 5000.000	Not detected	-	-	-	-	-	-	-

Remarks :

1. “*” means the restricted band.
2. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using peak/average detector mode.
4. Average test would be performed if the peak result were greater than the average limit.
5. Actual = Reading + AF + AMP + CL


4.4.3. Spurious RF Conducted Emissions: Plot of Spurious RF Conducted Emission**Operating Mode: GFSK**

Low Channel

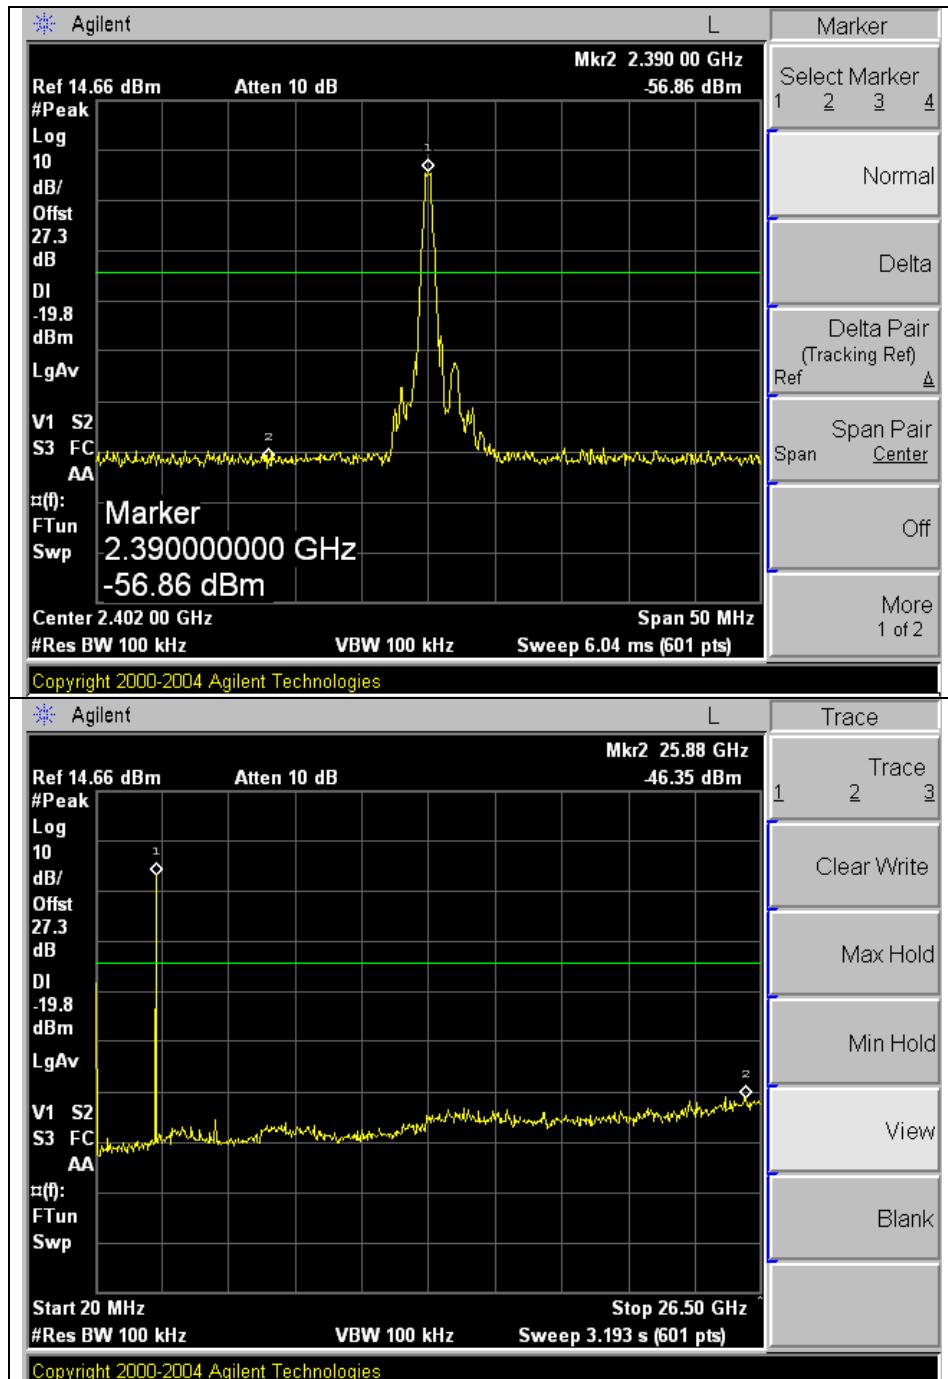

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

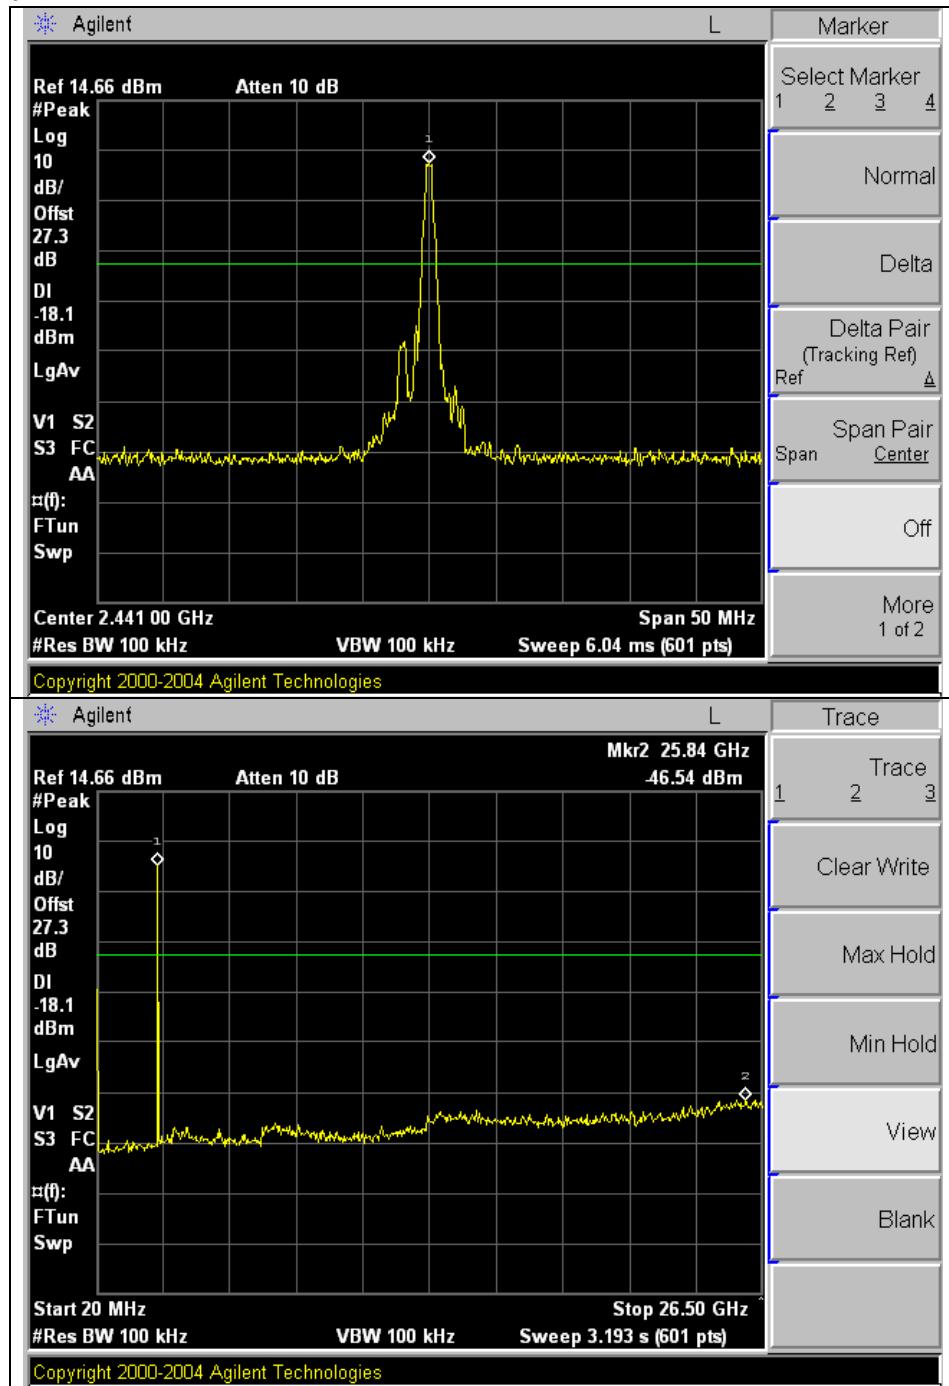


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

High Channel

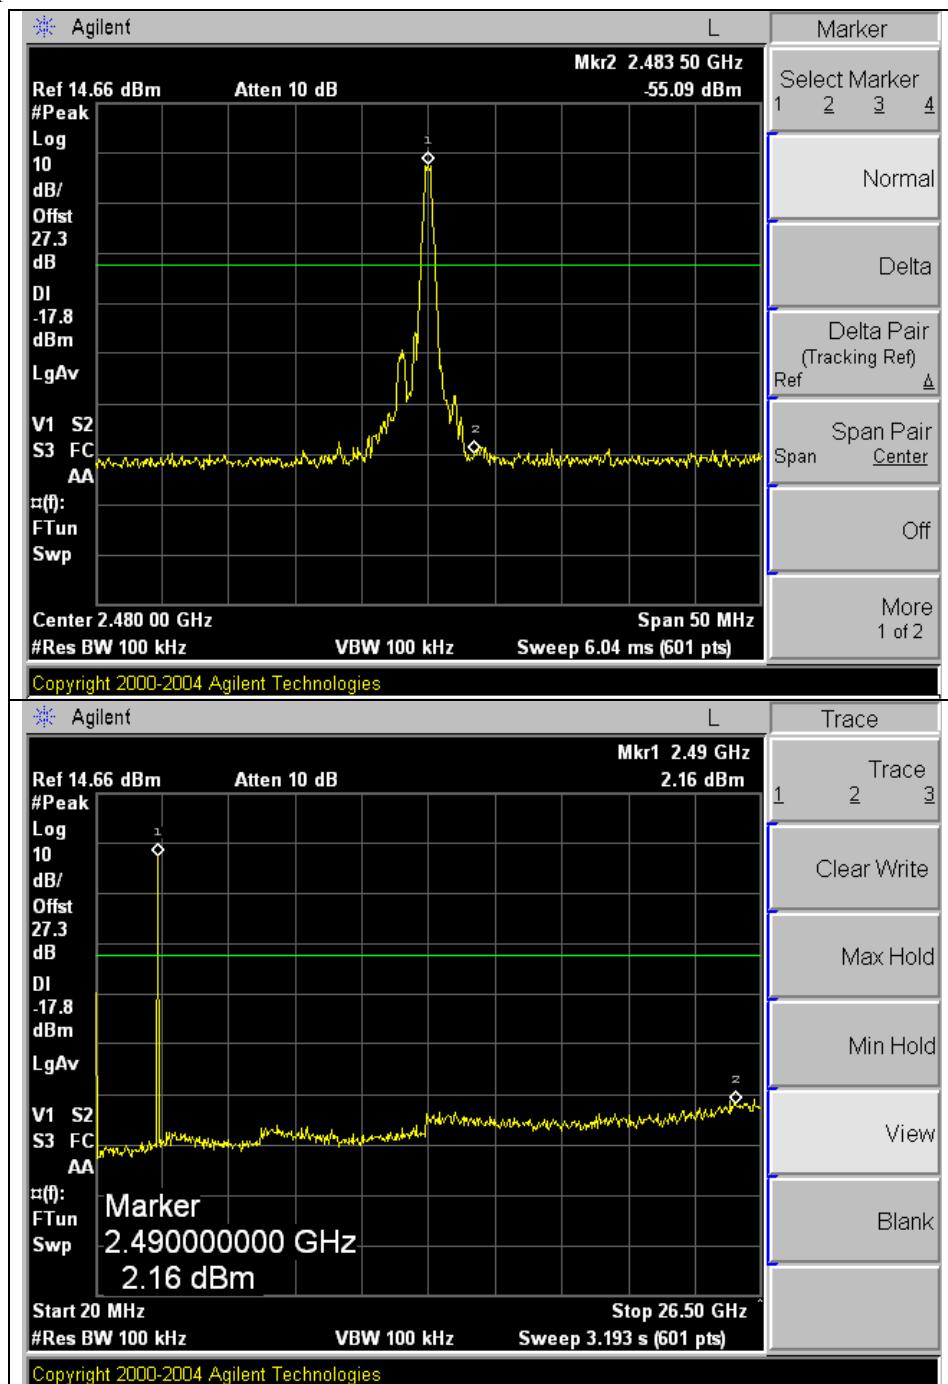


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

Bandedge at Hopping

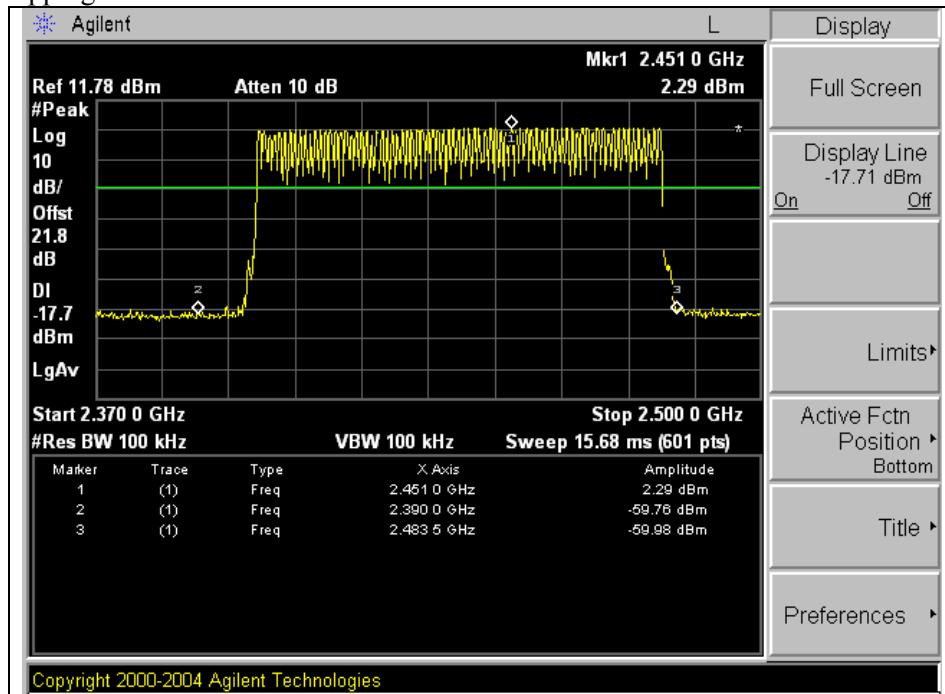


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com


Operating Mode : 8DPSK

Low Channel

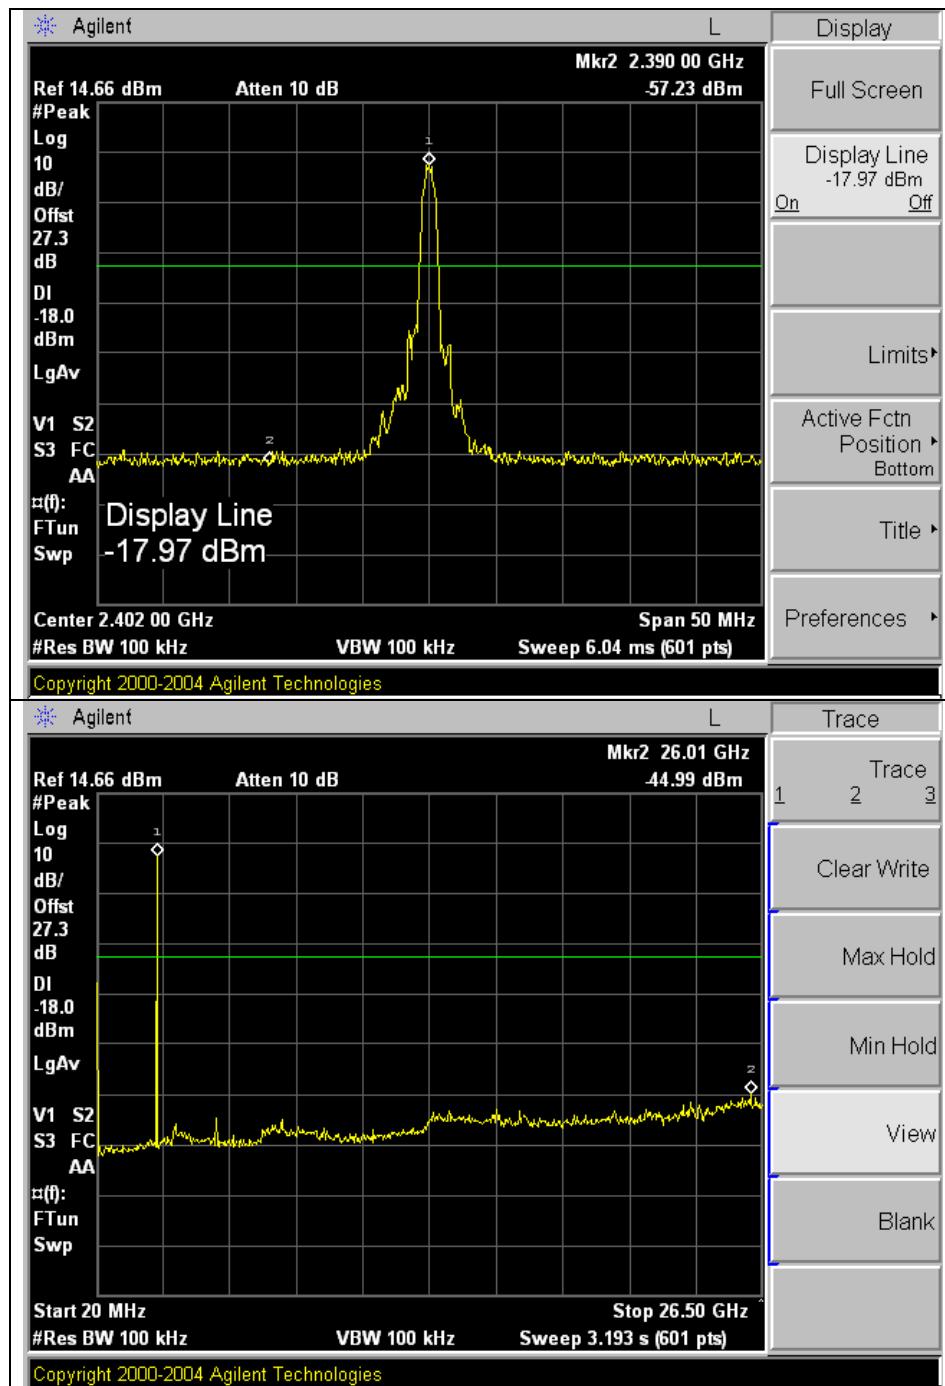

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

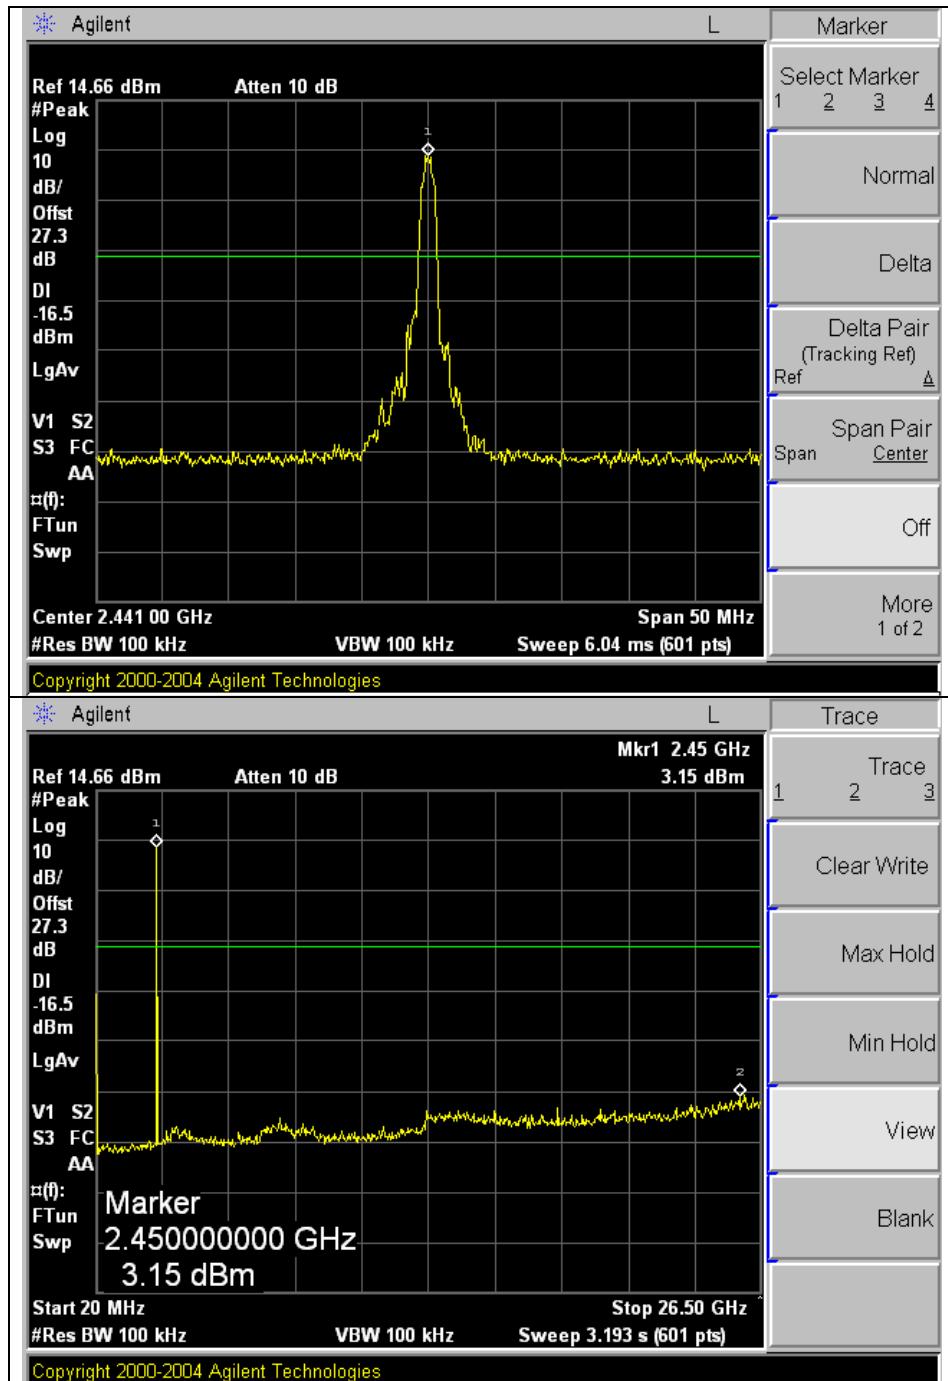


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

High Channel

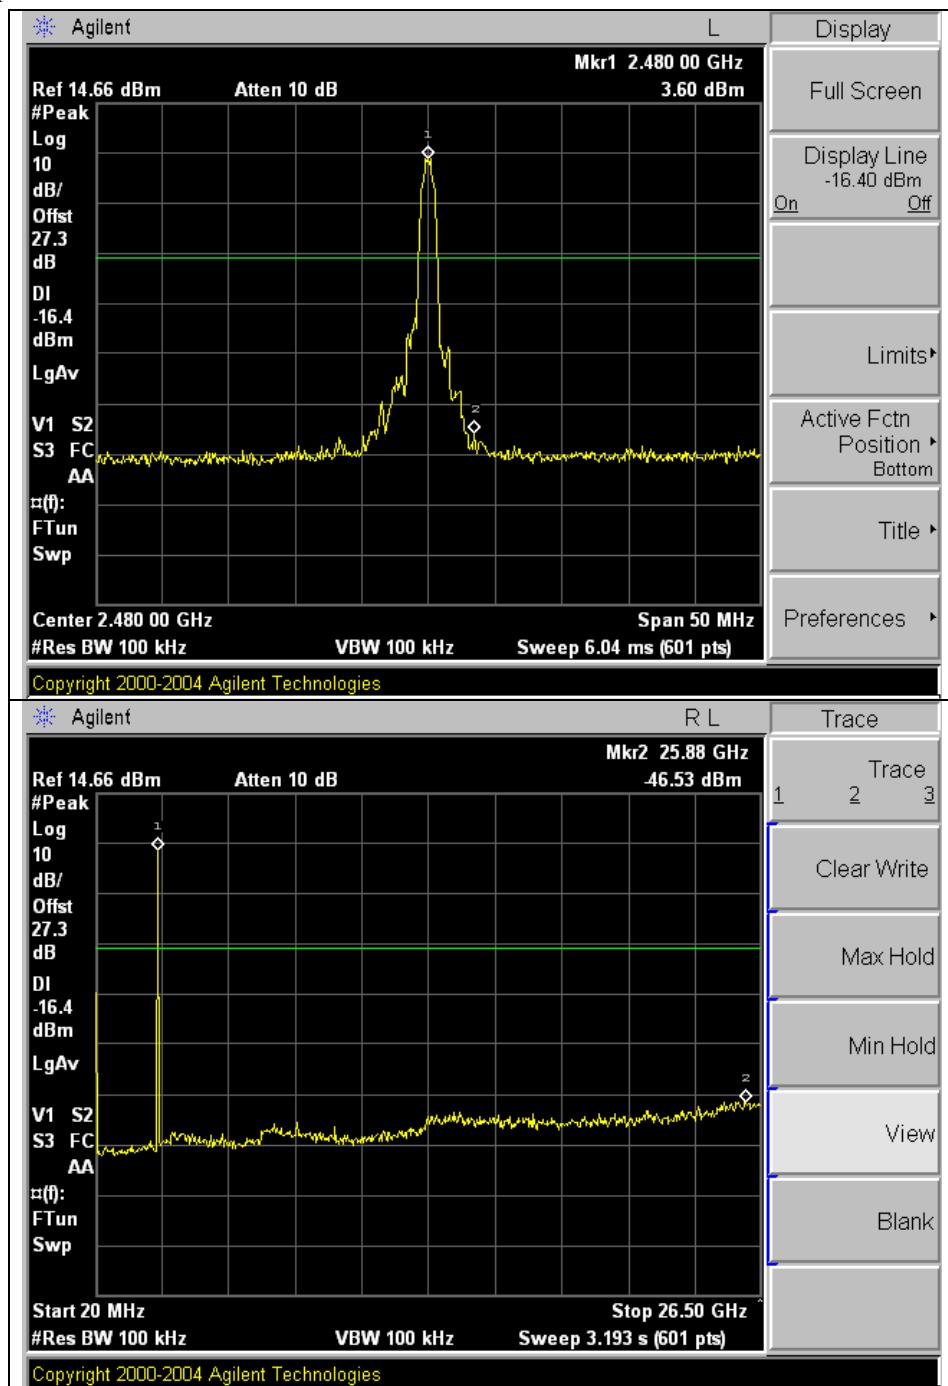


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

Bandedge at Hopping

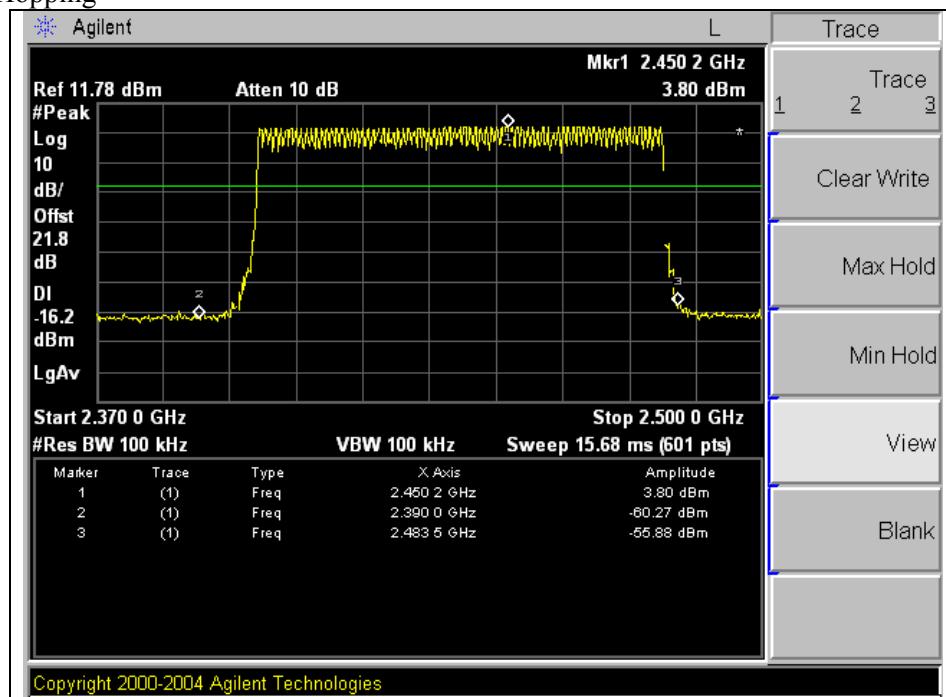

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

5. Receiver Radiated spurious emissions

5.1. Test setup - Same as clause 4.1.

5.1.1. Receiver Radiated Spurious Emissions - Same as clause 4.1.1.

5.2. Limit

According to §15.109(a), Except for Class A digital devices, the field strength of radiated emission from unintentional radiator at a distance of 3 m shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

5.3. Test Procedures - Same as clause 4.3.

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

5.3.1. Test Procedures for Radiated Spurious Emissions- Same as clause 4.3.1.

5.4. Test Results

Ambient temperature : 24 °C

Relative humidity : 47 % R.H.

5.4.1. Spurious Radiated Emission (Worst case configuration_8DPSK mode)

The frequency spectrum from 30 MHz to 26.5 GHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB. All reading values are peak values.


Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
65.082	37.10	Peak	V	9.43	-27.37	19.16	40.00	20.84
75.994	32.90	Peak	V	6.70	-27.28	12.32	40.00	27.68
79.995	33.20	Peak	V	7.29	-27.26	13.23	40.00	26.77
142.358	34.10	Peak	H	7.46	-26.72	14.84	43.50	28.66
268.054	32.60	Peak	V	12.39	-25.75	19.24	47.00	27.76
Above 300.000	Not detected	-	-	-	-	-	-	-

Remark:

1. All spurious emission at channels are almost the same from 30 MHz to 26.5 GHz, so that the channel was chosen at representative in final test.
2. Actual = Reading + AF + AMP + CL

6. 20 dB Bandwidth Measurement and 99% BW

6.1. Test Setup

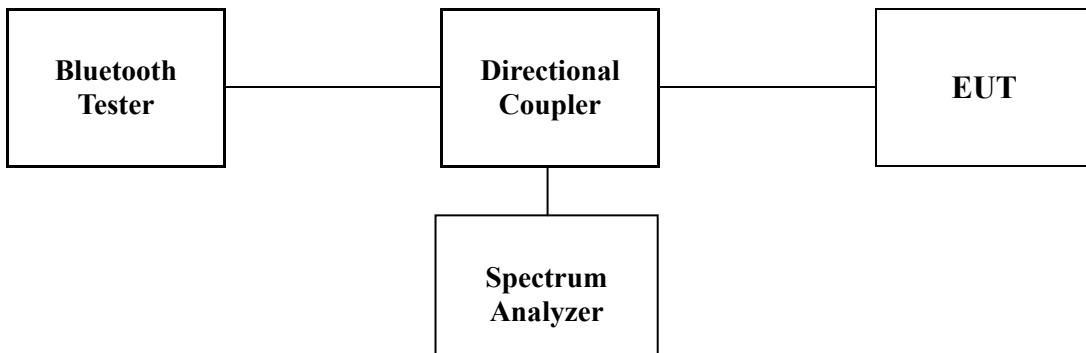

6.2. Limit

Limit: Not Applicable

6.3. Test Procedure

1. The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=10 kHz, VBW=10 kHz, Span=5 MHz.

6.4. Test Results

Ambient temperature : 24 °C

Relative humidity : 47 % R.H.

Operation Mode	Channel	Channel Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
GFSK	Low	2402	0.872	0.885
	Middle	2441	0.920	0.882
	High	2480	0.872	0.871
8DPSK	Low	2402	1.269	1.211
	Middle	2441	1.209	1.201
	High	2480	1.211	1.214


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


www.electrolab.kr.sgs.com

20 dB Bandwidth**Operating Mode: GFSK**

Low Channel

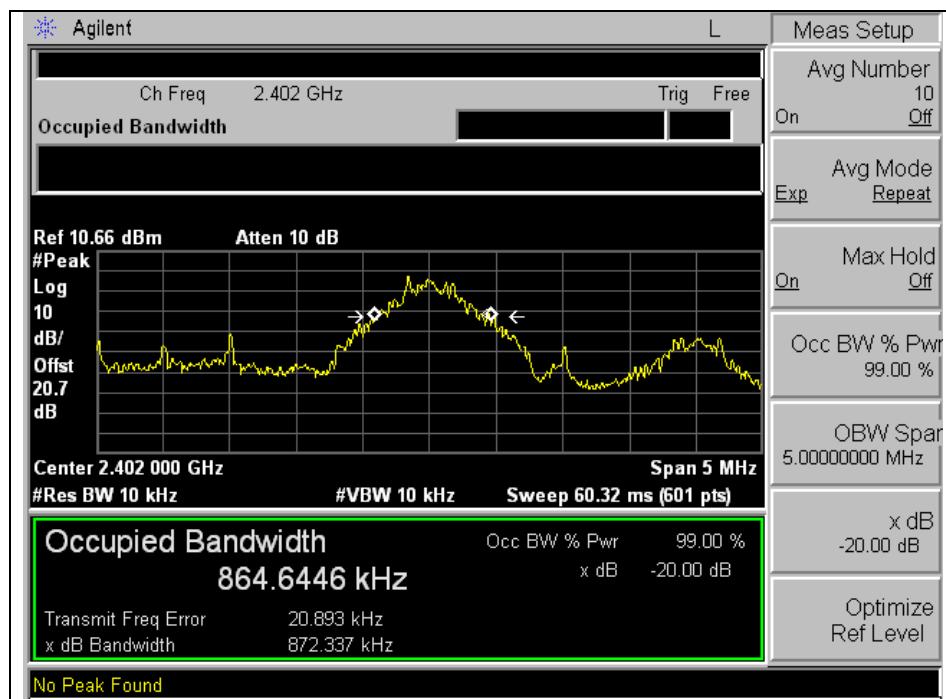


Middle Channel

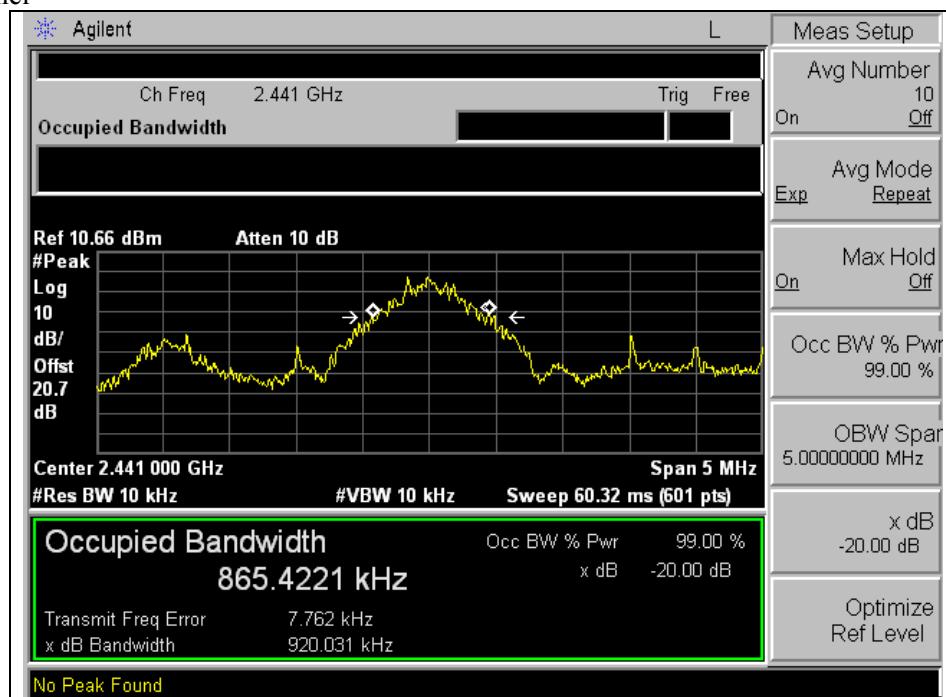

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

High Channel

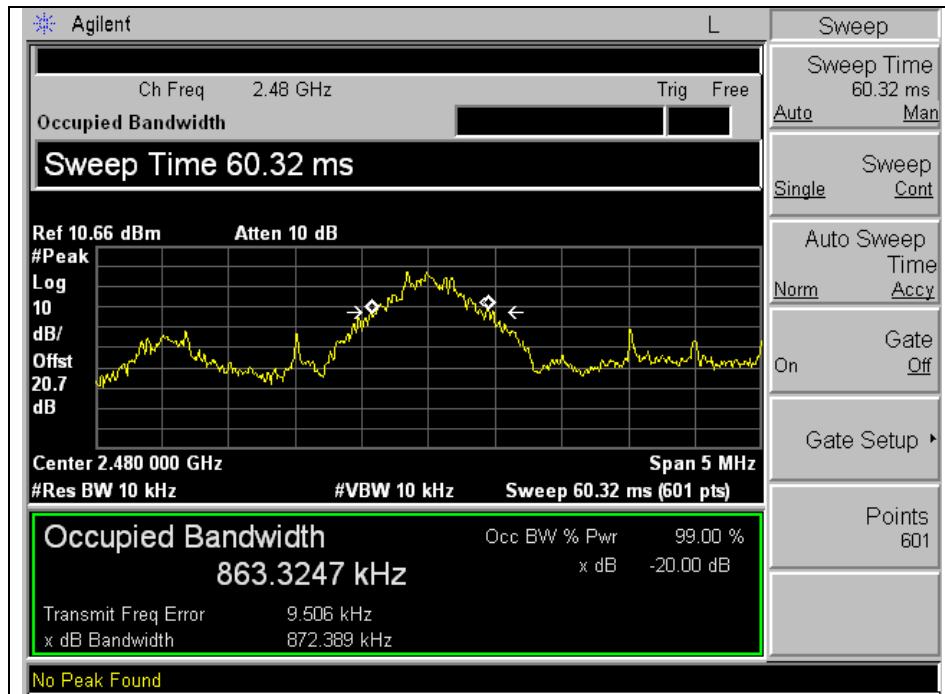


Operating Mode: 8DPSK


Low Channel



Middle Channel

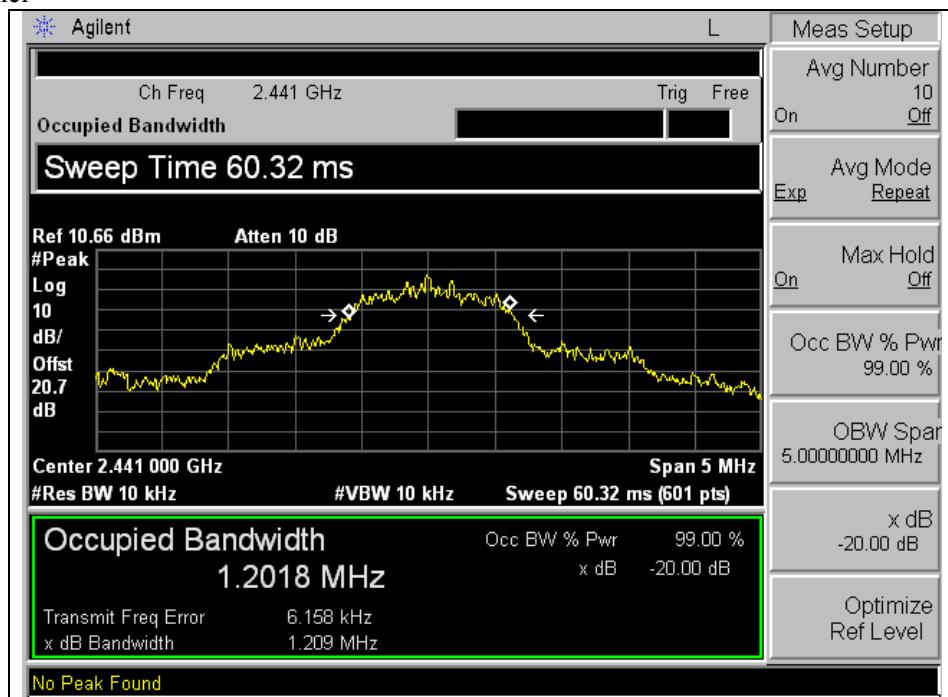


High Channel

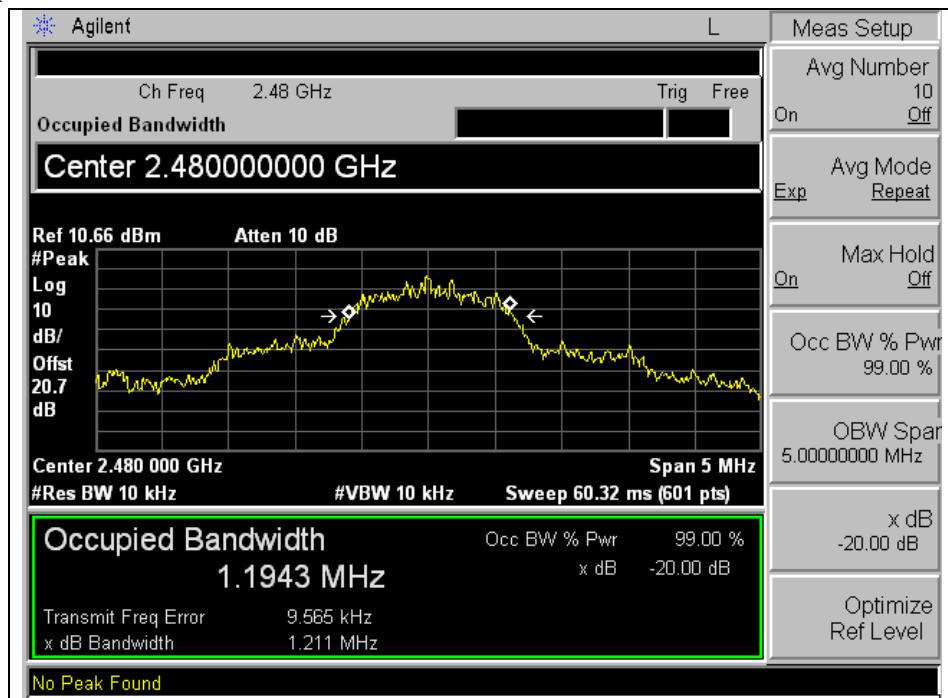


99% Occupied Bandwidth**Operating Mode: GFSK**

Low Channel

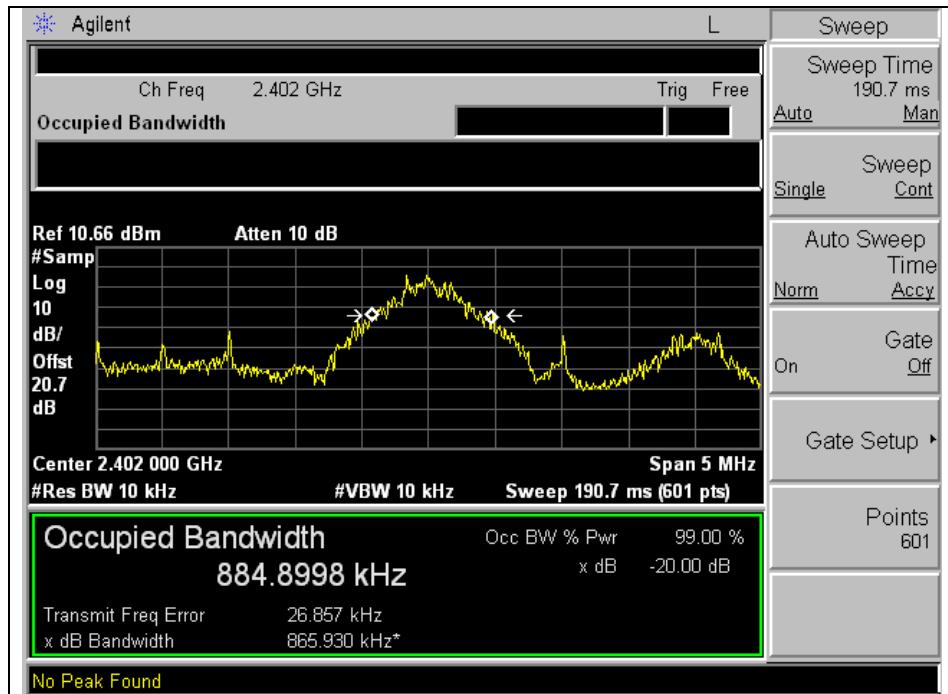

Middle Channel

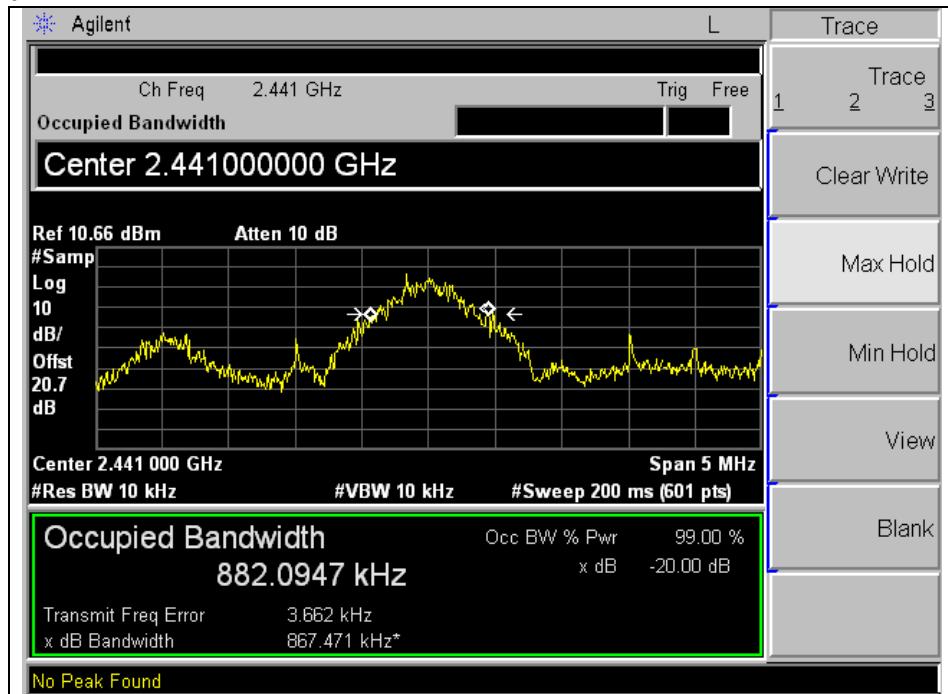


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


www.electrolab.kr.sgs.com

High Channel

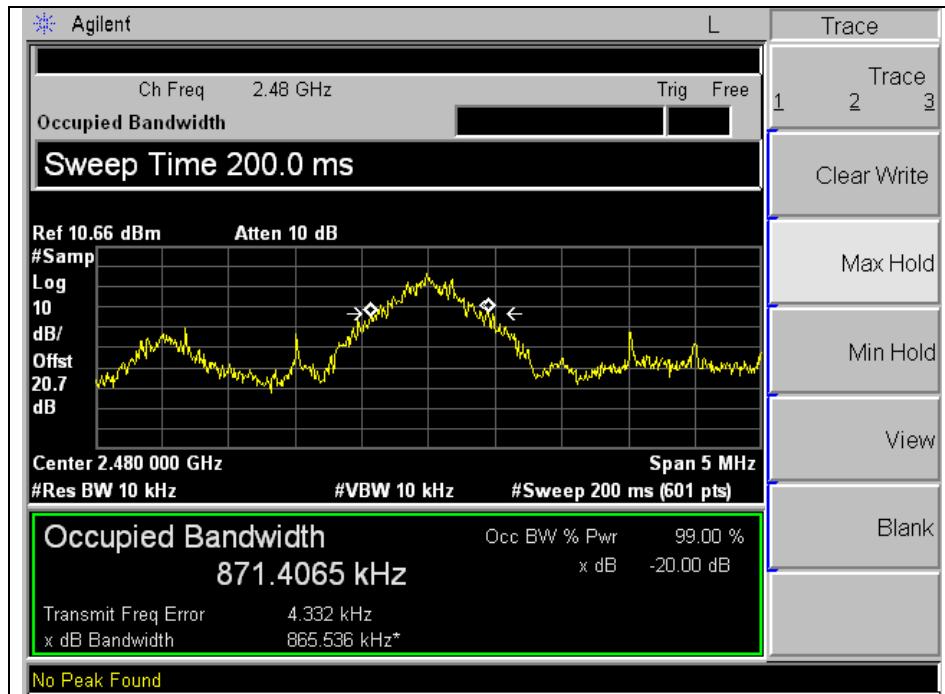


Operating Mode: 8DPSK

Low Channel

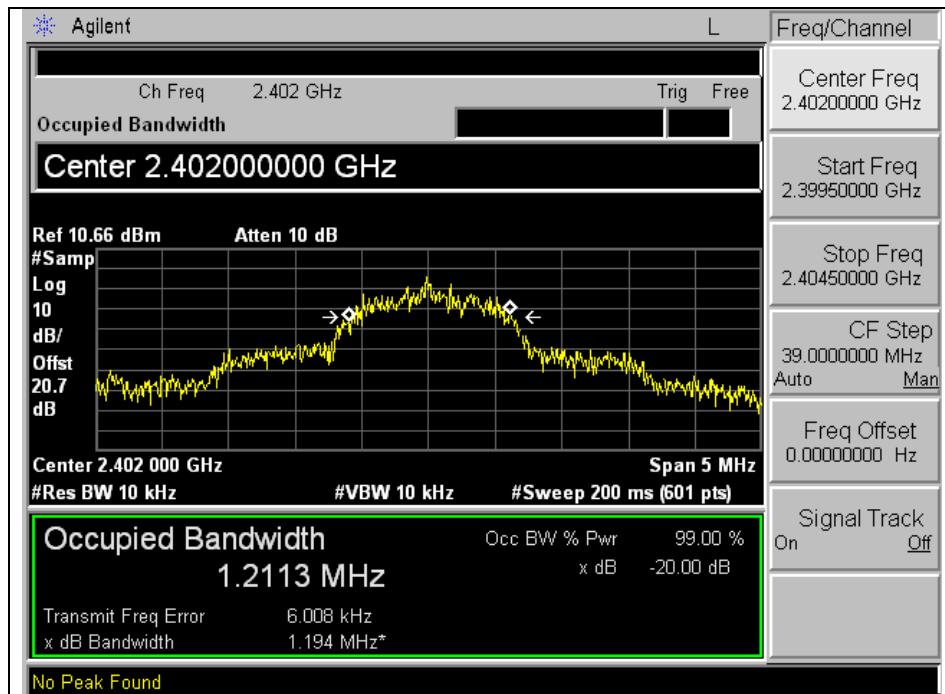


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

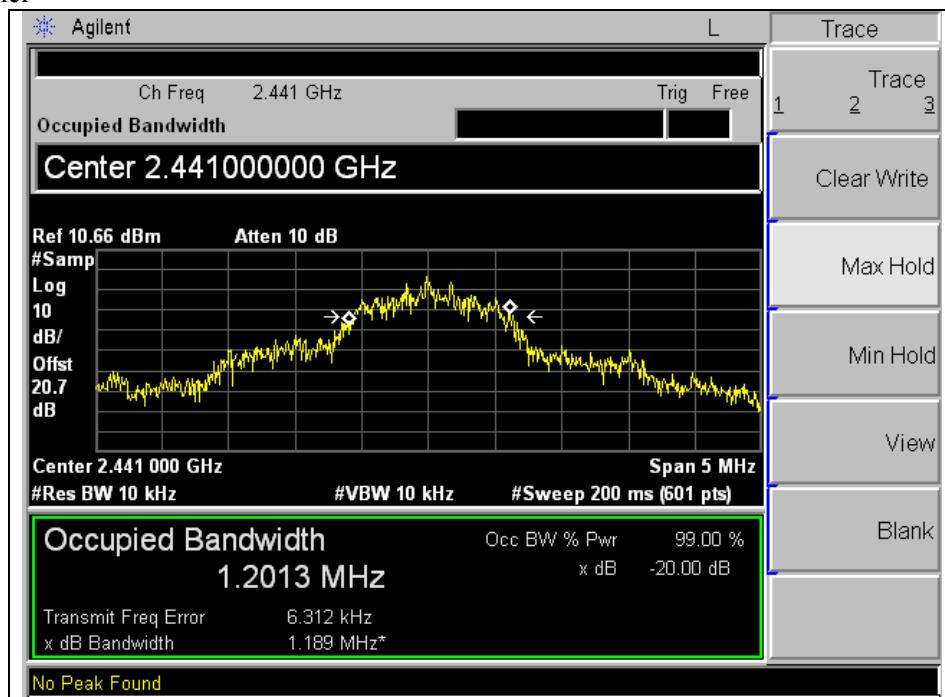


High Channel

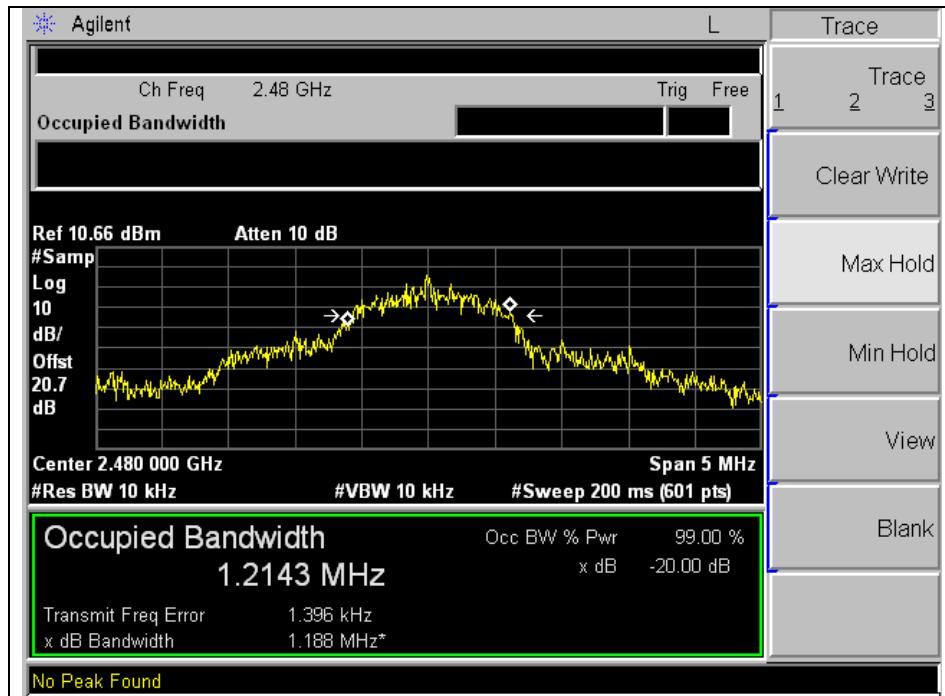

7. Maximum Peak Output Power Measurement

7.1. Test Setup

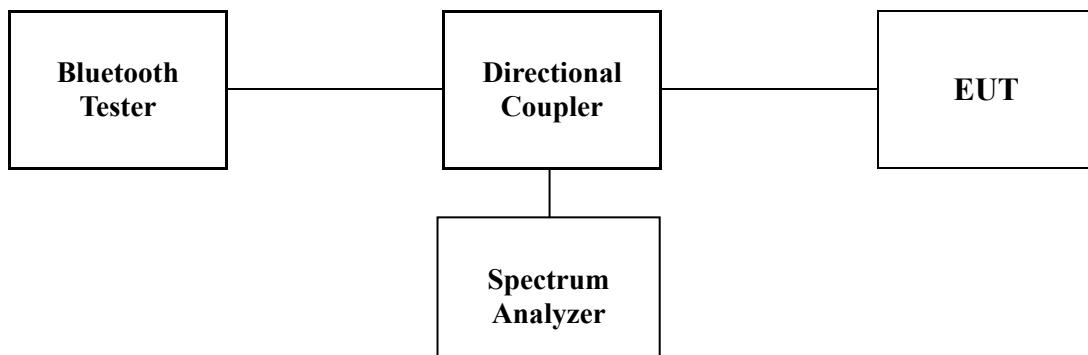

7.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5805 MHz band: 1 Watt.

7.3. Test Procedure

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 $RBW \geq 20dB\ BW$
 $VBW \geq RBW$
Sweep = auto
Detector function = peak
Trace = max hold

7.4. Test Results


Ambient temperature : 24 °C

Relative humidity : 47 % R.H.


Operation Mode	Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)
GFSK	Low	2402	0.36	30.00
	Middle	2441	2.06	30.00
	High	2480	2.33	30.00
8DPSK	Low	2402	3.28	20.97
	Middle	2441	4.78	20.97
	High	2480	4.85	20.97

Operating Mode: GFSK

Low Channel

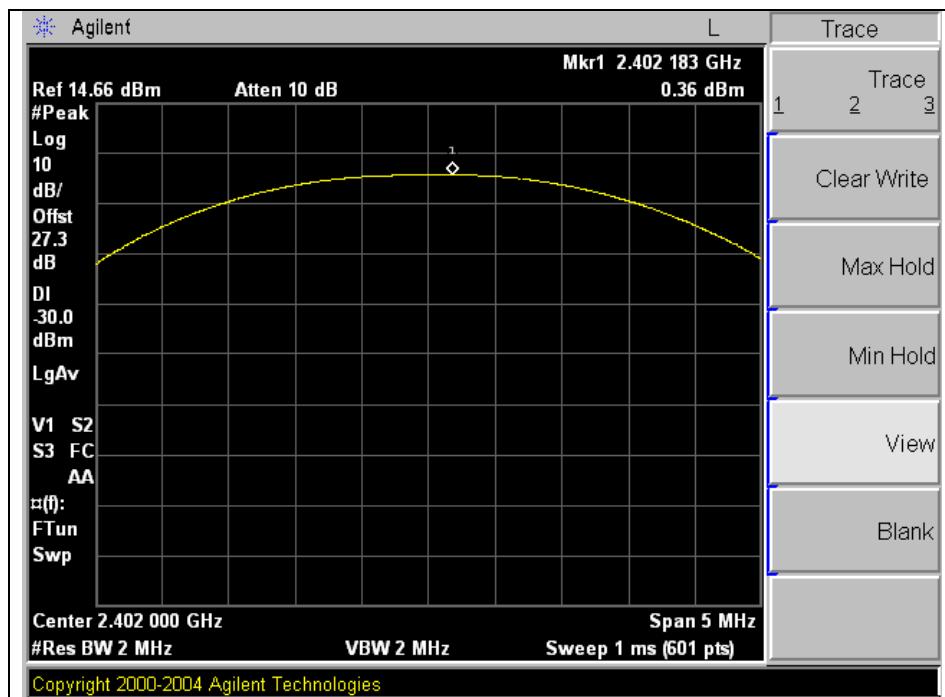

Middle Channel

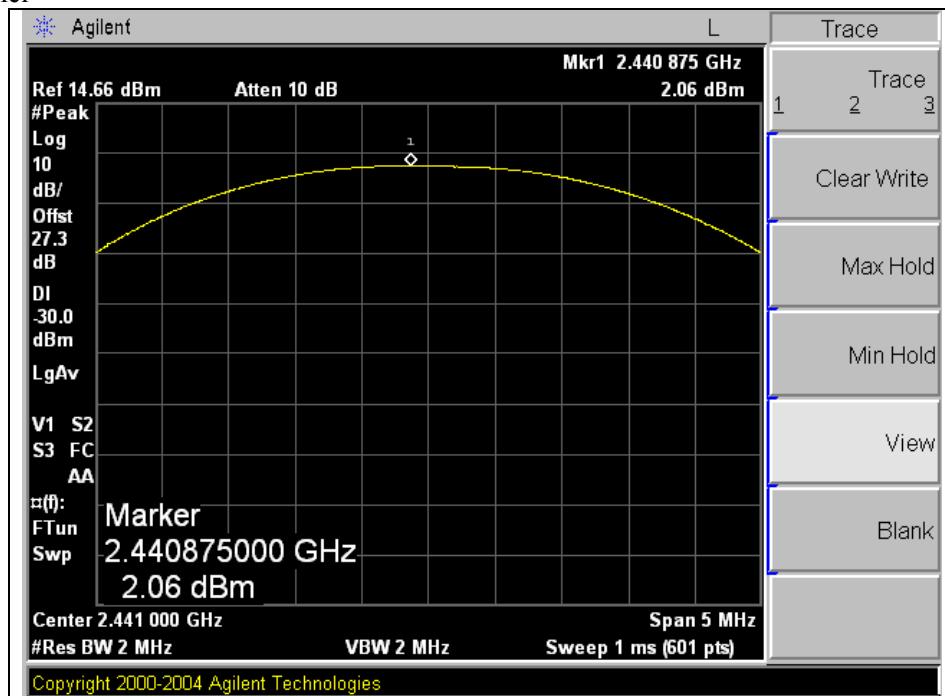


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


www.electrolab.kr.sgs.com

High Channel

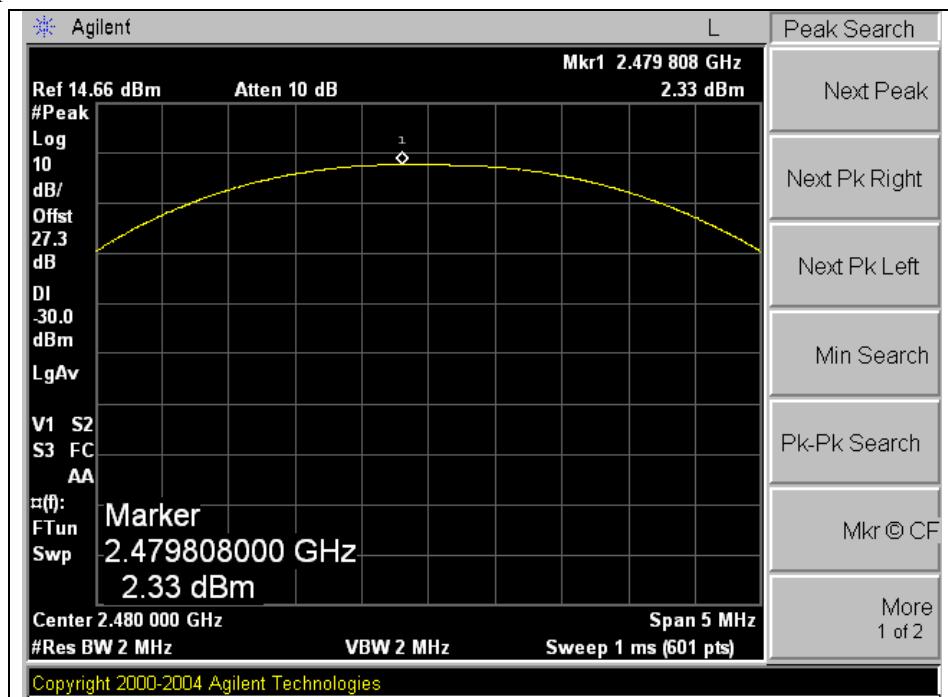


Operating Mode : 8DPSK

Low Channel

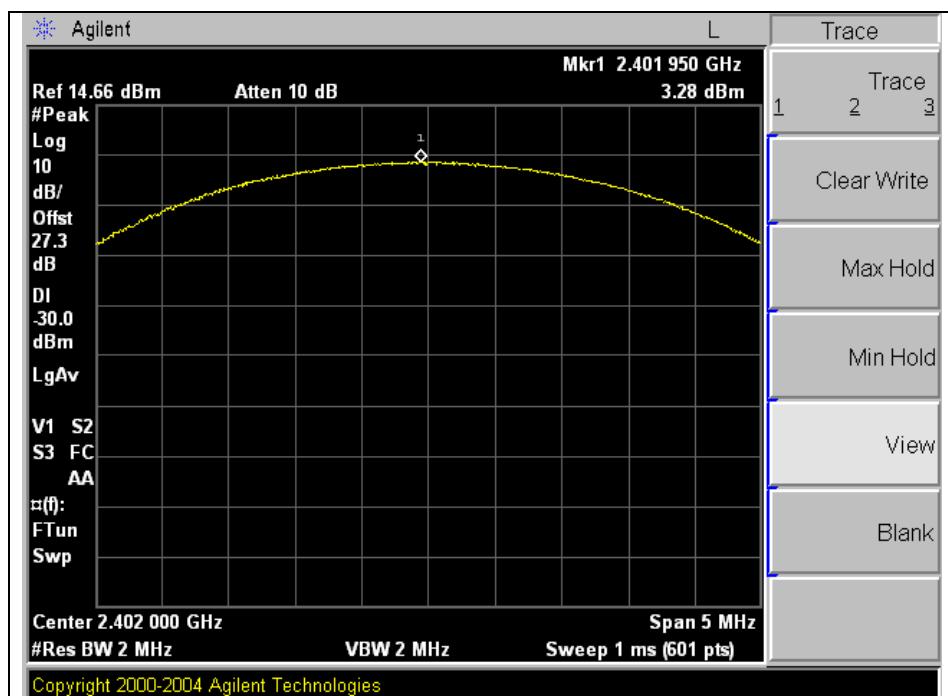


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

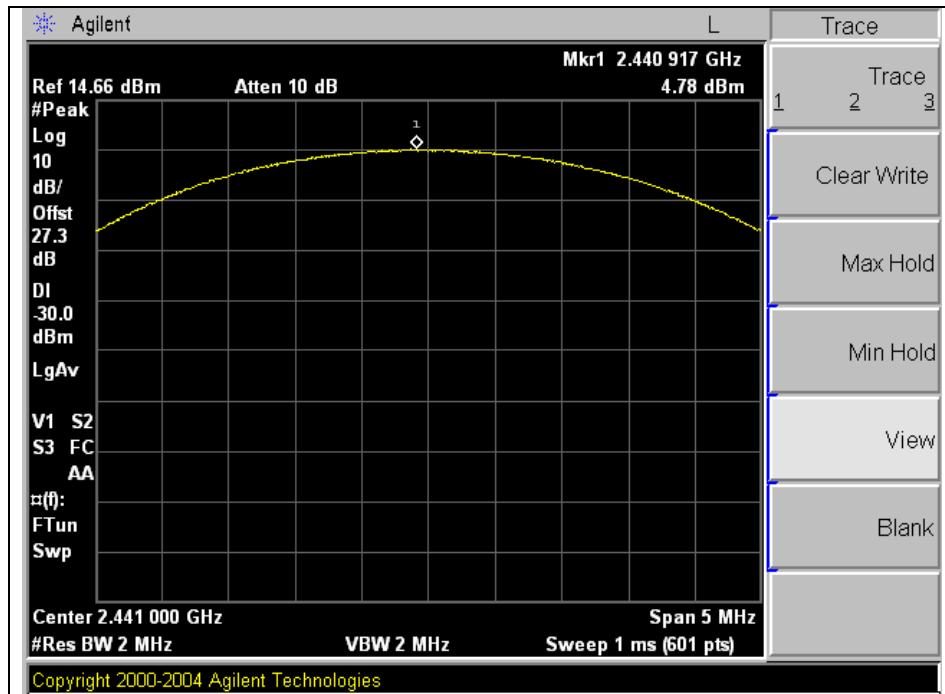

High Channel

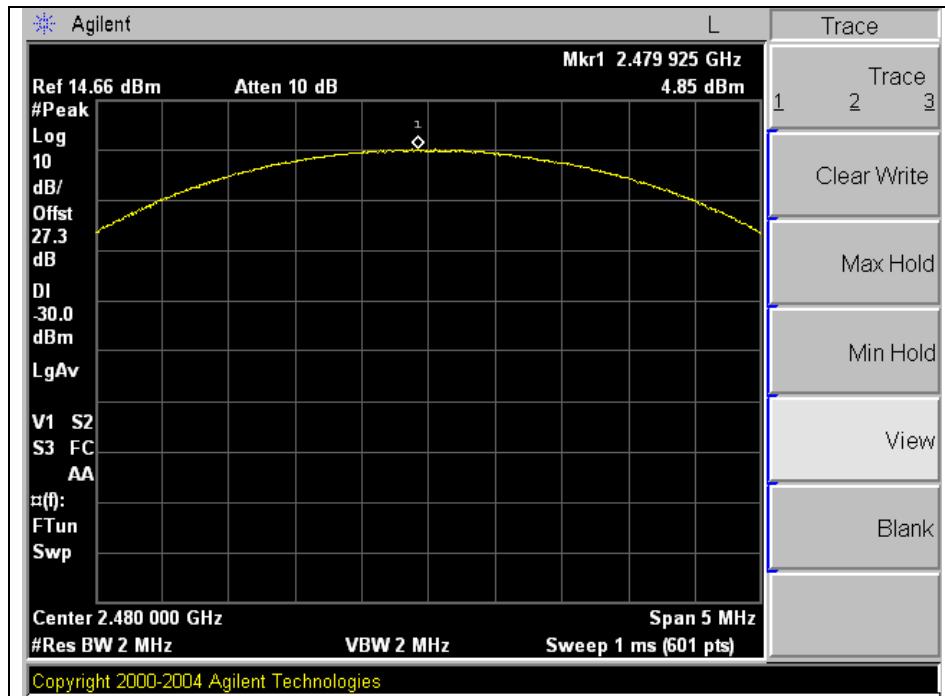


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

8. Hopping Channel Separation

8.1. Test Setup

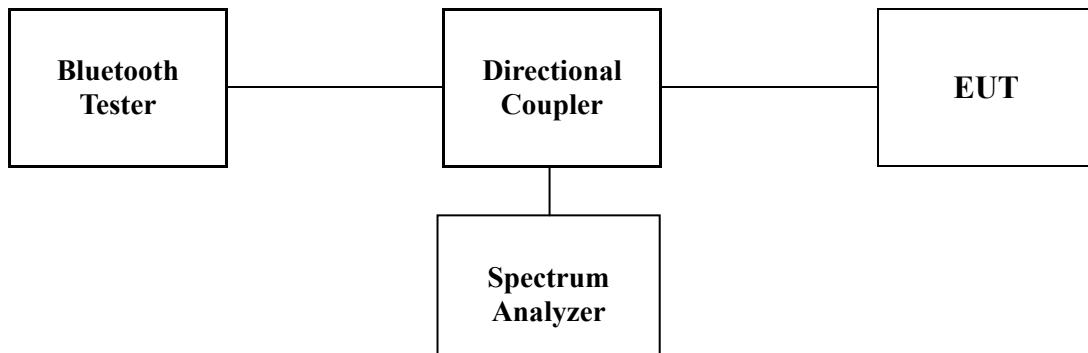

8.2. Limit

§15.247(a)(1) Frequency hopping system operating in 2400-2483.5MHz. Band may have hopping channel carrier frequencies that are separated by 25kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

8.3. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Set center frequency of spectrum analyzer = middle of hopping channel.
7. Set the spectrum analyzer as RBW=100 kHz, VBW=100 kHz, Span=5 MHz and Sweep = auto.

8.4. Test Results



Ambient temperature : 24 °C

Relative humidity : 47 % R.H.

Operation Mode	Channel (Middle)	Adjacent Hopping Channel Separation (kHz)	Two-third of 20 dB Bandwidth (kHz)	Minimum Bandwidth (kHz)
GFSK	2441 MHz	1000	613	25
8DPSK	2441 MHz	1000	806	25

Note :

20 dB bandwidth measurement, the measured channel separation should be greater than two-third of 20dB bandwidth or Minimum bandwidth.

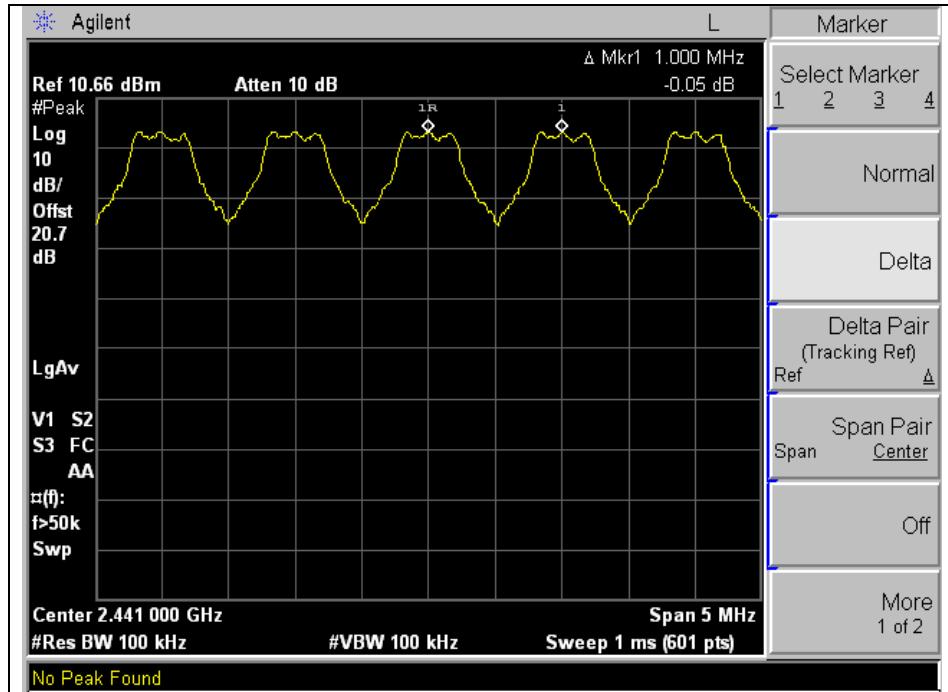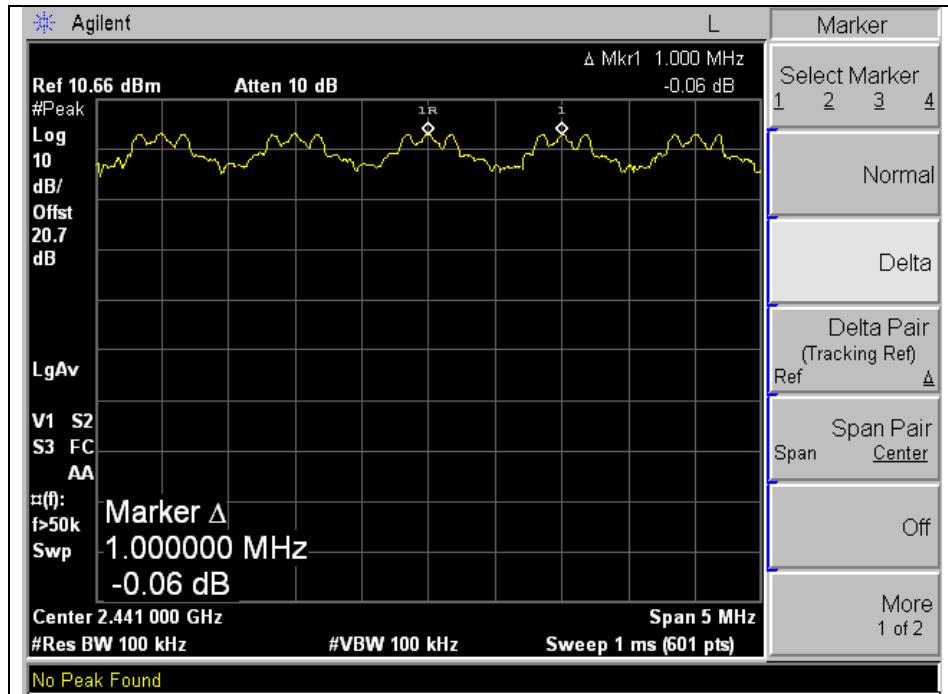Operating Mode: GFSK**Operating Mode: 8DPSK**


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

9. Number of Hopping Frequency

9.1. Test Setup

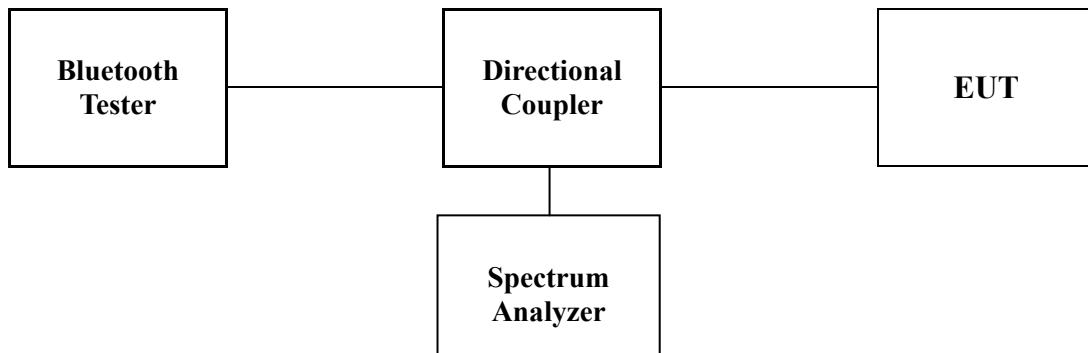

9.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz bands shall use at least 15 hopping frequencies.

9.3. Test Procedure


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna the port to the Spectrum analyzer
3. Set spectrum analyzer Start=2400 MHz, Stop=2441.5 MHz, Sweep=auto and Start=2441.5 MHz, Stop= 2483.5 MHz, Sweep=auto.
4. Set the spectrum analyzer as RBW, VBW=300 kHz.
5. Max hold, view and count how many channel in the band.

9.4. Test Results

Ambient temperature : 24 °C

Relative humidity : 47 % R.H.


Operation Mode	Number of Hopping Frequency	Limit
GFSK	79	>= 15
8DPSK	79	>= 15

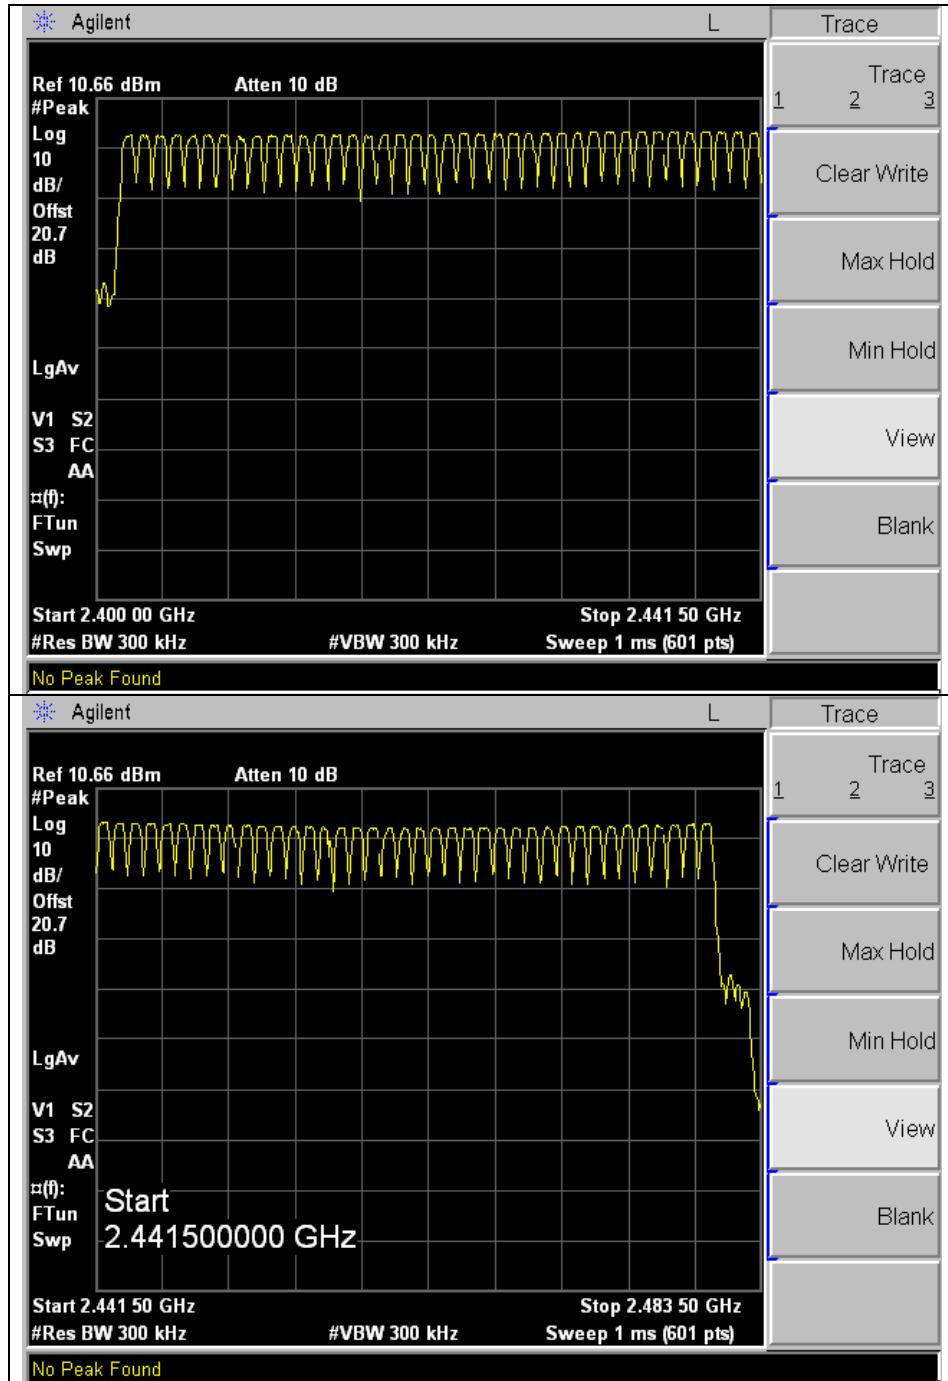Operating Mode: GFSK

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

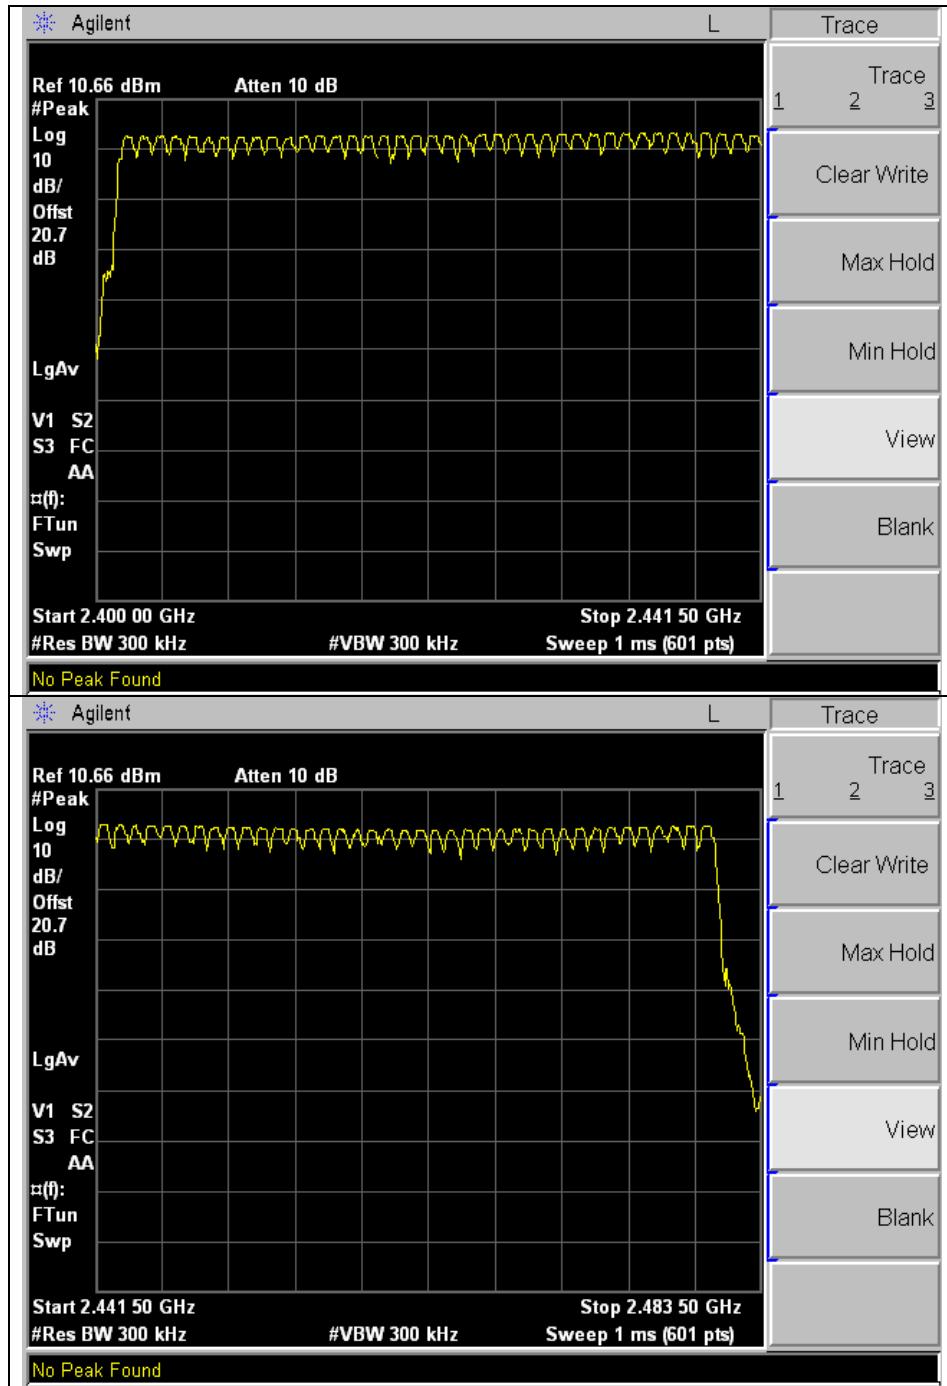Operating Mode : 8DPSK


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

www.electrolab.kr.sgs.com

10. Time Of Occupancy (Dwell Time)

10.1. Test Set up

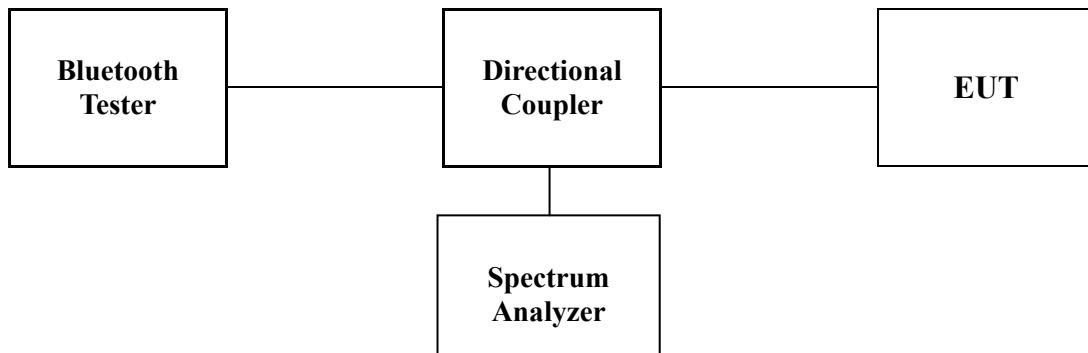

10.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time=0.4(s)*79=31.6(s)

10.3. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The Bluetooth has 3 type of payload, DH1, DH3, DH5 and 3-DH1, 3-DH3, 3-DH5. The hopping rate is 1600 per second.

10.4. Test Results

Ambient temperature : 24 °C

Relative humidity : 47 % R.H.

Time of occupancy on the TX channel in 31.6sec

= time domain slot length × (hop rate ÷ number of hop per channel) × 31.6


10.4.1. Packet Type: DH1, 3-DH1

Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx Channel in 31.6 sec (ms)
GFSK	2441 MHz	0.40	128.00	400
8DPSK	2441 MHz	0.43	137.60	400


2441 MHz : $0.40 \text{ (ms)} \times [(1600 \div 2) \div 79] \times 31.6(\text{s}) = 128.00 \text{ (ms)}$

$0.43 \text{ (ms)} \times [(1600 \div 2) \div 79] \times 31.6(\text{s}) = 137.60 \text{ (ms)}$

Operating Mode: GFSK

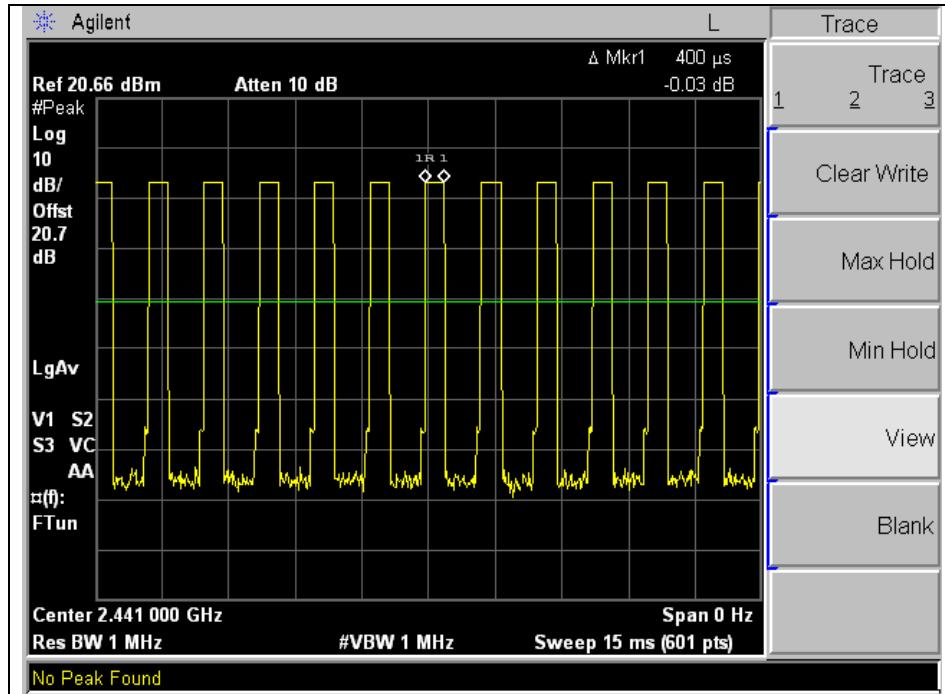

Operating Mode: 8DPSK

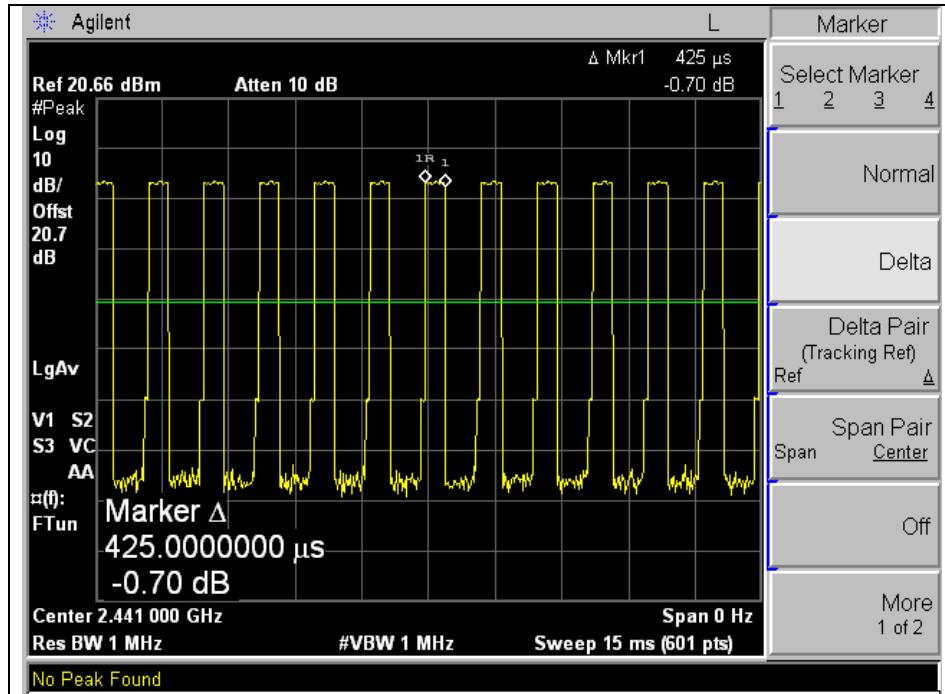


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10.4.2. Packet Type: DH3, 3-DH3


Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx Channel in 31.6 sec (ms)
GFSK	2441 MHz	1.65	264.00	400
8DPSK	2441 MHz	1.68	268.80	400

2441 MHz : $1.65 \text{ (ms)} \times [(1600 \div 4) \div 79] \times 31.6 \text{ (s)} = 264.00 \text{ (ms)}$
 $1.68 \text{ (ms)} \times [(1600 \div 4) \div 79] \times 31.6 \text{ (s)} = 268.80 \text{ (ms)}$

Operating Mode: GFSK

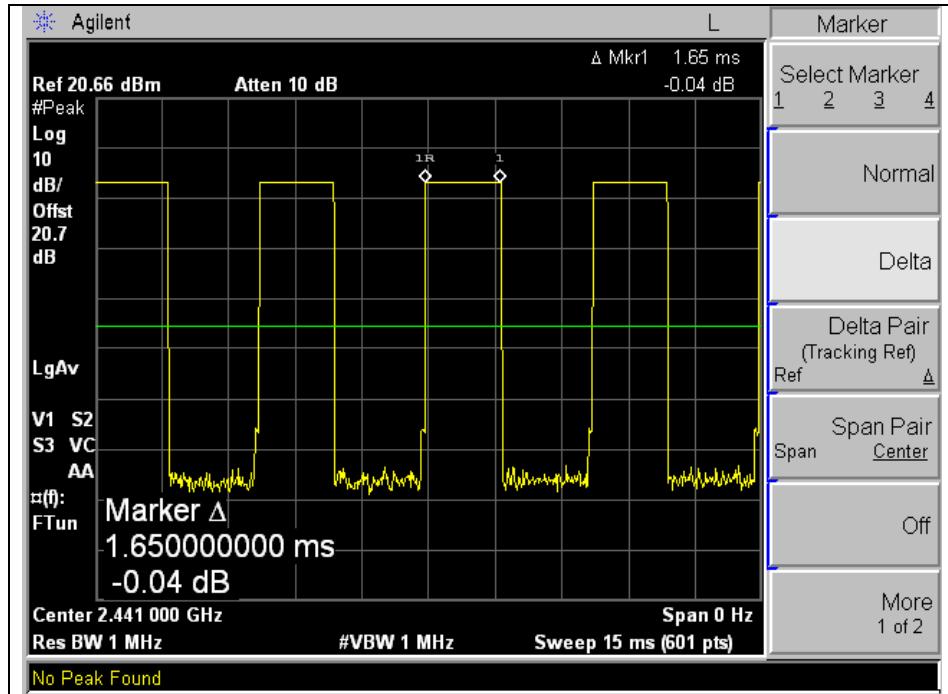

Operating Mode: 8DPSK


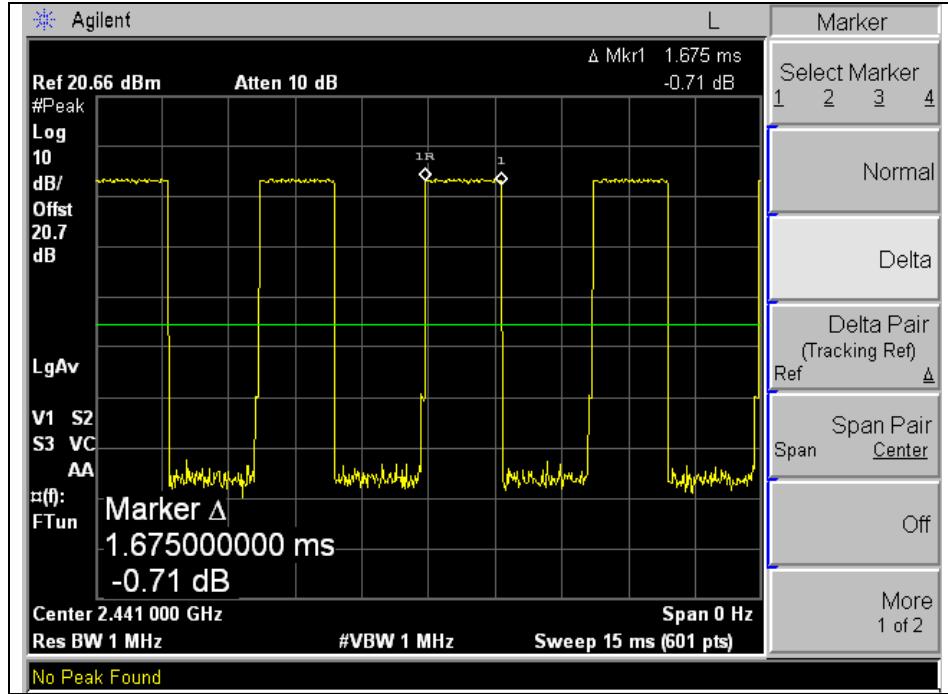


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10.4.3. Packet Type: DH5, 3-DH5

Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx Channel in 31.6 sec (ms)
GFSK	2441 MHz	2.89	308.27	400
8DPSK	2441 MHz	2.92	311.47	400

$$2441 \text{ MHz} : 2.89 \text{ (ms)} \times [(1600 \div 6) \div 79] \times 31.6 \text{ (s)} = 308.27 \text{ (ms)}$$
$$2.92 \text{ (ms)} \times [(1600 \div 6) \div 79] \times 31.6 \text{ (s)} = 311.47 \text{ (ms)}$$

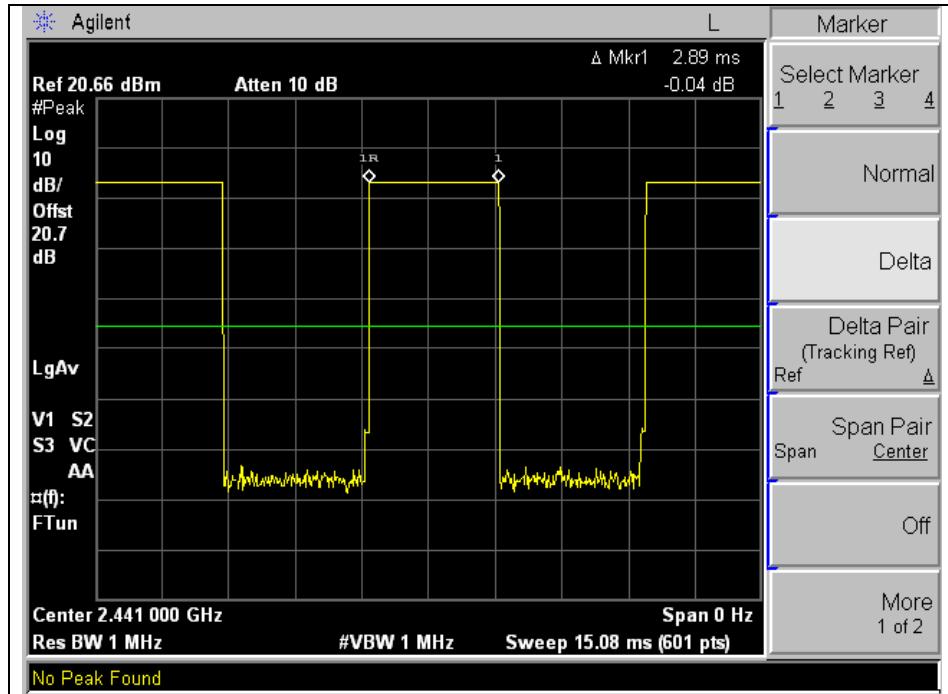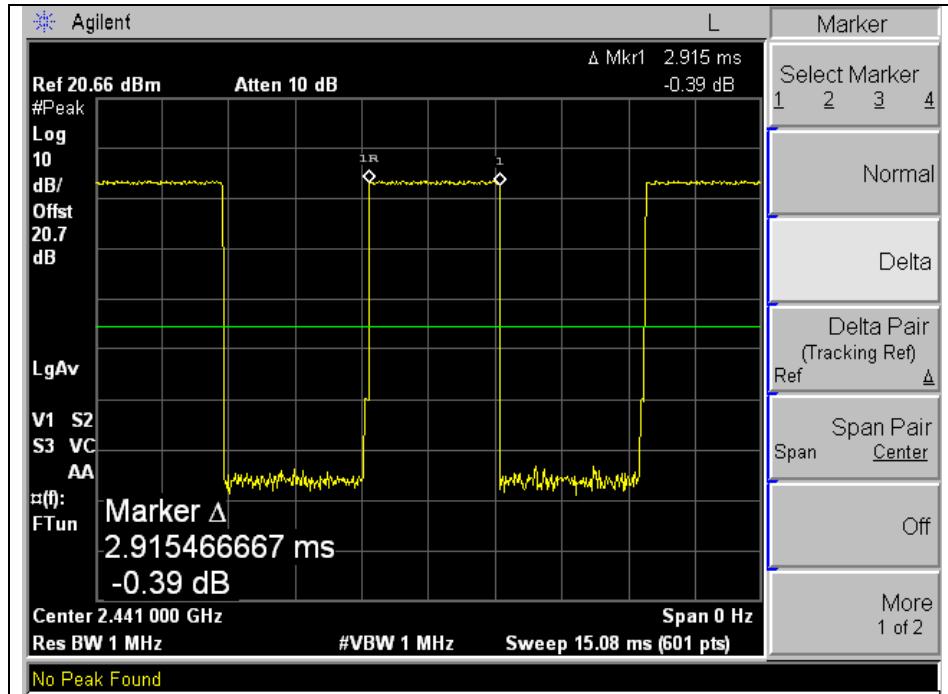Operating Mode: GFSK**Operating Mode: 8DPSK**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

11. Antenna Requirement

11.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dBi.

11.2. Antenna Connected Construction

Antenna used in this product is Integral type (Chip Antenna) gain of 2.38 dBi.