

EMC TEST REPORT

Project No. : LBE031494

Product : **PDP Monitor**

Model No. : **AH42****

Date of test : July 8 - 10, 2003

Issued Date : July 11, 2003


Tested by:


Kyung Chul, MIN / Test Engineer

Reviewed by:


No Cheon, PARK / Manager of EMC Lab.

Authorized by:


Kyu Baek, CHUNG / Chief of EMC Lab.

SAMSUNG ELECTRONICS Co., Ltd.

EMC Test Laboratory

416 Maetan-3 Dong, Paldal-Ku, Suwon City, Kyungki-Do, Korea, 442-742

Tel. : 81-31-200-2185 Fax. : 81-31-200-2189

Table of Contents

1. Introduction & Summary

- 1.1 Description of the EUT
- 1.2 Test facility
- 1.3 Test equipment

2. Test Set-up

- 2.1 Test mode
- 2.2 Justification
- 2.3 Test equipment setup
- 2.4 Tested System Details
- 2.5 System Block Diagram of Test Configuration
- 2.6 Test rule and Procedure
- 2.7 Test Summary

3. Test Results

- 3.1 AC POWERLINE CONDUCTED EMISSION MEASUREMENT
- 3.2 RADIATED EMISSION MEASUREMENT

1. Introduction & Summary

1.1 Description of the EUT

Applicant	SAMSUNG ELECTRONICS Co., Ltd.
Project Number	LBE031494
Equipment Under Test	PDP Monitor
Trade Name	SAMSUNG
Model Number	AH42**
Variant Model	-
FCC ID Number	A3LHPN4235

1.2 Test facility

The EMI/EMS measurement facilities used to collect the tested data are located at 416 Maetan 3 Dong, Paldal-Ku, Suwon City, Kyungki Do, Korea.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1 & 16-2.

SAMSUNG Electronics Co.,Ltd is accredited by Korea Laboratory Accreditation Scheme(KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the above test item(s) and test method(s).

Measured in Semi-anechoic chamber #1 that is FCC Registration Number 98856.

1.3 Test equipment

Equipment	Model No.	Serial No.	Makers	Last calibration and Interval
Spectrum analyzer	E7405A	MY42000109	Agilent	02/11/29, 12Months
	Firmware versions : Rev.29.9.86			
Quasi-peak adapter	85650A	2521A00687	H.P	02/10/09, 12Months
RF selector	NS4900	0303-015	TOYO	N/A
Field strength meter	ESCS30	839809/002	R & S	03/06/27, 12Months
	Firmware versions : Main 1.08, OTP 02.01, GRA 02.03			
Field strength meter	ESCS30	100104	R & S	03/01/17, 12Months
L.I.S.N	ESH3-Z5	847265/028	R & S	02/10/09, 12Months
Bi-Log Antenna	CBL6112B	2766	SCHAFFNER	0./06/20, 12Months
10dB Attenuator	8419B	58226	Agilent	02/10/08, 12Months
RF Relais Matrix	PSU	861206/024	R & S	N/A
Measurement Software	EP5CE	-	TOYO	N/A
Measurement Software	EP6RE	-	TOYO	N/A
EMC Analyzer	E7405A	MY42000052	Agilent	03/07/09, 12Months
Trun Table	DS412	-	HD	N/A
Antenna Mast	MA240	240/620	HD	N/A

2. Test Set-up

2.1 Test mode

The EUT was tested in the following operating modes for the tests mention in this report:

Description of Testing operating mode & Tested Resolution

Operating Mode	Resolutions	Refresh rates	Colors
'H" Pattern display	1024x768	Horizontal F.: 68kHz Vertical F. : 84Hz	32bits

Measured each about 2 input(PC VIDEO INPUT mode & Digital Video Interface)of EUT. Further details of cabling and configuration are shown in the test system configuration. The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

2.2 Justification

The system was configured for testing in typical fashion use. Cable were attached to each of the available I/O Ports.

The mode of operation utilized for testing was selected to best simulate typical EUT use.

2.3 Test equipment setup

The explanation of measuring equipment setup when respective function is used in any frequency band is as following:

Frequency Band [MHz]	Equipment	Detector function	Resolution Bandwidth	Video Bandwidth
0.15 to 30	EMI Test receiver	Quasi-Peak	9kHz	-
30 to 1000	Spectrum analyzer	Peak	100kHz	1MHz
	EMI Test receiver	Quasi-Peak	120kHz	-
Above 1000	EMI Test receiver	Peak	1MHz	1MHz

2.4 Tested System Details

1) Configuration of EUT and peripherals


Mark	Item	Model No.	Serial No.	Manufacturer	FCC ID
A	PDP Monitor	AH42**	-	Samsung	EUT
B	Personal Computer	MP22	D66892KTA00010	Samsung	-
C	Printer	K10158	CLG001000275	CANON	-
D	PS/2 Keyboard	7800	K08100020	Gateway	-
E	PS/2 Mouse	SBM-602	9CAK002649	Samsung	-
F	Speaker	-	-	Samsung	EUT
G	AC Adapter	K30088	CLG001000275	CANON	For printer

* DOC : FCC Declaration of Conformity

2) Used Cable Description

No.	Item	Length[m]	Shielded(Y/N)	Remark
1	PS/2 Mouse Cable	1.8	N	
2	PS/2 Keyboard Cable	1.6	N	
3	Video Cable(Analog)	1.5	Y	
4	Video Cable(Digital)	1.5	Y	
5	Speaker Cable	1.2	N	
6	AC Power Cable(Monitor)	1.8	N	
7	AC Power Cable(PC)	1.8	N	
8	AC Power Cable(Printer)	1.8	N	
9	Printer Cable	1.5	Y	
10	A/V In Cable	1.2	N	
11	S-Video In Cable	1.2	N	
12	BNC Cable	1.2	N	

2.5 System Block Diagram of Test Configuration

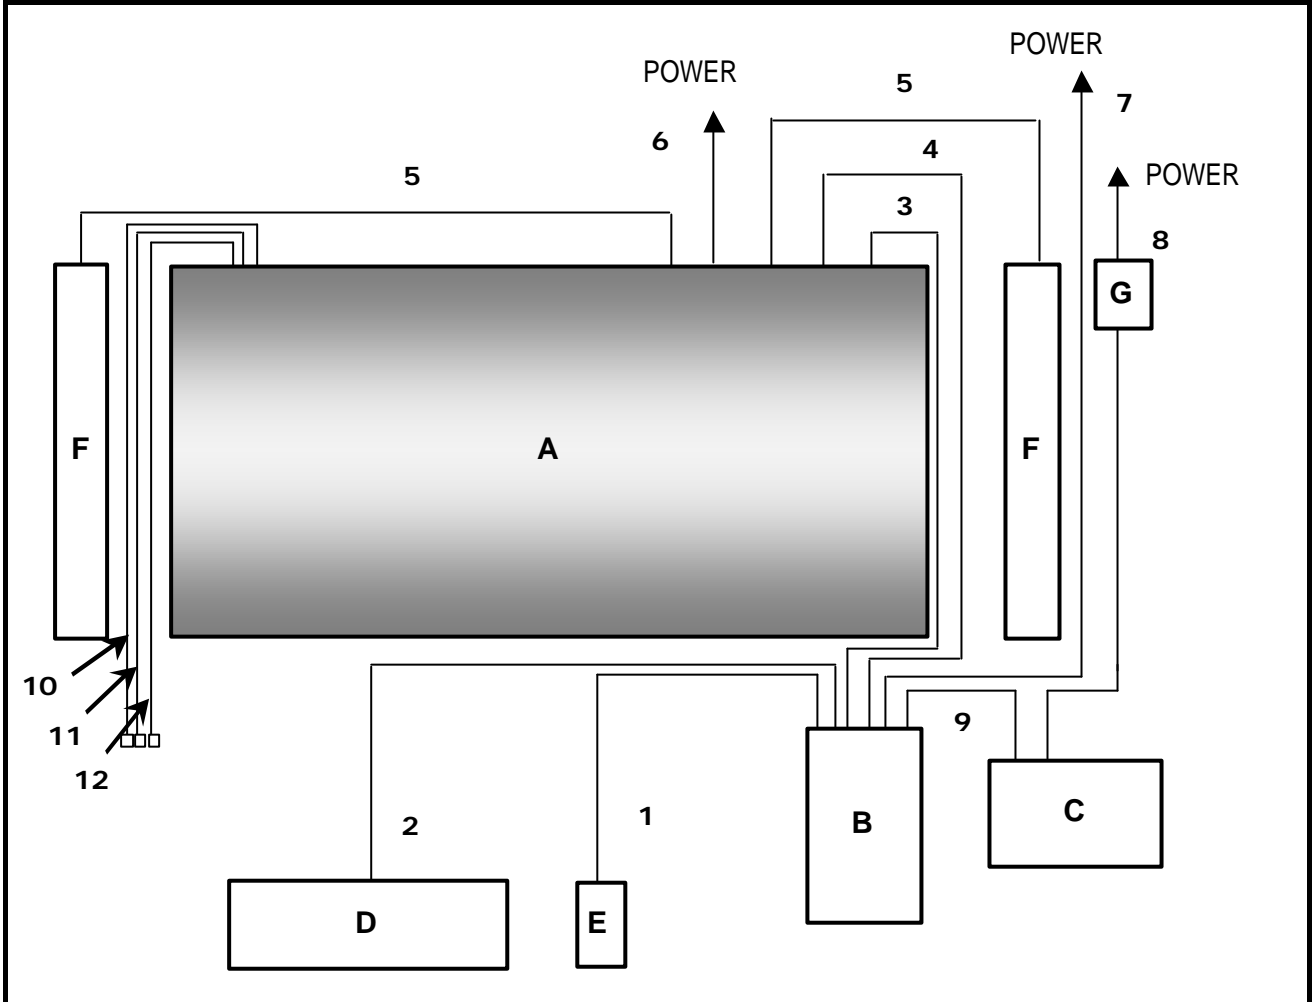

2.6 Test rule and Procedure

FCC Rule Part 15, Subpart B : Unintentional Radiators

Test Procedure : ANSI C63.4-1992

2.7 Test Summary

Test item	Test Procedure	Result
AC POWERLINE CONDUCTED EMISSION	ANSI C63.4-1992	Pass
RADIATED EMISSION	ANSI C63.4-1992	Pass

* N/A : Test not applicable

3. Test Results

3.1 AC POWERLINE CONDUCTED EMISSION MEASUREMENT

3.1.1 Test Procedure

Configure the EUT System in accordance with ANSI C63.4-1992 section 7 and 12.2.

Connect the EUT's AC line cord to the EUT port of LISN.

All input terminals are terminated in the proper impedance.


The output ports are connected to the cable provided with the device and the ending port are terminated in the proper impedance.

Using a calibrated coaxial cable, the TEST RECEIVER is connected to the measuring port of the LISN for EUT. To find out an EUT condition procedure the maximum emission, the position of cables, EUT operations mode are checked under normal usage of EUT.


Then, the emission are scanned from 0.15MHz to 30MHz relative to the limit are recorded.

3.1.2 Test Results


- Operating Mode : Analog Mode, LISN Mode_LIVE

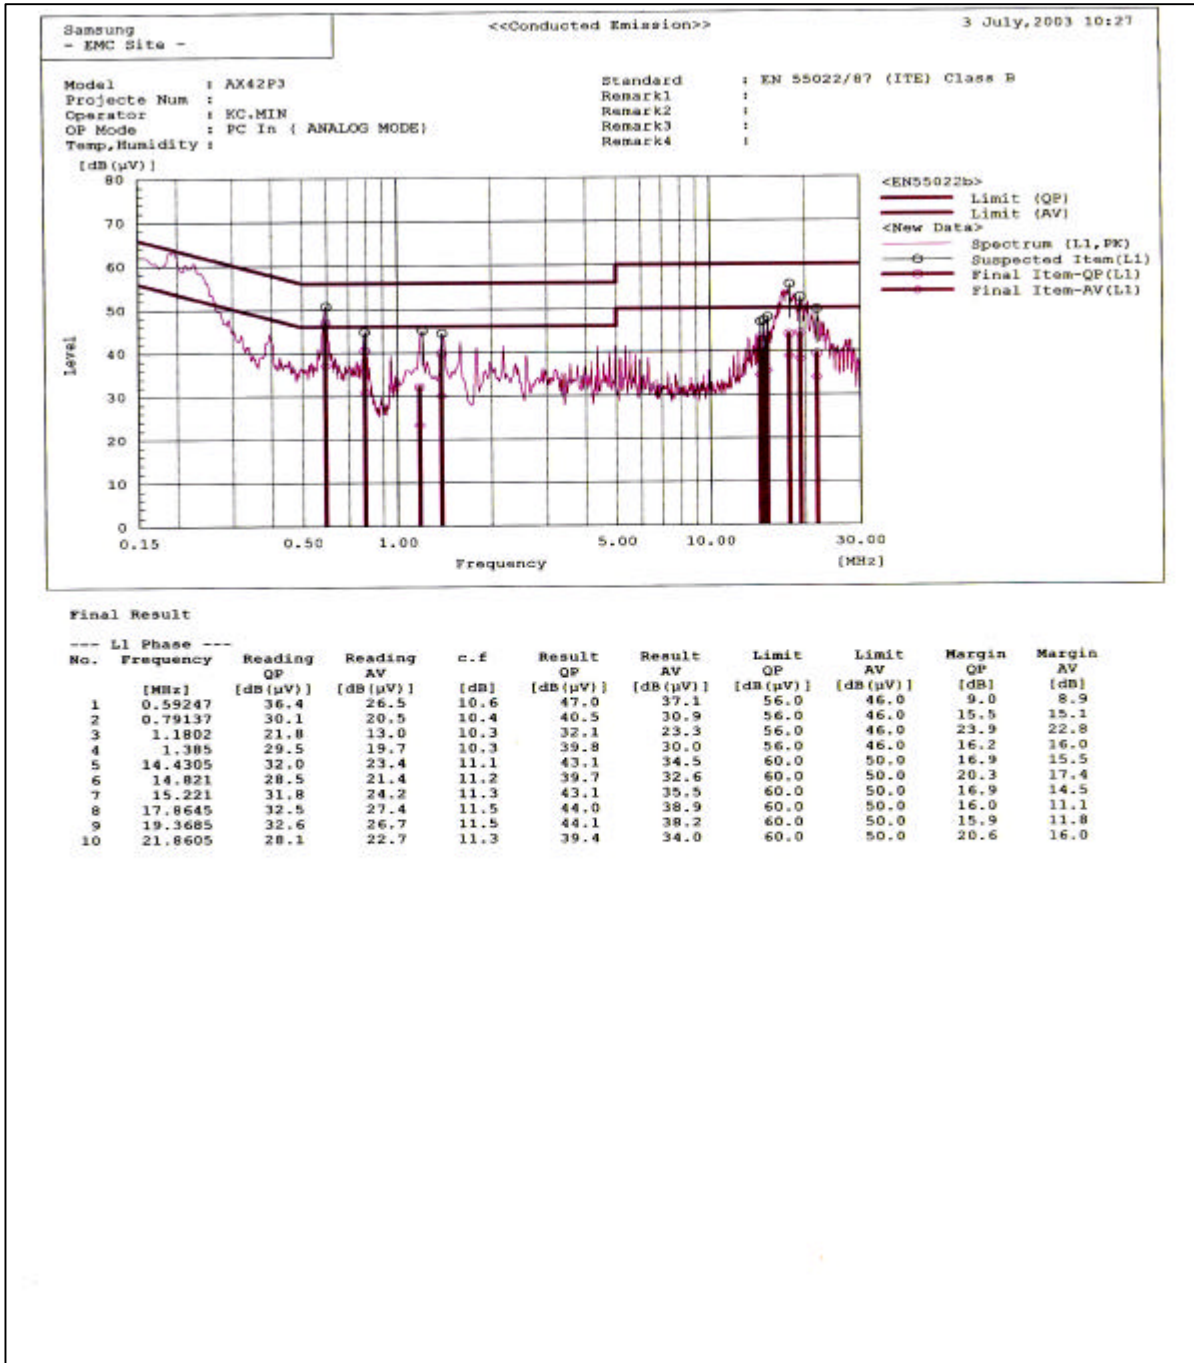


- Operating Mode : Analog Mode, LISN Mode_NEUTRAL

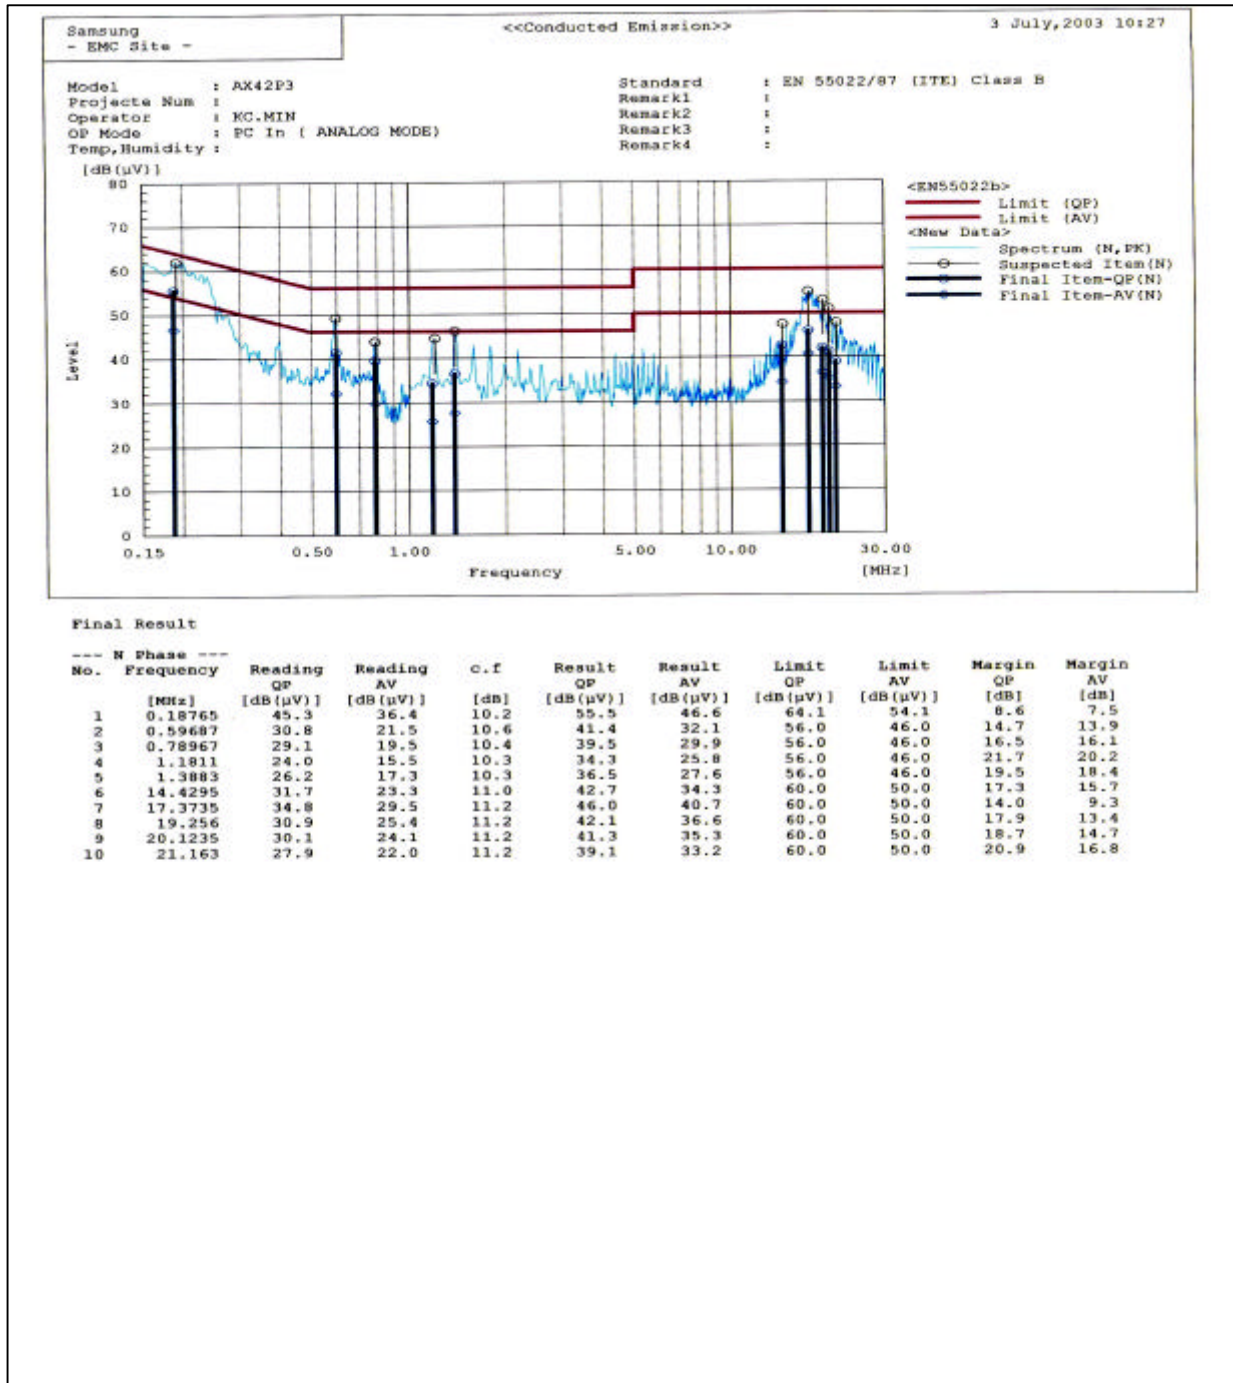

- Operating Mode : DVI Mode, LISN Mode_LIVE

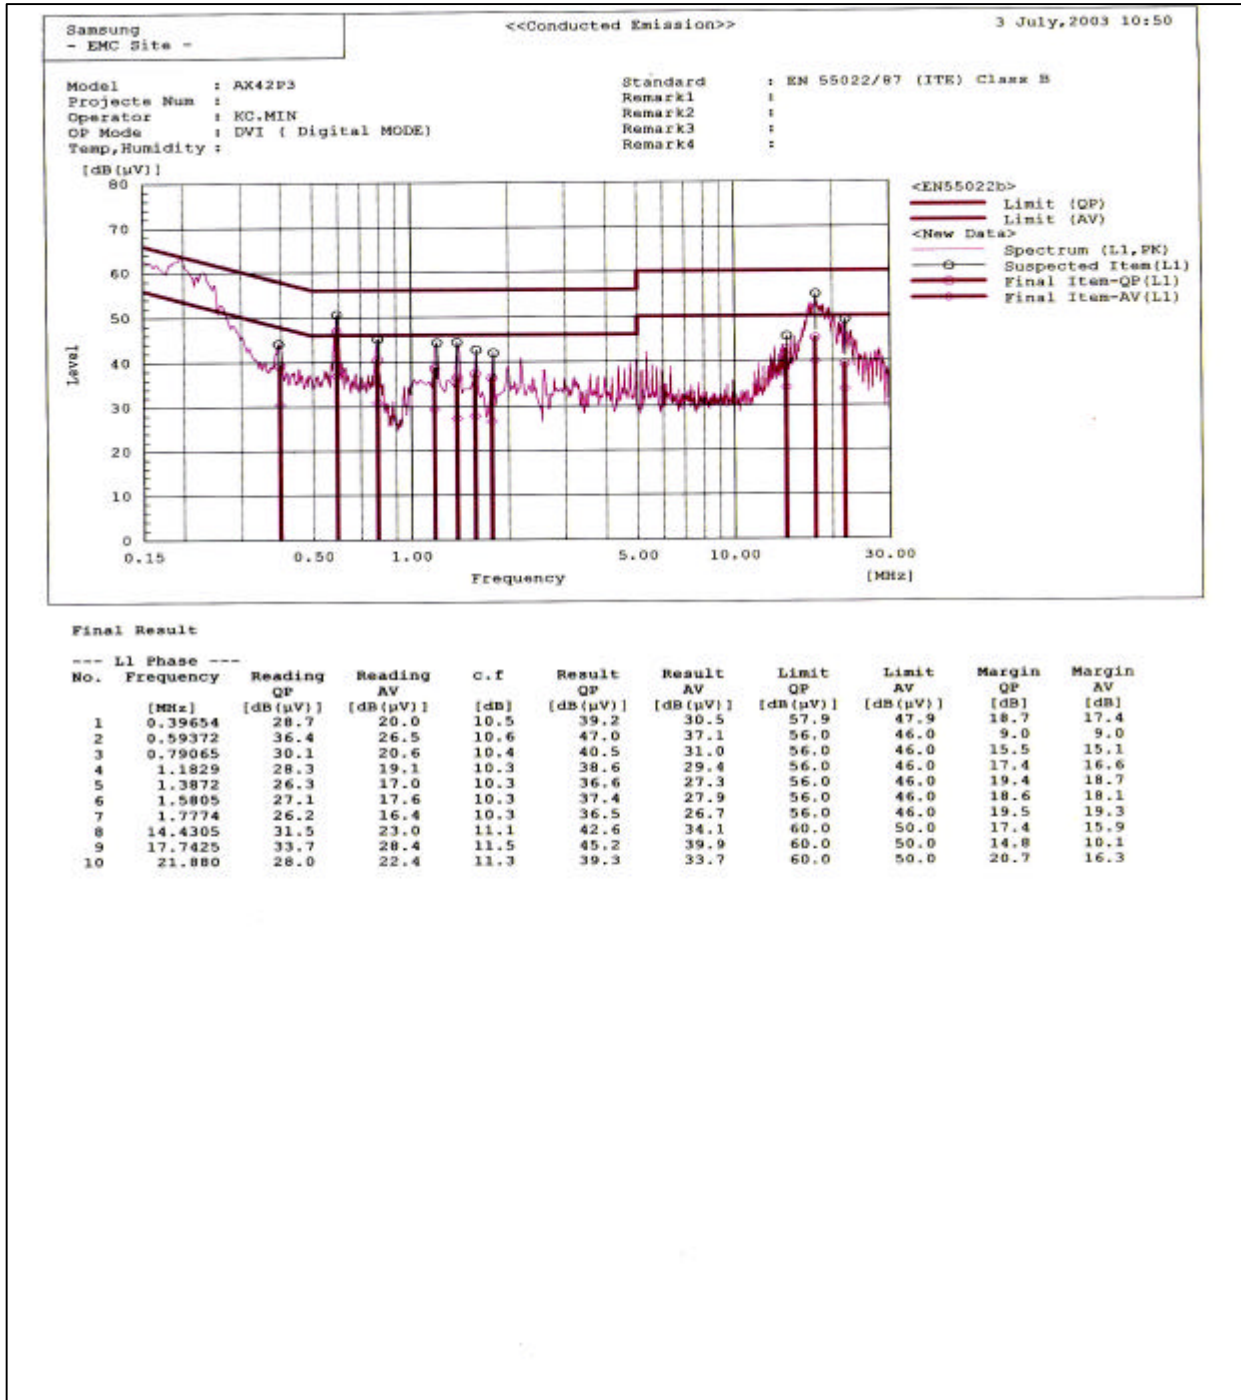

- Operating Mode : DVI Mode, LISN Mode_NEUTRAL

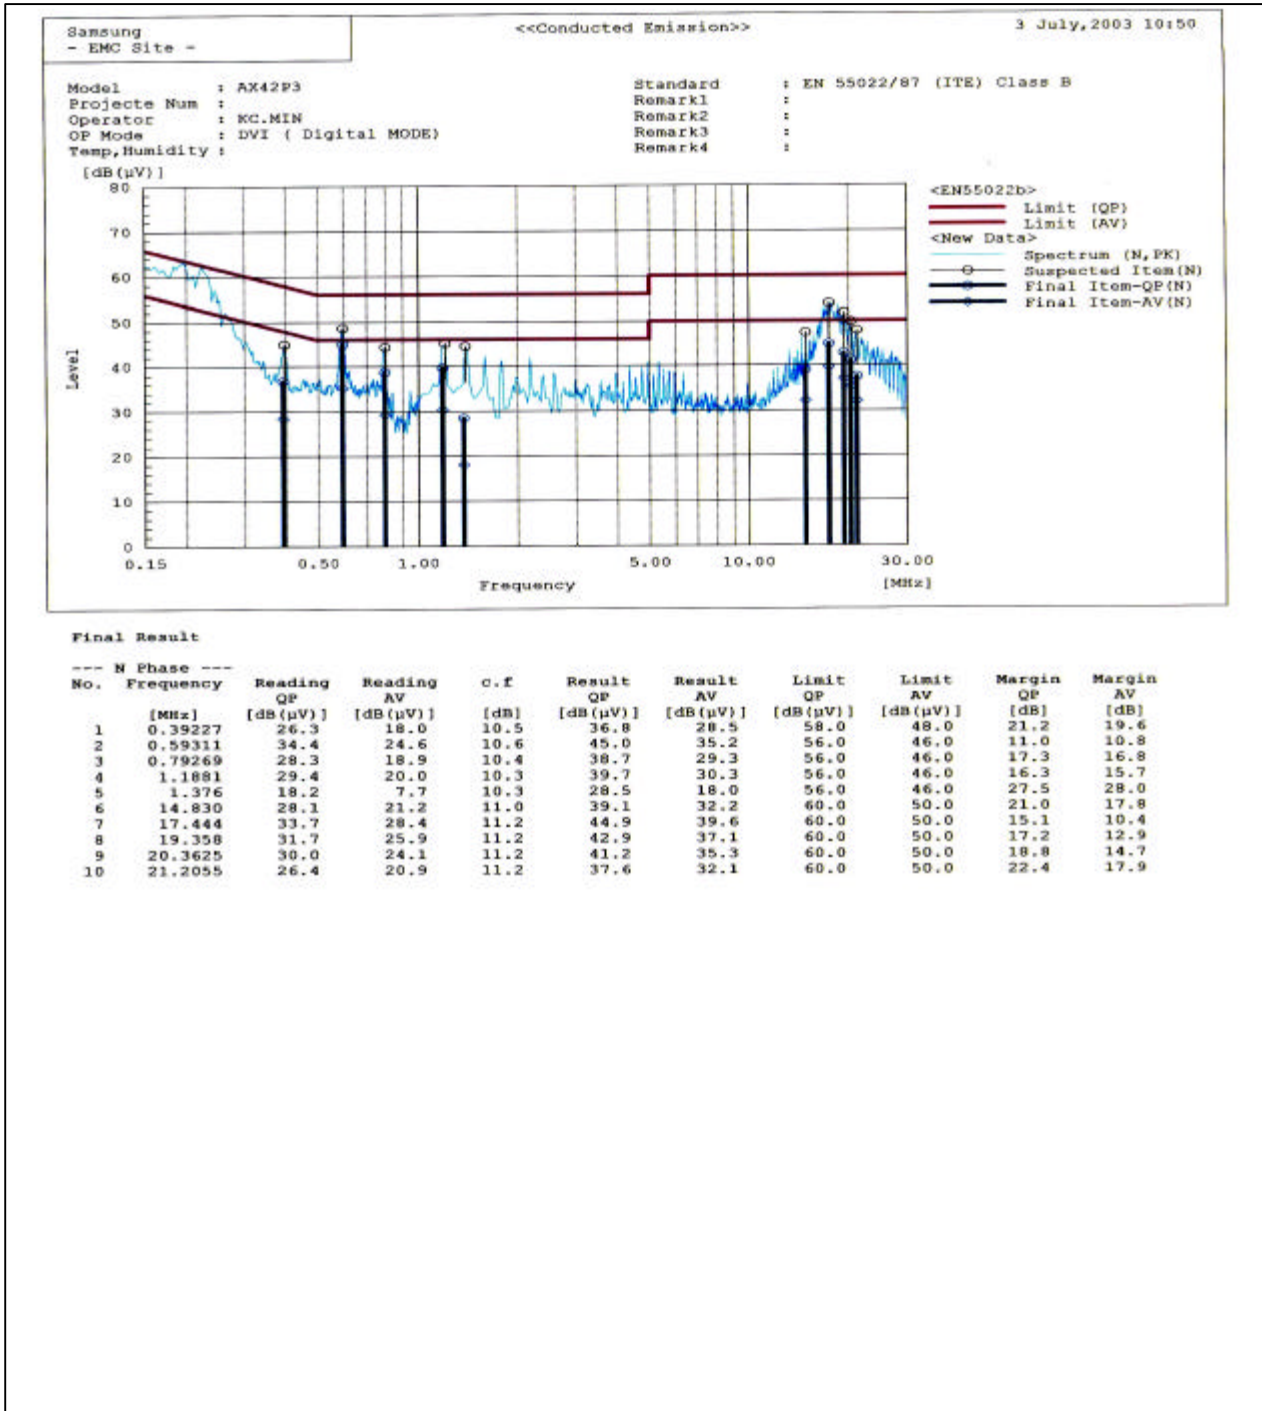

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 Test Procedure

Configure the EUT System in accordance with ANSI C63.4-1992 section 8 and 12.2.

Power cords for the EUT System are connected to the receptacle on the ground plane.


The output ports are connected to the cable provided with the device and the ending port of the cable are terminated in the proper impedance.

To find out the maximum emission, change the position of the cable, and the EUT operation mode under normal usage of the EUT.

The spectrum analyzer is scanned from 30MHz to 1,000MHz.



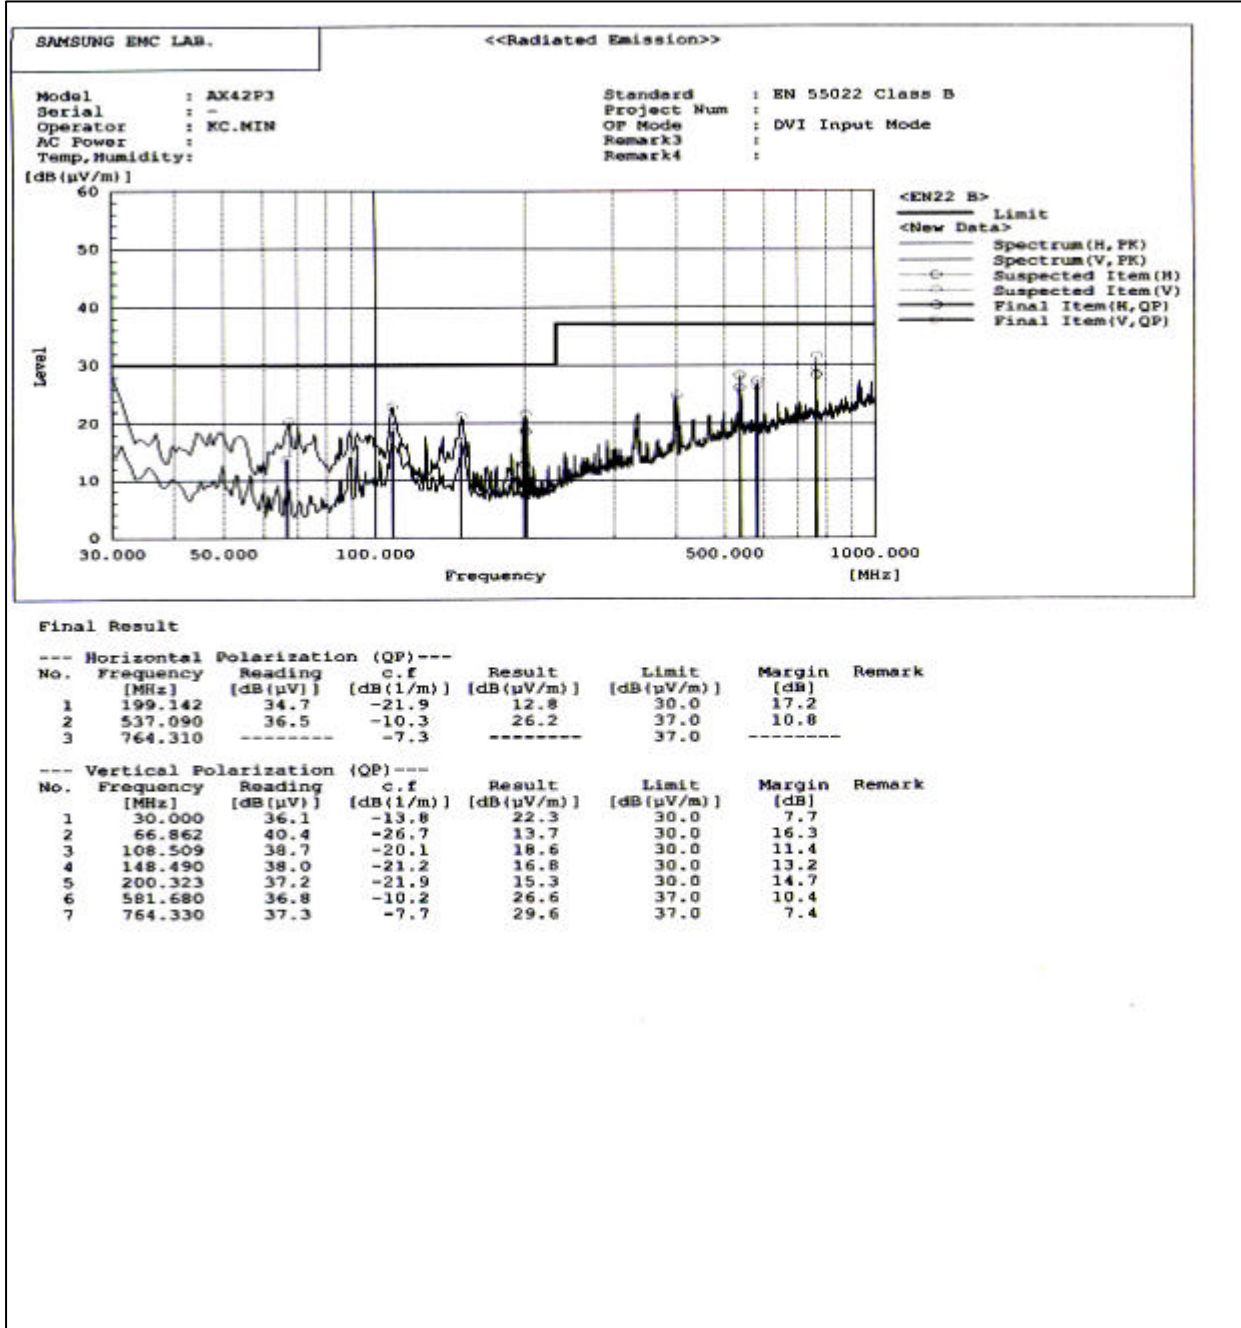


And, the detecting wave mode is peak mode, the graph's result in the worst arrangement state of EUT. The spectrum analyzer result did horizontal and vertical polarization max hold.


- Operating Mode: DVI Mode




EUT Photographs

[Label and Label position]

		SAMSUNG ELECTRONICS CANADA INC 7037 Financial Drive Mississauga, Ontario L5N 6R3 CANADA	
		SAMSUNG ELECTRONICS AMERICA INC. 105 CHALLENGER ROAD, RIDGEFIELD PARK N.J. 07660-0511, U.S.A	
Plasma DISPLAY MODEL : HPN4235 TYPE. NO : AH42A4 RATED INPUT 120 ~ ,60Hz 330W CHASSIS NO.: D55A		This device complies with part 15 of the FCC Rules. Operation is subject to the fol- lowing two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference re- ceived, including interference that may cause undesired operation.	
 LISTED 77HN E215927	 LR38329	FCC ID : A3LHPN4235	
Serial NO. XXXXXXXXXXXXXXXXXXXX	Manufactured/Fabrique : XX. XX. 2003 MADE IN SUWON KOREA(SEC) FABRIQUE EN SUWON COREE		
 <table border="1" style="margin: auto;"><tr><td style="text-align: center;">CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN</td></tr></table> 			CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN
CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN			
WARNING : TO PREVENT FIRE OR SHOCK HAZARD DO NOT OPEN EXPOSE THIS UNIT TO RAIN OR MOISTURE AVIS : RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR			

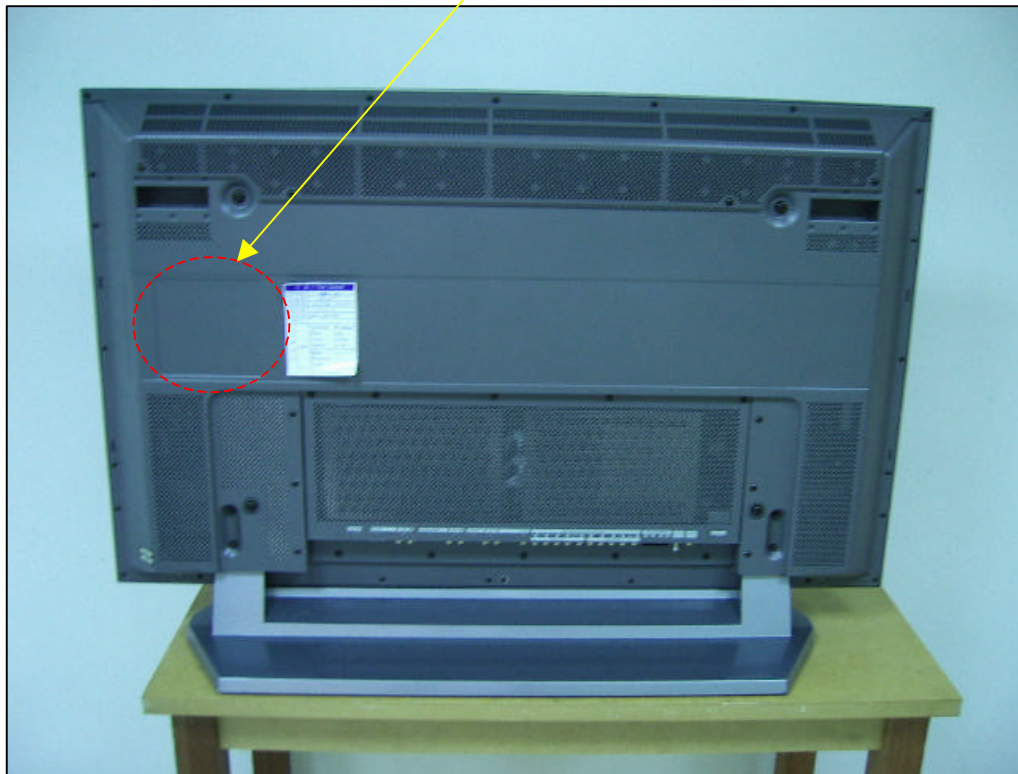

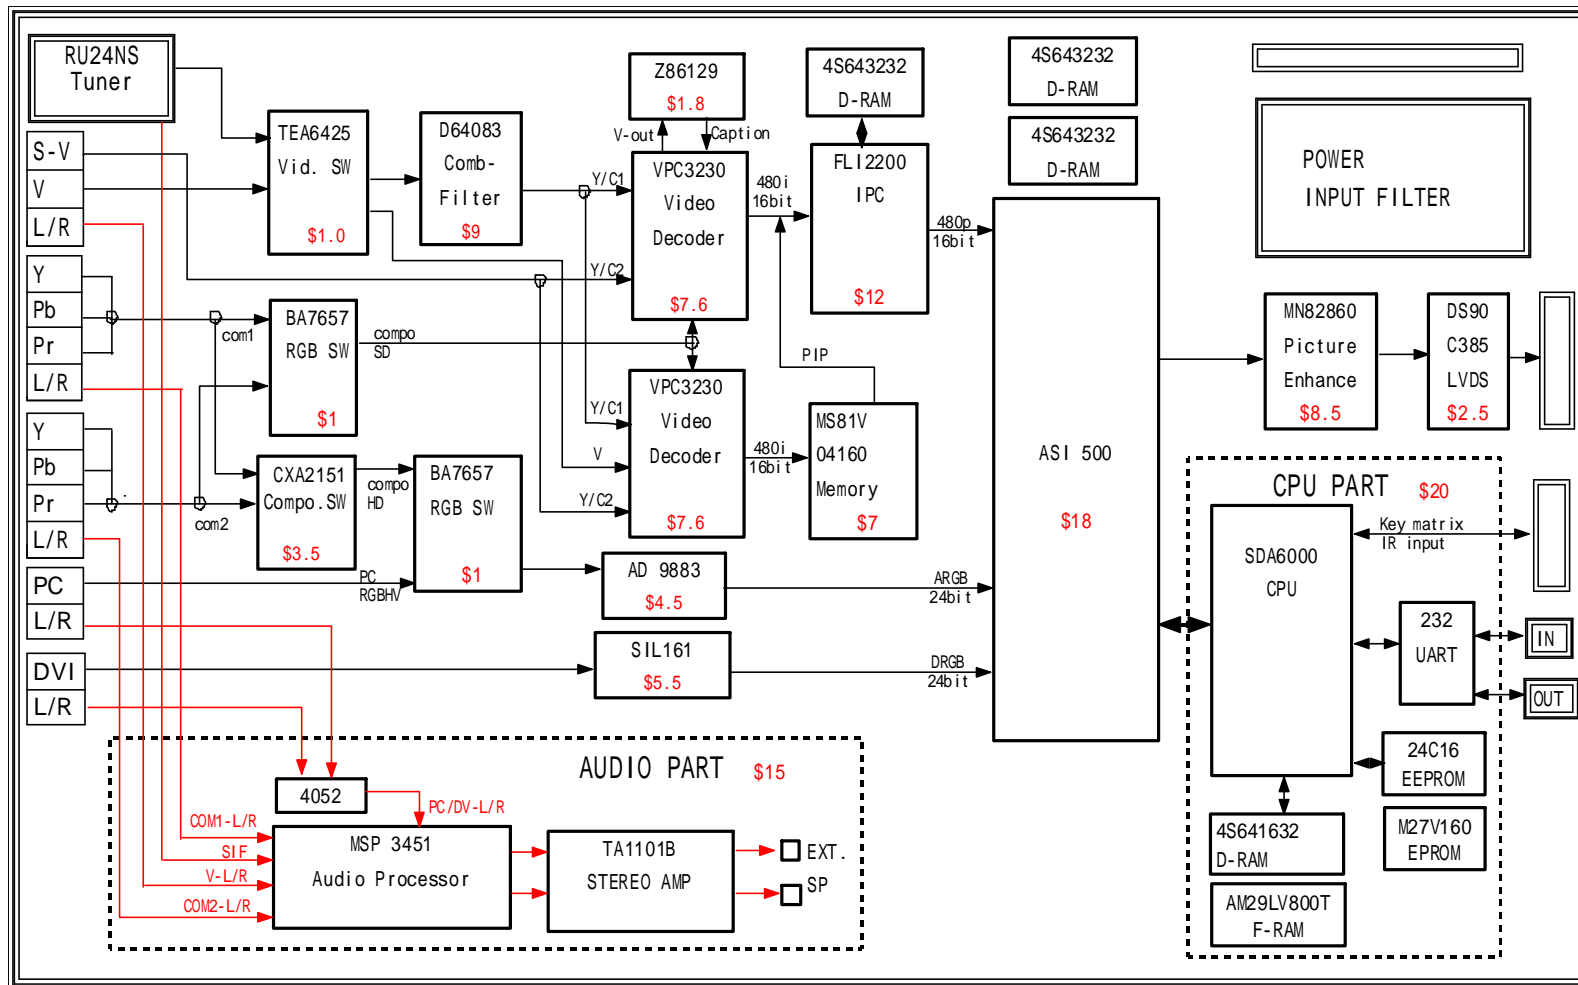


Test Set up Photographs

[AC POWERLINE CONDUCTED EMISSION MEASUREMENT]



Test Set up Photographs



[RADIATED EMISSION MEASUREMENT]

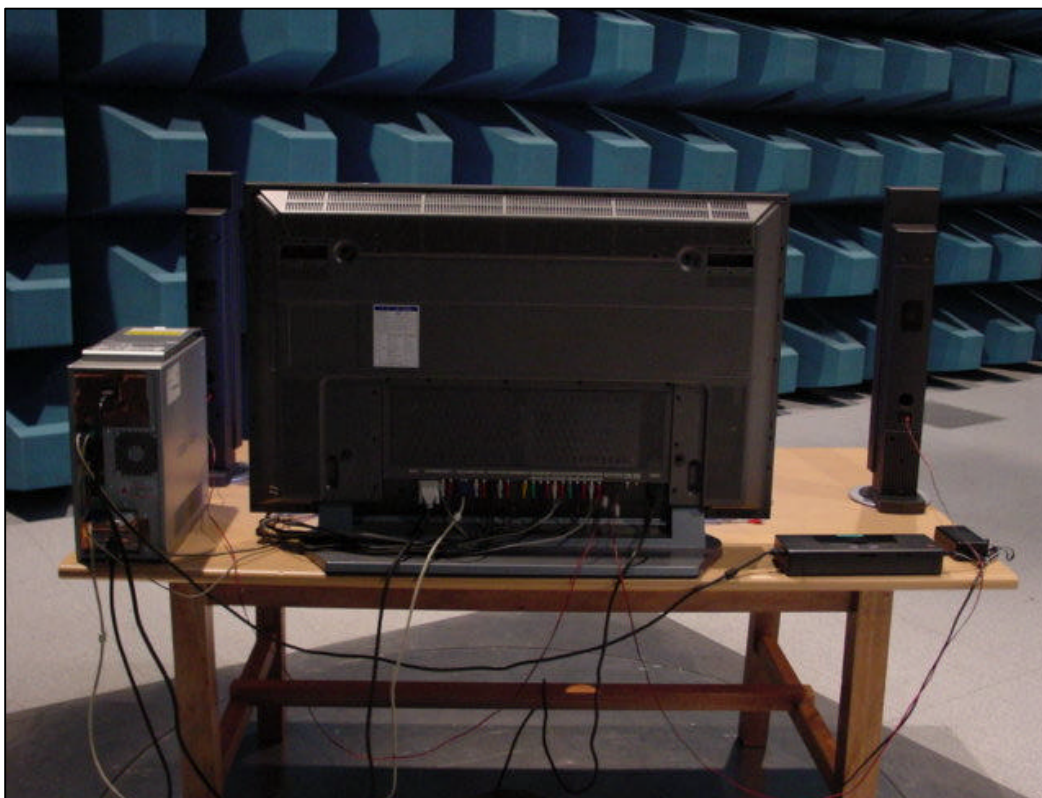



EUT Photographs





EUT Photographs

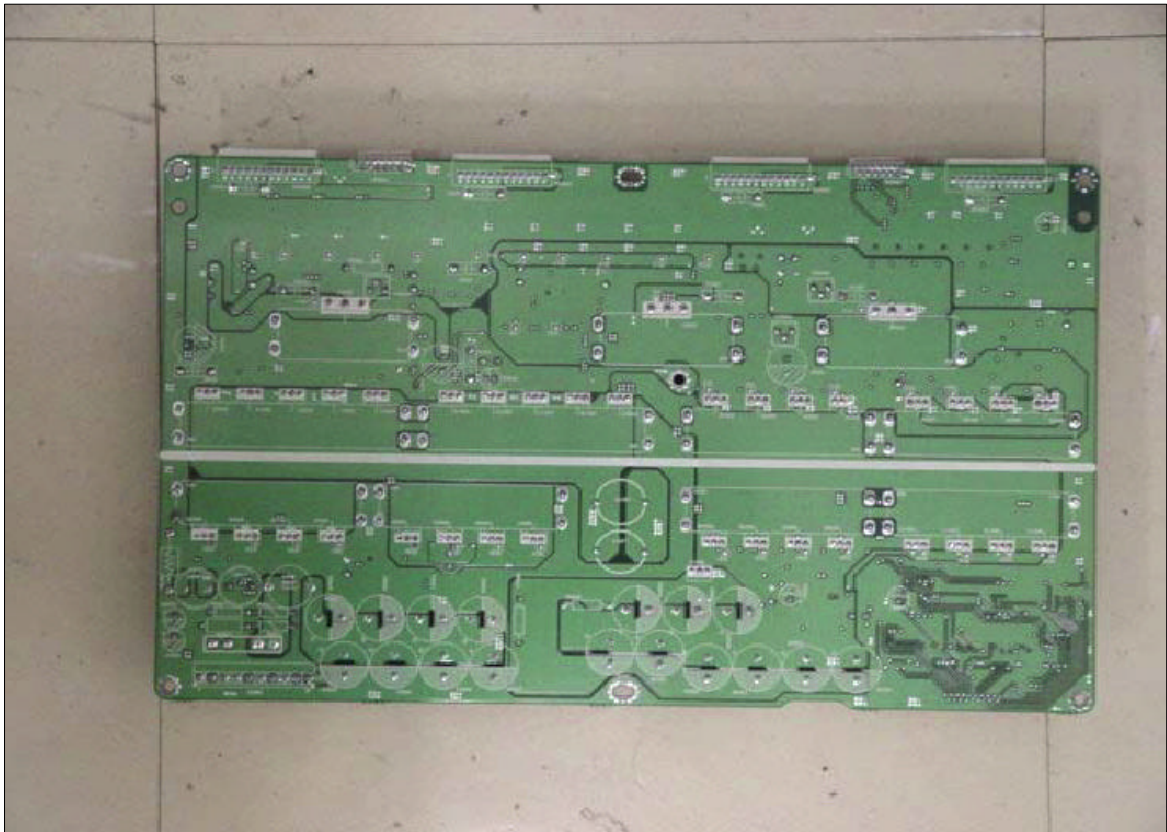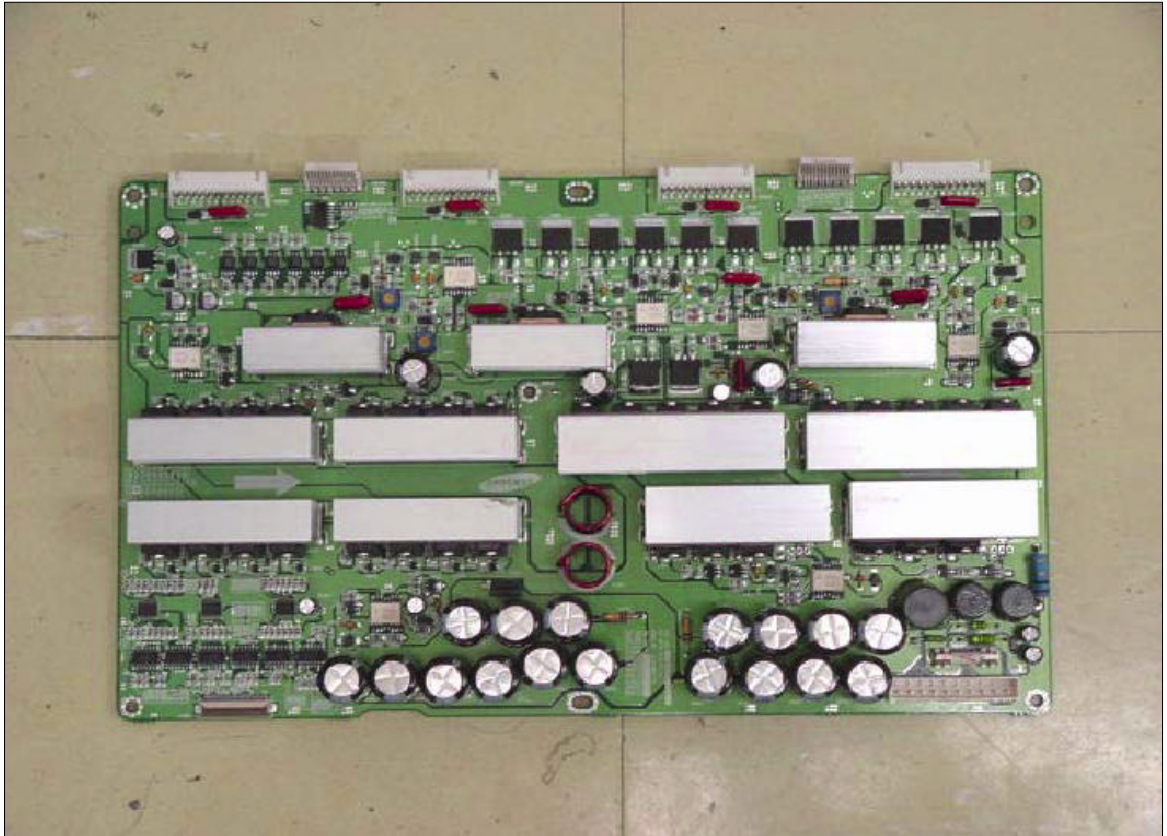

EUT Photographs

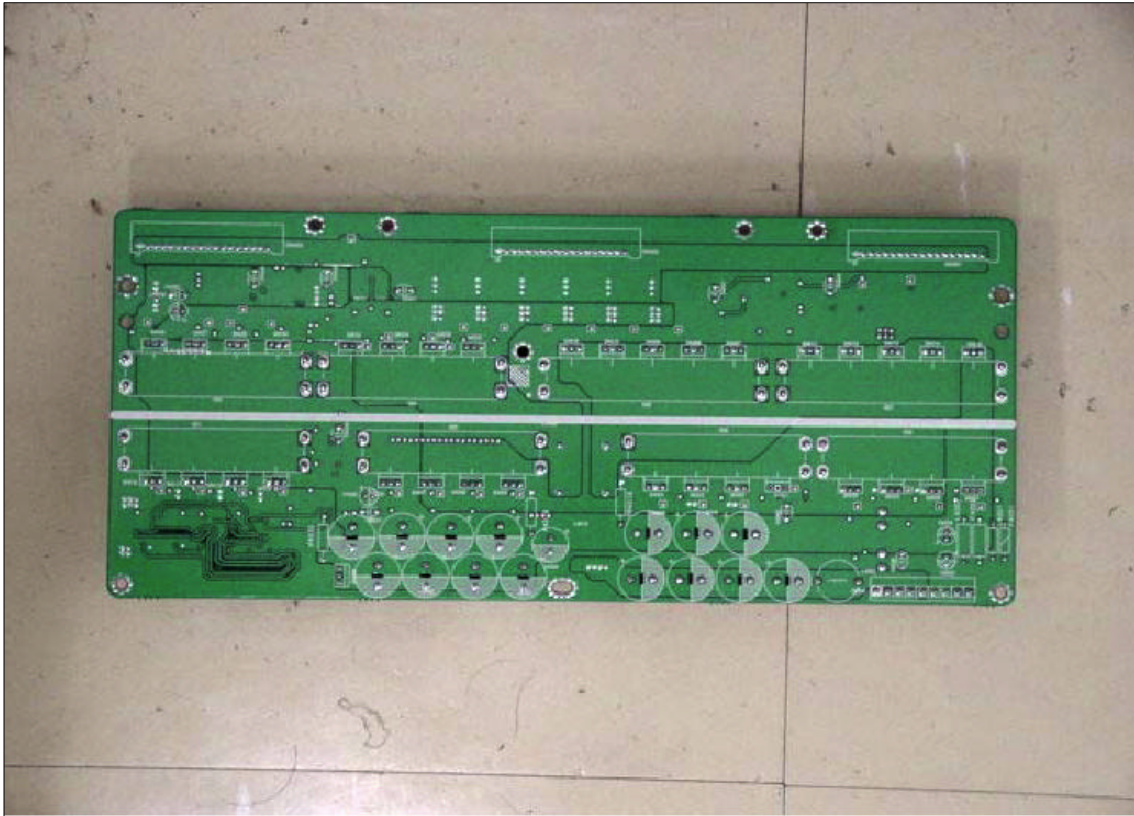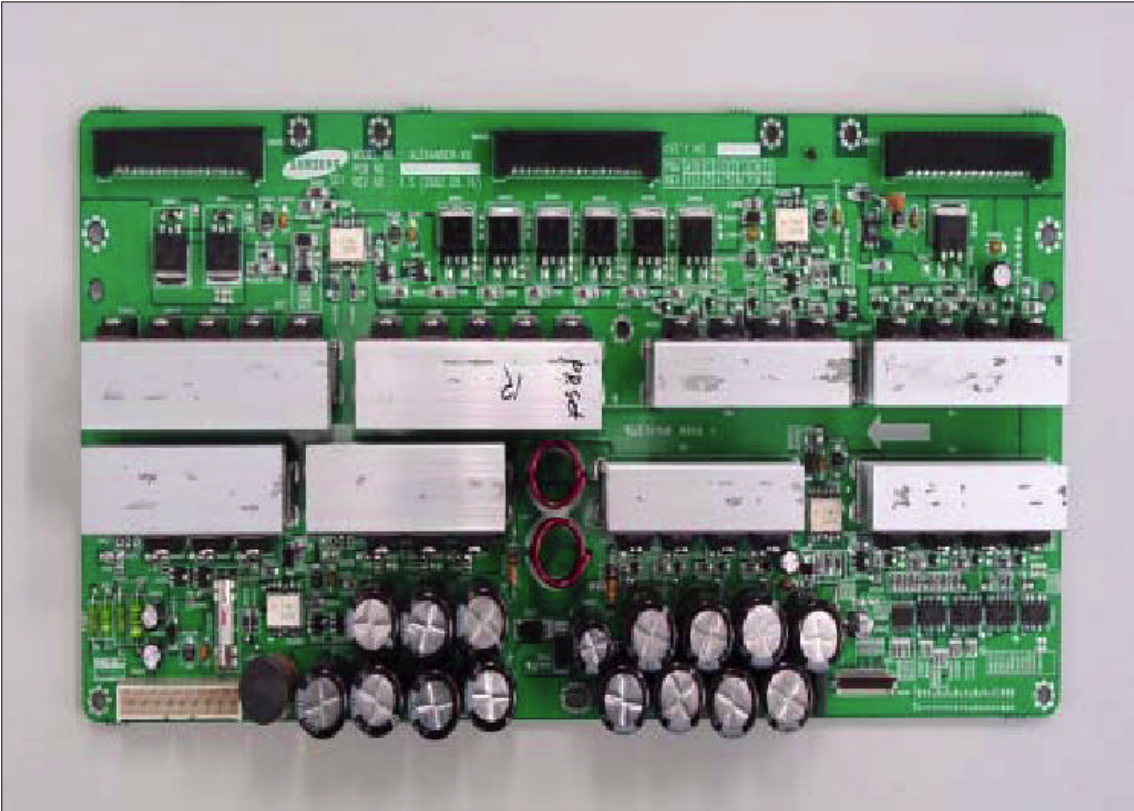



EUT Photographs

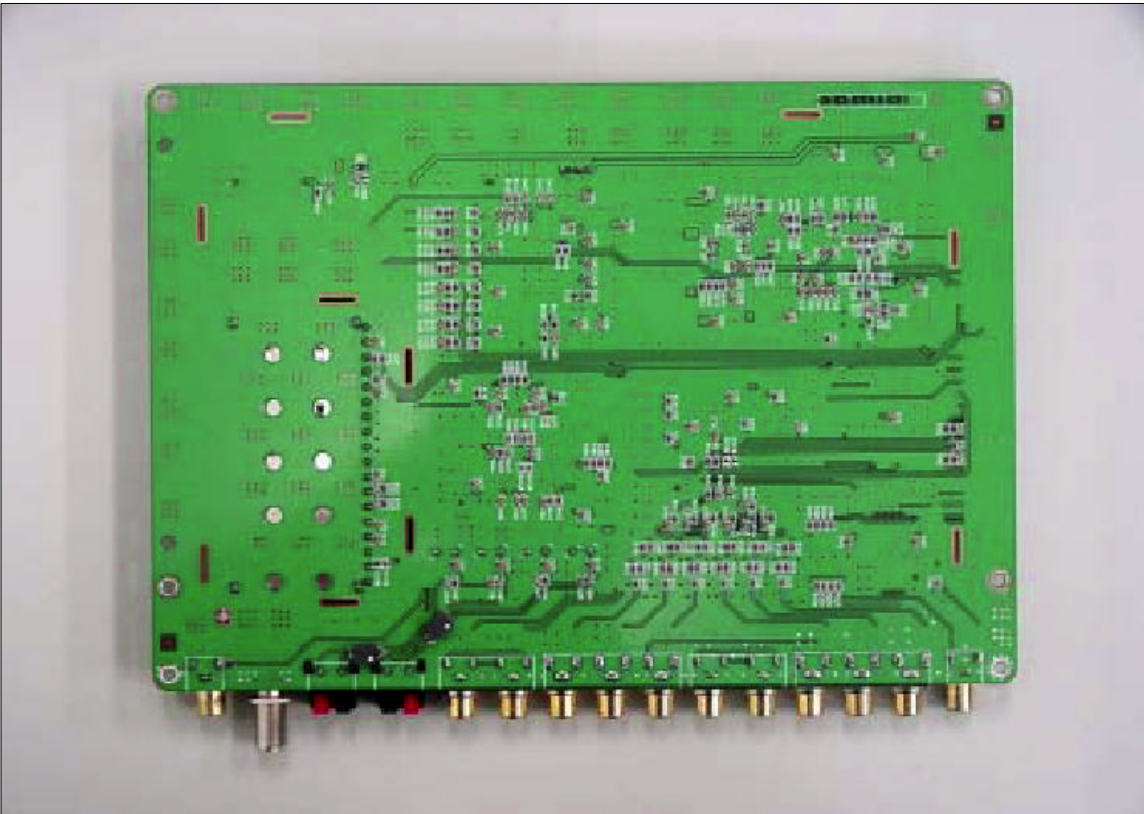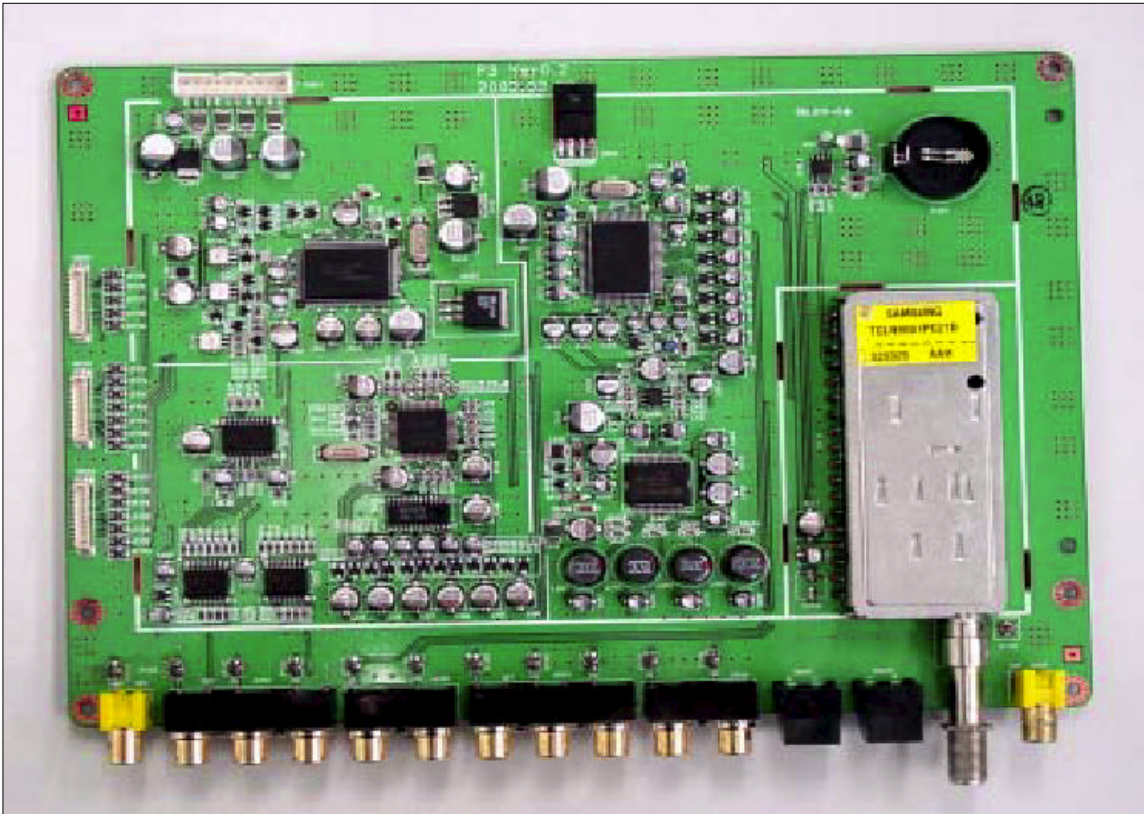

EUT Photographs



EUT Photographs

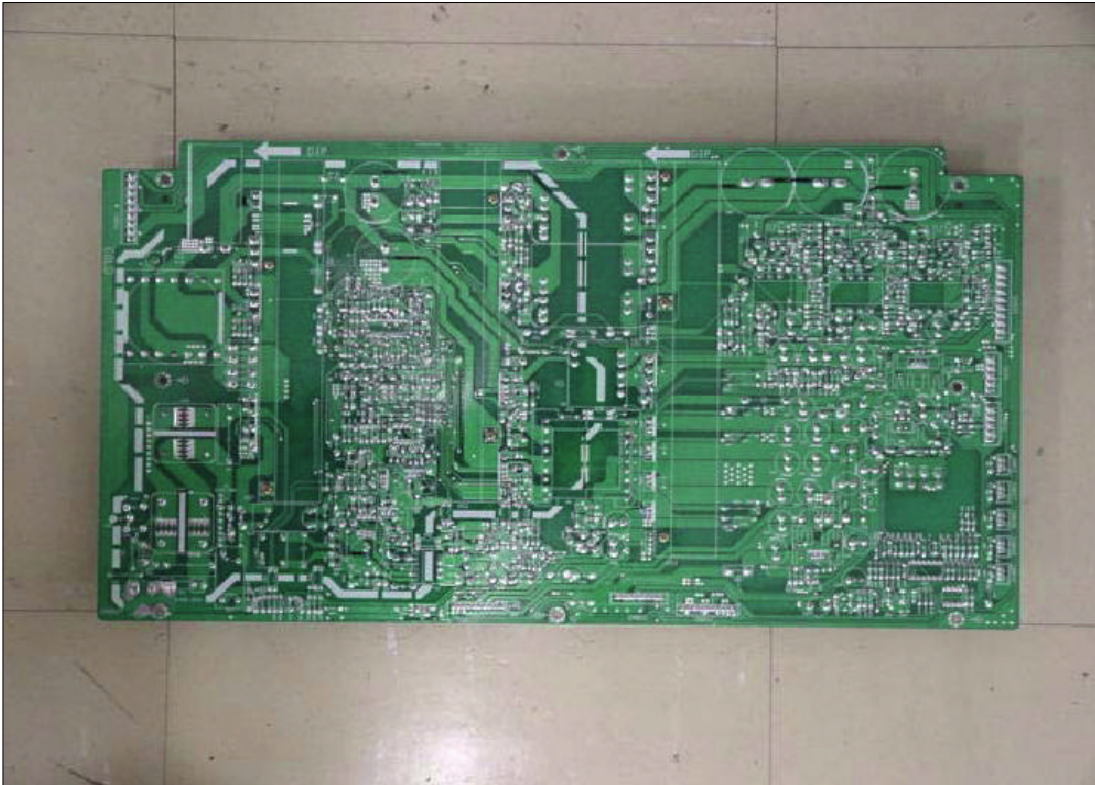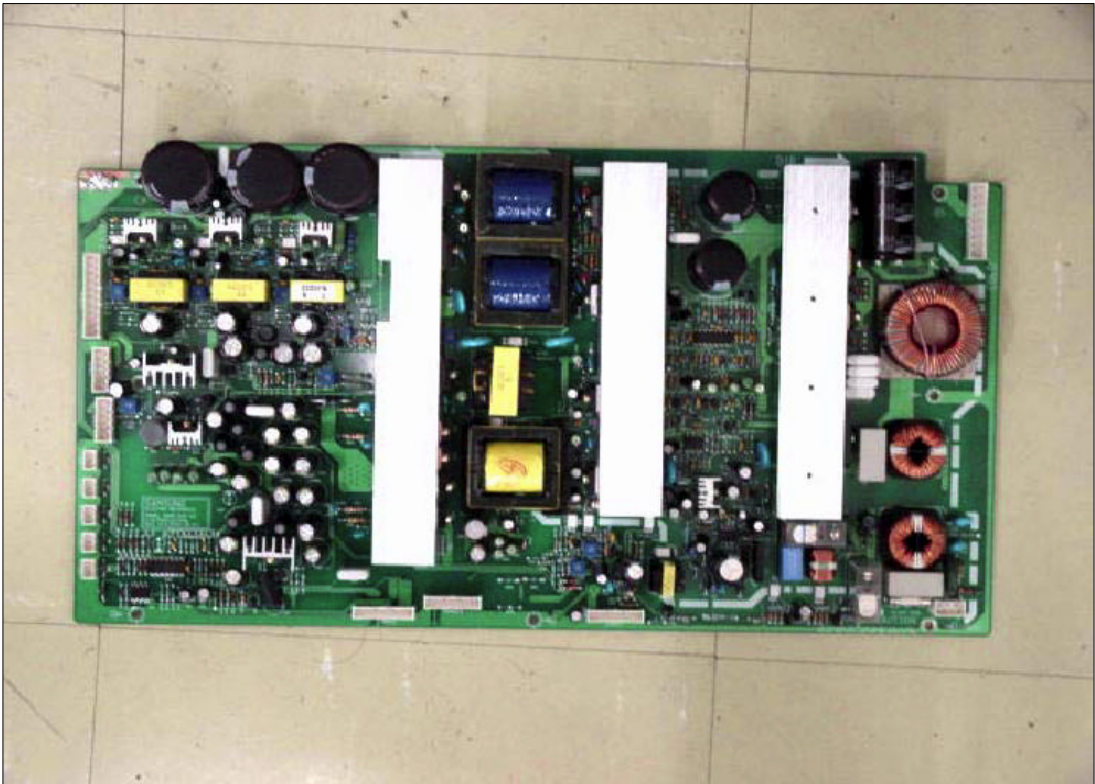

EUT Photographs

