

# EMI TEST REPORT

## FCC Part 15 Subpart B, Class B

**Product** : LBP  
**Model No.** : ML-1650  
ML-1651N,ML-1652P,ML-1653S,Phaser 3400(Xerox)

**JOB NO. : 01ISM211**

1. This test reports shall not be reproduced except in full, without the written approval of SEC EMC Testing laboratory.
2. This test reports does not constitute an endorsement by NIST/NVLAP or U.S Government.
3. This test report is to certify that the tested device properly complies with the requirements of FCC Rules and Regulations Part 15 Subpart B Unintentional Radiators.  
All tests necessary to show compliance to the requirements were and these results met the specifications requirement.

**Date of test** : May 2,2001

**Issued Date** : May 3, 2001

**Prepared by:** \_\_\_\_\_

Jong Ho, Lee / Test Engineer

**Reviewed by:** \_\_\_\_\_

Yang Su. KIM / Quality Manager

**Authorised by:** \_\_\_\_\_

Taek Jeong. SHIN / Chief of EMC Lab

This laboratory is registered by the NIST/NVLAP, U.S.A.  
The test reported herein have been performed in accordance  
with its terms of registration.

**NVLAP**<sup>®</sup>  
LAB CODE : 200447-0

## **Table of Contents**

### **1. General Information**

- 1.1 Product Description
- 1.2 Tested System Details
- 1.3 Test Methodology
- 1.4 Test Facility

### **2. System Test Configuration**

- 2.1 Operation Environment
- 2.2 Justification
- 2.3 EUT Exercise Software
- 2.4 Test Procedure
- 2.5 Test System configuration

### **3. Conducted and Radiated Measurement Photos**

- 3.1 Conducted Measurement Photos
- 3.2 Radiated Measurement Photos

### **4. Measurement Uncertainty**

- 4.1 Conducted Emission Test
- 4.2 Radiated Emission Test

### **5. Conducted Emission Test Data**

### **6. Radiated Emission Test Data**

### **7. Label and Label Location**

### **8. Test Equipment Used**

## 1. General Information

**APPLICANT** : SAMSUNG ELECTRONICS CO., LTD.

**ADDRESS** : 416, Maetan-3Dong, Paldal-Gu  
Suwon-City, Kyungki-Do, Korea 442-742

**CONTACT PERSON** : SangCheol,Park  
TEL. +82-31-200-4298

**CONTACT ADDRESS** : 416, Maetan-3Dong, Paldal-Gu  
Suwon-City, Kyungki-Do, Korea 442-742

**REGULATION(S)** : FCC Part 15 Subpart B, Class B

**MODEL NUMBER** : ML-1650

**SERIAL NUMBER** : -

**KIND OF PRODUCT** : LBP

**TESTED DATE** : May 2,2001

**TEST SITE** : 3meter semi-anechoic chamber

**TEST SITE ADDRESS** : San 14, Nongseo-Ri, Kihung-Eup,  
Yongin-City, Kyungki-Do, Korea, 449-900

### 1.1 Product Description

The Samsung ML-1650 print at 600 dots per inch, 16 pages-per-minute. It supports N/W printing (Optional Standard 500 sheet automatic input tray and a 30-sheet manual input tray support various sizes, type). Main System Clock is 11.1MHz, and Video clock is 61.233MHz, USB clock is 48MHz crystal. Power rating is AC100~127V and 300W Power consumption during operation and less than in sleep mode. See the attached ML-1650 User's Guide for more information.

### 1.2 Tested System Details

The FCC IDs for all equipment, plus descriptions of all products used in the tested system are:

Device Type	Manufacturer	Model Number	Serial No.	FCC ID / DoC
(1) LBP (EUT)	Samsung	ML-1650	N/A	A3LML1650
(2) PC	SAMSUNG	TD260-DT	C92DK409981	FCC DoC
(3) Monitor	Samsung	SyncMaster400TFT	H4KH700353	FCC DoC
(4) Keyboard	HP	5183-9980	J94003612	FCC DoC
(5) Mouse	Sejin	SMB-400	4FEF027845	GJS965CO
(6) External Modem	US Robotics	SPORTSTER	33083962	CJE-0149-217
(7) EtherNet Switch	Samsung	SS6224SU	S26NB00006	FCC DoC

### 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in FCC/ANSI C63.4(1992).

Radiated testing was performed at a distance of 3 meters from the antenna to EUT.

### 1.4 Test Facility

All tests described in this report were performed by :

Open area test site : 781-14, Chung-Ri, Dongtan-Myun, Hwasung-Kun, Kyungki-Do, Korea  
Conducted measurement facility and 3meter Semi-anechoic chamber :  
San 14, Nongseo-Ri, Kihung-Eup, Yongin-City, Kyungki-Do, Korea, 449-900

## 2. System Test Configuration

### 2.1 Operation Environment

	Conduction	Radiation
Temperature [ ] :	23	23
Humidity [%] :	36	36
Power supply :	AC120V/60Hz	AC120V/60Hz

### 2.2 Justification

The system was configured in typical fashion(as a customer would normally use it) for testing.

### 2.3 EUT Exercise Soft ware

The EUT exercise program used during radiated and conducted testing is word editor(Hun2000).Type H character on document 10 page and then execute print to EUT continuously.When we test N/W print,first IP of EUT was assigned as 165.213.110.85,and then Other Computer send Document to EUT via N/W.

### 2.4 Test Procedure

#### 2.4.1 Conducted Emissions

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting ground plane.

The rear of EUT, including peripherals was aligned and flush with rear of tabletop. All other surfaces of tabletop was at least 80cm from any other grounded conducting surface. I/O cables and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

Each EUT current-carrying power lead, except the ground(safety) lead, were individually connected through a LISN to the input power source.

All unused 50 ohm connectors of the LISN were resistively terminated in 50 ohm when not connected to the measuring equipment.

### 2.4.2 Radiated Emissions

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane.


The rear of EUT, including peripherals was aligned and flush with rear of tabletop. I/O cables that were connected to the peripherals were bundle in center.

They were folded back and forth forming a bundle 30cm to 40cm long and were hanged 40cm height to the ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

## 2.5 Test System configuration

### 2.5.1 System Block Diagram of Test Configuration

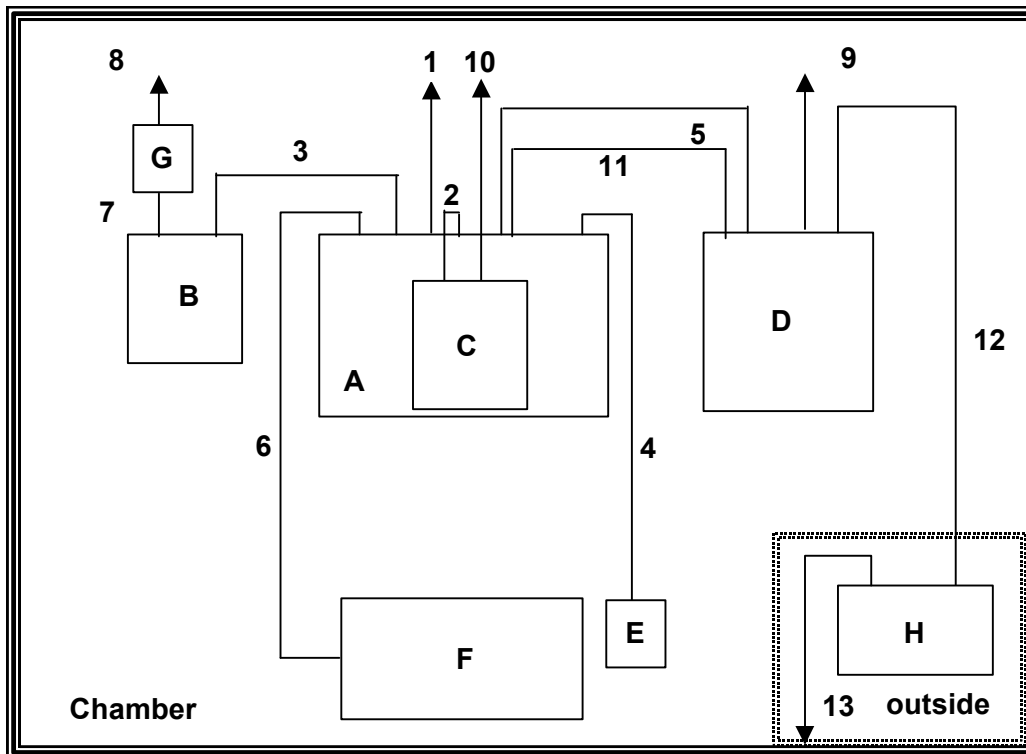

### 2.5.2 Configuration of EUT and peripherals

Mark	Item	Model No.	Serial No.	Manufacturer	Remark
A	Desktop computer	TD260-DT	C92DK409981	Samsung	
B	External Modem	SPORTSTER	33083962	US ROBOTICS	
C	Monitor	SyncMaster400TFT	H4KH700353	Samsung	
D	Laser Printer	ML-1650	-	Samsung	EUT
E	PS/2 Mouse	SMB-400	4FEF027845	SEJIN	
F	Keyboard	5183-9980	J94003612	HP	
G	AC/DC Adaptor	AW-1220A	-	AnJeon	
H	EtherNet Switch	SS6224SU	S26NB00006	Samsung	Outside

### 2.5.3 Used Cable Description

No.	Item	Length[m]	Shielded(Y/N)	Remark
1	AC Power cable	1.7	N	
2	Video cable	1.5	Y	
3	Serial cable	1.5	Y	
4	Mouse cable	2	Y	
5	Printer cable	1.5	Y	
6	Keyboard Cable	1.5	Y	
7	DC Power cable	1.7	N	
8	AC Power cable	1.7	N	
9	AC Power cable	1.7	N	
10	AC Power cable	1.7	N	
11	USB	1.8	Y	
12	LAN cable	10	N	
13	LAN cable	5	N	

### 3. Conducted and Radiated Measurement Photos

\* Cabling was taken into consideration and test data was taken under worse case conditions.

#### 3.1 Conducted Measurement Photos

##### o Conduction(Front View)



##### o Conduction(Rear View)




\* Cabling was taken into consideration and test data was taken under worse case conditions.

### 3.2 Radiated Measurement Photos

#### o Radiation(Front View)



#### o Radiation(Rear View)

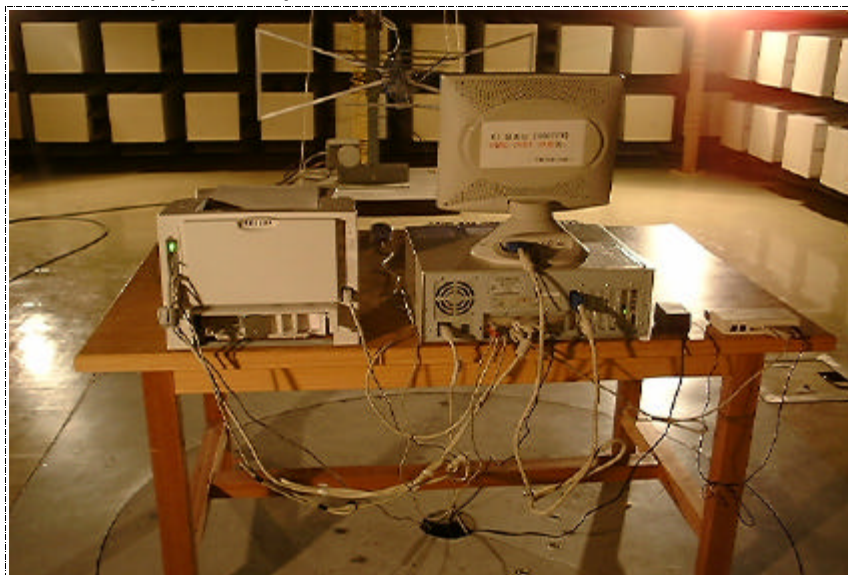

## 4. Measurement Uncertainty

All data in report are to be traceability to the national or international standards.

### 4.1 Conducted Emission Test

The measurement uncertainty(with a 95% confidence level)for this test was  $\pm 2.08\text{dB}$ .

The data listed in this test report may exceed the test limit because it does not have enough margin(more than 2.0dB).

*The data listed in this test report has enough margin, more than 2.08dB.*

### 4.2 Radiated Emission Test

The measurement uncertainty(with a 95% confidence level)for this test was as follow  
30MHz~200MHz :  $\pm 4.50$                       200MHz~1000MHz :  $\pm 5.23$

The data listed in this test report may exceed the test limit because it does not have enough margin(more than 2.0dB).

*The data listed in this test report has enough margin, more than 3.4dB.*

## 5. Conducted Emission Test Data

The initial step in collecting conducted data was to perform a quasi-peak scan over the measurement range using a spectrum analyzer.

EUT was printed continuously via IEEE1284,USB,N/W.After all mode was investigated, we report worst-case emission.It was printing via USB.

All other emission are non-significant.

**The minimum margin to the limit is as follows :**

Frequency : **1.716** [MHz]  
 Meter Reading : **36** [dBuV]  
 LISN Loss : **0.18** [dB]  
 Cable loss : **0.4** [dB]  
 Corrected Readings : **36.58** [dBuV/m]  
 Margin : **-11.38** [dB]

### Test Data Sheet

Tested Frequency [MHz]	Meter Reading [A] [dBuV]	LISN Pol. [L1/L2]	Factor[B]		Corrected Reading [A+B] [dBuV/m]	Limits [dBuV/m]	Margin [dB]
			LISN Loss [dB]	Cable Loss [dB]			
0.462	31.32	L1	0.12	0.20	31.64	47.96	-16.32
1.716	36	N	0.18	0.40	36.58	47.96	-11.38
1.872	32.55	N	0.18	0.40	33.13	47.96	-14.83
1.911	32.7	N	0.18	0.40	33.28	47.96	-14.68
1.946	31.72	N	0.18	0.40	32.30	47.96	-15.66
2.052	25.66	N	0.18	0.40	26.24	47.96	-21.72
15.309	24.95	L1	0.49	0.70	26.14	47.96	-21.82
24.138	19.57	N	0.63	0.90	21.10	48.96	-27.86

- \* All readings are quasi-peak mode.
- \* Set resolution bandwidth to 9kHz minimum.
- \* Results = Meter Reading + LISN Insertion loss + Cable loss
- \* Margin = Corrected Reading - Limits
- \* L1 = Hot, L2 = Neutral

## 6. Radiated Emission Test Data

The initial step in collecting conducted data was to perform a quasi-peak scan over the measurement range using a spectrum analyzer.

EUT was printed continuously via IEEE1284,USB,N/W.After all mode was investigated, we report worst-case emission.It was printing via USB.

All other emission are non-significant.

### The minimum margin to the limit is as follows :

Frequency : **925.00** [MHz]  
 Meter Reading : **15.0** [dBuV]  
 Antenna Factor : **20.90** [dB]  
 Cable loss : **3.80** [dB]  
 Corrected Reading : **39.7** [dBuV/m]  
 Margin : **-6.30** [dB]

### Test Data Sheet

Frequency Range [MHz]	Tested Frequency [MHz]	Ant. Pol.	Meter Reading [A] [dBuV]	Factor[B]		Antenna Height [Cm]	Turn table Degree [Deg]	Corrected Reading [A+B] [dBuV/m]	Margin [dB]	Limits [3m] [dBuV/m]
				Ant. Factor	Cable Loss					
				[dB]						
30 - 88	50.00	V	25.0	8.00	0.10	150	120	33.1	-6.90	40.0
	55.50	V	21.0	4.60	0.15	170	110	25.8	-14.25	
	60.70	V	25.0	3.60	0.20	120	150	28.8	-11.20	
88 - 216	93.60	V	17.0	8.90	0.50	130	100	26.4	-17.10	43.5
	112.00	H	25.0	9.50	0.70	150	85	35.2	-8.30	
	169.00	V	20.0	7.10	0.90	110	110	28.0	-15.50	
	200.00	H	20.0	7.20	1.10	250	90	28.3	-15.20	
216 - 960	230.00	H	27.2	8.40	1.42	170	90	37.0	-8.98	46.0
	275.38	H	24.1	10.10	1.50	150	170	35.7	-10.32	
	305.00	H	24.0	11.20	1.62	130	84	36.8	-9.18	
	364.80	V	14.0	12.60	2.00	150	180	28.6	-17.40	
	875.00	V	15.0	20.20	3.60	230	110	38.8	-7.20	
	925.00	V	15.0	20.90	3.80	200	120	39.7	-6.30	
960 -									54.0	

\* "<" Means equal or less than \* All readings are quasi-peak mode.

\* The selected bandwidth in emission testing is 100kHz.


\* Corrected Reading = Meter Reading + Antenna Factor + Cable loss

\* Margin = Corrected Reading - Limits


\* H = Horizontal Polarization/Antenna, V = Vertical Polarization/Antenna

## 7. Label and Label Location

### 7.1 Label

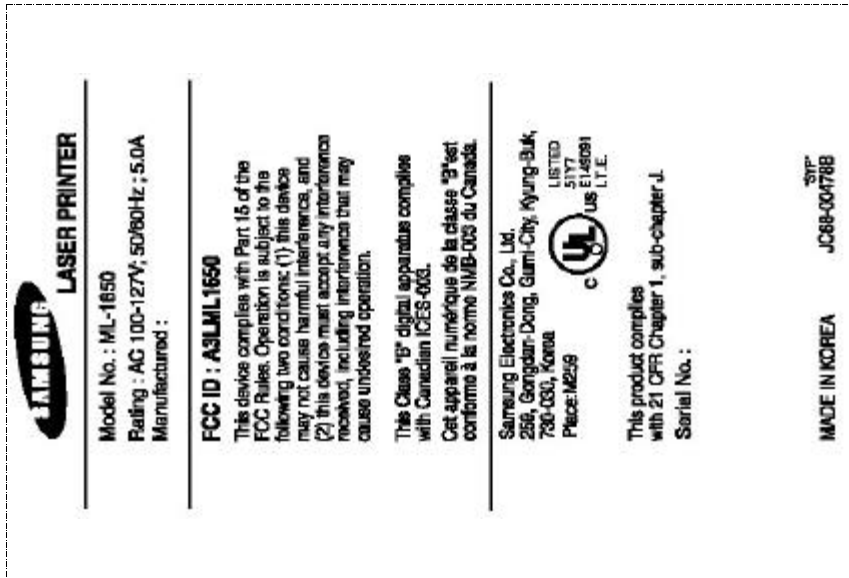

### 7.2 Label location

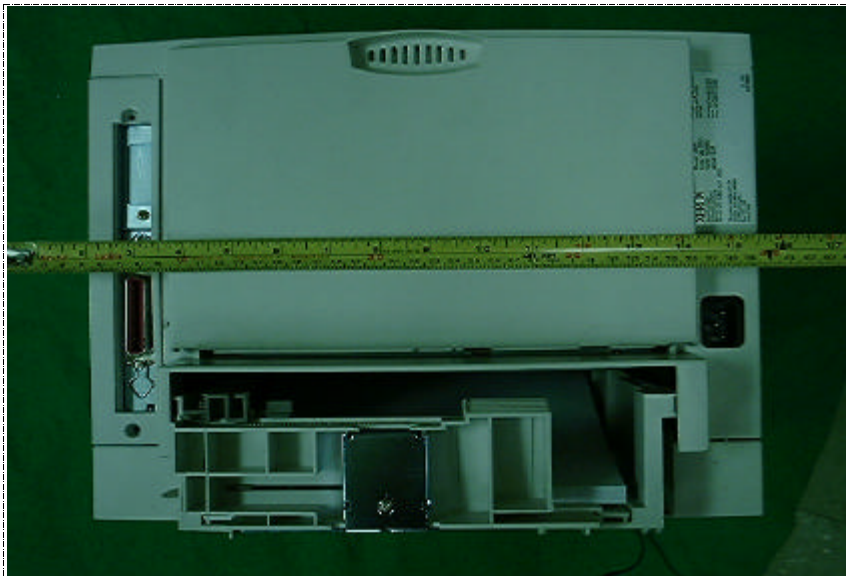

## 8. Test Equipment Used

Equipment	Model No.	Serial No.	Makers	Last calibration and Interval
Spectrum analyzer	8568B	2928A04826	H.P	00/06/28, 12Months
		Firmware versions : REV 7.4.87		
Quasi-peak adapter	85650A	2811A01342	H.P	00/06/28, 12Months
RF Preselector	85685A	2837A00835	H.P	00/06/28, 12Months
Field strength meter	ESVS30	842807/007	R & S	00/06/02, 12Months
		F/W ver. : Main 3.10, OTP 02.01, GRA 02.03		
L.I.S.N	ESH2-Z5	831886/006	R & S	00/11/30, 12Months
	3825/2	1408	EMCO	00/11/11, 12Months
Biconilog Antenna	3142	9712-1236	EMCO	00/12/23, 12Months
Bi-conical Antenna	3104C	9001-4185	EMCO	00/06/01, 12Months
Log-periodic Antenna	3146	9603-4418	EMCO	00/06/01, 12Months
EMI Measurement Software	HP	Firmware versions : Rev. A.00.00		