



SAMSUNG ELECTRONICS Co., Ltd.,  
Regulatory Compliance Group  
IT R&D Center  
416 Maetan3-Dong,  
Yeongtong-gu, Suwon city,  
Gyeonggi-Do, Korea 443-742

## FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested:	SCH-U520
FCC ID (Requested):	A3LSCHU520
Report No:	FD-177-R1
Job No:	FD-177
Date issued:	Sep 21, 2006

- Abstract -

All measurement reported here in accordance with FCC Rules, 47CFR  
Part2, Part22, Part24.

Prepared By

Date 2006.09.21

JW LEE – Test Engineer

Checked By

Date 2006.09.22

WW JANG – Manager

Authorized By

Date 2006.09.22

SH PARK – Senior Manager

# TABLE OF CONTENT

<b>MEASUREMENT REPORT</b>	<b>Page</b>
<b>1. FCC Certification Information</b>	<b>3</b>
1.1 §2.1033 General Information	3
<b>2. INTRODUCTION</b>	<b>4</b>
2.1 General	4
<b>3. MEASURING INSTRUMENT CALIBRATION</b>	<b>5</b>
<b>4. TEST EQUIPMENT LIST</b>	<b>6</b>
<b>5. DESCRIPTION OF TESTS</b>	<b>7</b>
5.1. Output Power Variation	7
5.2 Effective Radiated Power/Equivalent Isotropic Radiated Power	8
5.3 Radiated Spurious & Harmonic Emission	9
5.4 Occupied Bandwidth	11
5.5 Spurious and Harmonic Emissions at Antenna Terminal	11
5.5.1 Occupied Bandwidth Emission Limits	11
5.5.2 Conducted Spurious Emission	12
5.6 Frequency Stability / Temperature Variation	13
<b>6. TEST DATA</b>	<b>14</b>
6.1 Effective Radiated Power(E.R.P.)	14
6.2 Equivalent Isotropic Radiated Power(E.I.R.P.)	15
6.3 Cellular CDMA Radiated Spurious & Harmonic Measurement	16
6.4 PCS CDMA Radiated Spurious & Harmonic Measurement	17
6.5 CDMA Radiated Spurious & Harmonic Conversion Table	18
6.6 PCS Radiated Spurious & Harmonic Conversion Table	19
6.7 Frequency Stability	20
6.7.1 CDMA Frequency Stability Table	20
6.7.2 PCS Frequency Stability Table	21
6.7.3 CDMA Frequency Stability Graph	22
6.7.4 PCS Frequency Stability Graph	24
<b>7. SAMPLE CALCULATION</b>	<b>26</b>
7.1 Emission Designator	
<b>8. CONCLUSION</b>	<b>27</b>
<b>9. TEST PLOTS</b>	<b>28</b>



# **MEASUREMENT REPORT**

## **1. FCC Certification Information**

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.


### **1.1 §2.1033 General Information**

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416 Maetan3-Dong, Yeongtong-gu, Suwon City  
Gyeonggi-Do, Korea 443-742
- Attention: SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID: A3LSCHU520
- Quantity: Quantity production is planned
- Emission Designators: 1M29F9W (CDMA)  
1M29F9W (PCS CDMA)
- Tx Freq. Range: 824.70-848.31MHz (CDMA)  
1851.25-1908.75MHz (PCS CDMA)
- Rx Freq. Range: 869.70-893.31 MHz (CDMA)  
1931.25-1988.75 MHz (PCS CDMA)
- Max. Power Rating: 0.532 W ERP CDMA( 27.26 dBm)  
0.454 W EIRP PCS CDMA ( 26.57 dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Dual-Band CDMA Phone with Bluetooth
- Modulation(s): CDMA
- Frequency Tolerance:  $\pm 0.00025\%$  (2.5ppm)
- FCC Rule Part(s): §24(E), §22(H), §2.
- Dates of Test: Sep 12-13, 2006
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FD-177-R1

## 2. INTRODUCTION

### 2.1 General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.  
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742  
 The site have 1 Fully-anechoic chamber and measurement facility.

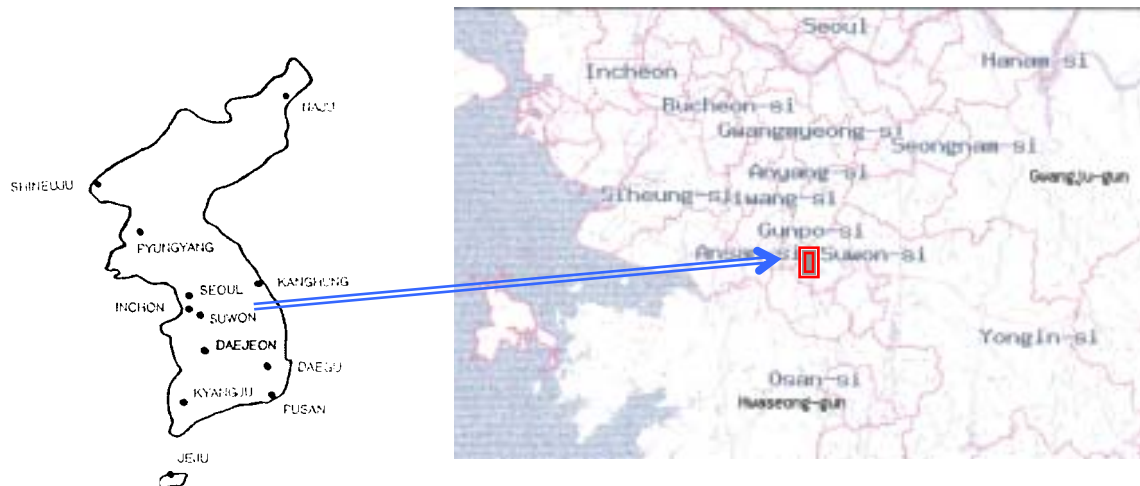


**Figure1. Map of the Suwon City area.**

### Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

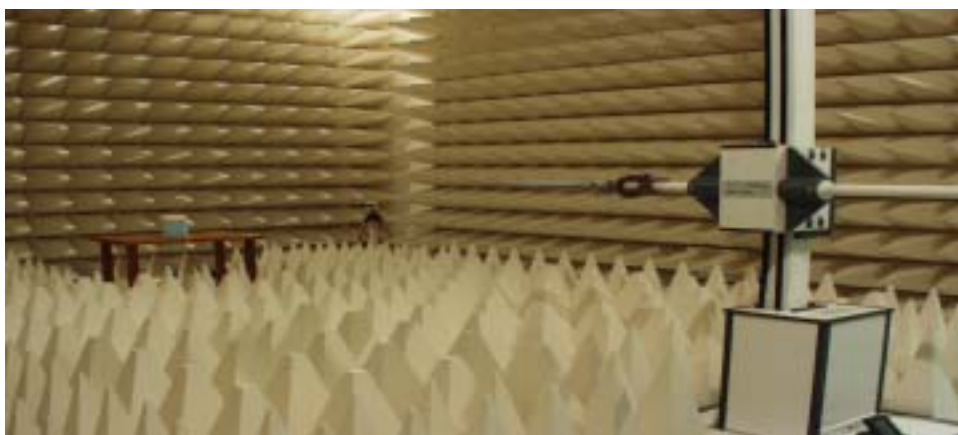

**Figure2. Photograph of 3m Fully-Anechoic Chamber**

### **3. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

- End of page -

#### 4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2006-09-26
	E4440A(3Hz~26.5GHz)	MY41000236	2007-04-14
	E4440A(3Hz~26.5GHz)	MY41000233	2007-04-05
Signal Generator	SMIQ03B	83824/021	2006-12-07
	SMR20	835197/030	2007-01-10
Power Meter	E4419B	GB41293846	2007-09-06
Power Sensor	E9300B	MY41495557	2007-04-17
Amplifier	5S1G4	304866	2006-10-18
Pre-Amplifier	8449B	3008A00691	2007-01-02
Communication test set	8960	GB42230535	2007-01-02
	8960	GB42360886	2007-02-28
Antenna Master	MA240	240/618	Not Required
Controller	HD100	100/756	Not Required
Environmental Chamber	SH-241	92000548	2006-11-22
	SH-241	92000549	2006-11-22
Horn Antenna	HF906	360306/011	2007-03-31
Dipole Antenna	3121C-DB4	9007-587	2006-12-02
Receive Antenna	HL040	353255/020	2007-04-25
Attenuator	8494A	3308A31997	2006-12-19
	8496A	3308A14426	2006-12-21
Divider	11636B	51941	Not Required
	11636B	51942	Not Required
	11636B	51946	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

## 5. DESCRIPTION OF TESTS

### 5.1 Output Power Variation

#### Test Condition to measure the Output Power

This device was tested under all R.C.s and S.O.s and worst case is reported with RC3/SO55, with "All Up" power control bits.

The following procedures were followed according to FCC "SAR Measurement Procedures for 3G Devices", May 2006.

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 5-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3,4 or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 5-2 was applied.
5. FCHs were configured at full rate for maximum SAR with "All Up" power control bits.

Parameter	Units	Value
$\hat{I}_{or}$	dBm/1.23MHz	-104
Pilot Ec/Ior	dB	-7
Traffic Ec/Ior	dB	-7.4

**Table 5-1**  
**Parameters for Max. Power for RC1**

Parameter	Units	Value
$\hat{I}_{or}$	dBm/1.23MHz	-86
Pilot Ec/Ior	dB	-7
Traffic Ec/Ior	dB	-7.4

**Table 5-2**  
**Parameters for Max. Power for RC3**


Band	Channel	1x EV-DO	CDMA2000 RC	SO2	SO55	TDSO SO32
Cellular	1013	25.23	RC1	25.25	25.25	-
			RC3	25.25	25.25	25.23
	384	25.14	RC1	25.14	25.13	-
			RC3	25.13	25.13	25.12
	777	25.04	RC1	24.93	24.93	-
			RC3	24.89	24.93	24.88
PCS	25	25.06	RC1	25.05	25.05	-
			RC3	25.08	25.08	25.08
	600	24.88	RC1	24.95	24.95	-
			RC3	24.97	24.97	24.96
	1175	24.95	RC1	25.07	25.07	-
			RC3	25.12	25.13	25.02

**Table 5-3**  
**Maximum Power Output Table for SCH-U520**

## 5.2 Effective Radiated Power / Equivalent Isotropic Radiated Power

### Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

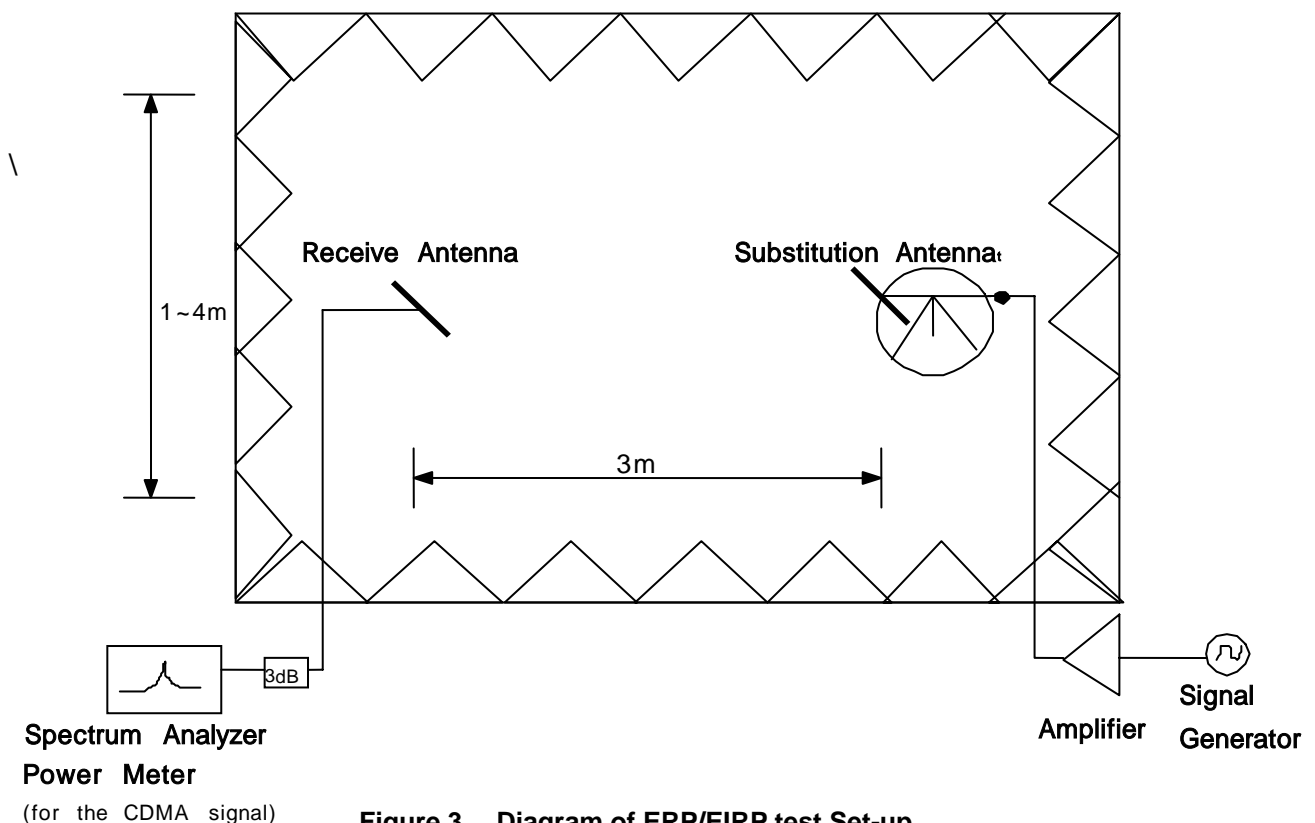

**Figure 3. Diagram of ERP/EIRP test Set-up**


The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA & PCS signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP is recorded.



### 5.3 Radiated Spurious & Harmonic Emission

#### Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001

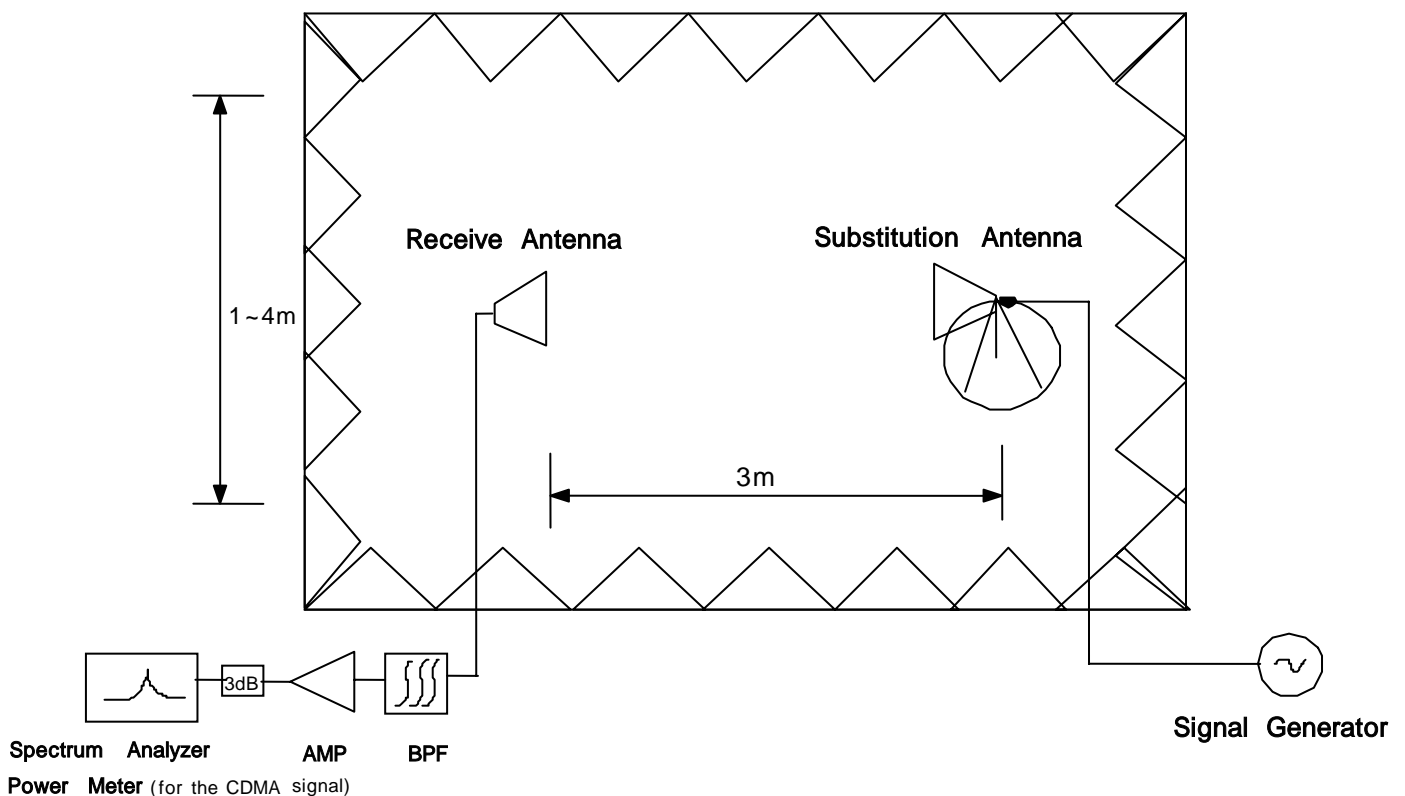

**Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up**

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10<sup>th</sup> Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.



### **SAMPLE CALCULATION**

#### **Example: Channel 600 PCS Mode 2<sup>nd</sup> Harmonic(3760MHz)**

The receive analyzer reading at 3meters with the EUT on the turntable was  $-81.0\text{dBm}$ . The gain of the substituted antenna is  $8.1\text{dBi}$ . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0\text{dBm}$  of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0\text{dB}$  at 3760MHz. So  $6.1\text{dB}$  is added to the signal generator reading of  $-30.9\text{dBm}$  yielding  $-24.8\text{dBm}$ . The fundamental EIRP was  $25.5\text{dBm}$  so this harmonic was  $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$ .

- End of page -

## **5.4 Occupied Bandwidth**

### **Test Procedure**

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

## **5.5 Spurious and Harmonic Emissions at Antenna Terminal**

### **5.5.1 Occupied Bandwidth Emission Limits**

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

- End of page -

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

**Table 1. Broadband PCS Service Frequency Blocks**

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 – 835	869 – 880
B	835 – 845	880 – 890
A* High	845 – 846.5	890 – 891.5
B*	846.5 – 849	891.5 – 894

**Table 2. Cellular Service Frequency Blocks**

### 5.5.2 Conducted Spurious Emission

#### **Minimum standard:**

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least  $43+10\log(P)$  dB. Limit equivalent to  $-13$  dBm, calculation shown below.

$$43 + 10\log(0.532 \text{ W}) = 40.26 \text{ dB}$$

$$27.26 \text{ dBm} - 40.26 \text{ dB} = -13 \text{ dBm}$$

#### **Test Procedure:**

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the  $-13$  dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (PCS Mode : 10MHz to 20GHz). A display line was placed at  $-13$  dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

## 5.6 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

- End of page -

## 6. TEST DATA

### 6.1 Effective Radiated Power(E.R.P.)

Supply Voltage : 3.7VDC

Modulation : CDMA

Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBd)	Ref level (dBm)
824.70	25.00	H	-14.81	0.00	-14.81
		V	-13.63	0.00	-13.63
836.52	25.00	H	-14.81	0.00	-14.81
		V	-13.63	0.00	-13.63
848.31	25.00	H	-14.81	0.00	-14.81
		V	-13.63	0.00	-13.63

Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.70	-14.94	H1	178	24.87	0.307	Standard
836.52	-12.55	H1	181	27.26	0.532	Standard
848.31	-14.54	H1	179	25.27	0.337	Standard

**NOTE :** Standard batteries are the only battery options for this phone

**Radiated measurements at 3 meters by Substitution Method**



## 6.2 Equivalent Isotropic Radiated Power(E.I.R.P.)

**Supply Voltage : 3.7VDC**

**Modulation : PCS**

**Reference level**

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBi)	Ref level (dBm)
1851.25	25.00	H	-15.19	6.90	-22.09
		V	-15.45	6.90	-22.35
1880.00	26.50	H	-13.76	6.90	-20.66
		V	-13.70	6.90	-20.60
1908.75	26.50	H	-13.66	6.90	-20.56
		V	-13.99	6.90	-20.89

**Result**

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1851.25	-22.19	H1	150	24.90	0.309	Standard
1880.00	-20.80	H1	150	26.36	0.433	Standard
1908.75	-20.49	H1	152	26.57	0.454	Standard

**NOTE : Standard batteries are the only battery options for this phone**

**Radiated measurements at 3 meters by Substitution Method**

### 6.3 Cellular CDMA Radiated Spurious & Harmonic measurement

#### Field Strength of SPURIOUS Radiation

Operating Frequency : 824.70 MHz(Low), 836.52MHz(Middle), 848.31MHz(High)

Measured Output Power : 27.26 dBm = 0.532 W

Modulation Signal : CDMA

**Limit :  $43 + 10\log_{10}(P) = 40.26$  dBc**

#### **Result**

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
1013	2	1649.40	-54.61	H2	69.99
	3	2474.10	-58.62	H1	68.08
	4	3298.80	-61.77	V	66.16
	5	4123.50	-65.84	H2	67.54
	6	4948.20	-	-	-
	7	5772.90	-	-	-
384	2	1673.04	-50.66	V	66.01
	3	2509.56	-51.75	H1	61.23
	4	3346.08	-57.39	V	62.63
	5	4182.68	-62.20	H2	64.41
	6	5019.12	-	-	-
	7	5855.64	-	-	-
777	2	1696.62	-46.84	H1	59.98
	3	2544.93	-58.55	H1	67.62
	4	3393.24	-64.64	V	69.65
	5	4241.55	-65.15	H2	67.91
	6	5089.86	-	-	-
	7	5938.17	-	-	-

### **Radiated Spurious Emission measurements at 3 meters by Substitution Method**



## 6.4 PCS CDMA Radiated Spurious & Harmonic measurement

### Field Strength of SPURIOUS Radiation

Operating Frequency : 1851.25 MHz(Low), 1880.00 MHz(Middle), 1908.75MHz(High)

Measured Output Power : 26.57 dBm = 0.454 W

Modulation Signal : PCS

**Limit :  $43 + 10\log_{10}(P) = 39.57$  dBc**

### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
25	2	3702.50	-63.06	H2	62.05
	3	5553.75	-58.19	H1	52.71
	4	7405.55	-64.38	H2	55.21
	5	9256.25	-63.56	H2	51.32
	6	11107.50	-67.36	V	51.09
	7	12958.75	-	-	-
600	2	3760.00	-57.63	H2	57.41
	3	5640.00	-53.38	H1	47.89
	4	7520.00	-61.40	H2	52.45
	5	9400.00	-63.69	H2	50.95
	6	11280.00	-67.82	H2	50.61
	7	13160.00	-	-	-
1175	2	3817.50	-51.31	H2	50.63
	3	5726.25	-54.41	H1	48.64
	4	7635.00	60.60	H2	50.74
	5	9543.75	-66.83	H2	54.71
	6	11452.50	-67.35	H2	49.92
	7	13361.25	-	-	-

### Radiated Spurious Emission measurements at 3 meters by Substitution Method

## 6.5 CDMA Radiated Spurious & Harmonic Conversion Table

Date : 2006 . 09. 13

Test Engineer : JW LEE

Tx Cable loss  
 Tx Horn Ant Gain  
 Rx Cable loss + HPF Insertion loss + Attenuator  
 Pre-Amp gain  
 Air loss  
 Tested Level from EUT  
 = + + -  
 = ERP +2.14-

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 0dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
1013	2	1649.40	7.70	8.03	0.33	-54.61	-54.81	-40.59	-40.97	69.99	70.37
	3	2474.10	9.92	9.55	-0.37	-58.62	-63.61	-38.68	-43.48	68.08	72.88
	4	3298.80	11.67	9.64	-2.03	-61.21	-61.77	-36.80	-36.76	66.20	66.16
	5	4123.50	13.24	10.67	-2.57	-65.84	-65.78	-38.14	-38.36	67.54	67.76
	6	4948.20	14.53	11.05	-3.48	-	-	-	-	-	-
	7	5772.90	16.87	11.23	-5.64	-	-	-	-	-	-
384	2	1673.04	7.80	8.03	0.23	-50.91	-50.66	-36.68	-36.61	66.08	66.01
	3	2509.56	10.06	9.55	-0.51	-51.75	-55.09	-31.83	-34.74	61.23	64.14
	4	3346.08	11.45	9.64	-1.81	-58.47	-57.39	-35.13	-33.23	64.53	62.63
	5	4182.68	13.72	10.67	-3.05	-62.20	-62.82	-35.01	-35.76	64.41	65.16
	6	5019.12	15.43	11.05	-4.38	-	-	-	-	-	-
	7	5855.64	17.19	11.23	-5.96	-	-	-	-	-	-
777	2	1696.62	7.96	8.03	0.07	-46.84	-50.50	-30.58	-34.82	59.98	64.22
	3	2544.93	10.15	9.55	-0.60	-58.55	-62.42	-38.22	-42.00	67.62	71.40
	4	3393.24	11.62	9.64	-1.98	-65.00	-64.64	-41.60	-40.25	71.00	69.65
	5	4241.55	13.71	10.67	-3.04	-65.15	-67.39	-38.51	-40.23	67.91	69.63
	6	5089.86	15.71	11.05	-4.66	-	-	-	-	-	-
	7	5938.17	17.09	11.23	-5.86	-	-	-	-	-	-

## 6.6 PCS Radiated Spurious & Harmonic Conversion Table

Date : 2006 . 09. 13

Test Engineer : JW LEE

Tx Cable loss  
Tx Horn Ant Gain  
Rx Cable loss + HPF Insertion loss + Attenuator  
Pre-Amp gain  
Air loss  
Tested Level from EUT  
= + + -  
= EIRP -

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 10dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
25	2	3702.50	12.17	9.73	7.56	-63.06	-66.01	-35.48	-38.41	62.05	64.98
	3	5553.75	16.95	11.15	4.20	-58.19	-59.36	-26.14	-28.00	52.71	54.57
	4	7405.00	20.77	11.44	0.67	-64.38	-65.80	-28.64	-31.80	55.21	58.37
	5	9256.25	24.45	12.17	-2.28	-63.56	-65.50	-24.75	-27.33	51.32	53.90
	6	11107.50	28.18	13.66	-4.52	-	-	-	-	-	-
	7	12958.75	31.99	13.27	-8.72	-	-	-	-	-	-
600	2	3760.00	12.40	9.73	7.33	-57.63	-63.11	-30.84	-35.95	57.41	62.52
	3	5640.00	16.83	11.15	4.32	-53.38	-55.48	-21.32	-23.78	47.89	50.35
	4	7520.00	21.17	11.44	0.27	-61.40	-63.51	-25.88	-29.59	52.45	56.16
	5	9400.00	24.51	12.17	-2.34	-63.69	-67.12	-24.38	-28.47	50.95	55.04
	6	11280.00	28.38	13.66	-4.72	-	-	-	-	-	-
	7	13160.00	33.20	13.27	-9.93	-	-	-	-	-	-
1175	2	3817.50	13.69	9.73	6.04	-51.31	-59.95	-24.06	-32.09	50.63	58.66
	3	5726.25	17.30	11.15	3.85	-54.41	-57.23	-22.07	-25.31	48.64	51.88
	4	7635.00	21.23	11.44	0.21	-60.60	-63.08	-24.17	-27.88	50.74	54.45
	5	9543.75	26.48	12.17	-4.31	-66.83	-68.08	-28.14	-30.51	54.71	57.08
	6	11452.50	28.89	13.66	-5.23	-	-	-	-	-	-
	7	13361.25	32.93	13.27	-9.66	-	-	-	-	-	-



## 6.7 Frequency Stability

### 6.7.1 CDMA Frequency Stability Table

Operating Frequency : 836,520,000 Hz

Channel : 384

Reference Voltage : 3.7VDC

**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-2.51	836,519,997	0.000000	-0.003
100%		-30	-20.20	836,519,980	-0.000002	-0.024
100%		-20	30.99	836,520,031	0.000004	0.037
100%		-10	48.28	836,520,048	0.000006	0.058
100%		0	42.90	836,520,043	0.000005	0.051
100%		+10	8.01	836,520,008	0.000001	0.010
100%		+20	-2.51	836,519,997	0.000000	-0.003
100%		+30	6.50	836,520,007	0.000001	0.008
100%		+40	-17.37	836,519,983	-0.000002	-0.021
100%		+50	-15.77	836,519,984	-0.000002	-0.019
100%		+60	-54.58	836,519,945	-0.000007	-0.065
85%	3.3	+20	-45.59	836,519,954	-0.000005	-0.054
115%	4.26	+20	-52.96	836,519,947	-0.000006	-0.063
Batt. Endpoint	3.3	+20	-45.59	836,519,954	-0.000005	-0.054

**Note :** The temperature is varied from -30 °C to +60 °C using an environmental chamber.

**The EUT is tested down to the battery end point**

## 6.7.2 PCS Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 600

Reference Voltage : 3.7VDC


**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-82.34	1,879,999,918	-0.000004	-0.044
100%		-30	-109.92	1,879,999,890	-0.000006	-0.058
100%		-20	180.37	1,880,000,180	0.000010	0.096
100%		-10	175.56	1,880,000,176	0.000009	0.093
100%		0	148.83	1,880,000,149	0.000008	0.079
100%		+10	-50.49	1,879,999,950	-0.000003	-0.027
100%		+20	-82.34	1,879,999,918	-0.000004	-0.044
100%		+30	-42.70	1,879,999,957	-0.000002	-0.023
100%		+40	-61.85	1,879,999,938	-0.000003	-0.033
100%		+50	-60.59	1,879,999,939	-0.000003	-0.032
100%		+60	-99.19	1,879,999,901	-0.000005	-0.053
85%	3.3	+20	-63.79	1,879,999,936	-0.000003	-0.034
115%	4.26	+20	-73.76	1,879,999,926	-0.000004	-0.039
Batt. Endpoint	3.3	+20	-63.79	1,879,999,936	-0.000003	-0.034

**Note :** The temperature is varied from -30 °C to +60 °C using an environmental chamber.

**The EUT is tested down to the battery end point**


### 6.7.3 CDMA Frequency Stability Graph

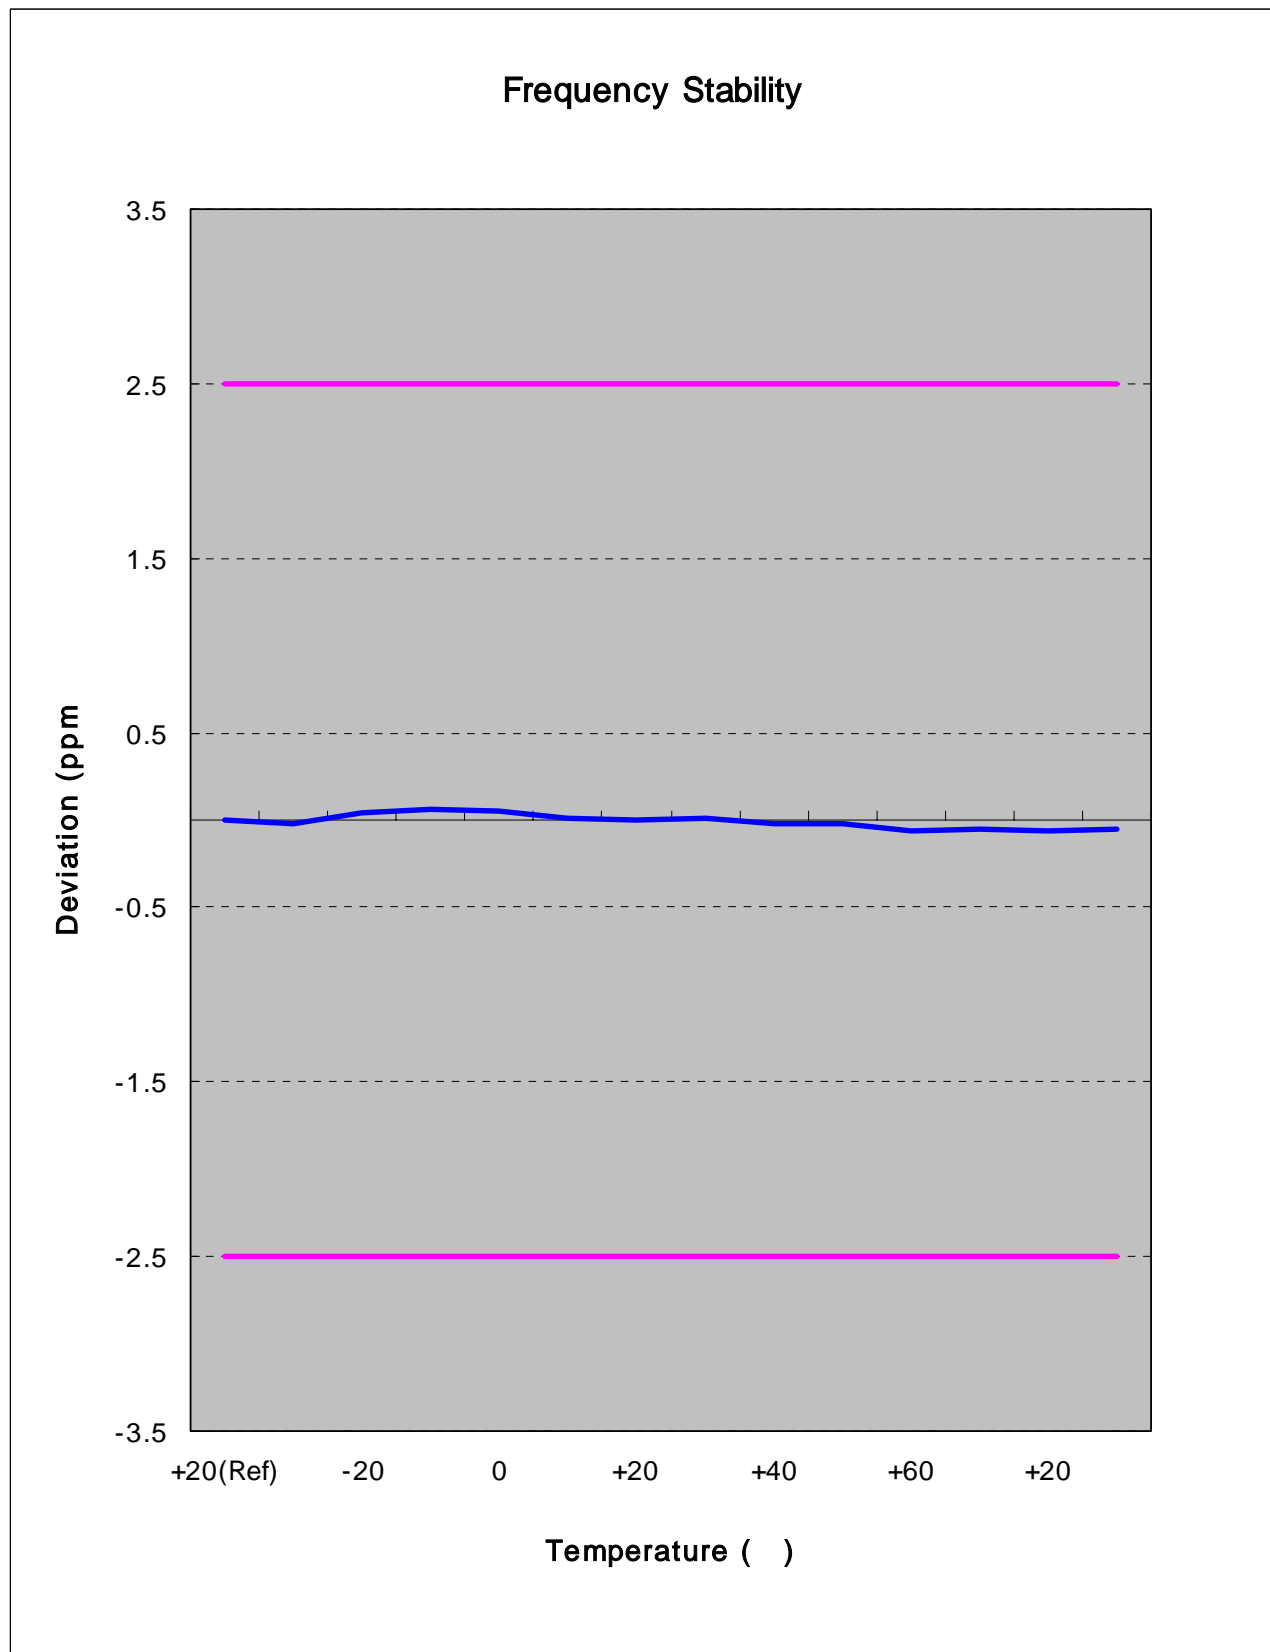

- End of page -


Zoom In

### Frequency Stability

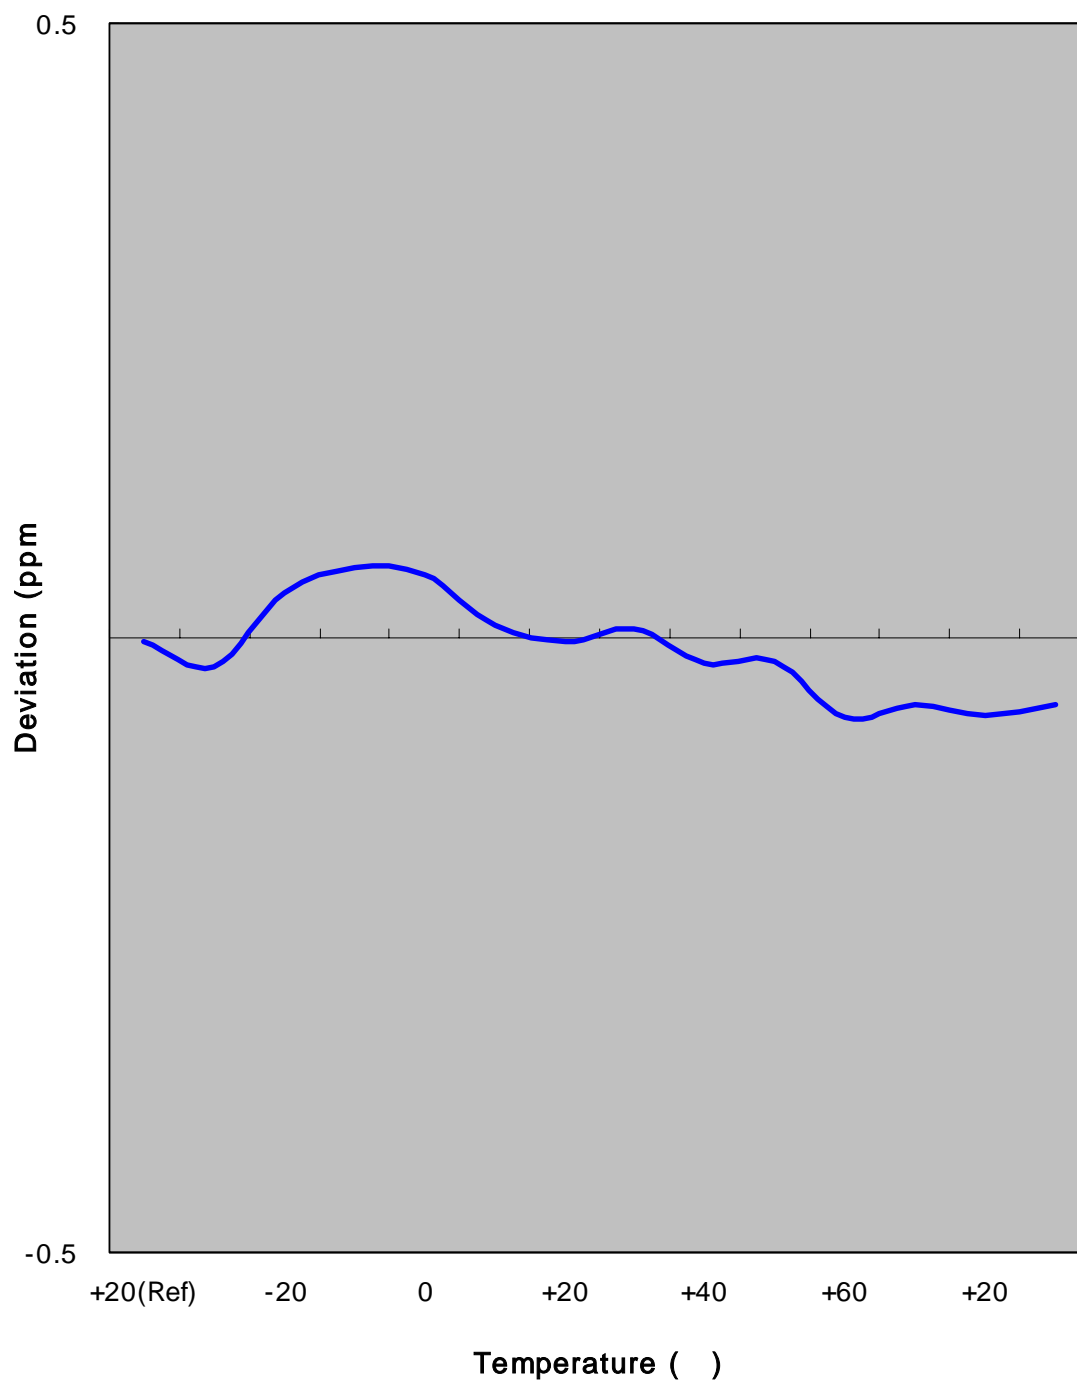


- End of page -

#### 6.7.4 PCS Frequency Stability Graph

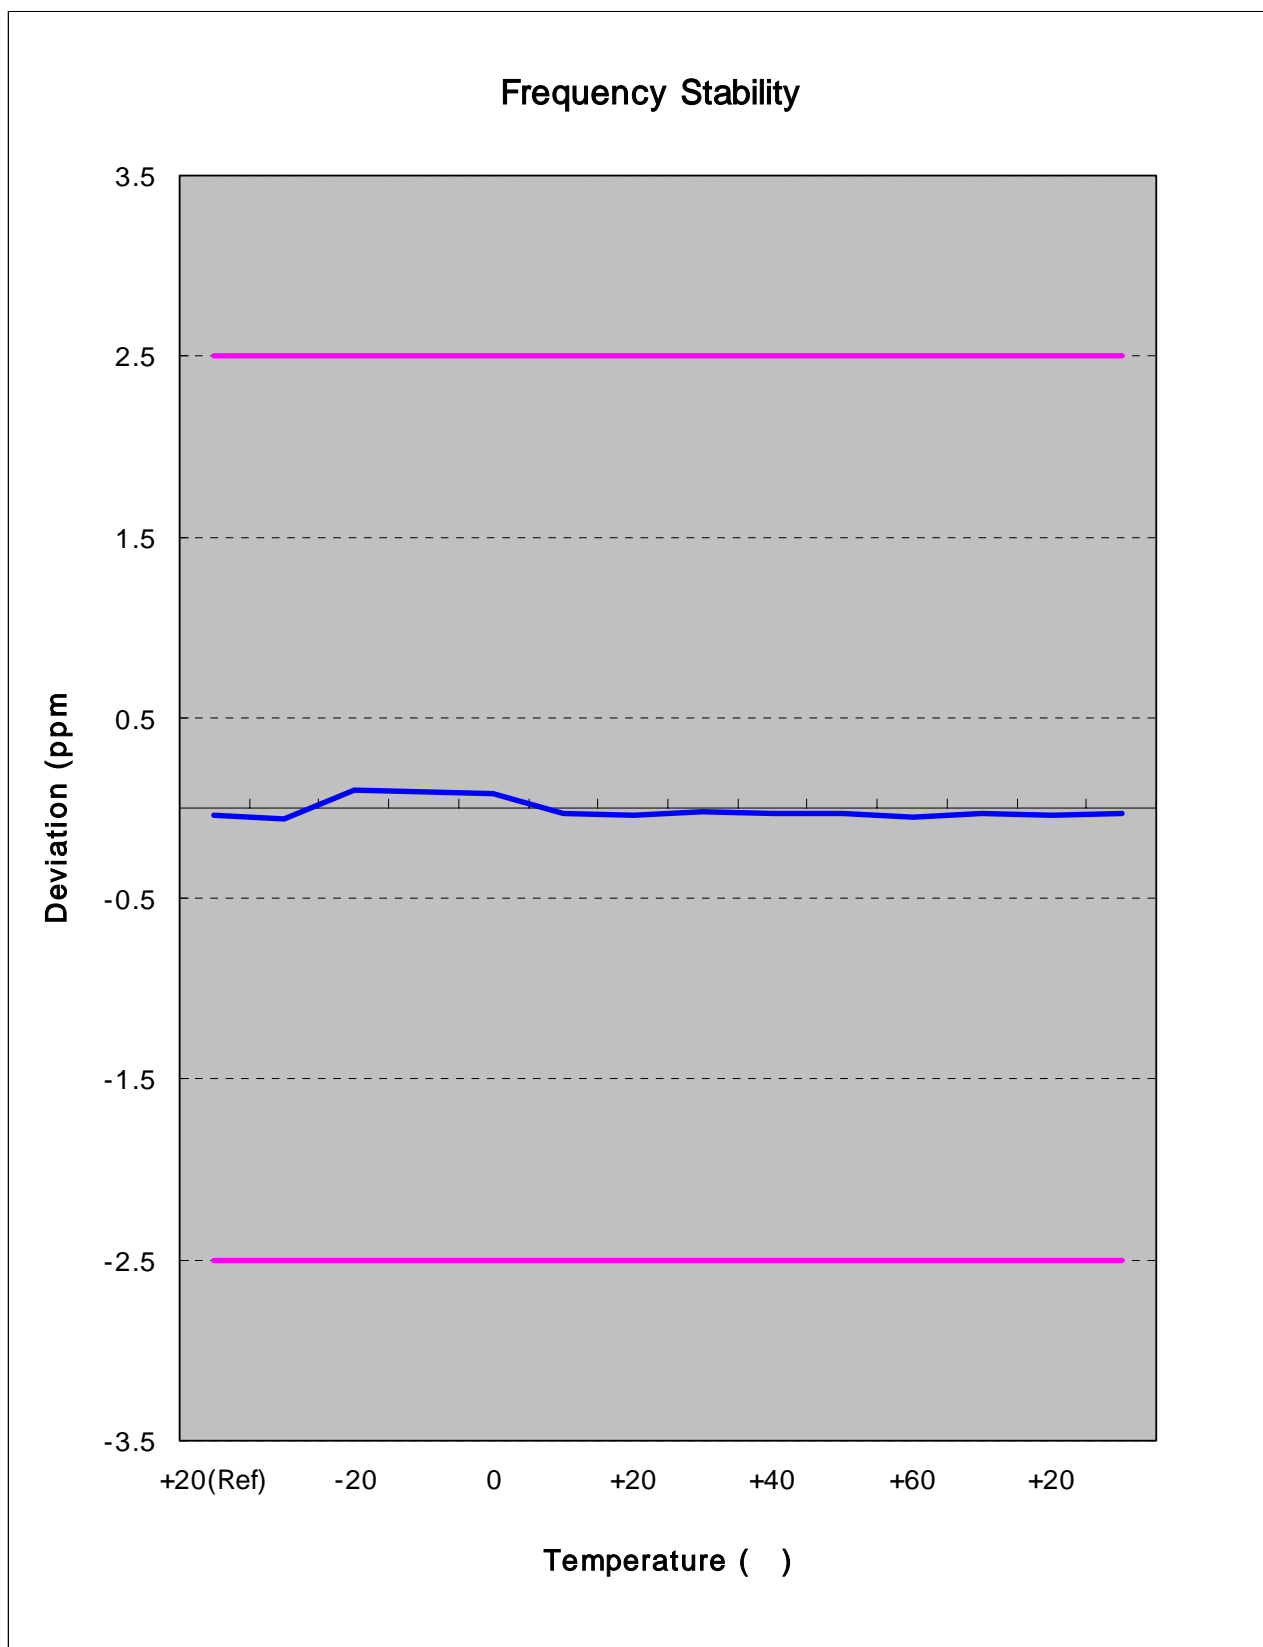



Zoom In

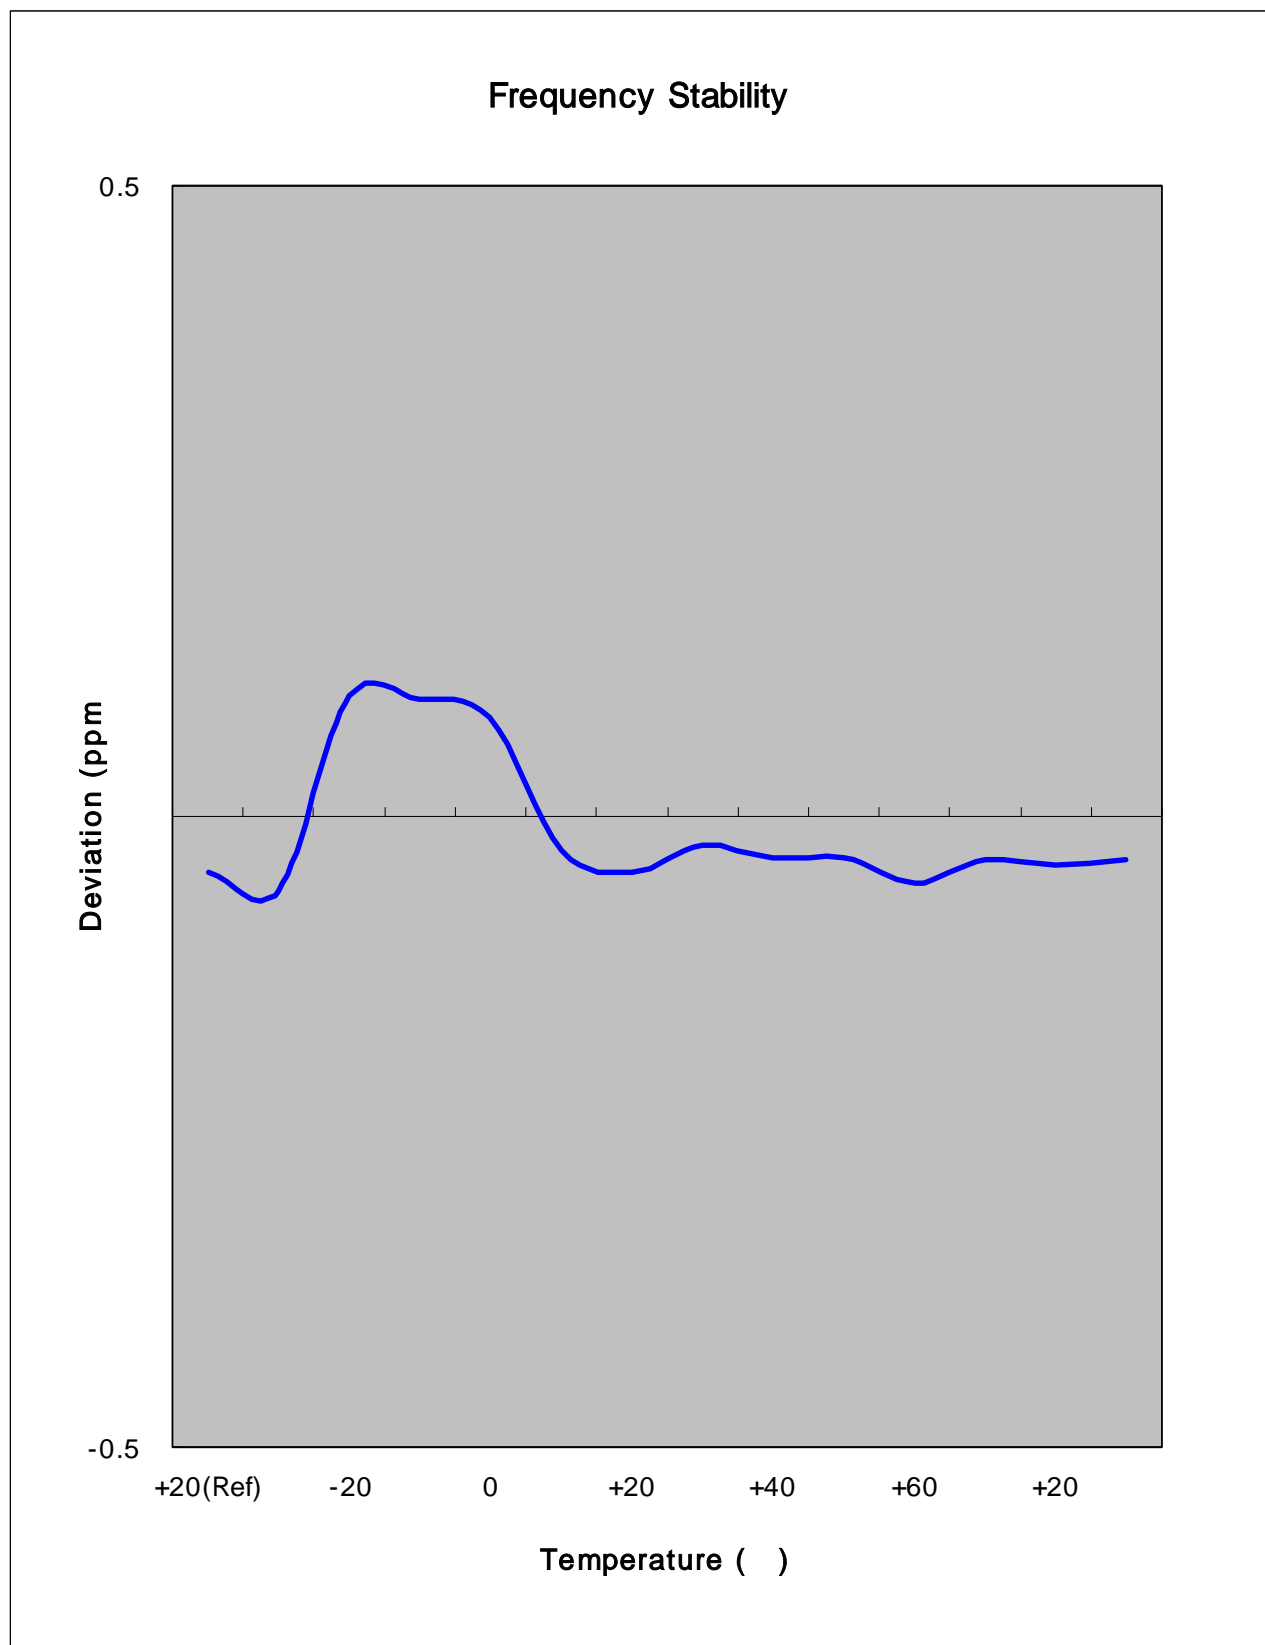

- End of page -

## 7. SAMPLE CALCULATION

### 7.1 Emission Designator

Emission Designator = 1M25F9W

Calculation : 2M + 2DK

CDMA BW = 1.25MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination(Audio/Data)

(Measured at the 99.75% power bandwidth)

- End of page -



## **8. CONCLUSION**

The data collected shows that the SAMSUNG Dual-Band CDMA Phone with Bluetooth  
FCC ID : A3LSCHU520 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

- End of page -

## 9. TEST PLOTS


- End of page -

**Ch Freq** 824.7 MHz **Trig** Free

Channel Power

FCC ID:A3LSCHU520 Power Out Ch.1013

Ref 25 dBm Atten 30 dB

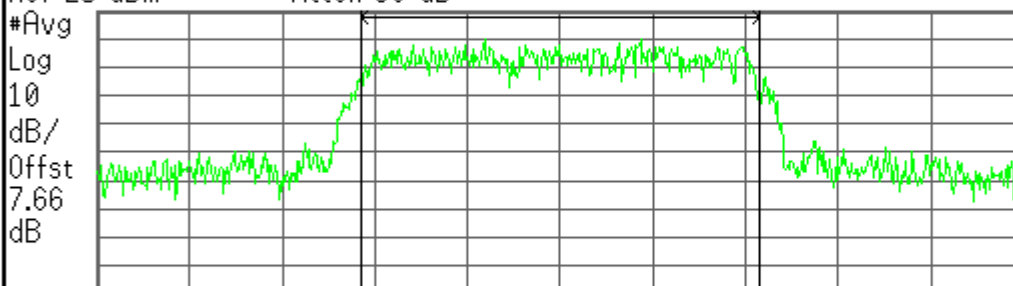

Center 824.700 MHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

**Channel Power** **Power Spectral Density**

25.00 dBm /1.2892 MHz -36.11 dBm/Hz

**Center Freq**  
824.700000 MHz

**Start Freq**  
823.200000 MHz

**Stop Freq**  
826.200000 MHz

**CF Step**  
300.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off


Copyright 2000-2005 Agilent Technologies

**Ch Freq** 836.52 MHz **Trig** Free

Channel Power

FCC ID:A3LSCHU520 Power Out Ch.384

Ref 25 dBm Atten 30 dB

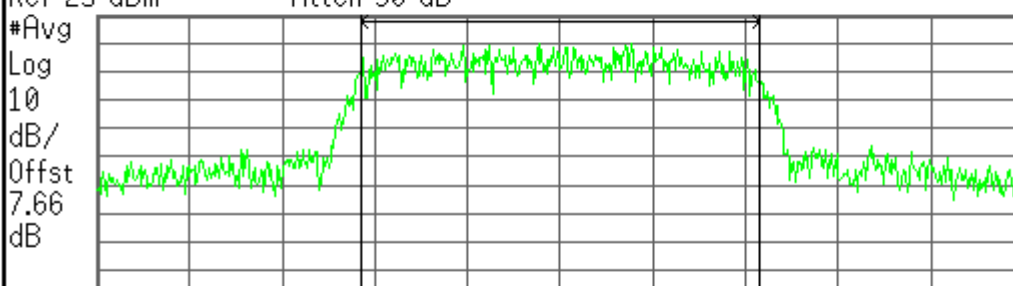

Center 836.520 MHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

**Channel Power** **Power Spectral Density**

25.04 dBm /1.2870 MHz -36.05 dBm/Hz

**Center Freq**  
836.520000 MHz

**Start Freq**  
835.020000 MHz

**Stop Freq**  
838.020000 MHz

**CF Step**  
300.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off


Copyright 2000-2005 Agilent Technologies

Ch Freq 848.31 MHz Trig Free  
Channel Power

FCC ID:A3LSCHU520 Power Out Ch.777

Ref 25 dBm Atten 30 dB

#Avg  
Log  
10  
dB/  
Offst  
7.66  
dB

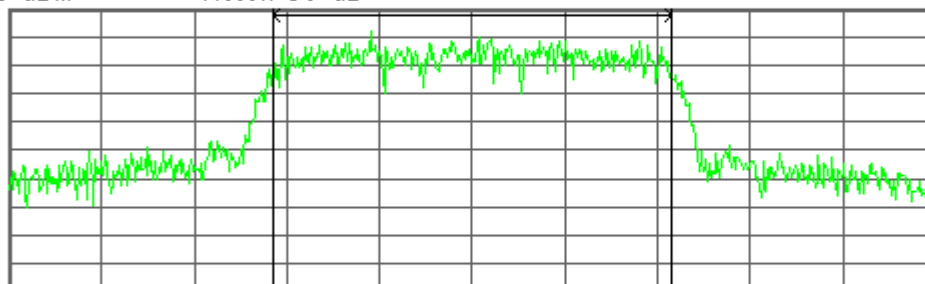

Center 848.310 MHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

25.05 dBm /1.2810 MHz

-36.03 dBm/Hz

Center Freq  
848.310000 MHz

Start Freq  
846.810000 MHz

Stop Freq  
849.810000 MHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off


Copyright 2000-2005 Agilent Technologies

FCC ID:A3LSCHU520 Power Out Ch.1013

Ref 25 dBm

Atten 30 dB

Samp  
Log  
10  
dB/  
Offst  
7.66  
dB

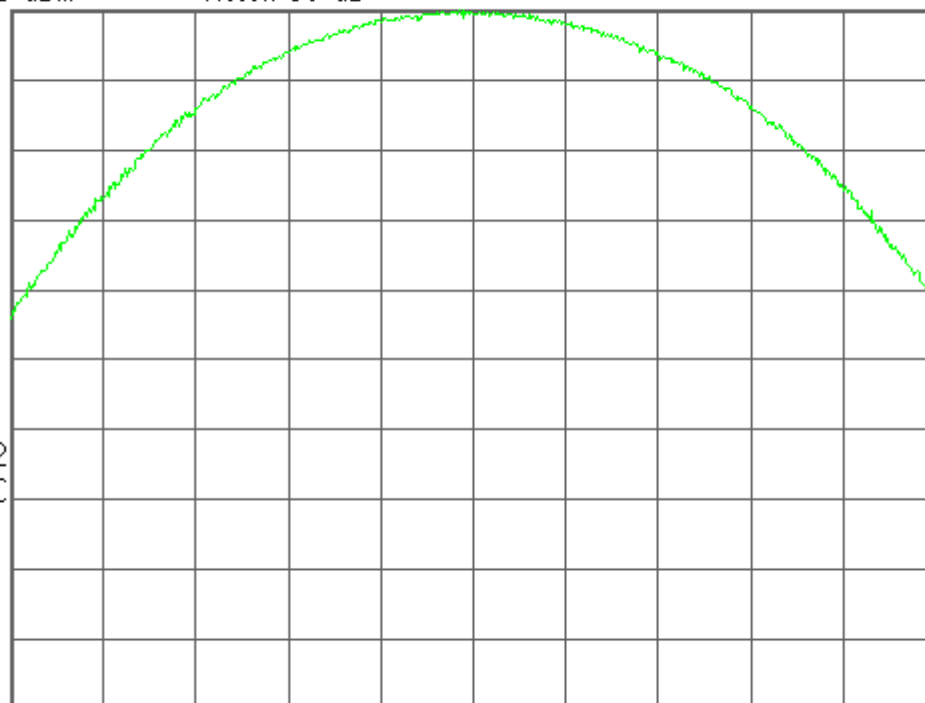

LgAv  
100  
W1 S2  
S3 FC

£(f):  
FTun  
Swp

Center 824.70 MHz

Span 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq  
824.700000 MHz

Start Freq  
819.700000 MHz

Stop Freq  
829.700000 MHz

CF Step  
1.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2005 Agilent Technologies

FCC ID:A3LSCHU520 Power Out Ch.384

Ref 25 dBm

Atten 30 dB

Samp

Log

10

dB/

Offst

7.66

dB

LgAv

100


W1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

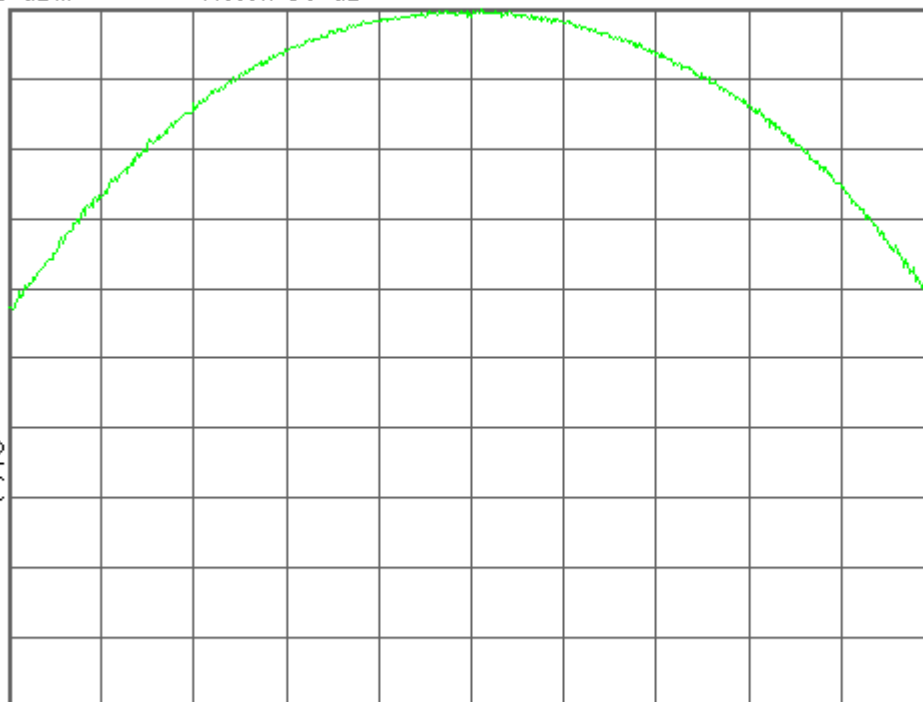

Center 836.52 MHz

Span 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Copyright 2000-2005 Agilent Technologies

**Center Freq**  
836.520000 MHz

**Start Freq**  
831.520000 MHz

**Stop Freq**  
841.520000 MHz

**CF Step**  
1.00000000 MHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

FCC ID:A3LSCHU520 Power Out Ch.777

Ref 25 dBm

Atten 30 dB

Samp

Log

10

dB/

Offst

7.66

dB

LgAv

100


W1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

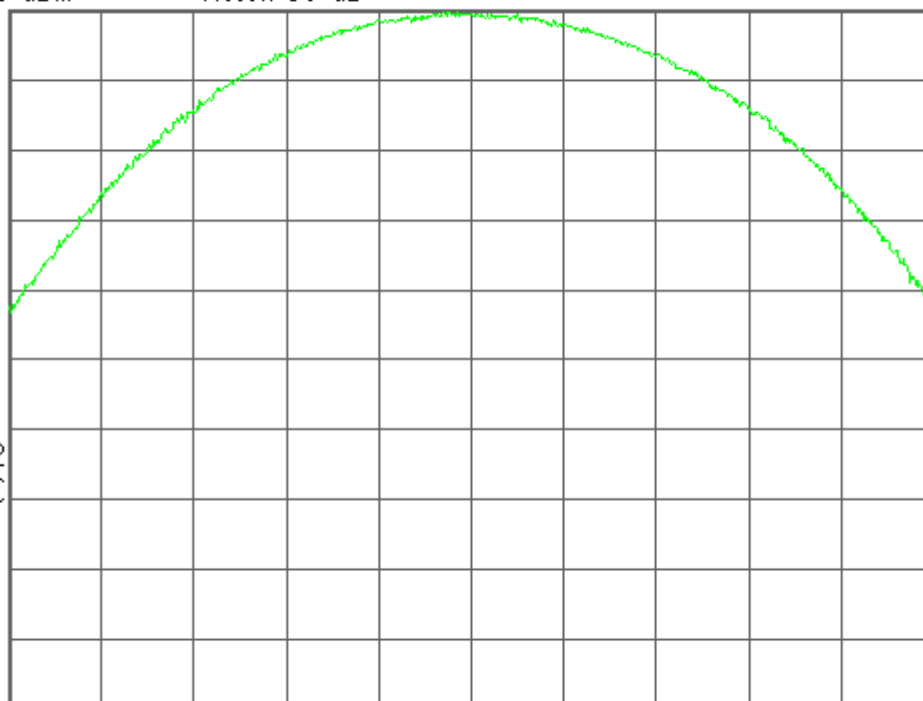

Center 848.31 MHz

Span 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Copyright 2000-2005 Agilent Technologies

**Center Freq**  
848.310000 MHz

**Start Freq**  
843.310000 MHz

**Stop Freq**  
853.310000 MHz

**CF Step**  
1.00000000 MHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

Ch Freq 824.7 MHz Trig Free  
Occupied Bandwidth

FCC ID:A3LSCHU520 0BW Ch.1013

Ref 25 dBm Atten 30 dB

#Samp

Log


10

dB/

Offst

7.66

dB

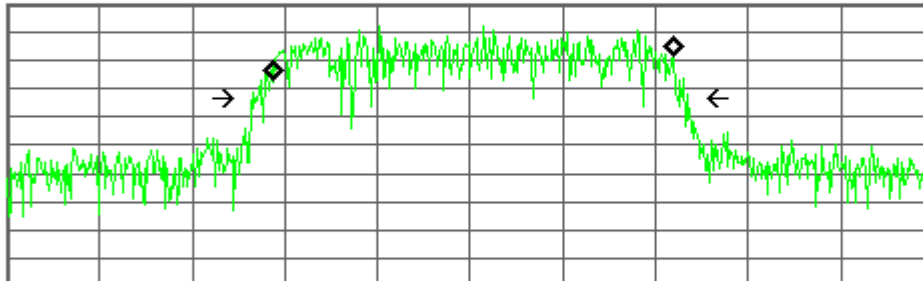

Center 824.700 MHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Occupied Bandwidth

1.2892 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error 8.925 kHz

x dB Bandwidth 1.405 MHz\*

Center Freq  
824.700000 MHz

Start Freq  
823.200000 MHz

Stop Freq  
826.200000 MHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2005 Agilent Technologies

Ch Freq 836.52 MHz Trig Free  
Occupied Bandwidth

FCC ID:A3LSCHU520 0BW Ch.384

Ref 25 dBm Atten 30 dB

#Samp

Log


10

dB/

Offst

7.66

dB

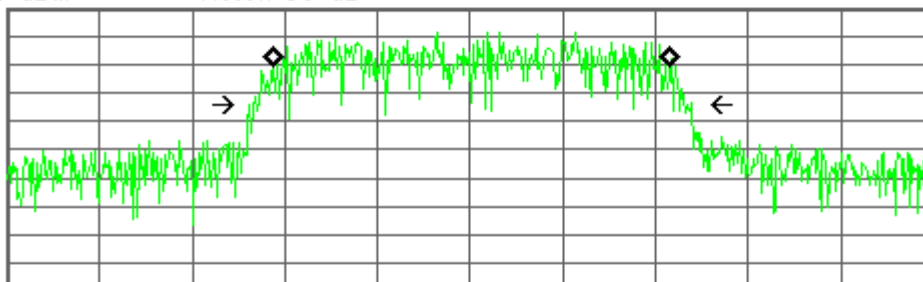

Center 836.520 MHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Occupied Bandwidth

1.2870 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error 3.609 kHz

x dB Bandwidth 1.416 MHz\*

Center Freq  
836.520000 MHz

Start Freq  
835.020000 MHz

Stop Freq  
838.020000 MHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2005 Agilent Technologies



Ch Freq 848.31 MHz Trig Free  
Occupied Bandwidth

FCC ID:A3LSCHU520 0BW Ch.777

Ref 25 dBm Atten 30 dB

#Samp

Log


10

dB/

Offst

7.66

dB

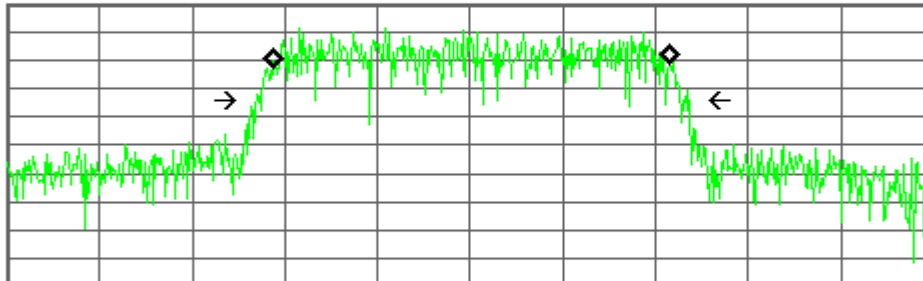

Center 848.310 MHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Occupied Bandwidth

1.2810 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error 2.952 kHz

x dB Bandwidth 1.402 MHz\*

Center Freq  
848.310000 MHz

Start Freq  
846.810000 MHz

Stop Freq  
849.810000 MHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2005 Agilent Technologies

FCC ID:A3LSCHU520 Rx Spurious Emission

Mkr1 877.17 MHz

Ref -50 dBm

#Atten 0 dB

-95.69 dBm

#Avg

Log

10

dB/

Offst

8.03


dB

DI

-80.0

dBm

PAvg

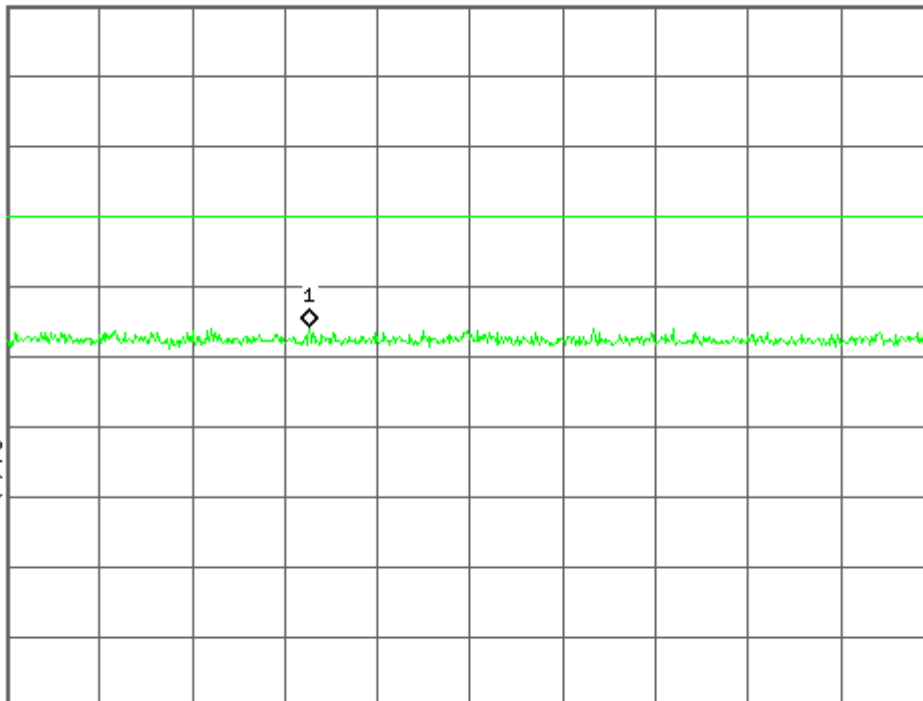

Start 869.00 MHz

Stop 894.00 MHz

#Res BW 30 kHz

#VBW 30 kHz

Sweep 105.9 ms (601 pts)

Center Freq  
881.500000 MHz

Start Freq  
869.000000 MHz



Stop Freq  
894.000000 MHz


CF Step  
2.50000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2005 Agilent Technologies

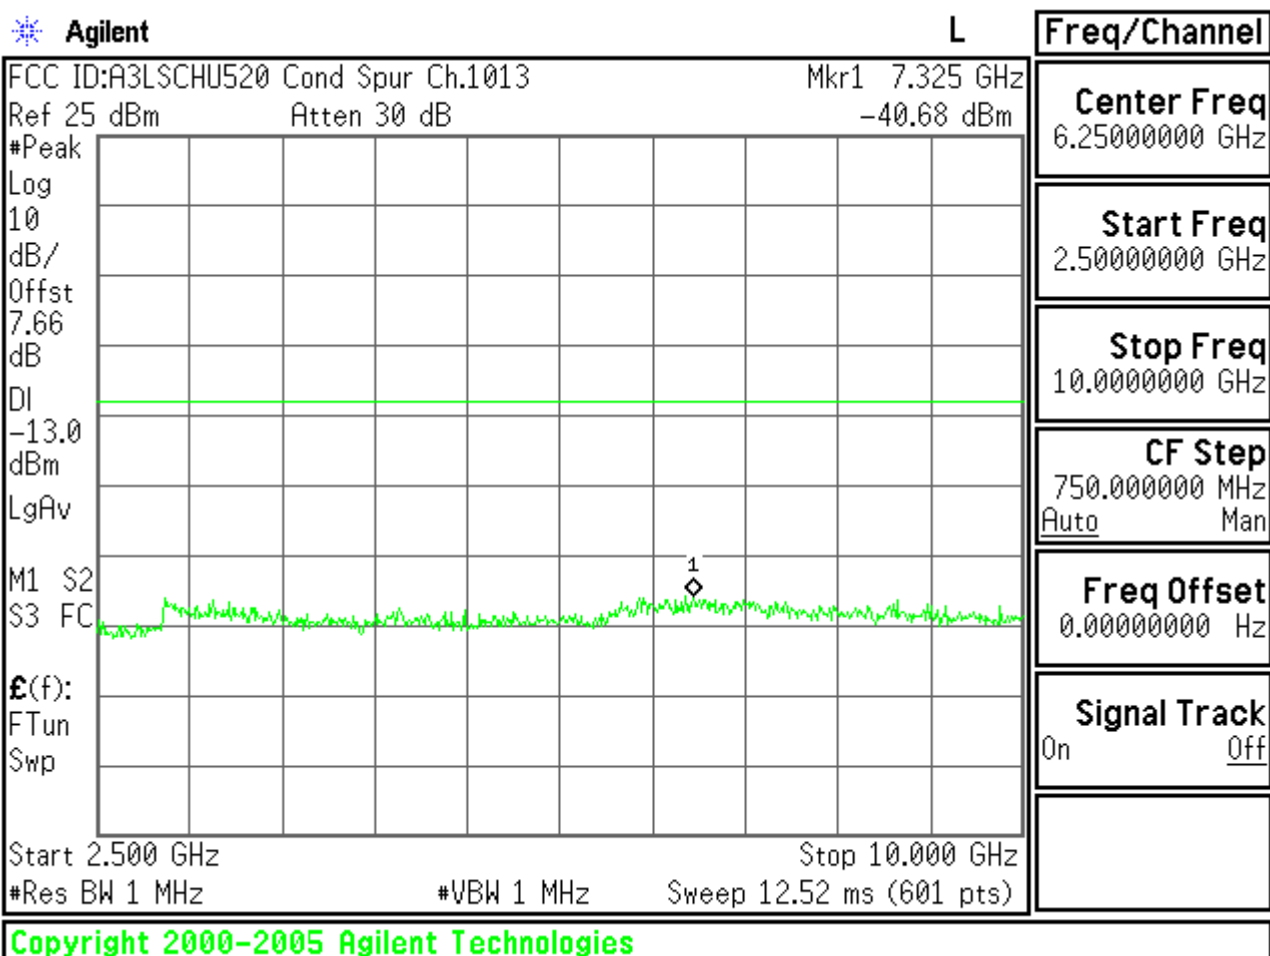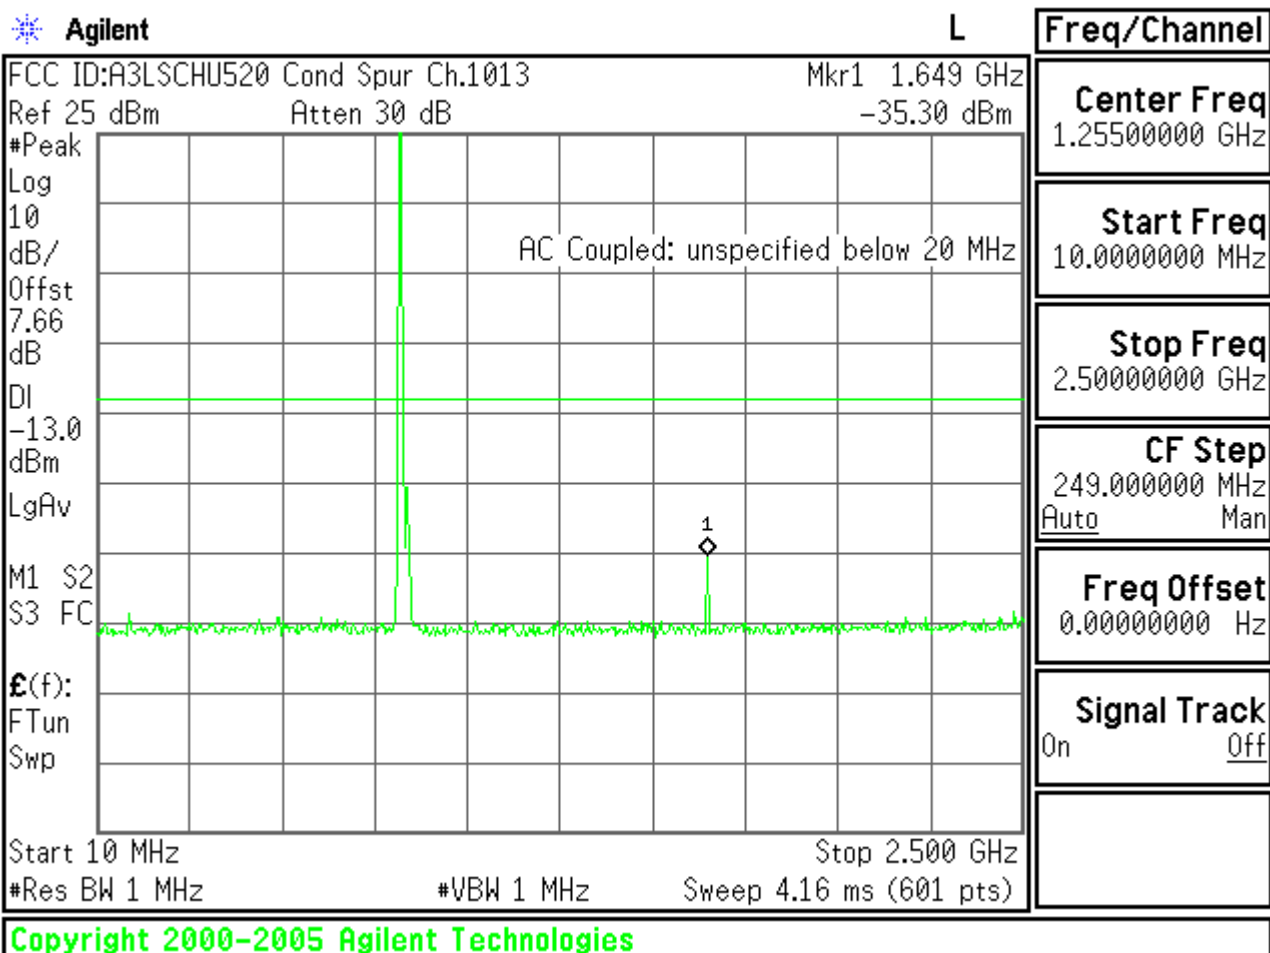

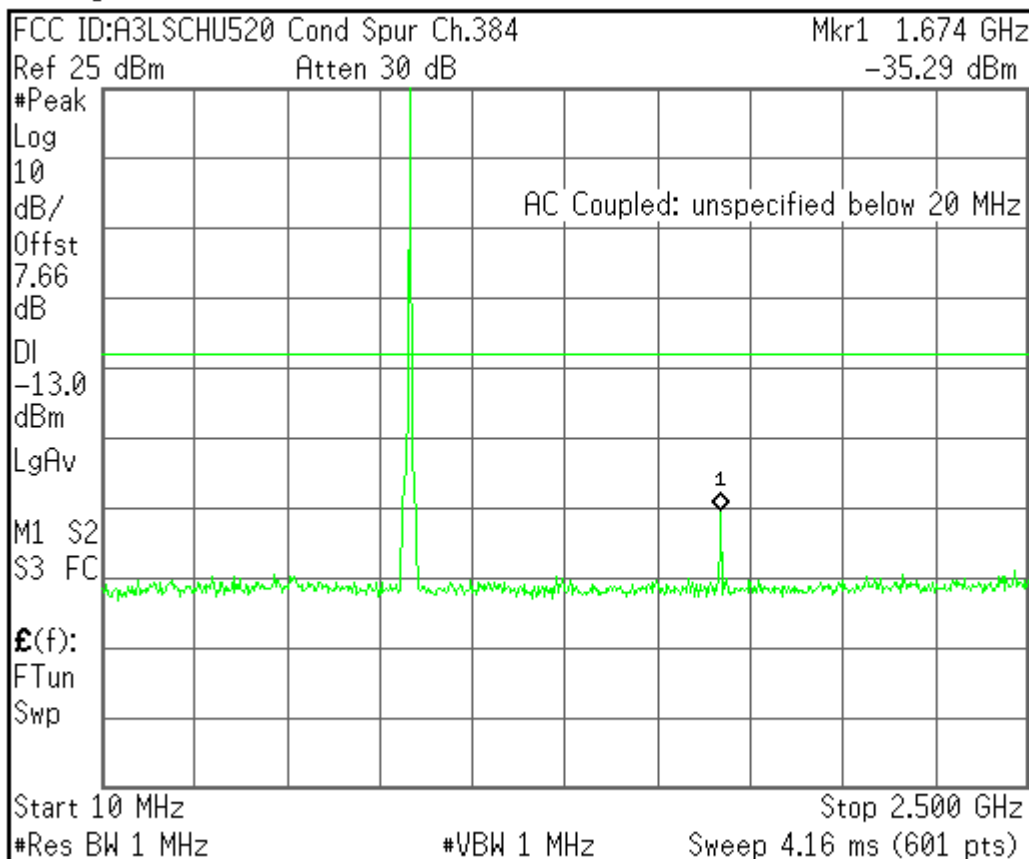

**Center Freq**  
 1.25500000 GHz

**Start Freq**  
 10.0000000 MHz


**Stop Freq**  
 2.50000000 GHz

**CF Step**  
 249.000000 MHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

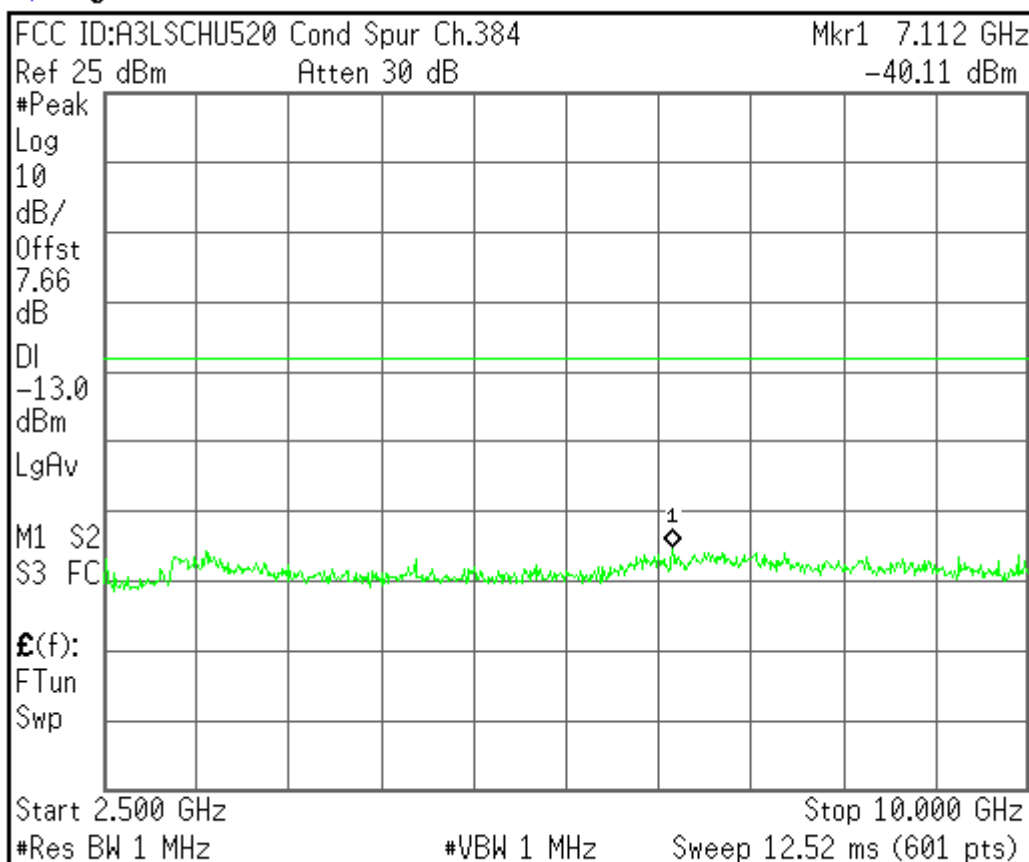

**Center Freq**  
 6.25000000 GHz

**Start Freq**  
 2.50000000 GHz


**Stop Freq**  
 10.0000000 GHz

**CF Step**  
 750.000001 MHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

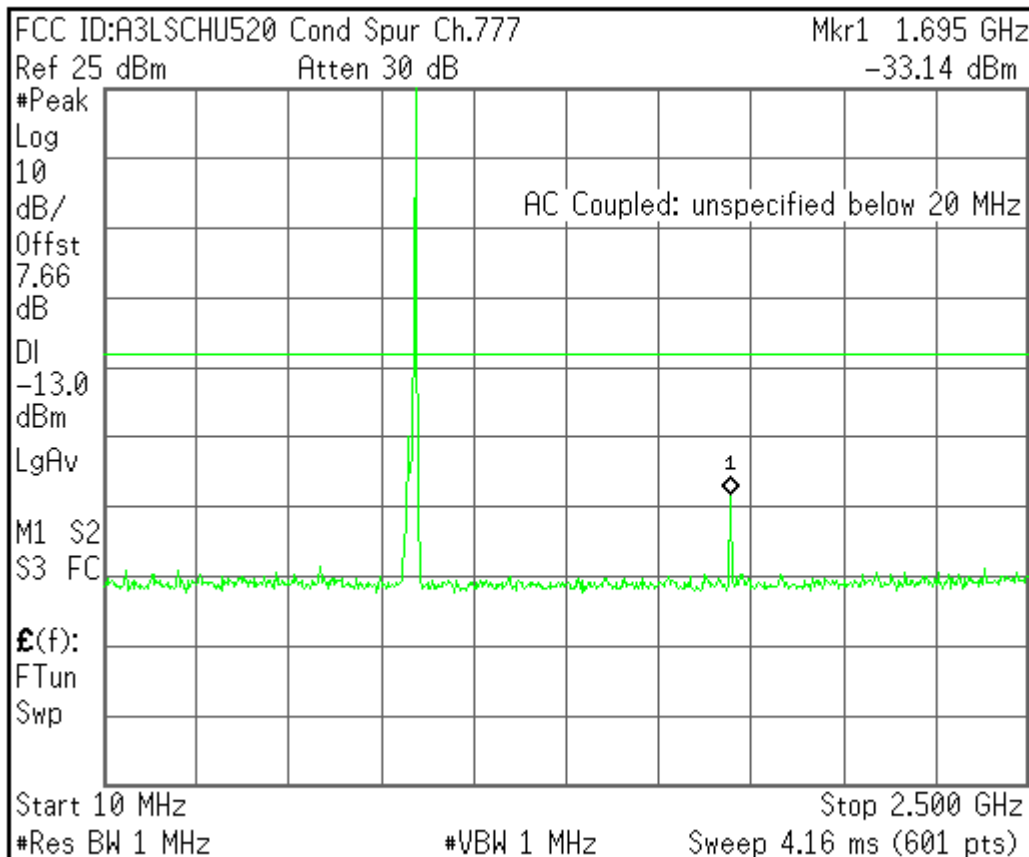

**Center Freq**  
 1.25500000 GHz

**Start Freq**  
 10.0000000 MHz


**Stop Freq**  
 2.50000000 GHz

**CF Step**  
 249.000000 MHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

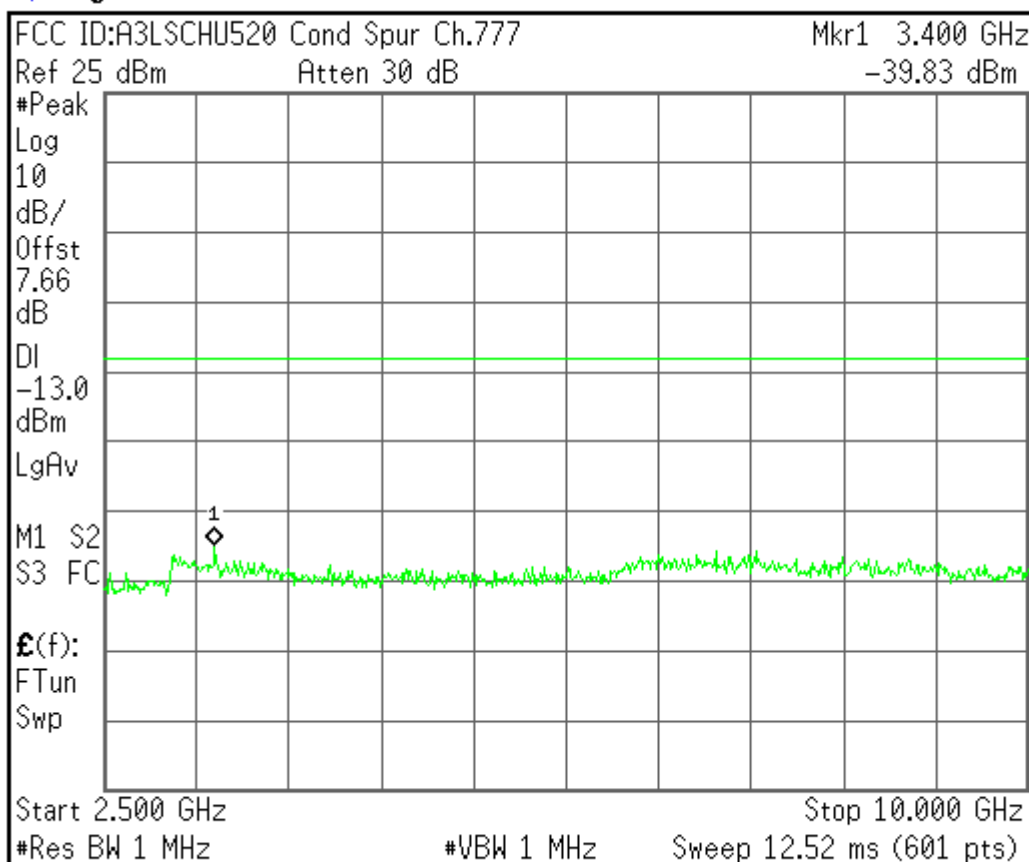

**Center Freq**  
 6.25000000 GHz

**Start Freq**  
 2.50000000 GHz


**Stop Freq**  
 10.0000000 GHz

**CF Step**  
 750.000001 MHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

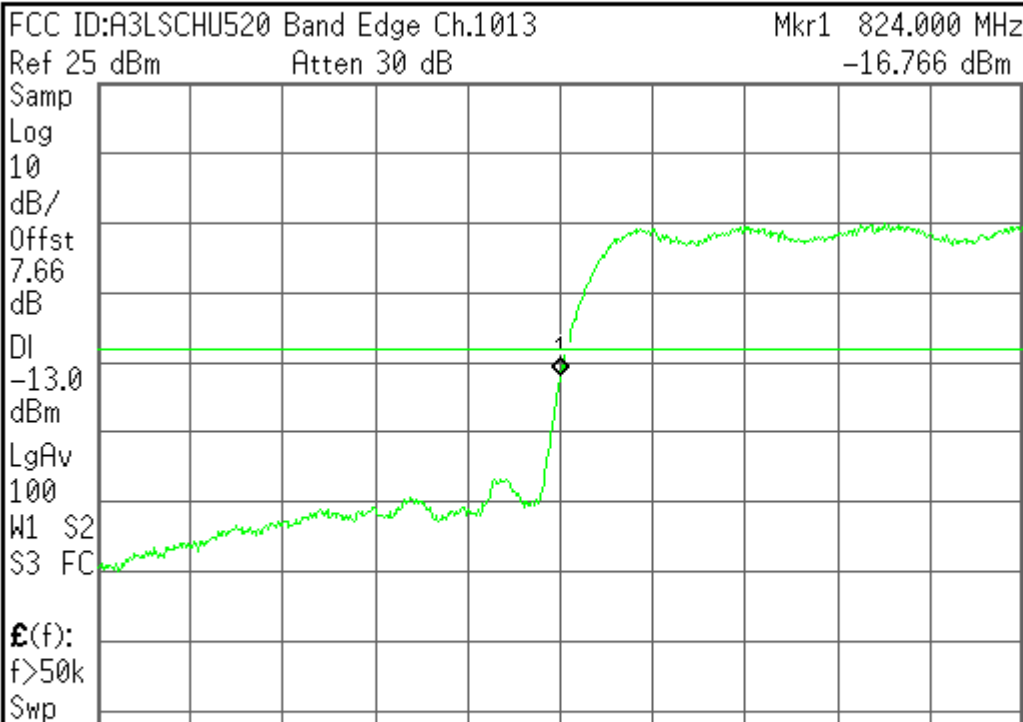

**Center Freq**  
 824.000000 MHz

**Start Freq**  
 823.000000 MHz


**Stop Freq**  
 825.000000 MHz

**CF Step**  
 200.000000 kHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

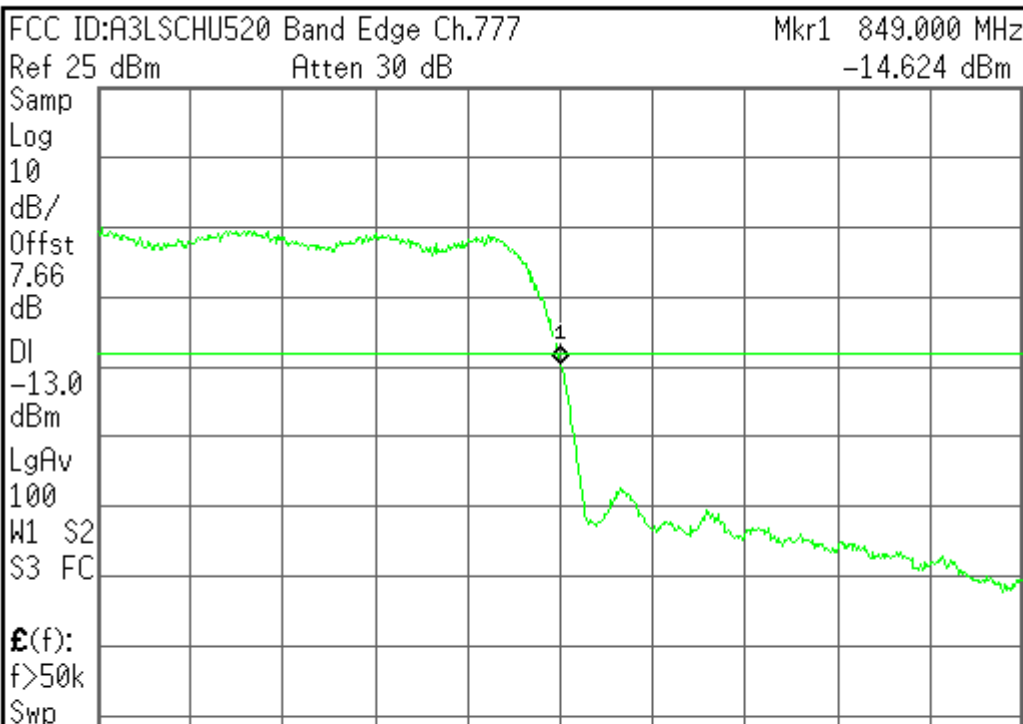

**Center Freq**  
 849.000000 MHz

**Start Freq**  
 848.000000 MHz


**Stop Freq**  
 850.000000 MHz

**CF Step**  
 200.000000 kHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

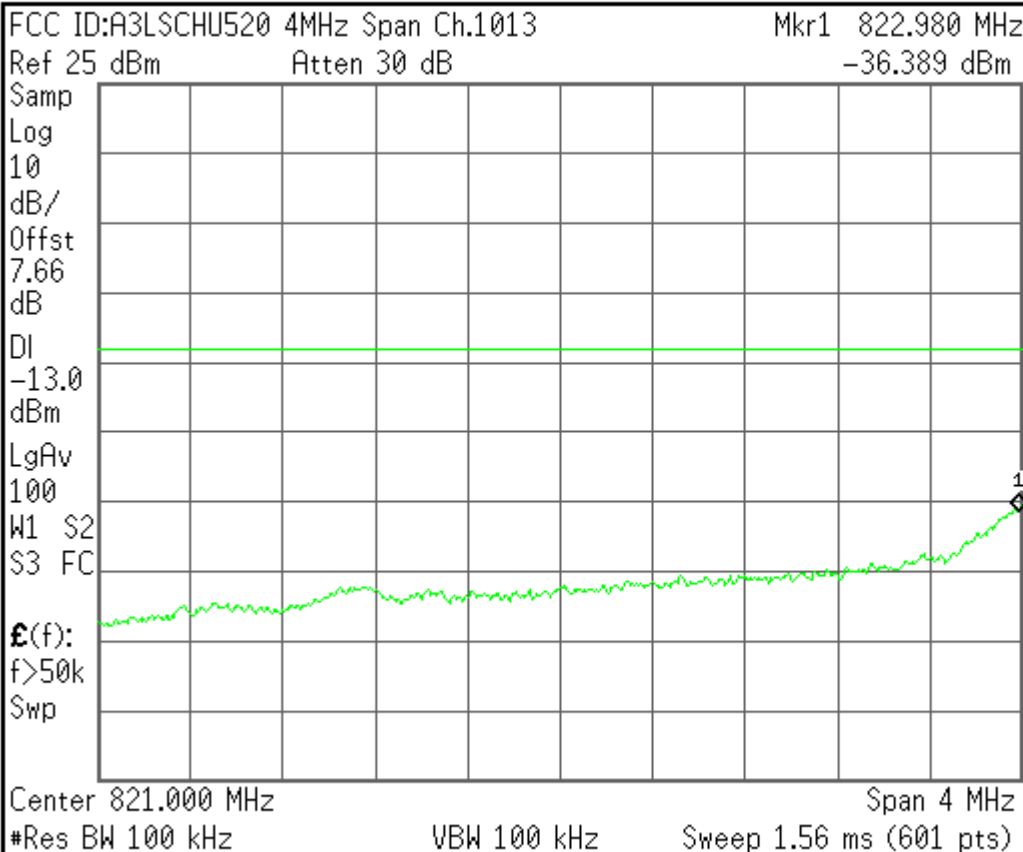

**Center Freq**  
 821.000000 MHz

**Start Freq**  
 819.000000 MHz


**Stop Freq**  
 823.000000 MHz

**CF Step**  
 400.000000 kHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

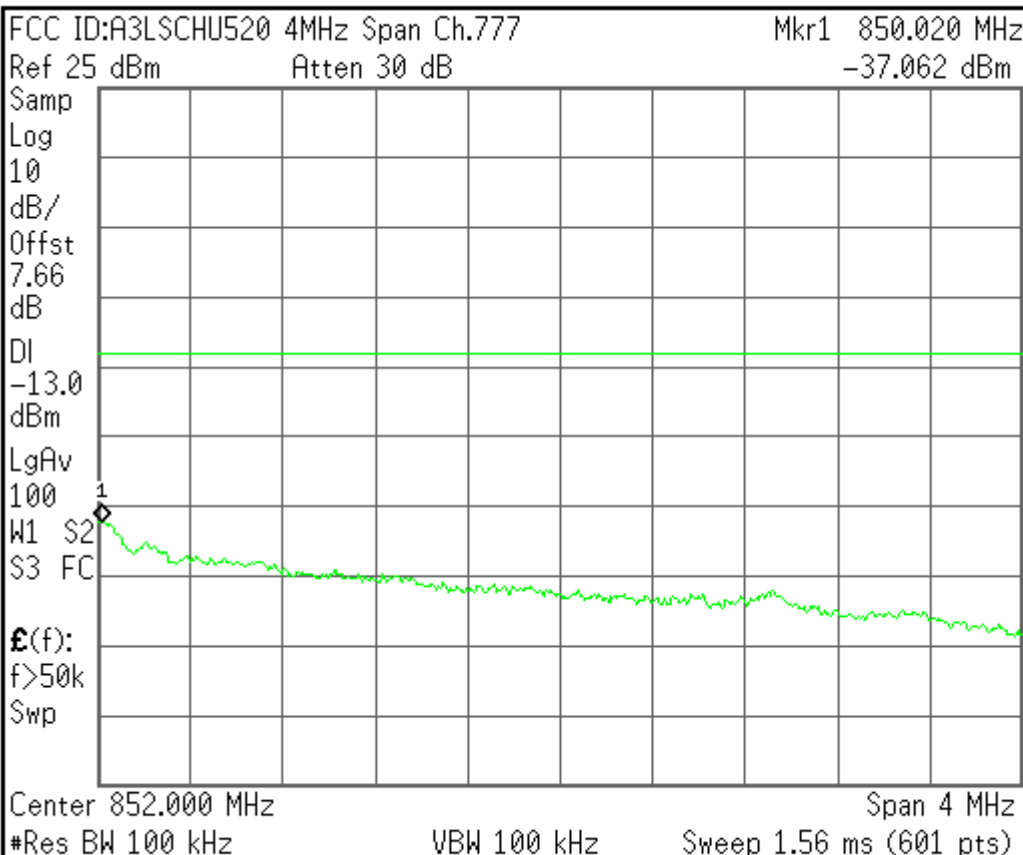

**Center Freq**  
 852.000000 MHz

**Start Freq**  
 850.000000 MHz

**Stop Freq**  
 854.000000 MHz

**CF Step**  
 400.000000 kHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz


**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

Ch Freq 1.85125 GHz Trig Free  
Channel Power

FCC ID:A3LSCHU520 Power Out Ch.25

Ref 25 dBm Atten 30 dB

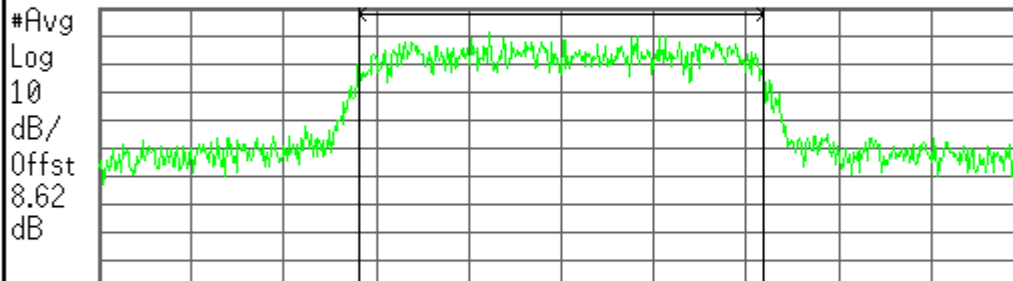

Center 1.851 250 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

25.03 dBm /1.2861 MHz

-36.13 dBm/Hz

Center Freq  
1.85125000 GHz

Start Freq  
1.84975000 GHz

Stop Freq  
1.85275000 GHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2005 Agilent Technologies

Ch Freq 1.88 GHz Trig Free  
Channel Power

FCC ID:A3LSCHU520 Power Out Ch.600

Ref 25 dBm Atten 30 dB

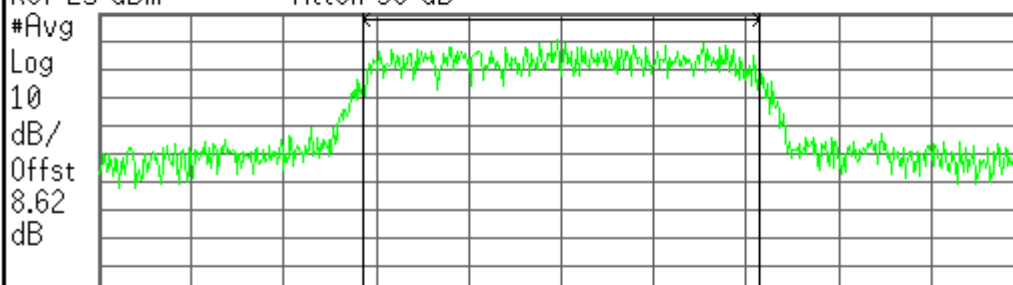

Center 1.880 000 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

25.01 dBm /1.2872 MHz

-36.09 dBm/Hz

Center Freq  
1.88000000 GHz

Start Freq  
1.87850000 GHz

Stop Freq  
1.88150000 GHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off


Copyright 2000-2005 Agilent Technologies

Ch Freq 1.90875 GHz Trig Free

Channel Power

FCC ID:A3LSCHU520 Power Out Ch.1175

Ref 25 dBm Atten 30 dB

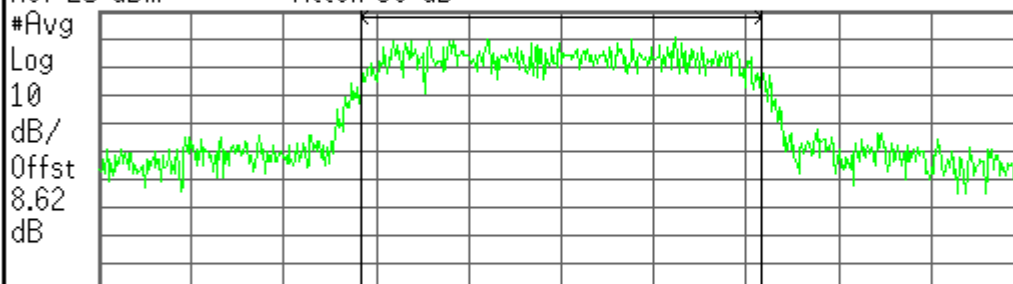

Center 1.908 750 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

25.05 dBm /1.2946 MHz

-36.07 dBm/Hz

Copyright 2000-2005 Agilent Technologies

FCC ID:A3LSCHU520 Power Out Ch.25

Ref 25 dBm

Atten 30 dB

Samp

Log

10

dB/

Offst

8.62

dB

LgAv

100


V1 S2

S3 FC

E(f):

FTun

Swp

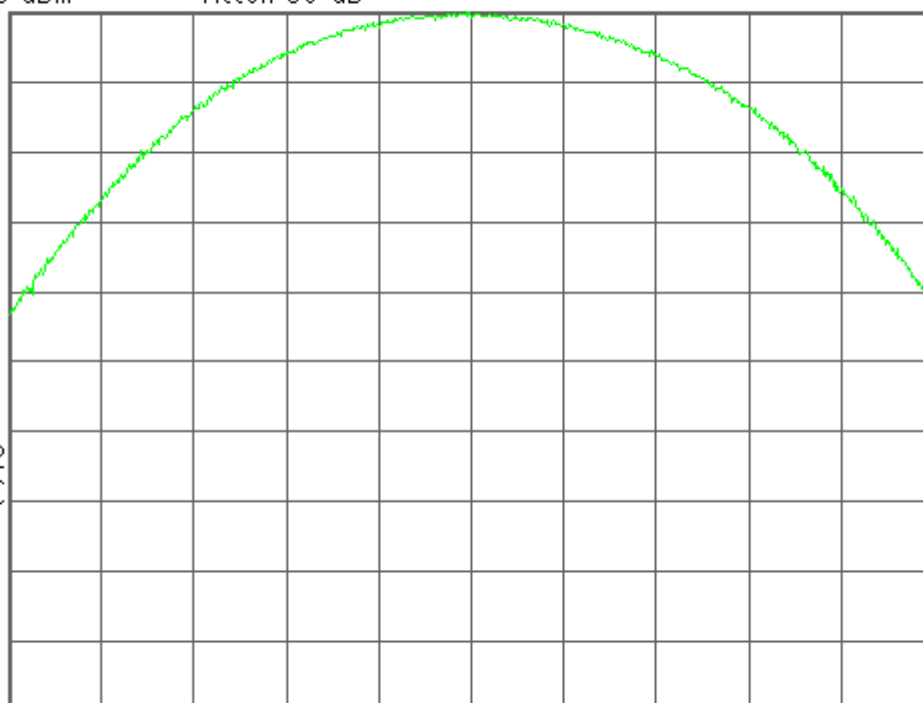

Center 1.851 25 GHz

Span 10 MHz

#Res BW 3 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Copyright 2000-2005 Agilent Technologies

Center Freq  
1.85125000 GHz

Start Freq  
1.84625000 GHz

Stop Freq  
1.85625000 GHz

CF Step  
1.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off



FCC ID:A3LSCHU520 Power Out Ch.600

Ref 25 dBm

Atten 30 dB

Samp

Log

10

dB/

Offst

8.62

dB

LgAv

100


V1 S2

S3 FC

£(f):

FTun

Swp

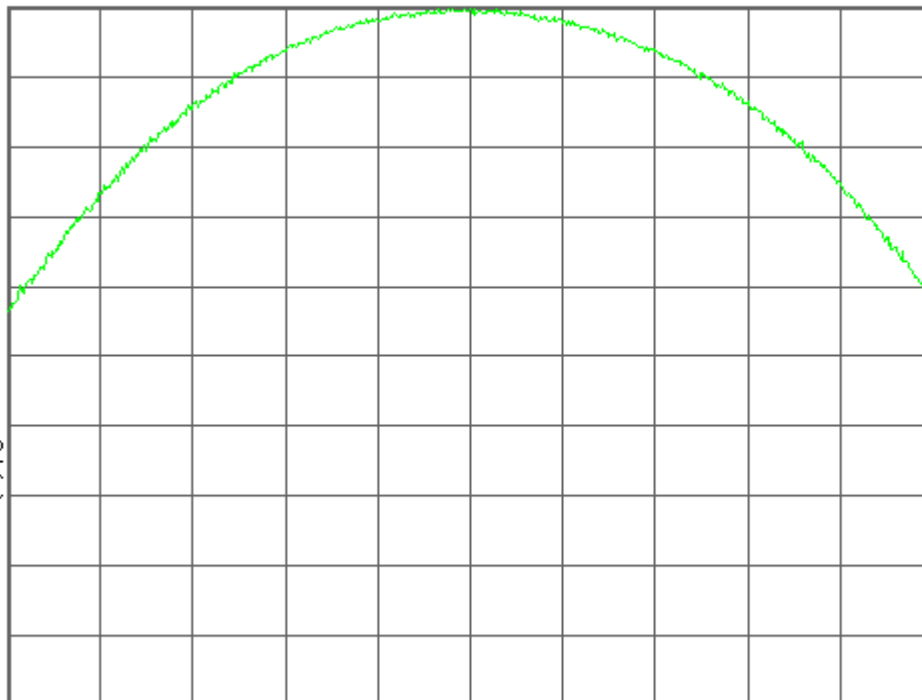

Center 1.880 00 GHz

Span 10 MHz

#Res BW 3 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq

1.88000000 GHz

Start Freq

1.87500000 GHz

Stop Freq

1.88500000 GHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Copyright 2000-2005 Agilent Technologies

FCC ID:A3LSCHU520 Power Out Ch.1175

Ref 25 dBm

Atten 30 dB

Samp

Log

10

dB/

Offst

8.62

dB

LgAv

100


V1 S2

S3 FC

£(f):

FTun

Swp

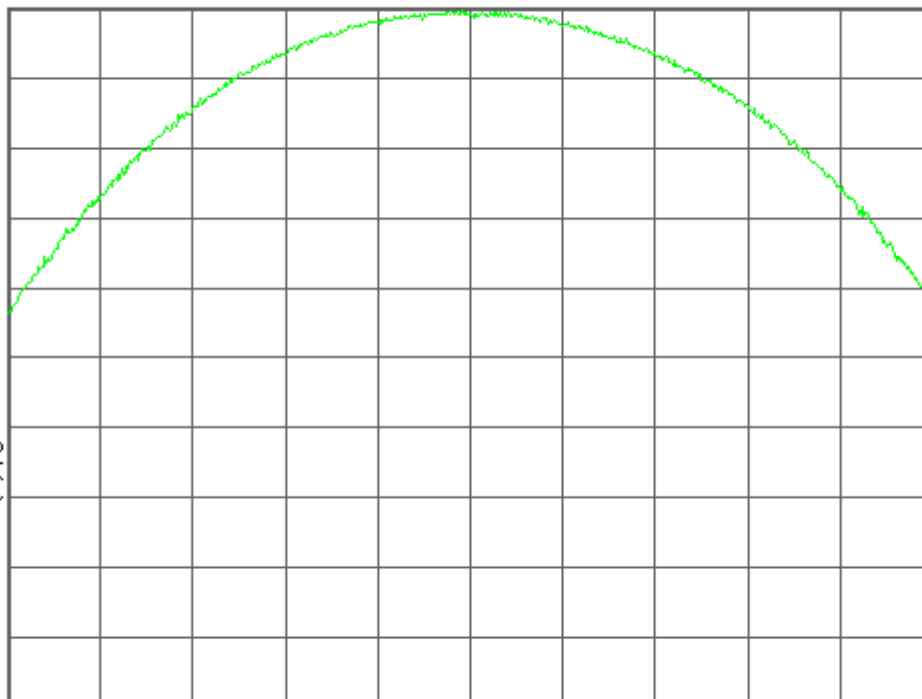

Center 1.908 75 GHz

Span 10 MHz

#Res BW 3 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq

1.90875000 GHz

Start Freq

1.90375000 GHz

Stop Freq

1.91375000 GHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset



0.00000000 Hz

Signal Track

On

Off

Copyright 2000-2005 Agilent Technologies

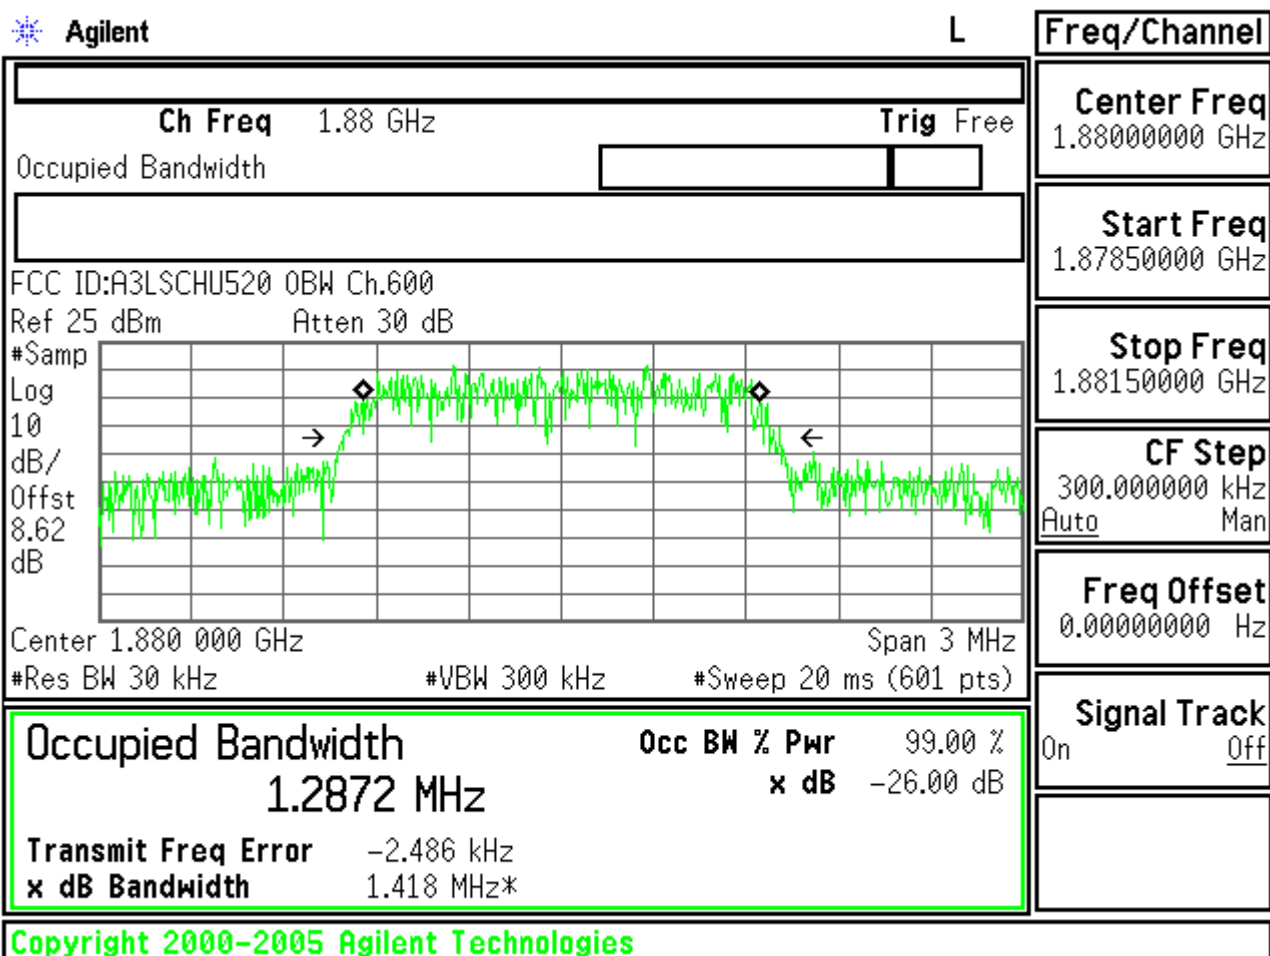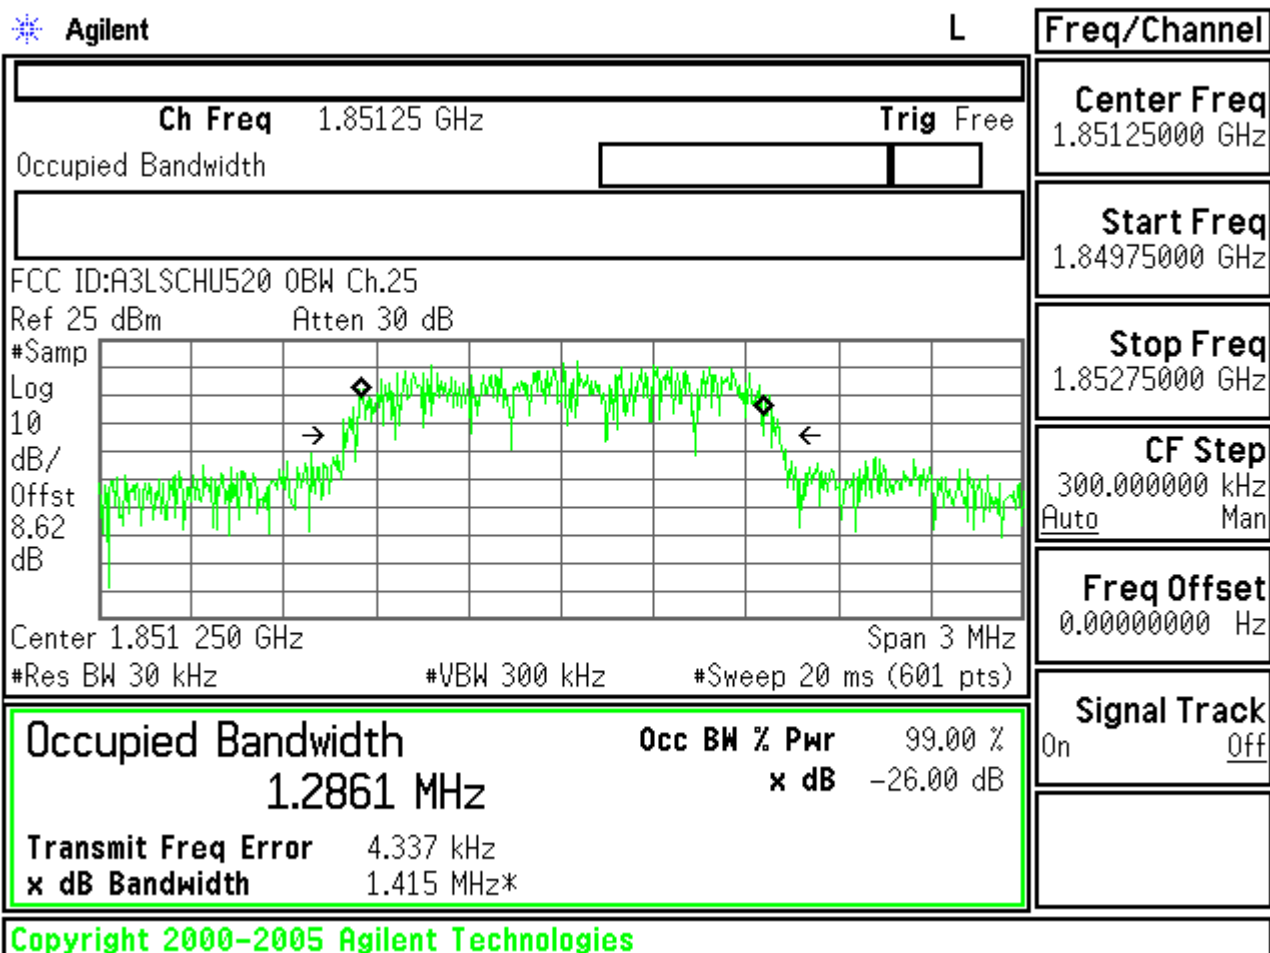

Ch Freq 1.90875 GHz Trig Free  
Occupied Bandwidth

Center Freq  
1.90875000 GHz

Start Freq  
1.90725000 GHz

Stop Freq  
1.91025000 GHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LSCHU520 0BW Ch.1175

Ref 25 dBm Atten 30 dB

#Samp

Log


10

dB/

Offst

8.62

dB

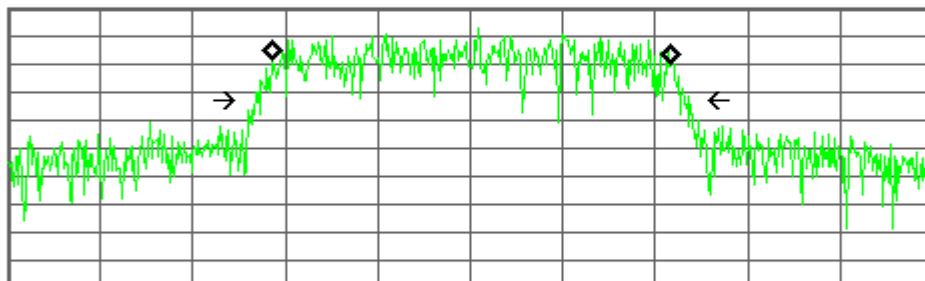

Center 1.908 750 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Occupied Bandwidth


1.2946 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error 4.195 kHz

x dB Bandwidth 1.405 MHz\*

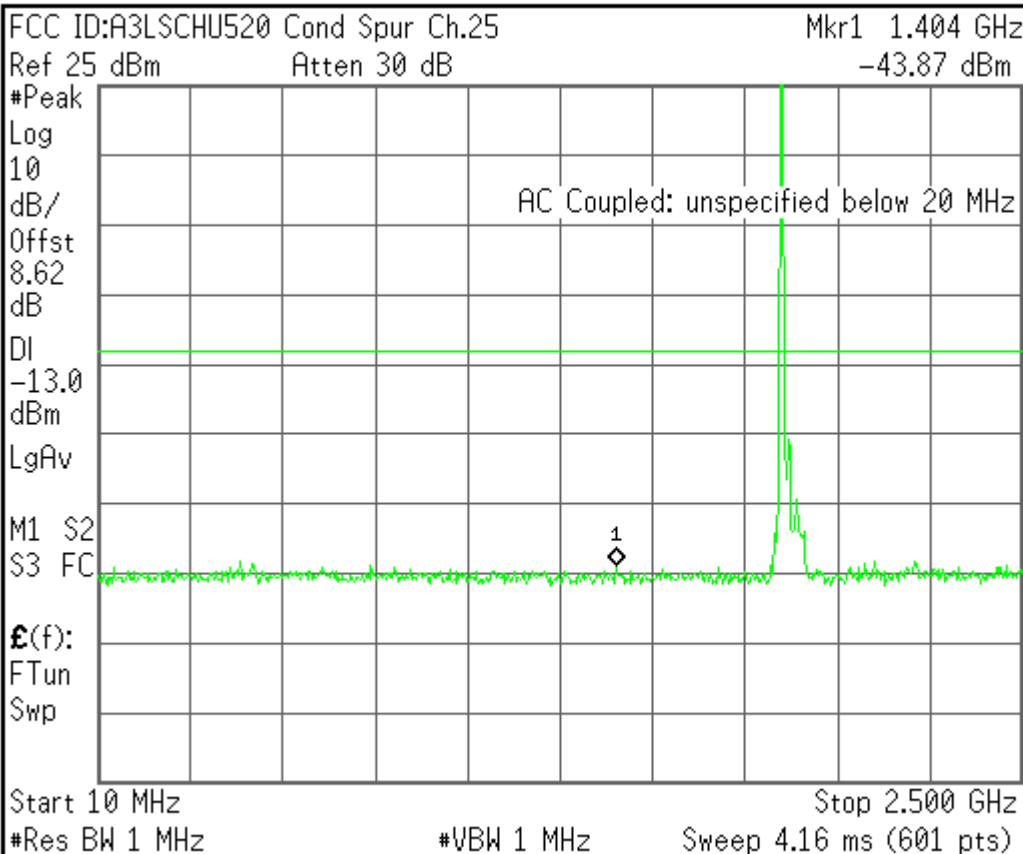

**Center Freq**  
 1.25500000 GHz

**Start Freq**  
 10.0000000 MHz


**Stop Freq**  
 2.50000000 GHz

**CF Step**  
 249.000000 MHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

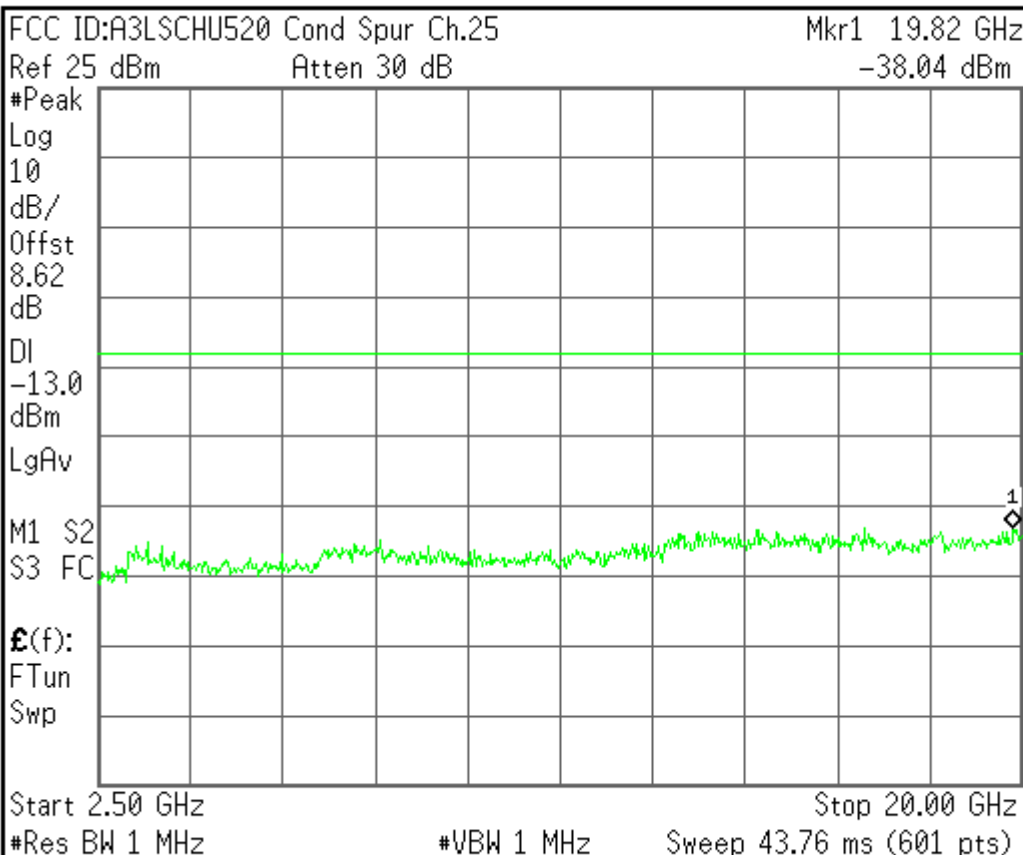

**Center Freq**  
 11.2500000 GHz

**Start Freq**  
 2.50000000 GHz



**Stop Freq**  
 20.0000000 GHz



**CF Step**  
 1.75000000 GHz  
 Auto Man


**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

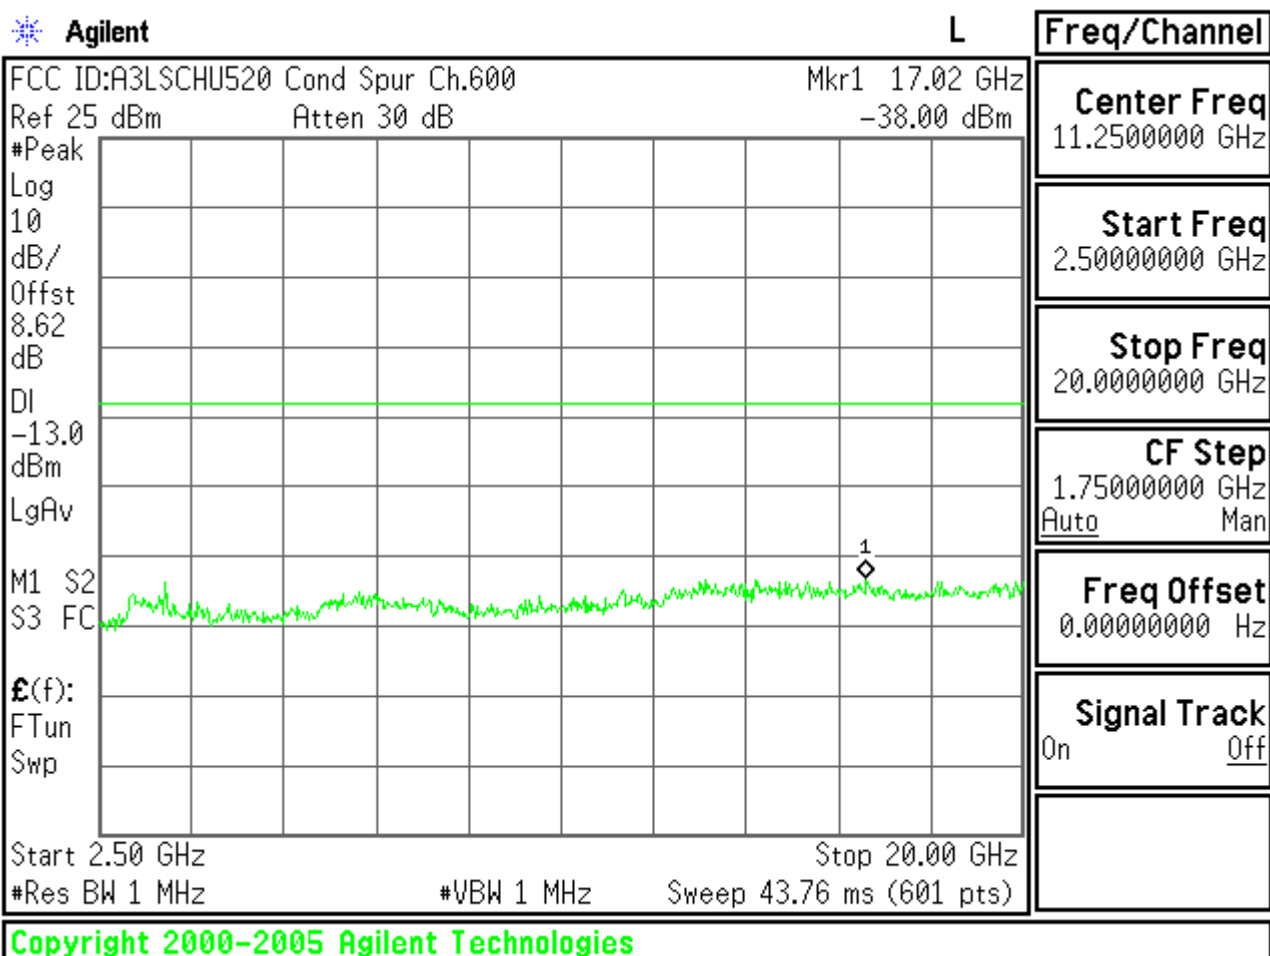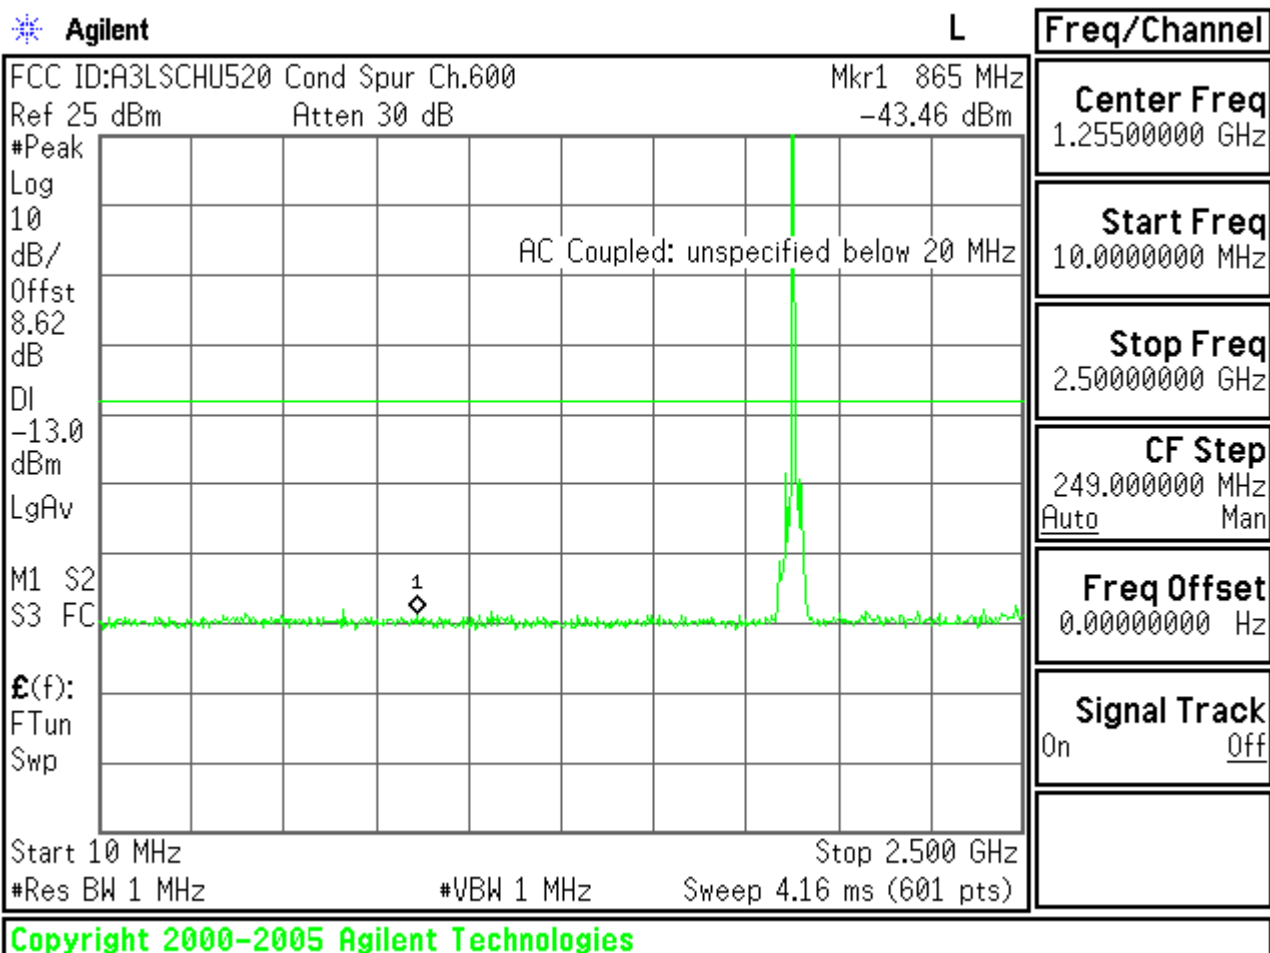

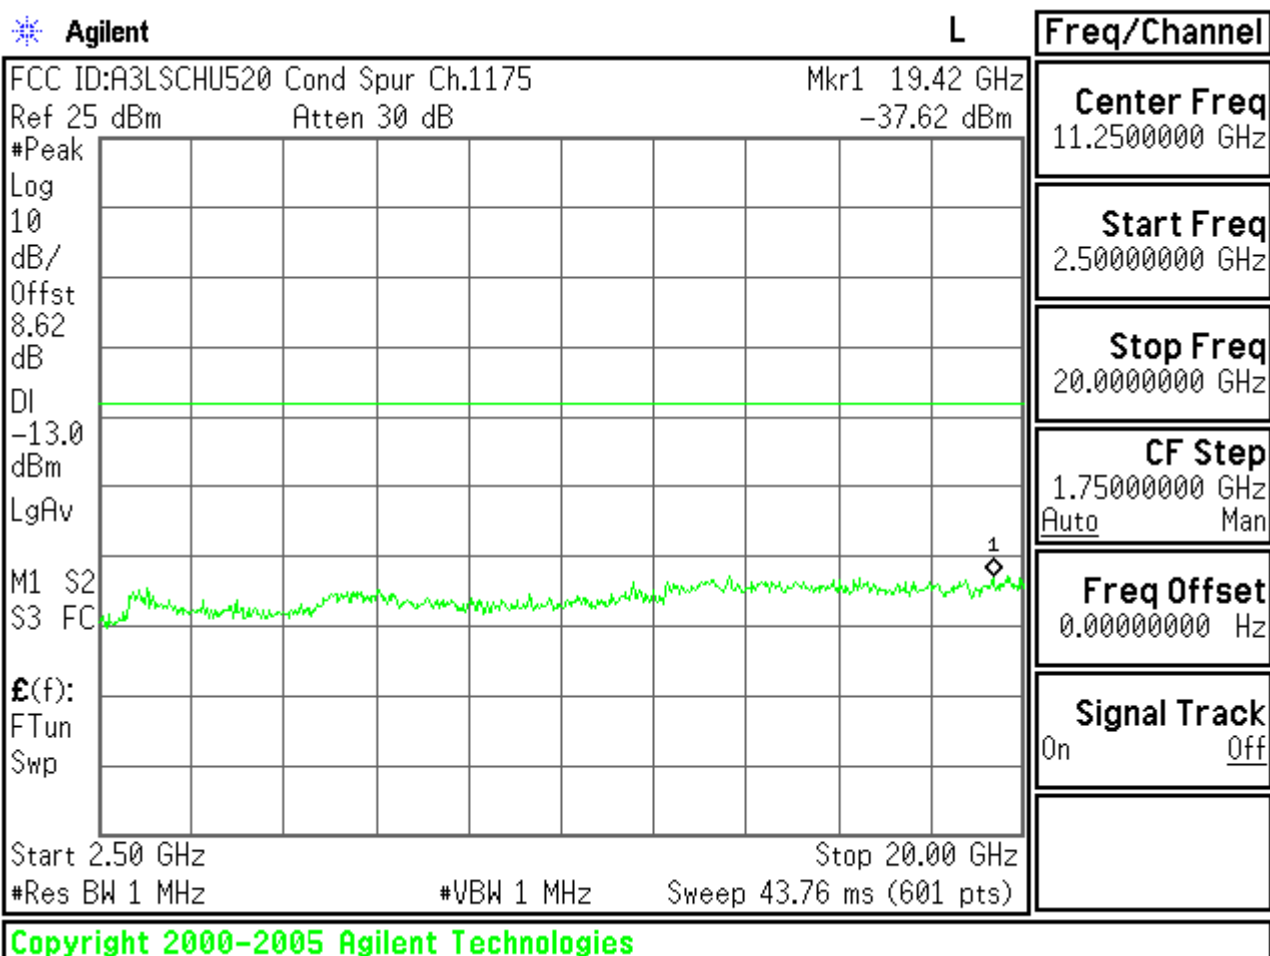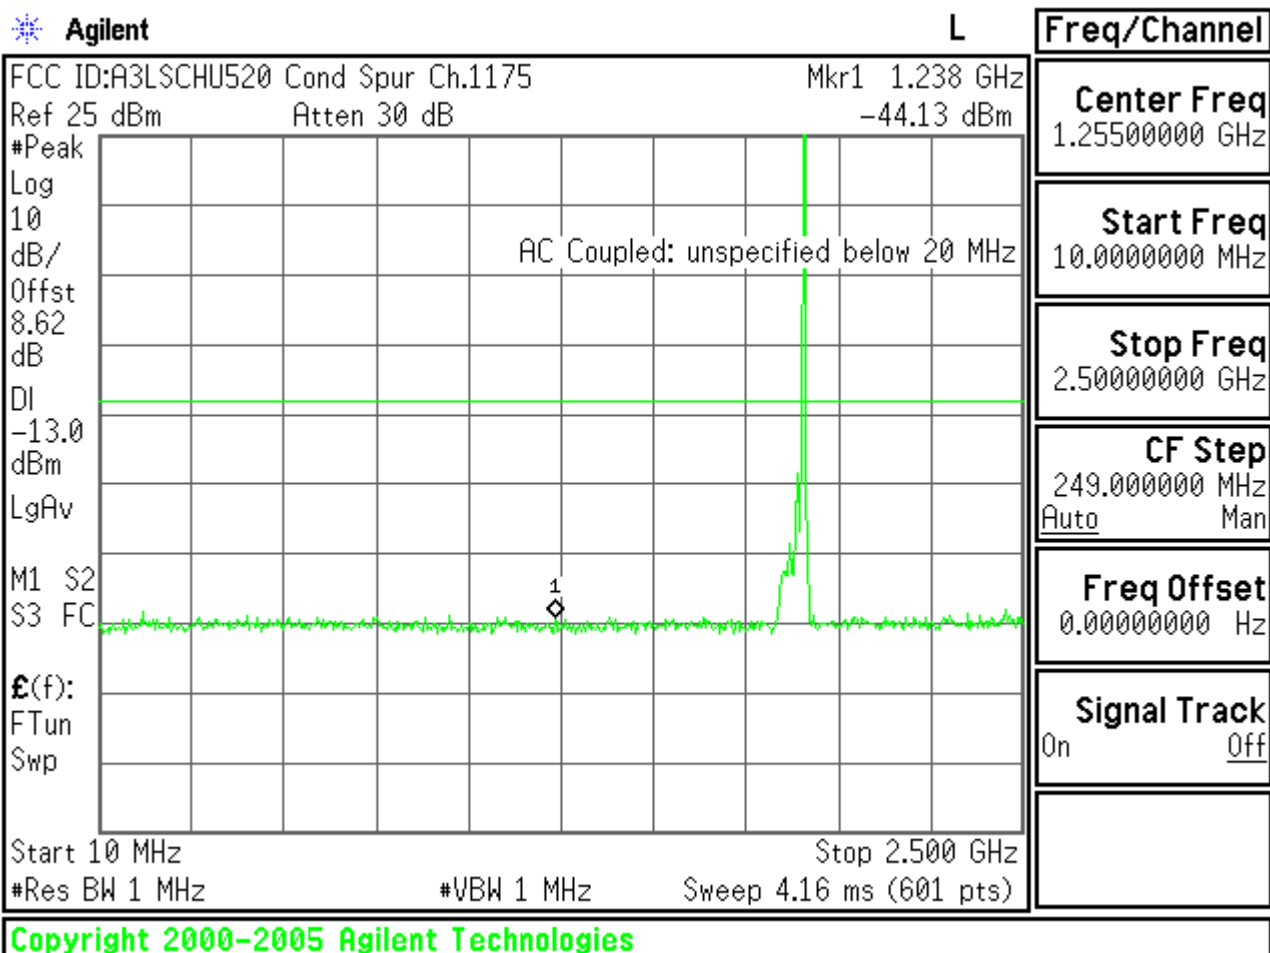

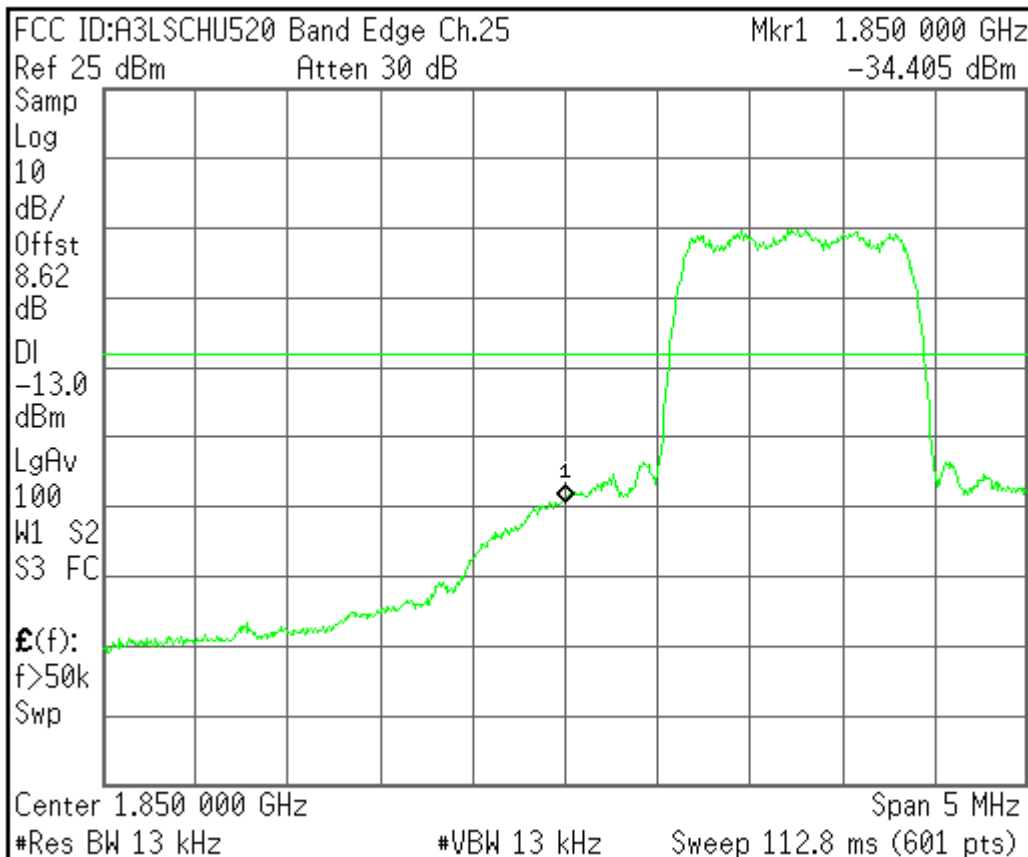

**Center Freq**  
 1.85000000 GHz

**Start Freq**  
 1.84750000 GHz


**Stop Freq**  
 1.85250000 GHz

**CF Step**  
 500.000000 kHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

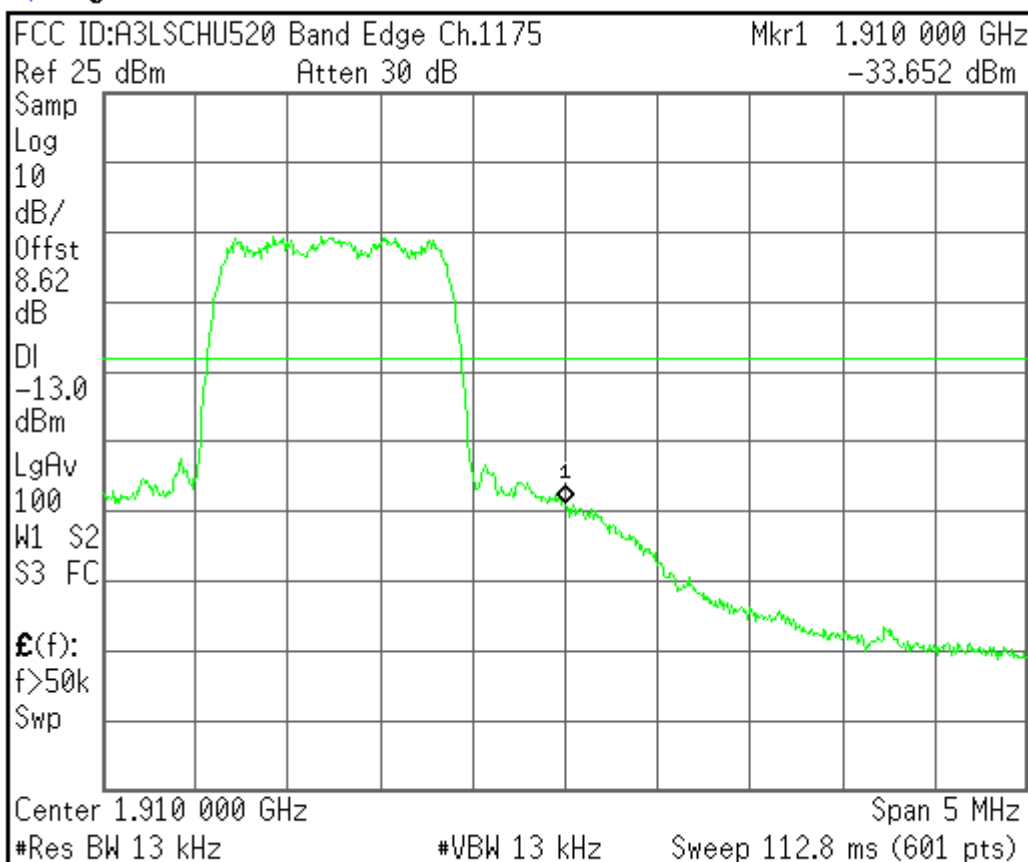

**Center Freq**  
 1.91000000 GHz

**Start Freq**  
 1.90750000 GHz

**Stop Freq**  
 1.91250000 GHz

**CF Step**  
 500.000000 kHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Copyright 2000-2005 Agilent Technologies

