



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 22, 24, 27 LTE

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro, Yeongtong-gu
Suwon-city, Gyeonggi-do, 443-803
Republic of Korea

Date of Testing:
1/31/2013 – 3/15/2013
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1303140500.A3L

FCC ID :	A3LSGHI337
APPLICANT:	SAMSUNG ELECTRONICS CO., LTD.

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §22; §24; §27
EUT Type: Portable Handset
Model(s): SGH-I337M
Test Device Serial No.: identical prototype [S/N: #22, #17, #33]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 17	706.5 - 713.5	4M49G7D	QPSK	0.080	19.03
LTE Band 17	706.5 - 713.5	4M48W7D	16QAM	0.062	17.95
LTE Band 17	709 - 711	8M94G7D	QPSK	0.081	19.06
LTE Band 17	709 - 711	8M95W7D	16QAM	0.065	18.14
LTE Band 5	826.5 - 846.5	4M48G7D	QPSK	0.125	20.98
LTE Band 5	826.5 - 846.5	4M48W7D	16QAM	0.096	19.81
LTE Band 5	829 - 844	8M92G7D	QPSK	0.107	20.31
LTE Band 5	829 - 844	8M92W7D	16QAM	0.086	19.35
LTE Band 4	1712.5 - 1752.5	4M49G7D	QPSK	0.261	24.16
LTE Band 4	1712.5 - 1752.5	4M48W7D	16QAM	0.201	23.03
LTE Band 4	1715 - 1750	8M93G7D	QPSK	0.248	23.94
LTE Band 4	1715 - 1750	8M93W7D	16QAM	0.188	22.74
LTE Band 4	1717.5 - 1747.5	13M4G7D	QPSK	0.244	23.88
LTE Band 4	1717.5 - 1747.5	13M4W7D	16QAM	0.191	22.81
LTE Band 4	1720 - 1745	17M8G7D	QPSK	0.239	23.78
LTE Band 4	1720 - 1745	17M9W7D	16QAM	0.189	22.76
LTE Band 2	1852.5 - 1907.5	4M51G7D	QPSK	0.244	23.87
LTE Band 2	1852.5 - 1907.5	4M52W7D	16QAM	0.202	23.05
LTE Band 2	1855 - 1905	8M93G7D	QPSK	0.339	25.30
LTE Band 2	1855 - 1905	8M92W7D	16QAM	0.208	23.19
LTE Band 2	1857.5 - 1902.5	13M4G7D	QPSK	0.320	25.06
LTE Band 2	1857.5 - 1902.5	13M4W7D	16QAM	0.205	23.11
LTE Band 2	1860 - 1900	17M8G7D	QPSK	0.294	24.69
LTE Band 2	1860 - 1900	17M8W7D	16QAM	0.225	23.53

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Rainy Ortañez
President




FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 1 of 101

T A B L E O F C O N T E N T S


FCC PART 22, 24, 27 MEASUREMENT REPORT.....		4
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES		5
2.3 TEST CONFIGURATION		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
2.5 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS.....		6
3.1 MEASUREMENT PROCEDURE		6
3.2 BLOCK A FREQUENCY RANGE		6
3.3 CELLULAR - BASE FREQUENCY BLOCKS.....		6
3.4 CELLULAR - MOBILE FREQUENCY BLOCKS.....		6
3.5 PCS - BASE FREQUENCY BLOCKS		7
3.6 PCS - MOBILE FREQUENCY BLOCKS		7
3.7 AWS - BASE FREQUENCY BLOCKS		7
3.8 AWS - MOBILE FREQUENCY BLOCKS		7
3.9 OCCUPIED BANDWIDTH.....		8
3.10 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL		8
3.11 PEAK-AVERAGE RATIO		8
3.12 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		9
3.13 FREQUENCY STABILITY / TEMPERATURE VARIATION		10
4.0 TEST EQUIPMENT CALIBRATION DATA		11
5.0 SAMPLE CALCULATIONS		12
6.0 TEST RESULTS		13
6.1 SUMMARY		13
6.2 EFFECTIVE RADIATED POWER (ERP)		14
6.3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)		15
6.4 BAND 17 RADIATED SPURIOUS EMISSIONS		17
6.5 BAND 5 RADIATED SPURIOUS EMISSIONS		21
6.6 BAND 4 RADIATED SPURIOUS EMISSIONS		25
6.7 BAND 2 RADIATED SPURIOUS EMISSIONS		29
6.8 BAND 17 FREQUENCY STABILITY MEASUREMENTS		33
6.9 BAND 5 FREQUENCY STABILITY MEASUREMENTS		35
6.10 BAND 4 FREQUENCY STABILITY MEASUREMENTS		37
6.11 BAND 2 FREQUENCY STABILITY MEASUREMENTS		39
7.0 BAND 17 PLOTS OF EMISSIONS		41
8.0 BAND 5 PLOTS OF EMISSIONS		50
9.0 BAND 4 PLOTS OF EMISSIONS		61
10.0 BAND 2 PLOTS OF EMISSIONS		81
11.0 CONCLUSION.....		101

FCC ID: A3LSGHI337	 FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 2 of 101



MEASUREMENT REPORT

FCC Part 22, 24, 27




§2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.
APPLICANT ADDRESS: 129, Samsung-ro, Yeongtong-gu
 Suwon-city, Gyeonggi-do, 443-803, Republic of Korea
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22; §24; §27
BASE MODEL: SGH-I337M
FCC ID: A3LSGHI337
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: #22, #17, #33 Production Pre-Production Engineering
DATE(S) OF TEST: 1/31/2013 – 3/15/2013
TEST REPORT S/N: 0Y1303140500.A3L

Test Facility / Accreditations



Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC.



- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 3 of 101	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

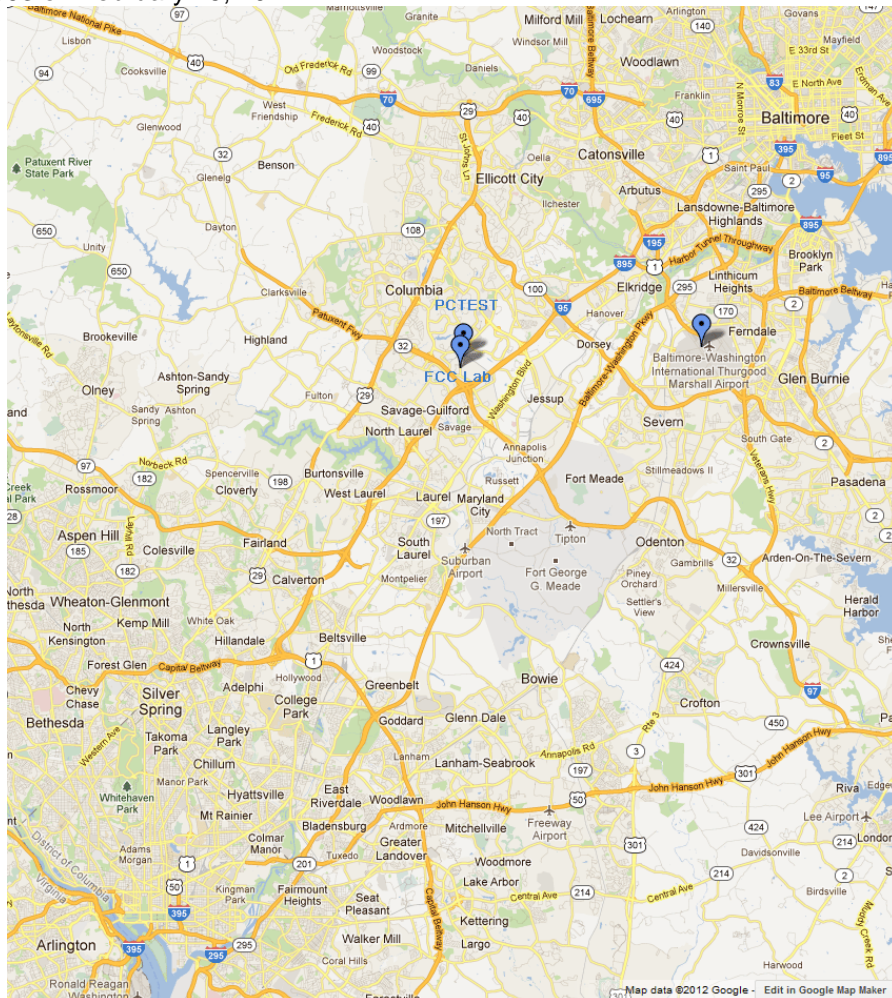




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSGH1337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 4 of 101	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSGHI337**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Band 2, 4, 5, 17 LTE, 802.11a/b/n/ac WLAN (DTS/NII), Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

This device supports a wireless charging cover. Per KDB 648474 D03 v01r01, spurious emissions measurement data was also investigated with the wireless charging battery cover. The handset was placed on the representative charging pad under normal conditions and in a simulated call configuration. Only worst case emissions are shown in this report and identified as WCC.



2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 5 of 101	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) was used in the measurement of the **Samsung Portable Handset FCC ID: A3LSGHI337**.

3.2 Block A Frequency Range

§27.5(c)

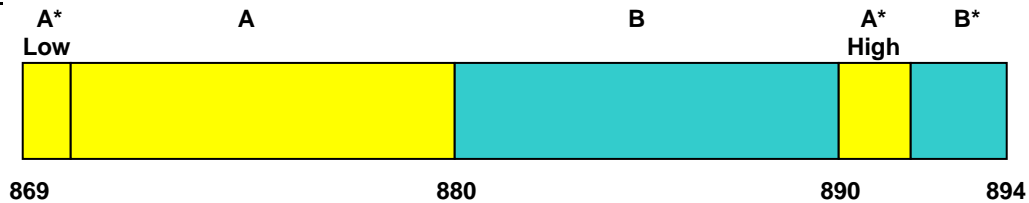
698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
 Block B: 704-710 MHz and 734-740 MHz; and
 Block C: 710-716 MHz and 740-746 MHz.

The EUT is only being authorized for operation in Blocks B and C.

3.3 Cellular - Base Frequency Blocks

§24.905



BLOCK 1: 869 – 880 MHz (A* Low + A)


BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.4 Cellular - Mobile Frequency Blocks

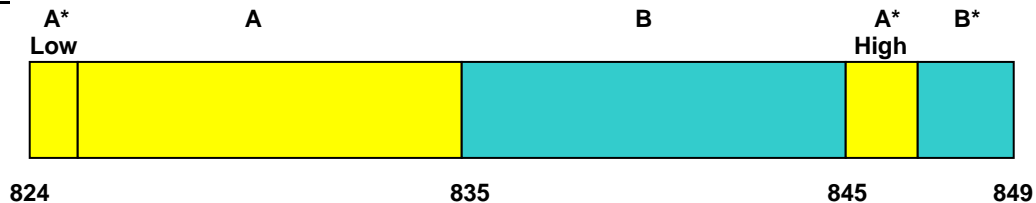§24.905





BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)


BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 6 of 101

3.5 PCS - Base Frequency Blocks

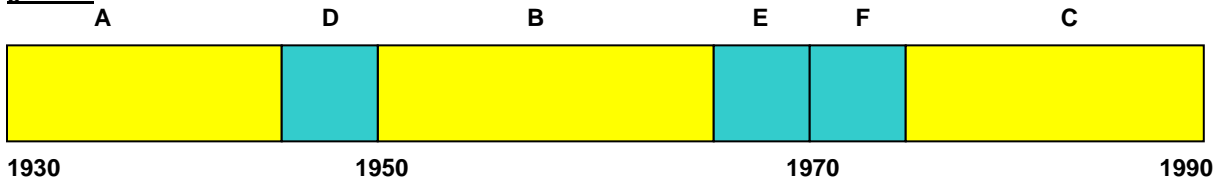
§24.229



- BLOCK 1: 1930 – 1945 MHz (A)
- BLOCK 2: 1945 – 1950 MHz (D)
- BLOCK 3: 1950 – 1965 MHz (B)
- BLOCK 4: 1965 – 1970 MHz (E)
- BLOCK 5: 1970 – 1975 MHz (F)
- BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks

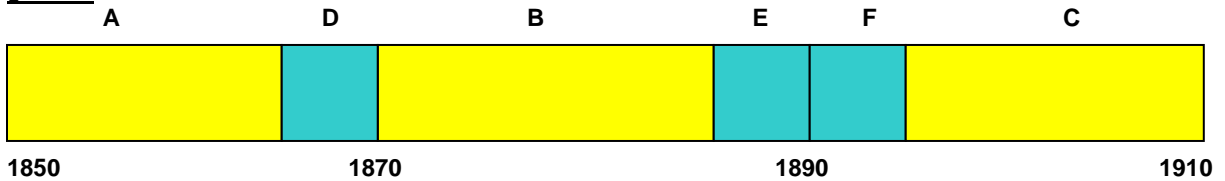
§24.229



- BLOCK 1: 1850 – 1865 MHz (A)
- BLOCK 2: 1865 – 1870 MHz (D)
- BLOCK 3: 1870 – 1885 MHz (B)
- BLOCK 4: 1885 – 1890 MHz (E)
- BLOCK 5: 1890 – 1895 MHz (F)
- BLOCK 6: 1895 – 1910 MHz (C)

3.7 AWS - Base Frequency Blocks

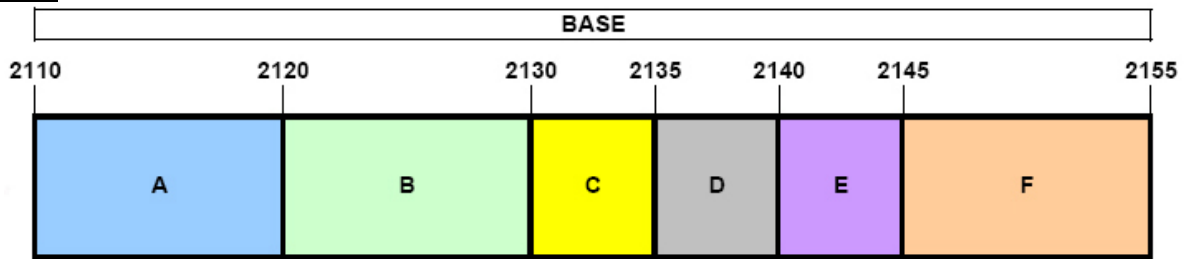
§27.5(h)



- BLOCK 1: 2110 – 2120 MHz (A)
- BLOCK 2: 2120 – 2130 MHz (B)
- BLOCK 3: 2130 – 2135 MHz (C)
- BLOCK 4: 2135 – 2140 MHz (D)
- BLOCK 5: 2140 – 2145 MHz (E)
- BLOCK 6: 2145 – 2155 MHz (E)

3.8 AWS - Mobile Frequency Blocks

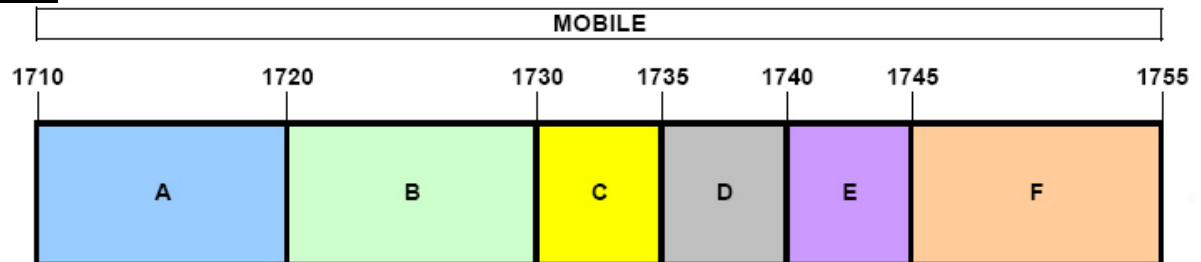§27.5(h)



- BLOCK 1: 1710 – 1720 MHz (A)
- BLOCK 2: 1720 – 1730 MHz (B)
- BLOCK 3: 1730 – 1735 MHz (C)
- BLOCK 4: 1735 – 1740 MHz (D)
- BLOCK 5: 1740 – 1745 MHz (E)
- BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 7 of 101

3.9 Occupied Bandwidth

§2.1049 RSS-Gen(4.6.1) RSS-133(2.3) RSS-139(2.3)

The implementation of this test is performed by the spectrum analyzer's occupied bandwidth function. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

3.10 Spurious and Harmonic Emissions at Antenna Terminal



§2.1051 §22.917(a)(b) §24.238(a)(b) §27.53(g) §27.53(h) RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Cell band, 698–746 MHz band, or 1 MHz or greater for PCS band, AWS band. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed for PCS band, AWS band. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.11 Peak-Average Ratio

§24.232(d) §27.50(d.5) RSS-132(5.4) RSS-133(6.4) RSS-139(6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 8 of 101	

3.12 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(c.10) §27.50(d.4) §27.53(g) RSS-132(4.4) RSS-132(4.5.1) RSS-133(6.4) RSS-133(6.5.1) RSS-139(6.5.1)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.



The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power} [Watts])$ specified in 22.917(a) and 24.238(a).

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 9 of 101	

3.13 Frequency Stability / Temperature Variation

§2.1055 §22.863 §22.905 §24.229 §24.235 §27.5(c) §27.5(h) §27.54 RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)



The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24 and 27. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: A3LSGHI337	 FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 10 of 101

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).



Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	1937A03348
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N5183A	MXG Analog Signal Generator	1/6/2013	Annual	1/6/2014	MY50141900
Anritsu	MA2411B	Power Sensor	3/5/2012	Annual	3/5/2013	846215
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Espec	ESX-2CA	Environmental Chamber	4/4/2012	Annual	4/4/2013	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1300+	High Pass Filter	1/21/2013	Annual	1/21/2014	30716
Mini-Circuits	VHF-1200+	High Pass Filter	1/17/2013	Annual	1/17/2014	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	N/A		N/A	103962
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/30/2012	Annual	5/30/2013	100040
Rohde & Schwarz	ESU26	EMI Test Receiver	3/15/2012	Annual	3/15/2013	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 4-1. Test Equipment

Note:

Equipment used for signaling with a calibration date of "N/A" shown in this list was only used for maintaining a link between the piece of equipment and the EUT. This equipment was not used to make direct calibrated measurements.

If the "Cal Due" date falls within the test period, the piece of equipment was used for testing before its calibration due date.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 11 of 101	

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Amplitude/Angle Modulated

16QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Combination (Audio/Data)

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 12 of 101

6.0 TEST RESULTS

6.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSGHI337
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
TRANSMITTER MODE (TX)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0, 8.0, 9.0, 10.0
2.1051 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Band Edge / Conducted Spurious Emissions	$> 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Section 7.0, 8.0, 9.0, 10.0
24.232(d) 27.50(d.5)	Peak-Average Ratio	< 13 dB		PASS	Section 9.0, 10.0
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
22.913(a.2)	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
27.50(c.10)	Effective Radiated Power (Band 17)	< 3 Watts max. ERP		PASS	Section 6.2
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS	Section 6.3
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Undesirable Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 6.4, 6.5, 6.6, 6.7
2.1055.22.355 22.863 22.905 24.229 24.235 27.5(c) 27.5(h) 27.54	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27)		PASS	Section 6.8, 6.9, 6.10, 6.11

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Sections 7.0, 8.0, 9.0, 10.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) This device supports a wireless charging cover. Additional emissions testing was performed per KDB 648474 D03 and the additional worst case emissions are reported herein and identified as WCC.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 13 of 101	

6.2 Effective Radiated Power (ERP)

§22.913(a.2) §27.50(c.10) RSS-132(4.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
706.50	5	QPSK	Standard	1 / 0	16.31	2.35	V	18.66	0.073	-16.11
710.00	5	QPSK	Standard	1 / 0	16.23	2.42	V	18.65	0.073	-16.12
713.50	5	QPSK	Standard	1 / 12	16.54	2.49	V	19.03	0.080	-15.74
706.50	5	16-QAM	Standard	1 / 0	15.13	2.35	V	17.48	0.056	-17.29
710.00	5	16-QAM	Standard	1 / 0	15.13	2.42	V	17.55	0.057	-17.22
713.50	5	16-QAM	Standard	1 / 12	15.46	2.49	V	17.95	0.062	-16.82
709.00	10	QPSK	Standard	1 / 0	16.60	2.35	V	18.95	0.079	-15.82
710.00	10	QPSK	Standard	1 / 0	16.55	2.42	V	18.97	0.079	-15.80
711.00	10	QPSK	Standard	1 / 0	16.57	2.49	V	19.06	0.081	-15.71
709.00	10	16-QAM	Standard	1 / 0	15.40	2.35	V	17.75	0.060	-17.02
710.00	10	16-QAM	Standard	1 / 0	15.64	2.42	V	18.06	0.064	-16.71
711.00	10	16-QAM	Standard	1 / 0	15.65	2.49	V	18.14	0.065	-16.63
711.00	10	QPSK	WCC	1 / 0	8.16	2.49	H	10.65	0.012	-24.12



Table 6-2. ERP Data (Band 17)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
826.50	5	QPSK	Standard	1 / 0	16.30	4.68	H	20.98	0.125	-17.47
836.50	5	QPSK	Standard	1 / 0	15.22	4.82	H	20.04	0.101	-18.41
846.50	5	QPSK	Standard	1 / 0	14.31	4.96	H	19.27	0.085	-19.18
826.50	5	16-QAM	Standard	1 / 0	15.13	4.68	H	19.81	0.096	-18.64
836.50	5	16-QAM	Standard	1 / 0	13.97	4.82	H	18.79	0.076	-19.66
846.50	5	16-QAM	Standard	1 / 0	13.29	4.96	H	18.25	0.067	-20.20
829.00	10	QPSK	Standard	1 / 0	15.63	4.68	H	20.31	0.107	-18.14
836.50	10	QPSK	Standard	1 / 0	15.48	4.82	H	20.30	0.107	-18.15
844.00	10	QPSK	Standard	1 / 0	15.16	4.96	H	20.12	0.103	-18.33
829.00	10	16-QAM	Standard	1 / 0	14.45	4.68	H	19.13	0.082	-19.32
836.50	10	16-QAM	Standard	1 / 0	14.53	4.82	H	19.35	0.086	-19.10
844.00	10	16-QAM	Standard	1 / 0	14.27	4.96	H	19.23	0.084	-19.22
826.50	5	QPSK	WCC	1 / 0	11.75	4.68	H	16.43	0.044	-22.02

Table 6-3. ERP Data (Band 5)

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the tables above.
2. The worst case test configurations are shown in the tables above.
3. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.



FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 14 of 101	

6.3 Equivalent Isotropic Radiated Power (EIRP)

§24.232(c) §27.50(d.4) RSS-133(6.4) RSS-139(6.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1 / 0	14.27	9.89	H	24.16	0.261	-5.84
1732.50	5	QPSK	Standard	1 / 24	12.79	9.85	H	22.64	0.184	-7.36
1752.50	5	QPSK	Standard	1 / 0	13.76	9.80	H	23.56	0.227	-6.44
1712.50	5	16-QAM	Standard	1 / 0	13.14	9.89	H	23.03	0.201	-6.97
1732.50	5	16-QAM	Standard	1 / 24	11.76	9.85	H	21.61	0.145	-8.39
1752.50	5	16-QAM	Standard	1 / 0	12.70	9.80	H	22.50	0.178	-7.50
1715.00	10	QPSK	Standard	1 / 25	14.05	9.89	H	23.94	0.248	-6.06
1732.50	10	QPSK	Standard	1 / 49	13.60	9.85	H	23.45	0.221	-6.55
1750.00	10	QPSK	Standard	1 / 0	13.60	9.80	H	23.40	0.219	-6.60
1715.00	10	16-QAM	Standard	1 / 25	12.85	9.89	H	22.74	0.188	-7.26
1732.50	10	16-QAM	Standard	1 / 49	12.60	9.85	H	22.45	0.176	-7.55
1750.00	10	16-QAM	Standard	1 / 0	12.58	9.80	H	22.38	0.173	-7.62
1717.50	15	QPSK	Standard	1 / 38	13.99	9.89	H	23.88	0.244	-6.12
1732.50	15	QPSK	Standard	1 / 74	14.03	9.85	H	23.88	0.244	-6.12
1747.50	15	QPSK	Standard	1 / 0	13.96	9.80	H	23.76	0.238	-6.24
1717.50	15	16-QAM	Standard	1 / 38	12.87	9.89	H	22.76	0.189	-7.24
1732.50	15	16-QAM	Standard	1 / 74	12.96	9.85	H	22.81	0.191	-7.19
1747.50	15	16-QAM	Standard	1 / 0	12.90	9.80	H	22.70	0.186	-7.30
1720.00	20	QPSK	Standard	1 / 50	13.89	9.89	H	23.78	0.239	-6.22
1732.50	20	QPSK	Standard	1 / 99	13.90	9.85	H	23.75	0.237	-6.25
1745.00	20	QPSK	Standard	1 / 0	13.76	9.80	H	23.56	0.227	-6.44
1720.00	20	16-QAM	Standard	1 / 50	12.87	9.89	H	22.76	0.189	-7.24
1732.50	20	16-QAM	Standard	1 / 99	12.75	9.85	H	22.60	0.182	-7.40
1745.00	20	16-QAM	Standard	1 / 0	12.83	9.80	H	22.63	0.183	-7.37
1712.50	5	QPSK	WCC	1 / 0	13.98	9.89	H	23.87	0.244	-6.13

Table 6-4. EIRP Data (Band 4)



FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 15 of 101	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1852.50	5	QPSK	Standard	1 / 24	14.28	9.59	H	23.87	0.244	-9.14
1880.00	5	QPSK	Standard	1 / 0	13.22	9.53	H	22.75	0.188	-10.26
1907.50	5	QPSK	Standard	1 / 0	13.35	9.48	H	22.83	0.192	-10.18
1852.50	5	16-QAM	Standard	1 / 24	13.23	9.59	H	22.82	0.191	-10.19
1880.00	5	16-QAM	Standard	1 / 0	13.52	9.53	H	23.05	0.202	-9.96
1907.50	5	16-QAM	Standard	1 / 0	12.34	9.48	H	21.82	0.152	-11.19
1855.00	10	QPSK	Standard	1 / 25	15.50	9.59	H	25.09	0.323	-7.92
1880.00	10	QPSK	Standard	1 / 0	13.59	9.53	H	23.12	0.205	-9.89
1905.00	10	QPSK	Standard	1 / 0	13.95	9.48	H	23.43	0.220	-9.58
1855.00	10	16-QAM	Standard	1 / 25	13.60	9.59	H	23.19	0.208	-9.82
1880.00	10	16-QAM	Standard	1 / 0	12.59	9.53	H	22.12	0.163	-10.89
1905.00	10	16-QAM	Standard	1 / 0	12.92	9.48	H	22.40	0.174	-10.61
1857.50	15	QPSK	Standard	1 / 36	15.47	9.59	H	25.06	0.320	-7.95
1880.00	15	QPSK	Standard	1 / 0	13.83	9.53	H	23.36	0.217	-9.65
1902.50	15	QPSK	Standard	1 / 36	14.66	9.48	H	24.14	0.259	-8.87
1857.50	15	16-QAM	Standard	1 / 36	13.52	9.59	H	23.11	0.205	-9.90
1880.00	15	16-QAM	Standard	1 / 0	12.89	9.53	H	22.42	0.175	-10.59
1902.50	15	16-QAM	Standard	1 / 36	12.84	9.48	H	22.32	0.171	-10.69
1860.00	20	QPSK	Standard	1 / 50	15.10	9.59	H	24.69	0.294	-8.32
1880.00	20	QPSK	Standard	1 / 0	13.75	9.53	H	23.28	0.213	-9.73
1900.00	20	QPSK	Standard	1 / 50	13.88	9.48	H	23.36	0.217	-9.65
1860.00	20	16-QAM	Standard	1 / 50	13.94	9.59	H	23.53	0.225	-9.48
1880.00	20	16-QAM	Standard	1 / 0	12.84	9.53	H	22.37	0.173	-10.64
1900.00	20	16-QAM	Standard	1 / 50	12.94	9.48	H	22.42	0.175	-10.59
1855.00	10	QPSK	WCC	1 / 25	15.71	9.59	H	25.30	0.339	-7.71

Table 6-5. EIRP Data (Band 2)

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the tables above.
2. The worst case test configurations are shown in the tables above.
3. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 16 of 101	

6.4 Band 17 Radiated Spurious Emissions

§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 709.00 MHz
 MEASURED OUTPUT POWER: 18.95 dBm = 0.079 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.95 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1418.00	-43.19	3.63	-39.56	H	58.51
2127.00	-47.99	3.90	-44.09	H	63.05
2836.00	-43.32	5.01	-38.31	H	57.26
3545.00	-51.64	6.25	-45.39	H	64.34
4254.00	-80.17	7.23	-72.93	H	91.89
4963.00	-79.72	7.86	-71.86	H	90.81

Table 6-6. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 17 of 101	

Band 17 Radiated Spurious Measurements (continued)
§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 710.00 MHz
 MEASURED OUTPUT POWER: 18.97 dBm = 0.079 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 31.97 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1420.00	-43.35	3.68	-39.67	H	58.64
2130.00	-48.17	3.92	-44.26	H	63.23
2840.00	-43.49	5.02	-38.47	H	57.44
3550.00	-51.75	6.25	-45.50	H	64.47
4260.00	-80.15	7.25	-72.90	H	91.88
4970.00	-79.74	7.90	-71.84	H	90.81

Table 6-7. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 18 of 101	

Band 17 Radiated Spurious Measurements (continued)
§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 711.00 MHz
 MEASURED OUTPUT POWER: 19.06 dBm = 0.081 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.06 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1422.00	-41.38	3.73	-37.65	H	56.72
2133.00	-46.63	3.94	-42.69	H	61.75
2844.00	-41.79	5.04	-36.75	H	55.82
3555.00	-49.01	6.25	-42.76	H	61.82
4266.00	-80.11	7.25	-72.86	H	91.92
4977.00	-79.76	7.94	-71.82	H	90.89

Table 6-8. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 19 of 101	

Band 17 Radiated Spurious Measurements (continued)
§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation with WCC



OPERATING FREQUENCY: 711.00 MHz
 MEASURED OUTPUT POWER: 10.65 dBm = 0.012 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 23.65 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1422.00	-51.68	3.73	-47.95	H	58.60
2133.00	-51.09	3.94	-47.15	H	57.80
2844.00	-49.45	5.04	-44.41	H	55.06
3555.00	-52.72	6.25	-46.47	H	57.12
4266.00	-80.11	7.25	-72.86	H	83.51
4977.00	-79.76	7.94	-71.82	H	82.47

Table 6-9. Radiated Spurious Data with WCC

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna. The unit was tested with the wireless charging battery cover. The handset was placed on the representative charging pad.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 20 of 101	

6.5 Band 5 Radiated Spurious Emissions

§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 826.50 MHz
 MEASURED OUTPUT POWER: 20.98 dBm = 0.125 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.98 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1653.00	-48.48	2.50	-45.98	H	66.96
2479.50	-30.35	2.82	-27.53	H	48.51
3306.00	-80.14	5.52	-74.62	H	95.60
4132.50	-51.07	7.08	-43.98	H	64.96
4959.00	-79.75	7.91	-71.84	H	92.82
5785.50	-77.41	8.51	-68.90	H	89.88

Table 6-10. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 21 of 101	

Band 5 Radiated Spurious Measurements (continued)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 836.50 MHz
 MEASURED OUTPUT POWER: 20.04 dBm = 0.101 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.04 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.00	-51.03	2.34	-48.69	H	68.74
2509.50	-32.14	2.84	-29.30	H	49.35
3346.00	-80.33	5.64	-74.69	H	94.73
4182.50	-54.05	7.14	-46.91	H	66.95
5019.00	-79.72	7.97	-71.76	H	91.80
5855.50	-77.08	8.46	-68.62	H	88.66

Table 6-11. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 22 of 101	

Band 5 Radiated Spurious Measurements (continued)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 846.50 MHz
 MEASURED OUTPUT POWER: 19.27 dBm = 0.085 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.27 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.00	-50.37	2.18	-48.19	H	67.46
2539.50	-32.98	3.04	-29.93	H	49.20
3386.00	-80.52	5.76	-74.75	H	94.02
4232.50	-53.27	7.20	-46.06	H	65.33
5079.00	-79.62	8.00	-71.62	H	90.89
5925.50	-76.76	8.42	-68.33	H	87.60

Table 6-12. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 23 of 101	

Band 5 Radiated Spurious Measurements (continued)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation with WCC



OPERATING FREQUENCY: 826.50 MHz
 MEASURED OUTPUT POWER: 16.43 dBm = 0.044 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 29.43 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1653.00	-52.40	2.50	-49.90	H	66.33
2479.50	-30.29	2.82	-27.47	H	43.90
3306.00	-80.14	5.52	-74.62	H	91.05
4132.50	-52.44	7.08	-45.35	H	61.78
4959.00	-79.75	7.91	-71.84	H	88.27
5785.50	-77.41	8.51	-68.90	H	85.33

Table 6-13. Radiated Spurious Data with WCC

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna. The unit was tested with the wireless charging battery cover. The handset was placed on the representative charging pad.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 24 of 101	

6.6 Band 4 Radiated Spurious Emissions
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1712.50 MHz
 MEASURED OUTPUT POWER: 24.16 dBm = 0.261 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.16 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3425.00	-54.53	8.09	-46.43	H	70.59
5137.50	-50.03	10.21	-39.83	H	63.99
6850.00	-81.38	11.31	-70.07	H	94.23
8562.50	-81.69	13.02	-68.67	H	92.83
10275.00	-78.54	13.01	-65.53	H	89.69
11987.50	-76.46	13.21	-63.25	H	87.42

Table 6-14. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 25 of 101	

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1732.50 MHz
 MEASURED OUTPUT POWER: 22.64 dBm = 0.184 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.64 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-56.70	8.26	-48.43	H	71.07
5197.50	-51.82	10.26	-41.56	H	64.20
6930.00	-81.45	11.42	-70.03	H	92.67
8662.50	-81.62	13.07	-68.56	H	91.19
10395.00	-78.48	13.12	-65.36	H	88.00
12127.50	-76.14	13.25	-62.88	H	85.52

Table 6-15. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 26 of 101	

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1752.50 MHz
 MEASURED OUTPUT POWER: 23.56 dBm = 0.227 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.56 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3505.00	-59.04	8.40	-50.64	H	74.21
5257.50	-51.63	10.32	-41.31	H	64.88
7010.00	-81.49	11.51	-69.97	H	93.54
8762.50	-81.54	13.11	-68.44	H	92.00
10515.00	-78.32	13.20	-65.12	H	88.68
12267.50	-75.80	13.31	-62.49	H	86.05

Table 6-16. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 27 of 101	

Band 4 Radiated Spurious Emissions (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation with WCC



OPERATING FREQUENCY: 1712.50 MHz
 MEASURED OUTPUT POWER: 23.87 dBm = 0.244 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.87 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3425.00	-43.25	8.09	-35.15	H	59.02
5137.50	-54.38	10.21	-44.18	H	68.05
6850.00	-81.38	11.31	-70.07	H	93.94
8562.50	-81.69	13.02	-68.67	H	92.54
10275.00	-78.54	13.01	-65.53	H	89.40
11987.50	-76.46	13.21	-63.25	H	87.12

Table 6-17. Radiated Spurious Data with WCC

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna. The unit was tested with the wireless charging battery cover. The handset was placed on the representative charging pad.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 28 of 101	

6.7 Band 2 Radiated Spurious Emissions

§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1855.00 MHz
 MEASURED OUTPUT POWER: 25.09 dBm = 0.323 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.09 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3710.00	-45.67	8.40	-37.27	H	62.36
5565.00	-48.75	10.63	-38.13	H	63.21
7420.00	-55.98	11.84	-44.15	H	69.24
9275.00	-80.98	13.29	-67.69	H	92.78
11130.00	-48.61	13.50	-35.11	H	60.20
12985.00	-75.46	13.68	-61.79	H	86.87

Table 6-18. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 29 of 101	

Band 2 Radiated Spurious Measurements (continued)
§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1880.00 MHz
 MEASURED OUTPUT POWER: 23.12 dBm = 0.205 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.12 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-45.66	8.42	-37.24	H	60.36
5640.00	-48.77	10.66	-38.12	H	61.24
7520.00	-57.70	11.92	-45.78	H	68.90
9400.00	-80.74	13.24	-67.50	H	90.62
11280.00	-50.90	13.49	-37.41	H	60.53
13160.00	-75.34	13.83	-61.51	H	84.63

Table 6-19. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 30 of 101	

Band 2 Radiated Spurious Measurements (continued)
§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1905.00 MHz
 MEASURED OUTPUT POWER: 23.43 dBm = 0.220 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.43 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3810.00	-49.40	8.55	-40.85	H	64.28
5715.00	-52.36	10.69	-41.68	H	65.11
7620.00	-55.90	12.05	-43.86	H	67.29
9525.00	-80.46	13.20	-67.26	H	90.69
11430.00	-51.57	13.43	-38.14	H	61.57
13335.00	-75.25	14.00	-61.24	H	84.67

Table 6-20. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 31 of 101	

Band 2 Radiated Spurious Measurements (continued)
§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation with WCC



OPERATING FREQUENCY: 1855.00 MHz
 MEASURED OUTPUT POWER: 25.30 dBm = 0.339 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.30 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3710.00	-46.59	8.40	-38.19	H	63.49
5565.00	-52.64	10.63	-42.02	H	67.32
7420.00	-55.40	11.84	-43.57	H	68.87
9275.00	-80.98	13.29	-67.69	H	92.99
11130.00	-74.94	13.50	-61.44	H	86.74
12985.00	-75.46	13.68	-61.79	H	87.09

Table 6-21. Radiated Spurious Data with WCC

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported in the table above.
2. This unit was tested with its standard battery (Model: B600BU) that contains an embedded NFC antenna. The unit was tested with the wireless charging battery cover. The handset was placed on the representative charging pad.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 32 of 101	

6.8 Band 17 Frequency Stability Measurements

\$2.1055 \$22.355 \$27.5(c) \$27.54



OPERATING FREQUENCY: 710,000,000 Hz
 CHANNEL: 23090
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	710,000,008	8	0.0000011
100 %		- 30	710,000,017	17	0.0000024
100 %		- 20	709,999,970	-30	-0.0000042
100 %		- 10	710,000,009	9	0.0000013
100 %		0	709,999,978	-22	-0.0000031
100 %		+ 10	710,000,006	6	0.0000008
100 %		+ 20	709,999,980	-20	-0.0000028
100 %		+ 30	710,000,019	19	0.0000027
100 %		+ 40	710,000,002	2	0.0000003
100 %		+ 50	709,999,970	-30	-0.0000042
115 %		4.37	+ 20	710,000,004	4
BATT. ENDPOINT	3.20	+ 20	710,000,024	24	0.0000034

Table 6-22. Frequency Stability Data (Band 17)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 33 of 101	

Band 17 Frequency Stability Measurements (Cont'd)

§2.1055 §22.355 §27.5(c) §27.54

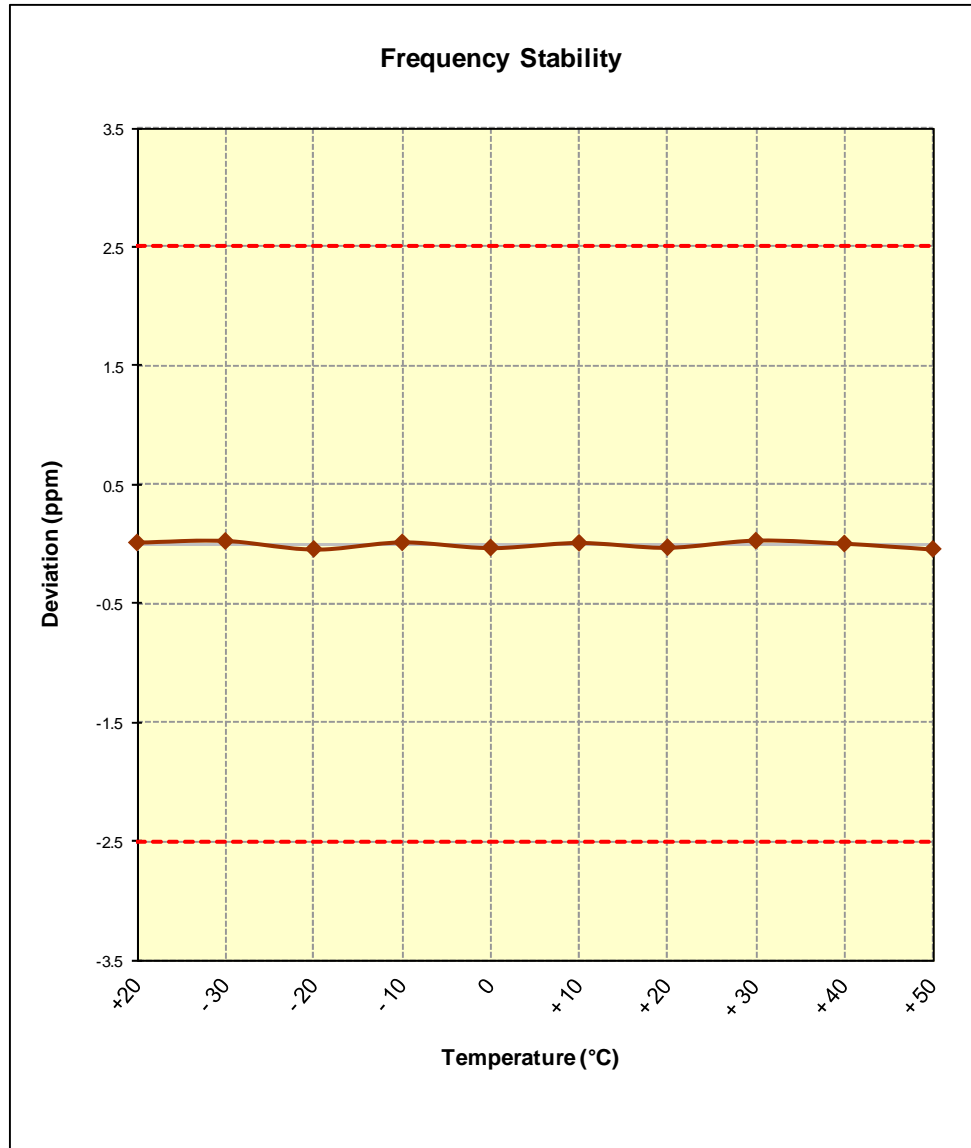




Figure 6-1. Frequency Stability Graph (Band 17)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 34 of 101	



6.9 Band 5 Frequency Stability Measurements

§2.1055 §22.355 §22.863 §22.905 RSS-132(4.3)

OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,500,024	24	0.0000029
100 %		- 30	836,499,998	-2	-0.0000002
100 %		- 20	836,499,993	-7	-0.0000008
100 %		- 10	836,499,985	-15	-0.0000018
100 %		0	836,499,981	-19	-0.0000023
100 %		+ 10	836,499,989	-11	-0.0000013
100 %		+ 20	836,500,006	6	0.0000007
100 %		+ 30	836,499,986	-14	-0.0000017
100 %		+ 40	836,499,989	-11	-0.0000013
100 %		+ 50	836,499,983	-17	-0.0000020
115 %		4.37	+ 20	836,499,977	-23
BATT. ENDPOINT	3.20	+ 20	836,500,008	8	0.0000010

Table 6-23. Frequency Stability Data (Band 5)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 35 of 101	

Band 5 Frequency Stability Measurements (Cont'd)

§2.1055 §22.355 §22.863 §22.905 RSS-132(4.3)

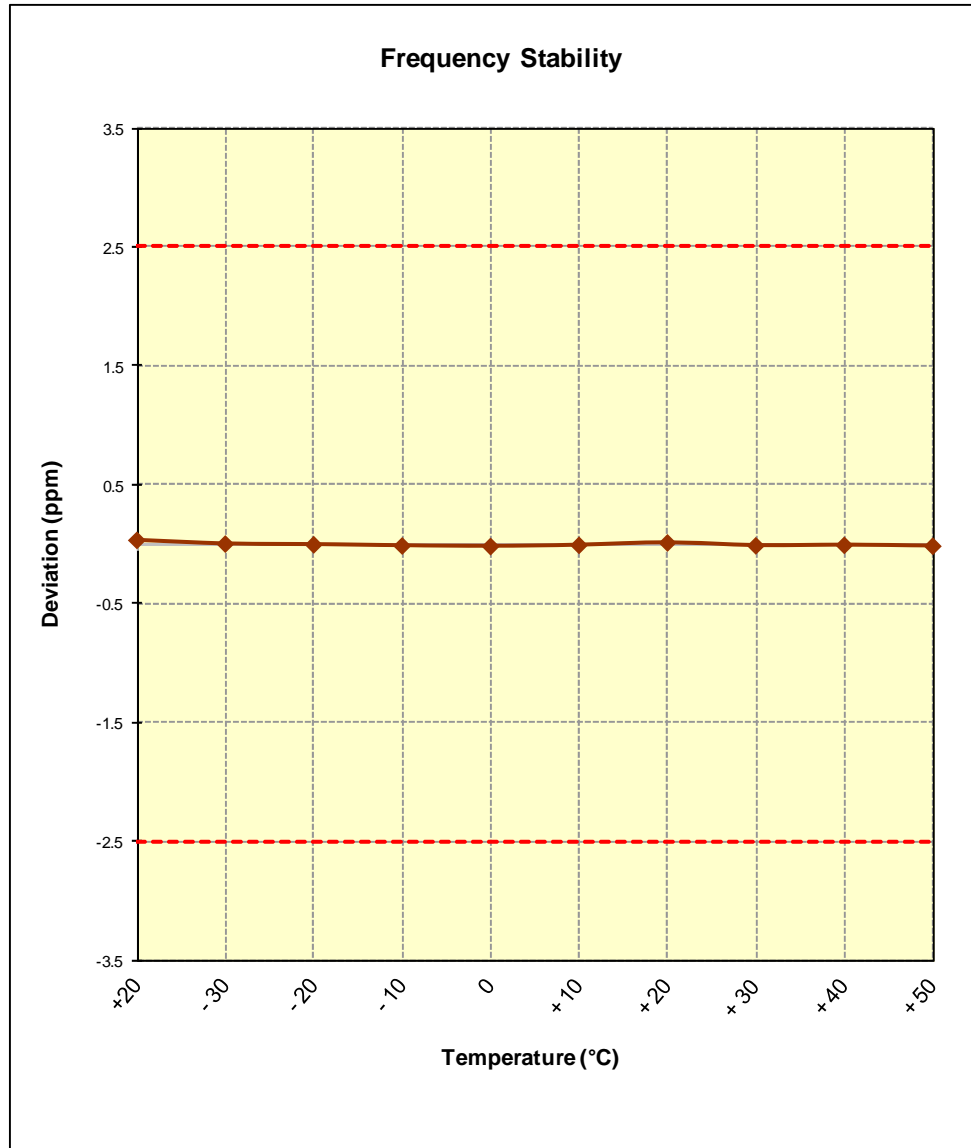




Figure 6-2. Frequency Stability Graph (Band 5)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 36 of 101

6.10 Band 4 Frequency Stability Measurements

§2.1055 §22.355 §27.5(h) §27.54 RSS-139(6.3)



OPERATING FREQUENCY: 1,732,500,000 Hz
 CHANNEL: 20175
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,982	-18	-0.0000010
100 %		- 30	1,732,499,941	-59	-0.0000034
100 %		- 20	1,732,499,963	-37	-0.0000021
100 %		- 10	1,732,499,958	-42	-0.0000024
100 %		0	1,732,500,058	58	0.0000033
100 %		+ 10	1,732,499,986	-14	-0.0000008
100 %		+ 20	1,732,500,021	21	0.0000012
100 %		+ 30	1,732,500,042	42	0.0000024
100 %		+ 40	1,732,500,030	30	0.0000017
100 %		+ 50	1,732,500,000	0	0.0000000
115 %	4.37	+ 20	1,732,499,974	-26	-0.0000015
BATT. ENDPOINT	3.20	+ 20	1,732,500,049	49	0.0000028

Table 6-24. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 37 of 101	

Band 4 Frequency Stability Measurements (Cont'd)

§2.1055 §22.355 §27.5(h) §27.54 RSS-139(6.3)






Figure 6-3. Frequency Stability Graph (Band 4)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 38 of 101	

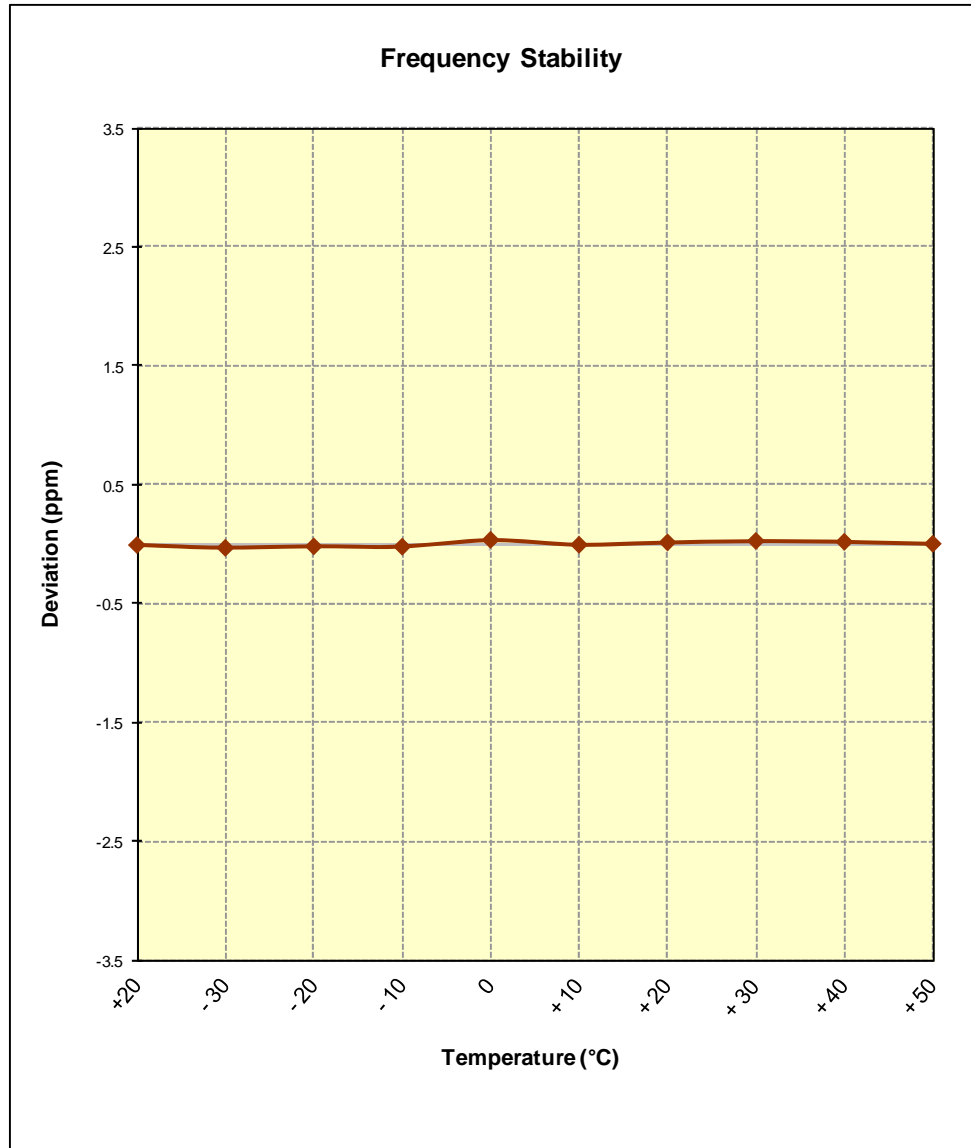6.11 Band 2 Frequency Stability Measurements
§2.1055 §22.355 §24.229 §24.235 RSS-133(6.3)



OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,880,000,025	25	0.0000013
100 %		- 30	1,880,000,040	40	0.0000021
100 %		- 20	1,880,000,038	38	0.0000020
100 %		- 10	1,879,999,964	-36	-0.0000019
100 %		0	1,880,000,019	19	0.0000010
100 %		+ 10	1,879,999,948	-52	-0.0000028
100 %		+ 20	1,879,999,999	-1	-0.0000001
100 %		+ 30	1,880,000,039	39	0.0000021
100 %		+ 40	1,880,000,025	25	0.0000013
100 %		+ 50	1,879,999,989	-11	-0.0000006
115 %		4.37	+ 20	1,880,000,056	56
BATT. ENDPOINT	3.20	+ 20	1,879,999,960	-40	-0.0000021

Table 6-25. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 39 of 101	

Band 2 Frequency Stability Measurements (Cont'd)

§2.1055 §22.355 §22.229 §24.235 RSS-133(6.3)

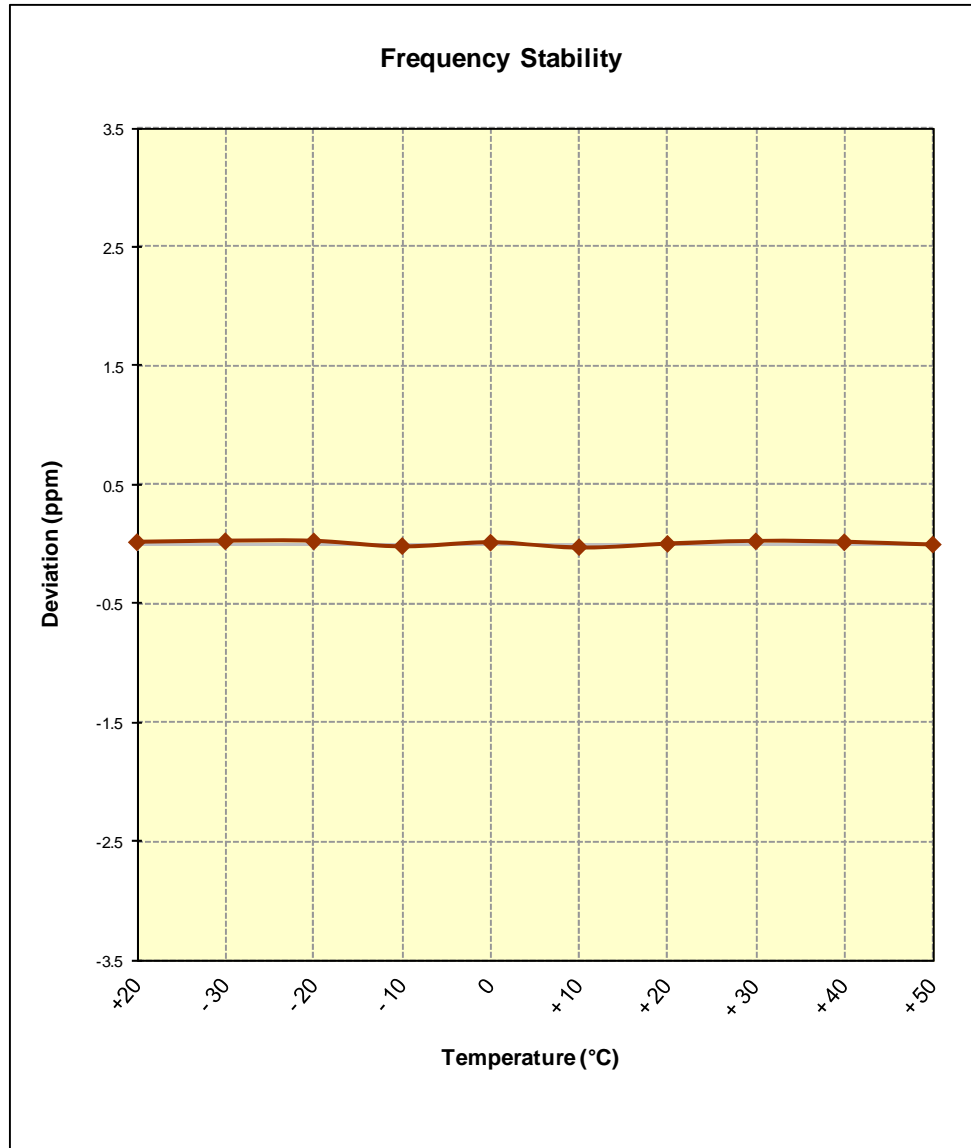


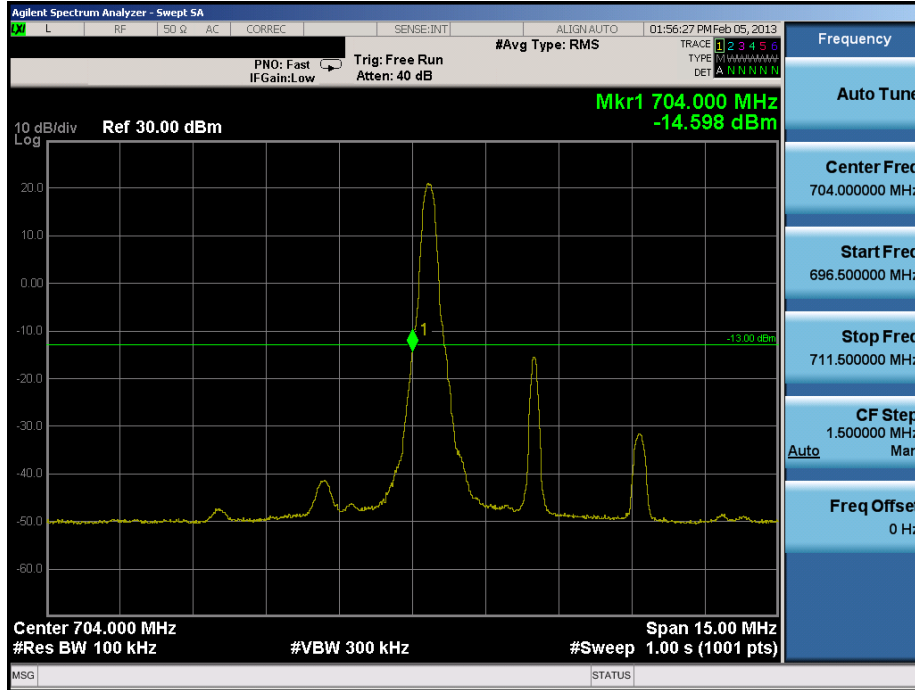


Figure 6-4. Frequency Stability Graph (Band 2)


FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 40 of 101

7.0 BAND 17 PLOTS OF EMISSIONS

Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.




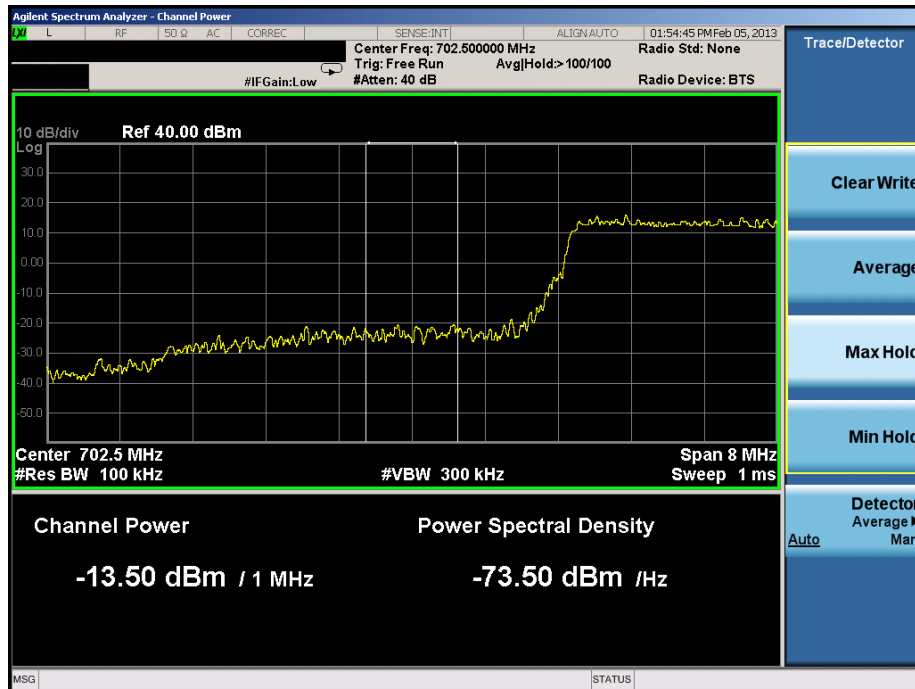Plot 7-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 1, RB Offset 0)




Plot 7-2. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 41 of 101

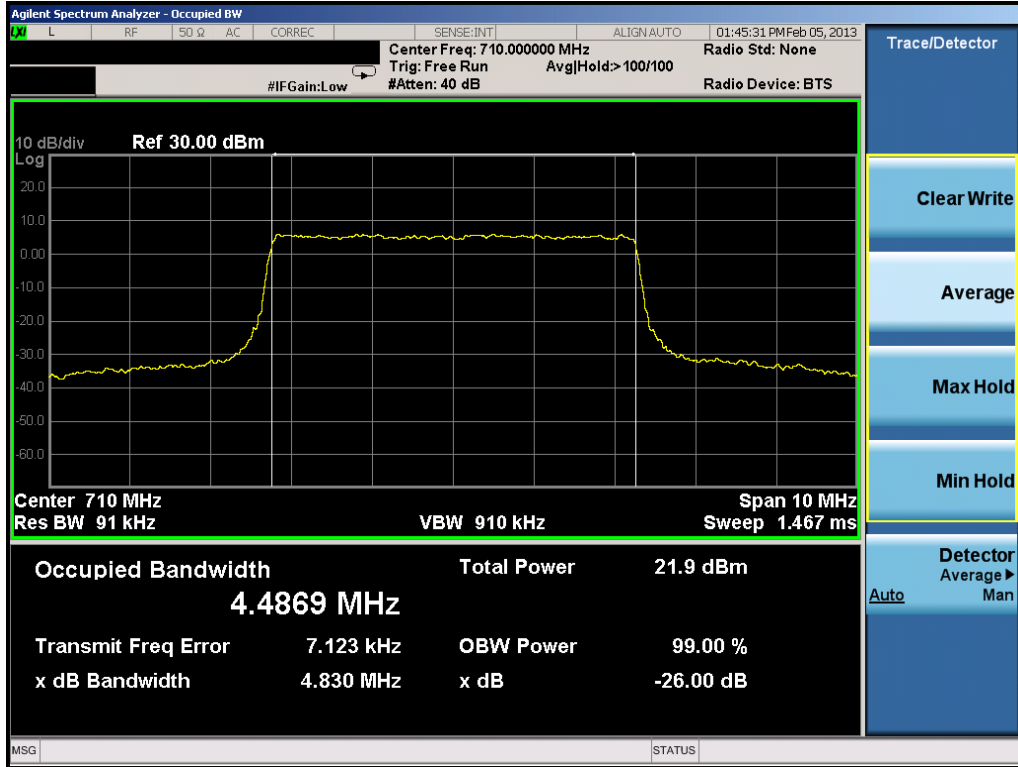


Plot 7-3. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

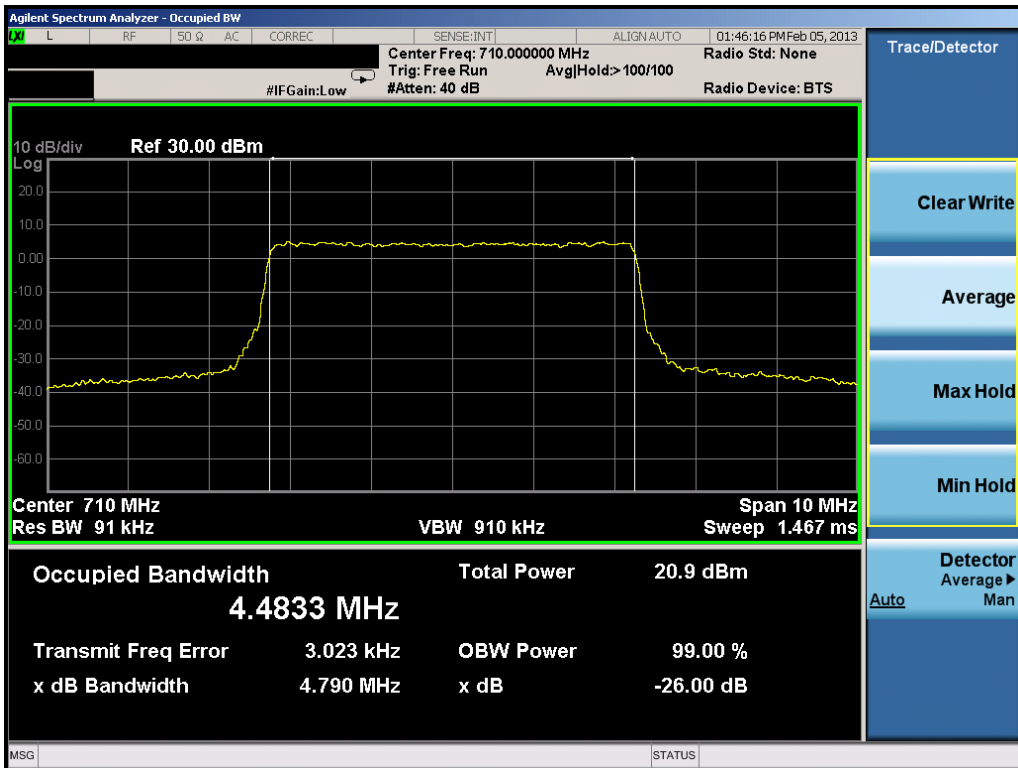


Plot 7-4. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 42 of 101

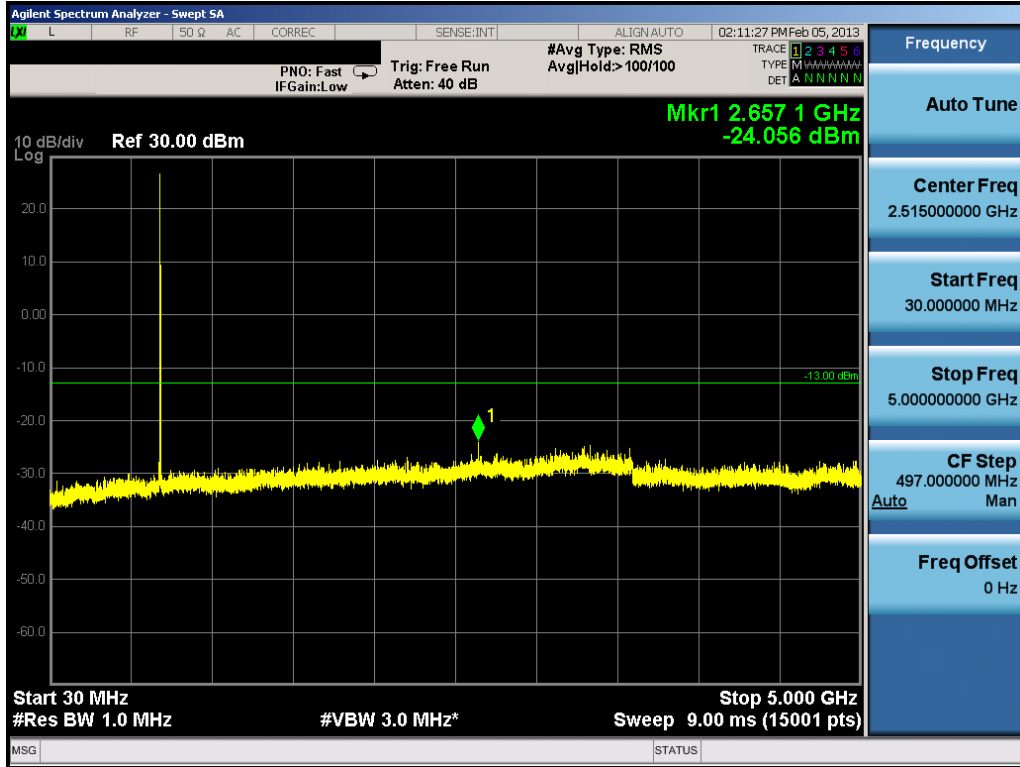


Plot 7-5. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

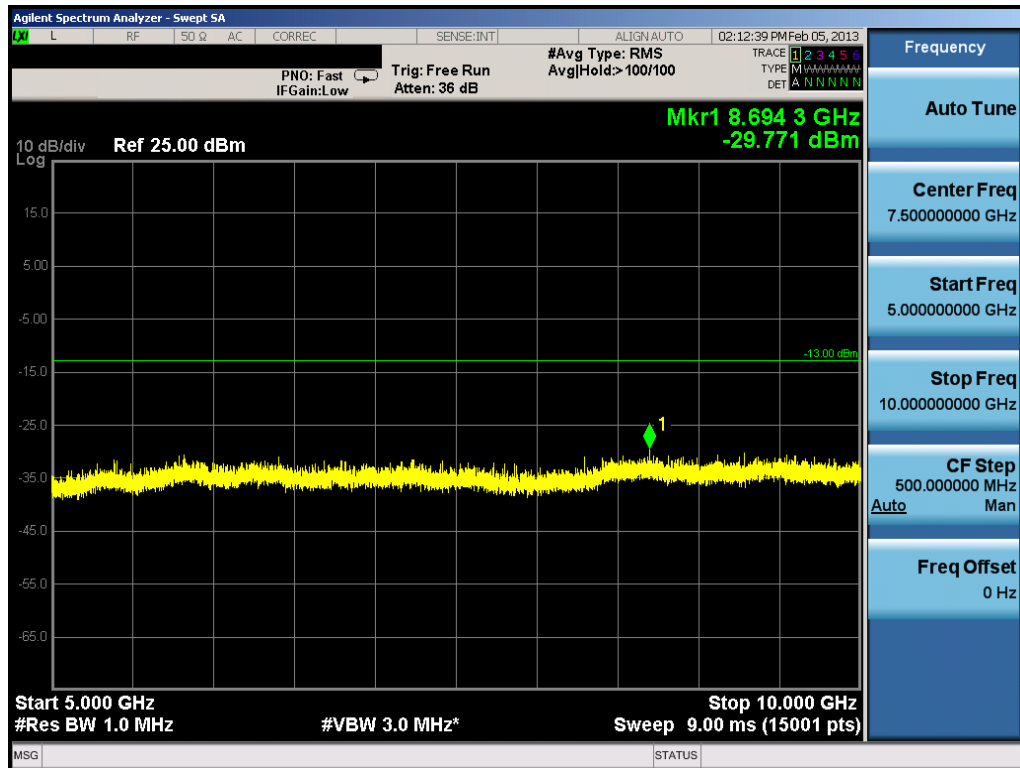


Plot 7-6. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 43 of 101

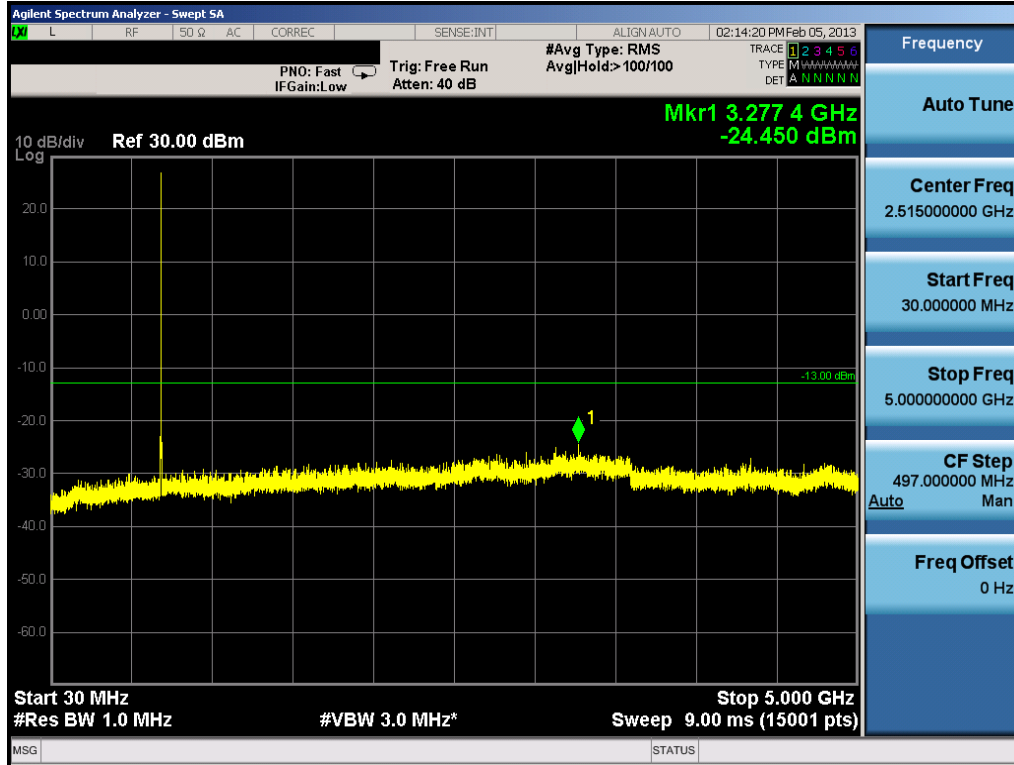


Plot 7-7. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

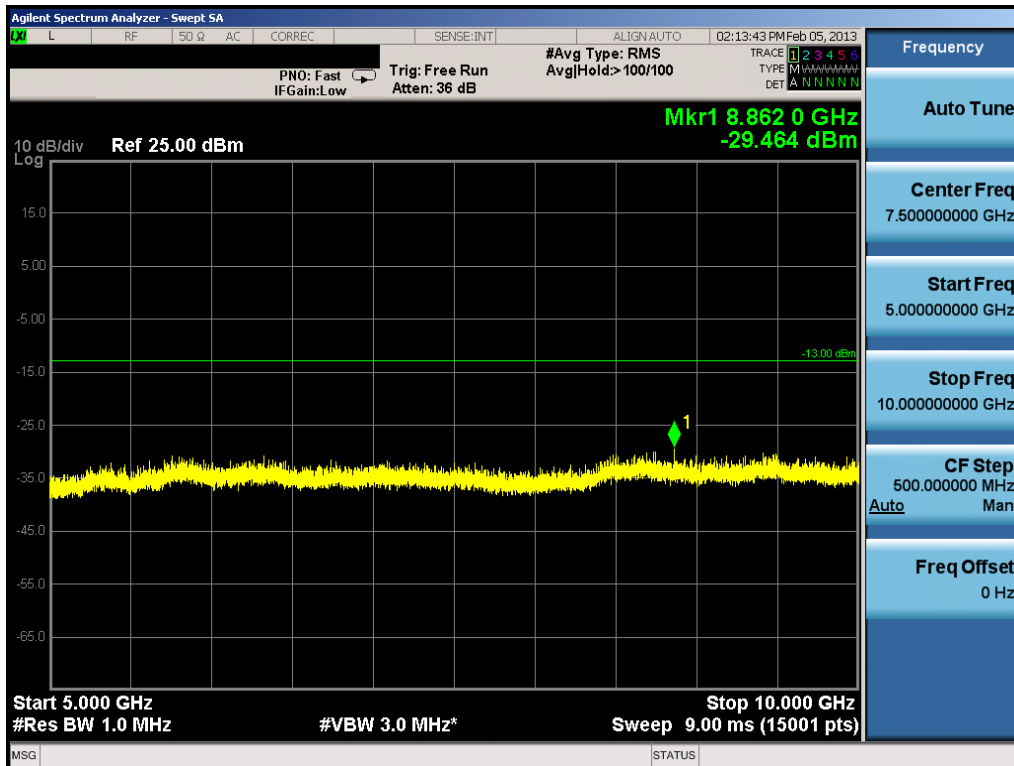


Plot 7-8. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 44 of 101

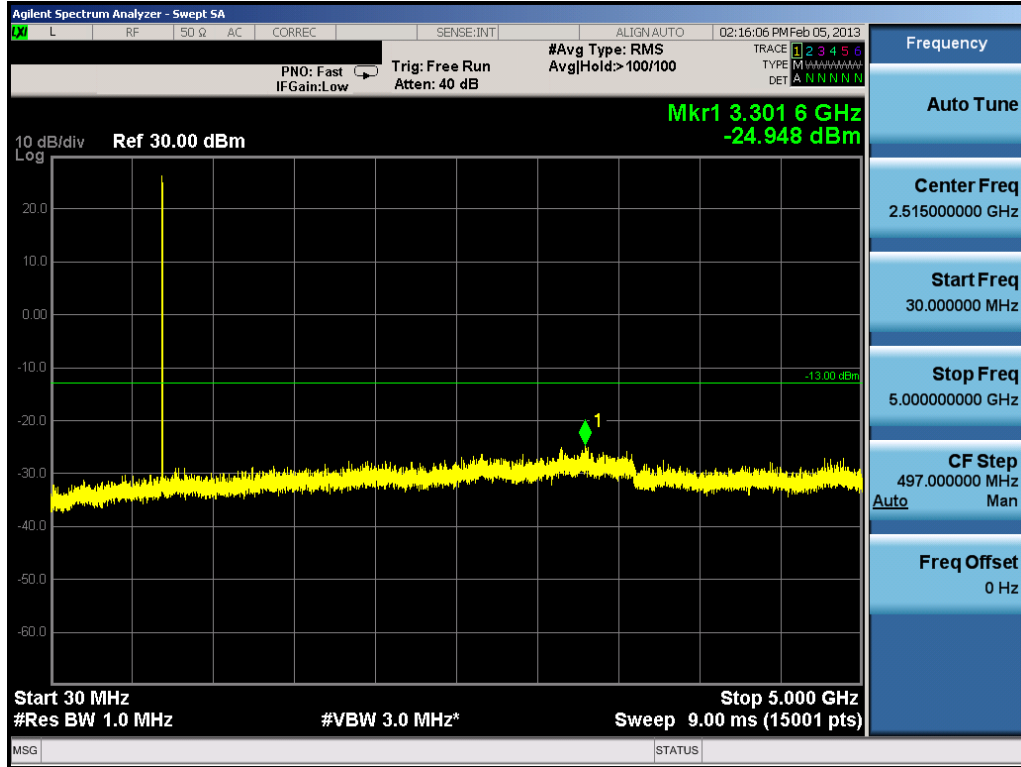


Plot 7-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

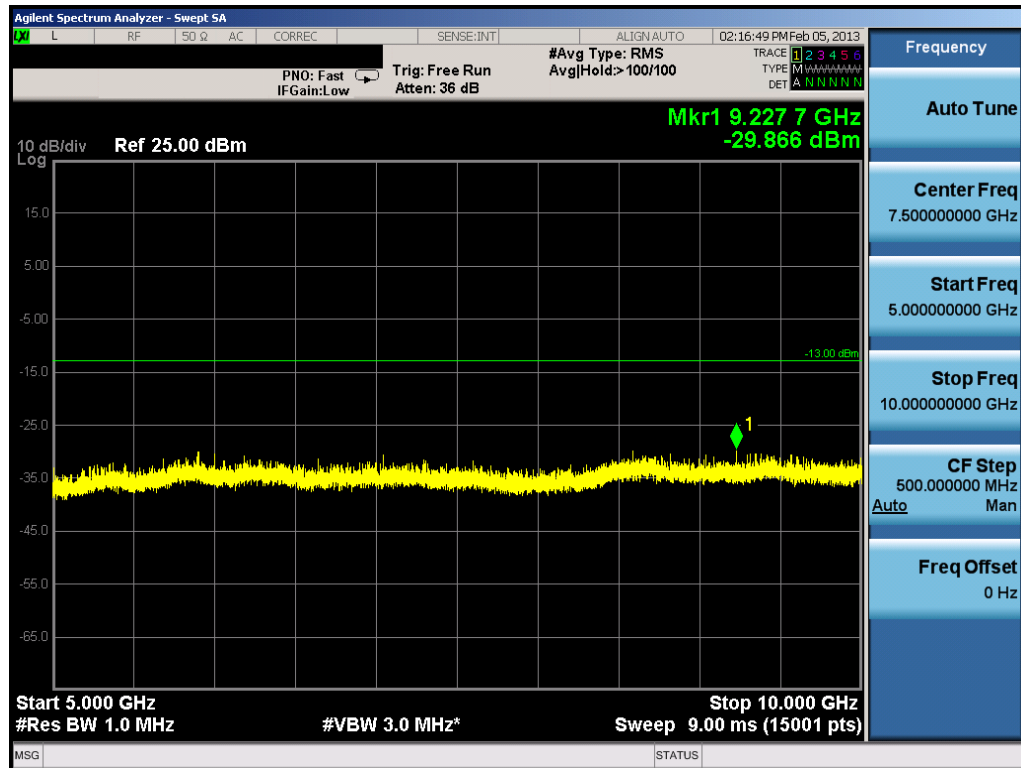

Plot 7-10. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 45 of 101

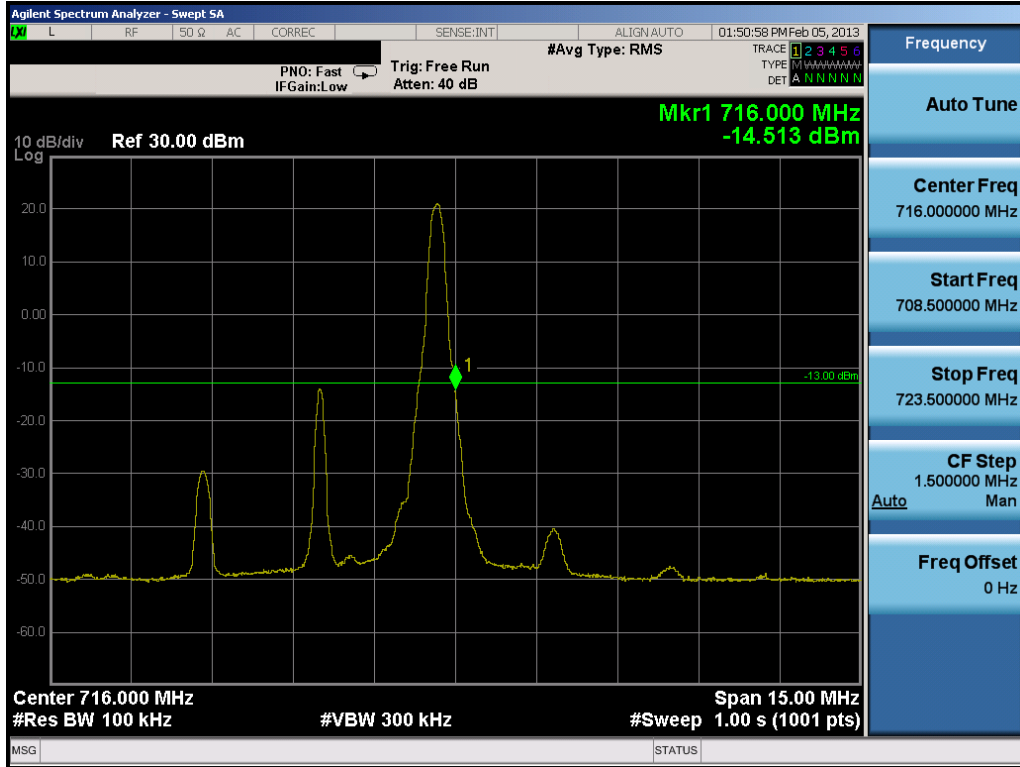


Plot 7-11. Upper Band Edge Plot (5.0MHz QPSK – RB Size 1, RB Offset 24)



Plot 7-12. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 46 of 101

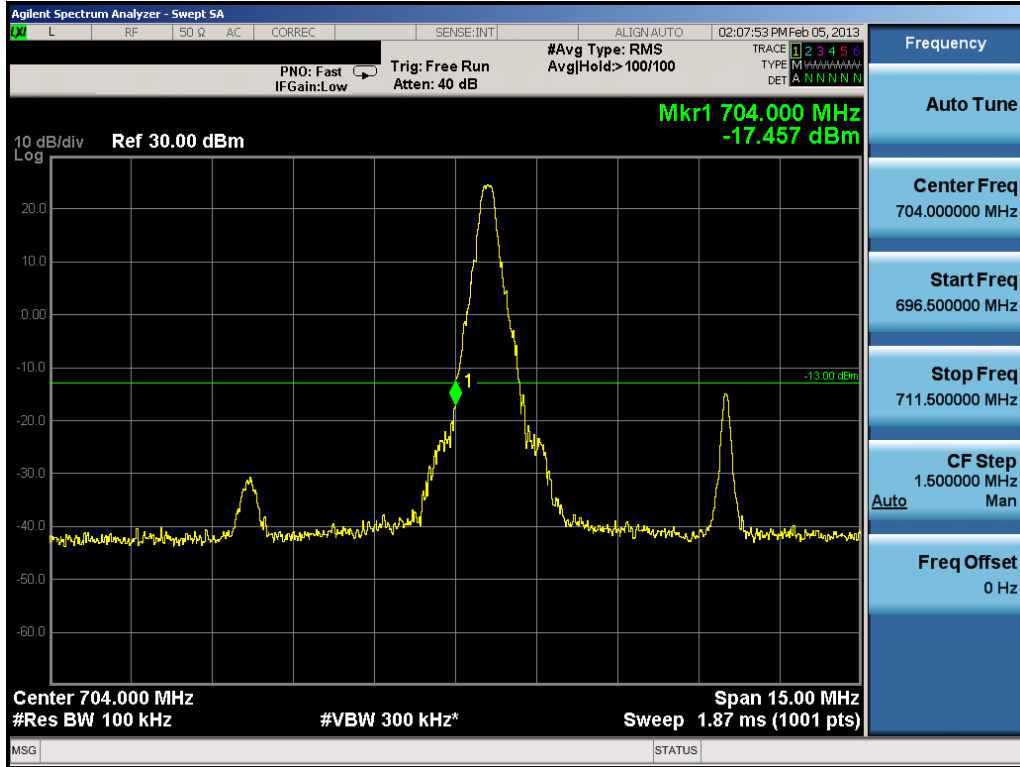


Plot 7-13. Lower Band Edge Plot (10.0MHz QPSK – RB Size 1, RB Offset 0)




Plot 7-14. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 47 of 101

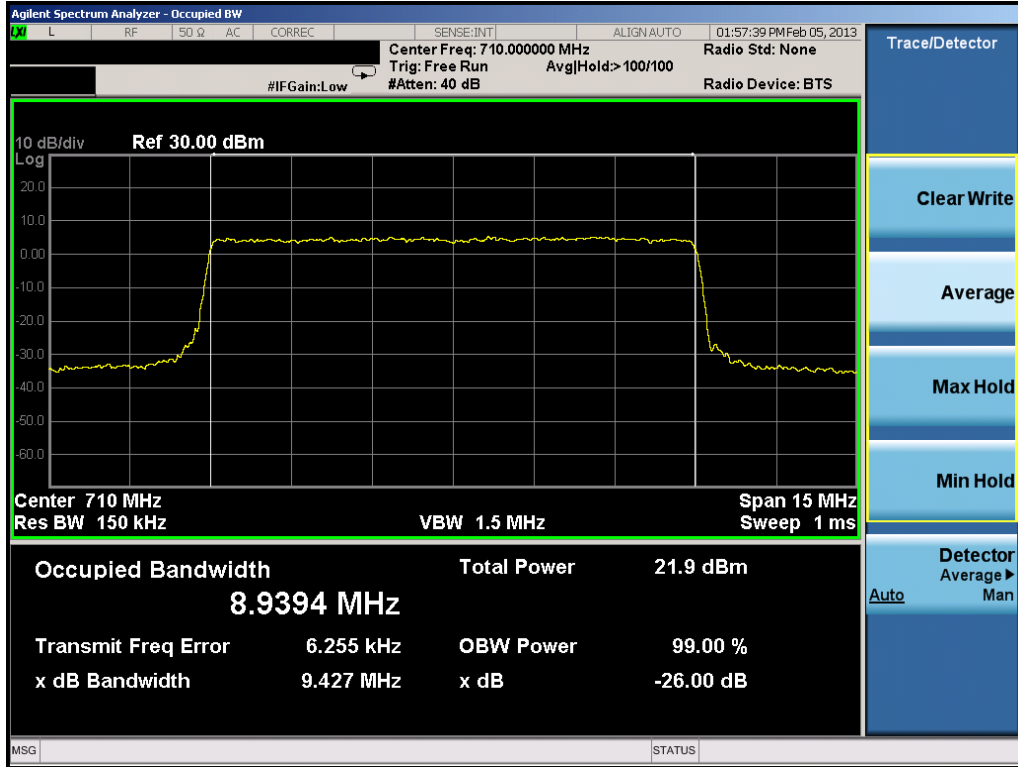


Plot 7-15. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

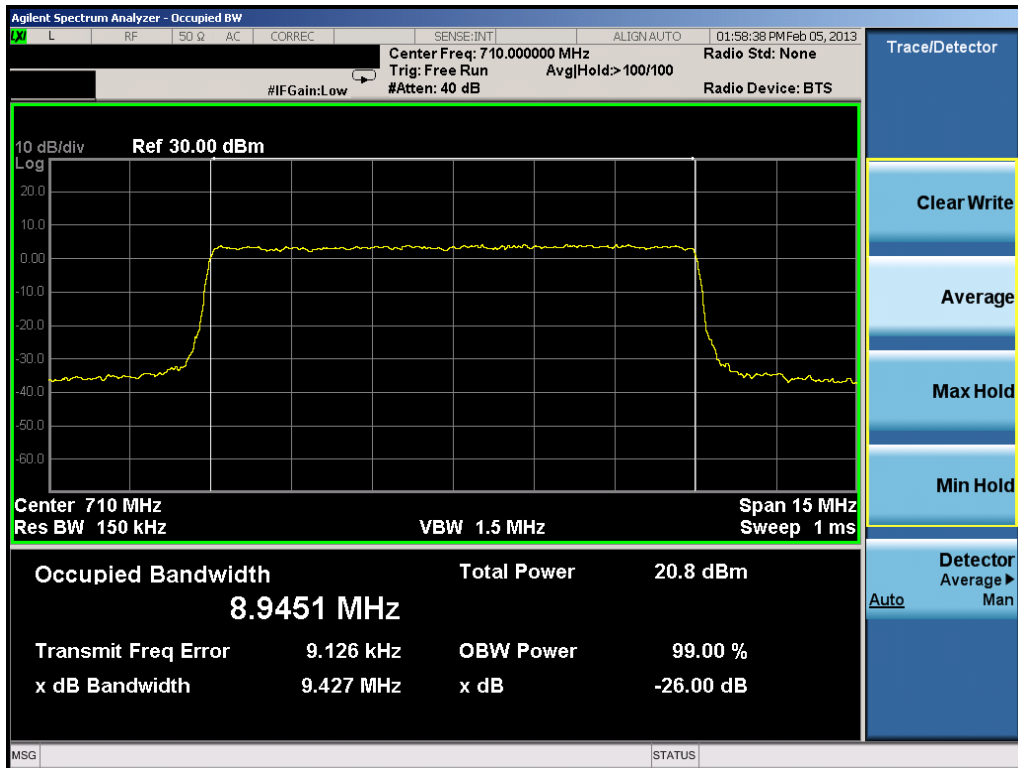

Plot 7-16. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 48 of 101

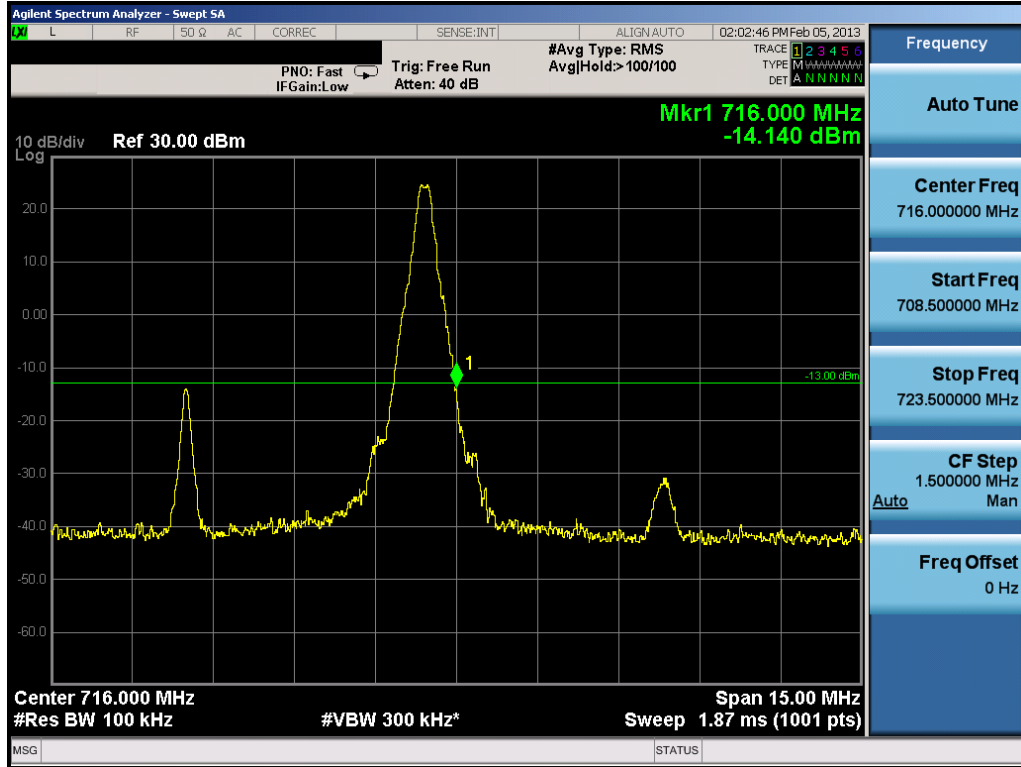

Plot 7-17. Upper Band Edge Plot (10.0MHz QPSK – RB Size 1, RB Offset 49)




Plot 7-18. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)


FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 49 of 101

8.0 BAND 5 PLOTS OF EMISSIONS

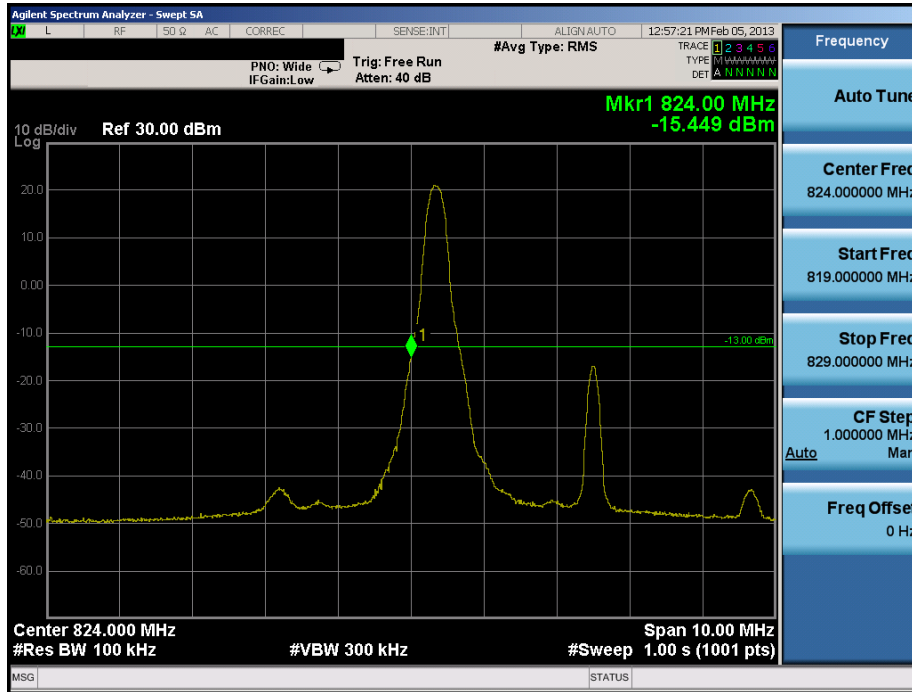Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.




Plot 8-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 1, RB Offset 0)

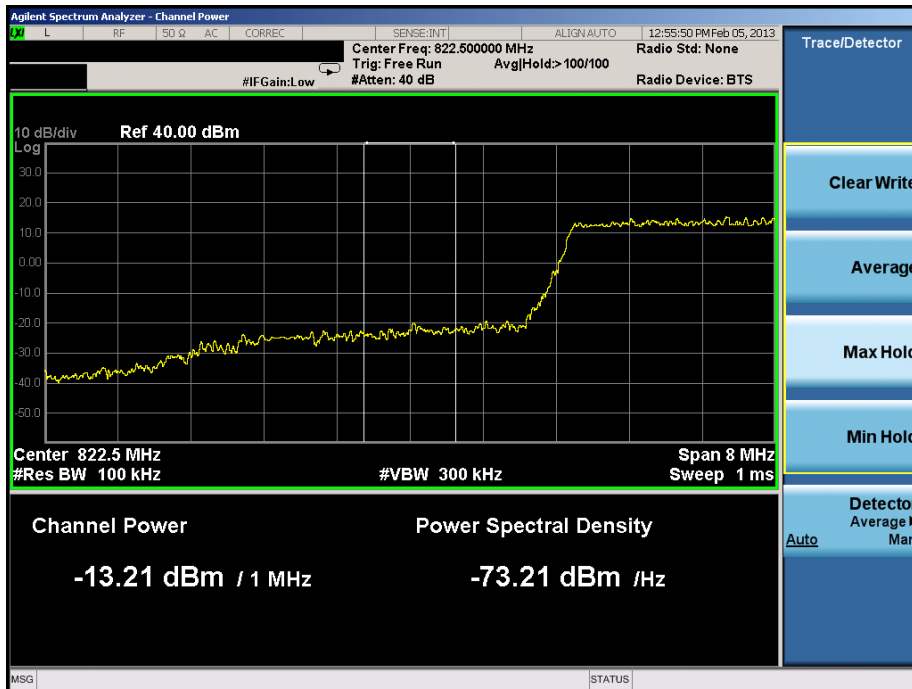


Plot 8-2. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 50 of 101

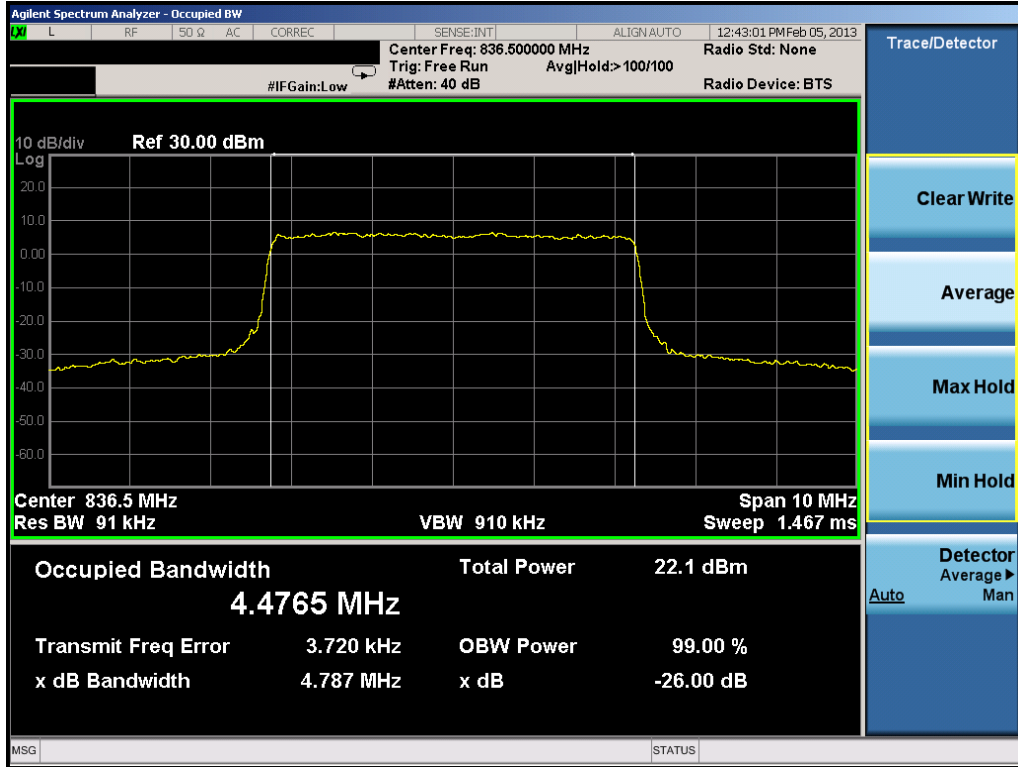


Plot 8-3. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

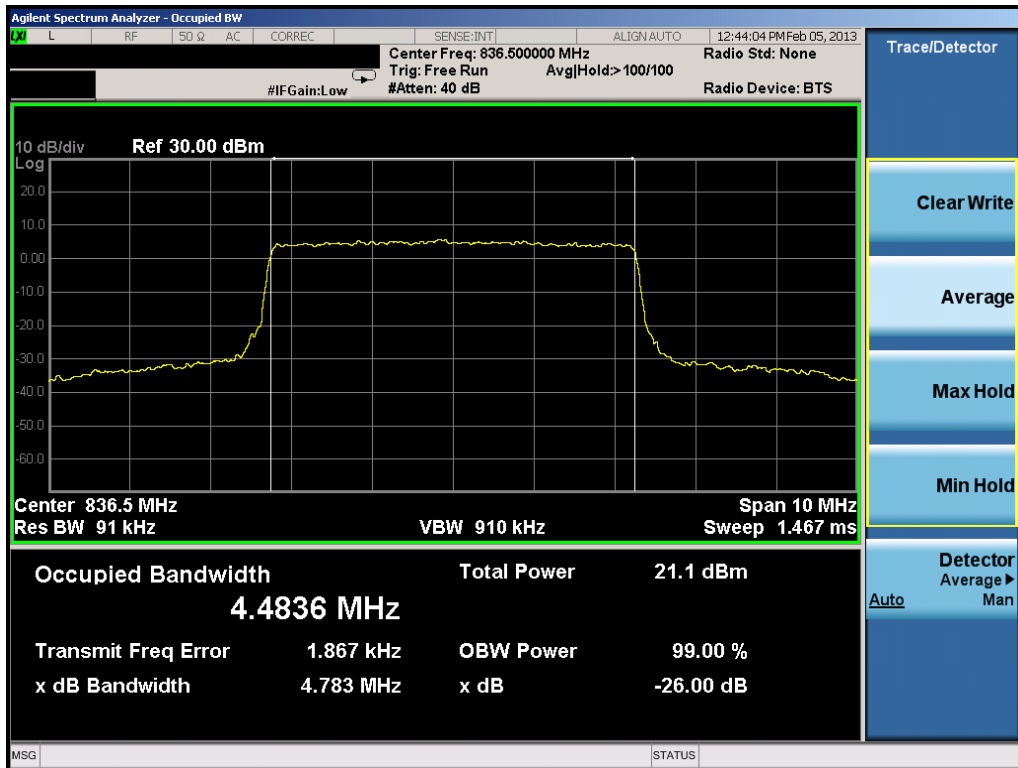


Plot 8-4. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 51 of 101

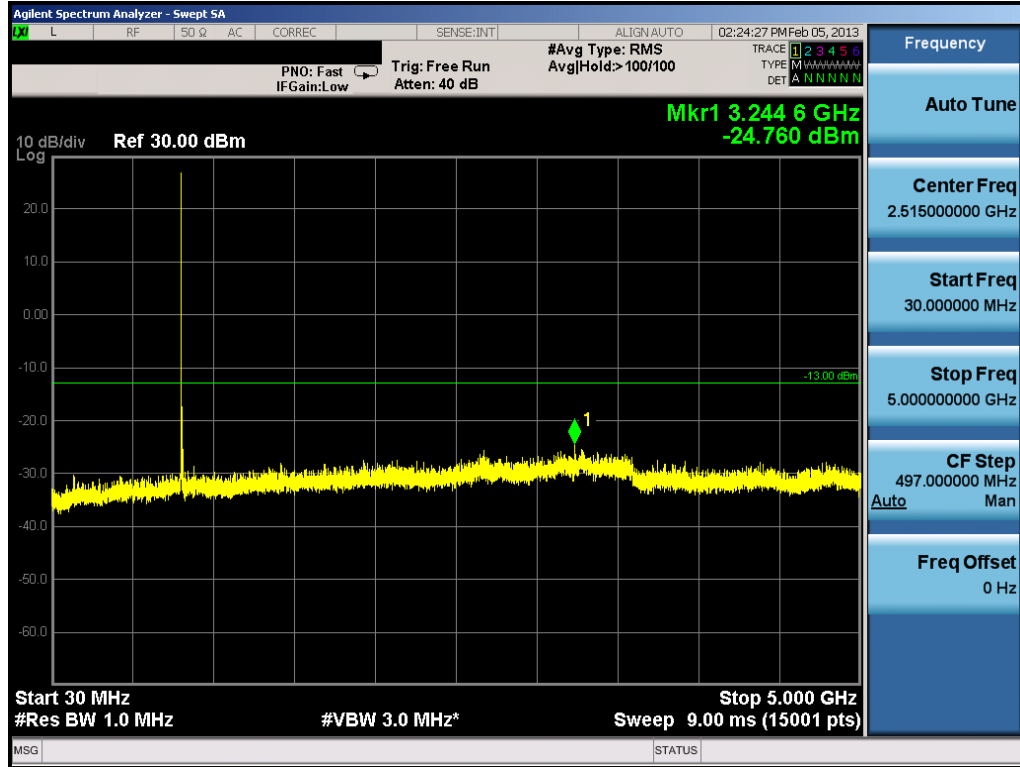


Plot 8-5. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

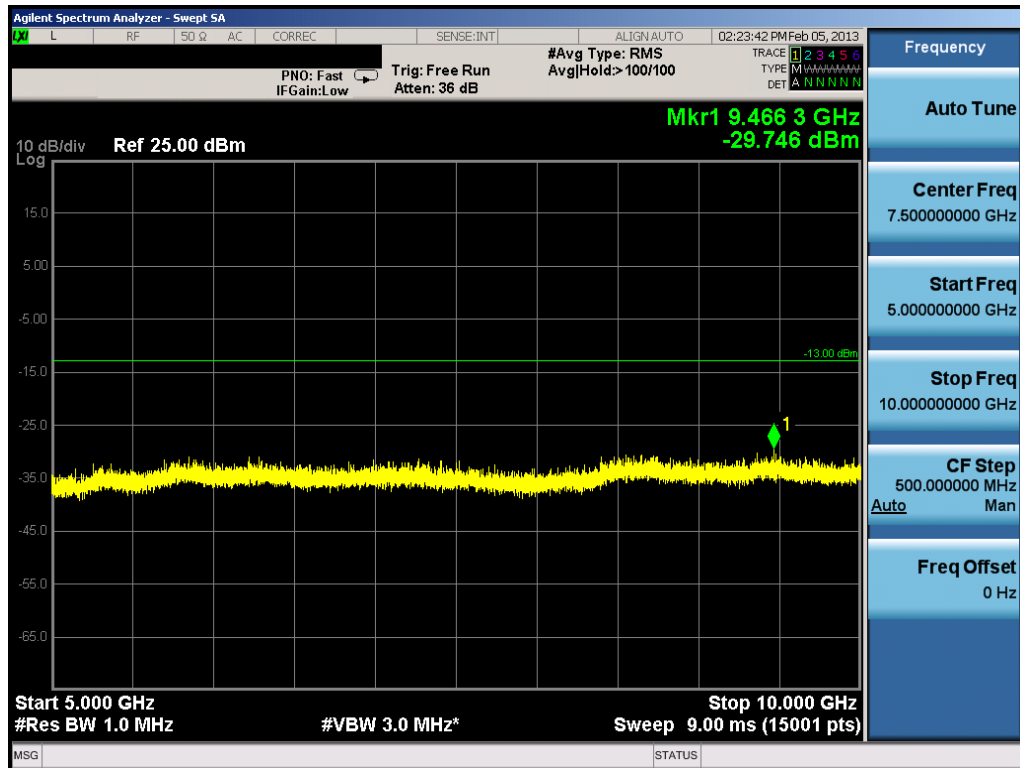


Plot 8-6. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 52 of 101

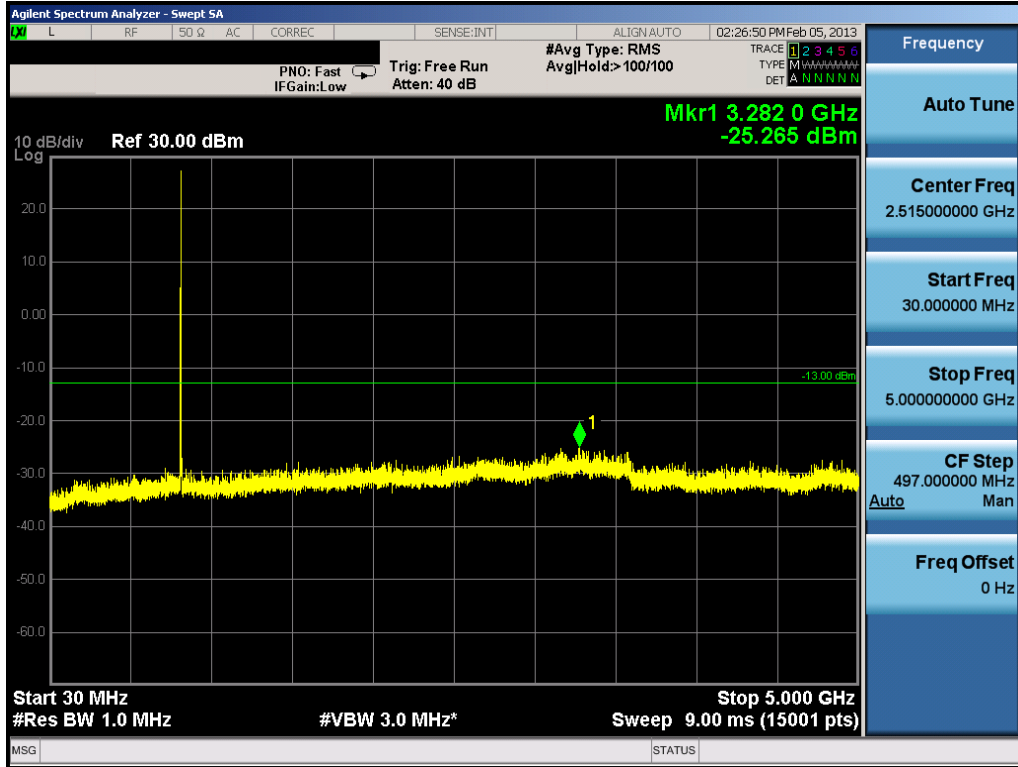


Plot 8-7. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

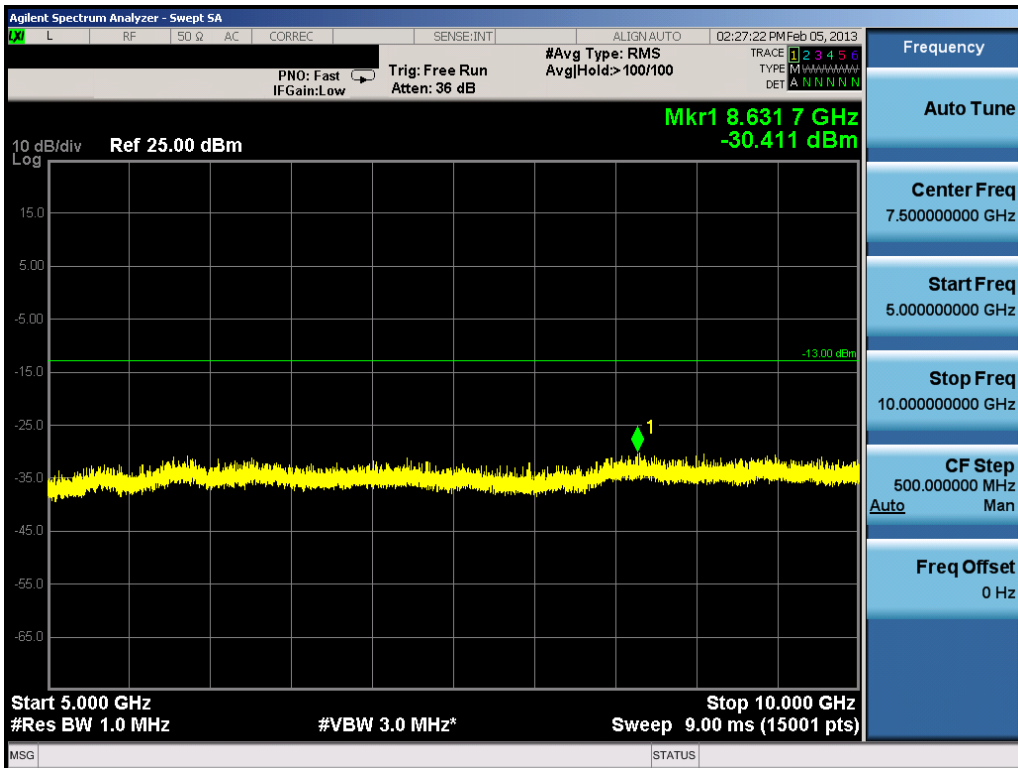


Plot 8-8. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 53 of 101

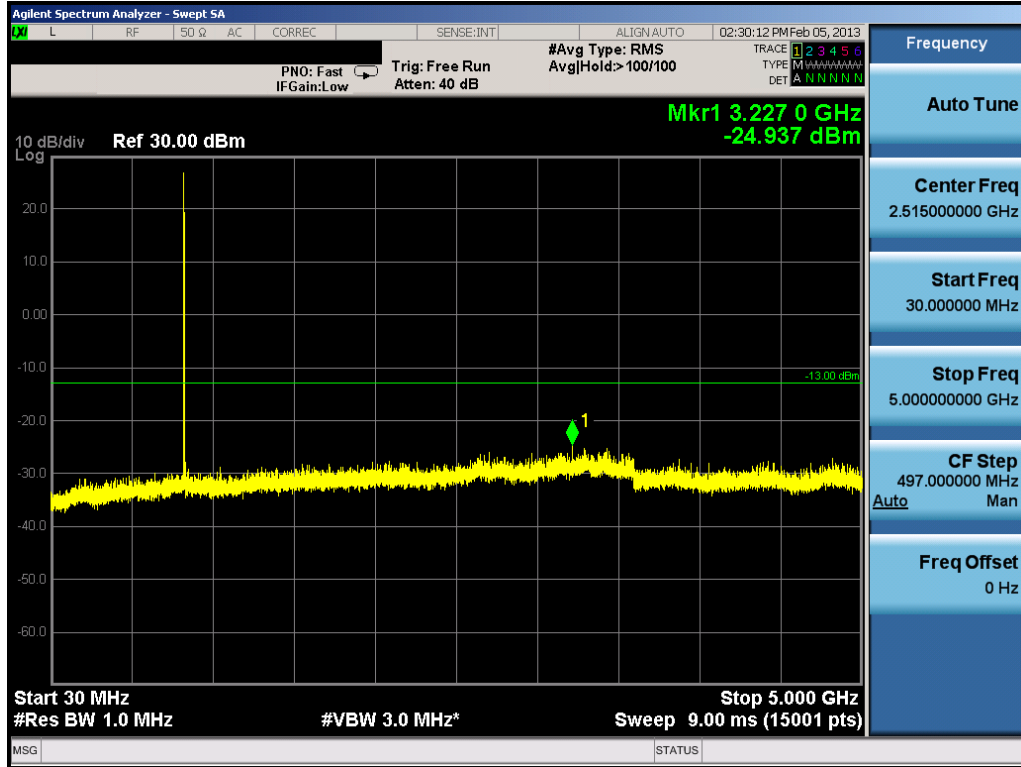


Plot 8-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

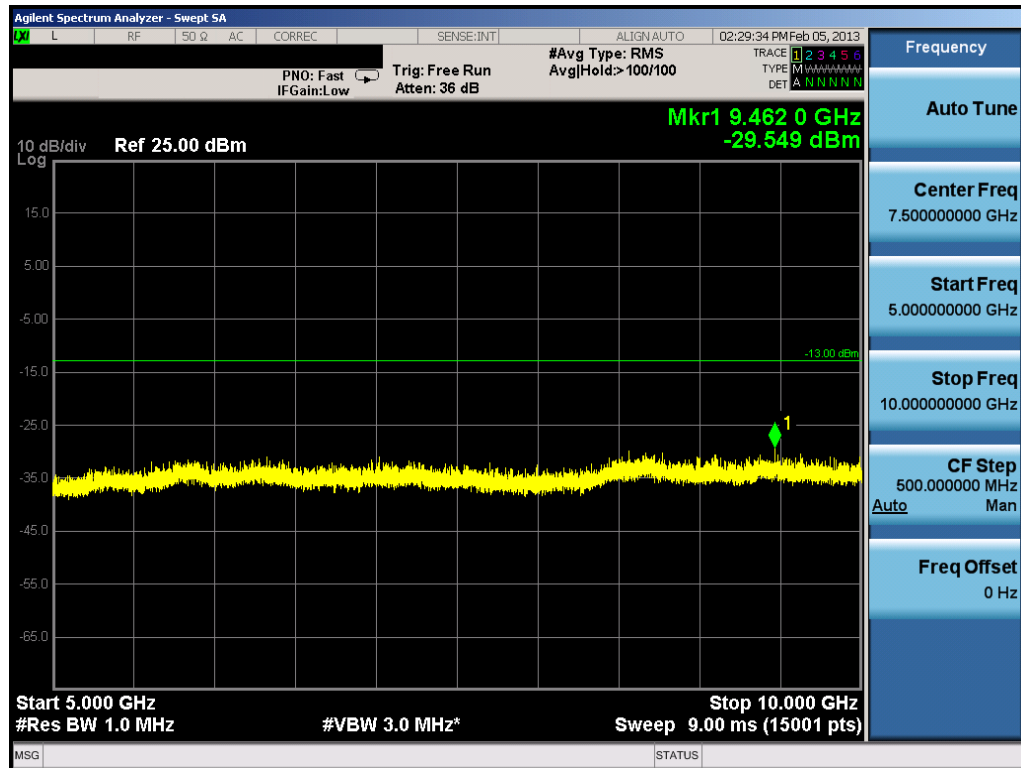


Plot 8-10. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 54 of 101

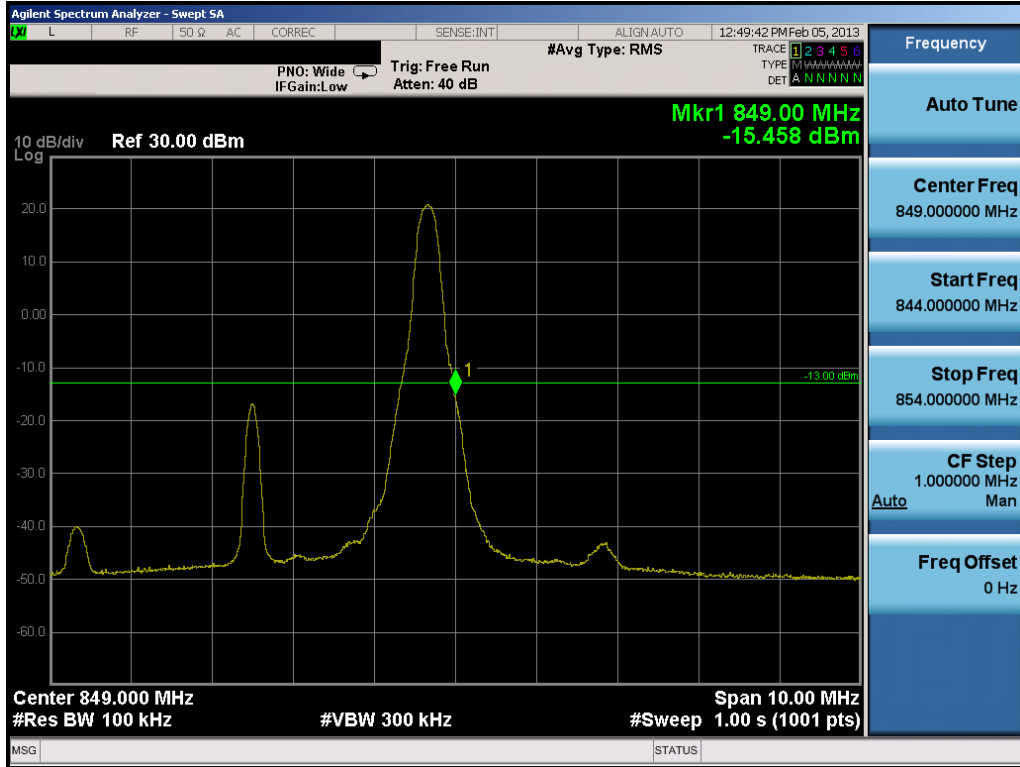


Plot 8-11. Upper Band Edge Plot (5.0MHz QPSK – RB Size 1, RB Offset 24)

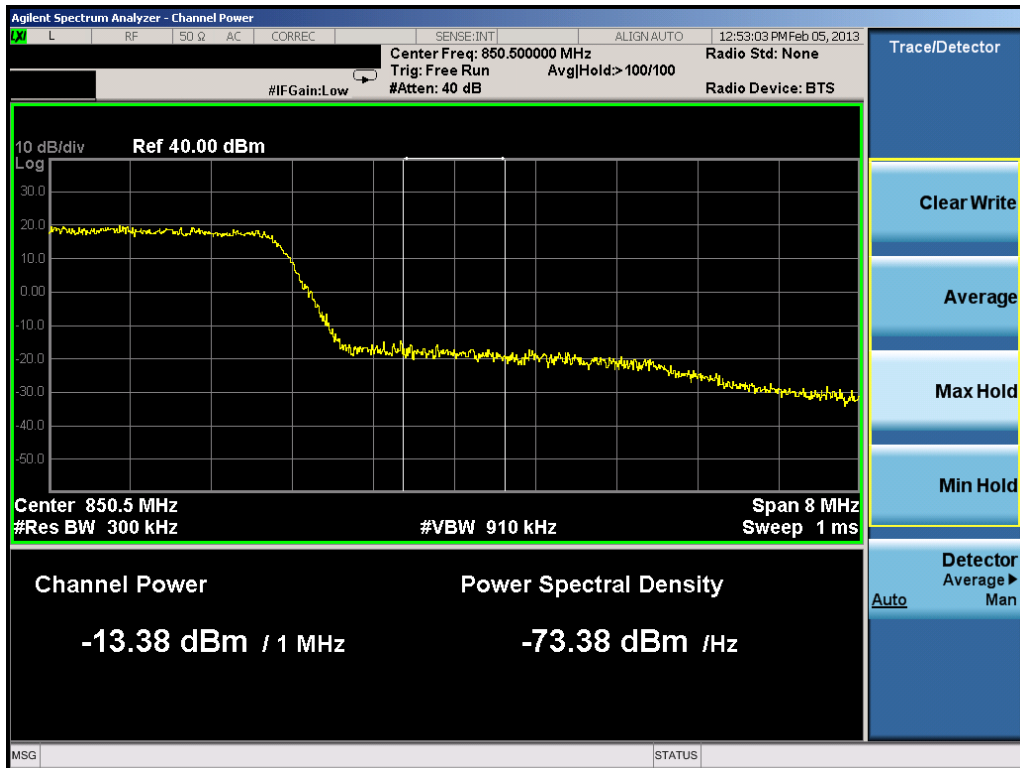


Plot 8-12. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 55 of 101

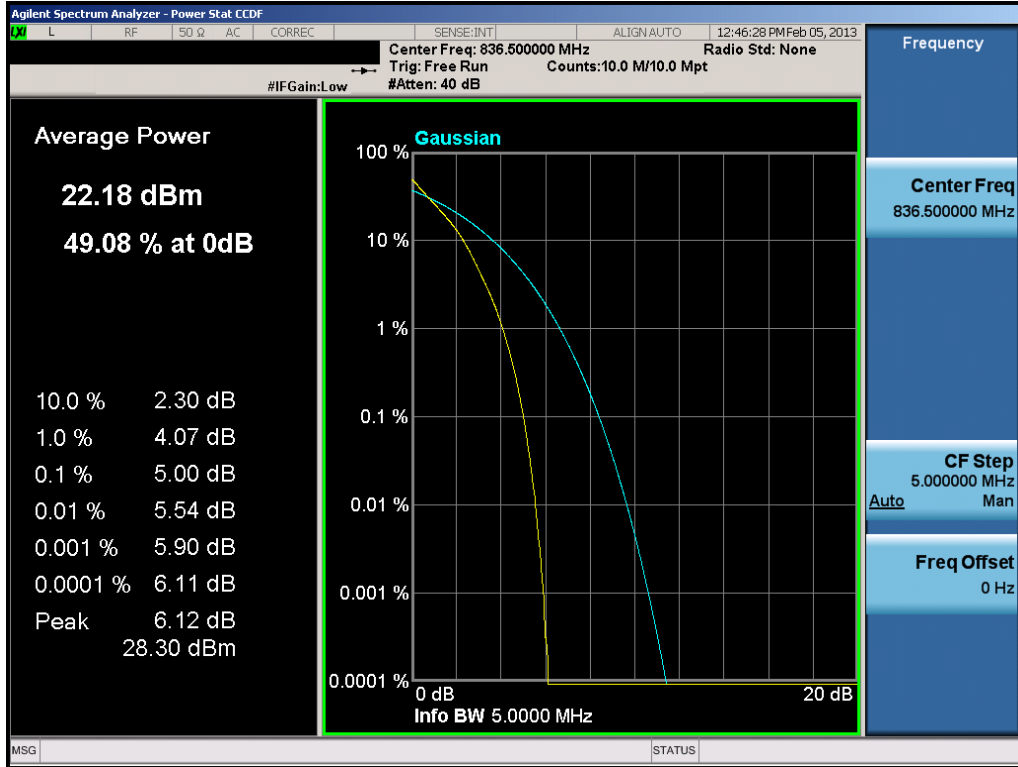


Plot 8-13. PAR Plot (5.0MHz QPSK – RB Size 25)

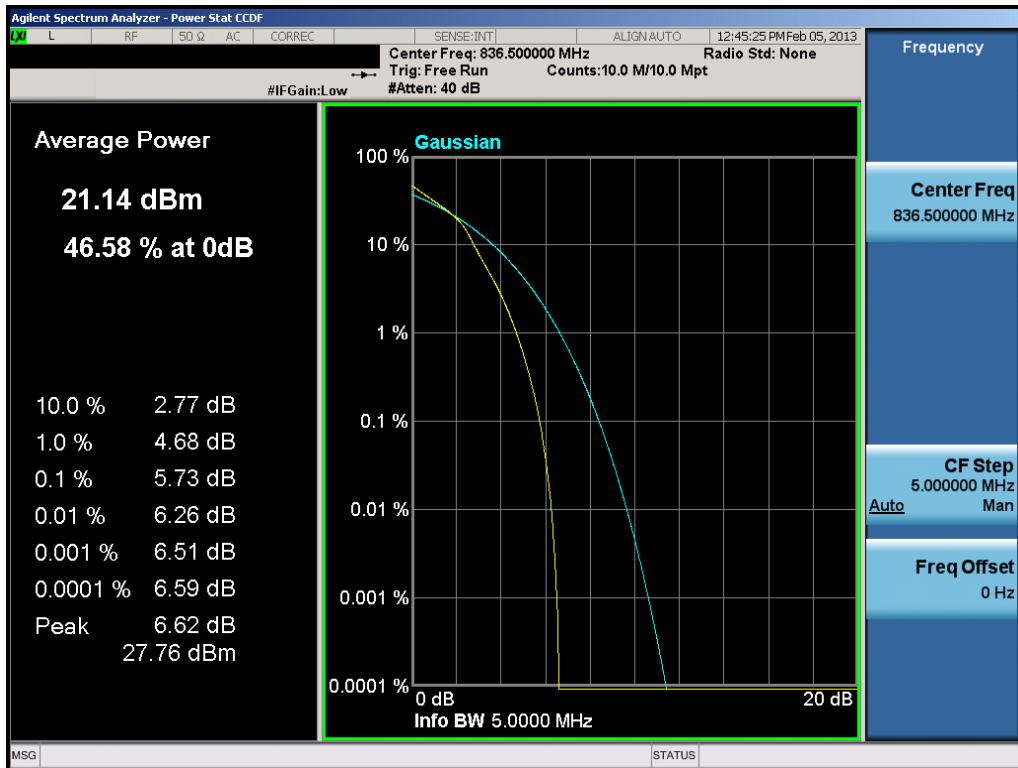

Plot 8-14. PAR Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 56 of 101

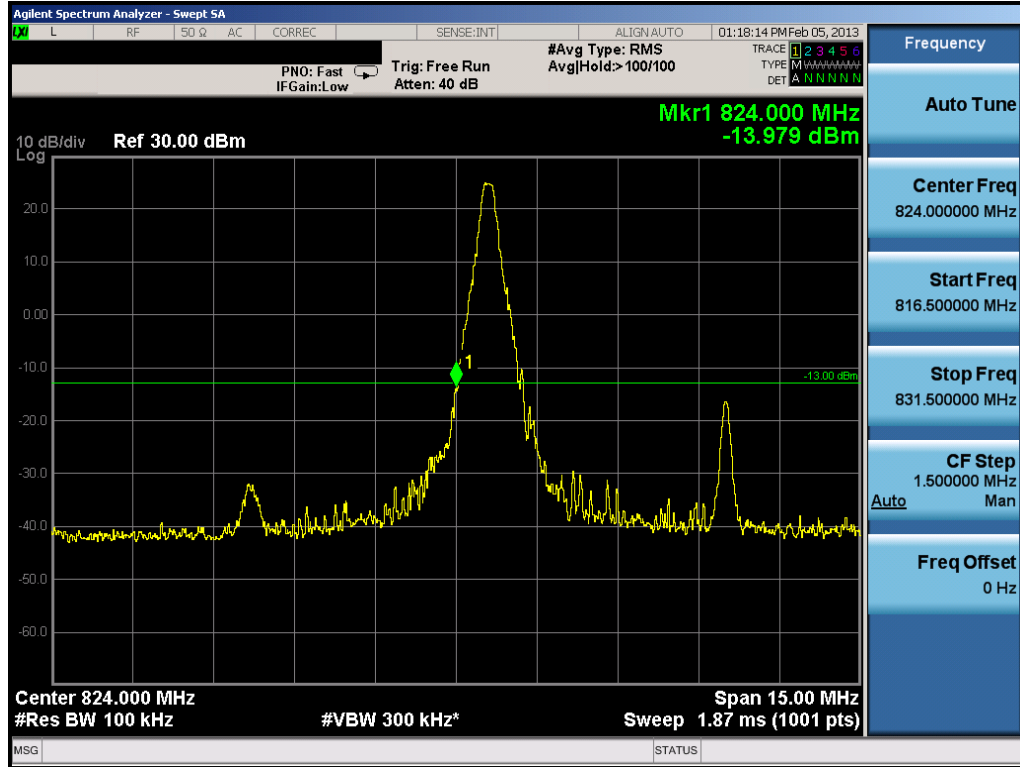


Plot 8-15. Lower Band Edge Plot (10.0MHz QPSK – RB Size 1, RB Offset 0)




Plot 8-16. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 57 of 101

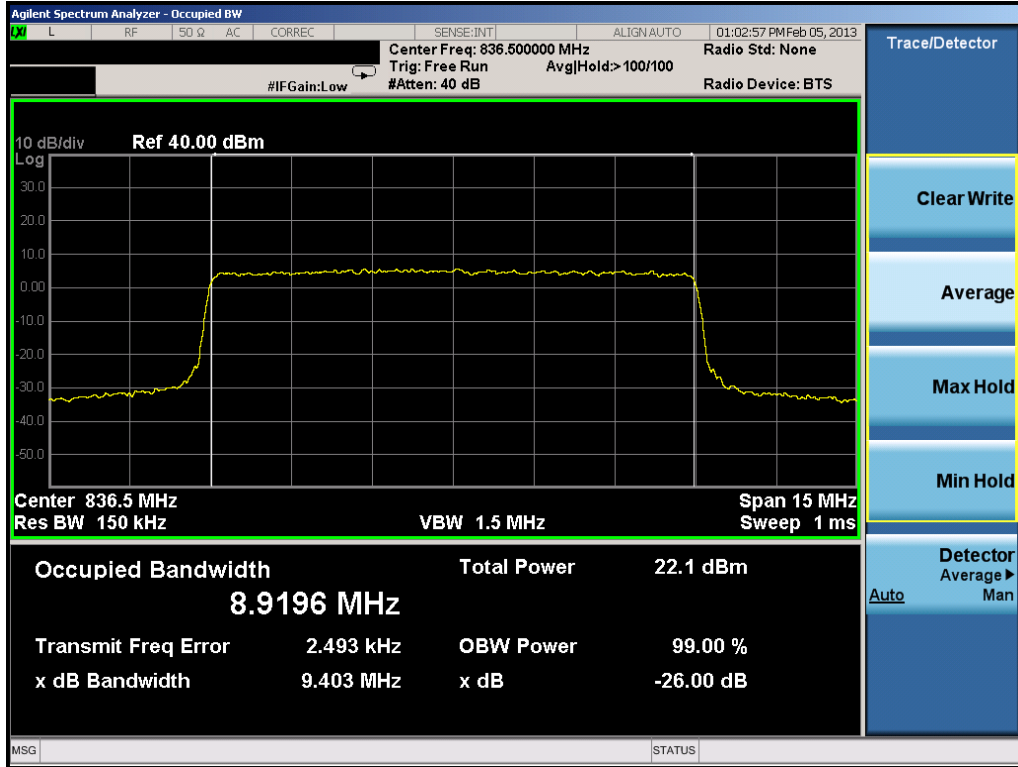


Plot 8-17. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

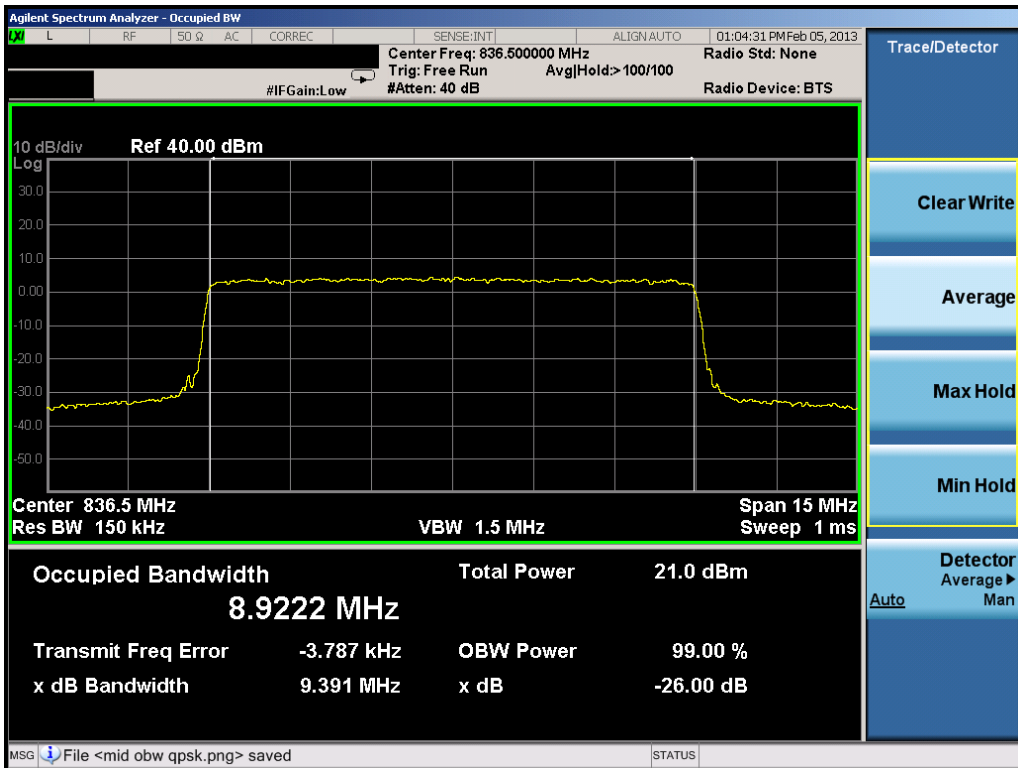


Plot 8-18. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 58 of 101

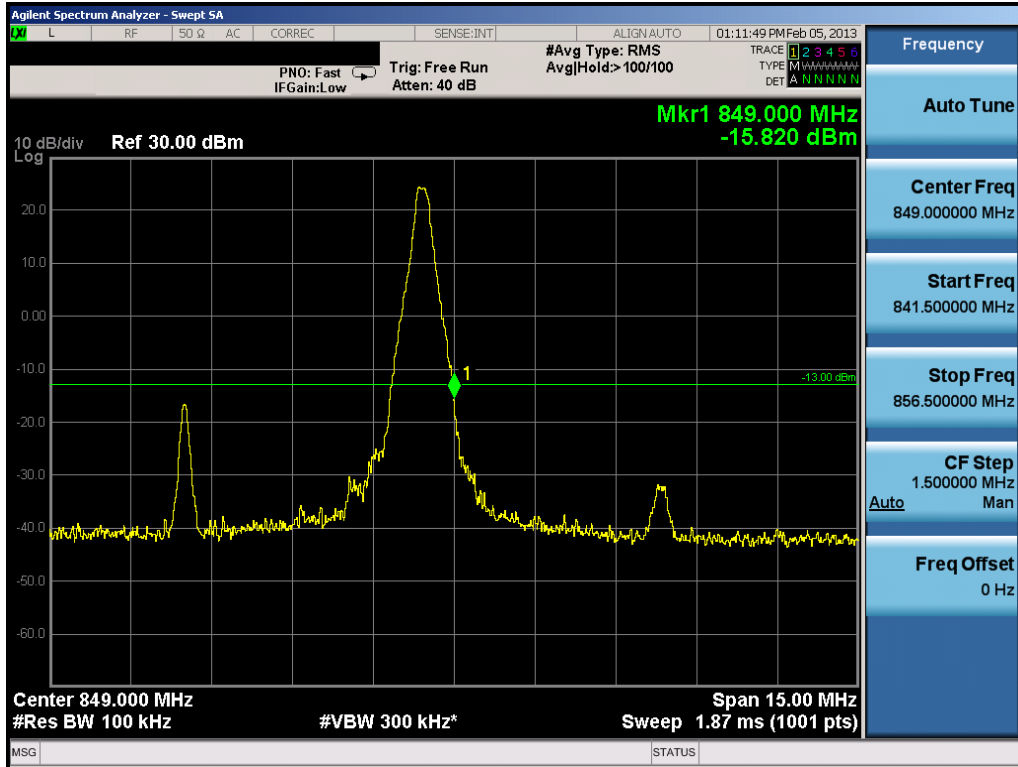


Plot 8-19. Upper Band Edge Plot (10.0MHz QPSK – RB Size 1, RB Offset 49)

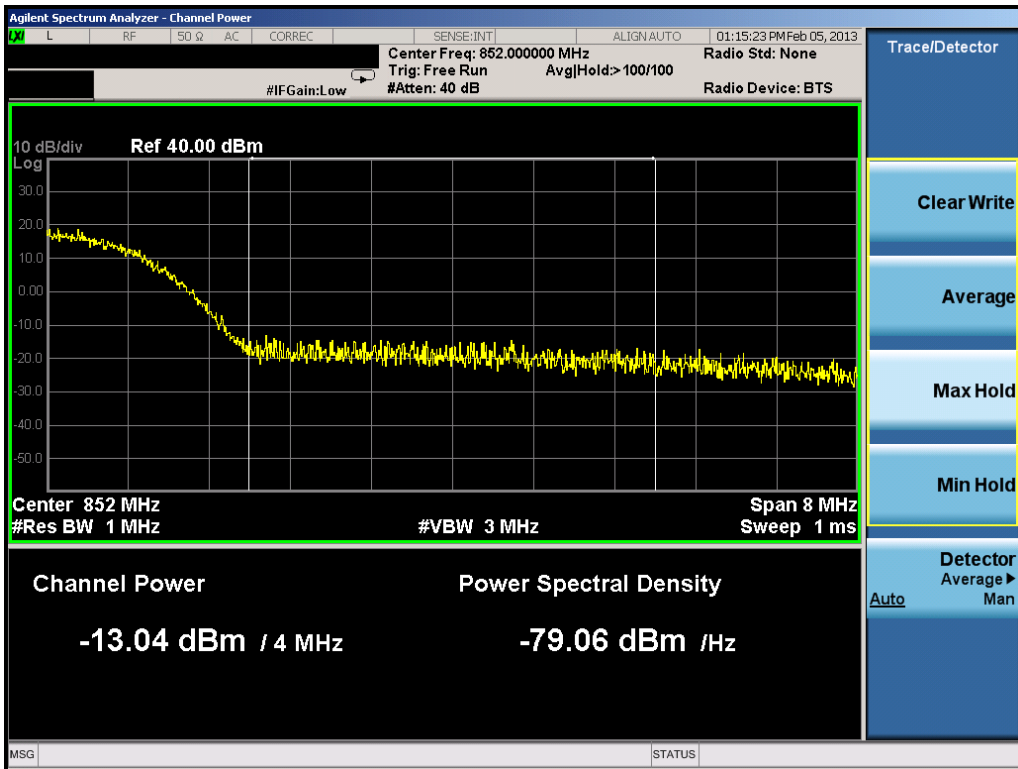


Plot 8-20. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 59 of 101

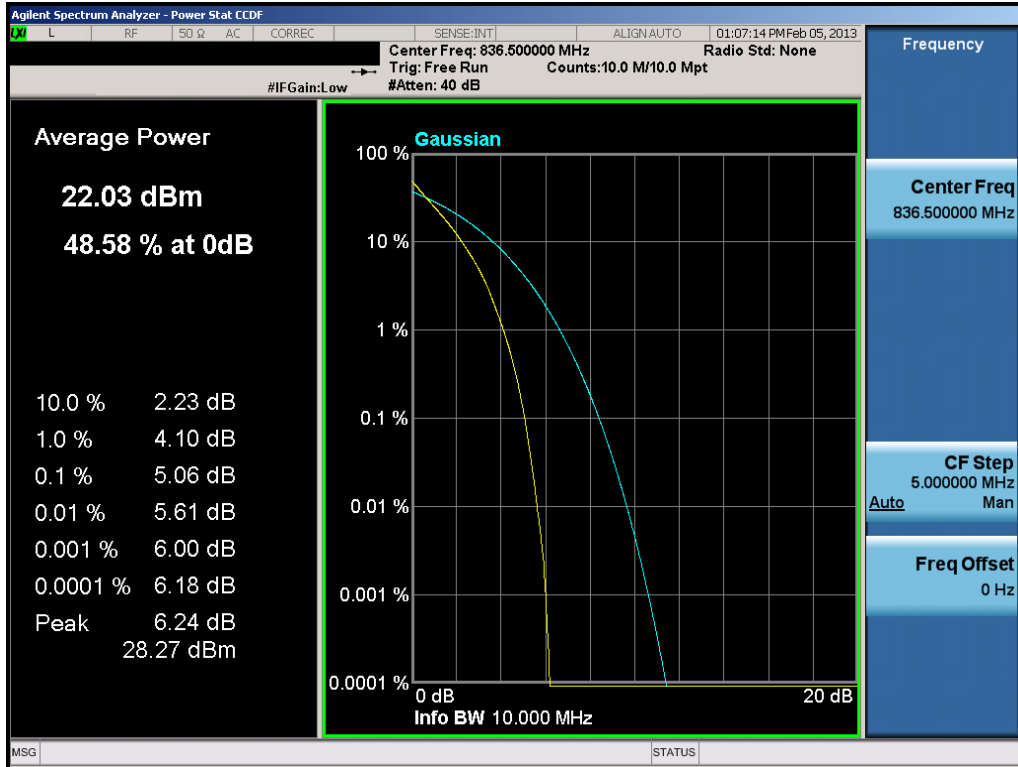

Plot 8-21. PAR Plot (10.0MHz QPSK – RB Size 50)

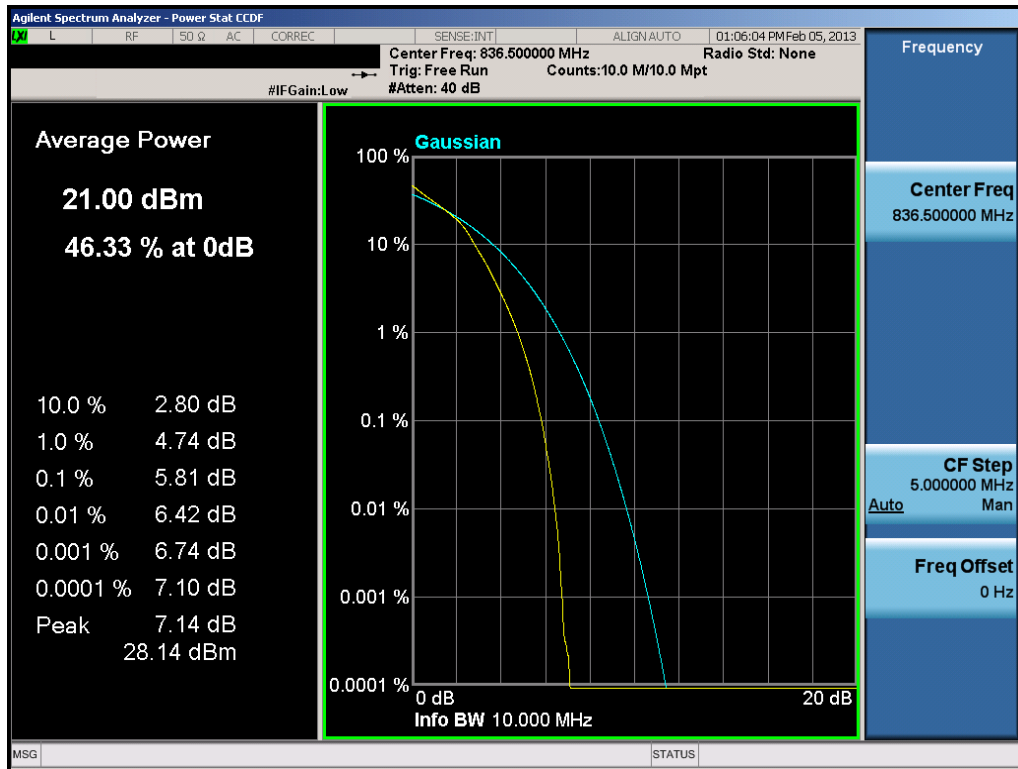

Plot 8-22. PAR Plot (10.0MHz 16-QAM – RB Size 50)


FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 60 of 101

9.0 BAND 4 PLOTS OF EMISSIONS

Note:


All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

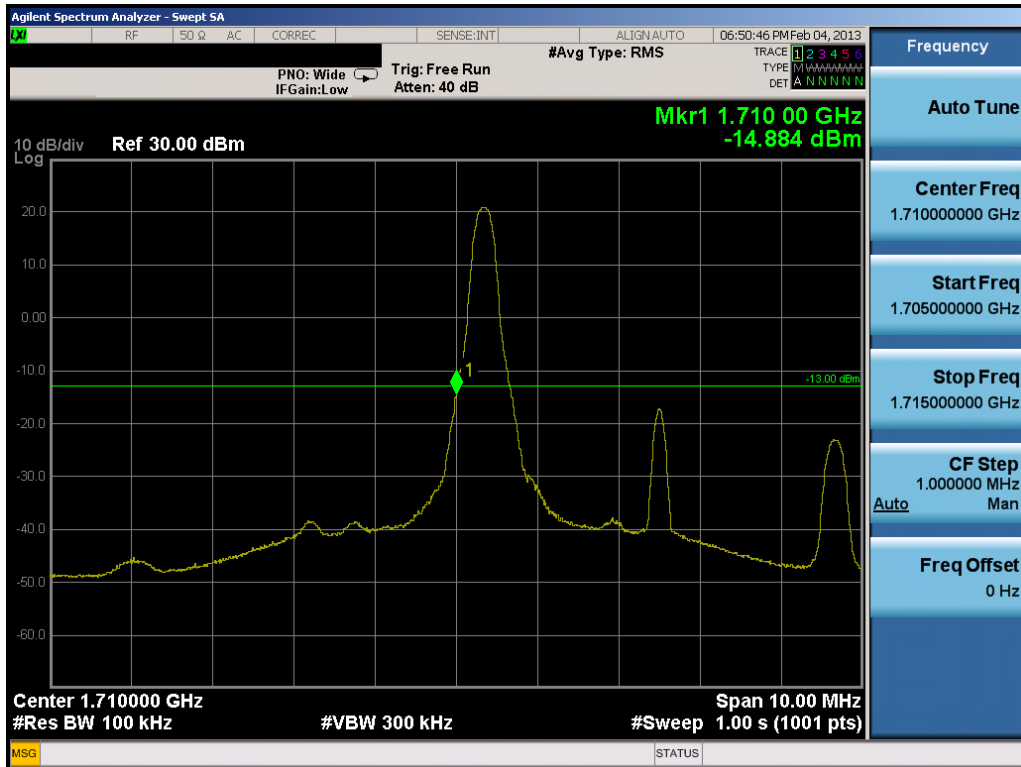For the band edge plots, the resolution BWs are greater than 1% of the occupied BW. The Occupied BW plots display the BW at full RB size. Plots that indicate an “RB Size 1” have a BW of approximately 180kHz. Therefore, RBW = 100kHz is greater than 1% of the occupied BW at RB Size 1.




Plot 9-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 61 of 101

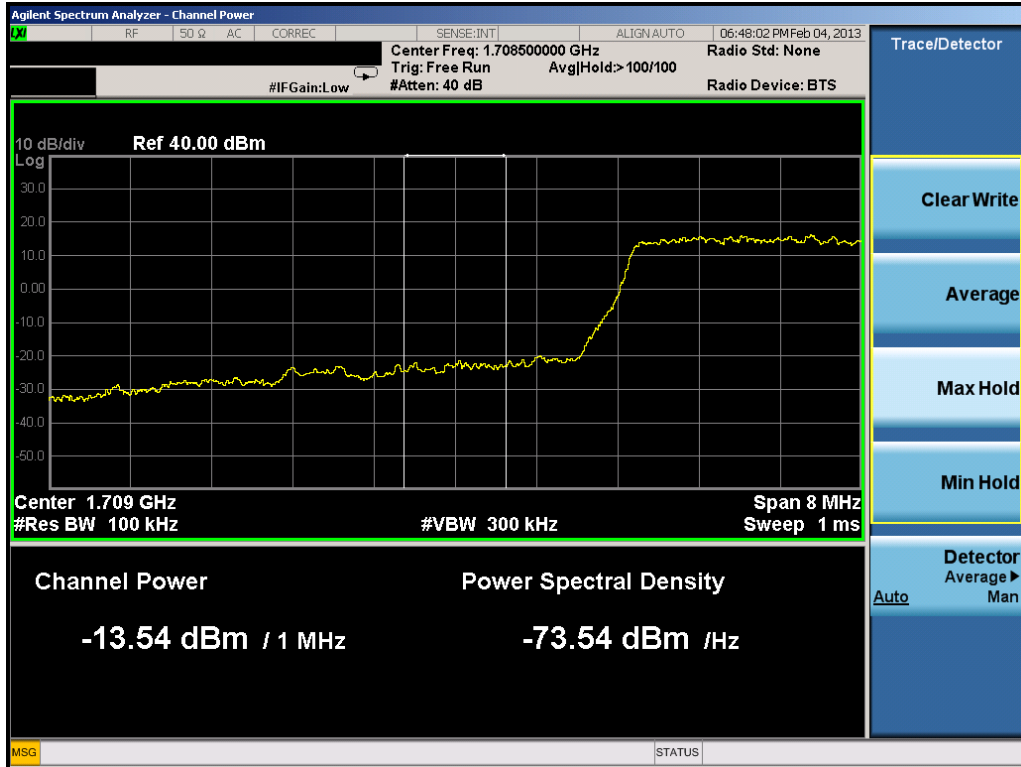


Plot 9-2. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

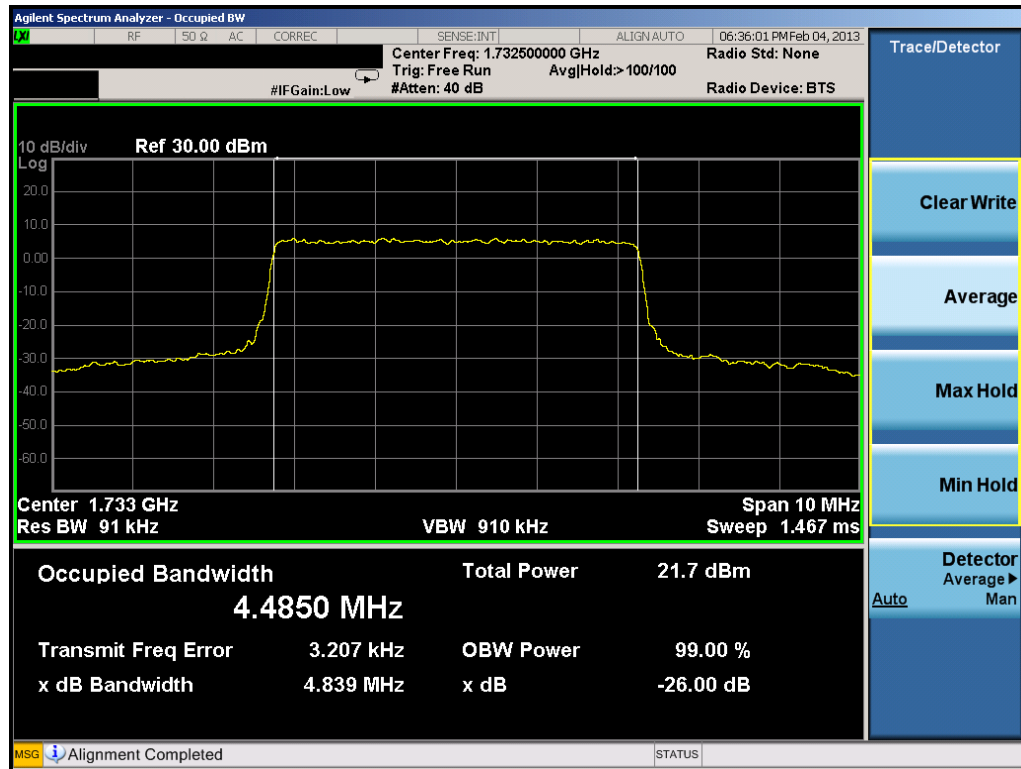


Plot 9-3. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 62 of 101

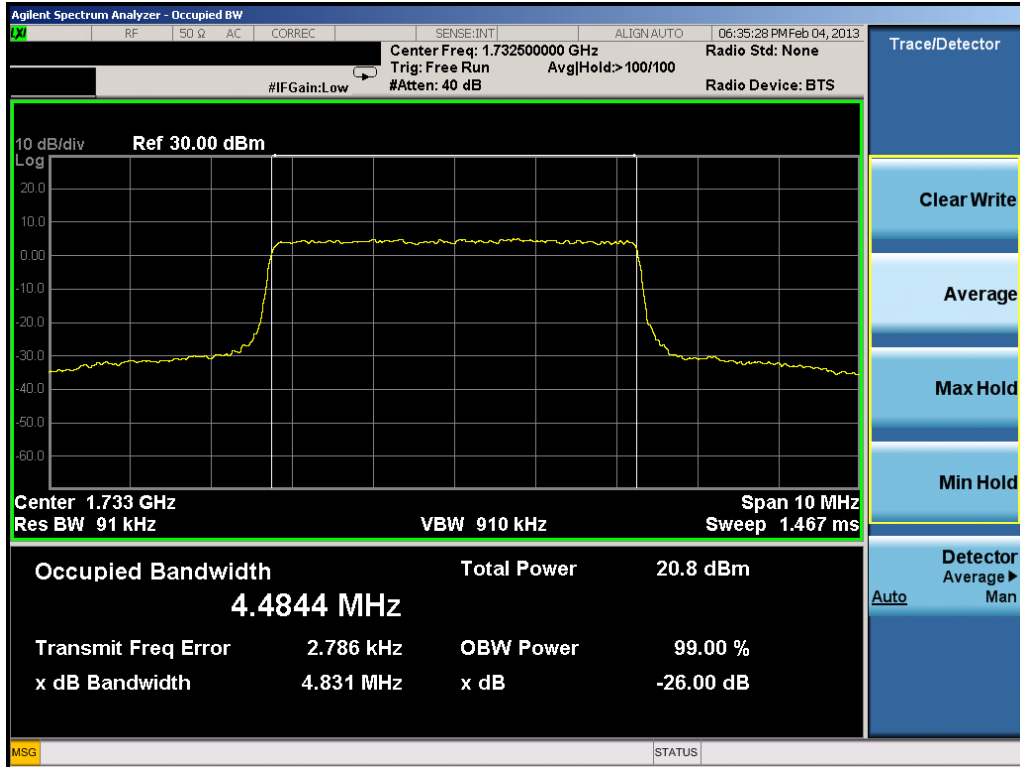

Plot 9-4. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

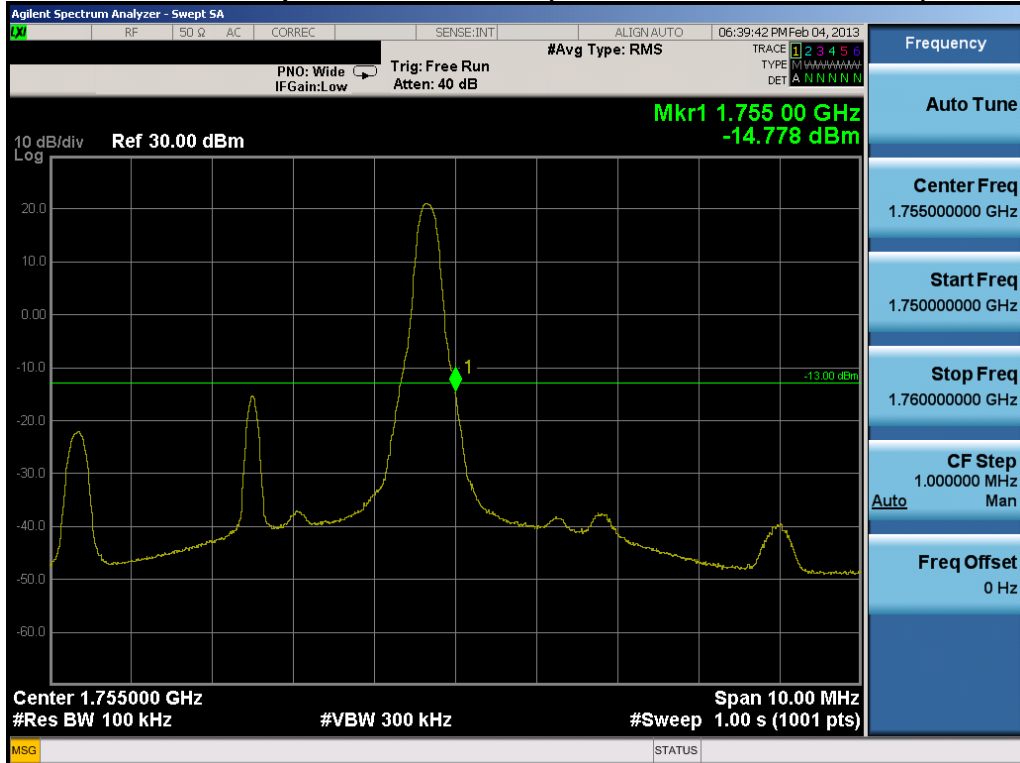


Plot 9-5. Upper Band Edge Plot (5.0MHz QPSK – RB Size 1, RB Offset 24)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 63 of 101




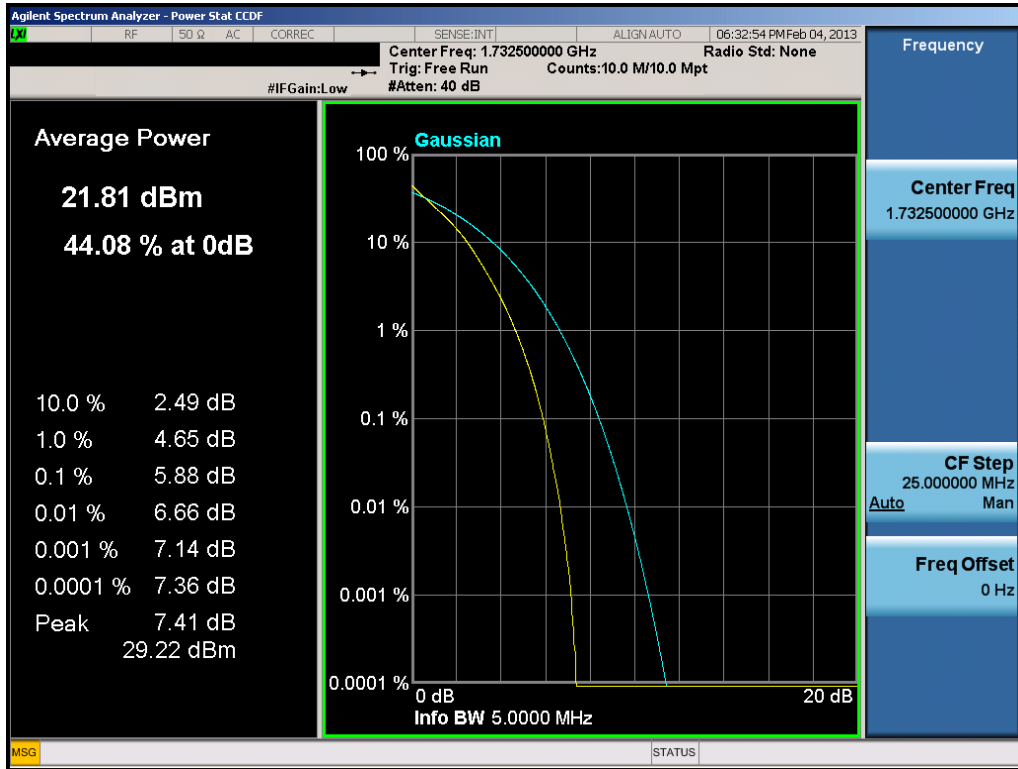Plot 9-6. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)




Plot 9-7. PAR Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 64 of 101

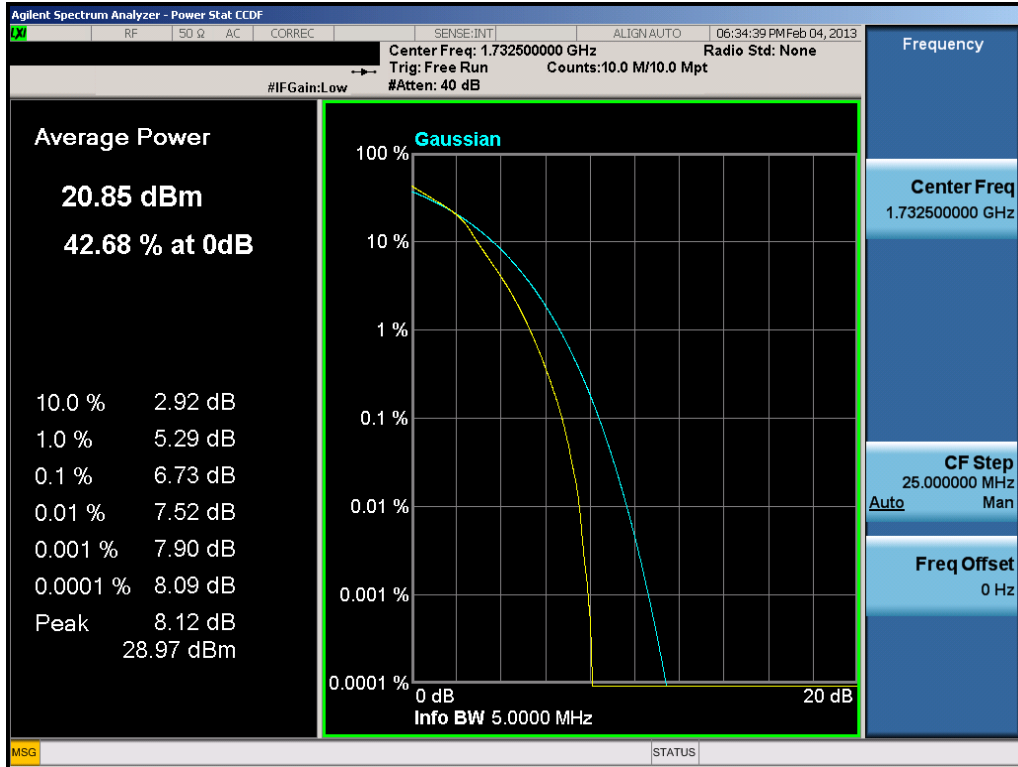


Plot 9-8. PAR Plot (5.0MHz 16-QAM – RB Size 25)

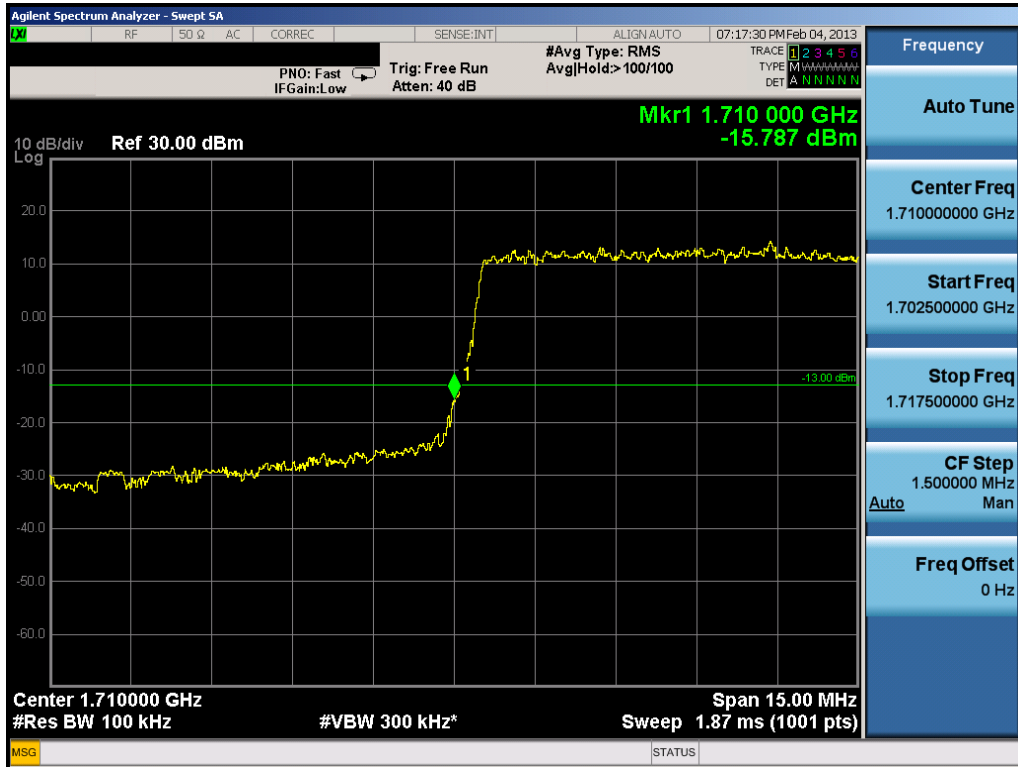


Plot 9-9. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 65 of 101

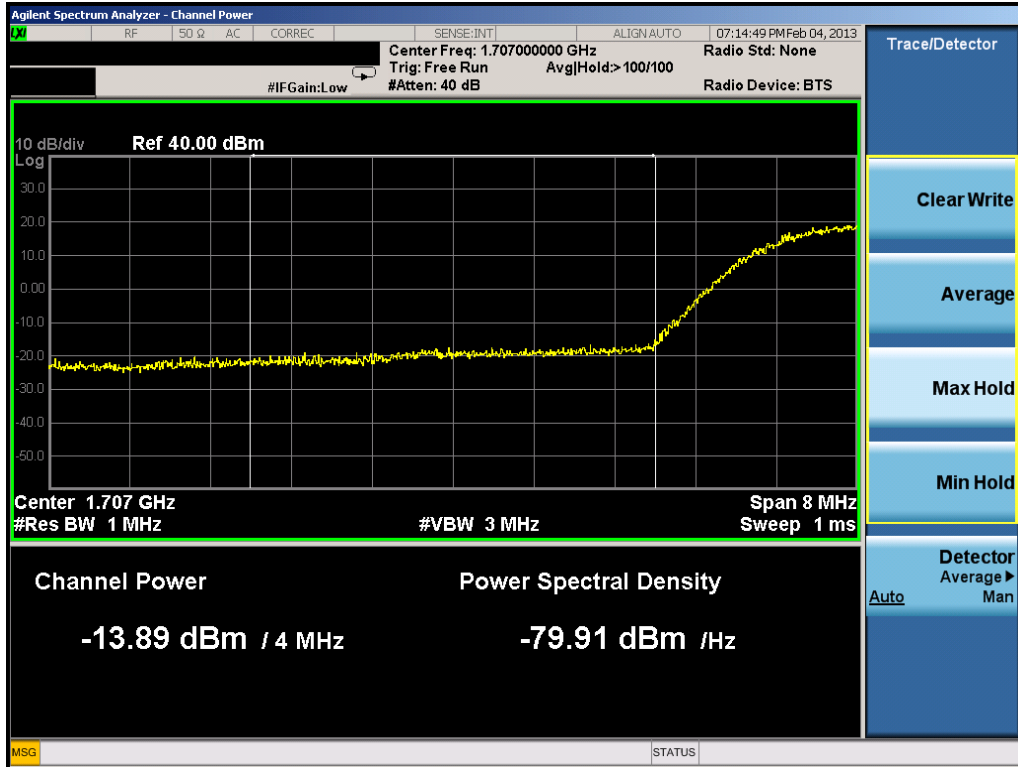


Plot 9-10. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

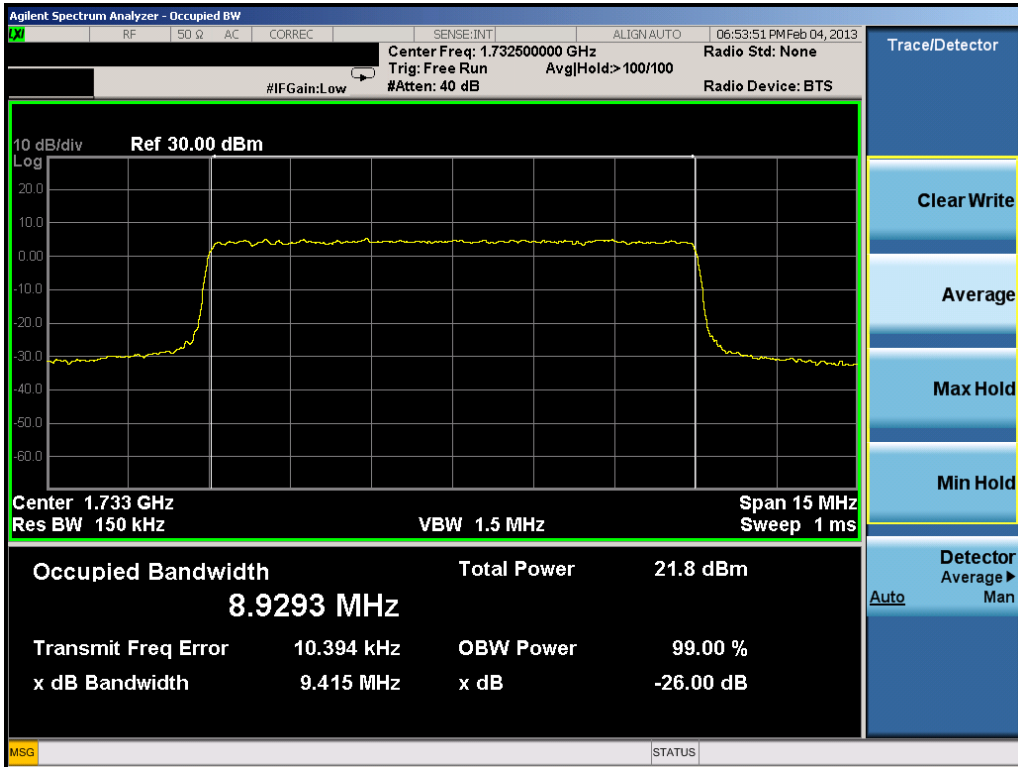


Plot 9-11. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 66 of 101

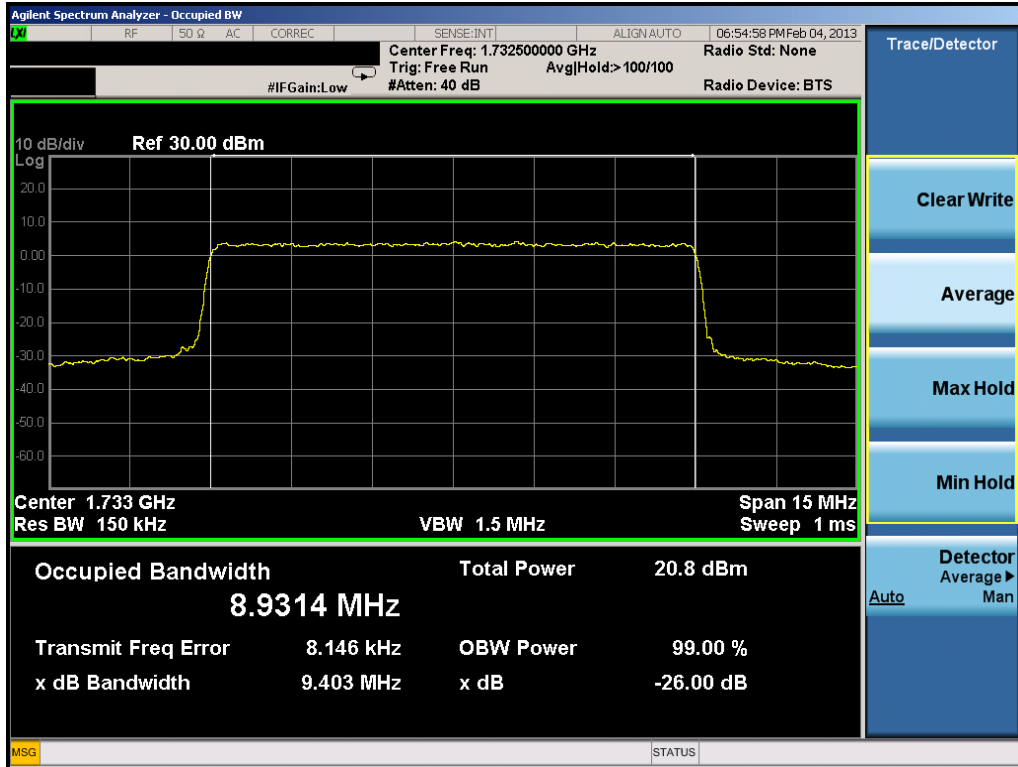


Plot 9-12. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

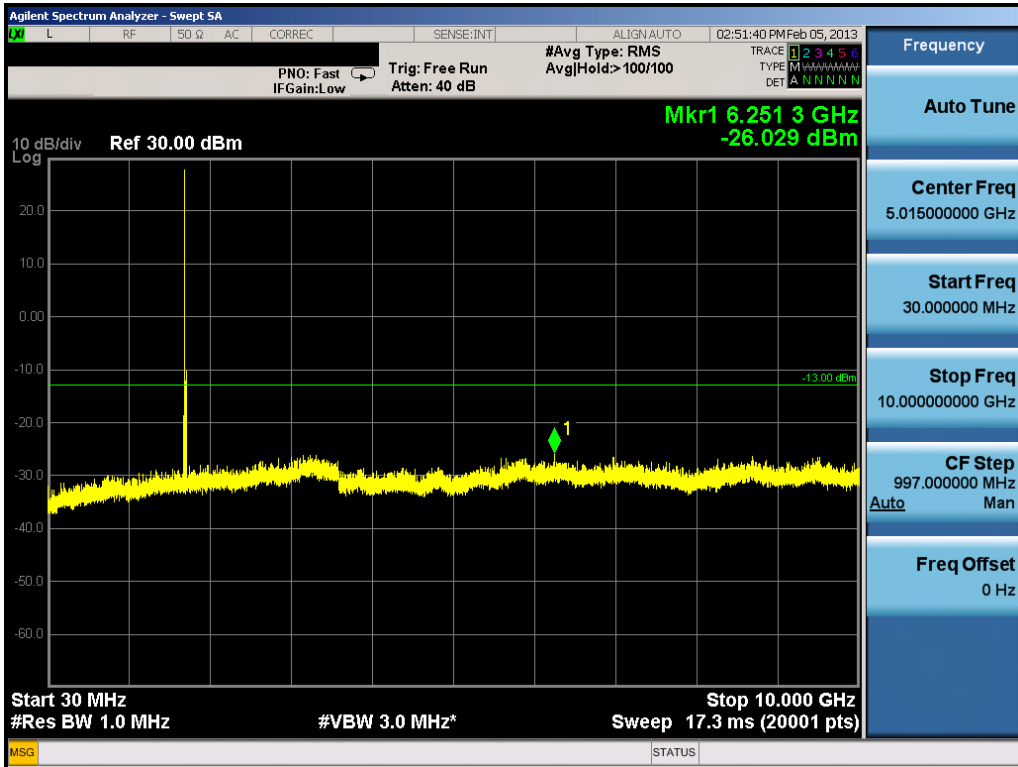


Plot 9-13. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

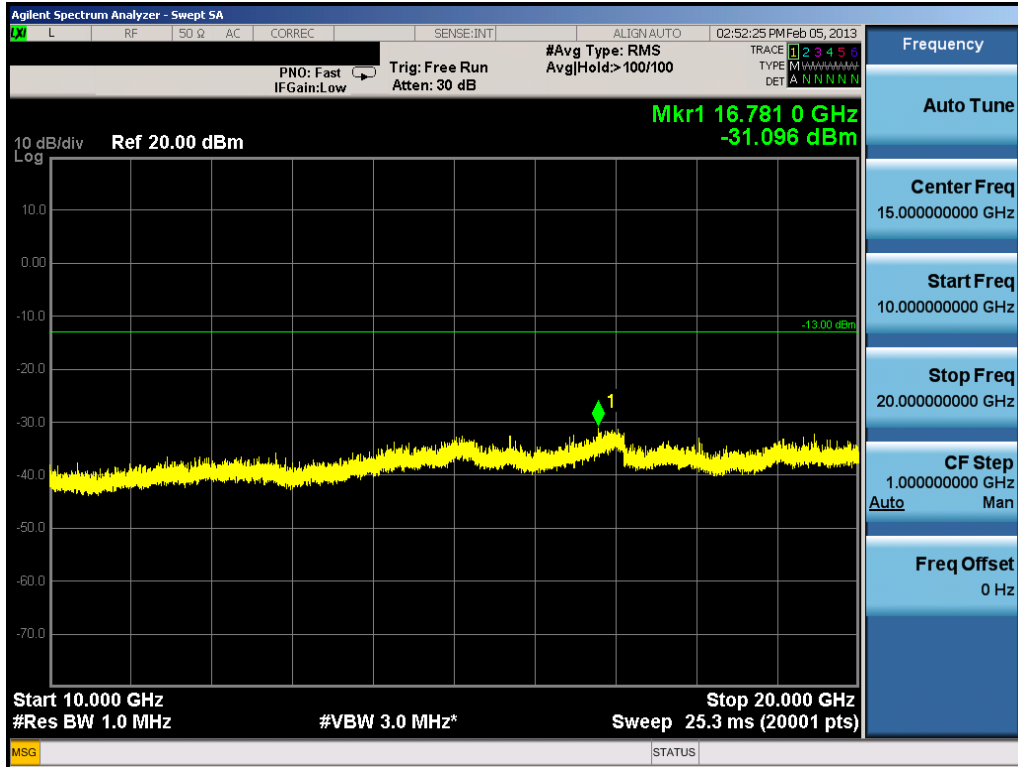

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 67 of 101

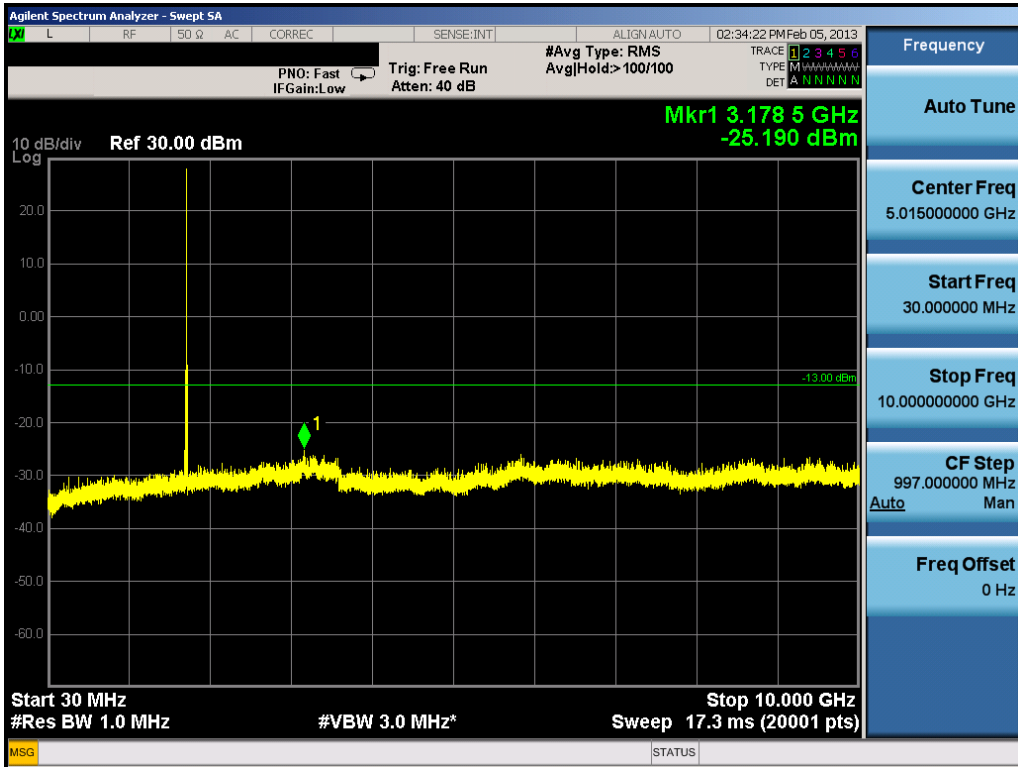


Plot 9-14. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)




Plot 9-15. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI337	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	 SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 68 of 101

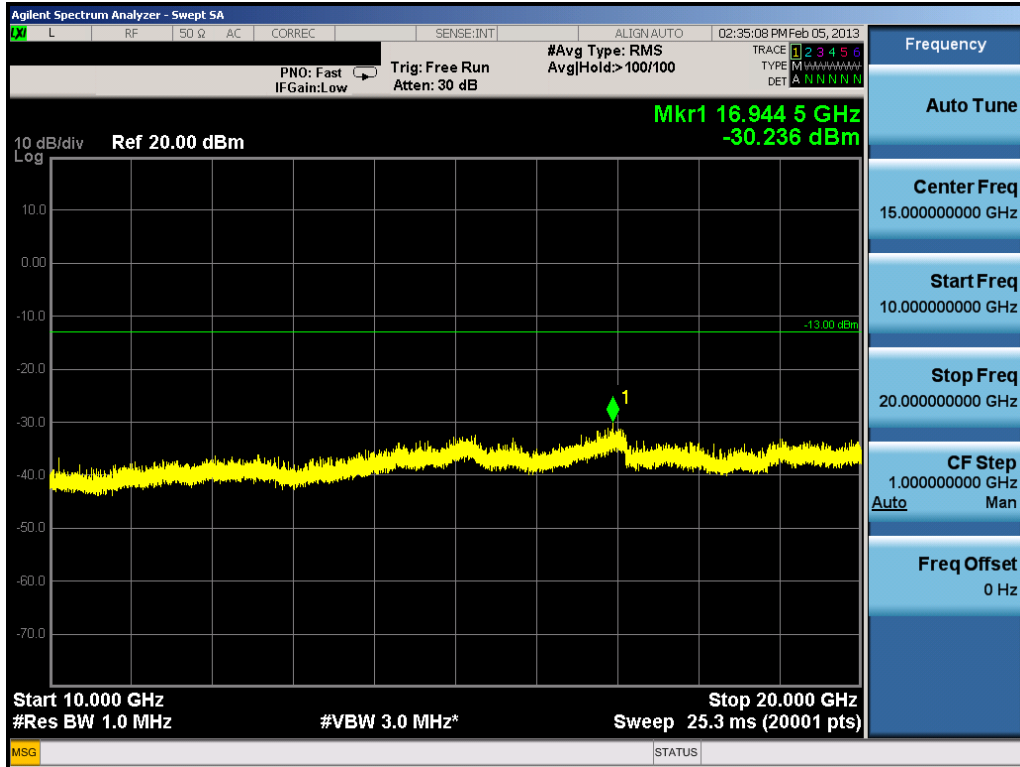


Plot 9-16. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

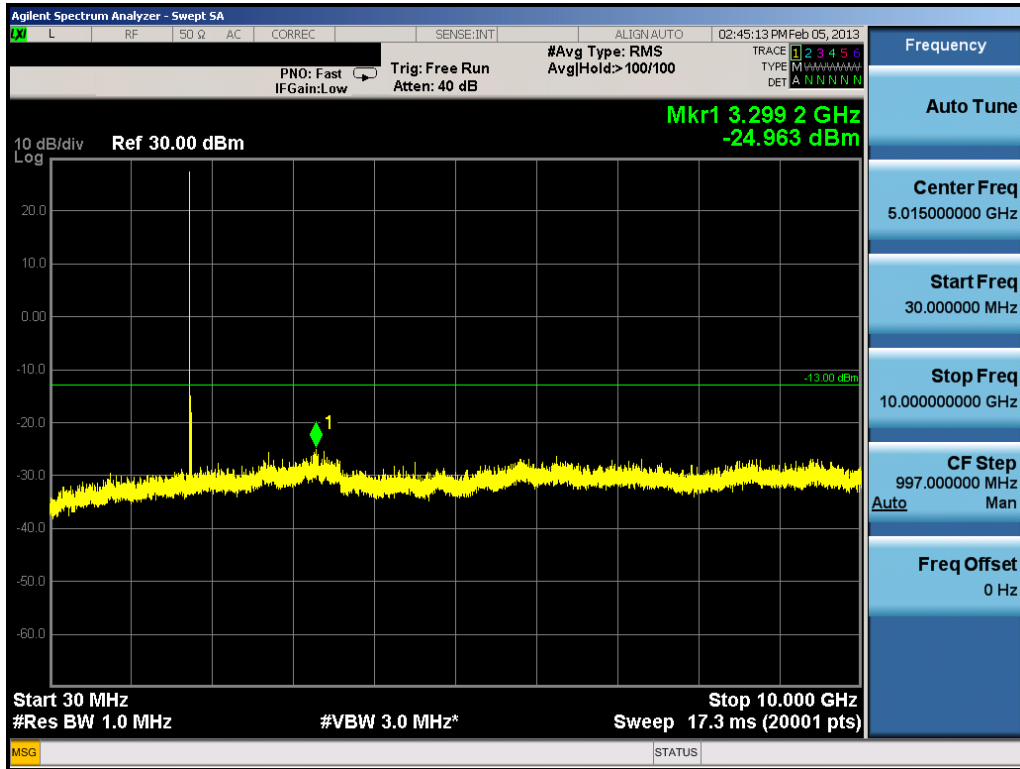


Plot 9-17. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 69 of 101

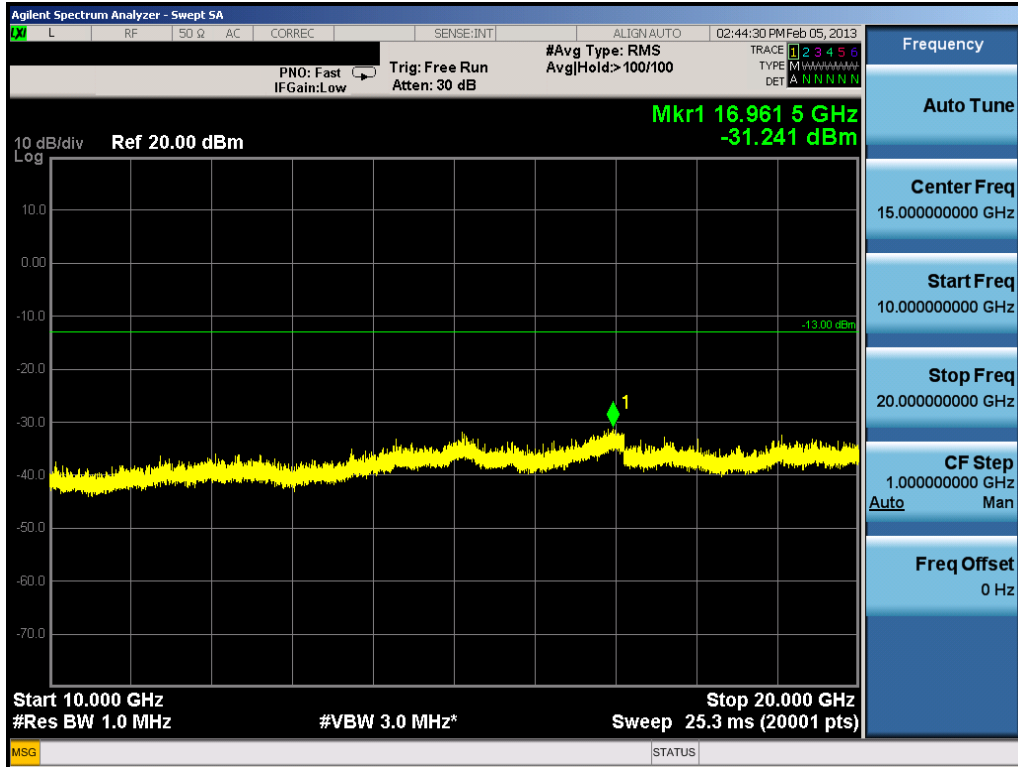


Plot 9-18. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

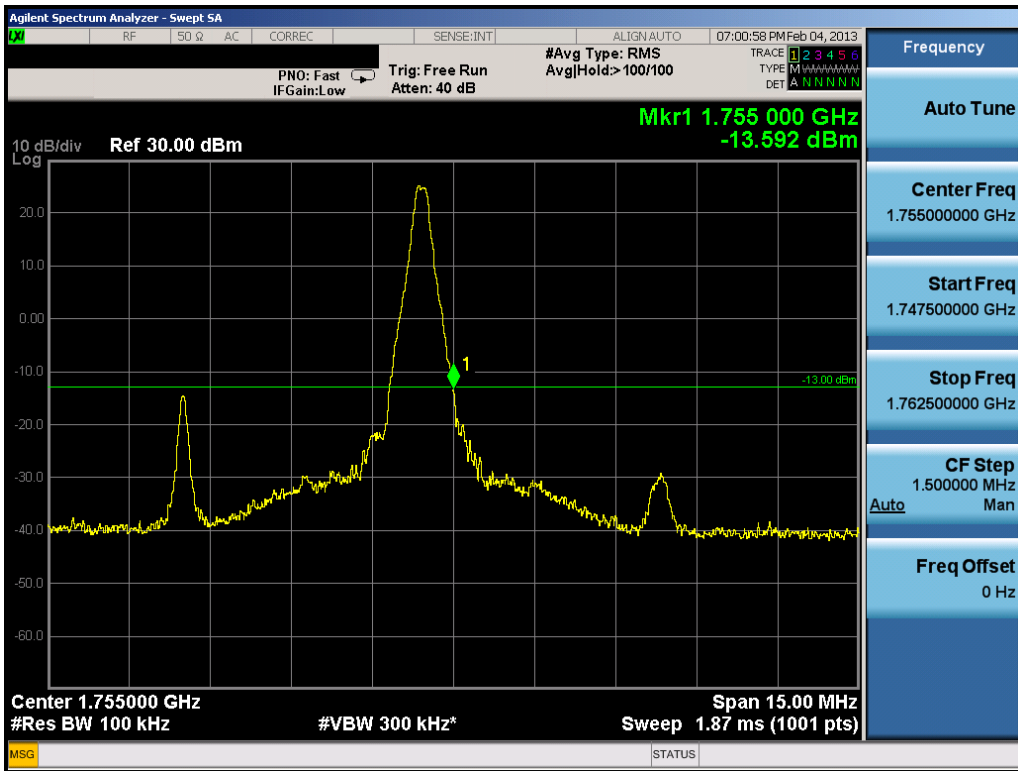


Plot 9-19. Upper Band Edge Plot (10.0MHz QPSK – RB Size 1, RB Offset 49)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 70 of 101

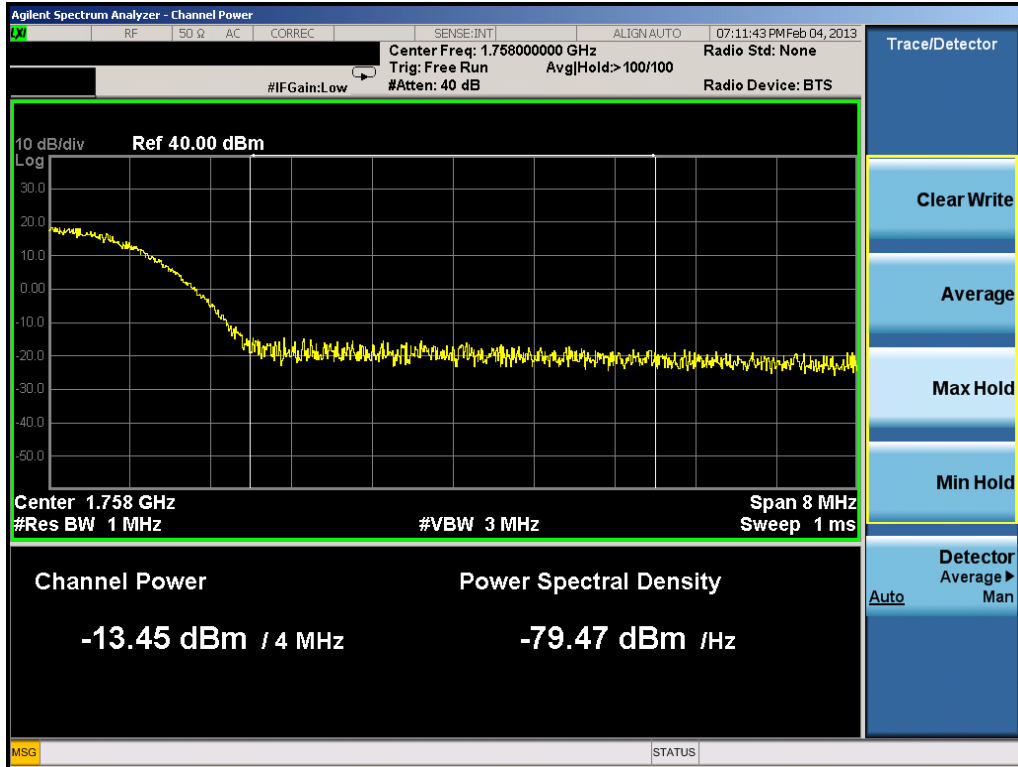


Plot 9-20. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

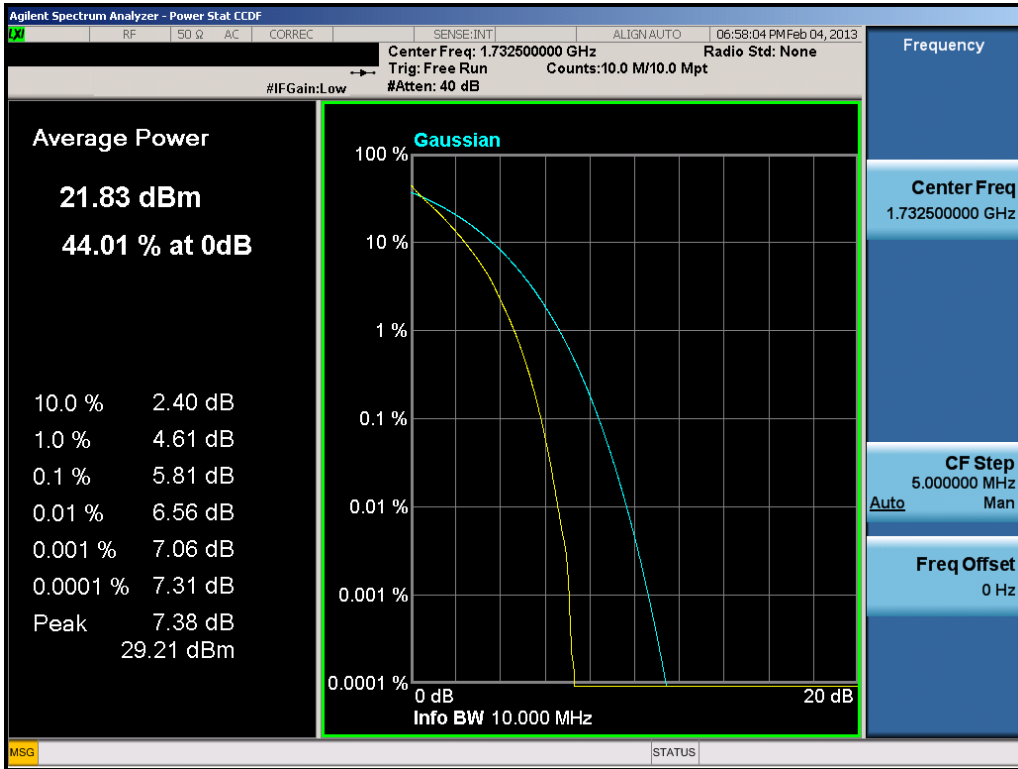


Plot 9-21. PAR Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 71 of 101

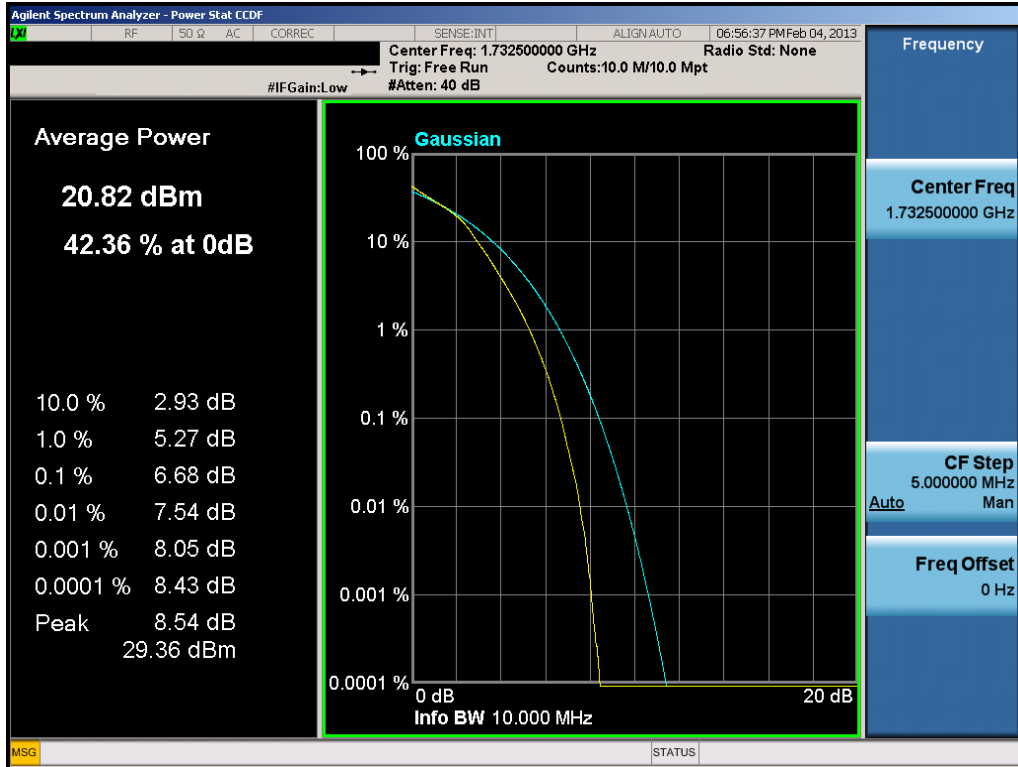

Plot 9-22. PAR Plot (10.0MHz 16-QAM – RB Size 50)

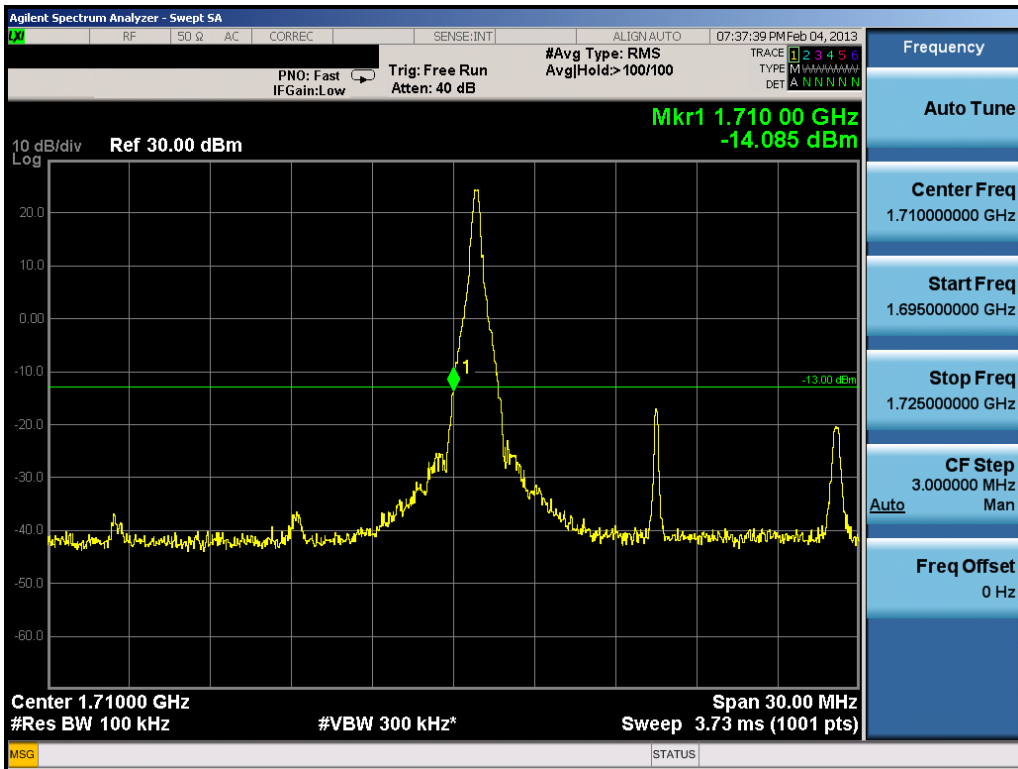


Plot 9-23. Lower Band Edge Plot (15.0MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 72 of 101




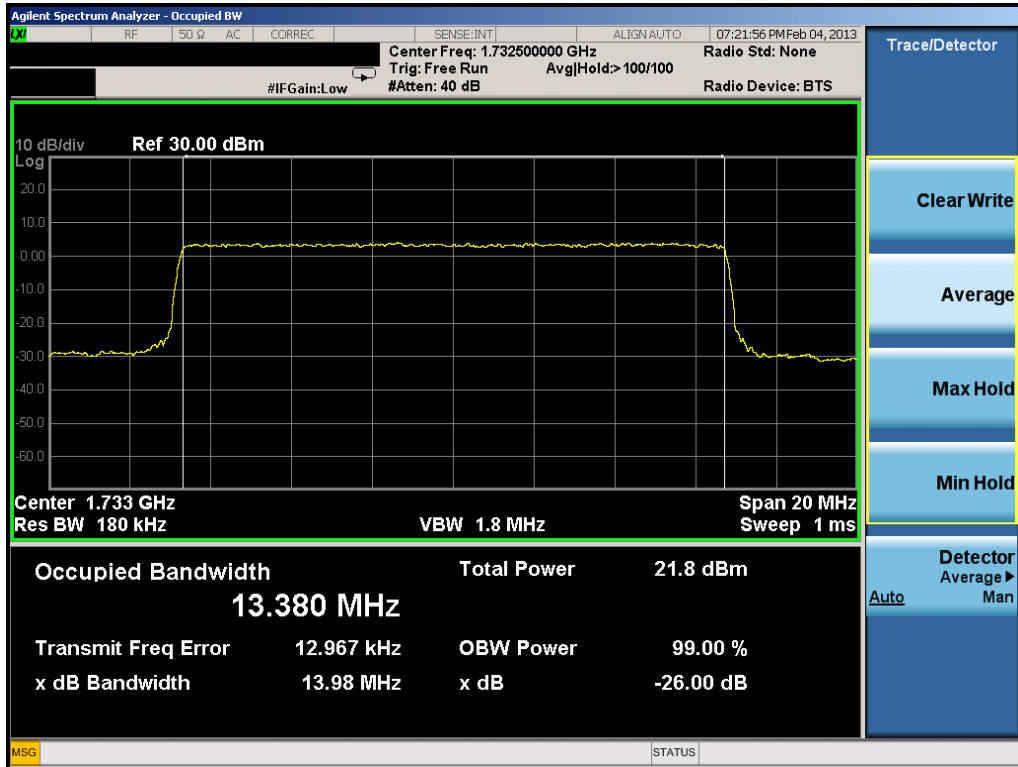Plot 9-24. Lower Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)




Plot 9-25. Occupied Bandwidth Plot (15.0MHz QPSK – RB Size 75)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 73 of 101

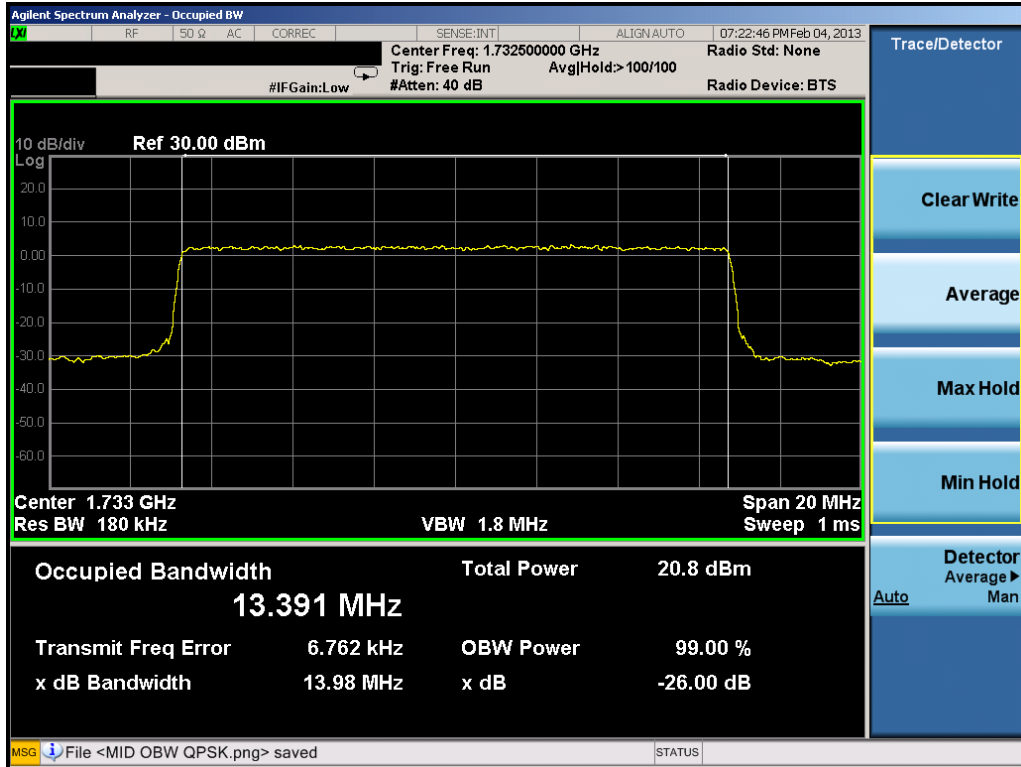


Plot 9-26. Occupied Bandwidth Plot (15.0MHz 16-QAM – RB Size 75)

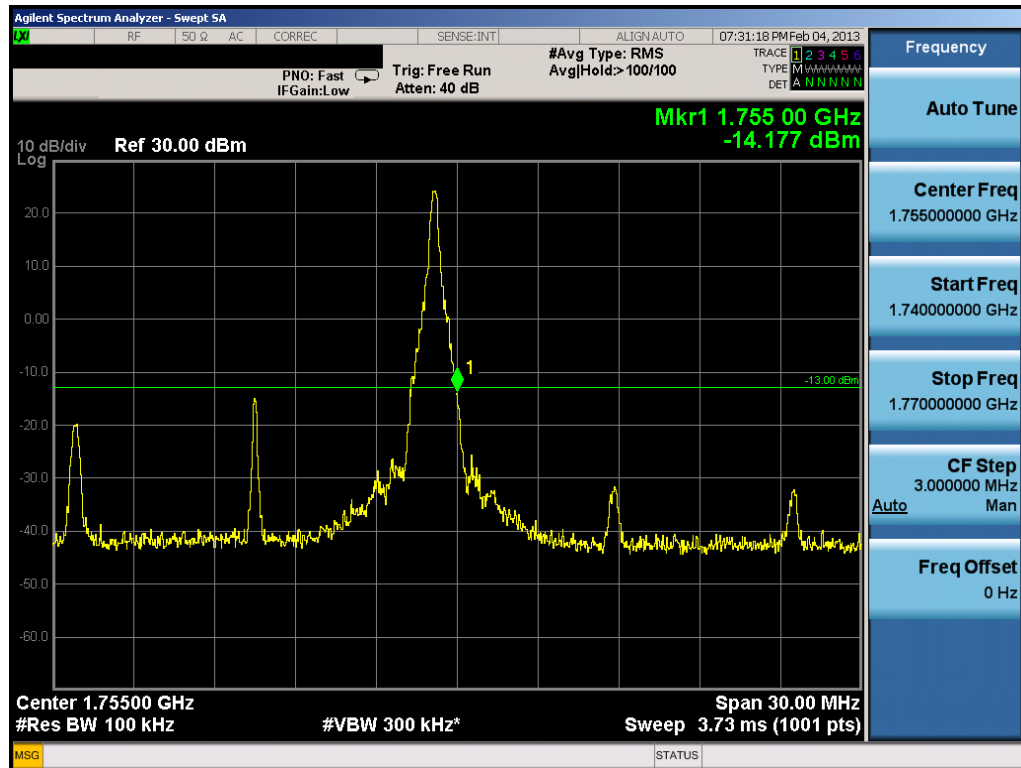


Plot 9-27. Upper Band Edge Plot (15.0MHz QPSK – RB Size 1, RB Offset 74)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 74 of 101

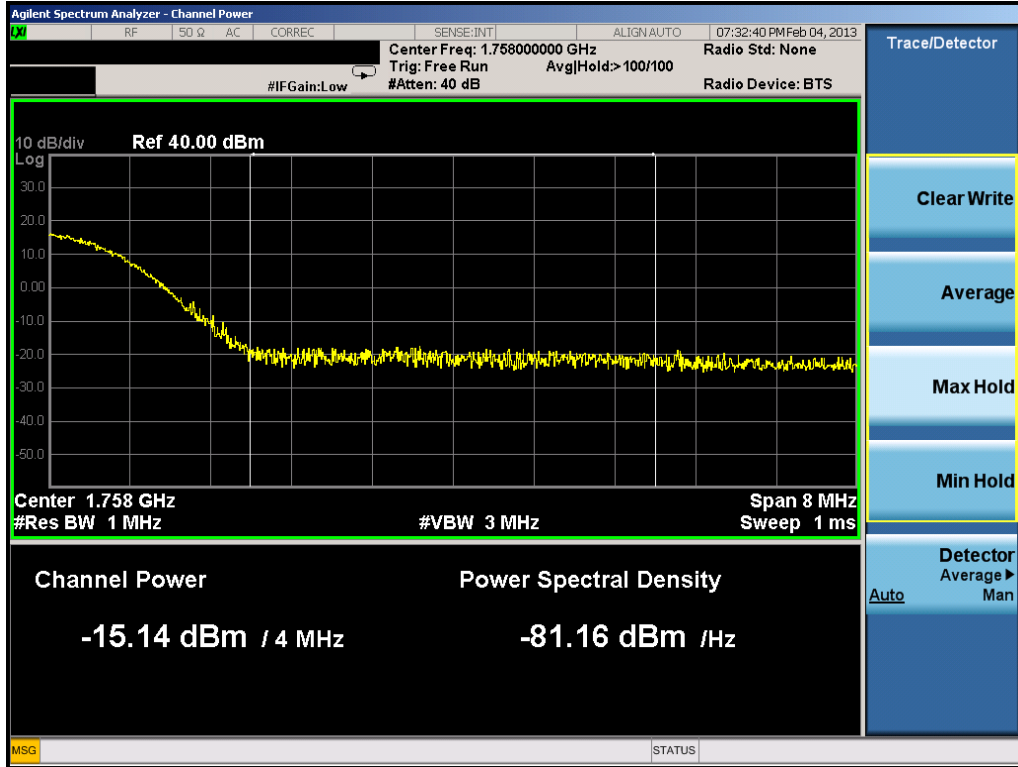


Plot 9-28. Upper Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)

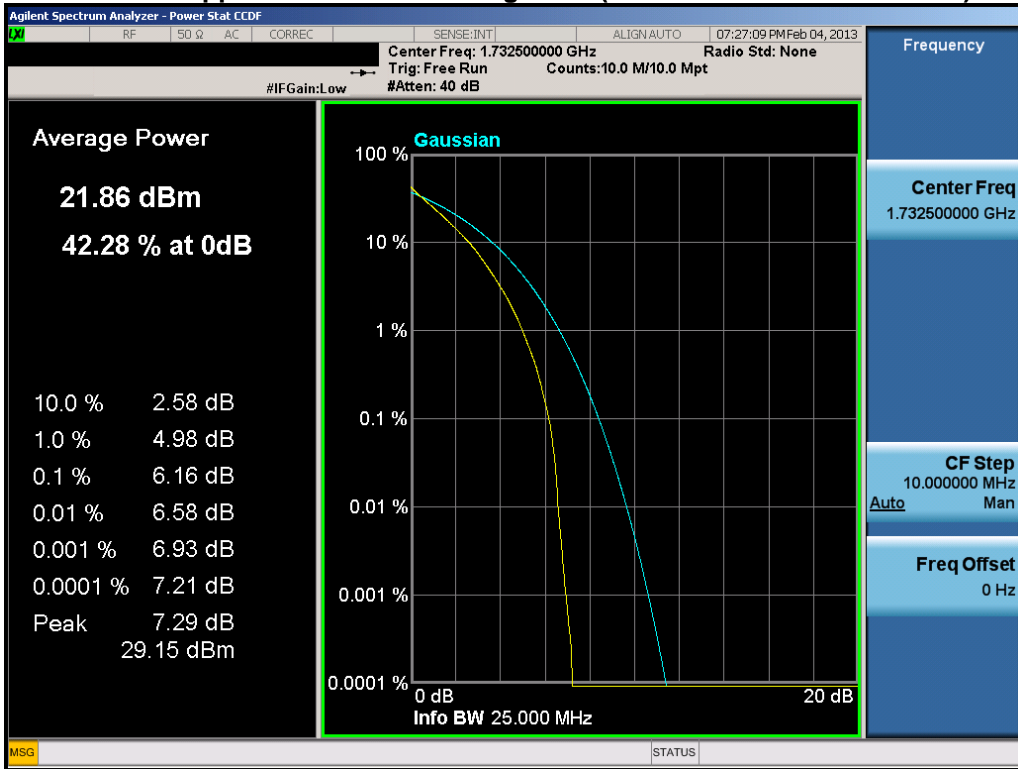


Plot 9-29. PAR Plot (15.0MHz QPSK – RB Size 75)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 75 of 101

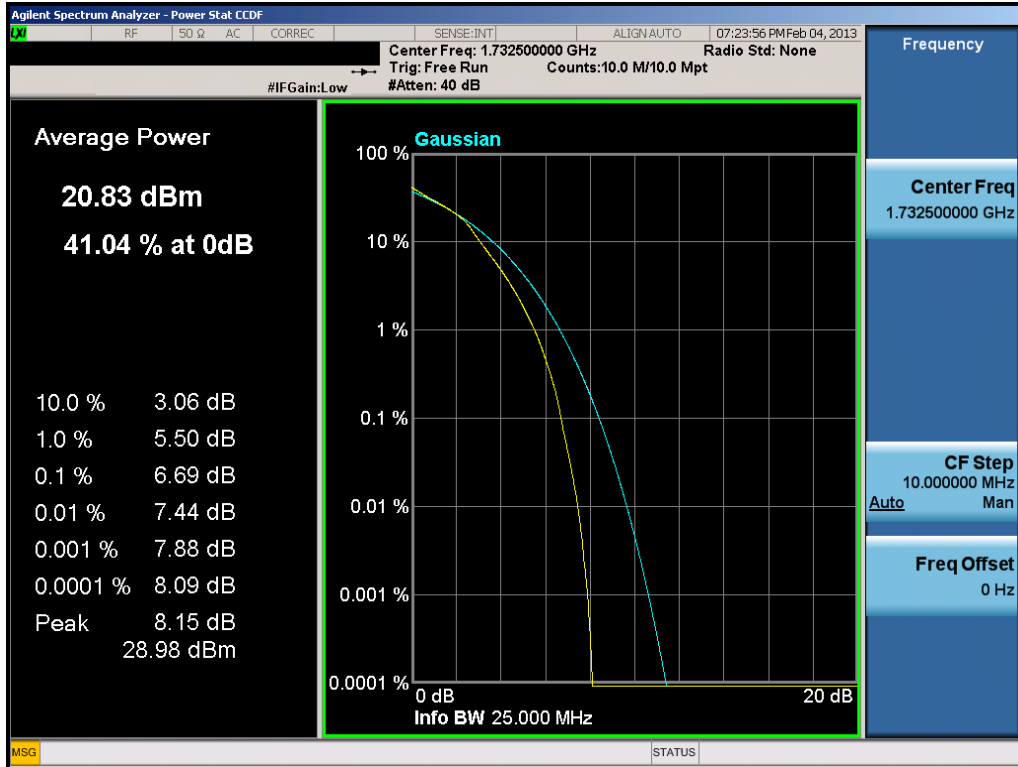

Plot 9-30. PAR Plot (15.0MHz 16-QAM – RB Size 75)

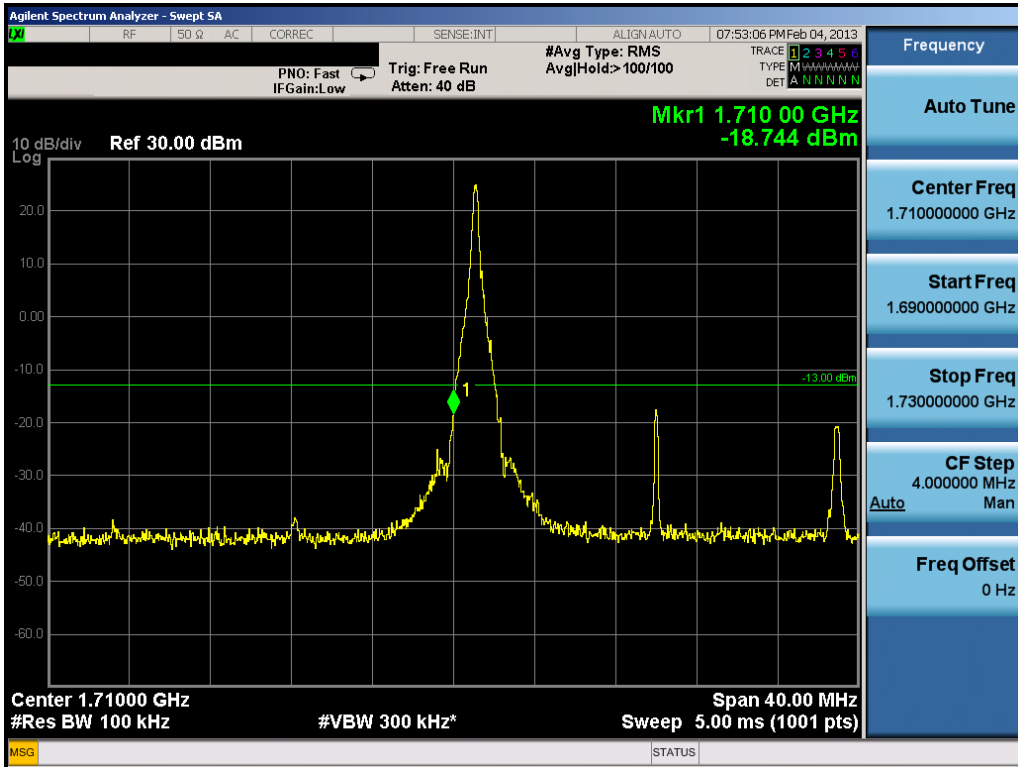


Plot 9-31. Lower Band Edge Plot (20.0MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 76 of 101




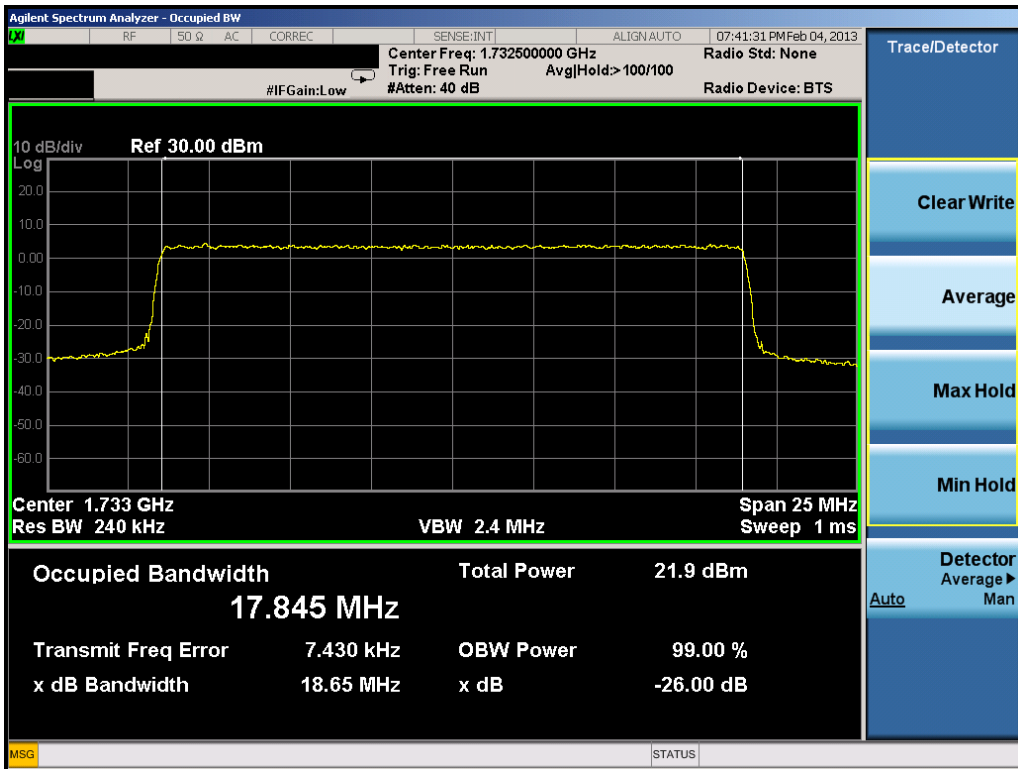Plot 9-32. Lower Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)




Plot 9-33. Occupied Bandwidth Plot (20.0MHz QPSK – RB Size 100)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 77 of 101

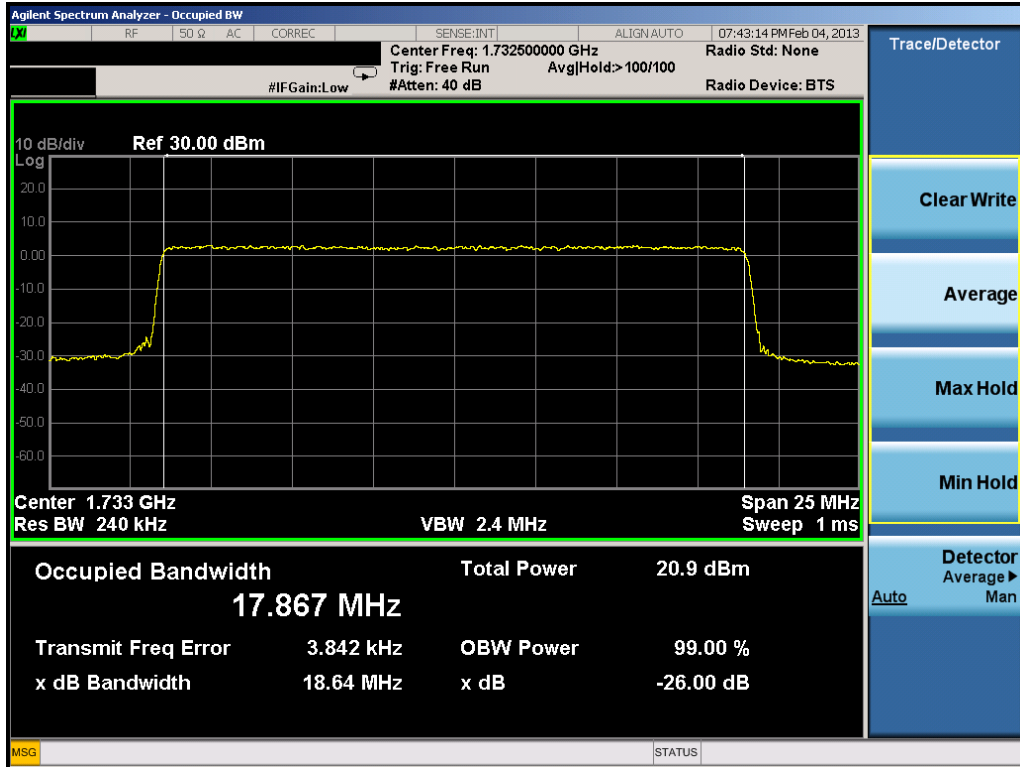


Plot 9-34. Occupied Bandwidth Plot (20.0MHz 16-QAM – RB Size 100)

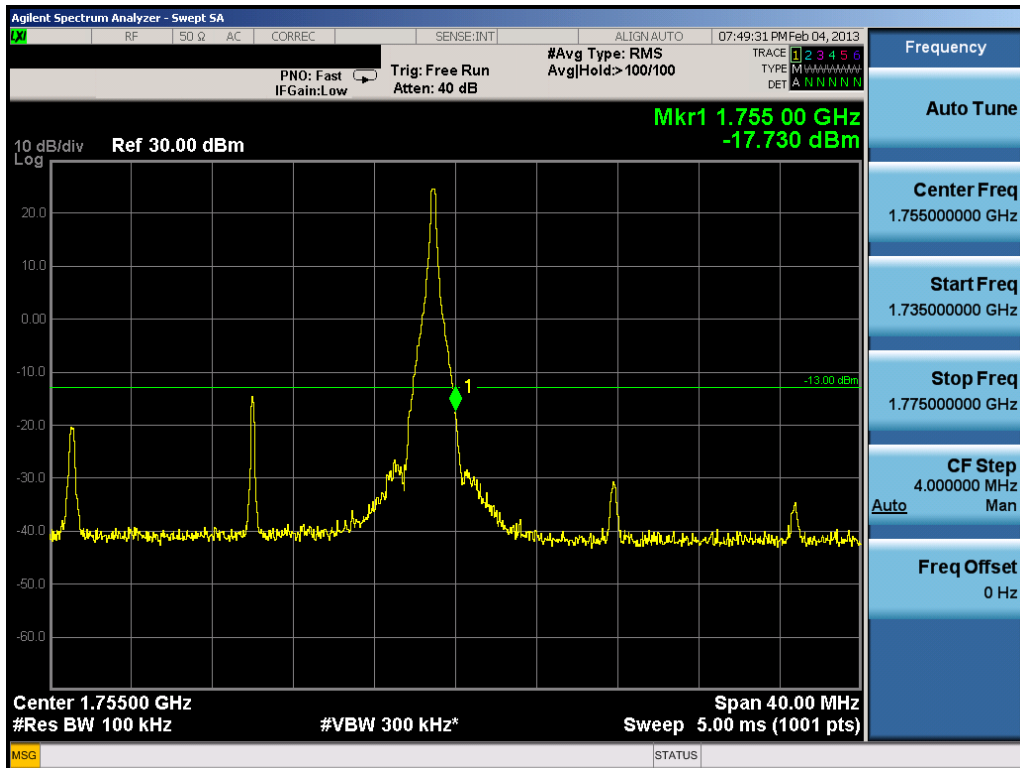


Plot 9-35. Upper Band Edge Plot (20.0MHz QPSK – RB Size 1, RB Offset 99)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 78 of 101

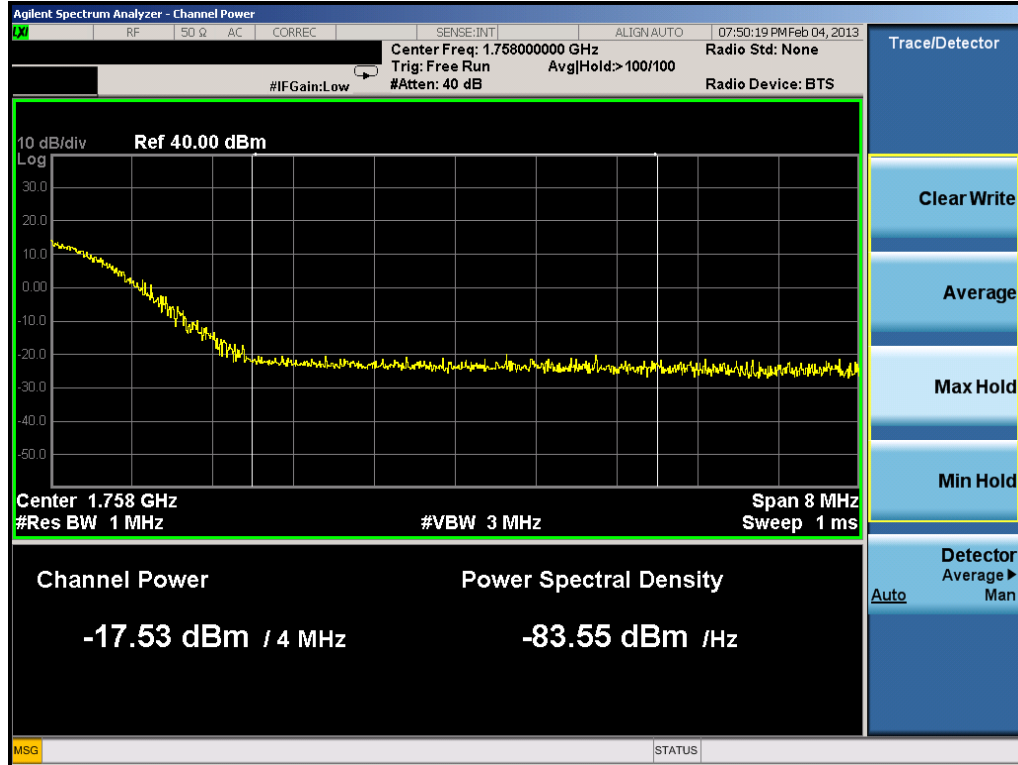


Plot 9-36. Upper Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)

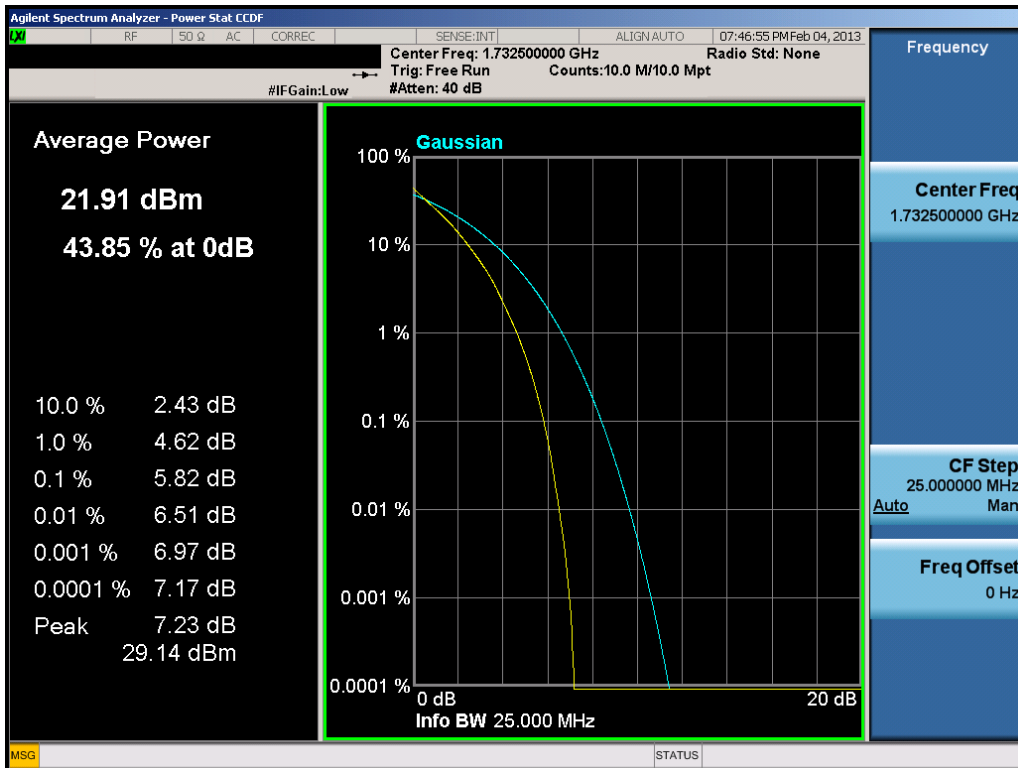

Plot 9-37. PAR Plot (20.0MHz QPSK – RB Size 100)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 79 of 101

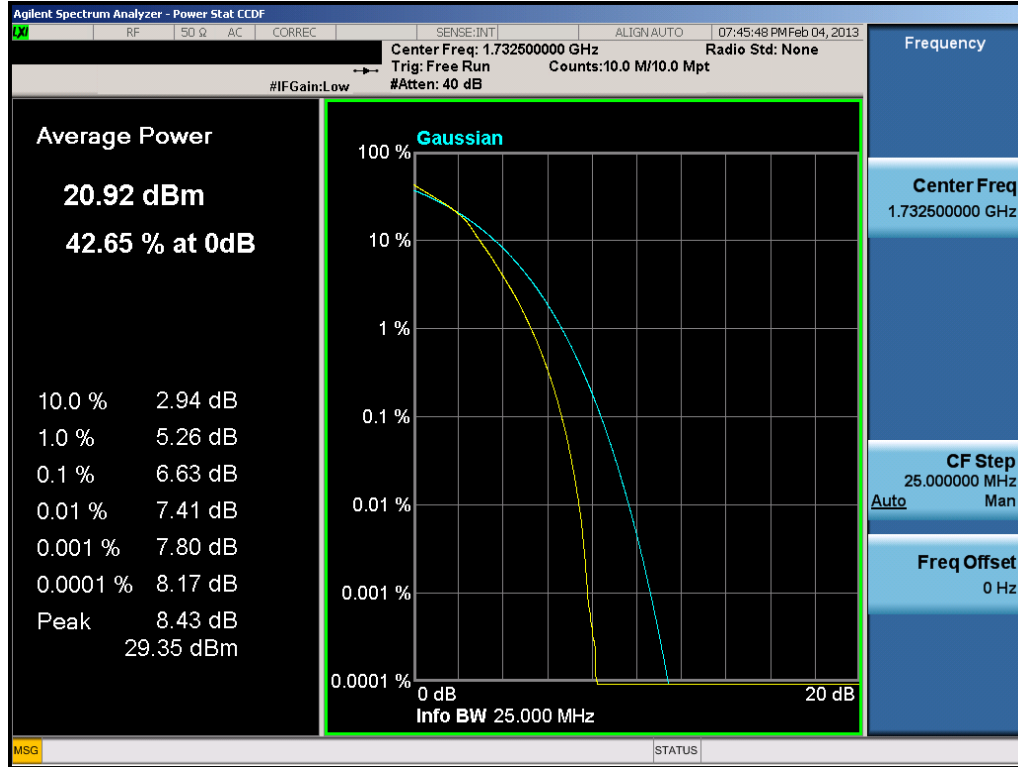

Plot 9-38. PAR Plot (20.0MHz 16-QAM – RB Size 100)


FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 80 of 101

10.0 BAND 2 PLOTS OF EMISSIONS

Note:


All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

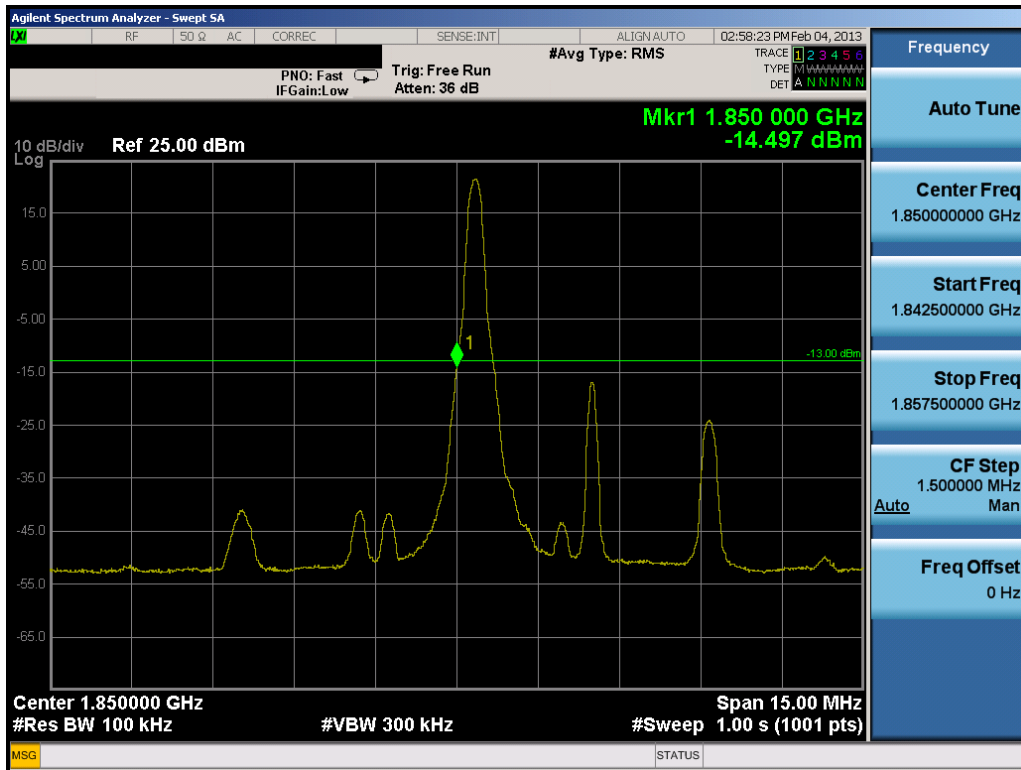For the band edge plots, the resolution BWs are greater than 1% of the occupied BW. The Occupied BW plots display the BW at full RB size. Plots that indicate an “RB Size 1” have a BW of approximately 180kHz. Therefore, RBW = 100kHz is greater than 1% of the occupied BW at RB Size 1.




Plot 10-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 81 of 101

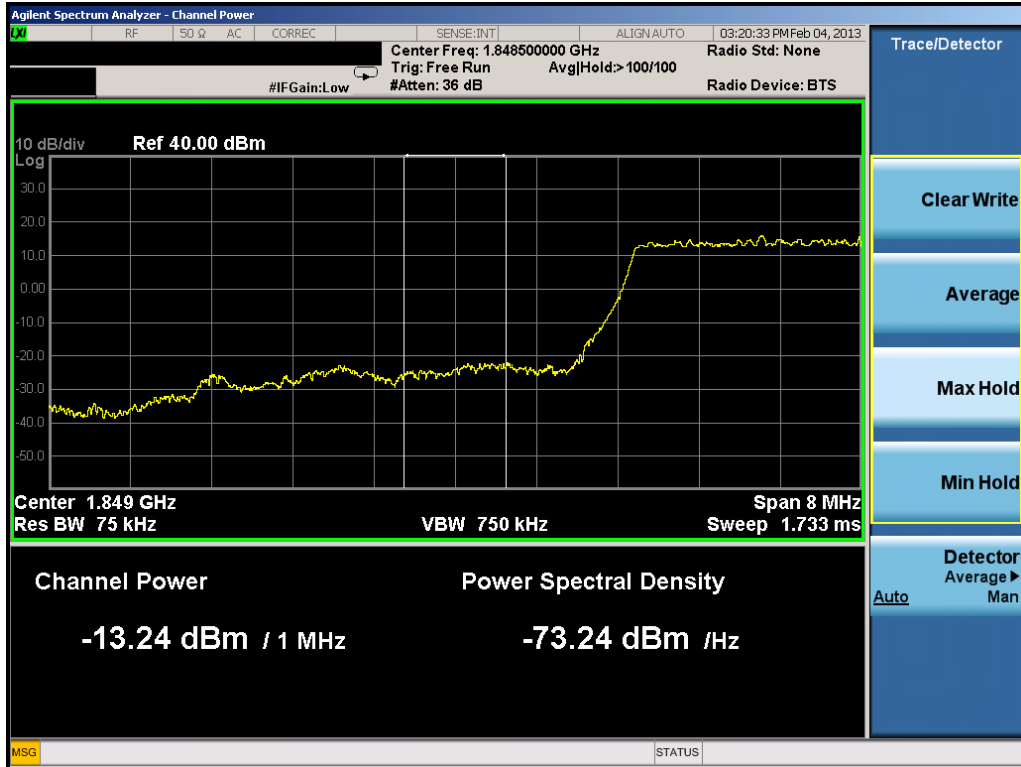


Plot 10-2. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

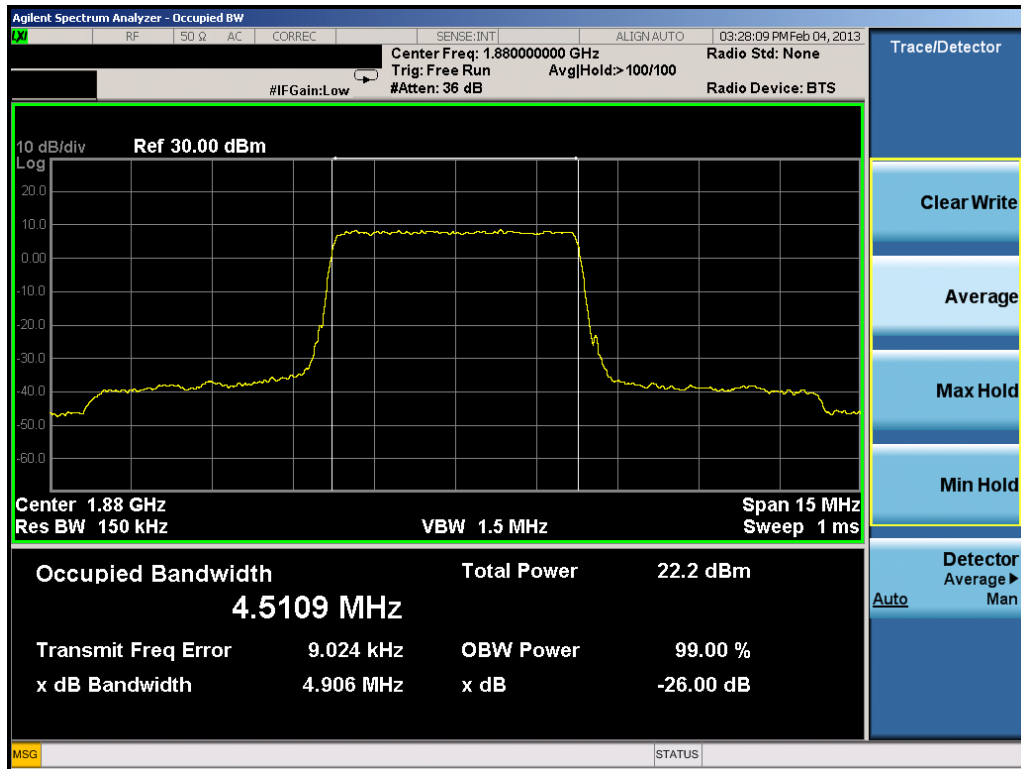


Plot 10-3. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 82 of 101

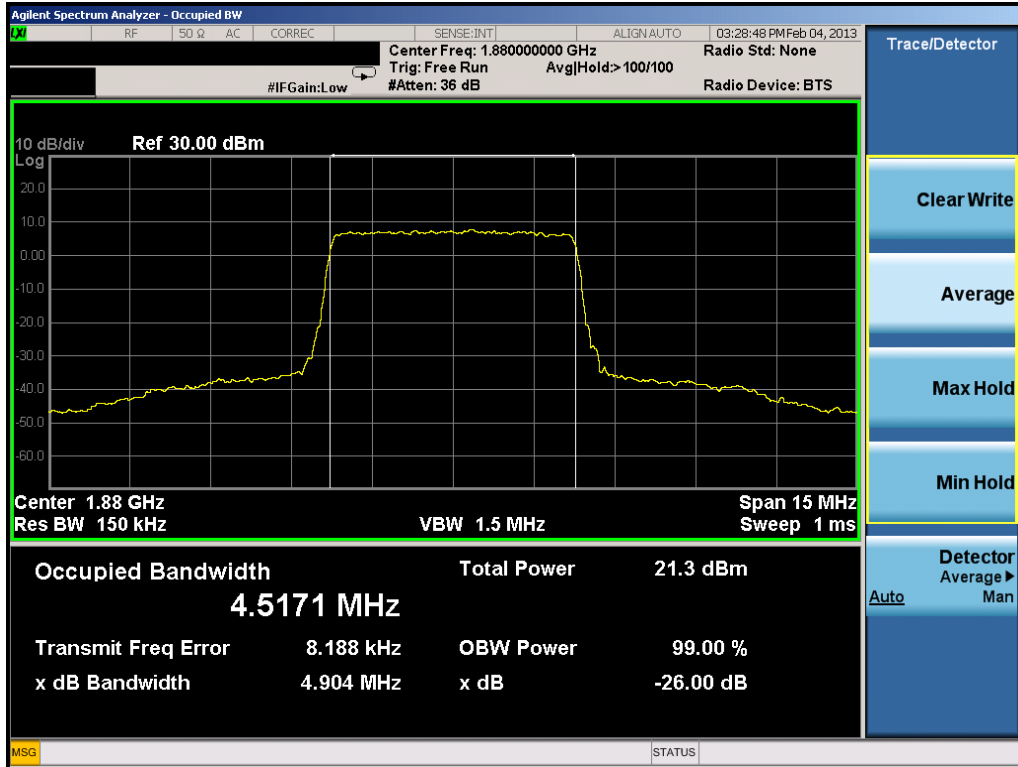


Plot 10-4. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

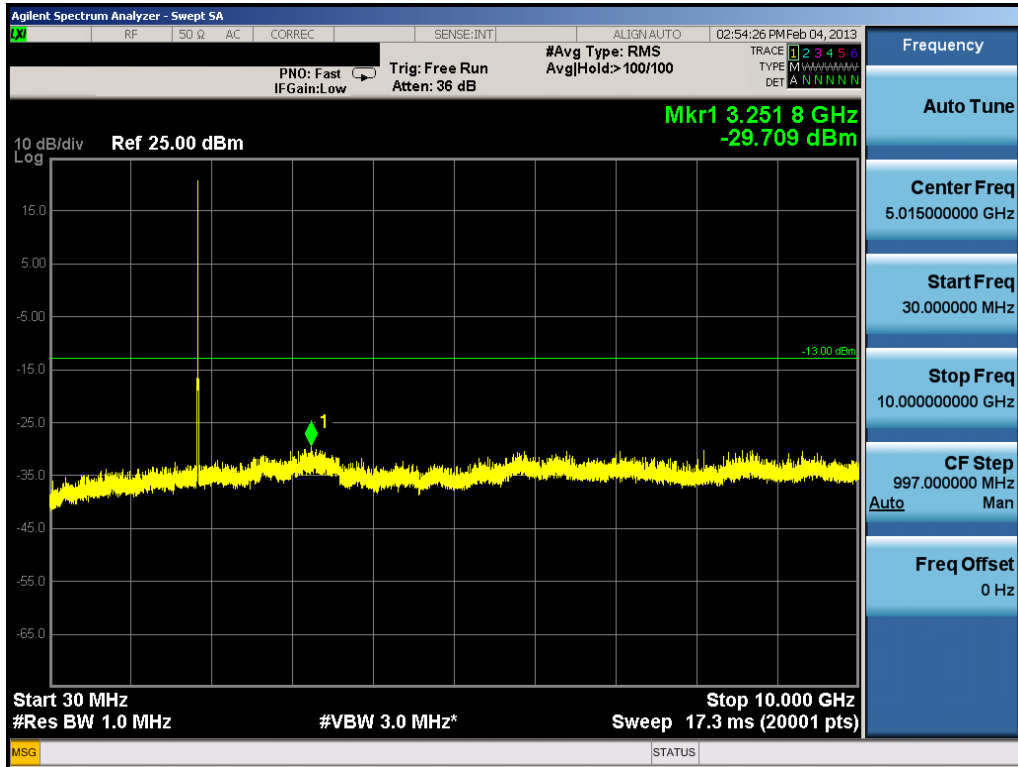


Plot 10-5. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 83 of 101

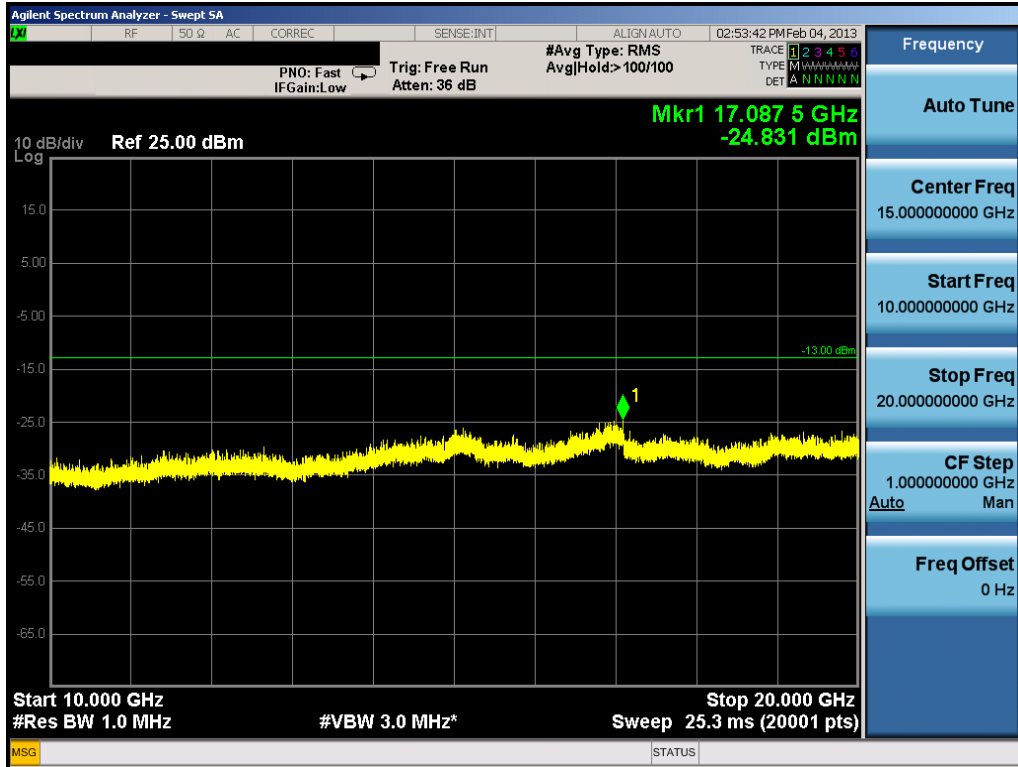


Plot 10-6. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

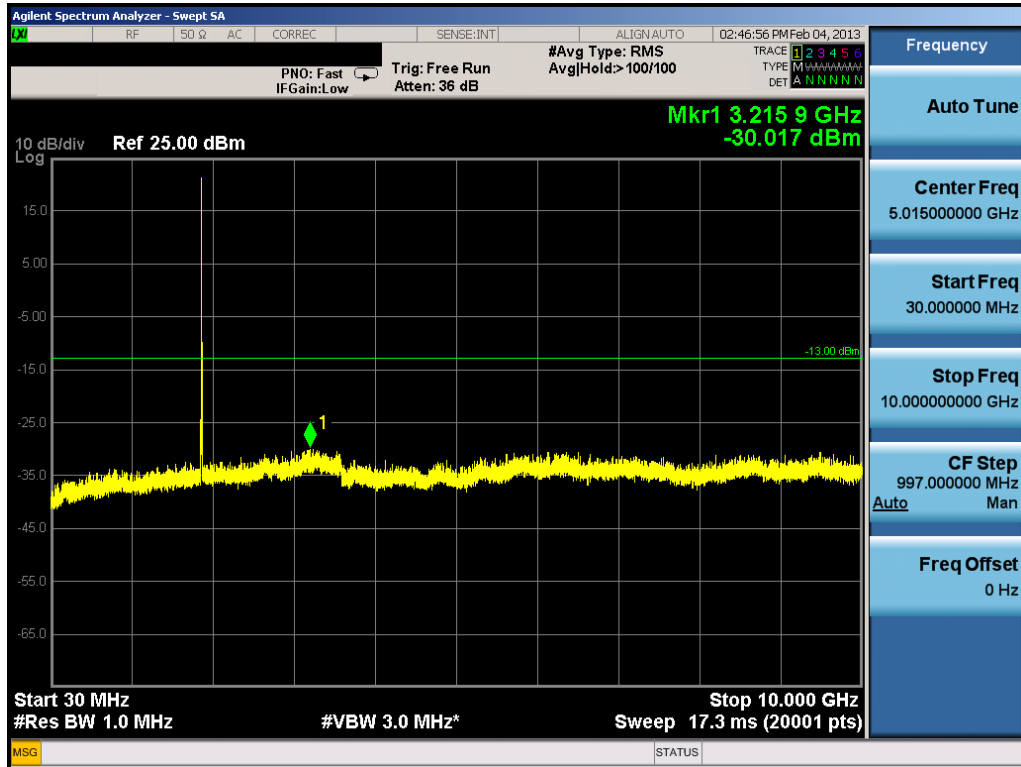


Plot 10-7. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 84 of 101

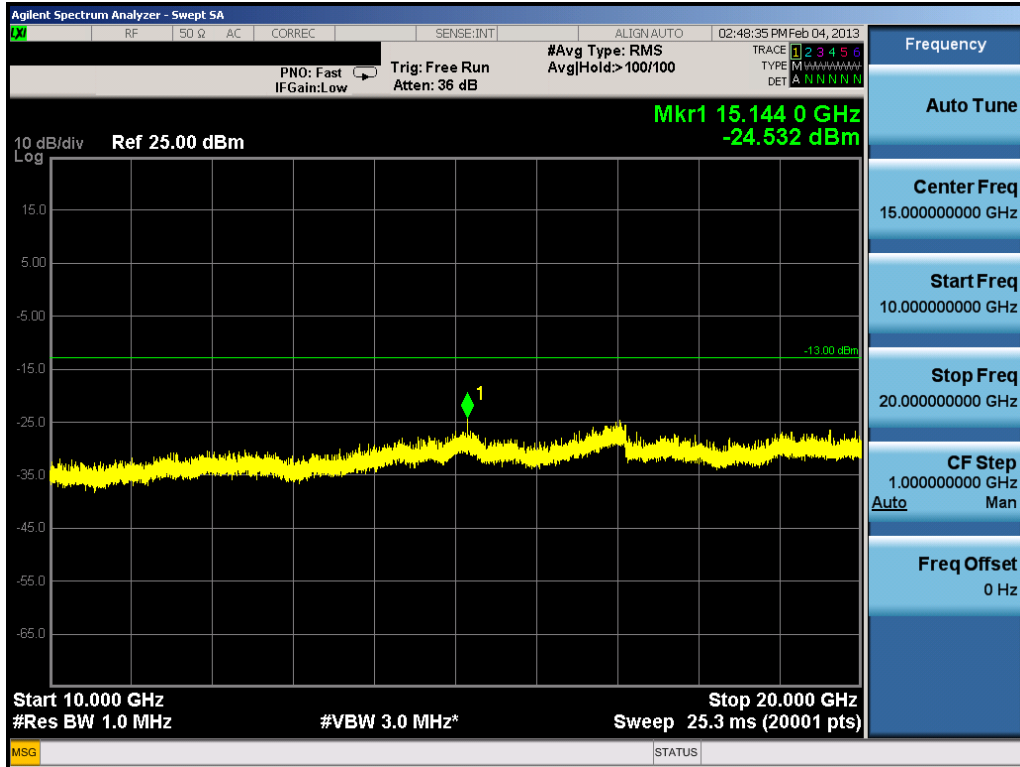


Plot 10-8. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

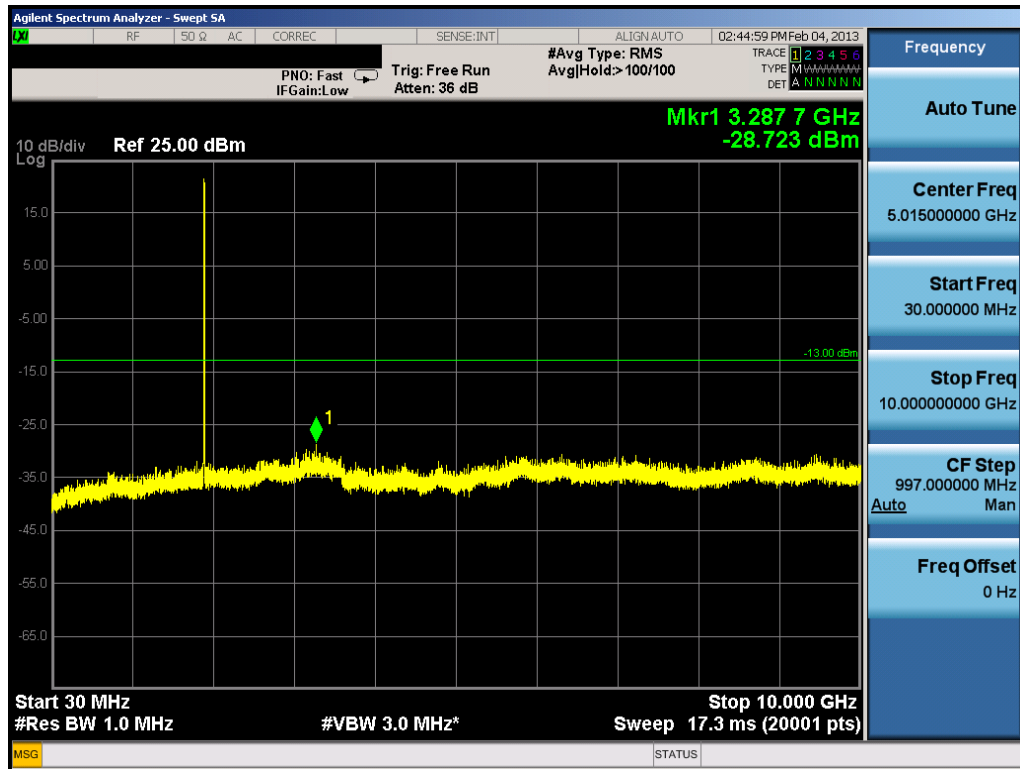


Plot 10-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 85 of 101

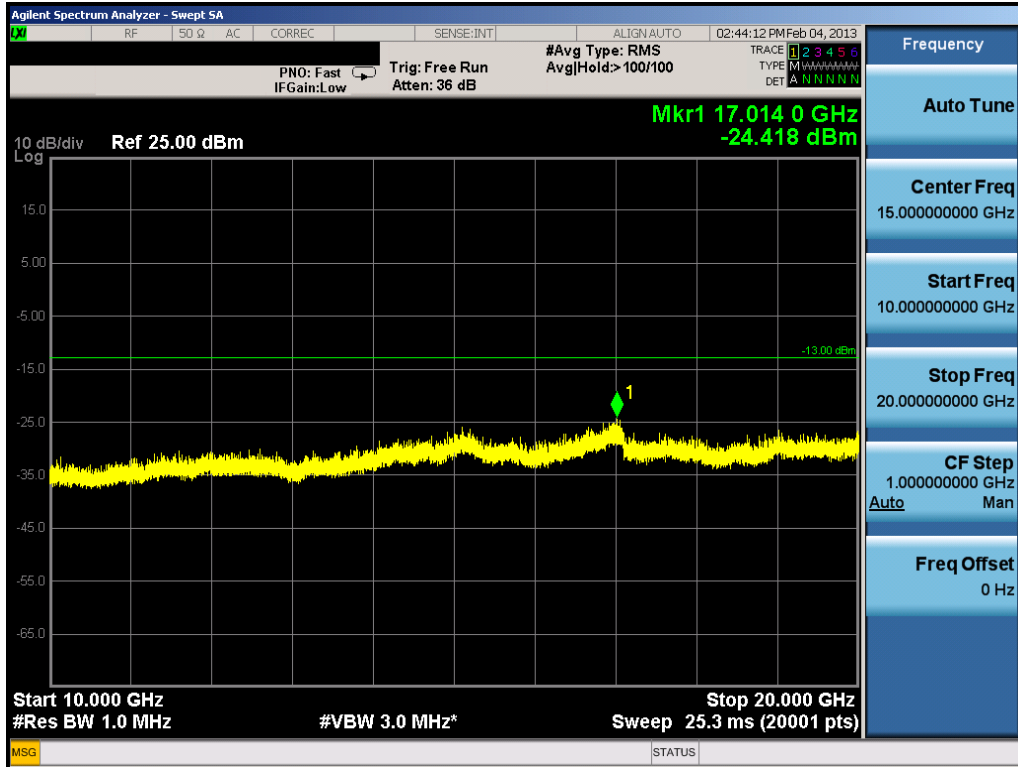

Plot 10-10. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

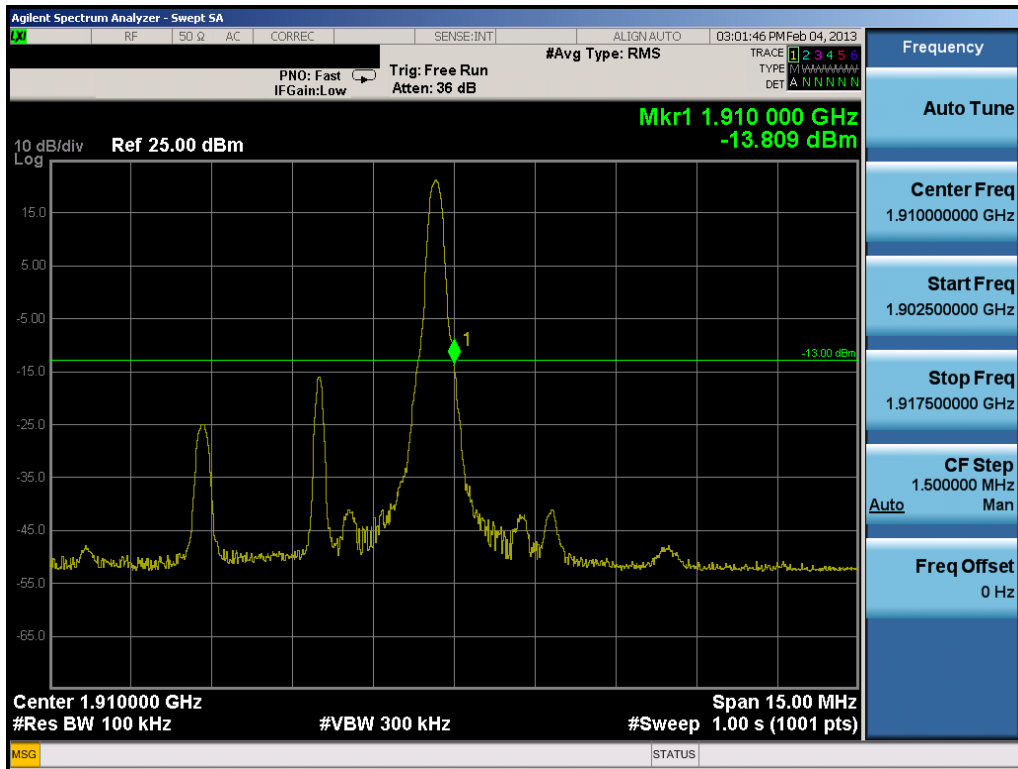


Plot 10-11. Upper Band Edge Plot (5.0MHz QPSK – RB Size 1, RB Offset 24)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 86 of 101




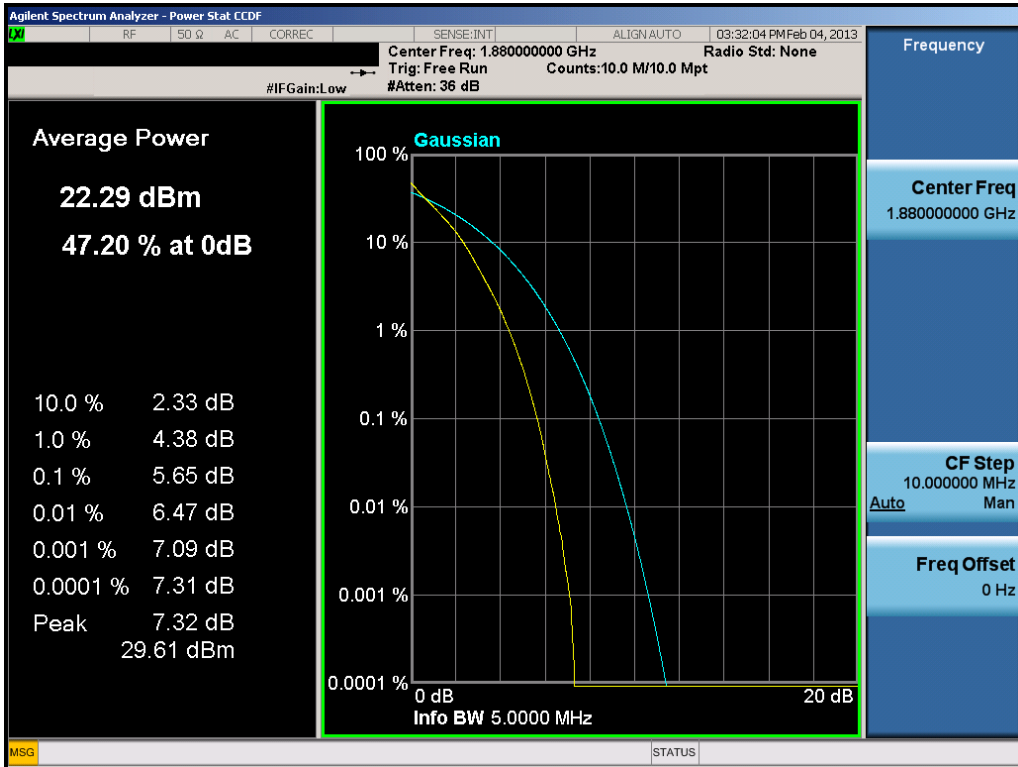Plot 10-12. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)




Plot 10-13. PAR Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 87 of 101

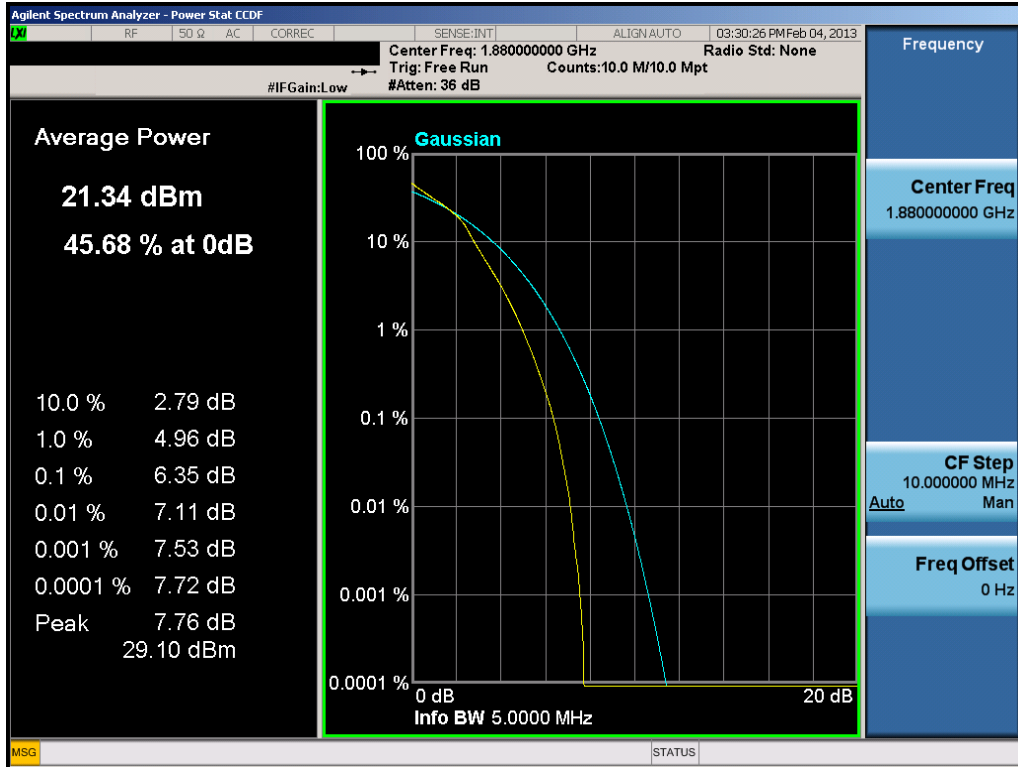


Plot 10-14. PAR Plot (5.0MHz 16-QAM – RB Size 25)

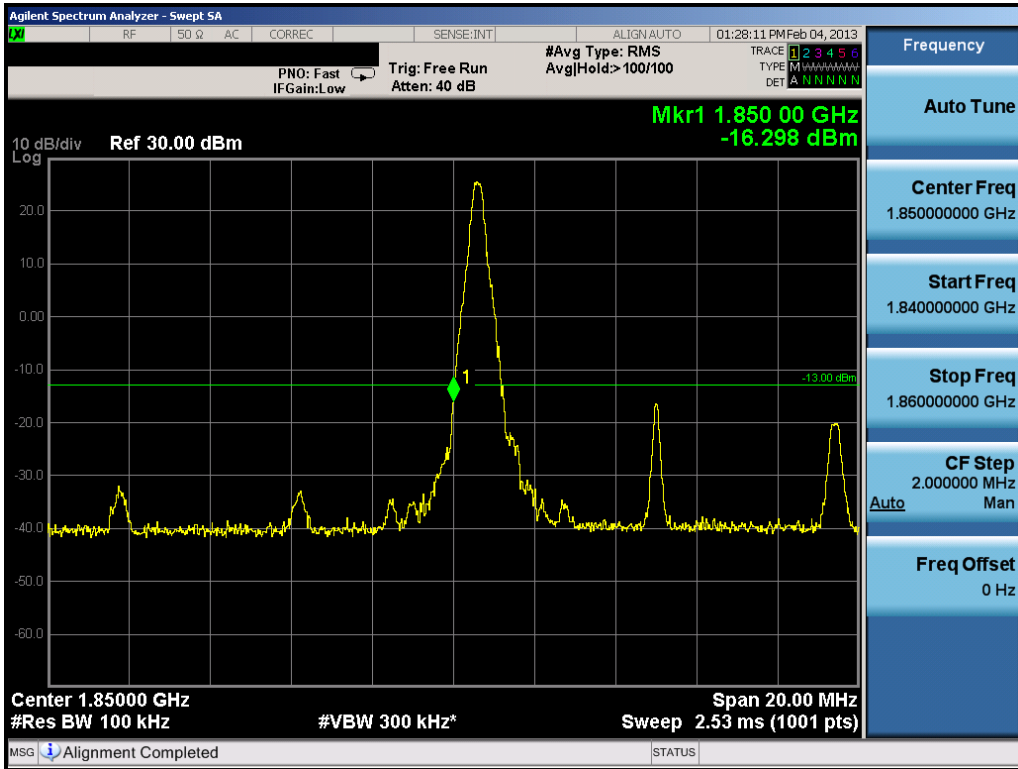


Plot 10-15. Lower Band Edge Plot (10.0MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 88 of 101

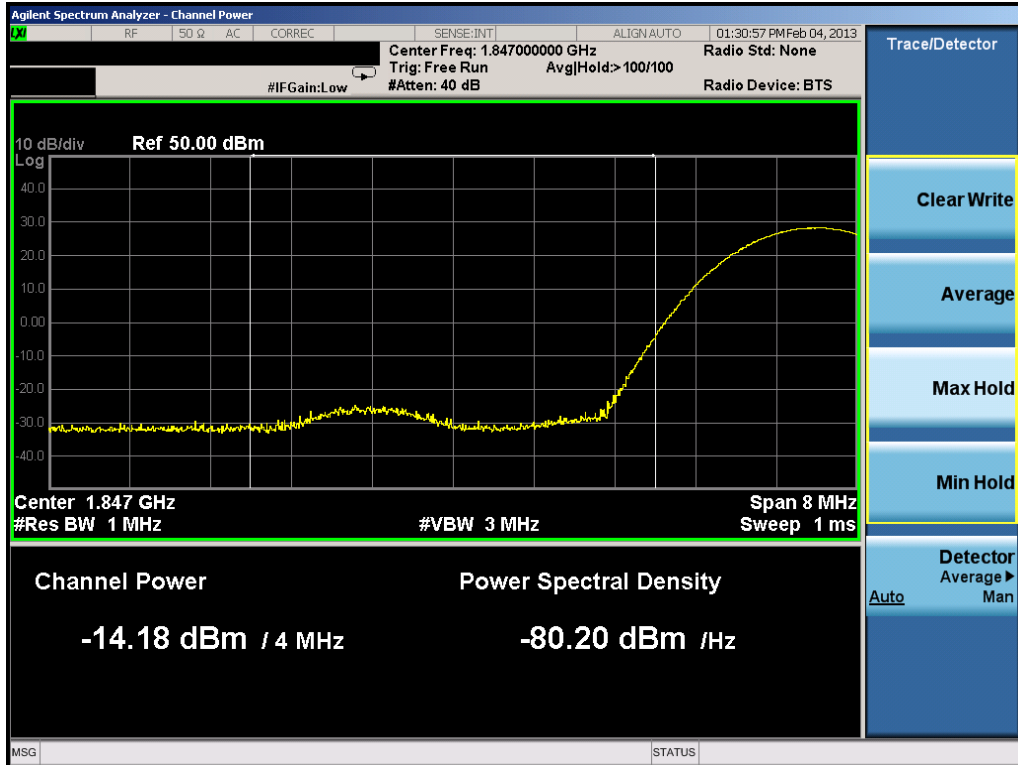


Plot 10-16. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 1, RB Offset 0)

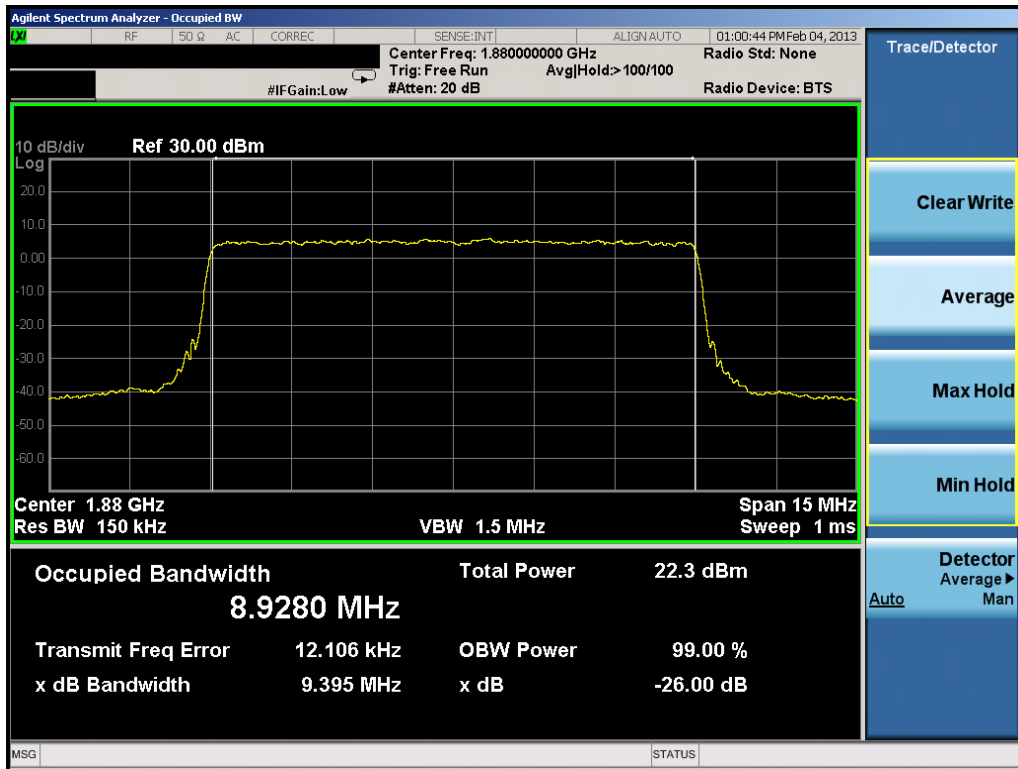


Plot 10-17. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 89 of 101

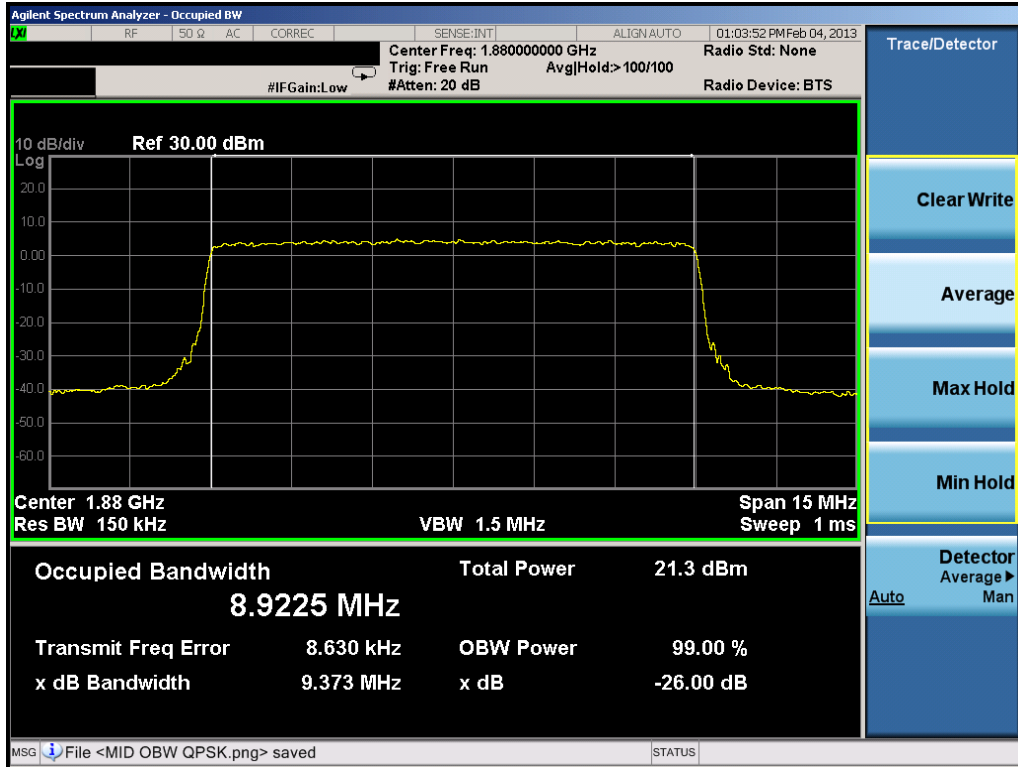


Plot 10-18. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

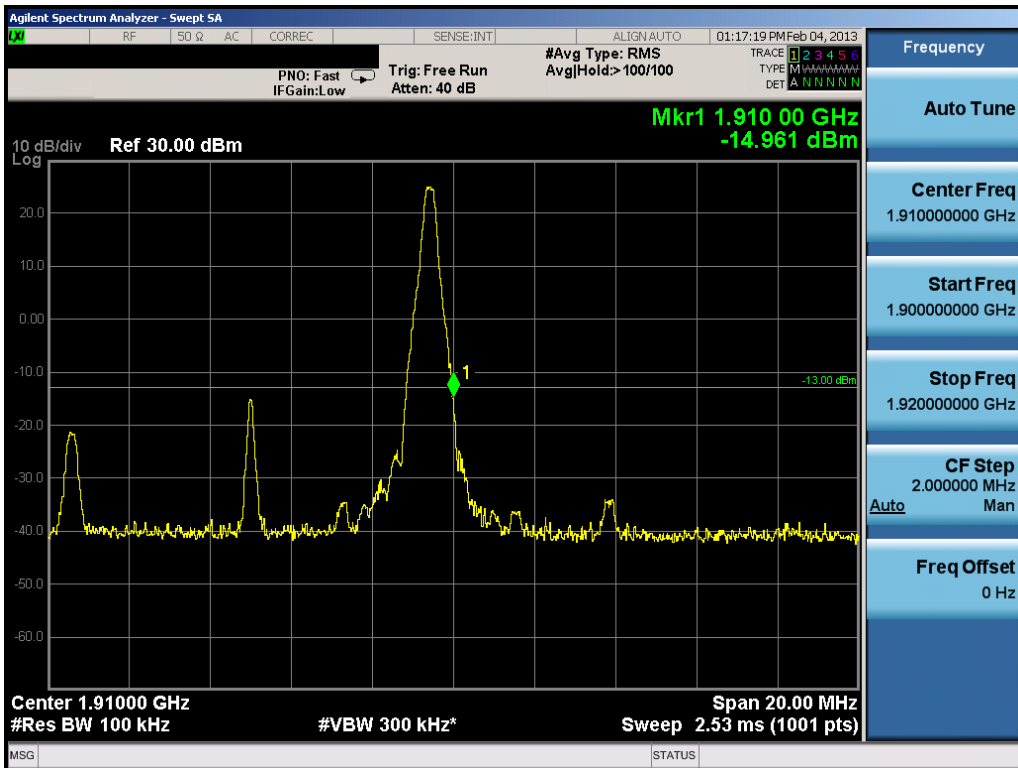


Plot 10-19. Upper Band Edge Plot (10.0MHz QPSK – RB Size 1, RB Offset 49)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 90 of 101

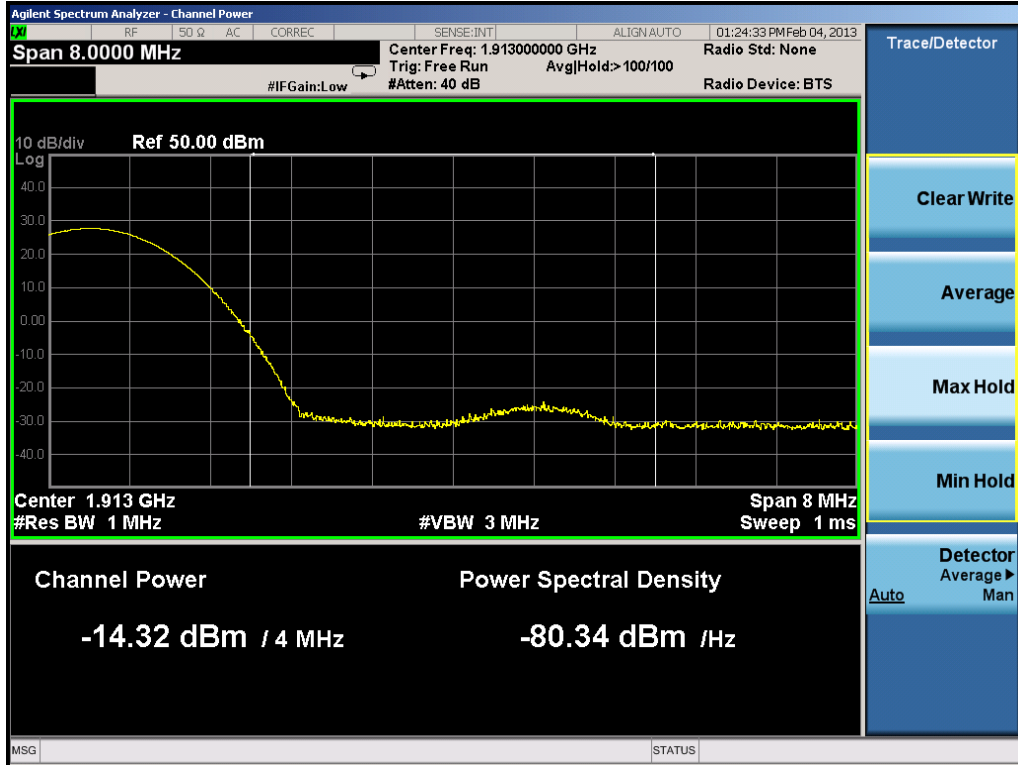


Plot 10-20. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 1, RB Offset 49)

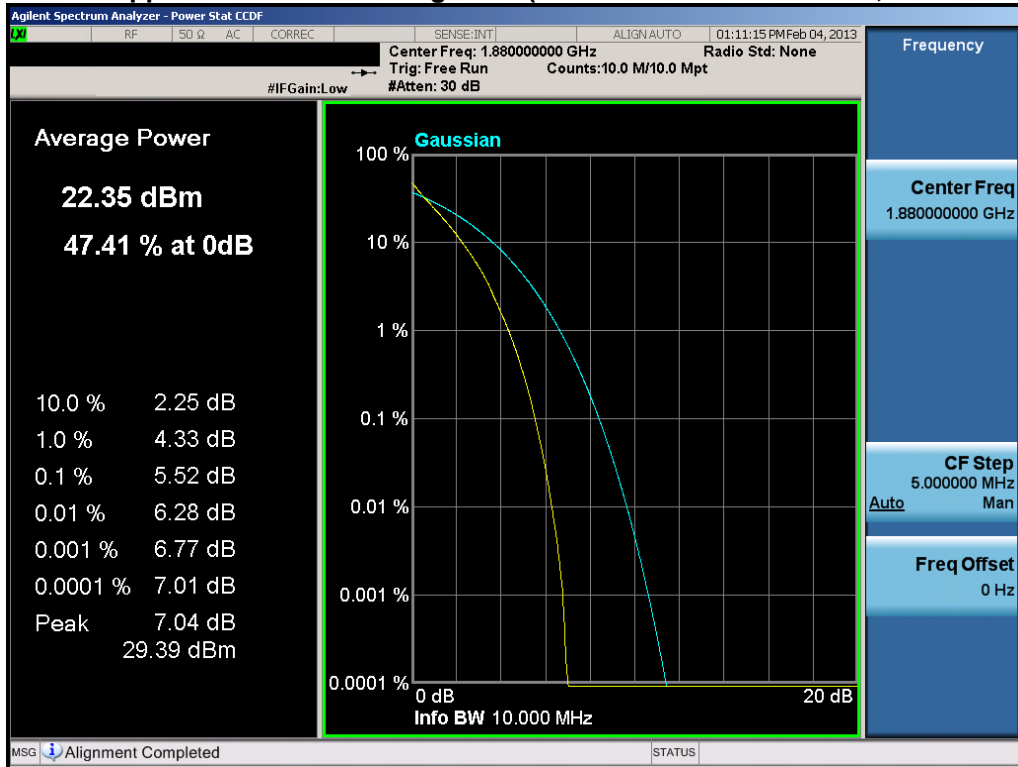


Plot 10-21. PAR Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 91 of 101

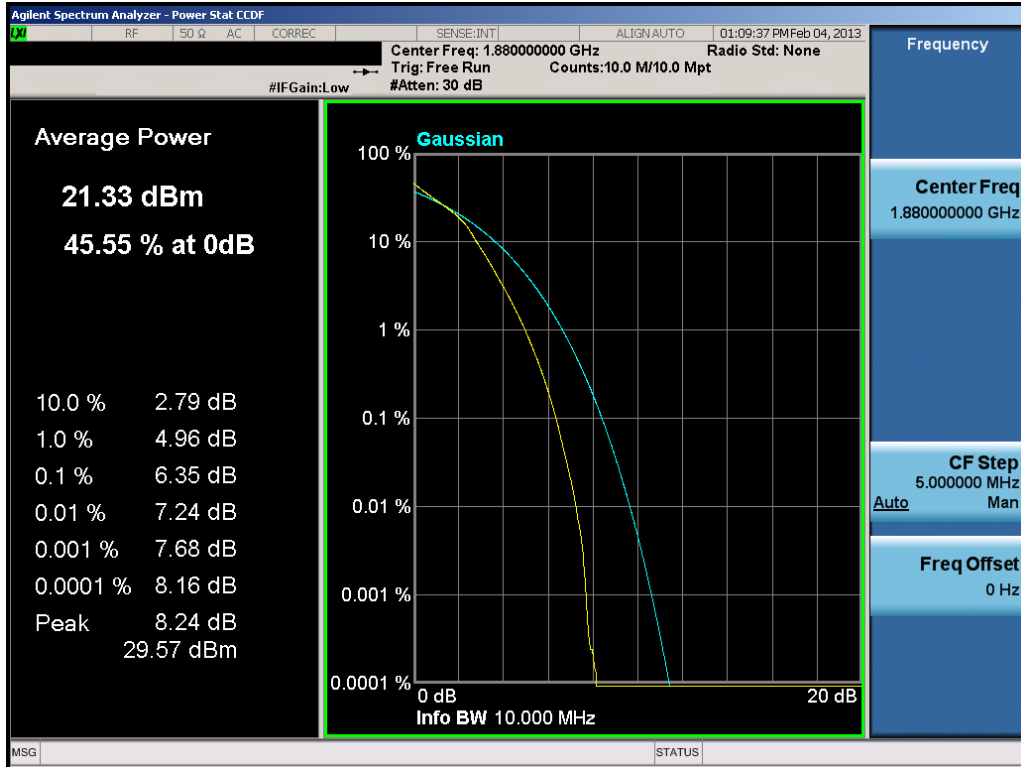


Plot 10-22. PAR Plot (10.0MHz 16-QAM – RB Size 50)

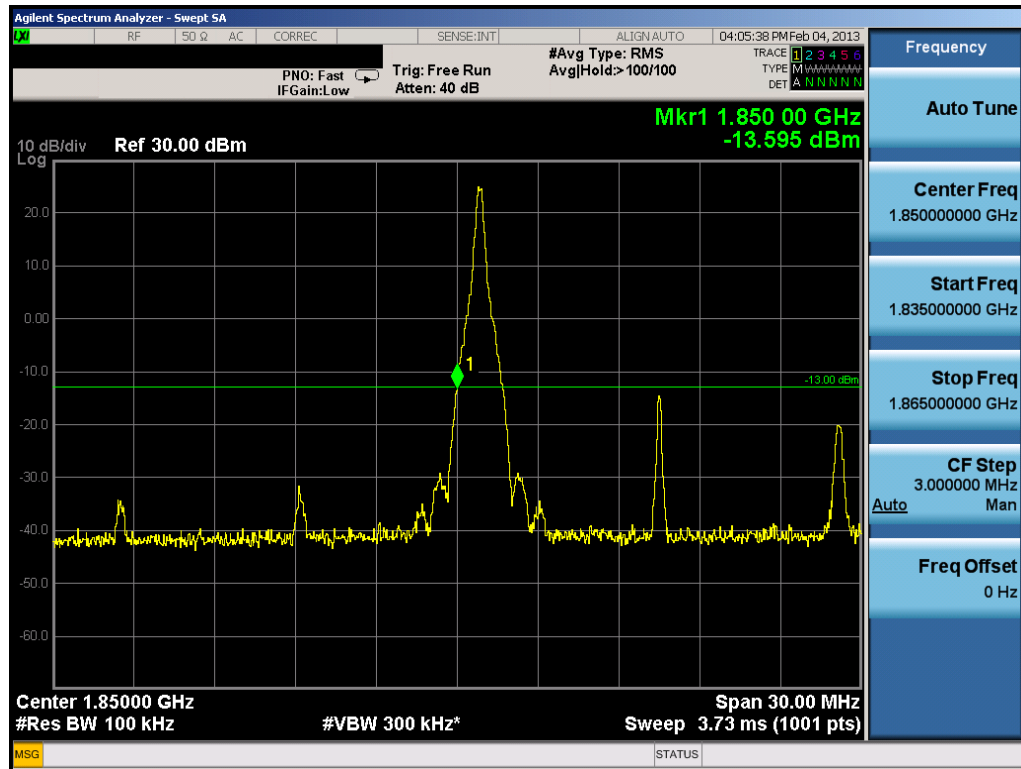


Plot 10-23. Lower Band Edge Plot (15.0MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 92 of 101

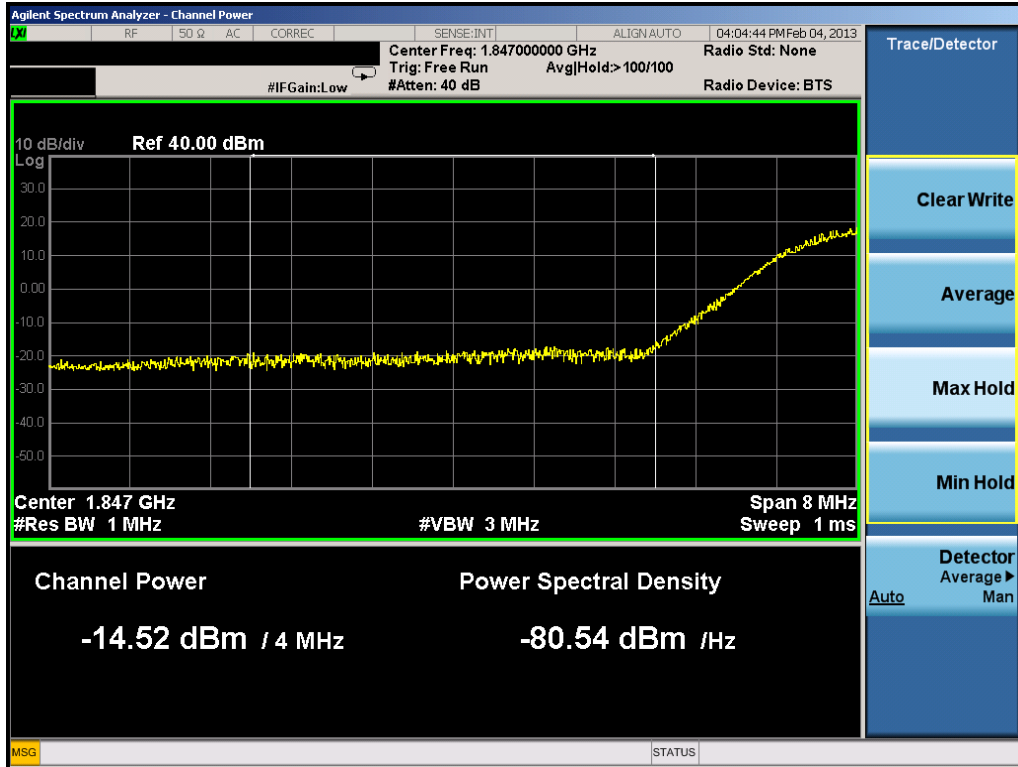


Plot 10-24. Lower Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)

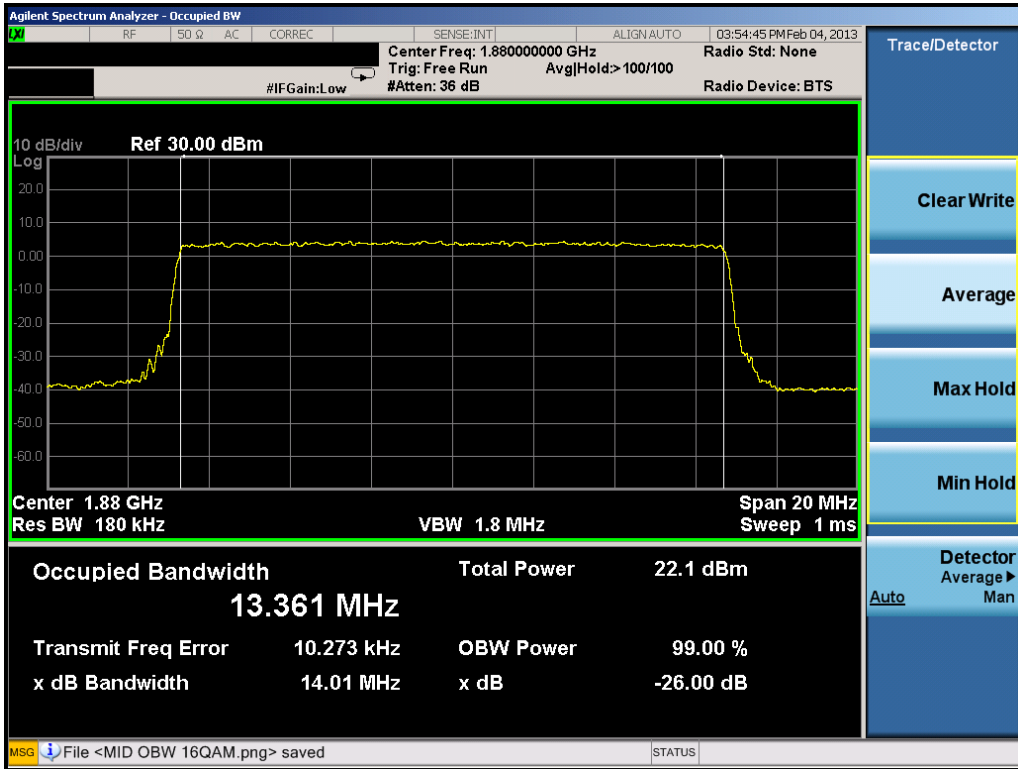


Plot 10-25. Occupied Bandwidth Plot (15.0MHz QPSK – RB Size 75)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 93 of 101

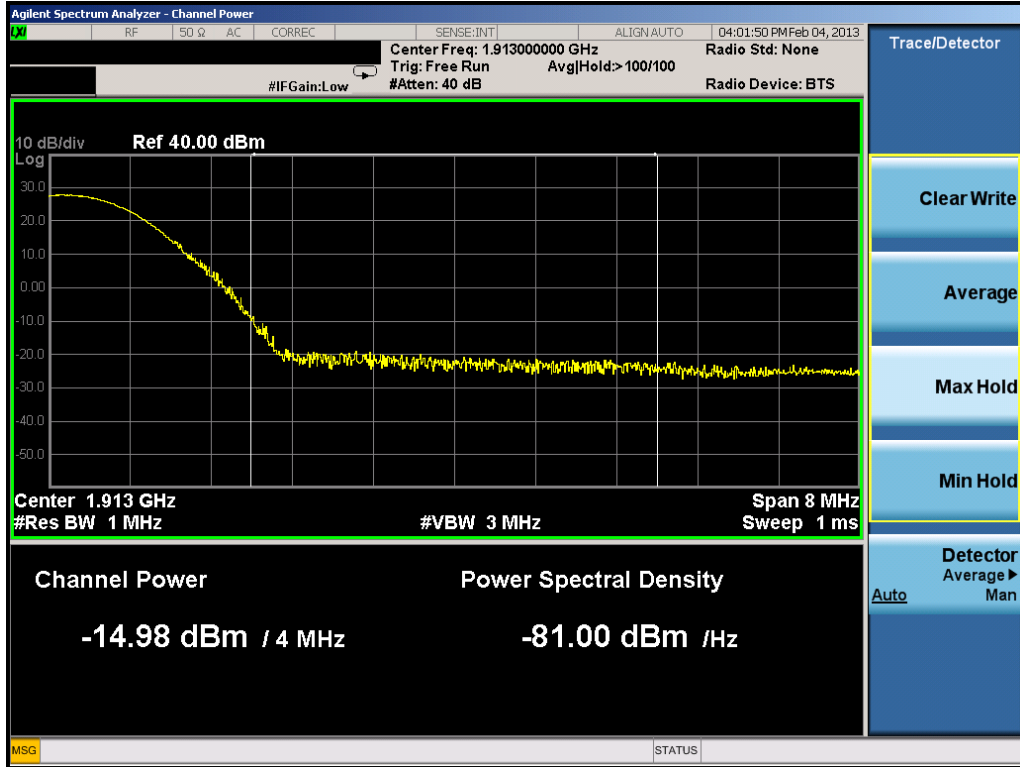


Plot 10-28. Upper Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)

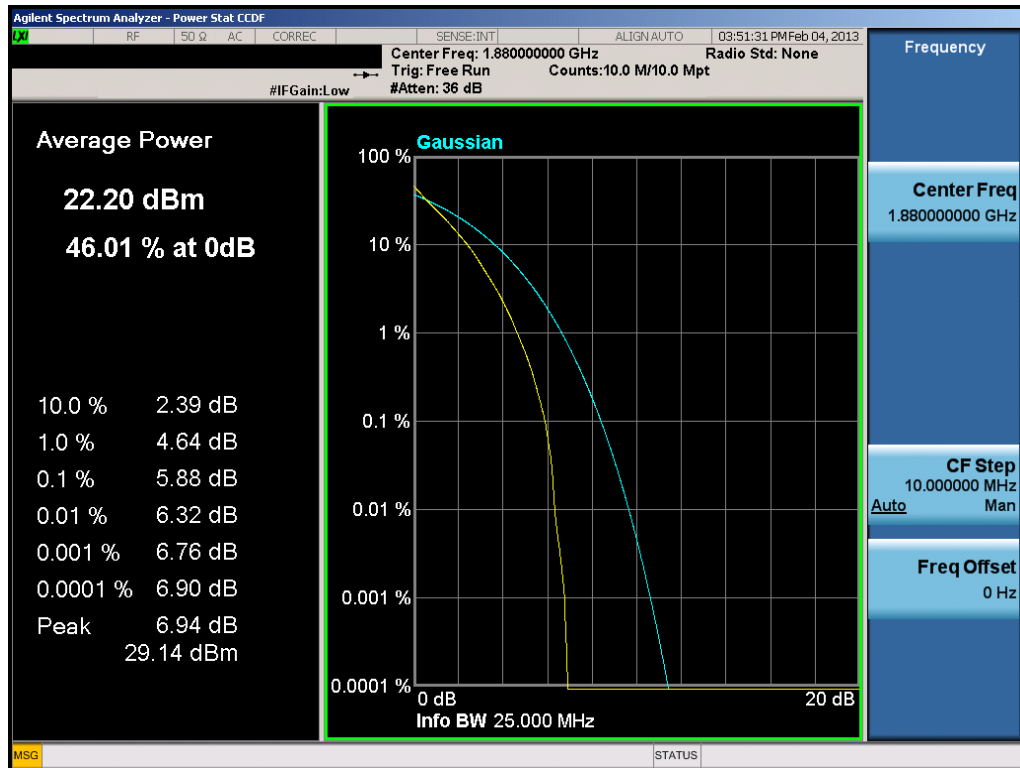


Plot 10-29. PAR Plot (15.0MHz QPSK – RB Size 75)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 95 of 101

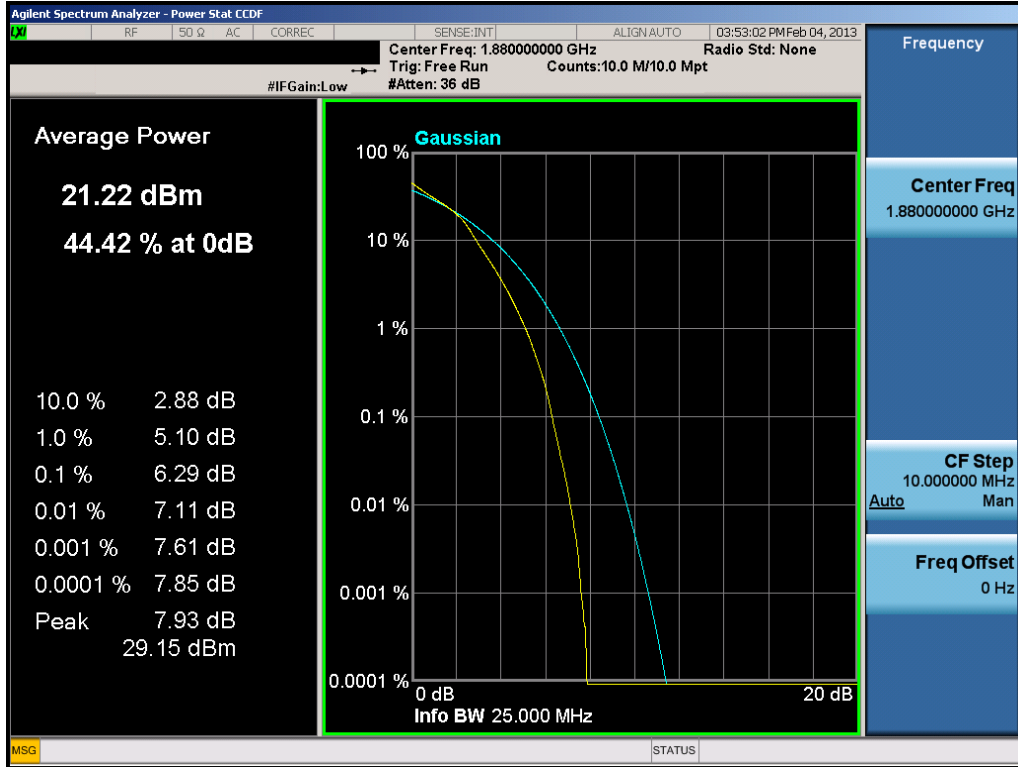


Plot 10-30. PAR Plot (15.0MHz 16-QAM – RB Size 75)

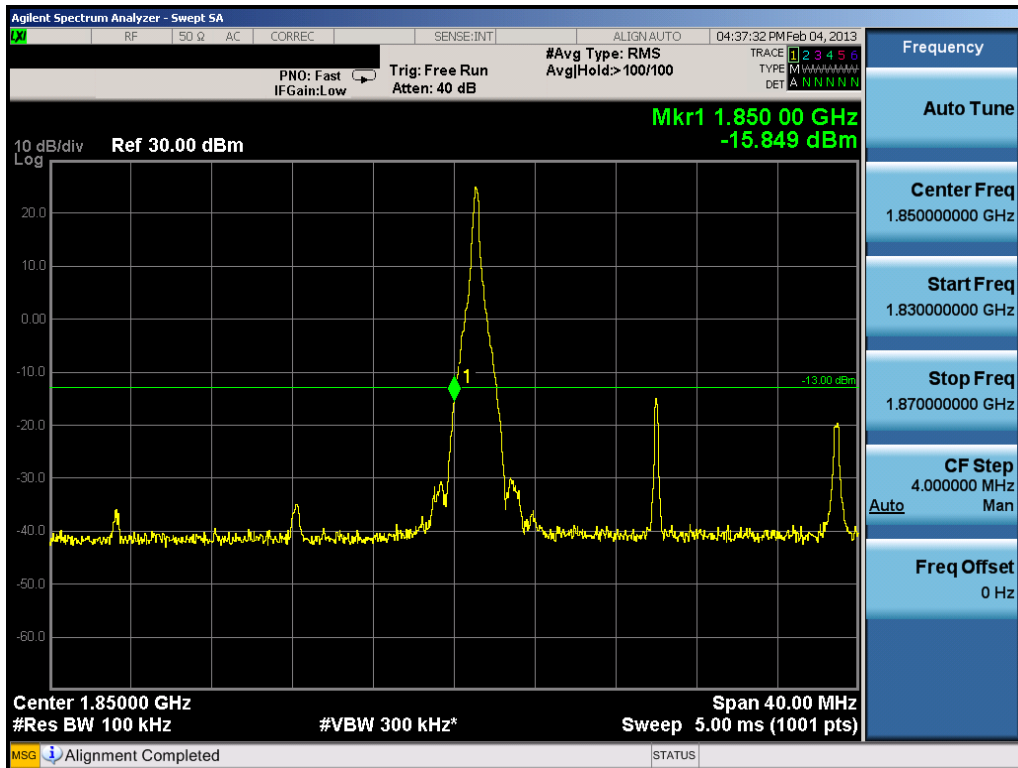


Plot 10-31. Lower Band Edge Plot (20.0MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSGHI337	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 96 of 101

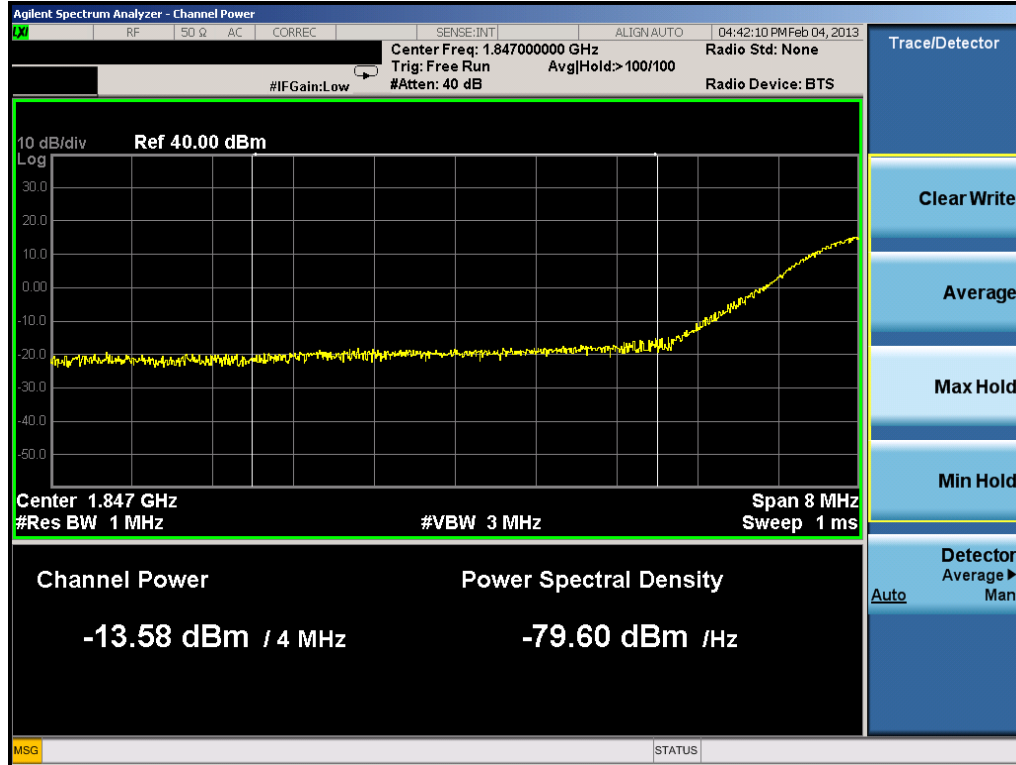


Plot 10-32. Lower Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)

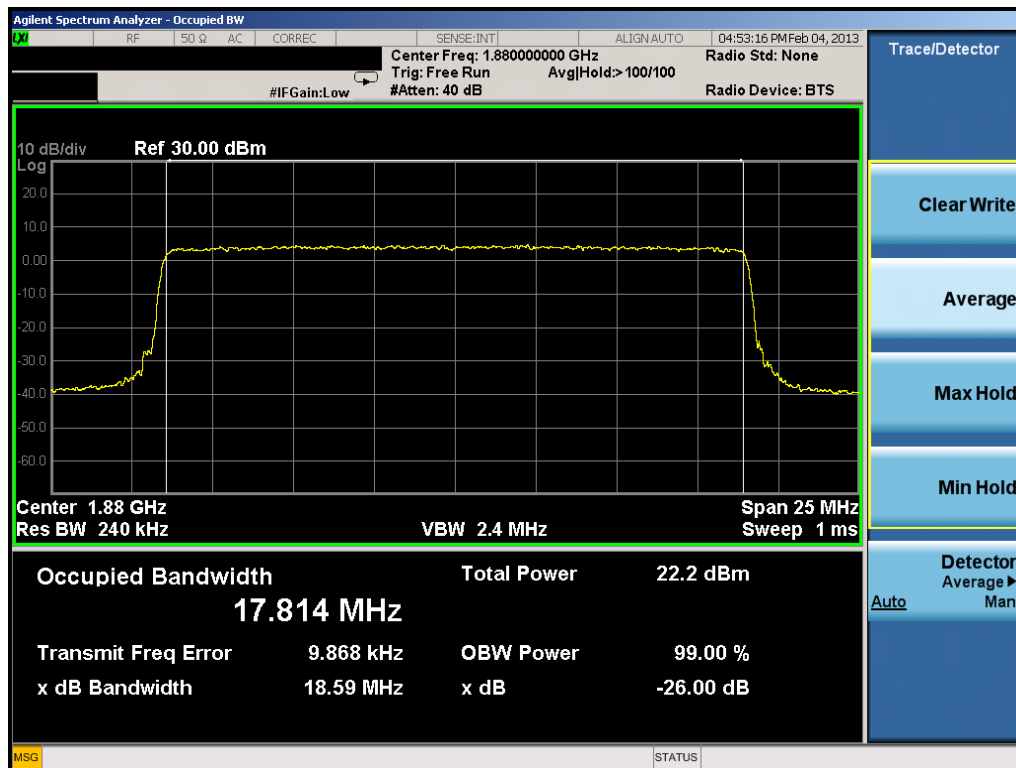


Plot 10-33. Occupied Bandwidth Plot (20.0MHz QPSK – RB Size 100)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 97 of 101

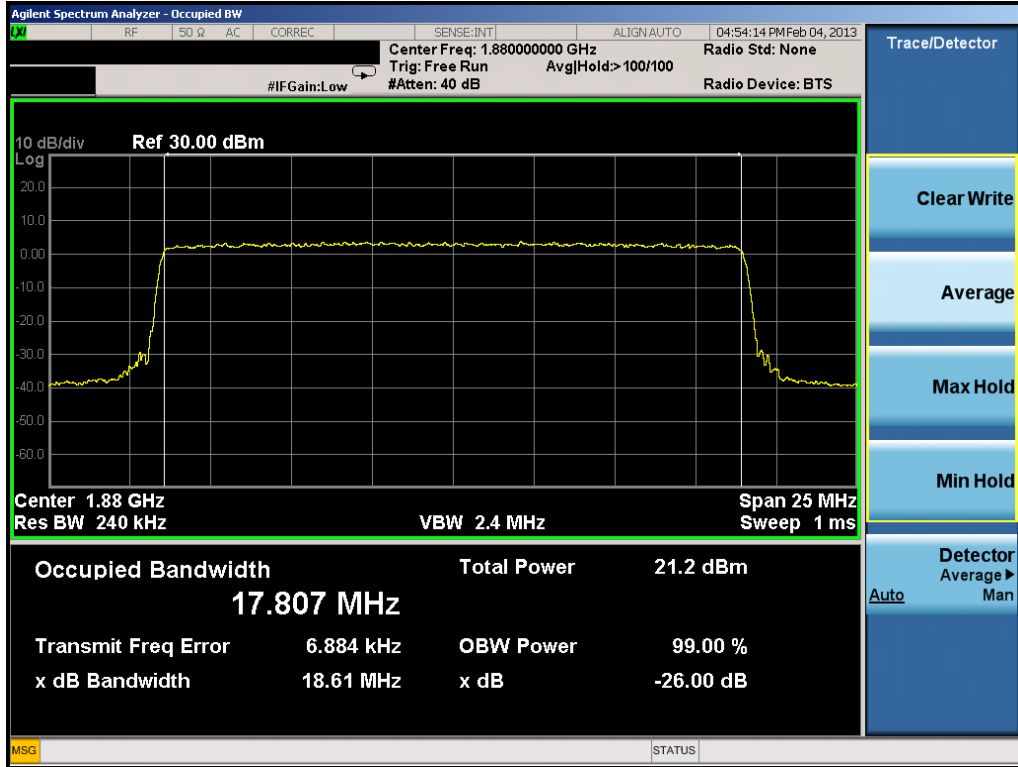


Plot 10-34. Occupied Bandwidth Plot (20.0MHz 16-QAM – RB Size 100)

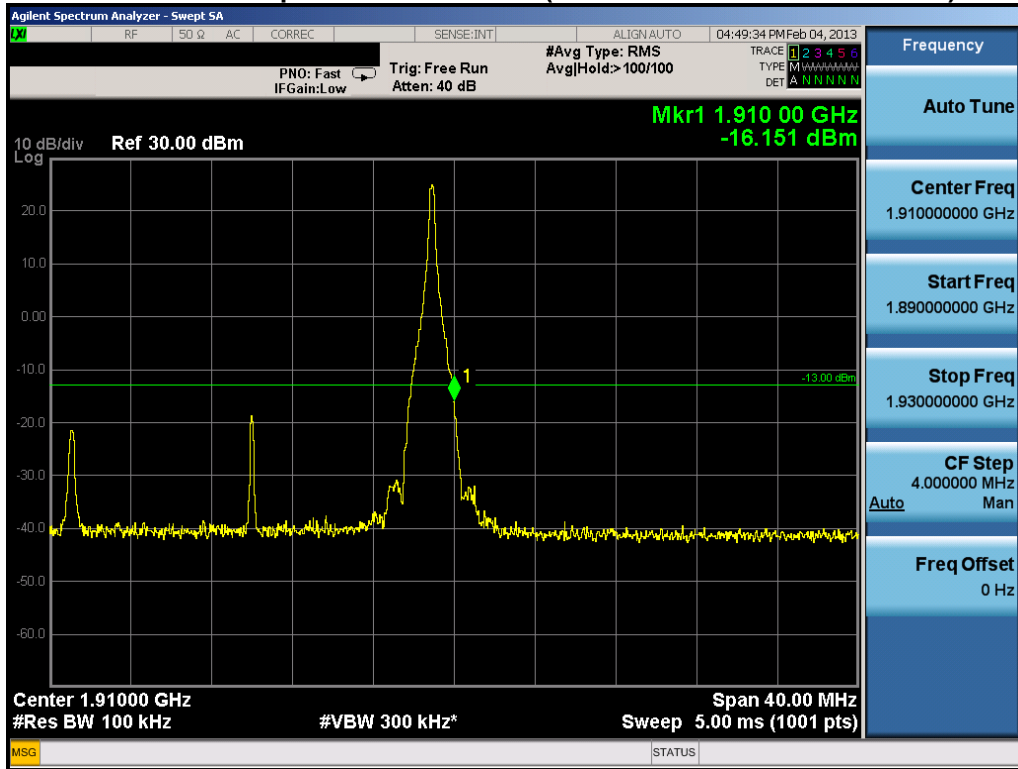


Plot 10-35. Upper Band Edge Plot (20.0MHz QPSK – RB Size 1, RB Offset 99)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 98 of 101

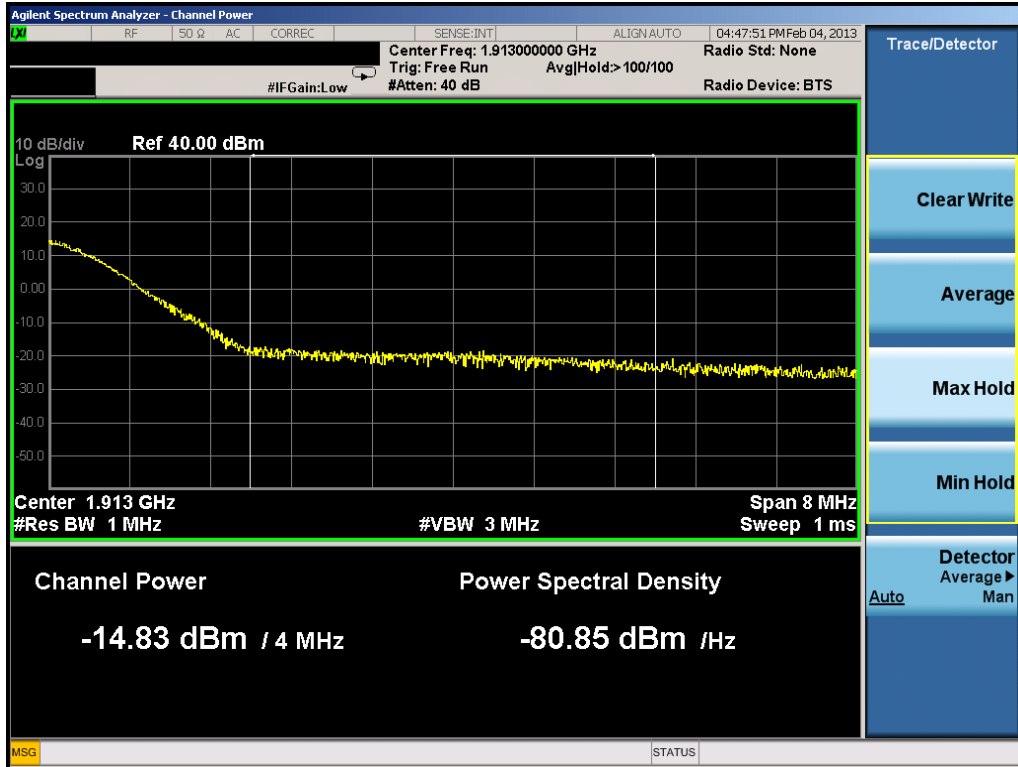


Plot 10-36. Upper Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)

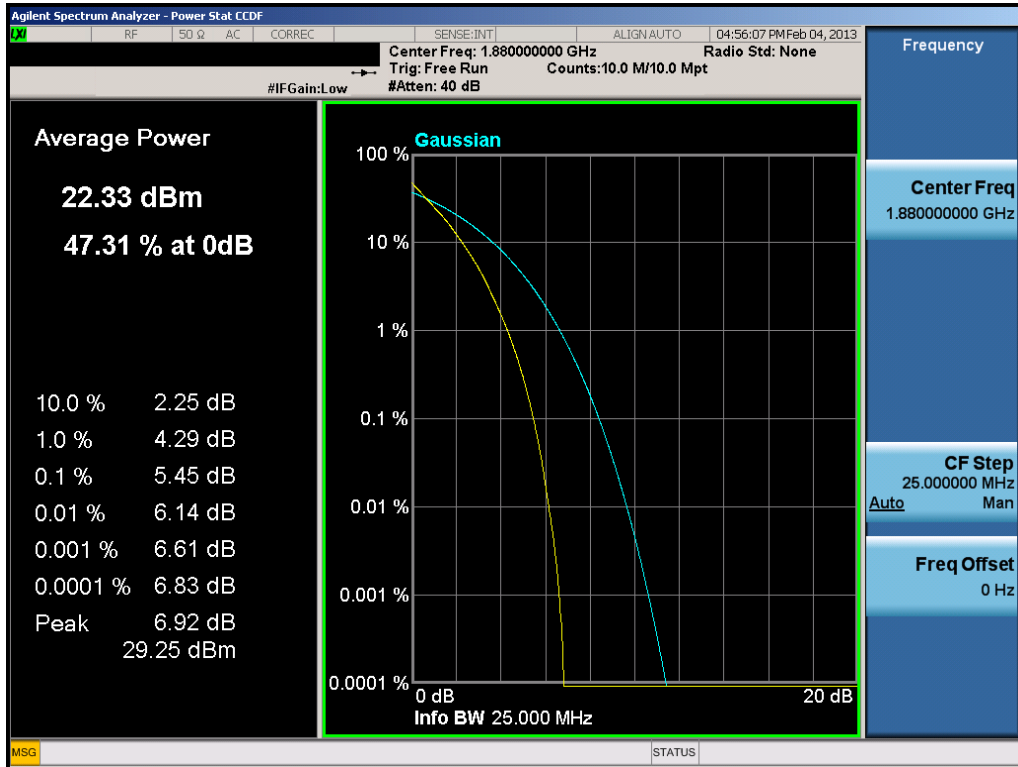

Plot 10-37. PAR Plot (20.0MHz QPSK – RB Size 100)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 99 of 101

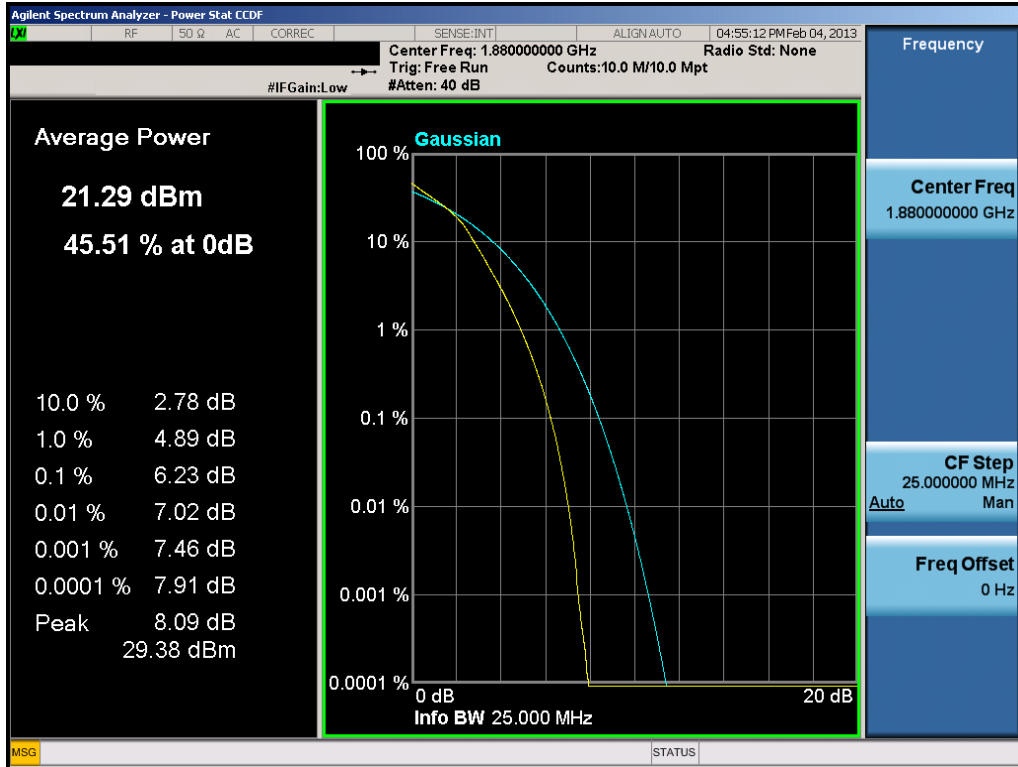



Plot 10-38. PAR Plot (20.0MHz 16-QAM – RB Size 100)

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset		Page 100 of 101

11.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSGHI337** complies with all the requirements of Parts 2, 22, 24, 27 of the FCC rules for LTE operation only.

FCC ID: A3LSGHI337		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1303140500.A3L	Test Dates: 1/31/2013 – 3/5/2013	EUT Type: Portable Handset	Page 101 of 101	