



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 24 & 27SUBPART CERTIFICATION REPORT

Model Tested: SGH-T379
FCC ID (Requested): A3LSGHT379
Report No: FI-116-R2
Job No: FI-116
Date issued: June 20, 2011

- Abstract -

All measurement reported here in accordance with FCC Rules, 47CFR
Part2, Part24, Part27

Prepared By

HK LEE - Test Engineer

Authorized By

WT JANG - Technical Manager

© Copyright SAMSUNG Electronics 2011



TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC Certification Information	3
1.1 §2.1033 General Information	3
2. INTRODUCTION	4
2.1 General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. FCC 3G MEASUREMENT PROCEDURES	7
5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power	8
5.2 Radiated Spurious & Harmonic Emission	9
5.3 Occupied Bandwidth	11
5.4 Peak-Average Ratio	11
5.5 Spurious and Harmonic Emissions at Antenna Terminal	11
5.5.1 Occupied Bandwidth Emission Limits	11
5.5.2 Conducted Spurious Emission	13
5.6 Frequency Stability / Temperature Variation	14
6. TEST DATA	15
6.1 Equivalent Isotropic Radiated Power(E.I.R.P.).....	15
6.2 Equivalent Isotropic Radiated Power(E.I.R.P.).....	16
6.3 PCS WCDMA Radiated Spurious & Harmonic measurement	17
6.4 AWS WCDMA Radiated Spurious & Harmonic measurement.....	18
6.5 PCS WCDMA Radiated Spurious & Harmonic Conversion Table	19
6.6 AWS WCDMA Radiated Spurious & Harmonic Conversion Table	20
6.7 Frequency Stability.....	21
6.7.1 PCS WCDMA Frequency Stability Table	21
6.7.2 AWS WCDMA Frequency Stability Table.....	22
6.7.3 PCS WCDMA Frequency Stability Graph.....	23
6.7.4 AWS WCDMA Frequency Stability Graph	25
7. SAMPLE CALCULATION	27
7.1 Emission Designator	27
8. CONCLUSION	28
9. TEST PLOT	29



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1 §2.1033 General Information

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID: A3LSGHT379
- Model: SGH-T379
- Quantity: Quantity production is planned
- Emission Designators: 4M21F9W(PCS WCDMA),4M21F9W(AWS WCDMA)
- Tx Freq. Range: 1852.4 - 1907.6 MHz (PCS WCDMA)
1712.4 - 1752.5 MHz (AWS WCDMA)
- Rx Freq. Range: 1932.4 - 1987.6 MHz (PCS WCDMA)
2112.4 - 2152.5 MHz (AWS WCDMA)
- Max. Power Rating: 0.252 W PCS WCDMA(24.01dBm)
0.230 W AWS WCDMA(23.62 dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: 850/1900 GSM/GPRS/EDGE and AWS/PSC WCDMA/HSDPA
Phone with Bluetooth
- Modulation(s): WCDMA
- Frequency Tolerance: $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s): §24(E), §27(H), §2.
- Dates of Test: June 16-17, 2011
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FI-116-R2

2. INTRODUCTION

2.1 General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

- End of page -

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2011-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2012-03-08
Network Analyzer	8753E	JP38160590	2011-06-18
Pre-Amplifier	8449B	3008A00691	2011-12-15
Communication test set	8960	MY47510060	2012-03-08
	8960	GB42230535	2011-12-23
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2011-09-23
	BBHA9120	9120D-637	2011-09-24
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	UHA 9105	9105-2413	2012-07-15
Receive Antenna	HL040	353255/019	2011-10-26
Power Supply	E3640A	MY40003595	2012-05-27
	E3632A	MY40022438	2012-03-08
Divider	11636B	51946	2011-06-25
	11636B	51942	2011-07-09
	11636B	56918	2011-08-31
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2011-11-15
	SH-241	92000548	2011-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. FCC 3G MEASUREMENT PROCEDURES

The maximum output power is a measure of the maximum power the UE can transmit (i.e. the actual power as would be measured assuming no measurement error) in a band width of at least $(1+\alpha)$ times the chip rate of the radio access mode

The default test configuration is configure an established radio link between the UE and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. Maximum output is verified according to 3GPP TS 34.121 Section 5.2

1. Configure TCP (Transmit Power Control) set to "All 1"s.
2. RMC and AMR connections at 12.2kbps are measured under 3.4kbps SRB (signaling radio bearer)
3. Measure the mean power of the UE in a bandwidth of at least $(1+\alpha)$ times the chip rate of the radio access mode. The mean power shall be averaged over at least one timeslot.

Table 1
3GPP TS 34.121 Nominal Maximum Output Power

Operating Band	Power Class 3		Power Class 4	
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)
Band II	+24	+1/-3	+21	+2/-2
Band IV	+24	+1/-3	+21	+2/-2

5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

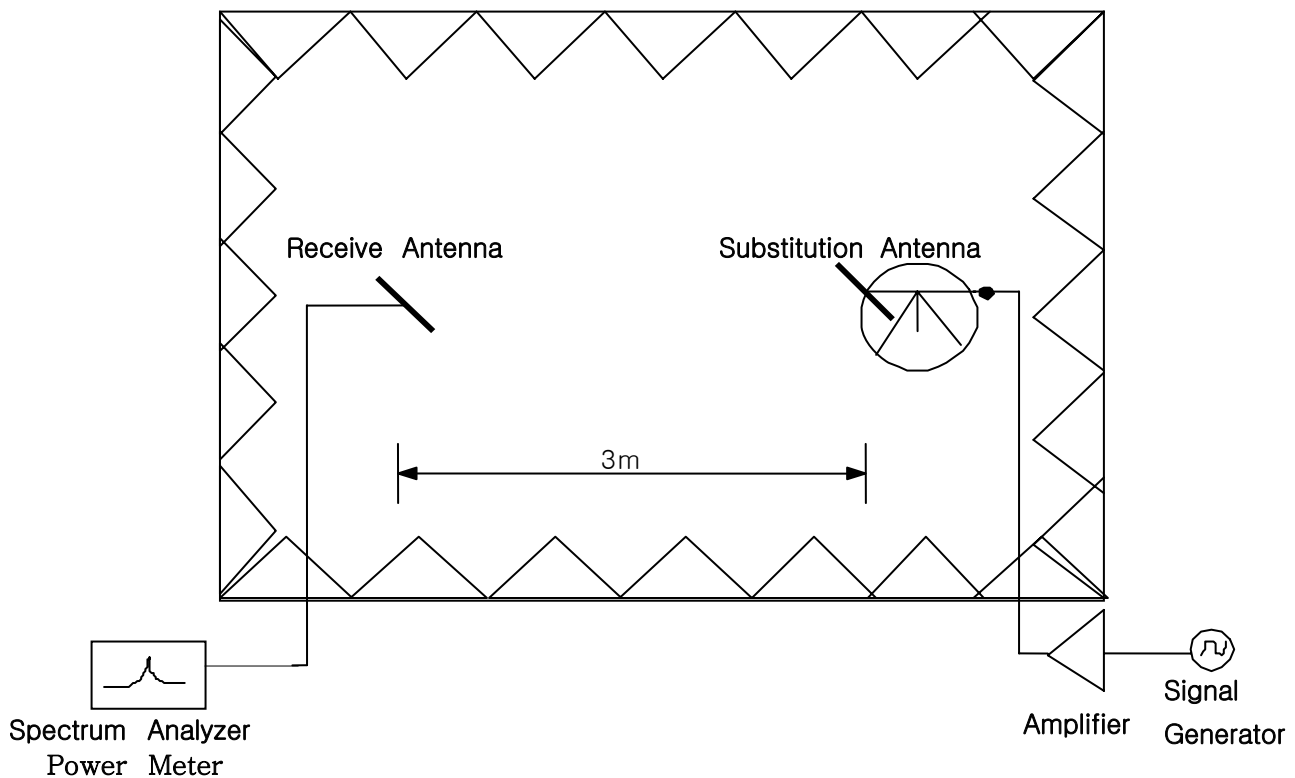


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2 Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

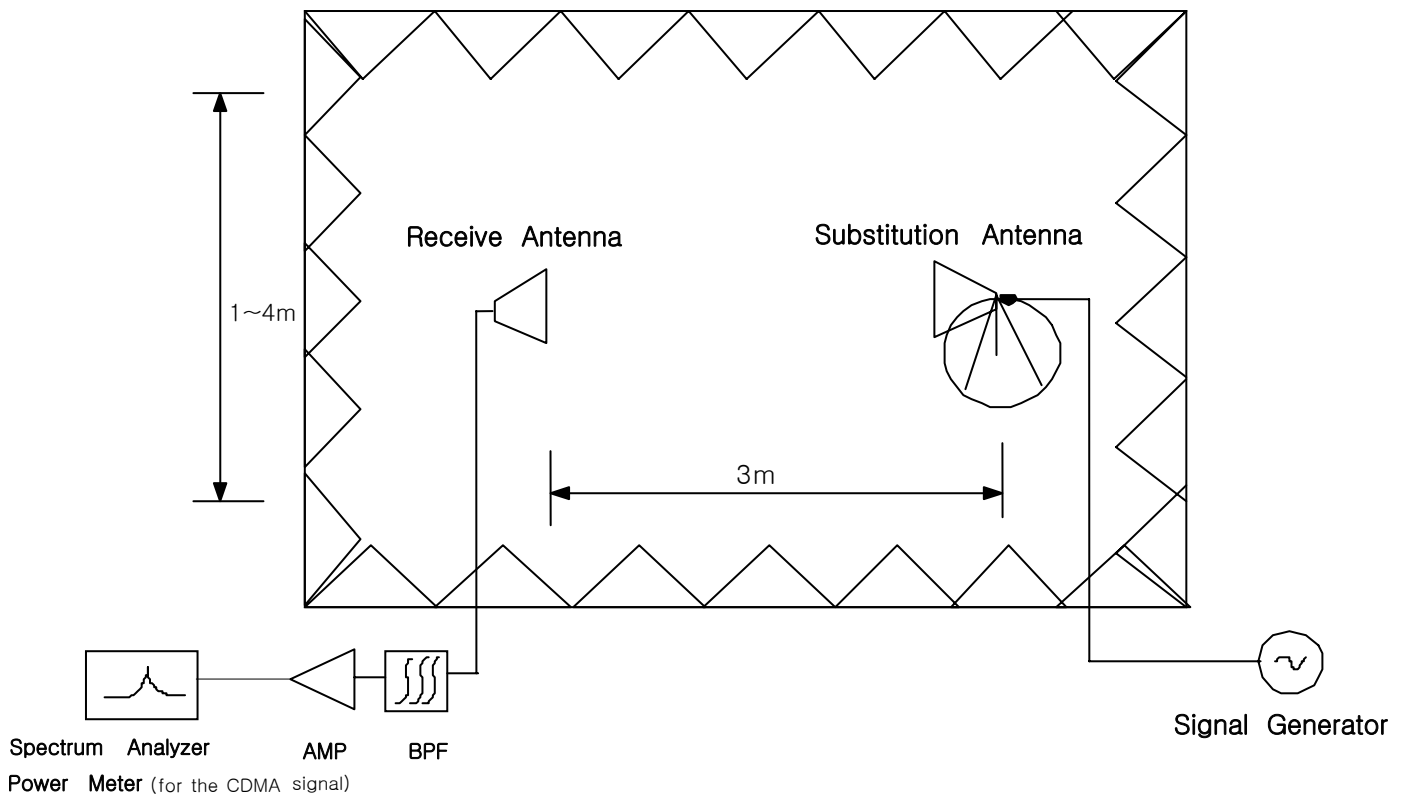


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.



SAMPLE CALCULATION

Example: Channel 600 PCS Mode 2nd Harmonic(3760MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

- End of page -

5.3 Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.4 Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function(CCDF) measurement profile is used to determine the largest deviation between the An average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.5 Spurious and Harmonic Emissions at Antenna Terminal

5.5.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

- End of page -

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 – 835	869 – 880
B	835 – 845	880 – 890
A* High	845 – 846.5	890 – 891.5
B*	846.5 – 849	891.5 – 894

Table 2. Cellular Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1710 – 1720	2110 – 2120
B	1720 – 1730	2120 – 2130
C	1730 – 1735	2130 – 2135
D	1735 – 1740	2135 – 2140
E	1740 – 1745	2140 – 2145
F	1745 – 1755	2145 – 2155

Table 3. Broadband AWS Service Frequency Blocks

5.5.2 Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log (P)$ dB. Limit equivalent to -13 dBm, calculation shown below.

$$43 + 10\log (0.333 \text{ W}) = 38.22\text{dB}$$
$$25.22 \text{ dBm} - 38.22 \text{ dB} = -13 \text{ dBm}$$

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13 dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (PCS Mode : 10MHz to 20GHz). A display line was placed at -13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements. Plots are shown herein.

5.6 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to $+50^{\circ}\text{C}$ using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to $+50^{\circ}\text{C}$ allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

- End of page -

6. TEST DATA

6.1 Equivalent Isotropic Radiated Power(E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS WCDMA

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBi)	Ref level (dBm)
1852.4	24.00	H	-15.30	9.60	-24.90
		V	-14.92	9.60	-24.52
1880.0	24.00	H	-14.99	9.60	-24.59
		V	-15.30	9.60	-24.90
1907.6	22.00	H	-17.47	9.60	-27.07
		V	-17.18	9.60	-26.78

■ Result (Slide Up)

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1852.4	-24.95	V	215/70	23.57	0.228	Standard
1880.0	-24.91	V	224/70	24.01	0.252	Standard
1907.6	-26.68	V	226/65	22.10	0.162	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method



6.2 Equivalent Isotropic Radiated Power(E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : AWS WCDMA

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBi)	Ref level (dBm)
1712.4	21.00	H	-16.99	9.70	-26.69
		V	-16.79	9.70	-26.49
1732.4	24.00	H	-13.99	9.60	-23.59
		V	-13.83	9.60	-23.43
1752.5	22.00	H	-15.97	9.60	-25.57
		V	-15.83	9.60	-25.43

■ Result (Slide Up)

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1712.4	-26.68	V	207/80	20.81	0.121	Standard
1732.4	-23.81	V	213/80	23.62	0.230	Standard
1752.5	-25.68	H	260/0	21.89	0.155	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3 PCS WCDMA Radiated Spurious & Harmonic measurement

Operating Frequency : 1852.4 MHz(Low), 1880.00 MHz(Middle), 1907.60 MHz(High)

Measured Output Power : 24.01 dBm = 0.252 W

Modulation Signal : PCS

Limit : $43 + 10\log_{10}(P) = 37.01\text{dBc}$

Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
9262	2	3704.80	-67.77	H	64.80
	3	5557.20	-66.32	H	59.93
	4	7409.60	-67.93	H	56.23
	5	9262.00	-	-	-
	6	11114.40	-	-	-
	7	12966.80	-	-	-
9400	2	3760.00	-67.46	H	64.58
	3	5640.00	-66.56	H	59.83
	4	7520.00	-67.69	H	55.94
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
9538	2	3815.20	-66.96	H	64.02
	3	5722.80	-67.14	H	59.95
	4	7630.40	-68.09	H	56.85
	5	9538.00	-	-	-
	6	11445.60	-	-	-
	7	13353.20	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4 AWS WCDMA Radiated Spurious & Harmonic measurement

Operating Frequency : 1712.4 MHz(Low), 1732.4 MHz(Middle), 1752.5 MHz(High)

Measured Output Power : 23.62 dBm = 0.230 W

Modulation Signal : AWS

$$\text{Limit : } 43 + 10\log_{10}(P) = 36.62 \text{ dBc}$$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
1312	2	3424.80	-66.80	V	66.14
	3	5137.20	-67.82	H	60.92
	4	6849.60	-64.68	H	54.52
	5	8562.00	-	-	-
	6	10274.40	-	-	-
	7	11986.80	-	-	-
1412	2	3464.80	-67.21	X	66.48
	3	5197.20	-68.33	H	61.83
	4	6929.60	-64.34	H	52.86
	5	8662.00	-	-	-
	6	10394.40	-	-	-
	7	12126.80	-	-	-
1513	2	3505.20	-67.86	H	66.41
	3	5257.80	-67.76	H	61.75
	4	7010.40	-68.20	H	58.15
	5	8763.00	-	-	-
	6	10515.60	-	-	-
	7	12268.20	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method



6.5 PCS WCDMA Radiated Spurious & Harmonic Conversion Table

Date : June 17, 2011.

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
9262	2	3704.80	-12.85	12.60	-12.80	-39.98	-39.03	-67.77	-67.16	64.80	65.14
	3	5557.20	-16.92	12.50	-8.60	-43.40	-42.99	-66.32	-66.77	59.93	60.79
	4	7409.60	-20.20	11.50	-4.30	-48.71	-48.56	-67.93	-68.05	56.23	56.50
	5	9262.00	-23.05	11.90	-1.90	-53.11	-52.12	-	-	-	-
	6	11114.40	-25.08	11.50	0.60	-57.75	-54.90	-	-	-	-
	7	12966.80	-28.10	14.42	0.70	-61.50	-58.01	-	-	-	-
9400	2	3760.00	-13.35	12.60	-12.30	-39.89	-39.16	-67.46	-67.69	64.58	65.54
	3	5640.00	-17.07	12.50	-8.40	-43.74	-43.42	-66.56	-67.24	59.83	60.83
	4	7520.00	-20.60	11.50	-3.90	-48.76	-48.06	-67.69	-68.00	55.94	56.95
	5	9400.00	-23.50	11.90	-1.40	-52.65	-51.24	-	-	-	-
	6	11280.00	-26.24	11.50	1.70	-56.66	-54.54	-	-	-	-
	7	13160.00	-28.79	14.42	1.40	-61.01	-57.76	-	-	-	-
9538	2	3815.20	-13.30	12.60	-12.30	-39.95	-39.55	-66.96	-66.92	64.02	64.38
	3	5722.80	-17.16	12.50	-8.30	-44.20	-43.35	-67.14	-67.18	59.95	60.84
	4	7630.40	-20.88	11.50	-3.60	-48.25	-47.92	-68.09	-68.76	56.85	57.85
	5	9538.00	-24.09	11.90	-0.80	-52.88	-51.48	-	-	-	-
	6	11445.60	-26.05	11.50	1.60	-57.49	-54.67	-	-	-	-
	7	13353.20	-28.74	14.42	1.30	-63.03	-59.49	-	-	-	-

6.6 AWS WCDMA Radiated Spurious & Harmonic Conversion Table

Date : June 17, 2011.

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
1312	2	3424.80	-12.76	12.60	-12.80	-37.75	-37.28	-67.78	-66.80	66.65	66.14
	3	5137.20	-16.21	12.60	-9.40	-43.52	-42.75	-67.82	-68.00	60.92	61.87
	4	6849.60	-19.42	11.50	-5.10	-46.78	-45.71	-64.68	-64.49	54.52	55.40
	5	8562.00	-21.25	11.00	-2.80	-50.98	-49.35	-	-	-	-
	6	10274.40	-25.11	11.60	0.50	-55.19	-53.03	-	-	-	-
	7	11986.80	-27.10	14.00	0.10	-58.16	-55.90	-	-	-	-
1412	2	3464.80	-12.81	12.60	-12.80	-37.20	-37.10	-67.21	-66.96	66.63	66.48
	3	5197.20	-16.54	12.60	-9.10	-43.12	-42.37	-68.33	-68.04	61.83	62.29
	4	6929.60	-19.02	11.50	-5.50	-48.10	-46.15	-64.34	-64.10	52.86	54.57
	5	8662.00	-21.65	11.00	-2.40	-51.28	-50.04	-	-	-	-
	6	10394.40	-25.21	11.60	0.60	-54.60	-52.55	-	-	-	-
	7	12126.80	-27.45	14.00	0.40	-58.34	-55.66	-	-	-	-
1513	2	3505.20	-12.83	12.60	-12.80	-38.07	-37.31	-67.86	-67.91	66.41	67.22
	3	5257.80	-16.27	12.60	-9.30	-42.63	-42.00	-67.76	-68.18	61.75	62.80
	4	7010.40	-19.58	11.50	-4.90	-46.67	-45.79	-68.20	-67.62	58.15	58.45
	5	8763.00	-22.34	11.00	-1.70	-50.77	-49.35	-	-	-	-
	6	10515.60	-25.16	11.60	0.60	-55.08	-53.22	-	-	-	-
	7	12268.20	-27.30	14.00	0.30	-58.75	-55.80	-	-	-	-



6.7 Frequency Stability

6.7.1 PCS WCDMA Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 9400

Reference Voltage : 3.7VDC

Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-47.30	1,879,999,953	-0.000003	-0.025
100%		-30	-8.10	1,879,999,992	0.000000	-0.004
100%		-20	17.90	1,880,000,018	0.000001	0.010
100%		-10	-10.00	1,879,999,990	-0.000001	-0.005
100%		0	4.70	1,880,000,005	0.000000	0.003
100%		+10	44.40	1,880,000,044	0.000002	0.024
100%		+20	-47.30	1,879,999,953	-0.000003	-0.025
100%		+30	29.40	1,880,000,029	0.000002	0.016
100%		+40	49.80	1,880,000,050	0.000003	0.026
100%		+50	-14.70	1,879,999,985	-0.000001	-0.008
85%	3.35	+20	-25.10	1,879,999,975	-0.000001	-0.013
115%	4.26	+20	45.10	1,880,000,045	0.000002	0.024
Batt. Endpoint	3.35	+20	-25.10	1,879,999,975	-0.000001	-0.013

Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point



6.7.2 AWS WCDMA Frequency Stability Table

Operating Frequency : 1,732,400,000 Hz

Channel : 1412

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	22.20	1,732,400,022	0.000001	0.013
100%		-30	23.90	1,732,400,024	0.000001	0.014
100%		-20	37.70	1,732,400,038	0.000002	0.022
100%		-10	-1.20	1,732,399,999	0.000000	-0.001
100%		0	-18.70	1,732,399,981	-0.000001	-0.011
100%		+10	-37.30	1,732,399,963	-0.000002	-0.022
100%		+20	22.20	1,732,400,022	0.000001	0.013
100%		+30	10.50	1,732,400,011	0.000001	0.006
100%		+40	27.20	1,732,400,027	0.000002	0.016
100%		+50	-33.90	1,732,399,966	-0.000002	-0.020
85%	3.35	+20	-4.60	1,732,399,995	0.000000	-0.003
115%	4.26	+20	-11.30	1,732,399,989	-0.000001	-0.007
Batt. Endpoint	3.35	+20	-4.60	1,732,399,995	0.000000	-0.003

Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.


The EUT is tested down to the battery end point

6.7.3 PCS WCDMA Frequency Stability Graph

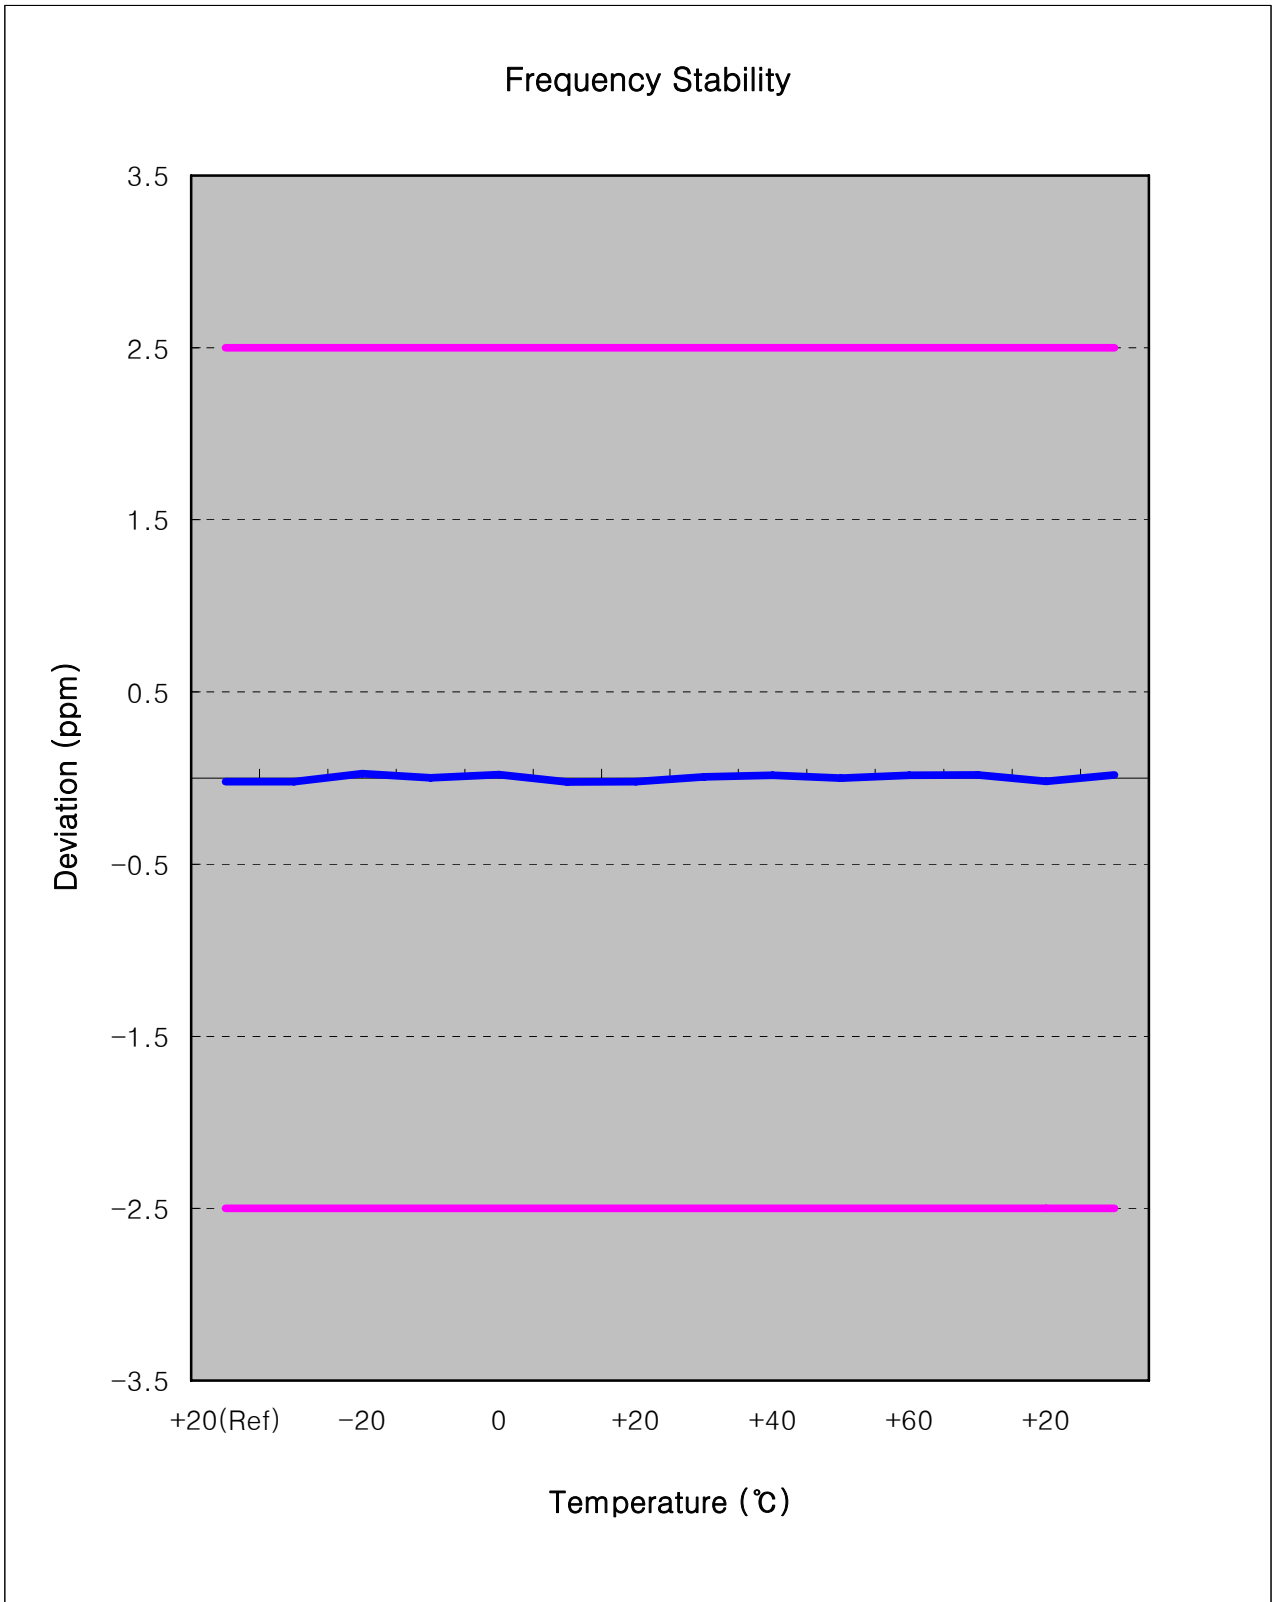


- End of page -

Zoom In

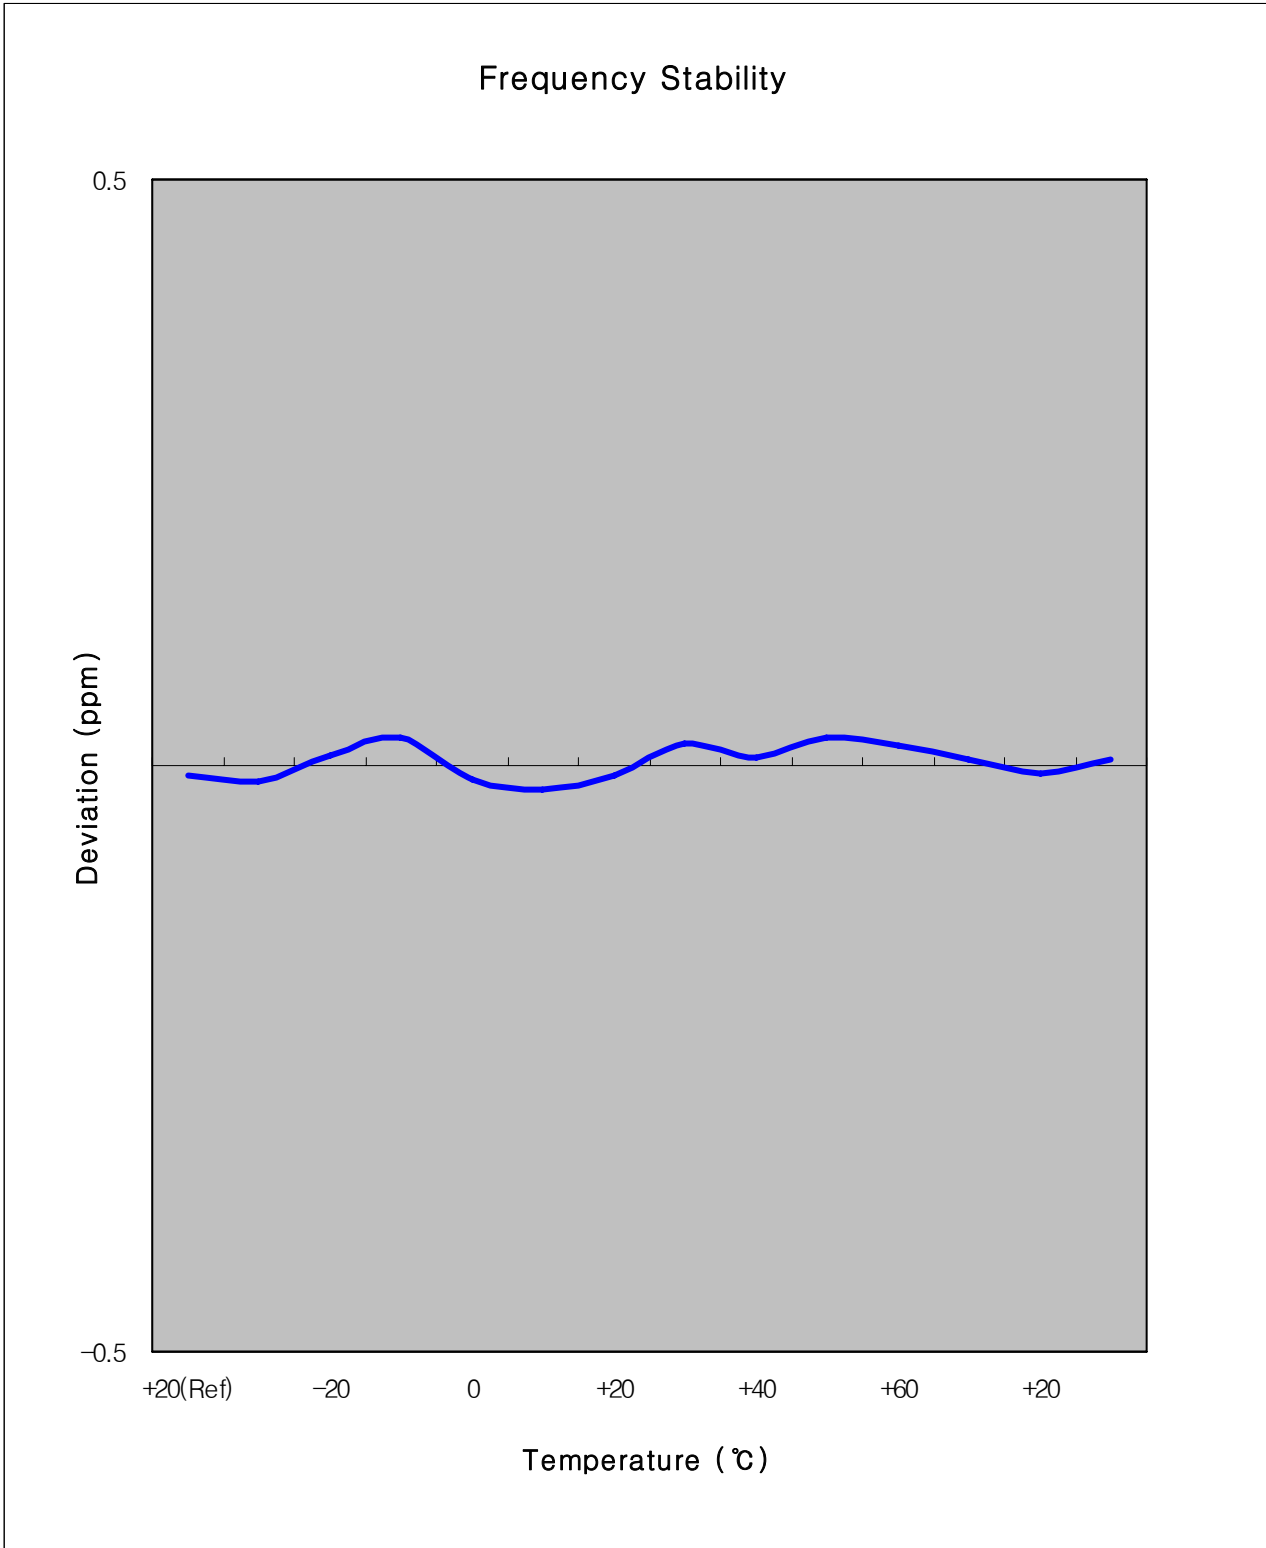


- End of page -

6.7.4 AWS WCDMA Frequency Stability Graph

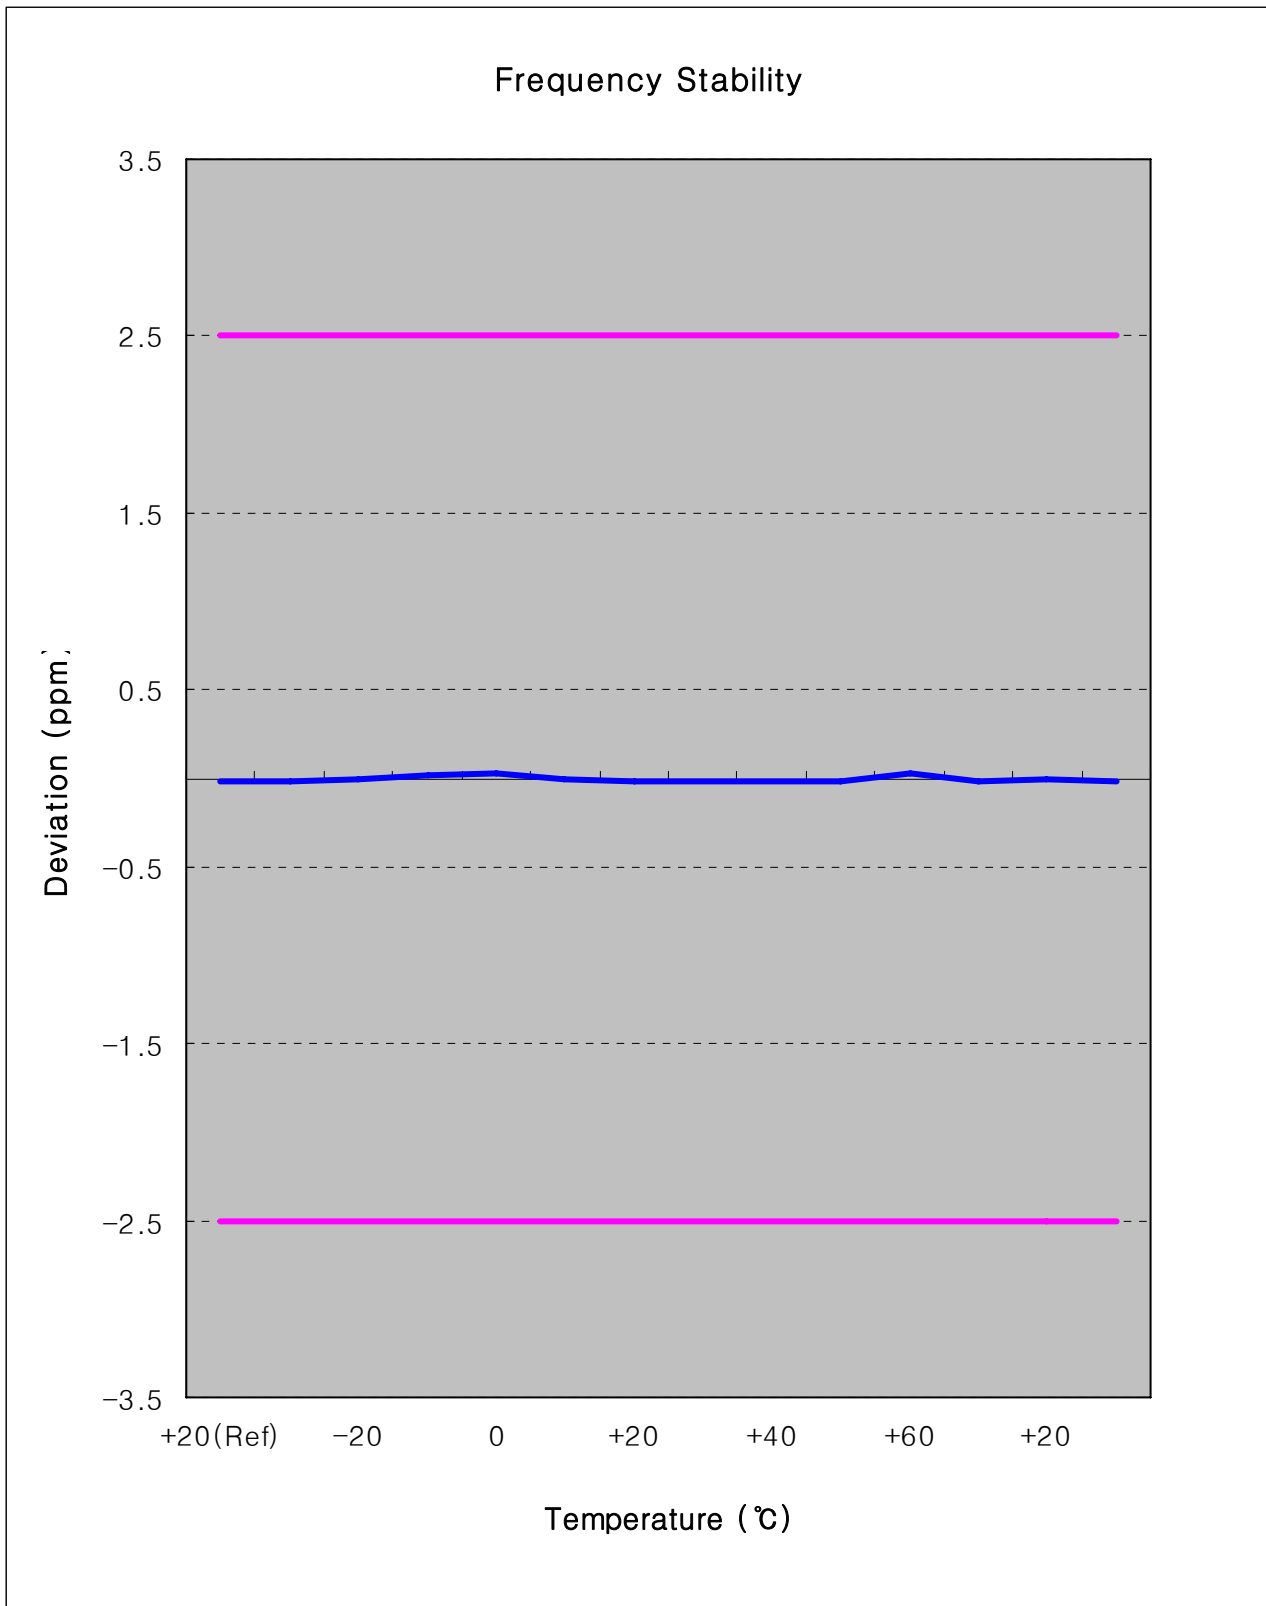

- End of page -

Zoom In

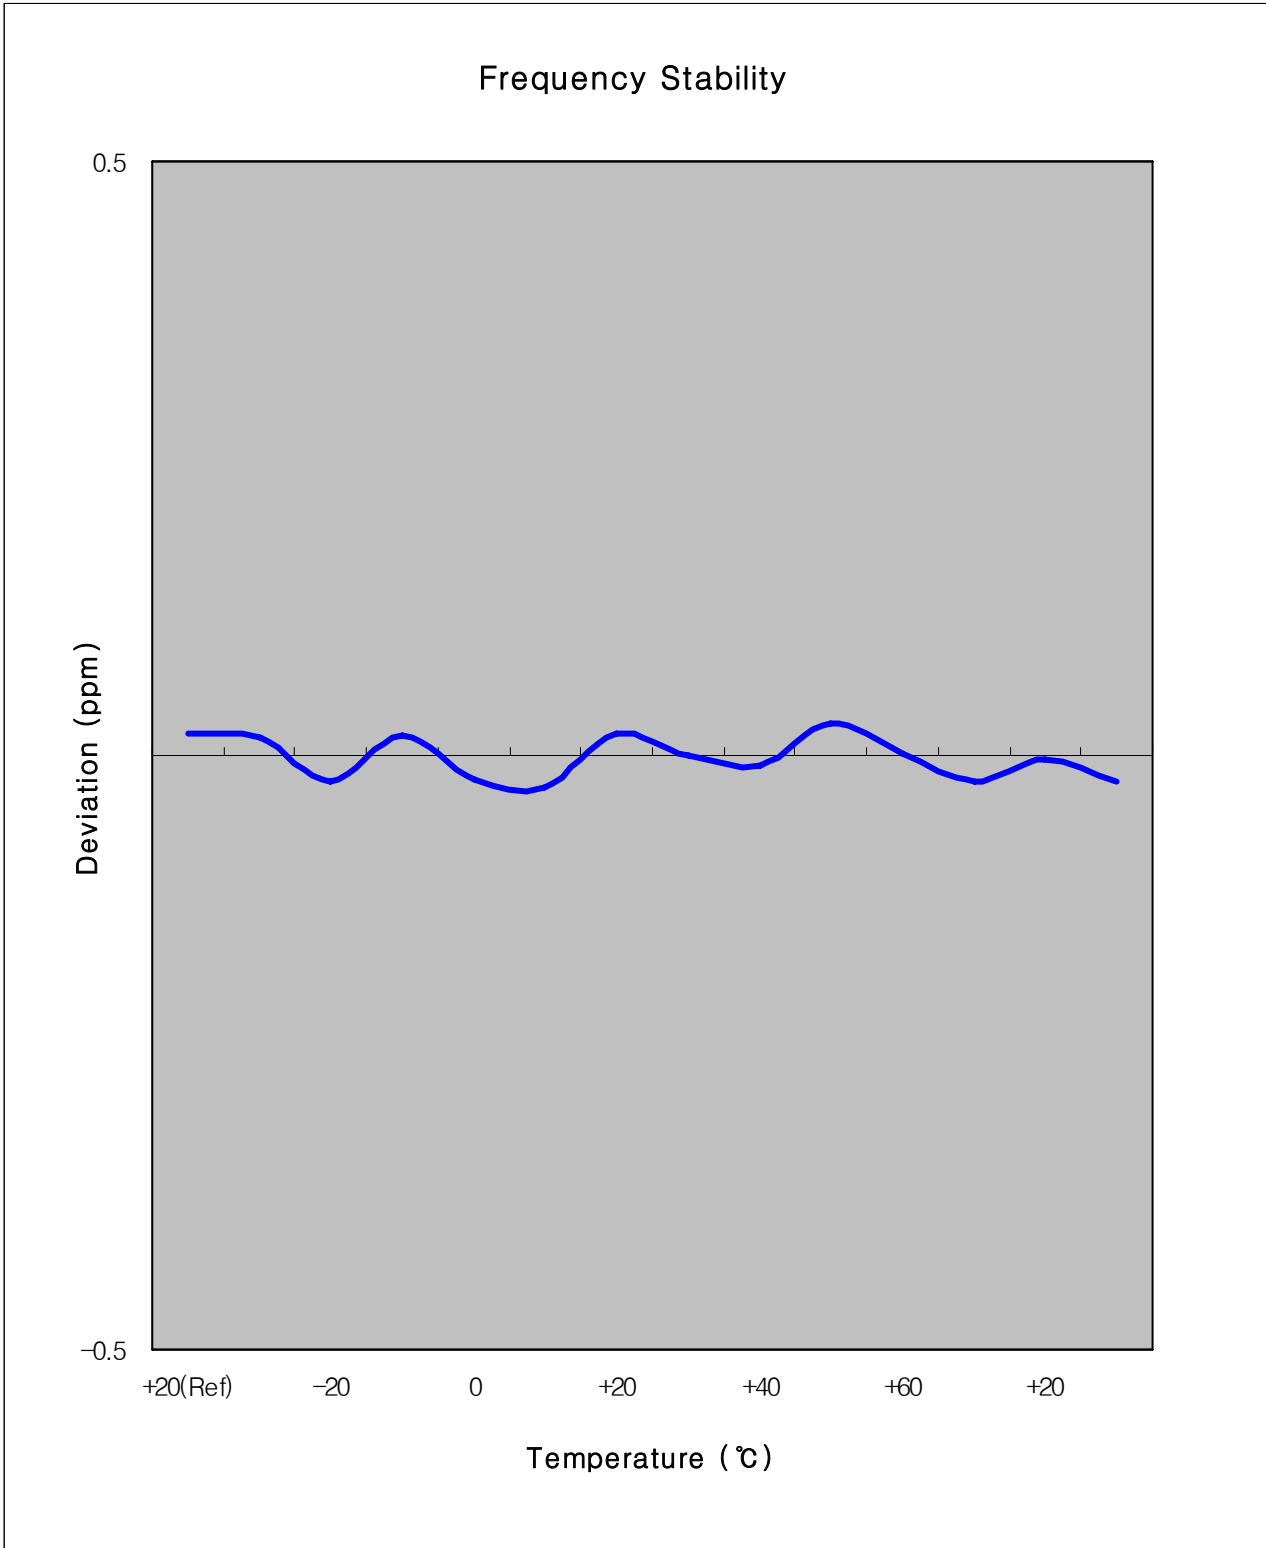

- End of page -

7. SAMPLE CALCULATION

7.1 Emission Designator

Emission Designator = 4M19F9W

CDMA BW = 4.19MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination(Audio/Data)

(Measured at the 99.75% power bandwidth)

- End of page -



8. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/GPRS/EDGE and AWS/PSC WCDMA/HSDPA Phone with Bluetooth
FCC ID : A3LSGHT379 complies with all the requirements of Parts 2, 24, 27 of the FCC Rules.

- End of page -

9. TEST PLOT

A3LSGHT379BAND 2
 (UL Channel : 9262, DL Channel : 9662)

Control	Waveform Quality				Call Parms	
Waveform Quality Setup ▾		<u>Minimum</u>	<u>Maximum</u>	<u>Average</u>	Cell Power	
	EVM (%):	7.75	8.52	8.10	-104.00	
	Frequency Error (Hz):	-37.29	14.38	-16.97	dBm/3.84 MHz	
	Origin Offset (dB):	-32.12	-31.26	-31.68	Channel Type	
	Phase Error (°):	4.04	4.51	4.26	12.2k RMC	
	Mag Error (%):	3.21	3.27	3.24	Paging Service	
	Time Error (chips):	-0.74	-0.67	-0.70	RB Test Mode	
	Max PCDE: -28.36 dB at Cch.64.11					
	50 /50				Single	
Calibrate Measurements	Thermal Power					
	Thermal Power					
	22.44 dBm					
	Single					
Swap Window Positions	Active Cell Connected				Sys Type: UTRA FDD	
1 of 2						1 of 3

(UL Channel : 9400, DL Channel : 9800)

Control	Waveform Quality				Call Parms	
Waveform Quality Setup ▾		<u>Minimum</u>	<u>Maximum</u>	<u>Average</u>	Cell Power	
	EVM (%):	6.92	7.94	7.45	-104.00	
	Frequency Error (Hz):	-34.29	-19.31	-26.76	dBm/3.84 MHz	
	Origin Offset (dB):	-31.92	-31.04	-31.47	Channel Type	
	Phase Error (°):	3.58	4.22	3.92	12.2k RMC	
	Mag Error (%):	2.92	3.00	2.96	Paging Service	
	Time Error (chips):	-0.76	-0.67	-0.72	RB Test Mode	
	Max PCDE: -28.22 dB at Cch.64.11					
	50 /50				Single	
Calibrate Measurements	Thermal Power					
	Thermal Power					
	22.42 dBm					
	Single					
Swap Window Positions	Active Cell Connected				Sys Type: UTRA FDD	
1 of 2						1 of 3

(UL Channel : 9538, DL Channel : 9938)

Control	Waveform Quality			Call Parms
Waveform Quality Setup		Minimum	Maximum	Average
	EVM (%):	7.69	8.65	8.16
	Frequency Error (Hz):	-42.92	-27.31	-34.87
	Origin Offset (dB):	-31.89	-30.92	-31.38
	Phase Error (°):	3.69	4.32	4.00
	Mag Error (%):	4.16	4.23	4.21
	Time Error (chips):	-0.74	-0.49	-0.62
	Max PCDE: -29.06 dB at Cch.64.1:1			
	50 / 5C			Single
Calibrate Measurements	Thermal Power			
	Thermal Power 22.17 dBm			
Swap Window Positions	Single			
	Active Cell Connected			Sys Type: UTRA FDD
1 of 2				1 of 3

(UL Channel : 9262, DL Channel : 9662)

Agilent R T

Base Ch Freq 1.8524 GHz Trig Free Occupied Bandwidth *3GPP W-CDMA	Center Freq 1.85240000 GHz
FCC ID: A3LSGHT379 0BW Ch.9662 Ref 25 dBm Atten 30 dB	Start Freq 1.84740000 GHz
	Stop Freq 1.85740000 GHz
	CF Step 1.00000000 MHz Auto Man
Center 1.852 40 GHz Span 10 MHz #Res BW 100 kHz #VBW 1 MHz Sweep 2.92 ms (601 pts)	Freq Offset 0.00000000 Hz
Occupied Bandwidth Occ BW % Pwr 99.00 % 4.1539 MHz x dB -26.00 dB	Signal Track On Off
Transmit Freq Error 10.082 kHz x dB Bandwidth 4.618 MHz*	

File Operation Status, C:\TEMP.GIF file saved

(UL Channel : 9400, DL Channel : 9800)

Agilent R T

Base Ch Freq 1.88 GHz Trig Free	Freq/Channel
Occupied Bandwidth *3GPP W-CDMA	Center Freq 1.88000000 GHz
FCC ID:A3LSGHT379 0BW Ch.9800 Ref 25 dBm Atten 30 dB	Start Freq 1.87500000 GHz
	Stop Freq 1.88500000 GHz
	CF Step 1.00000000 MHz Auto Man
Center 1.880 00 GHz Span 10 MHz *Res BW 100 kHz *VBW 1 MHz Sweep 2.92 ms (601 pts)	Freq Offset 0.00000000 Hz
Occupied Bandwidth Occ BW % Pwr 99.00 % 4.2107 MHz x dB -26.00 dB	Signal Track On Off
Transmit Freq Error 6.772 kHz x dB Bandwidth 4.614 MHz*	
File Operation Status, C:\TEMP.GIF file saved	

(UL Channel : 9538, DL Channel : 9938)

Agilent R T


Base Ch Freq 1.9076 GHz Trig Free	Freq/Channel
Occupied Bandwidth *3GPP W-CDMA	Center Freq 1.90760000 GHz
FCC ID:A3LSGHT379 0BW Ch.9938 Ref 25 dBm Atten 30 dB	Start Freq 1.90260000 GHz
	Stop Freq 1.91260000 GHz
	CF Step 1.00000000 MHz Auto Man
Center 1.907 60 GHz Span 10 MHz *Res BW 100 kHz *VBW 1 MHz Sweep 2.92 ms (601 pts)	Freq Offset 0.00000000 Hz
Occupied Bandwidth Occ BW % Pwr 99.00 % 4.1162 MHz x dB -26.00 dB	Signal Track On Off
Transmit Freq Error 25.891 kHz x dB Bandwidth 4.550 MHz*	
File Operation Status, C:\TEMP.GIF file saved	

(UL Channel : 9262, DL Channel : 9662)

Agilent

R T

Freq/Channel

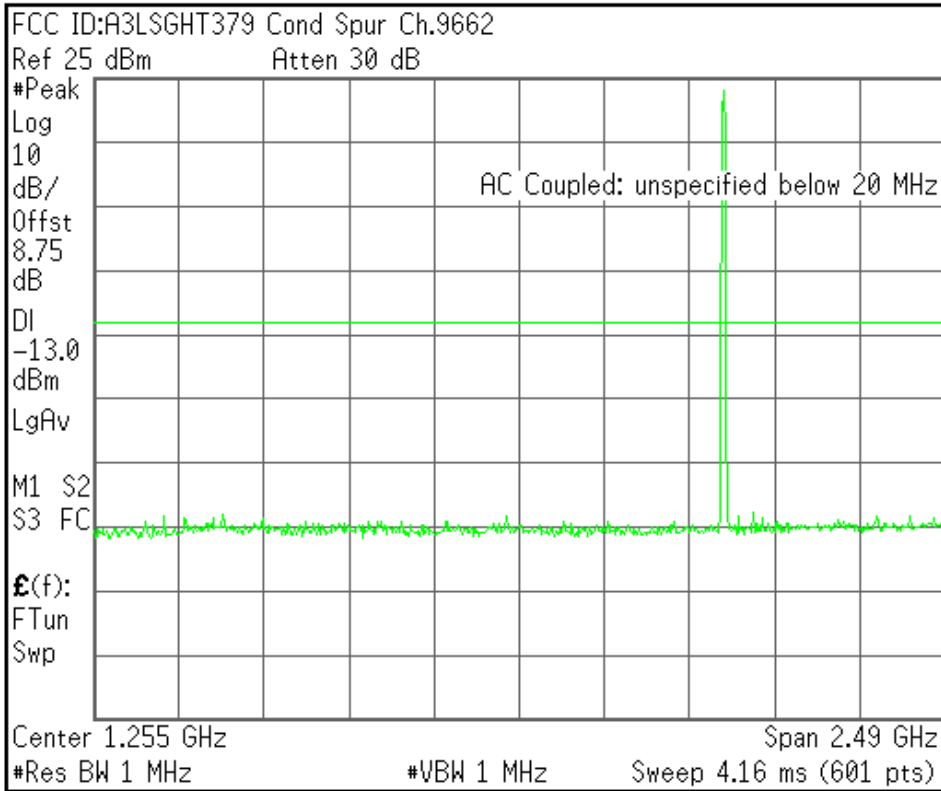

Center Freq
1.25500000 GHz

Start Freq
10.00000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.0000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

(UL Channel : 9262, DL Channel : 9662)

Agilent

R T

Freq/Channel

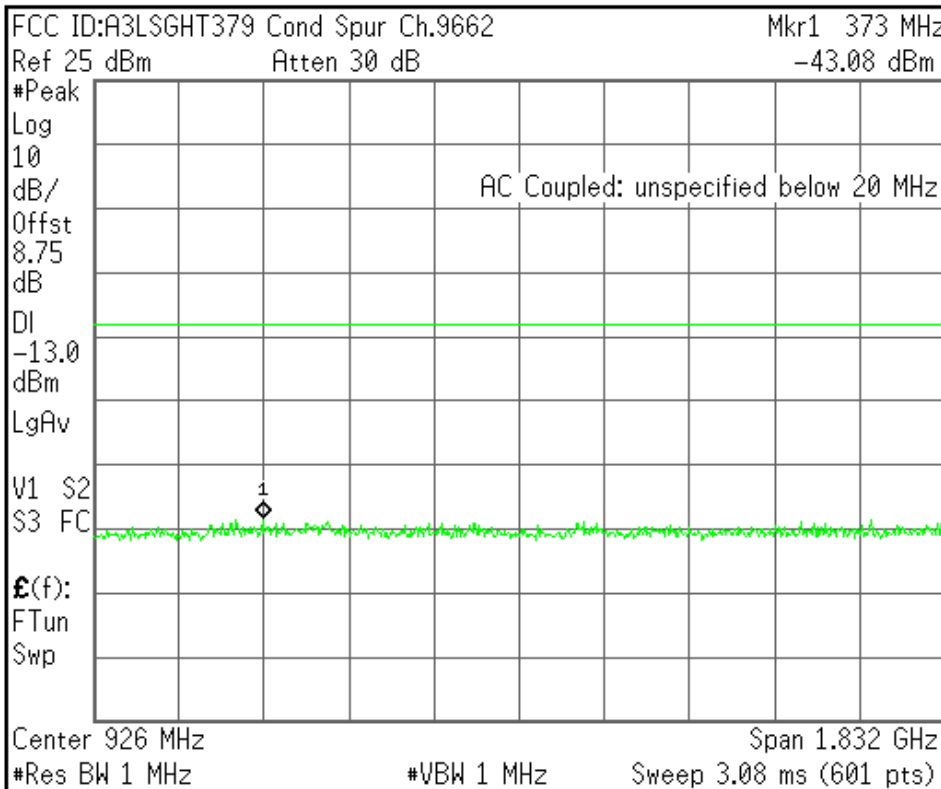

Center Freq
926.2000000 MHz

Start Freq
10.00000000 MHz

Stop Freq
1.84240000 GHz


CF Step
183.2400000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


(UL Channel : 9262, DL Channel : 9662)

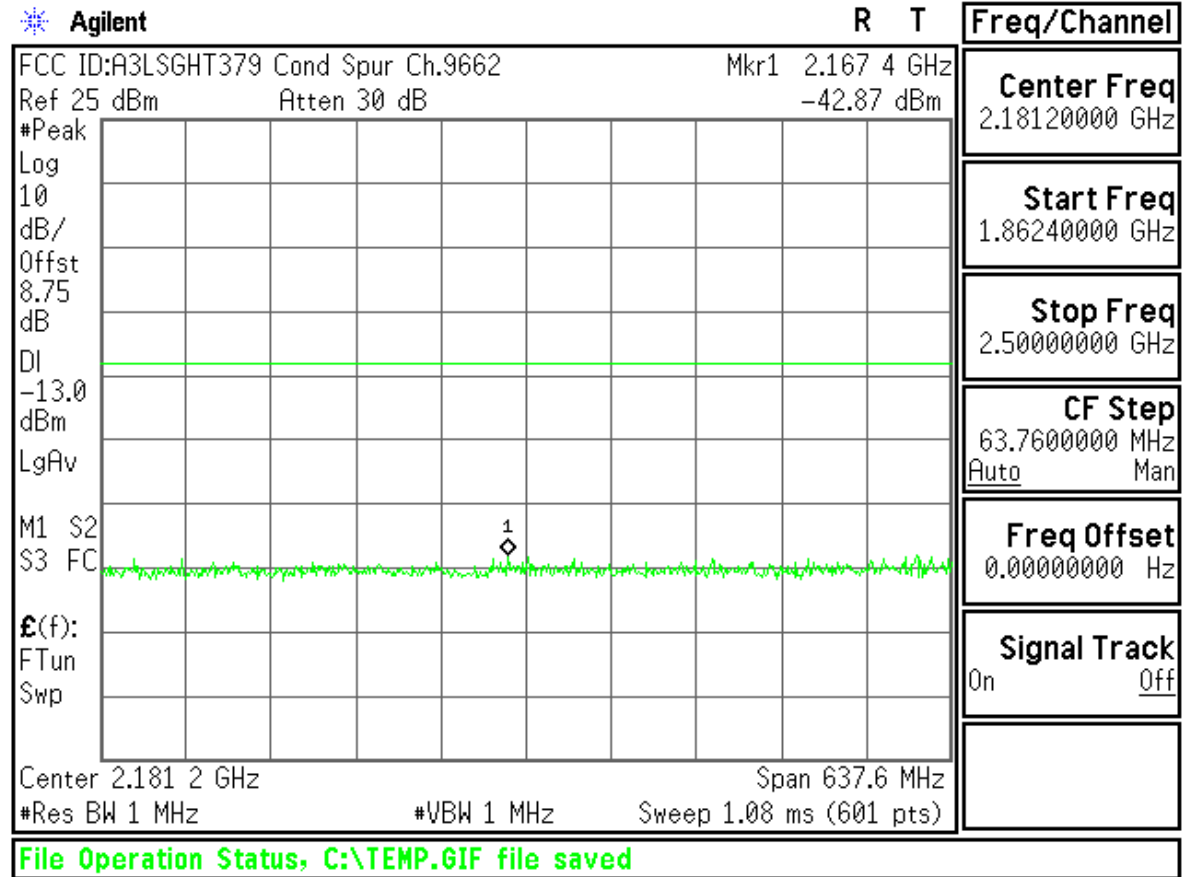


(UL Channel : 9262, DL Channel : 9662)

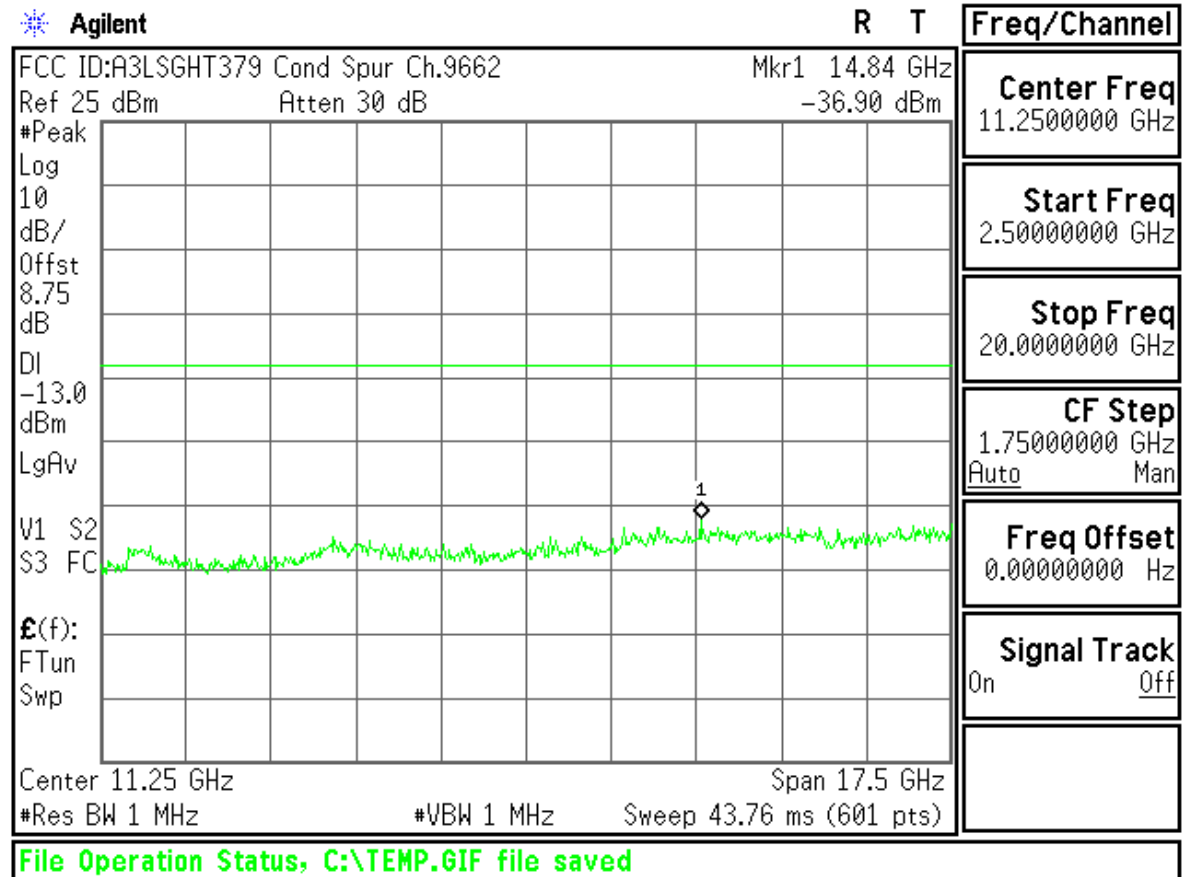


(UL Channel : 9400, DL Channel : 9800)

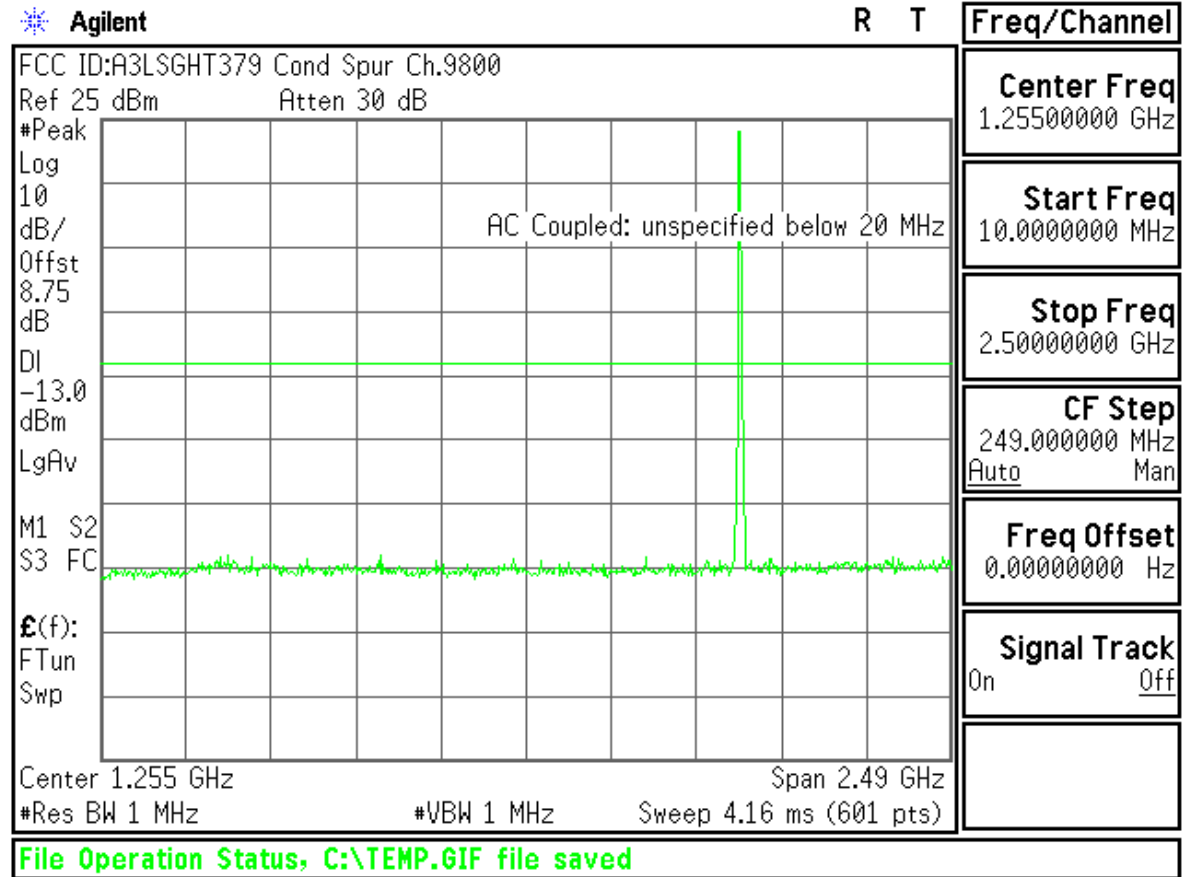


(UL Channel : 9400, DL Channel : 9800)

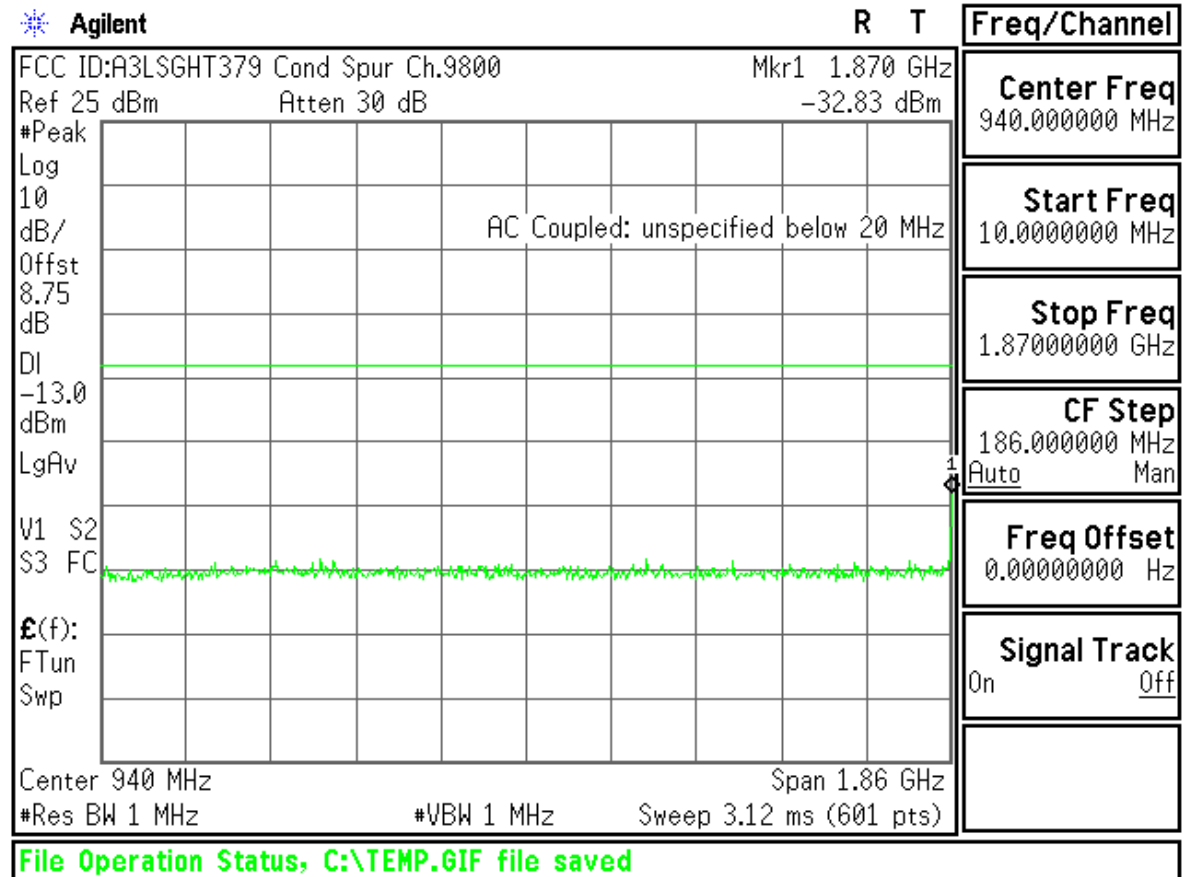


(UL Channel : 9400, DL Channel : 9800)

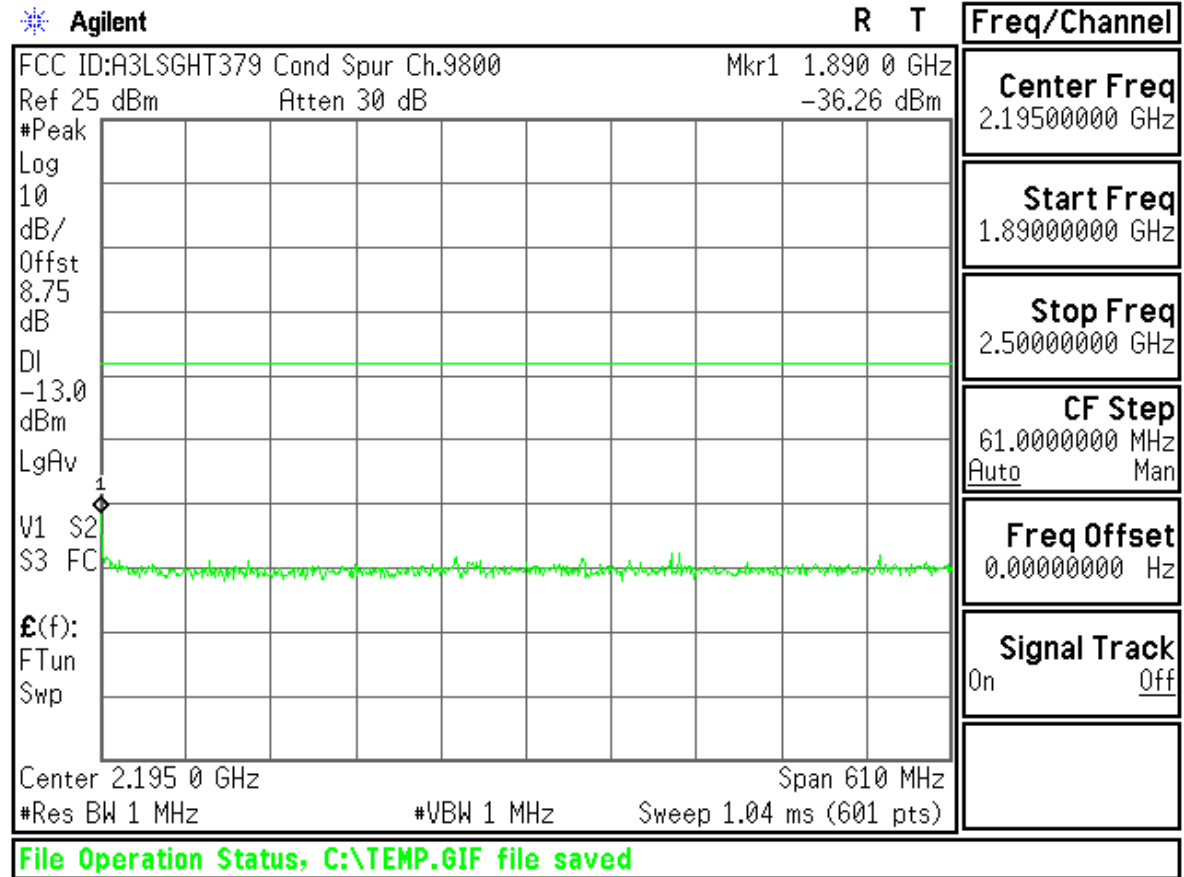


(UL Channel : 9400, DL Channel : 9800)

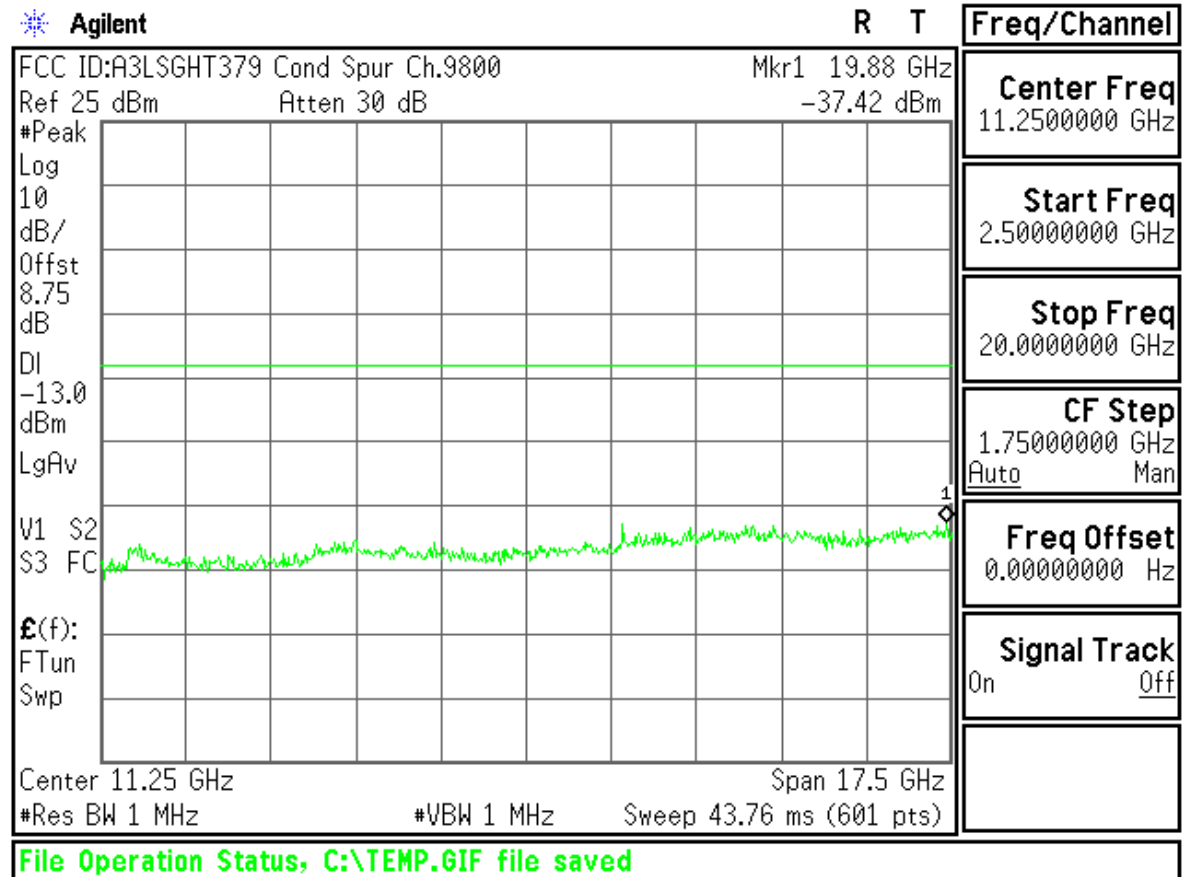


(UL Channel : 9538, DL Channel : 9938)

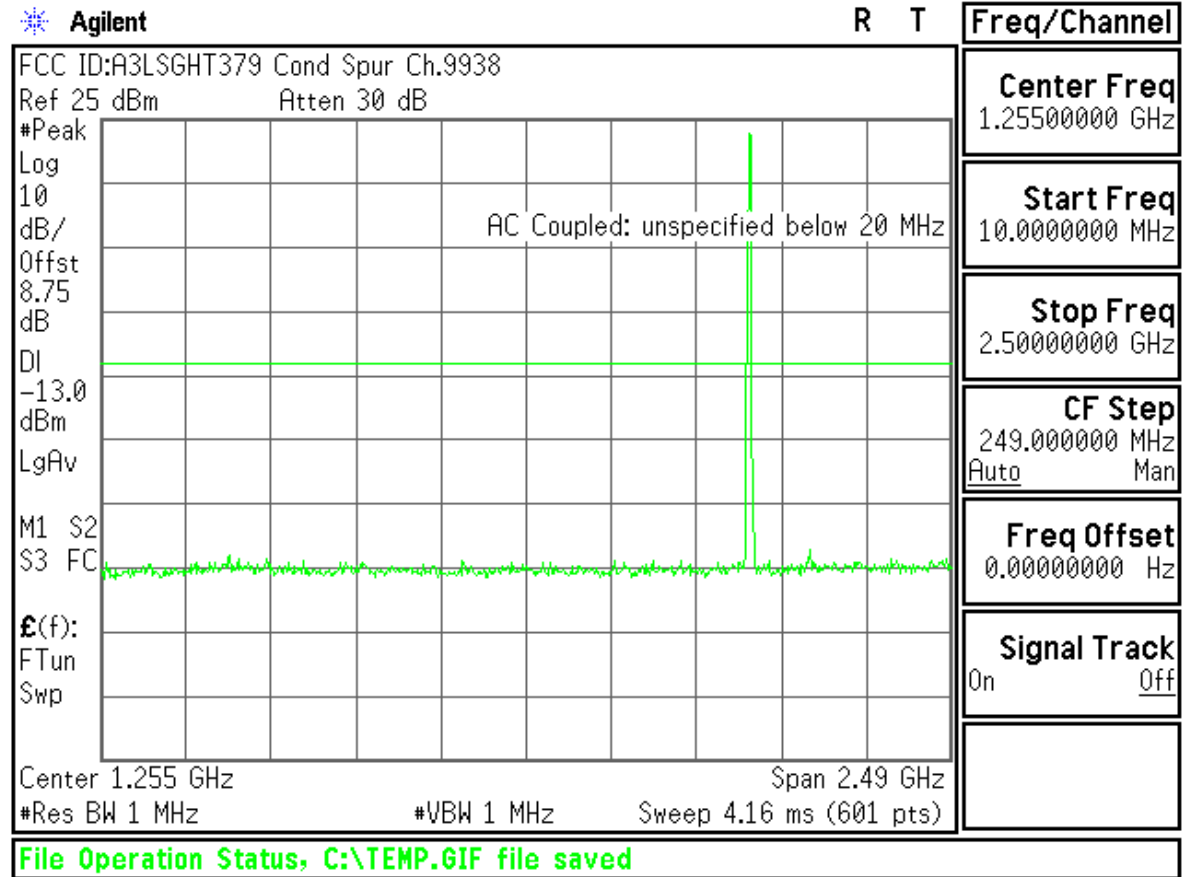


(UL Channel : 9538, DL Channel : 9938)

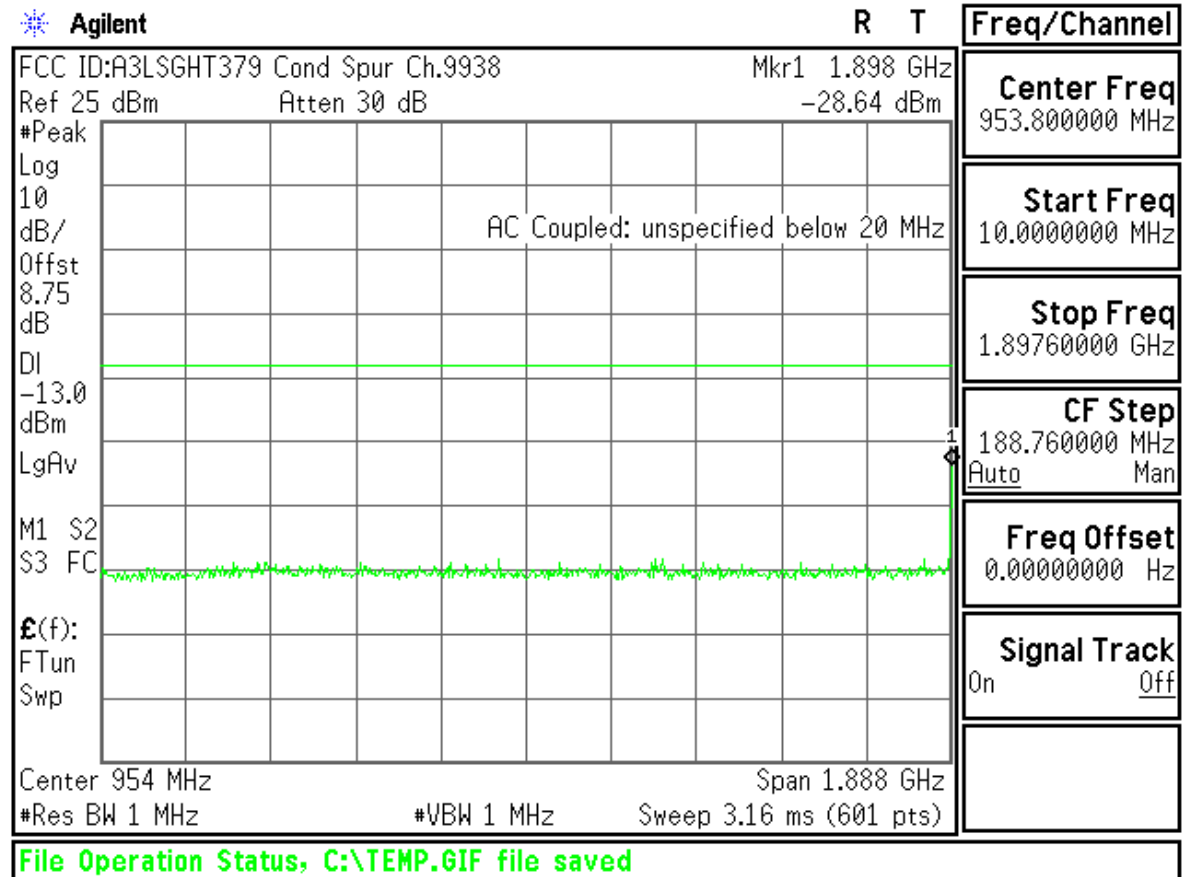


(UL Channel : 9538, DL Channel : 9938)

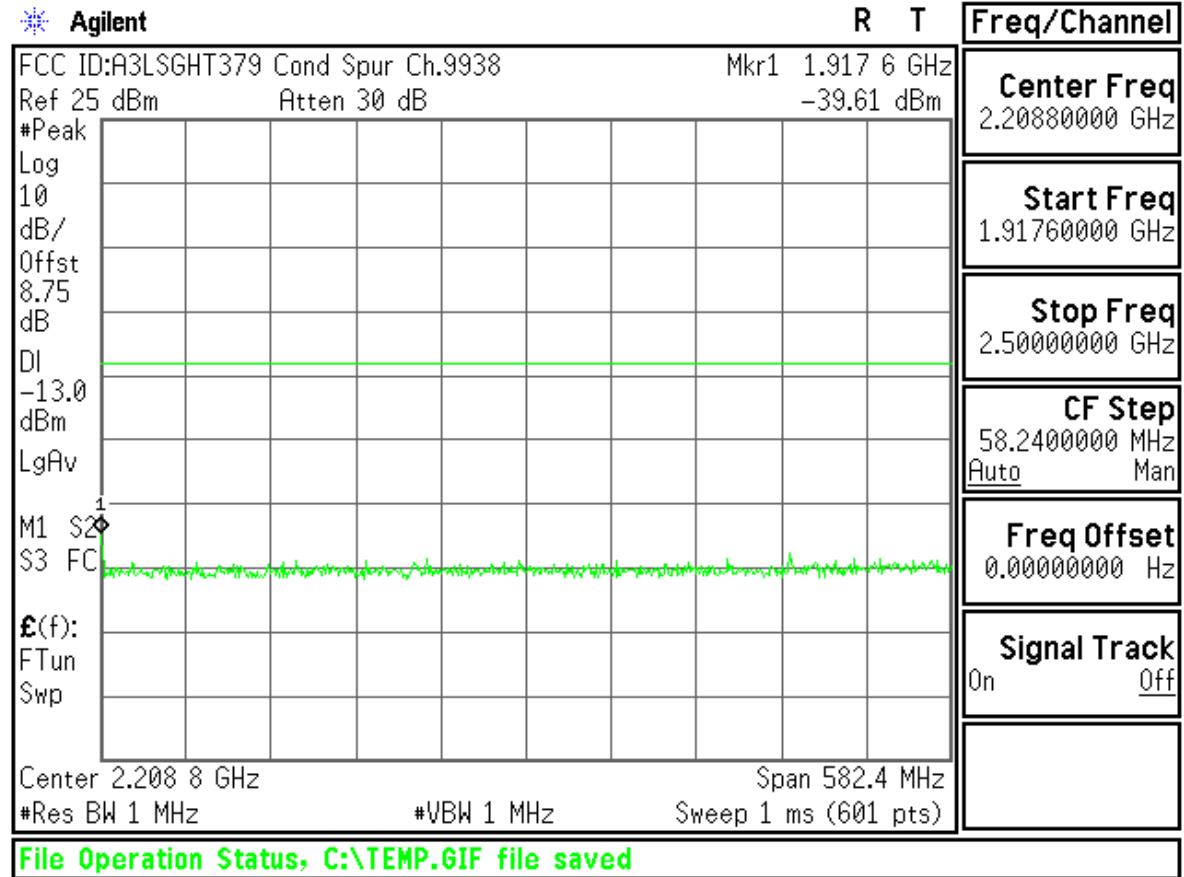


(UL Channel : 9538, DL Channel : 9938)

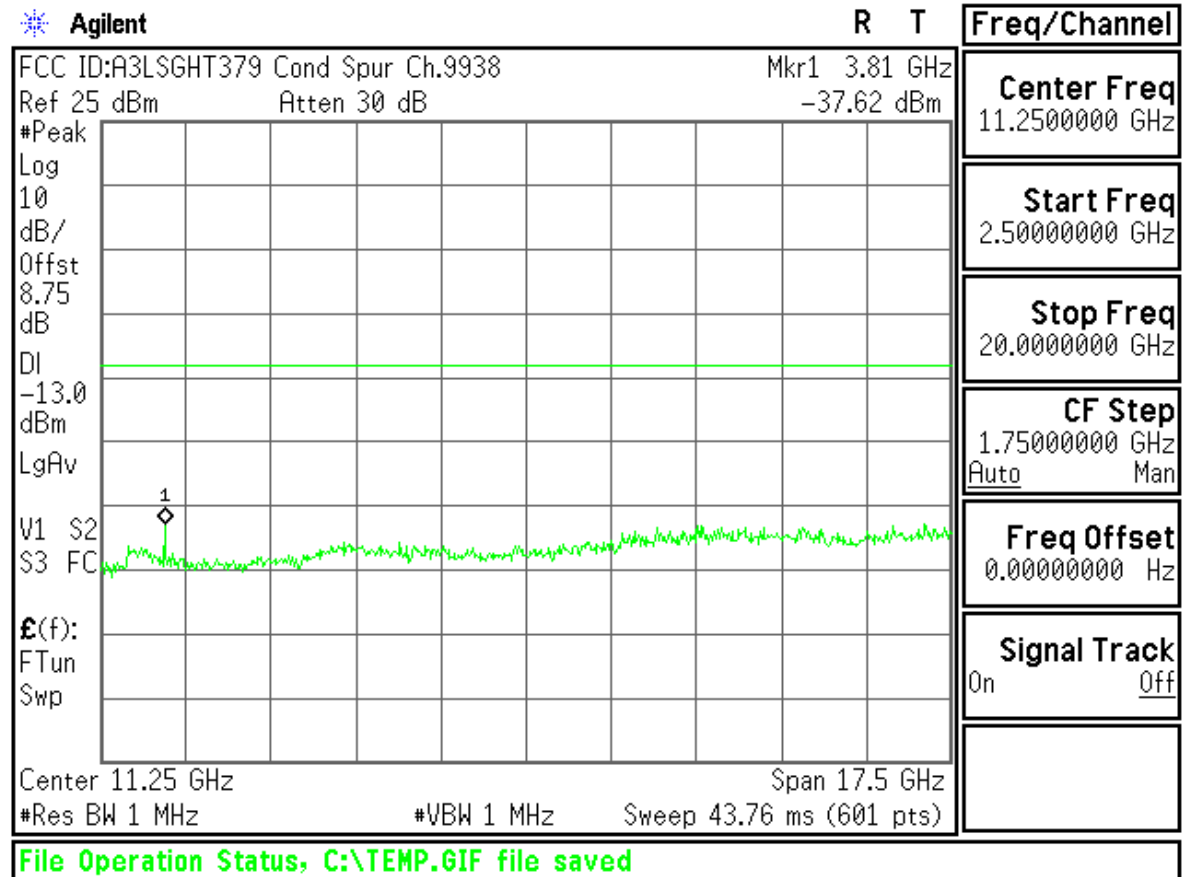


(UL Channel : 9262, DL Channel : 9662)

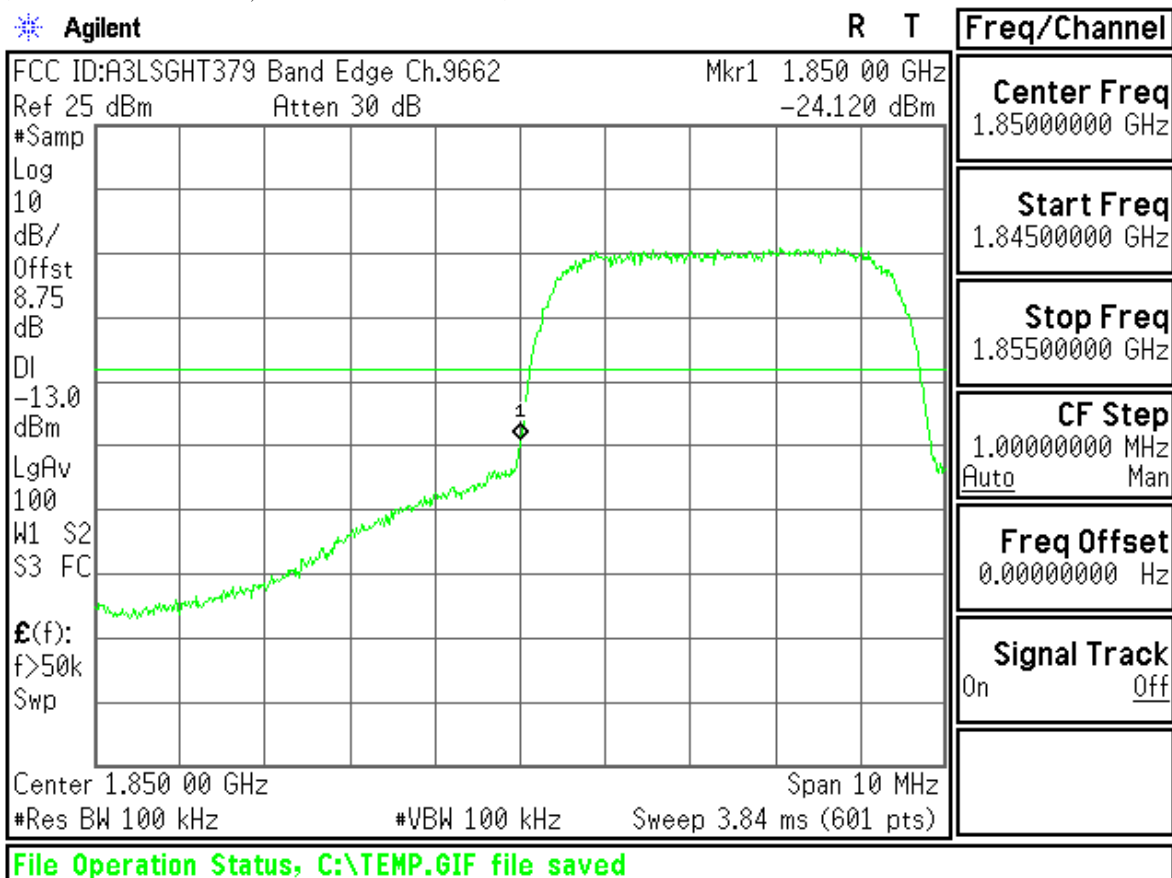


(UL Channel : 9538, DL Channel : 9938)

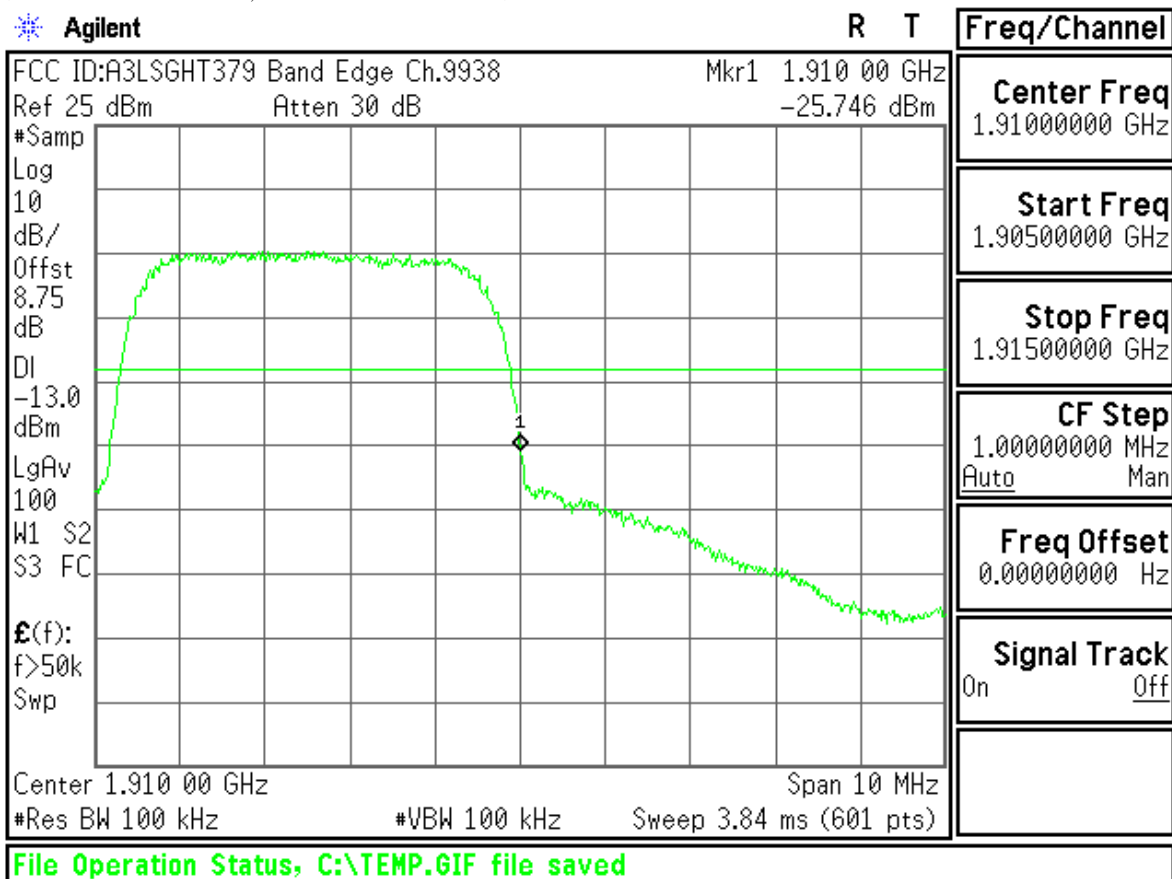

(UL Channel : 9262, DL Channel : 9662)

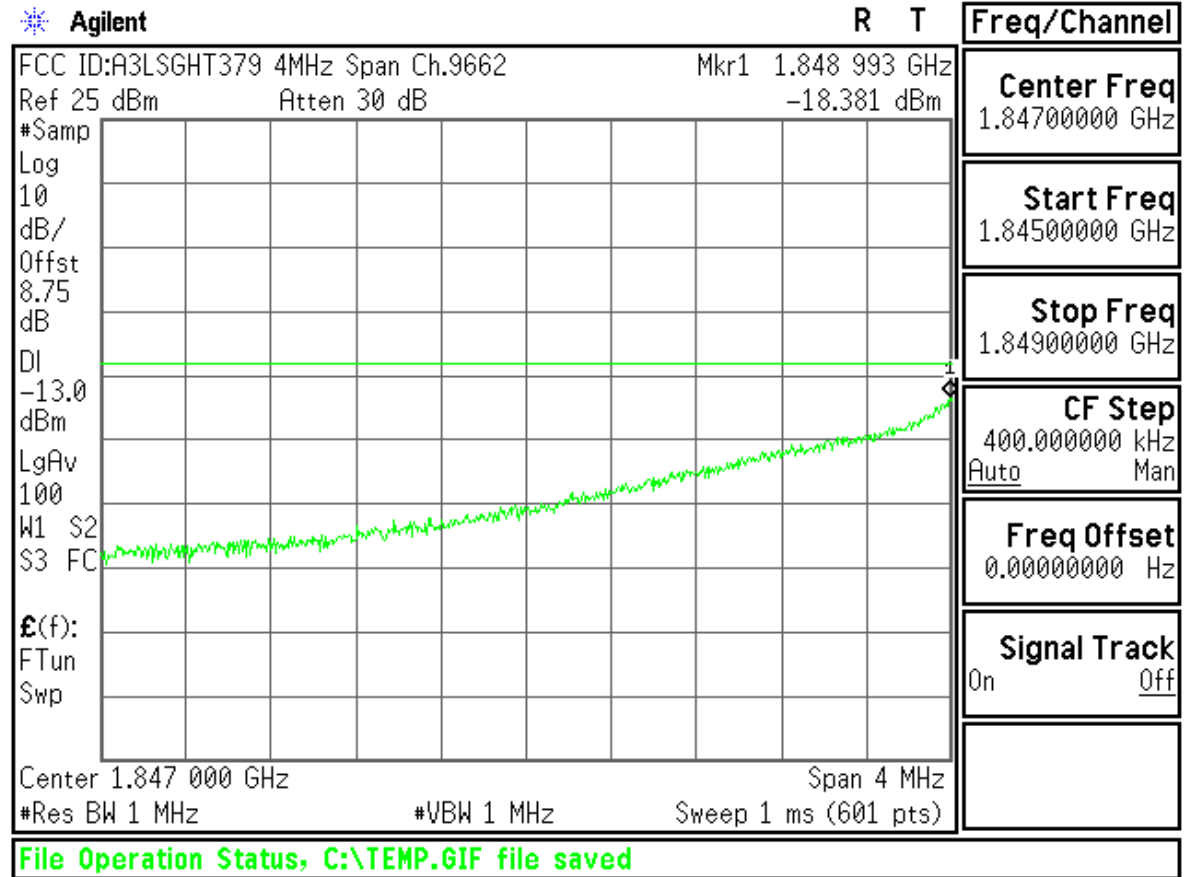

(UL Channel : 9538, DL Channel : 9938)

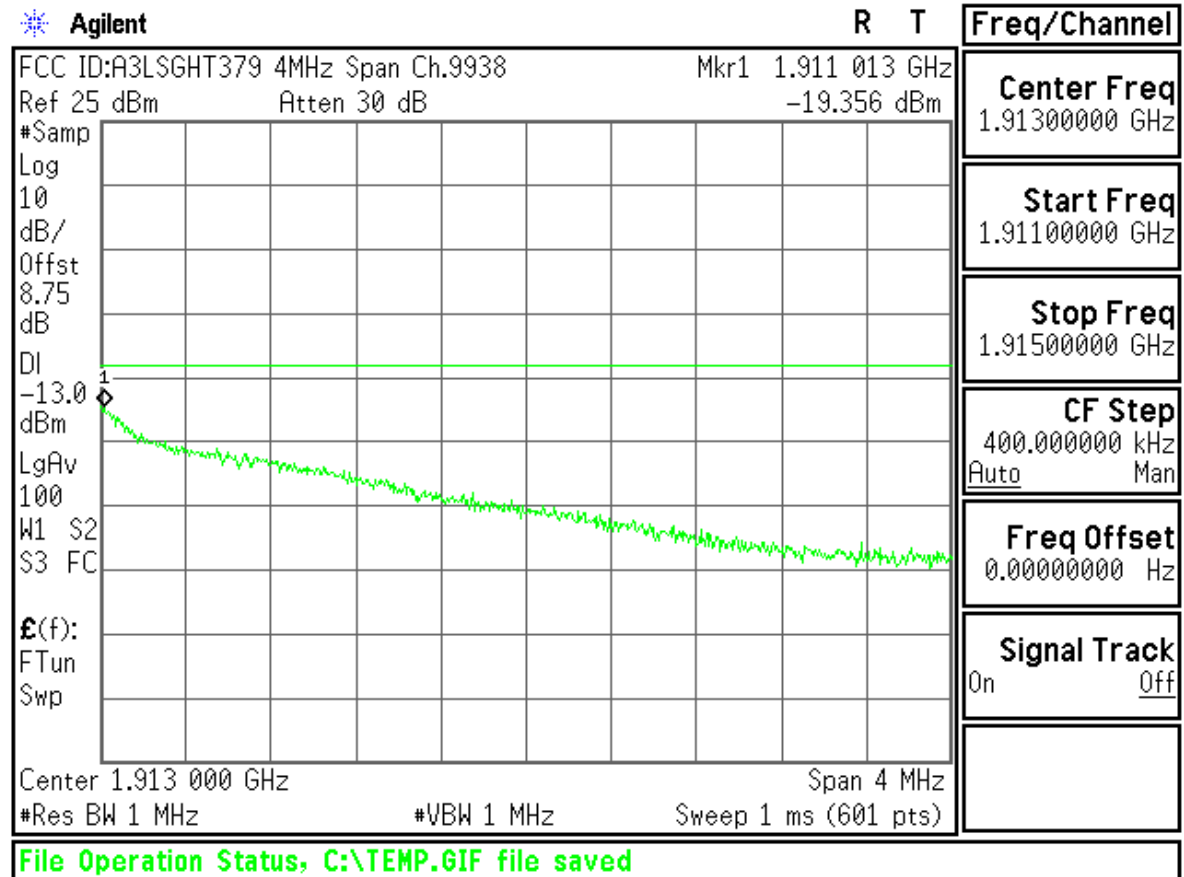

(UL Channel : 9400, DL Channel : 9800)

Agilent

R T

Mobile Ch Freq 1.88 GHz Trig Free CCDF 3GPP W-CDMA Counts(k): 10000		Freq/Channel Center Freq 1.88000000 GHz	
		Start Freq 1.88000000 GHz	
		Stop Freq 1.88000000 GHz	
		CF Step 5.00000000 MHz Auto Man	
		Freq Offset 0.00000000 Hz	
		Signal Track On Off	
Copyright 2000-2006 Agilent Technologies			

Average Power 21.37 dBm 52.92%	
10.0% 1.63 dB 1.0% 2.67 dB 0.1% 3.14 dB 0.01% 3.39 dB 0.001% 3.55 dB 0.0001% 3.62 dB Peak 3.62 dB	Meas BW 5.00000000 MHz

A3LSGHT379BAND 4
 (UL Channel : 1312, DL Channel : 1537)

Measurement/Instrument Screen									
Control	Waveform Quality							Call Parms	
Waveform Quality Setup ▾								Cell Power	
								-104.00	
								dBm/3.84 MHz	
								Channel Type	
								12.2k R1C	
								Paging Service	
								RB Test Mode	
Calibrate Measurements	Thermal Power 22.43 dBm Continuous							HSPA Parameters	
								34,121 Preset Call Configs ▾	
Swap Window Positions								Channel (UARFCN) Parms	
1 of 2									1 of 3

(UL Channel : 1412, DL Channel : 1637)

Measurement/Instrument Screen									
Control	Waveform Quality							Call Parms	
Waveform Quality Setup ▾								Cell Power	
								-104.00	
								dBm/3.84 MHz	
								Channel Type	
								12.2k R1C	
								Paging Service	
								RB Test Mode	
Calibrate Measurements	Thermal Power 22.41 dBm Continuous							HSPA Parameters	
								34,121 Preset Call Configs ▾	
Swap Window Positions								Channel (UARFCN) Parms	
1 of 2									1 of 3

(UL Channel : 1862, DL Channel : 2087)

Measurement/Instrument Screen						
Control	Waveform Quality				Call Parms	
Waveform Quality Setup ▾		Minimum	Maximum	Average	Cell Power	
	EVM (%):	5.70	7.25	6.31	-75.00	
	Frequency Error (Hz):	-15.76	28.39	18.41	dBm/3.84 MHz	
	Origin Offset (dB):	-49.58	-28.73	-33.86	Channel Type	
	Phase Error (°):	3.14	3.90	3.39	12.2k RMC	
	Mag Error (%):	1.56	3.16	2.15	Paging Service	
	Time Error (chips):	-0.90	-0.83	-0.86	RB Test Mode	
	Max PCDE: -30.73 dB at Cch.64.16:0					
	50 /5C				Single	
Calibrate Measurements	Thermal Power					
	Thermal Power 22.11 dBm					
Swap Window Positions	Continuous					
	Active Cell Connected			Sys Type: UTRA FDD		
1 of 2						1 of 3

(UL Channel : 1312, DL Channel : 1537)

Agilent
R T

<p>Base Ch Freq 1.7125 GHz Trig Free</p> <p>Occupied Bandwidth *3GPP W-CDMA</p> <p>FCC ID:A3LSGHT379 0BW Ch.1537</p> <p>Ref 25 dBm Atten 30 dB</p> <p>#Samp</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>8.78</p> <p>dB</p> <p>Center 1.712 50 GHz Span 10 MHz</p> <p>*Res BW 100 kHz *VBW 1 MHz Sweep 2.92 ms (601 pts)</p>	<p>Center Freq 1.71250000 GHz</p> <p>Start Freq 1.70750000 GHz</p> <p>Stop Freq 1.71750000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>Occupied Bandwidth 4.0440 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth 4.525 MHz*</p> <p>Transmit Freq Error -122.770 kHz</p> <p>x dB -26.00 dB</p>	
<p>File Operation Status, C:\TEMP.GIF file saved</p>	

(UL Channel : 1412, DL Channel : 1637)

Agilent R T


Base	Ch Freq 1.7324 GHz	Trig Free	Freq/Channel						
Occupied Bandwidth *3GPP W-CDMA			Center Freq 1.73240000 GHz						
FCC ID:A3LSGHT379 0BW Ch.1637 Ref 25 dBm Atten 30 dB			Start Freq 1.72740000 GHz						
			Stop Freq 1.73740000 GHz						
Center 1.732 40 GHz Span 10 MHz *Res BW 100 kHz *VBW 1 MHz Sweep 2.92 ms (601 pts)			CF Step 1.00000000 MHz Auto Man						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Occupied Bandwidth 4.2127 MHz</td> <td style="width: 50%;">Occ BW % Pwr 99.00 %</td> </tr> <tr> <td>Transmit Freq Error 11.649 kHz</td> <td>x dB -26.00 dB</td> </tr> <tr> <td>x dB Bandwidth 4.598 MHz*</td> <td></td> </tr> </table>			Occupied Bandwidth 4.2127 MHz	Occ BW % Pwr 99.00 %	Transmit Freq Error 11.649 kHz	x dB -26.00 dB	x dB Bandwidth 4.598 MHz*		Freq Offset 0.00000000 Hz
Occupied Bandwidth 4.2127 MHz	Occ BW % Pwr 99.00 %								
Transmit Freq Error 11.649 kHz	x dB -26.00 dB								
x dB Bandwidth 4.598 MHz*									
			Signal Track On Off						
File Operation Status, C:\TEMP.GIF file saved									

(UL Channel : 1862, DL Channel : 2087)


Agilent R T

Base	Ch Freq 1.7525 GHz	Trig Free	Freq/Channel						
Occupied Bandwidth *3GPP W-CDMA			Center Freq 1.75250000 GHz						
FCC ID:A3LSGHT379 0BW Ch.2087 Ref 25 dBm Atten 30 dB			Start Freq 1.74750000 GHz						
			Stop Freq 1.75750000 GHz						
Center 1.752 50 GHz Span 10 MHz *Res BW 100 kHz *VBW 1 MHz Sweep 2.92 ms (601 pts)			CF Step 1.00000000 MHz Auto Man						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Occupied Bandwidth 4.1537 MHz</td> <td style="width: 50%;">Occ BW % Pwr 99.00 %</td> </tr> <tr> <td>Transmit Freq Error -10.652 kHz</td> <td>x dB -26.00 dB</td> </tr> <tr> <td>x dB Bandwidth 4.630 MHz*</td> <td></td> </tr> </table>			Occupied Bandwidth 4.1537 MHz	Occ BW % Pwr 99.00 %	Transmit Freq Error -10.652 kHz	x dB -26.00 dB	x dB Bandwidth 4.630 MHz*		Freq Offset 0.00000000 Hz
Occupied Bandwidth 4.1537 MHz	Occ BW % Pwr 99.00 %								
Transmit Freq Error -10.652 kHz	x dB -26.00 dB								
x dB Bandwidth 4.630 MHz*									
			Signal Track On Off						
File Operation Status, C:\TEMP.GIF file saved									


(UL Channel : 1312, DL Channel : 1537)

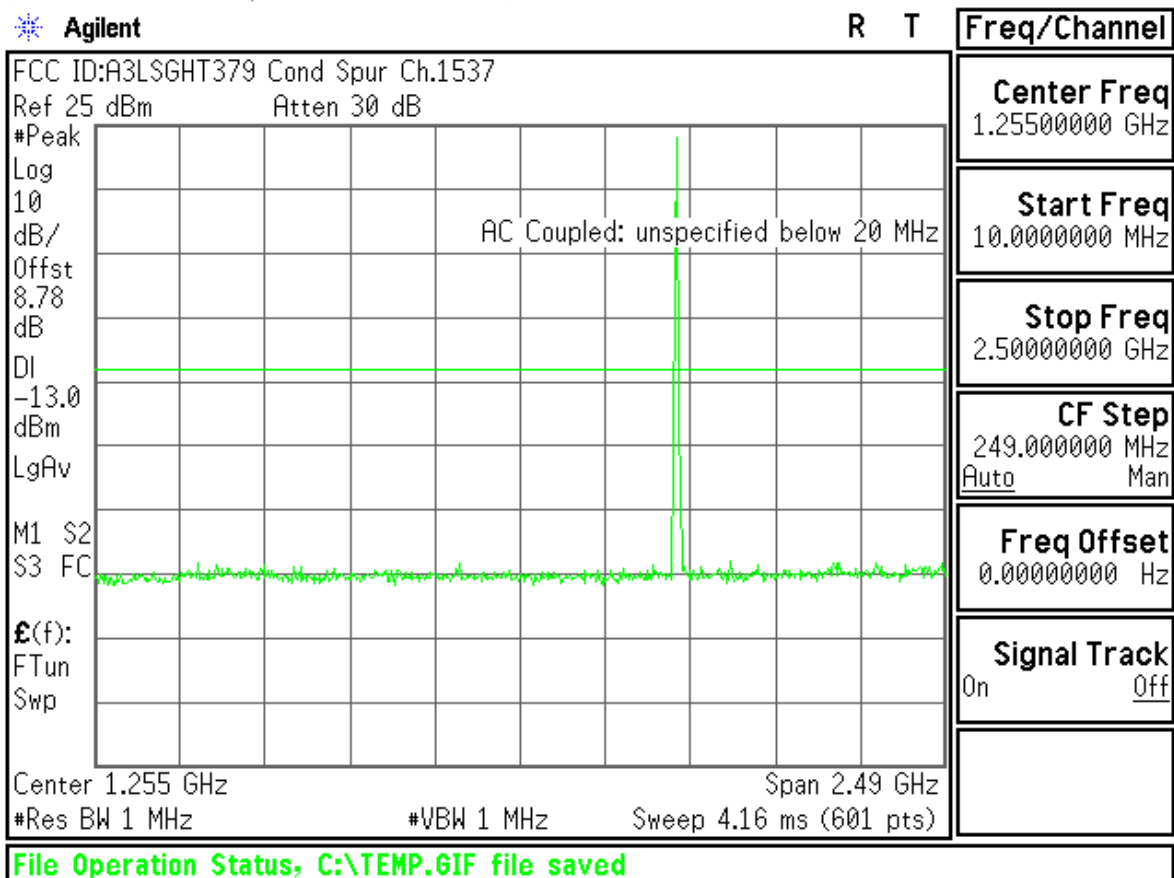


(UL Channel : 1312, DL Channel : 1537)

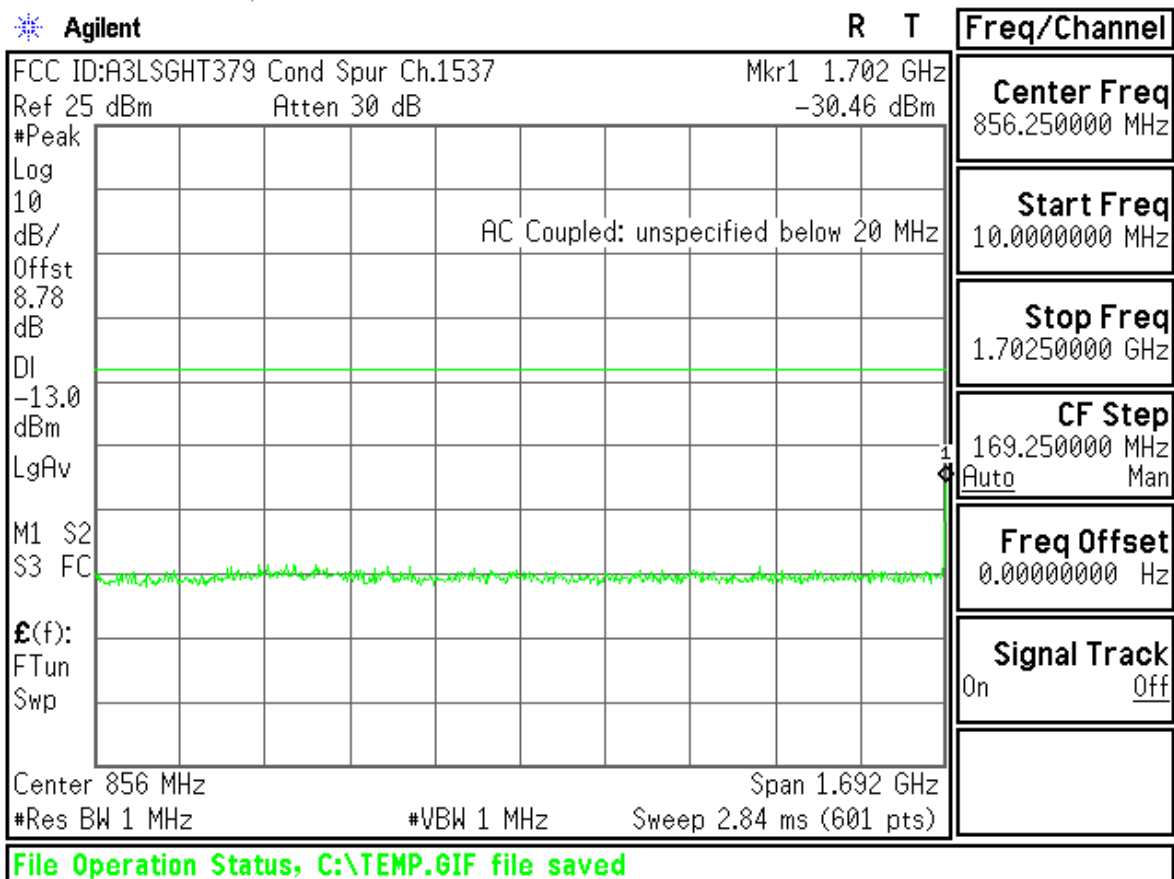

(UL Channel : 1312, DL Channel : 1537)

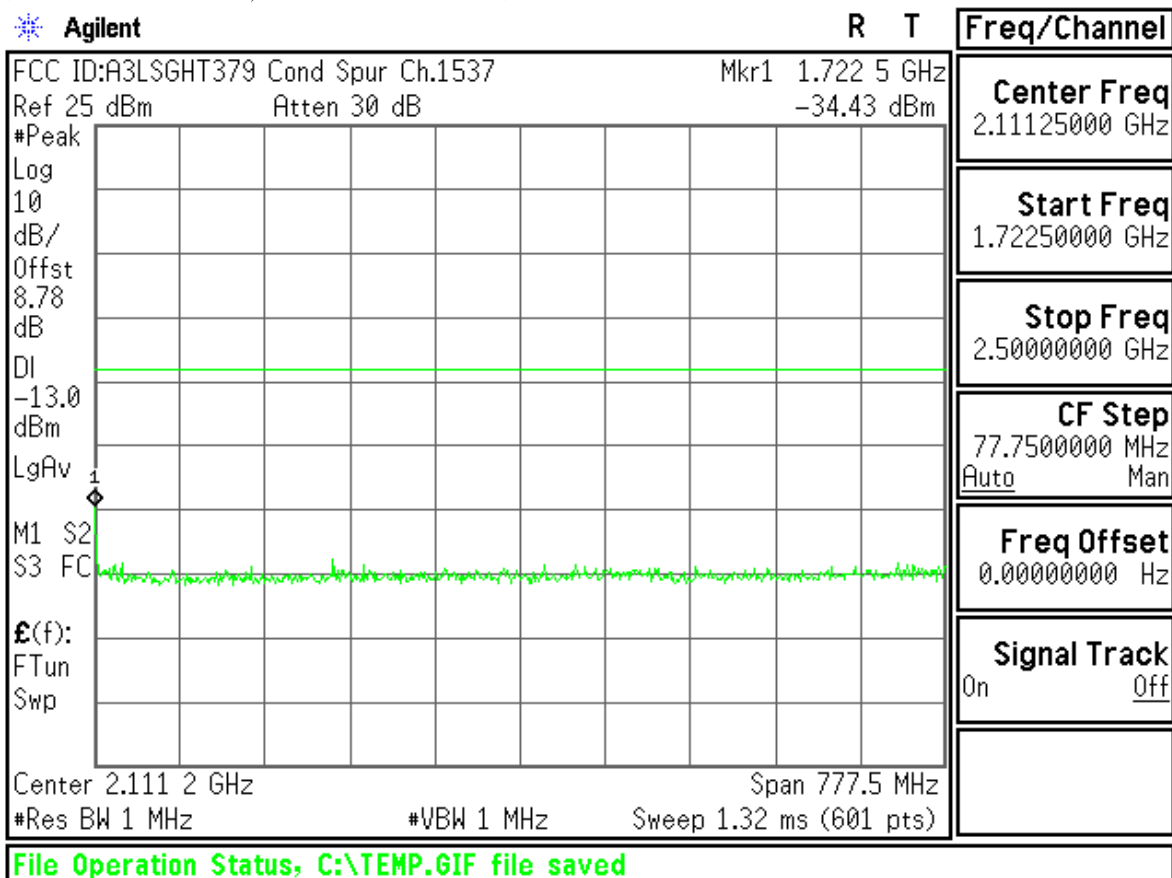

(UL Channel : 1312, DL Channel : 1537)

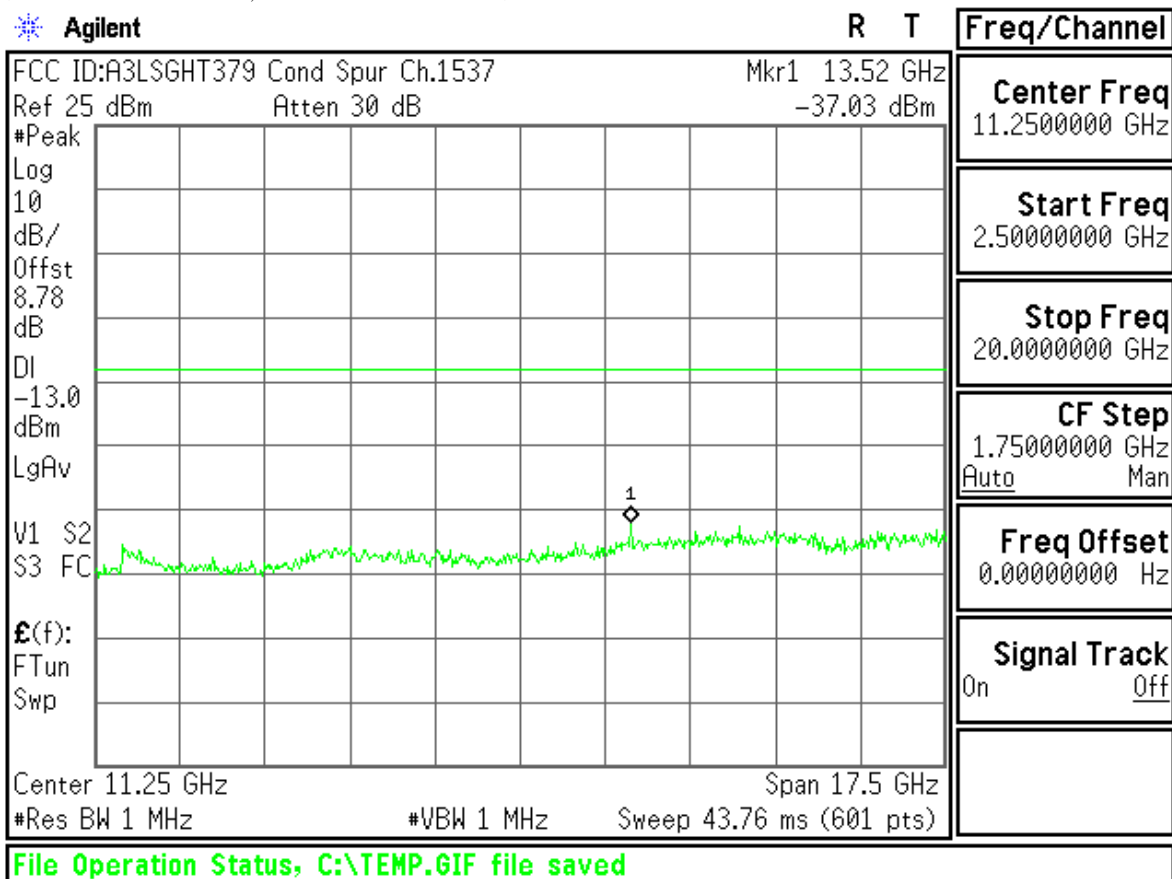


(UL Channel : 1412, DL Channel : 1637)

Agilent

R T

Freq/Channel

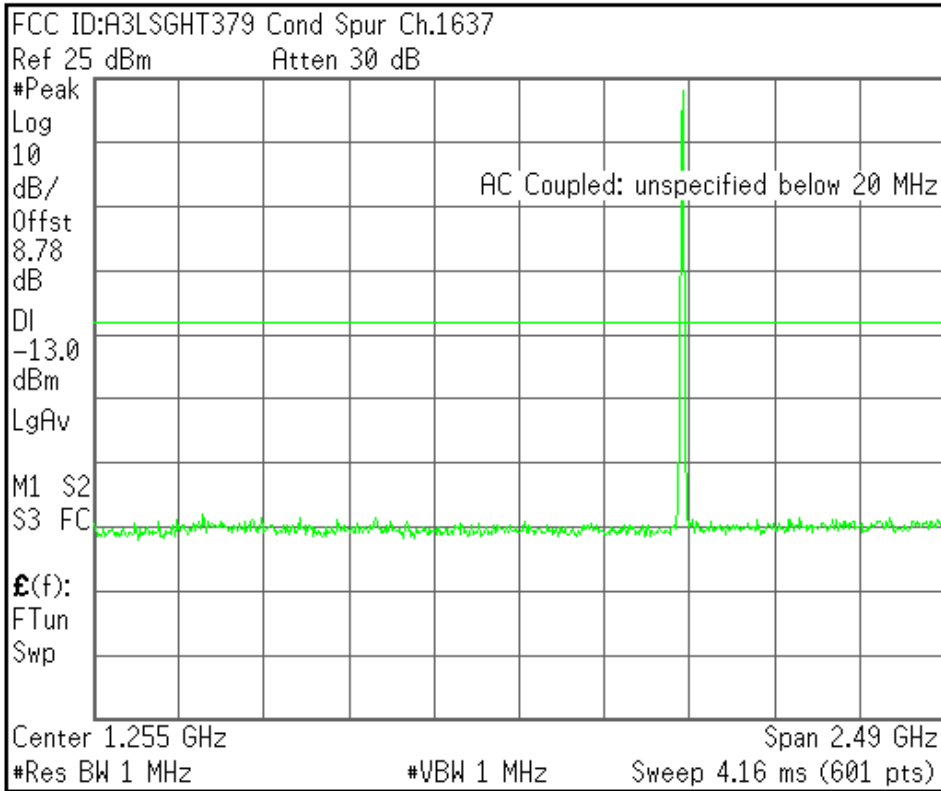

Center Freq 1.25500000 GHz
Start Freq 10.00000000 MHz
Stop Freq 2.50000000 GHz
CF Step 249.0000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


File Operation Status, C:\TEMP.GIF file saved

(UL Channel : 1412, DL Channel : 1637)

Agilent

R T


Freq/Channel

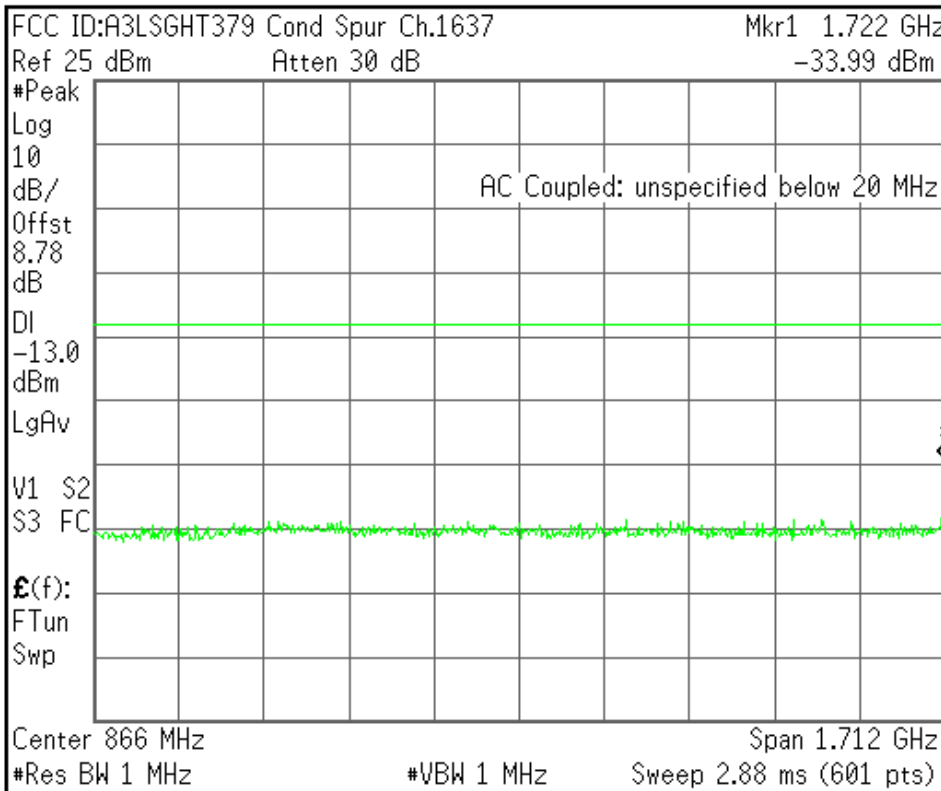


Center Freq 866.200000 MHz
Start Freq 10.00000000 MHz
Stop Freq 1.72240000 GHz
CF Step 171.240000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved


(UL Channel : 1412, DL Channel : 1637)

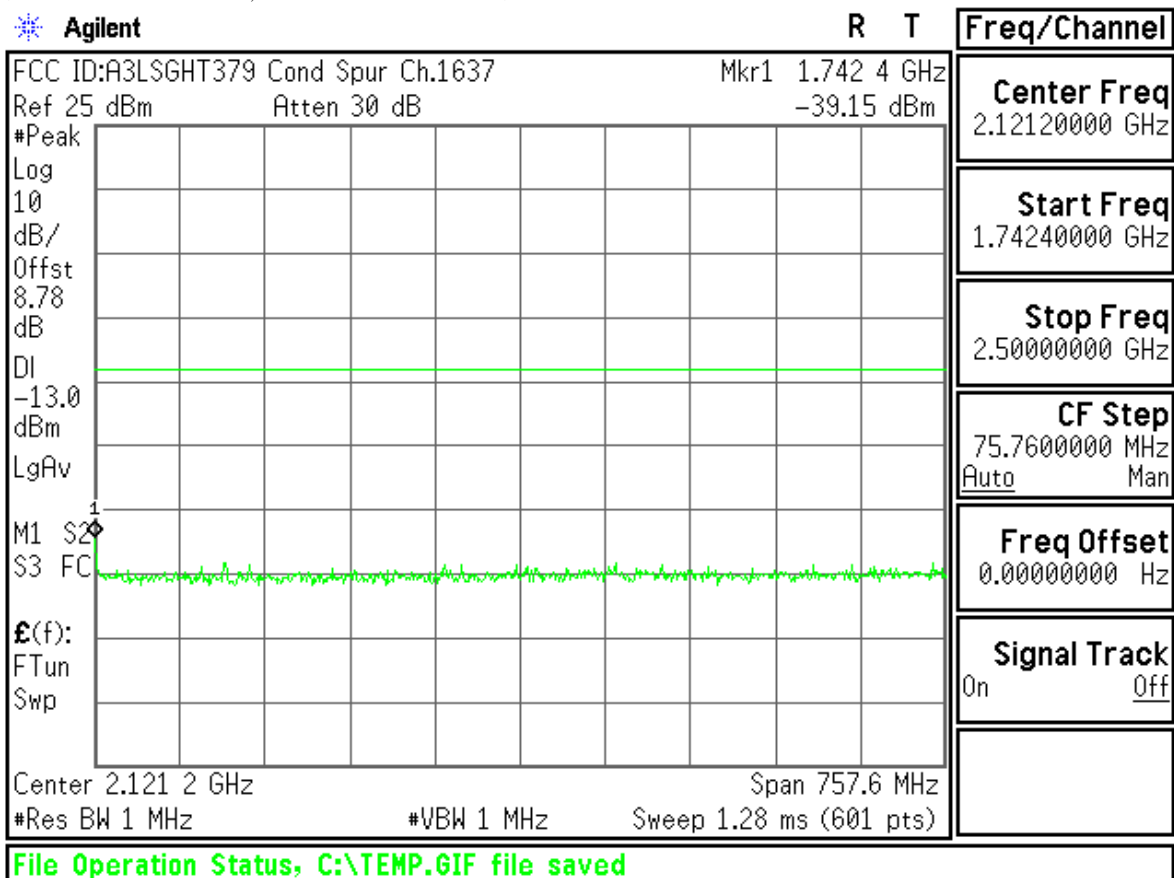


(UL Channel : 1412, DL Channel : 1637)

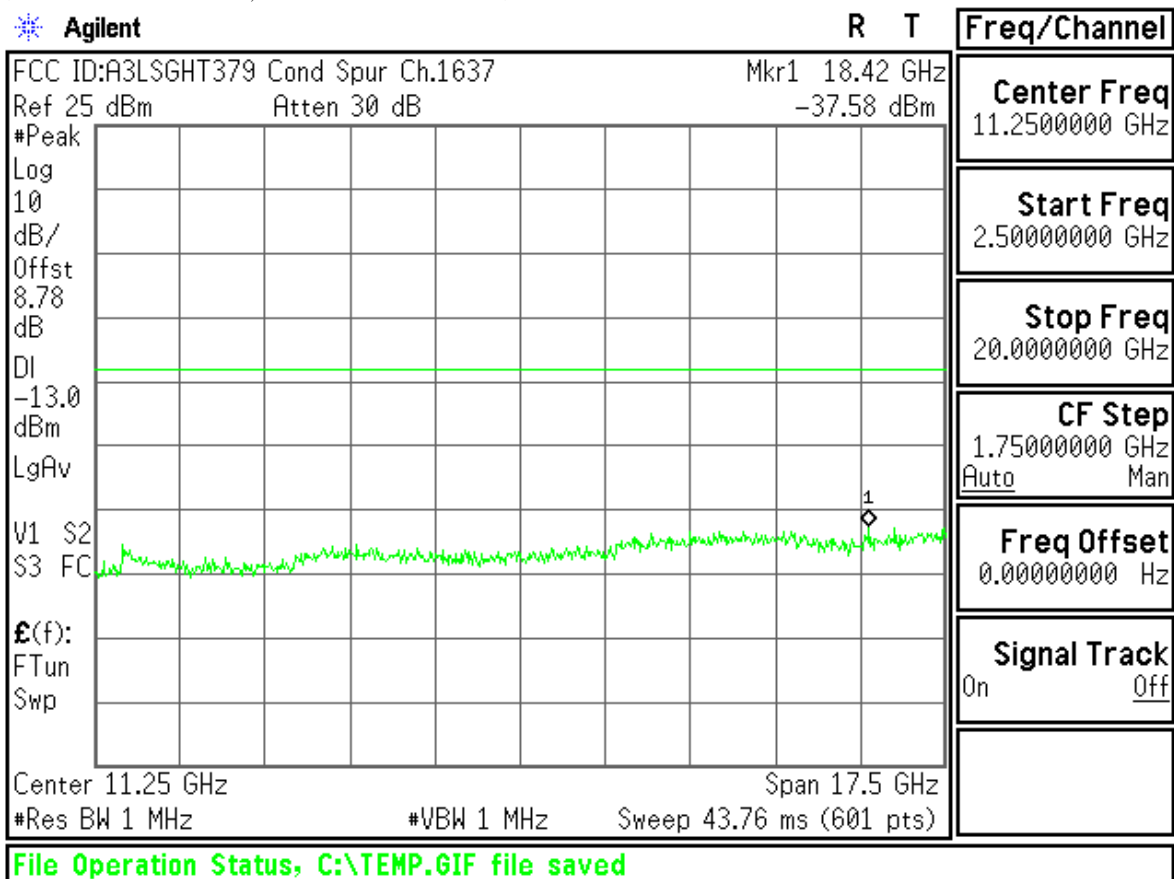


(UL Channel : 1862, DL Channel : 2087)

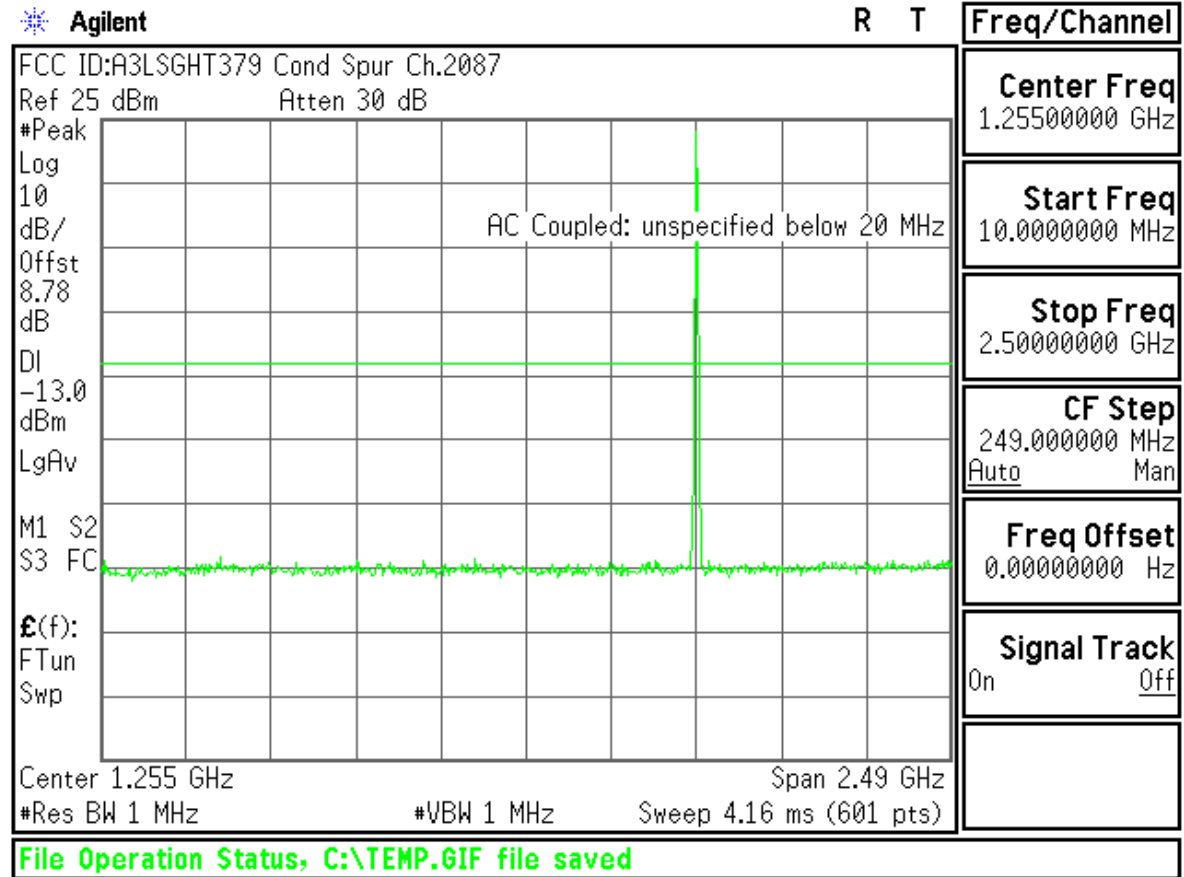


(UL Channel : 1862, DL Channel : 2087)

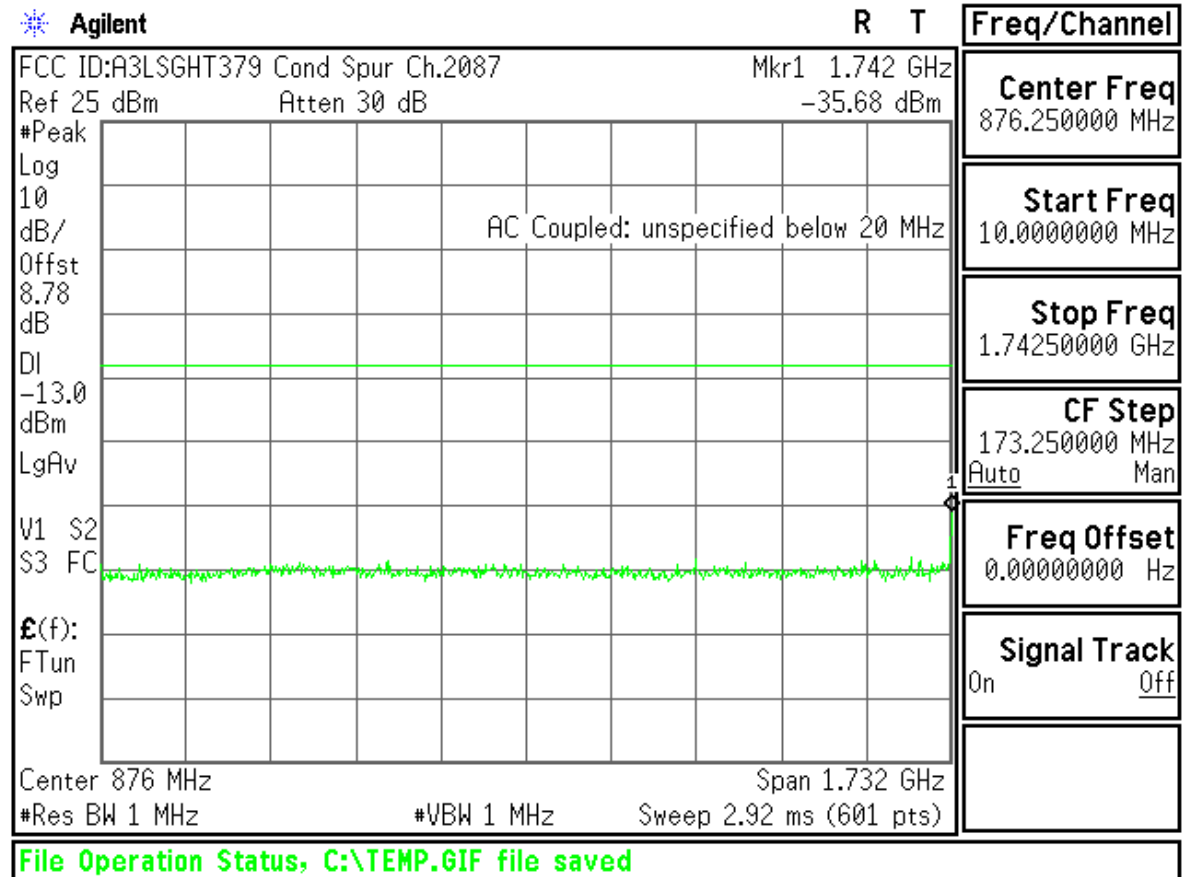


(UL Channel : 1862, DL Channel : 2087)

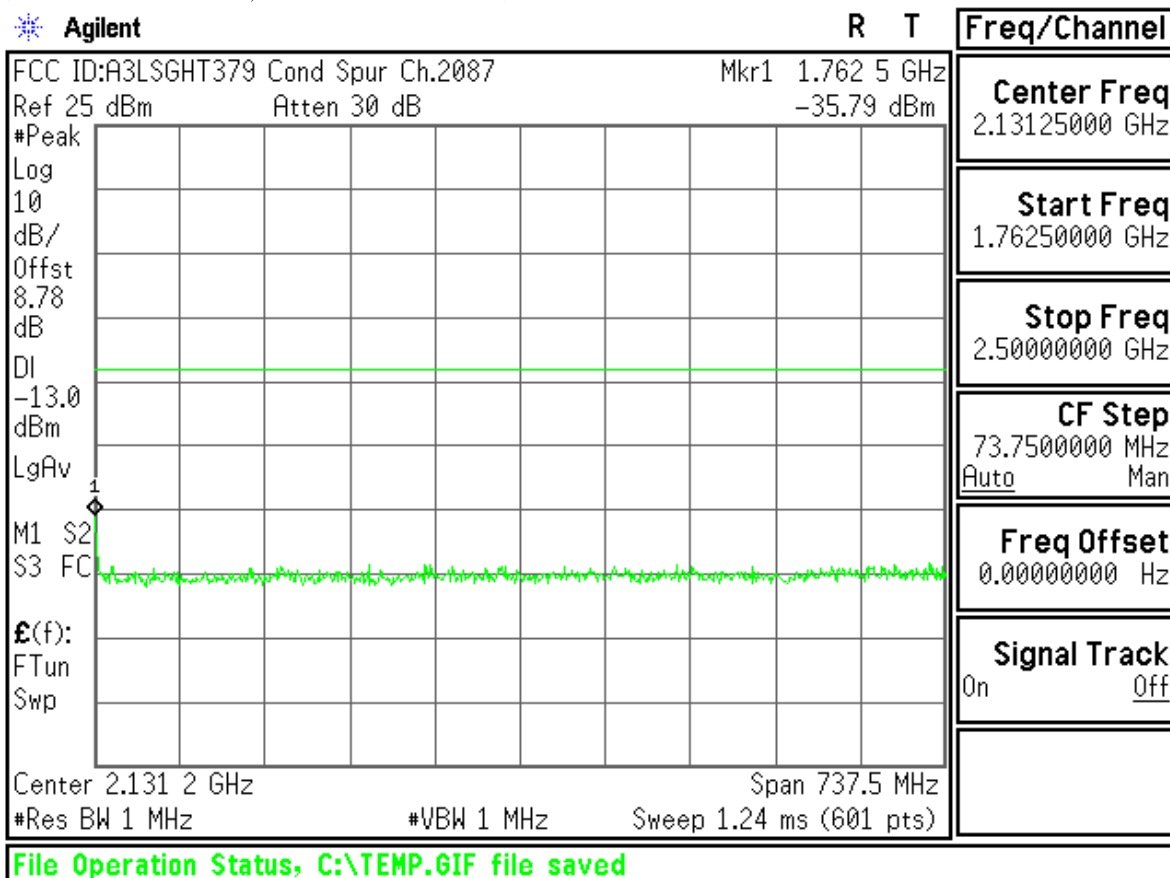


(UL Channel : 1862, DL Channel : 2087)

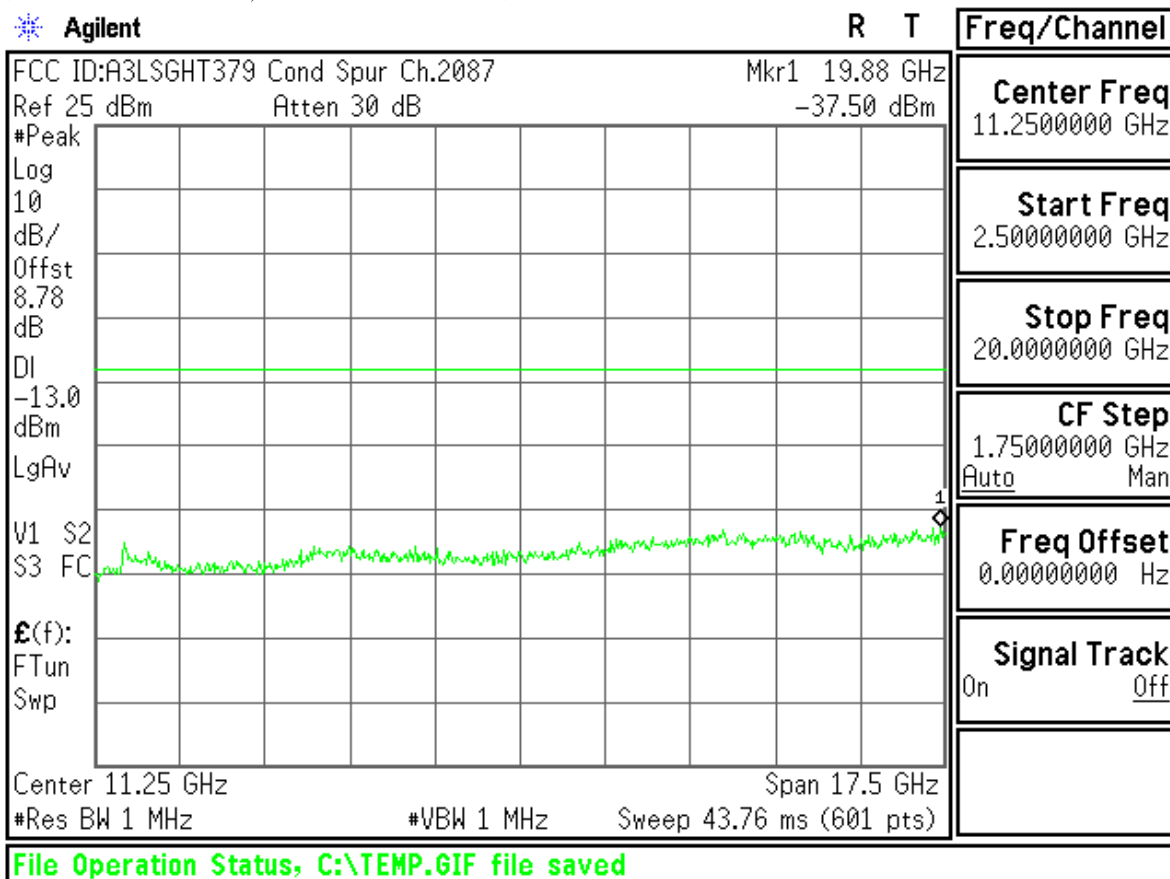


(UL Channel : 1312, DL Channel : 1537)

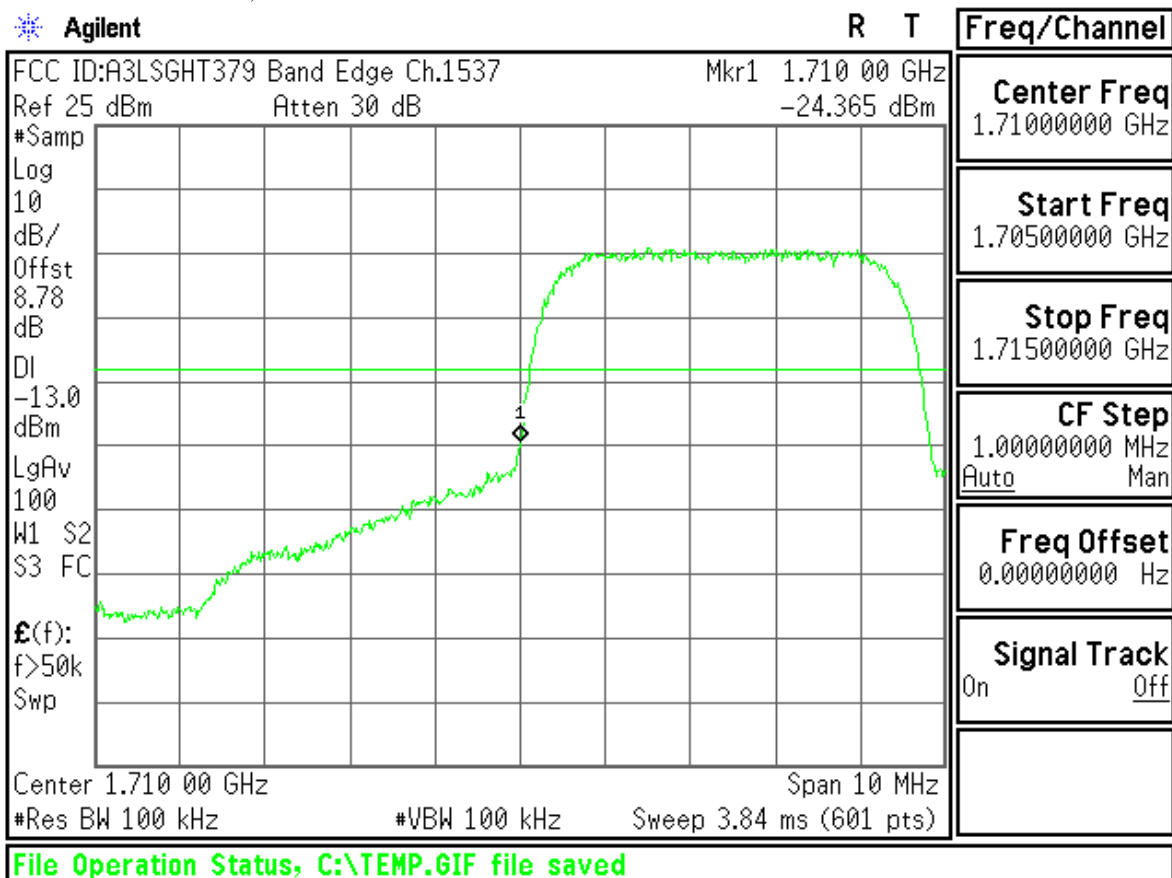


(UL Channel : 1862, DL Channel : 2087)

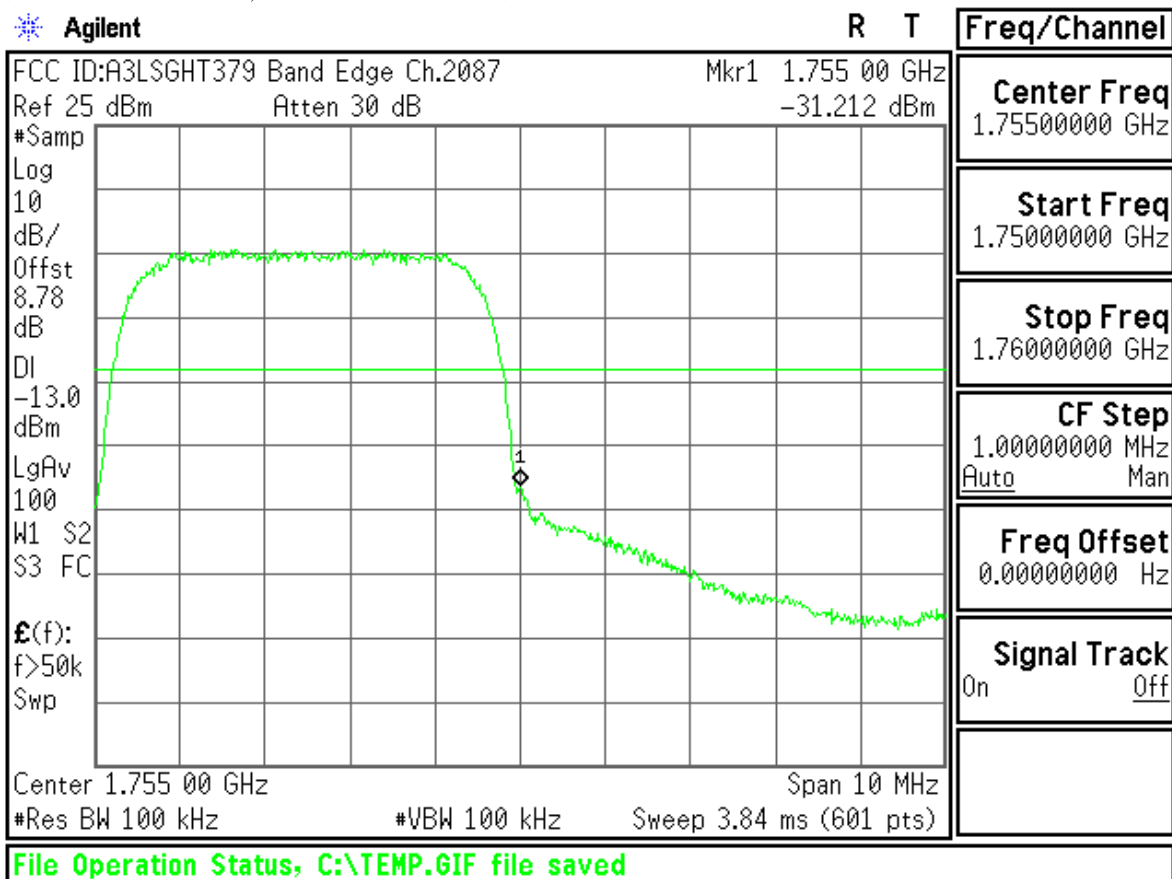

(UL Channel : 1312, DL Channel : 1537)

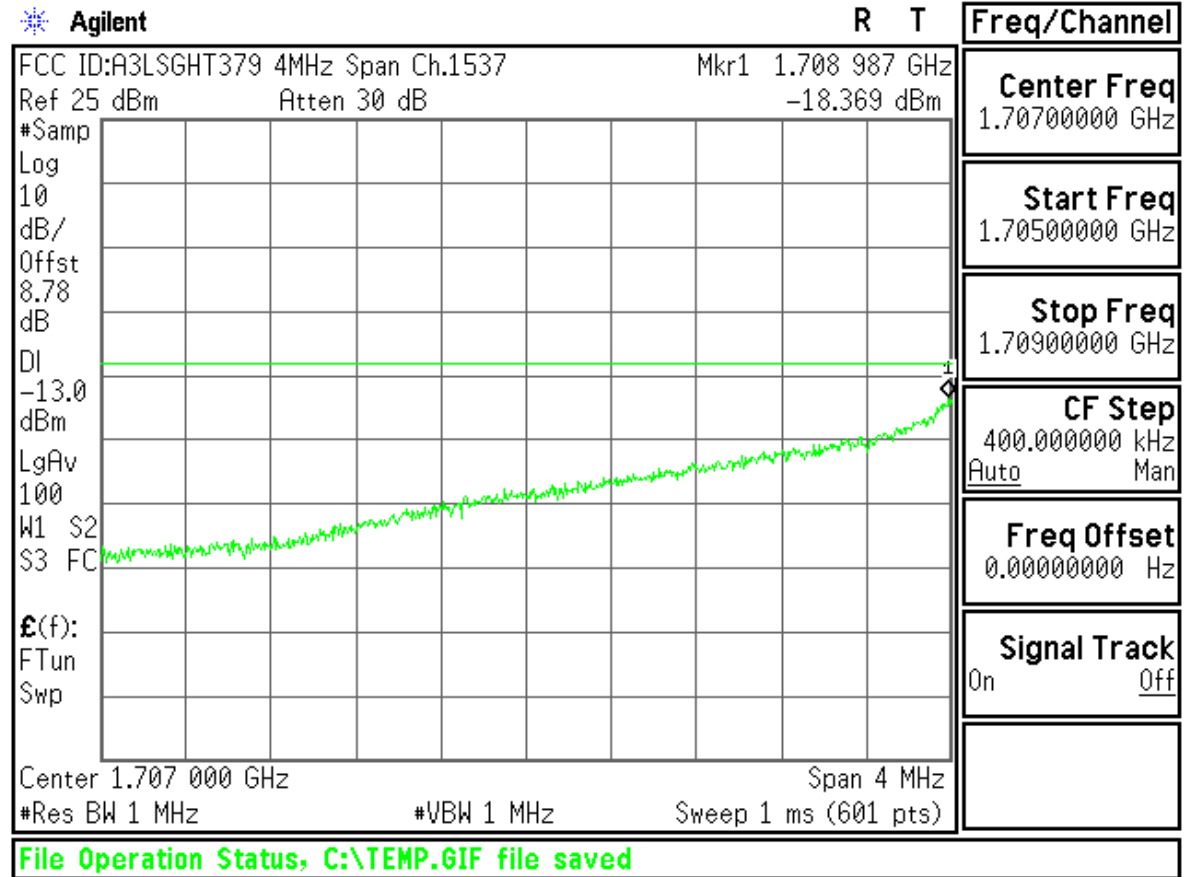

(UL Channel : 1862, DL Channel : 2087)

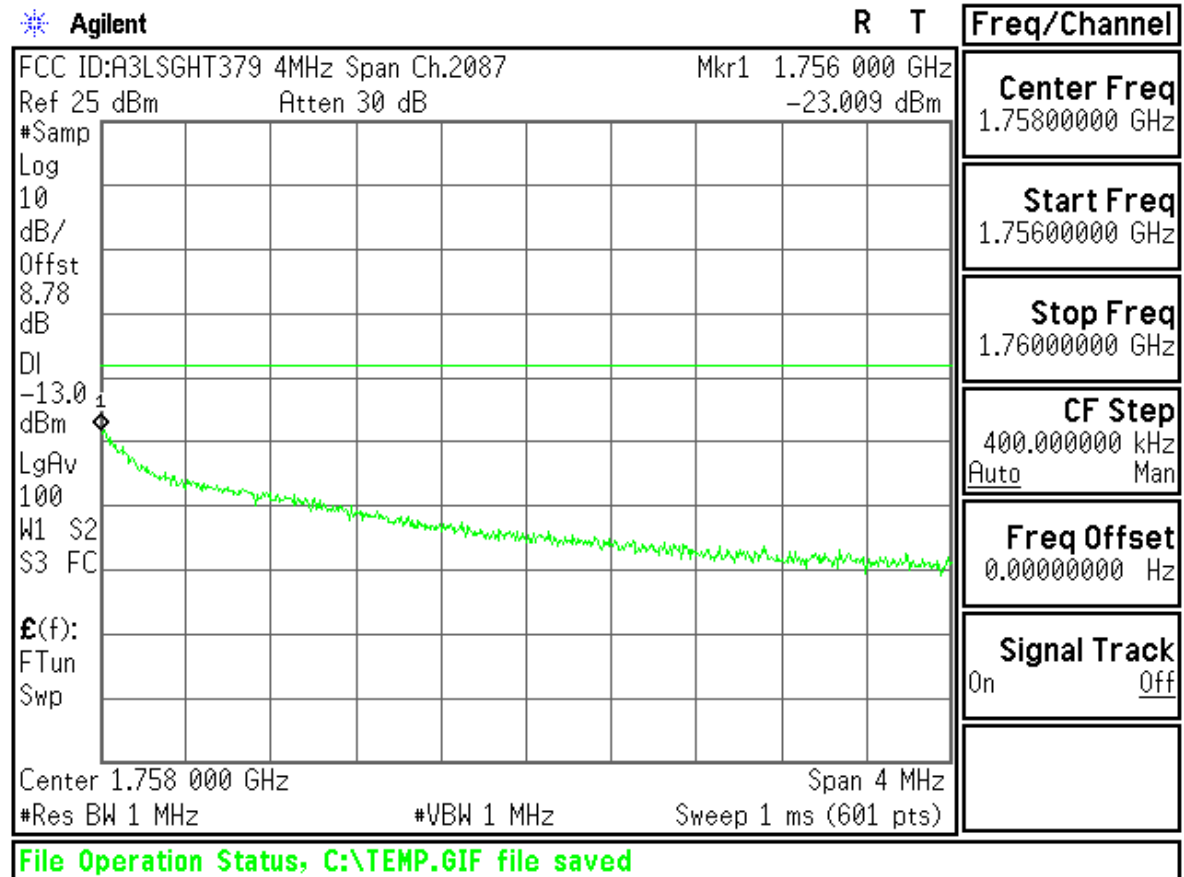

(UL Channel : 1412, DL Channel : 1637)

Agilent

R T

Mobile Ch Freq 1.7324 GHz Trig Free CCDF 3GPP W-CDMA Counts(k): 10000		Freq/Channel Center Freq 1.73240000 GHz
		Start Freq 1.73240000 GHz
		Stop Freq 1.73240000 GHz
		CF Step 5.00000000 MHz Auto Man
		Freq Offset 0.00000000 Hz
		Signal Track On Off
Copyright 2000-2006 Agilent Technologies		

Average Power 21.74 dBm 52.65%	
10.0% 1.64 dB 1.0% 2.76 dB 0.1% 3.25 dB 0.01% 3.49 dB 0.001% 3.66 dB 0.0001% 3.72 dB Peak 3.72 dB	Meas BW 5.00000000 MHz