

EMC TEST REPORT




Project No.	LBE20131290	Issue No.	0
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea	
	Date of application	February 25, 2013	
EUT	Type of device	<input checked="" type="checkbox"/> Class B personal computers and peripherals <input type="checkbox"/> All other devices	
	Equipment authorization	<input type="checkbox"/> Declaration of Conformity <input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification	
	FCC ID	A3LSHVE300SA	
	Kind of product	Mobile Phone	
	Model No.	SHV-E300S	
	Variant Model No.	Refer to clause 4.6	
	Manufacturer	SAMSUNG ELECTRONICS CO., LTD. 94-1, Imsu-dong, Gumi-si, Gyengsangbuk-do, 730-722, Republic of Korea SAMSUNG ELECTRONICS HUIZHOU CO.,LTD. 516229, Chenjiang Town, HuiZhou City, Guangdong Province, China	
Applied Standards	FCC Part 15, Subpart B, Class B / ANSI C63.4-2003		
Test Period	February 27, 2013 ~ March 4, 2013		
Issue date	March 7, 2013		
Test result : Complied			
<p>The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)</p>			
Tested by : Jeong-Soo Kim		Reviewed by : Tae-Young Jang	
			
<p>The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CS & Environment center.</p>			
			
<p>(Maetan dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea Tel: 82 31 279 1750, Fax: 82 31 279 1745</p>			

Table of contents

1. Report Information

1.1 Revision history	3
----------------------------	---

2. Summary of test results

2.1 Emission	3
--------------------	---

3. General Information

3.1 Test facility	3
-------------------------	---

4. Test Configuration

4.1 Test Peripherals	4
4.2 EUT operating mode	4
4.3 Details of Sampling	4
4.4 Used cable description	5
4.5 Test arrangement	5
4.6 EUT Description	6
4.7 Clock Frequencies	6
4.8 Test configuration and condition	7
4.9 Measurement uncertainty	7

5. Result of individual tests

5.1 Conducted disturbance	8
5.2 Radiated disturbance	10

1. Report Information

1.1 Revision history

No	Revised detailed information
Issue 0	- LBE20131290 (SAMSUNG)

2. Summary of test results

1.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
<input checked="" type="checkbox"/>	Conducted Disturbance (Mains port)	FCC Part 15 Subpart B / ANSI C63.4-2003 (Class B)	Complied
<input checked="" type="checkbox"/>	Radiated Disturbance		Complied

3. General Information

3.1 Test facility

The CS & Environment center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2. and Shielded rooms.

The CS & Environment center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID / DoC
A	Mobile Phone	SHV-E300S	-	SAMSUNG	A3LSHVE300SA
B	Battery	B600BK	NAaD206NS/2-B	SAMSUNG	-
C	Headset	EO-HS3303WE	-	SAMSUNG	-
D	Data Cable	ECB-DU4EWE	-	SAMSUNG	-
E	microSD Card	16GB	-	SANDISK	-
F	Desk-Top Computer	HP Compaq dx2200	CNG7060LW0	HP	DoC
G	LCD TV Monitor	933HDPLUS	-	SMASUNG	DoC
H	Mouse	N3+Optical	K034729902	HP	DoC
I	Keyboard	SDM8500P	8M000131	SAMSUNG	DoC
J	Gigabit Switch 8	3CGSU08	AB/9XRQAC0024825	3COM	DoC
K	Power Supply	PW150	KA1203N03	AULT	DoC

4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

Operating Mode 1	USB Mode (Data Communication)
-------------------------	-------------------------------

4.3 Details of Sampling


Customer selected, single unit.

4.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:

No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable	1.5	Yes	From EUT to Desktop PC
2	Headset	1.2	No	For EUT
3	PS/2	1.8	Yes	For Keyboard
4	PS/2	1.8	Yes	For Mouse
5	Power	1.8	No	For Desktop PC
6	Power	1.8	No	For LCD Monitor
7	Power	3.9	No	For Power Supply
8	RGB Cable	1.8	Yes	From Monitor to Desktop PC
9	LAN cable	1.5	Yes	From Desktop PC to Router
10	LAN cable	1.5	Yes	From Router to Local Area Network

4.5 Test arrangement

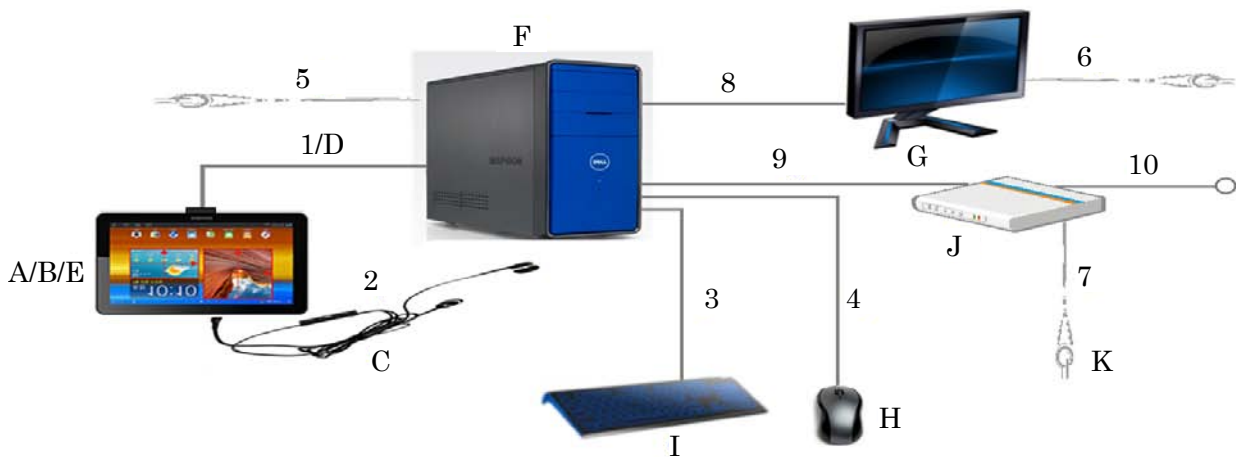

4.6 EUT Description

4.6.1 The following features describe EUT represented by this report:

Item	Specification	
Frequency Range	GSM 1900	TX : 1 850.2 ~ 1 909.8 MHz RX : 1 930.2 ~ 1 989.8 MHz
	WCDMA 850	TX : 826.4 ~ 846.6 MHz RX : 871.4 ~ 891.6 MHz
	WCDMA 1900	TX : 1 852.4 ~ 1 907.6 RX : 1 932.4 ~ 1 987.6
	LTE FDD5	TX : 824.0 ~ 848.9 MHz RX : 869.0 ~ 893.9 MHz
	LTE FDD17	TX : 704.0 ~ 715.9 MHz RX : 734.0 ~ 745.9 MHz
Operating Temperature (°C)	-20 ~ +60	
Operating Humidity (%)	0 ~ 95	

4.6.2 The variant models

- None

4.7 Clock Frequencies

Kind of Clocks	Frequency [MHz]
CPU	1 800
USB	24

4.8 Test configuration and condition

- The EUT exercise program which is the samsung standardized emission test program for windows was used during all EMC measurements were tested. This program was contained on the PC hard disk drive. Once loaded, the program sequentially exercises each system component in turn.
- The EUT was exercised during the testing by data read and write cycles repeated with internal storage devices. At the end of the test, the copied back data was compared with original.
- The EUT was connected to the PC by using USB data cable to charge.
- The system was configured for testing in a typical fashion that a customer would normally use, and was tested while in an automated non-attendant mode.

Power source for the EUT operating was supplied by CVCF made by the Pacific Power Source Corp.

- Test Voltage : AC 120 V, 60 Hz

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	±3.24 dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	±4.59 dB
	Vertical	±4.75 dB
Radiated Disturbance (1 GHz ~ 6 GHz)	Horizontal	±4.18 dB
	Vertical	±4.15 dB

5. Results of individual test

5.1 Conducted disturbance

The EUT was connected to the Desk-Top Computer which was powered from one LISN for the measurements. The support equipment power cables were connected to a second LISN. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports

Frequency range Limits MHz	Resolution Bandwidth	Limits dB(μ V)	
		Quasi-peak	Average
0,15 to 0,50	9 kHz	66 to 56	56 to 46
0,50 to 5	9 kHz	56	46
5 to 30	9 kHz	60	50

NOTE 1 The lower limit shall apply at the transition frequency.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E3I-266	Test Receiver	ESCI3	R&S	100086	2012-11-27	12
E3I-259	LISN	ENV216	R&S	101369	2012-12-07	12
E3I-260	LISN	ENV216	R&S	101366	2012-09-11	12

5.1.2 Temperature and humidity condition

Test date	2013-03-04	Test engineer	Jeong-Soo Kim
Climate condition	Ambient temperature	23.1 °C	Limit (15.0 to 35.0) °C
	Relative humidity	37.2 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	101.9 kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR8)		

5.1.3 Test results

- Operating Mode 1: AC Mains

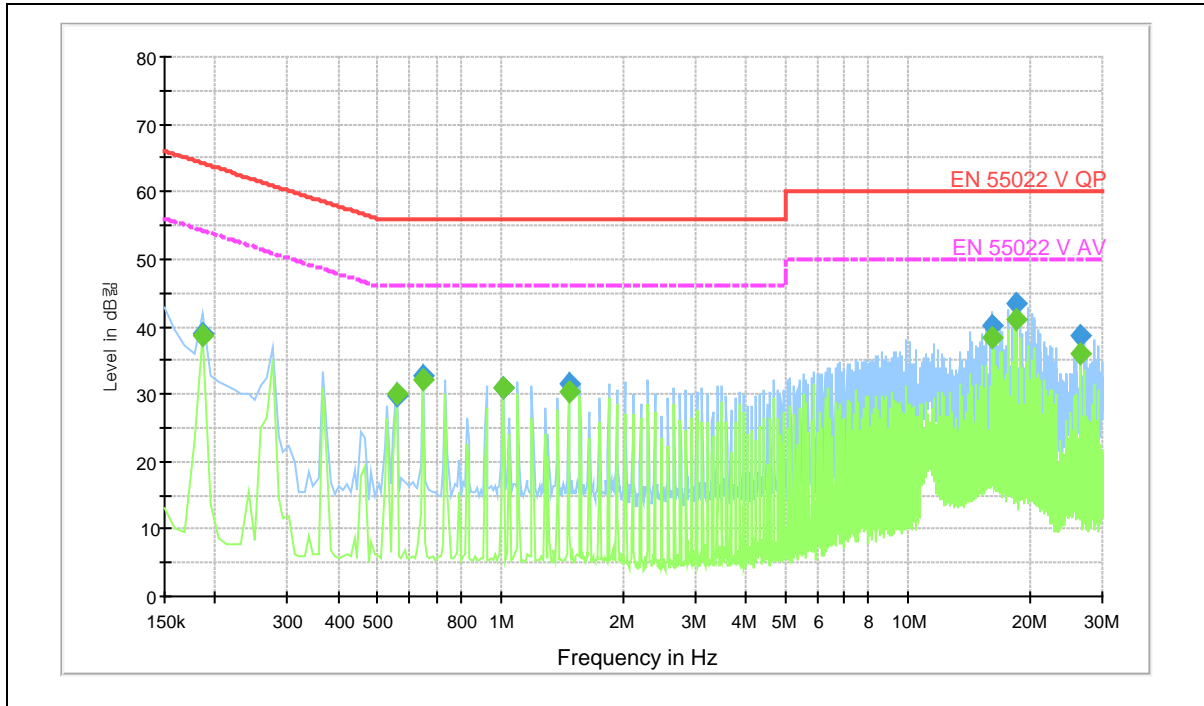

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Quasi-peak final measurement results table:

Frequency (MHz)	Level (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186	39.1	L1	10.1	25.1	64.2
0.555	29.8	N	10.0	26.2	56.0
0.645	32.6	L1	10.0	23.4	56.0
1.014	30.9	L1	9.8	25.1	56.0
1.473	31.6	L1	9.8	24.4	56.0
16.170	40.1	L1	9.8	19.9	60.0
18.366	43.4	N	10.0	16.6	60.0
26.610	38.5	N	10.1	21.5	60.0

Average final measurement results table:

Frequency (MHz)	Level (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186	38.6	L1	10.1	15.6	54.2
0.555	30.1	N	10.0	15.9	46.0
0.645	32.2	L1	10.0	13.8	46.0
1.014	30.9	L1	9.8	15.1	46.0
1.473	30.4	L1	9.8	15.6	46.0
16.170	38.3	L1	9.8	11.7	50.0
18.366	40.9	N	10.0	9.1	50.0
26.610	35.8	N	10.1	14.2	50.0

Note 2) Level (QP and/or AV) = Meter Reading (QP and/or AV) + Corr. (LISN Insertion Loss + Cable Loss)
 Margin (QP and/or AV) = Limit – Level (QP and/or AV)
 QP = Quasi-Peak, AV = Average

5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution bandwidth	Video bandwidth	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120 kHz	300 kHz	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detectors.

Limits for radiated disturbance of ITE at a measuring distance of 3 m and 10m

Frequency range Limits [MHz]	Field Strength		
	3 m [$\mu\text{V/m}$]	3 m [dB($\mu\text{V/m}$)]	10 m [dB($\mu\text{V/m}$)]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Peak/RMS-Average measurements were made over the changeable frequency range 1GHz to 40GHz or 5th in accordance with internal maximum operating frequency at a measurement distance of 3m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	1	3	Continuous

Limits for radiated disturbance of ITE at a measurement distance of 3 m

Class	Limits [dB($\mu\text{V/m}$)]	
	Peak	Average
A	80	60
B	74	54
Average limit 500, $20 \log 500 = 53.979 \text{ dB} \approx 54 \text{ dB}$		

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and rms-average detectors. Results checked manually; and points close to the limit line were re-measured.

5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E3I-190	BILOG Antenna	CBL6112B	Schaffner	2804	2011-06-22	24
E3I-003	BILOG Antenna	TESEQ	CBL6112B	2805	2012-04-19	24
E3I-170	Double-Ridged Waveguide Horn Antenna	HF906	R&S	100028	2012-08-13	24
E3I-213	Preamplifier	317	Sonoma	282424	2012-11-14	12
E3I-214	Preamplifier	317	Sonoma	282425	2012-11-14	12
E3I-228	EMI Test Receiver	ESU-08	R&S	100084	2012-10-18	12
E3I-233	EMI Test Receiver	ESU-26	R&S	100364	2012-10-26	12


5.2.2 Temperature and humidity condition

Test date	2013-02-27	Test engineer	Jeong-Soo Kim
Climate condition	Ambient temperature	22.9 ℃	Limit (15.0 to 35.0) ℃
	Relative humidity	38.6 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	101.4 kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber (SAC4)		

5.2.3 Test results

Operating Mode 1

- Frequency range: 30 ~ 1 000 MHz

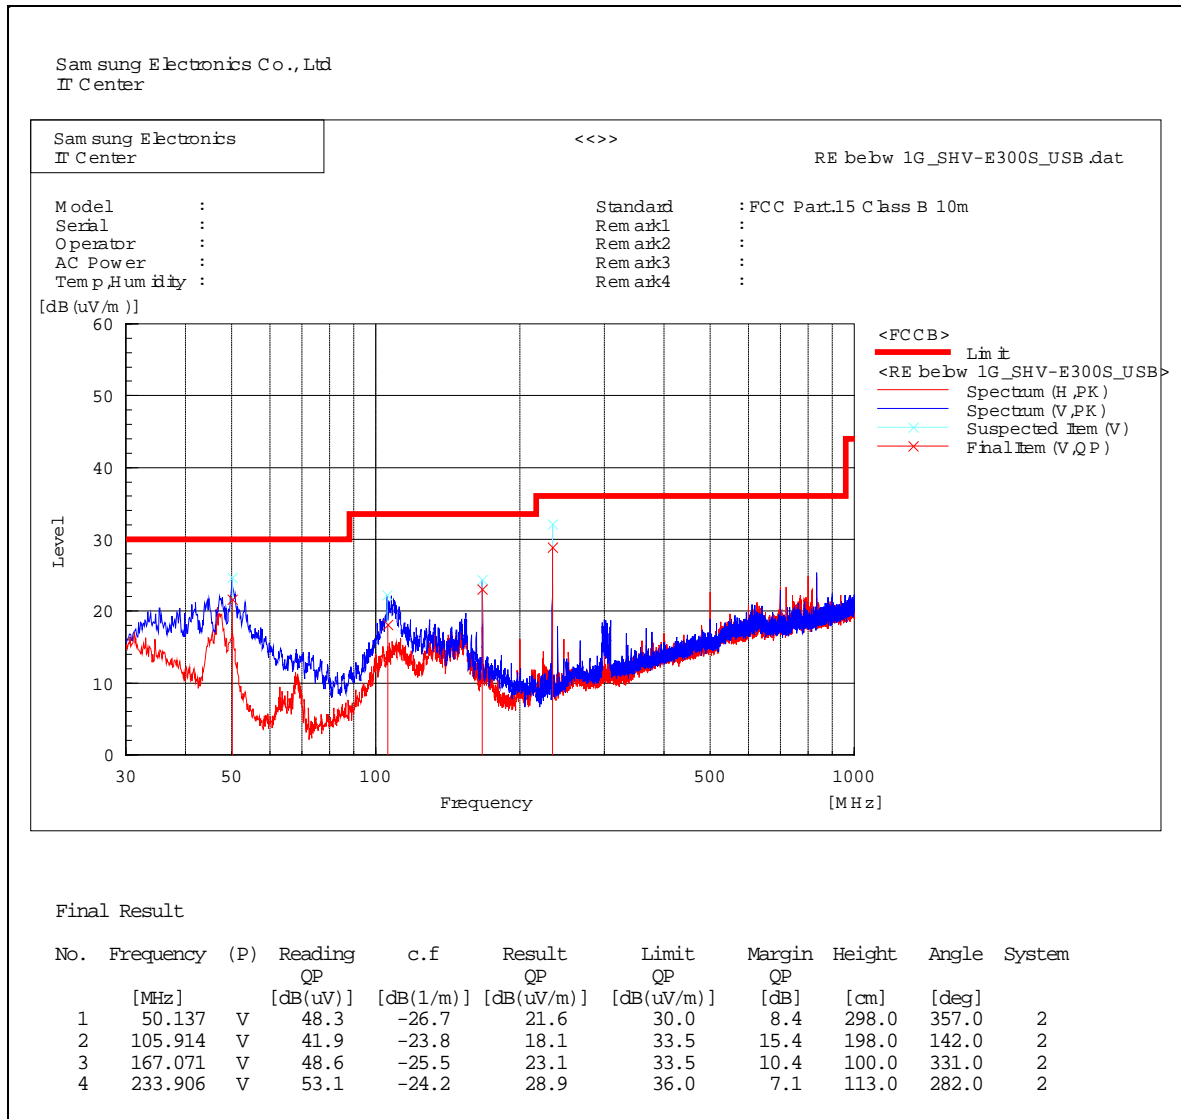

Note) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Level (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit – Level (QP)

QP = Quasi-Peak

- Frequency range: 1 000 ~ 9 000 MHz

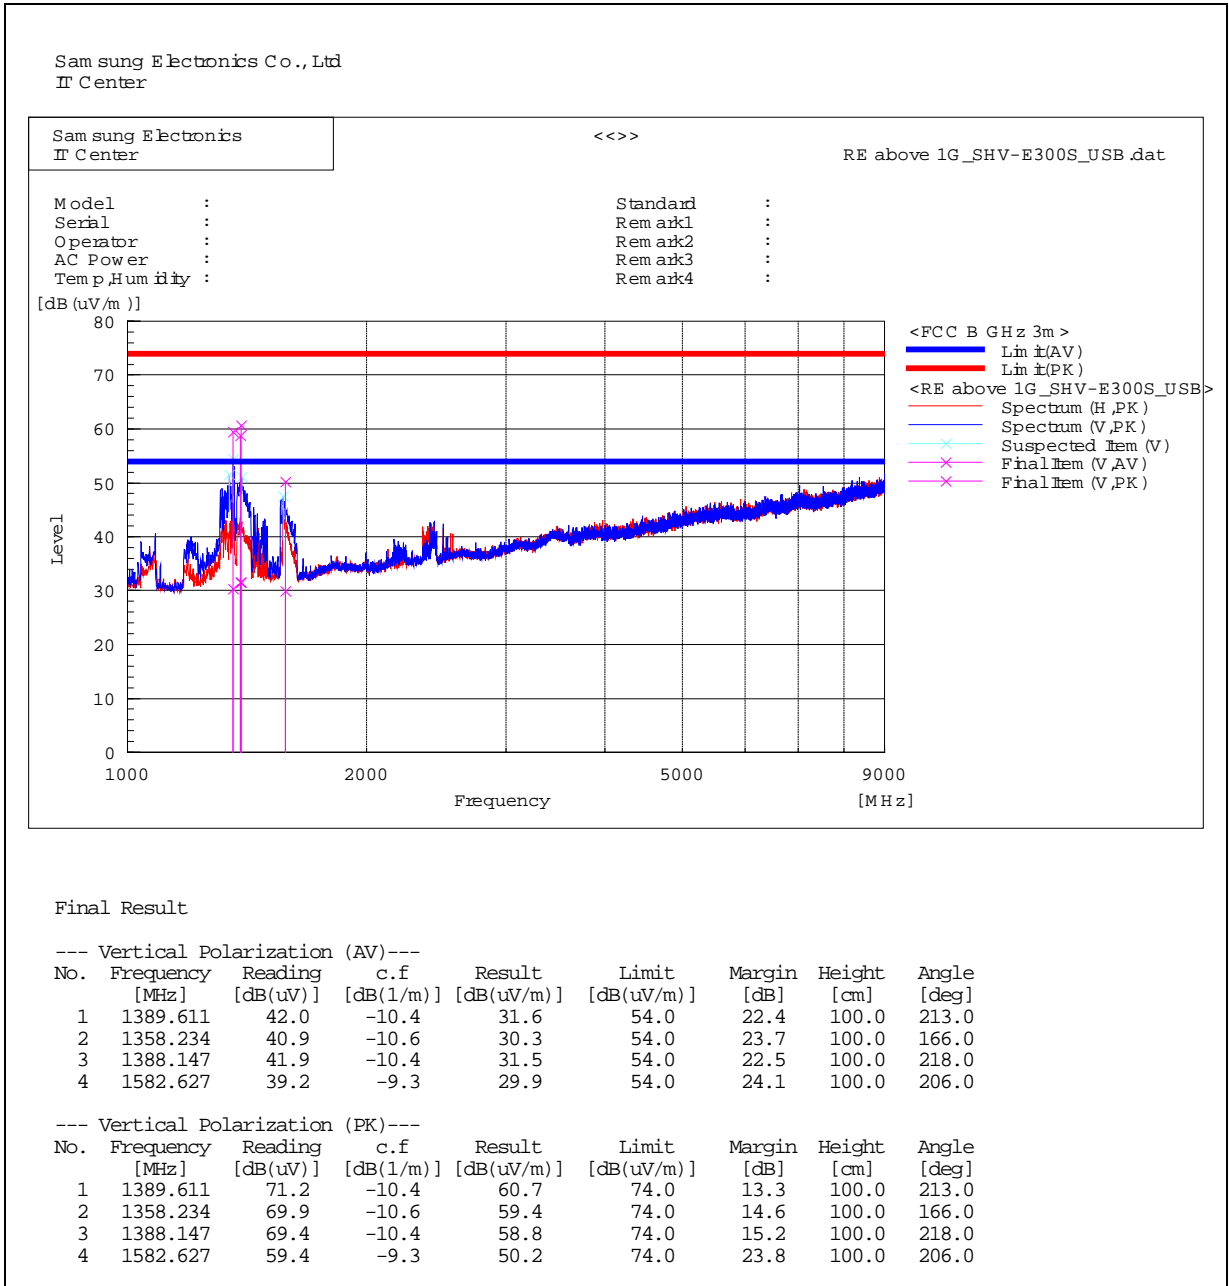

Note1) Radiated emissions that do not exceed average limit were not tested with average detector mode.

Note2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or AV) = Reading (PK and/or AV) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or AV) = Limit - Level (PK and/or AV)

PK = Peak, AV = Average