



# EMC TEST REPORT

<b>Project No.</b>	LBE20190617	<b>Issue No.</b>	0
<b>Applicant</b>	<b>Name of organization</b>	Samsung Electronics Co., Ltd.	
	<b>Address</b>	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea	
	<b>Date of application</b>	April 4, 2019	
<b>EUT</b>	<b>Type of device</b>	<input checked="" type="checkbox"/> All other Receivers subject to part15 <input checked="" type="checkbox"/> Class B Personal Computers and peripherals <input checked="" type="checkbox"/> Other Class B digital devices and peripherals <input checked="" type="checkbox"/> FM Broadcast Receiver	
	<b>Equipment authorization</b>	<input checked="" type="checkbox"/> Certification <input type="checkbox"/> Supplier's Declaration of Conformity	
	<b>FCC ID</b>	A3LSMA102U	
	<b>Kind of product</b>	Mobile Phone	
	<b>Model No.</b>	SM-A102U	
	<b>Variant Model No.</b>	Refer to clause 4.6	
	<b>Manufacturer</b>	SAMSUNG ELECTRONICS VIETNAM CO.,LTD. Kcn Yen Binh1, huyen pho Yen Tinh Thai Nguyen, VIETNAM	
<b>Applied Standards</b>		47 CFR Part 15, Subpart B, Class B / ANSI C63.4-2014	
<b>Test Period</b>		April 4, 2019 ~ April 17, 2019	
<b>Issue date</b>		April 23, 2019	
<b>Test result : Complied</b> The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)			
<b>Tested by</b> : Ji-Yeon Lee 		<b>Reviewed by</b> : Young-Hun Kim 	
The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from Global CS Center.			
Global CS Center of Samsung Electronics Co., Ltd. (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea			

# Table of contents

## 1. Report Information

1.1 Revision history .....	3
----------------------------	---

## 2. Summary of test results

2.1 Emission .....	3
--------------------	---

## 3. General Information

3.1 Test facility .....	3
-------------------------	---

## 4. Test Configuration

4.1 Test Peripherals .....	4
4.2 EUT operating mode .....	5
4.3 Details of Sampling .....	5
4.4 Used cable description .....	6
4.5 Test arrangement .....	7
4.6 EUT Description .....	9
4.7 EUT Frequencies .....	9
4.8 Test configuration and condition .....	10
4.9 Measurement uncertainty .....	10

## 5. Result of individual tests

5.1 Conducted disturbance .....	11
5.2 Radiated disturbance .....	17

# 1. Report Information

## 1.1 Revision history

No.	Revised detailed information
Issue 0	There are no revisions and this version is basic test report.

## 1.2 RSE test report no.

No.	Remark
1M1904030051-11	The cellular receiver mode refers to the radiated spurious emissions test report.

# 2. Summary of test results

## 2.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
<input checked="" type="checkbox"/>	Conducted Disturbance (Mains port)	47 CFR Part 15 Subpart B / ANSI C63.4-2014 (Class B)	Complied
<input checked="" type="checkbox"/>	Radiated Disturbance		Complied

# 3. General Information

## 3.1 Test facility

The Global CS Center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea. All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 32, CISPR 16-1-4 and Shielded rooms. And all antennas are properly calibrated using ANSI C63.5:2017.

The Global CS Center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

## 4. Test Setup configuration

### 4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID
A	Mobile Phone	SM-A102U	-	SAMSUNG	A3LSMA102U
B	Battery	EB-BA202ABU	-	SAMSUNG	-
C	Headset	EHS64AVFWE	-	SAMSUNG	-
D	Data Cable	EP-DR140AWE	-	SAMSUNG	-
E	Micro SD Card	64GB	-	SAMSUNG	-
F	Laptop Computer	Latitude5580	1CHRYM2	Dell	-
			D3HRYM2	Dell	-
G	Laptop AC Adapter	LA65NM130	5D77	Dell	-
			5B3C	Dell	-
H	Mouse	AA-SM7PCPB	CN57BA5903634ADV 8JK281082	SAMSUNG	-
			CNBA5903634ADV8J 31O3050	SAMSUNG	-
I	OTG Gender	EE-UG970	-	SAMSUNG	
J	Router	DIR-806A	RF0F1D5000688	D-Link	-
			RF0F1D8011504	D-Link	-
K	Travel Adapter	EP-TA50JWE	DK6M213VS/A-E	SAMSUNG	-

## 4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

### 4.2.1 Conducted Emission

No.	Operating mode
1	Camera (rear) + Charging (w/ TA) + Cellular receiver (GSM850 Center Frequency) + FM (Low Ch.)
2	Camera (front) + Charging (w/ TA) + FM (Mid Ch.)
3	Charging (w/ TA) + FM (High Ch.)
4	Video + Audio playback from internal memory data + Charging (w/ TA)
5	USB Data Communication with PC (from external memory data)

### 4.2.2 Radiated Emission

No.	Operating mode
1	Camera (rear) + Charging (w/ TA) + FM (Low Ch.)
2	Camera (front) + FM (Mid Ch.)
3	FM (High Ch.)
4	Video + Audio playback from internal memory data
5	USB Data Communication with PC (from external memory data)

## 4.3 Details of Sampling



Customer selected, single unit.

#### 4.4 Used cable description


The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:

No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable	0.8	Y	From EUT to Laptop Computer
				From EUT to Travel Adapter
2	Headset	1.3	N	For EUT
3	Power	1.8	N	For Laptop Computer to Laptop AC Adapter
4	Power	1.5	N	For Laptop AC Adapter
5	LAN	1.5	Y	From Laptop Computer to Router
6	USB	0.8	N	From Laptop Computer to Router for DC Power
7	USB	1.8	N	From OTG Gender to Mouse


#### 4.5.1 Conducted Emission




#### 4.5.2 Radiated Emission

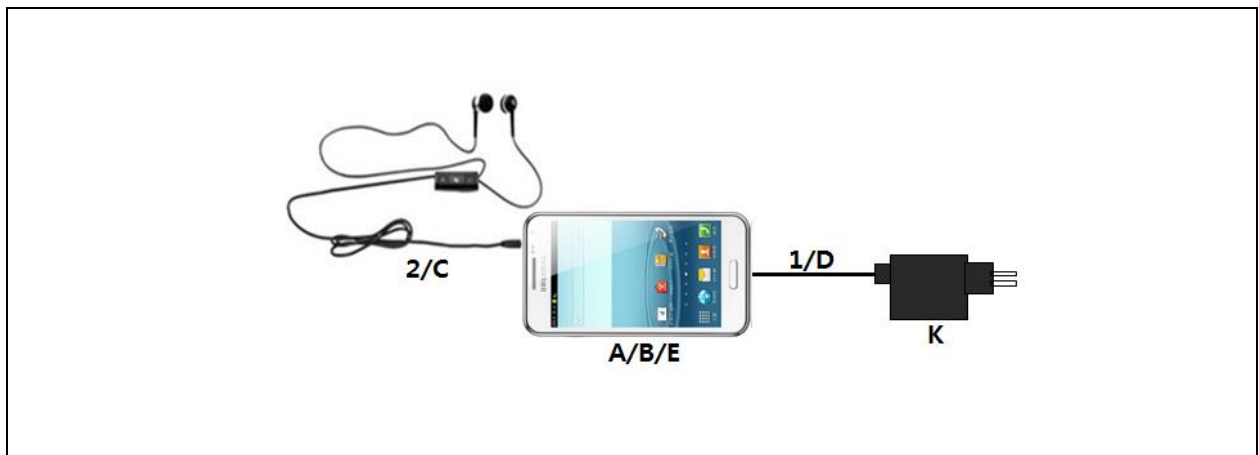

[ Mode 1 ]

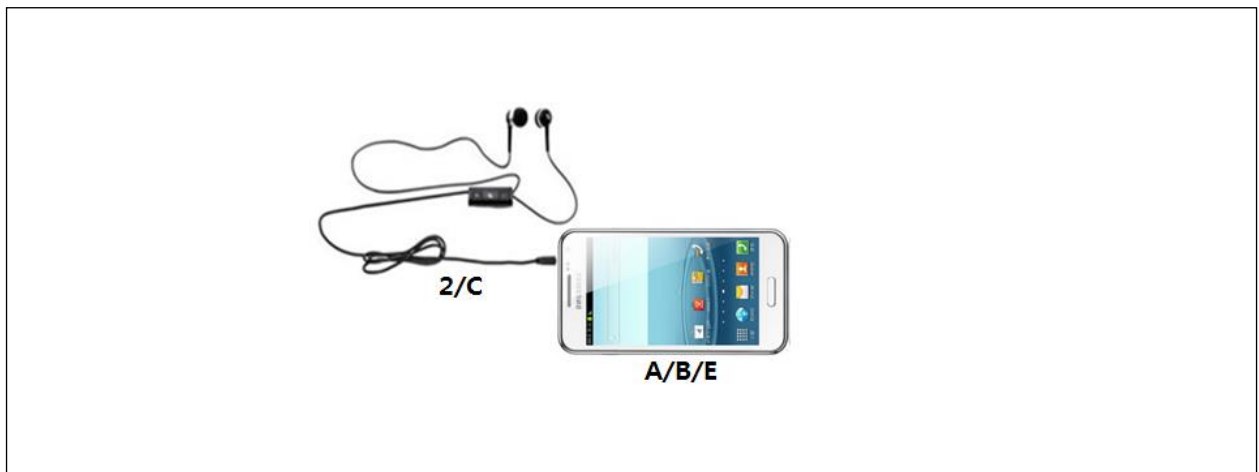

[ Mode 2 - 4 ]

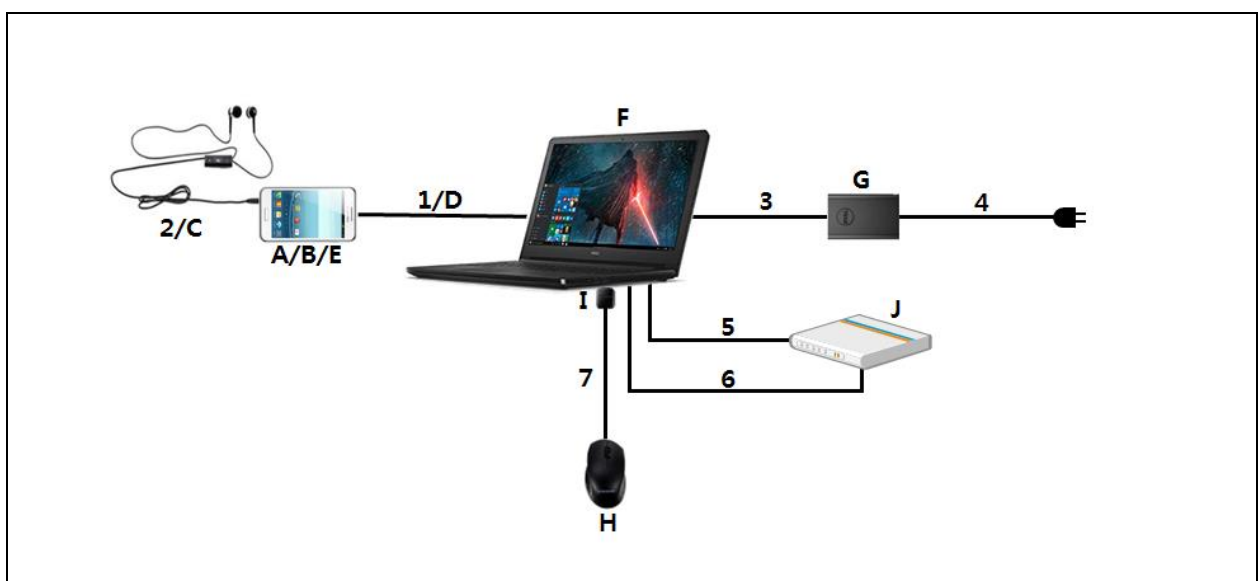

[ Mode 5 ]



## 4.6 EUT Description

The EUT is a bar type Mobile Phone which can operate on GSM850/900/1800/1900, WCDMA FDD1/2/4/5/8, LTE FDD1/2/3/4/5/7/8/12/13/14/17/20/25/26/28/29/30/66/71, LTE TDD38/39/40/41, CDMA BC0/BC1/BC10, CDMA 1x EV-DO BC0/BC1/BC10 bands and Incorporates a Camera, Bluetooth, Wi-Fi, FM Radio, GNSS, MP3 and MP4 player.

### 4.6.1 The variant models

- none

## 4.7 EUT Frequencies

The highest frequencies (Generated and used)	Frequency [ MHz ]
Wi-Fi	5 825

## 4.8 Test configuration and condition

The system was configured for testing in a typical fashion that a customer would normally use. Cables were attached to each of the available I/O Ports. Where applicable, peripherals were attached to the I/O cables. All the external I/O ports are exercised, as well as internal and the external SD card, by writing and reading arbitrary data or charging with TA.

The EUT was investigated in three orientations and the worst case orientation is reported.

RX mode(850MHz) testing was performed with the GSM850 RX Test mode at center frequency. All licensed communication (850MHz) RX mode, GSM/WCDMA/LTE, test results are not significantly different.

The FM radio mode radiated testing was performed with the Low/Mid/High channel.

The video and music were repetitively played connected to the earphone.

The camera of the EUT was operated continuously.

Power source for the EUT operating was supplied by CVCF made by the Pacific Corp.

**- Test Voltage : AC 120 V, 60 Hz**

## 4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4-2 and UKAS M3003)

### 4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	3.52 dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	4.99 dB
	Vertical	4.90 dB
Radiated Disturbance (1 GHz ~ 6 GHz)	Horizontal	5.06 dB
	Vertical	5.06 dB
Radiated Disturbance (6 GHz ~ 18 GHz)	Horizontal	5.33 dB
	Vertical	5.32 dB

## 5. Results of individual test

### 5.1 Conducted disturbance

The EUT is connected to a LISN via travel adapter. If the EUT is connected to the Laptop Computer USB port, the Laptop AC adapter is connected to a LISN.

Both conducted lines are measured in Quasi-Peak and CISPR-Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

#### Limits for conducted disturbance at the mains ports of Class B ITE

Frequency range Limits [ MHz ]	Resolution Bandwidth [ kHz ]	Limits [ dB(μV) ]	
		Quasi-peak	Average
0,15 to 0,50	9	66 to 56	56 to 46
0,50 to 5	9	56	46
5 to 30	9	60	50

NOTE 1 The lower limit shall apply at the transition frequency.  
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 5.1.1 Test instrumentation


EMC No.	Test Instrument	Manufacturer	Model name	Serial No.	Calibration	
					Date	Interval (Month)
E5I-127	Two-Line V-Network	R&S	ENV216	102061	2018-07-23	12
E5I-017	EMI Test Receiver	R&S	ESU8	100483	2019-01-16	12
E5I-002	Universal Radio Communicator	R&S	CMU200	100612	2018-08-31	12
-	Test software	R&S	EMC32	Ver 9.26.01	-	-

#### 5.1.2 Temperature and humidity condition

Test date	2019-04-17	Test engineer	Ji-Yeon Lee
Climate condition	Ambient temperature	(23.1 ~ 23.3) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(40.2 ~ 40.4) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(101.0 ~ 101.2) kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR8)		

### 5.1.3 Test results

#### ☐ Operating Mode 1: AC Mains

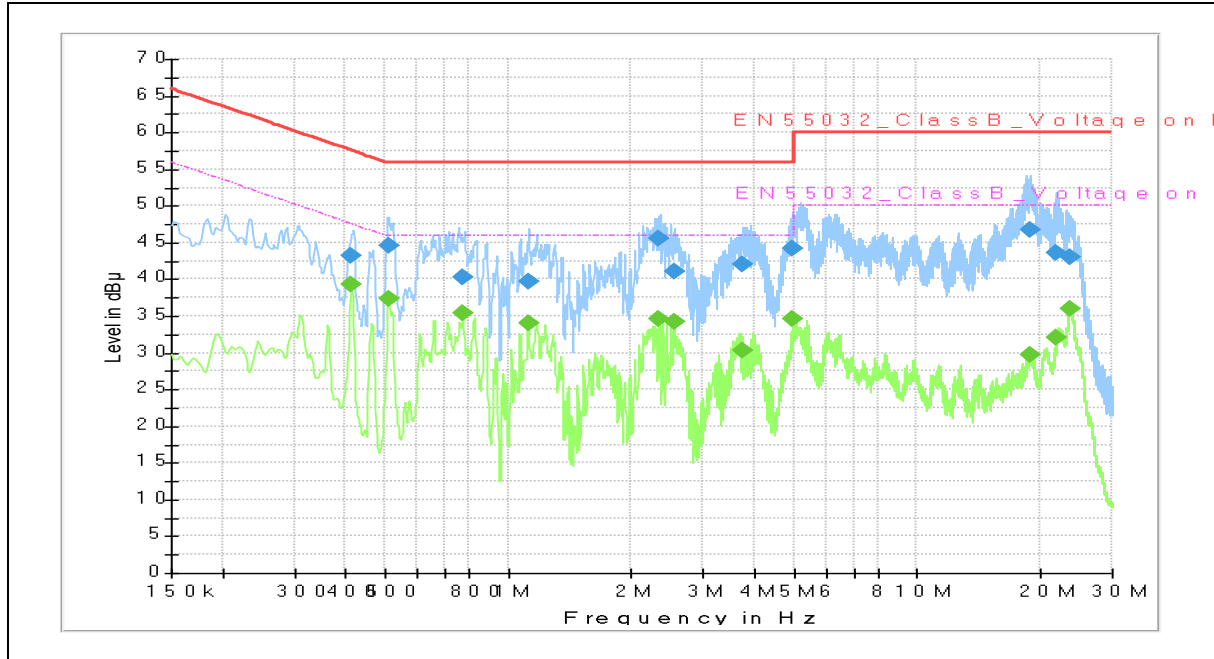


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.413	---	39.3	47.6	8.3	N	10.1
0.413	43.2	---	57.6	14.4	N	10.1
0.510	---	37.4	46.0	8.6	N	10.2
0.510	44.5	---	56.0	11.5	N	10.2
0.773	40.2	---	56.0	15.8	N	10.0
0.773	---	35.3	46.0	10.7	N	10.0
1.120	39.7	---	56.0	16.3	N	9.9
1.120	---	34.0	46.0	12.0	N	9.9
2.344	---	34.6	46.0	11.4	L1	10.0
2.344	45.5	---	56.0	10.5	L1	10.0
2.544	---	34.3	46.0	11.7	N	9.9
2.544	41.1	---	56.0	14.9	N	9.9
3.748	---	30.4	46.0	15.6	L1	10.0
3.748	41.9	---	56.0	14.1	L1	10.0
4.985	---	34.7	46.0	11.3	L1	10.0
4.985	44.1	---	56.0	11.9	L1	10.0
18.872	---	29.8	50.0	20.2	L1	10.5
18.872	46.7	---	60.0	13.3	L1	10.5
21.856	---	32.0	50.0	18.0	N	10.7
21.856	43.6	---	60.0	16.4	N	10.7
23.613	---	35.9	50.0	14.1	N	10.7
23.613	42.9	---	60.0	17.1	N	10.7

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)  
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

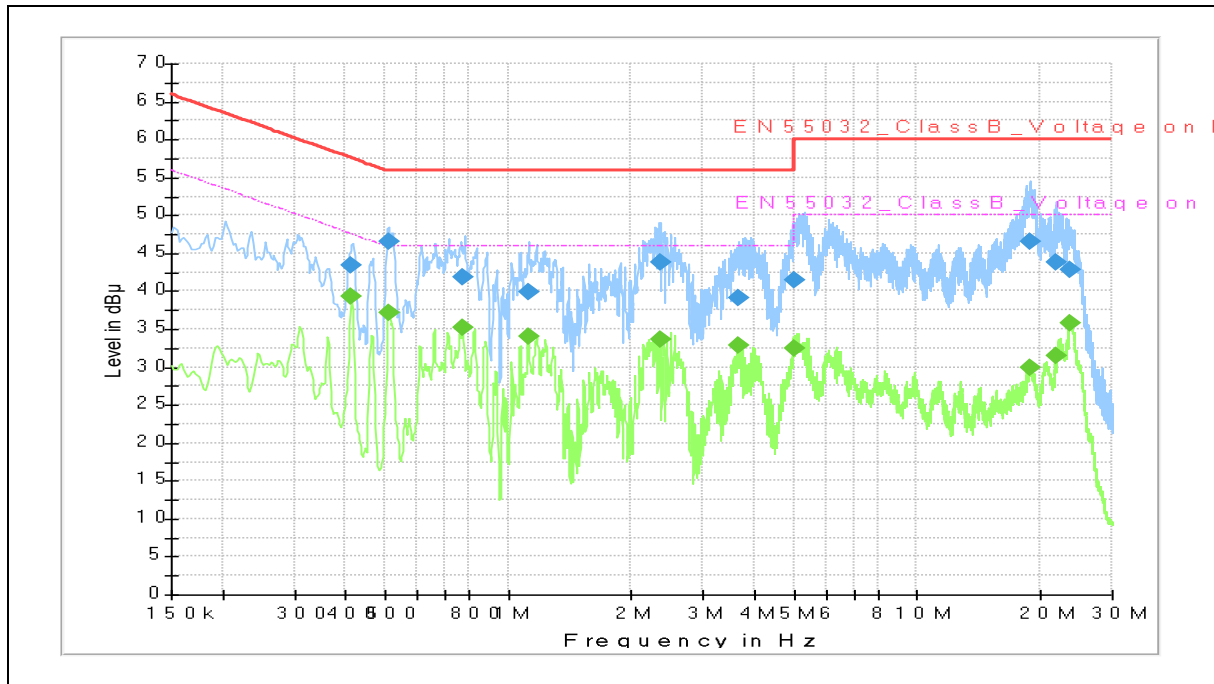
☐ Operating Mode 2: AC Mains


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.413	43.4	---	57.6	14.2	N	10.1
0.413	---	39.3	47.6	8.3	N	10.1
0.510	46.6	---	56.0	9.4	L1	10.2
0.510	---	37.2	46.0	8.8	L1	10.2
0.773	41.9	---	56.0	14.1	L1	10.1
0.773	---	35.3	46.0	10.7	N	10.0
1.120	39.9	---	56.0	16.1	N	9.9
1.120	---	34.1	46.0	11.9	N	9.9
2.348	---	33.7	46.0	12.3	L1	10.0
2.348	43.9	---	56.0	12.1	L1	10.0
3.678	---	32.8	46.0	13.2	N	9.9
3.678	39.1	---	56.0	16.9	N	9.9
4.999	41.4	---	56.0	14.6	L1	10.0
4.999	---	32.5	46.0	13.5	L1	10.0
18.881	46.6	---	60.0	13.4	L1	10.5
18.881	---	29.9	50.0	20.1	L1	10.5
21.860	---	31.5	50.0	18.5	N	10.7
21.860	43.7	---	60.0	16.3	N	10.7
23.748	---	35.8	50.0	14.2	N	10.7
23.748	42.8	---	60.0	17.2	N	10.7

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)  
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

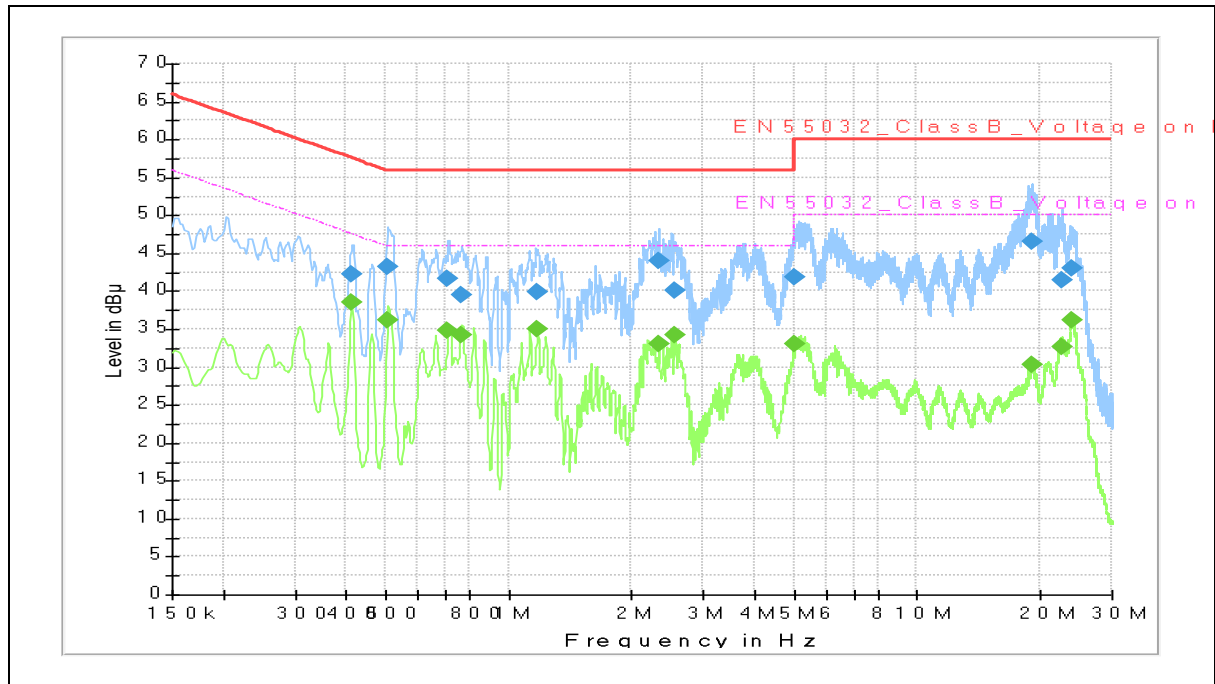☐ Operating Mode 3: AC Mains


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.


QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.411	---	38.5	47.6	9.1	N	10.1
0.411	42.3	---	57.6	15.3	N	10.1
0.508	---	36.1	46.0	9.9	N	10.2
0.508	43.2	---	56.0	12.8	L1	10.2
0.710	---	34.7	46.0	11.3	L1	10.1
0.710	41.6	---	56.0	14.4	L1	10.1
0.769	---	34.2	46.0	11.8	N	10.0
0.769	39.6	---	56.0	16.4	N	10.0
1.176	39.9	---	56.0	16.1	N	9.9
1.176	---	35.0	46.0	11.0	N	9.9
2.335	44.0	---	56.0	12.0	L1	10.0
2.335	---	33.0	46.0	13.0	L1	10.0
2.560	40.1	---	56.0	15.9	N	9.9
2.560	---	34.3	46.0	11.7	N	9.9
4.999	---	33.0	46.0	13.0	L1	10.0
4.999	41.9	---	56.0	14.1	L1	10.0
19.172	---	30.2	50.0	19.8	L1	10.5
19.172	46.5	---	60.0	13.5	L1	10.5
22.715	---	32.6	50.0	17.4	N	10.7
22.715	41.4	---	60.0	18.6	N	10.7
23.872	43.0	---	60.0	17.0	N	10.7
23.872	---	36.2	50.0	13.8	N	10.7

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

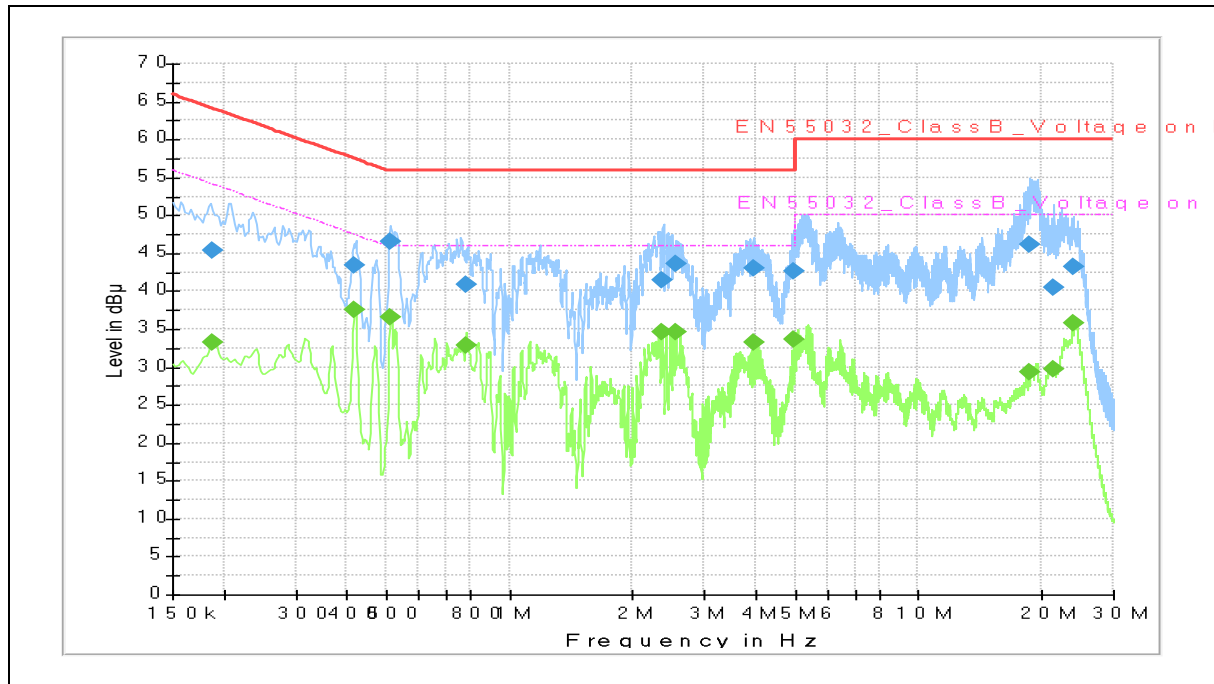☐ Operating Mode 4: AC Mains


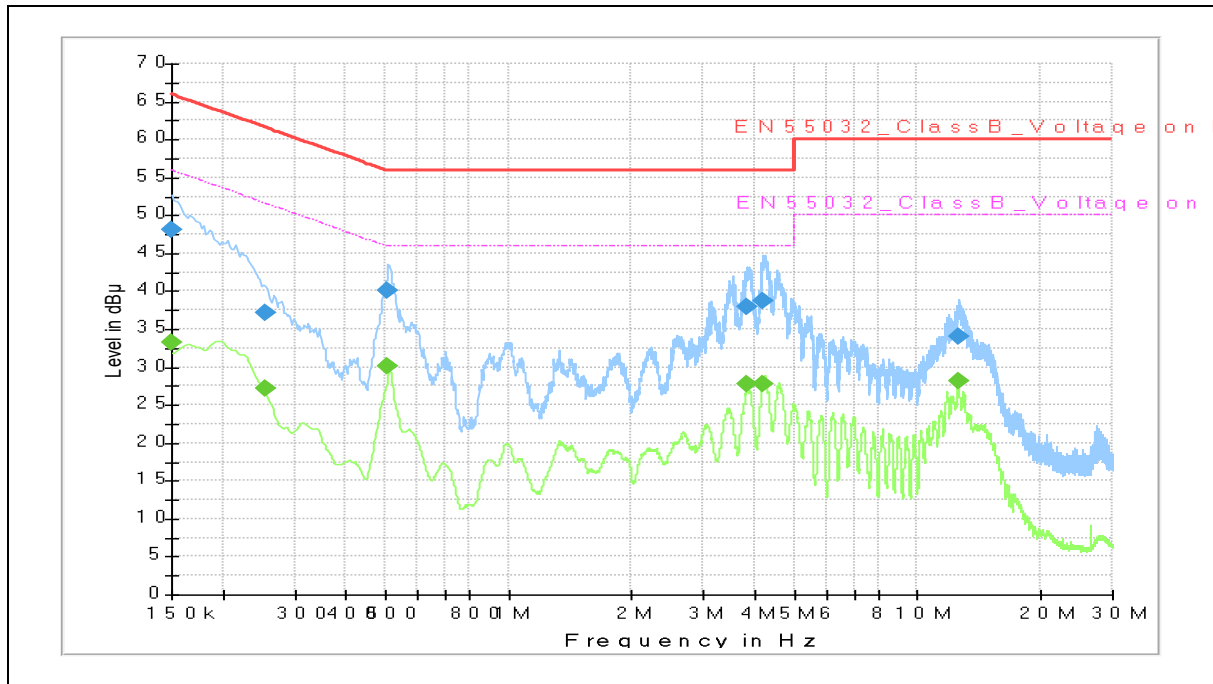
Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.188	---	33.2	54.1	20.9	L1	10.0
0.188	45.5	---	64.1	18.6	L1	10.0
0.416	---	37.5	47.5	10.0	L1	10.2
0.416	43.5	---	57.5	14.0	L1	10.2
0.510	---	36.5	46.0	9.5	L1	10.2
0.510	46.6	---	56.0	9.4	L1	10.2
0.785	---	32.8	46.0	13.2	L1	10.1
0.785	40.9	---	56.0	15.1	L1	10.1
2.364	---	34.6	46.0	11.4	L1	10.0
2.364	41.5	---	56.0	14.5	L1	10.0
2.555	---	34.6	46.0	11.4	L1	10.0
2.555	43.7	---	56.0	12.3	L1	10.0
3.939	---	33.2	46.0	12.8	L1	10.0
3.939	43.1	---	56.0	12.9	L1	10.0
4.965	---	33.6	46.0	12.4	L1	10.0
4.965	42.6	---	56.0	13.4	L1	10.0
18.787	---	29.4	50.0	20.6	L1	10.5
18.787	46.2	---	60.0	13.8	L1	10.5
21.401	---	29.7	50.0	20.3	N	10.7
21.401	40.6	---	60.0	19.4	N	10.7
24.045	---	35.8	50.0	14.2	N	10.7
24.045	43.3	---	60.0	16.7	N	10.7

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)  
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

## □ Operating Mode 5: AC Mains



Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150	---	33.3	56.0	22.7	N	9.7
0.150	48.0	---	66.0	18.0	N	9.7
0.256	37.1	---	61.6	24.5	L1	9.7
0.256	---	27.2	51.6	24.4	L1	9.7
0.508	---	30.1	46.0	15.9	L1	10.0
0.508	40.0	---	56.0	16.0	L1	10.0
3.811	---	27.7	46.0	18.3	N	9.7
3.811	38.0	---	56.0	18.0	N	9.7
4.173	---	27.7	46.0	18.3	N	9.7
4.173	38.7	---	56.0	17.3	N	9.7
12.640	33.9	---	60.0	26.1	L1	9.9
12.640	---	28.3	50.0	21.7	L1	9.9

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)  
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor



## 5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [ cm ]	Antenna Polarisation	Resolution Bandwidth [ kHz ]	Video Bandwidth [ kHz ]	Turntable position [ degrees ]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detector.

Peak/CISPR-Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency generated or used in the device or on which the device operate or tunes at a measurement distance of 3 m for the following antenna and turntable arrangements. The measurements above 1 GHz were performed with the bore-sighting antenna aimed at the EUT.

Antenna Height [ cm ]	Antenna Polarisation	Resolution Bandwidth [ MHz ]	Video Bandwidth [ MHz ]	Turntable position
100 ~ 400	Horizontal, Vertical	1	3	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and CISPR-average detectors.

### Limits for radiated disturbance of Class B ITE at a measuring distance of 3 m and 10 m

Frequency range Limits [ MHz ]	Field Strength		
	3 m [ $\mu\text{V/m}$ ]	3 m [ $\text{dB}(\mu\text{V/m})$ ]	10 m [ $\text{dB}(\mu\text{V/m})$ ]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Results checked manually; and points close to the limit line were re-measured.

### 5.2.1 Test instrumentation

EMC No.	Test Instrument	Manufacturer	Model name	Serial No.	Calibration	
					Date	Interval (Month)
E5I-022	Signal Generator	R&S	SMB100A	175856	2018-05-11	12
E5I-021	EMI Test Receiver	R&S	ESU40	100376	2019-01-30	12
E5I-016	EMI Test Receiver	R&S	ESU8	100482	2018-06-08	12
E5I-149	Horn Antenna	R&S	HF907	102525	2018-06-15	24
E5I-039	Signal Conditioning Unit	R&S	SCU-18	10211	2019-01-23	12
E5I-120	BiLog Antenna	TESEQ	CBL6112D	36997	2018-04-23	24
E5I-072	BiLog Antenna	TESEQ	CBL6112D	36009	2018-04-23	24
E5I-075	Preamplifier	SONOMA	310N	332018	2018-05-25	12
E5I-076	Preamplifier	SONOMA	310N	332019	2018-05-25	12
E5I-037	WideBand Horn Antenna	R&S	WBH 18-40K	11201	2019-01-31	24
E5I-042	Signal Conditioning Unit	R&S	SCU-40A	10004	2018-09-05	12
-	Test software	TOYO	EP7RE	Ver 5.8.2	-	-
-	Test software	R&S	EMC32	Ver 9.25.00	-	-


### 5.2.2 Temperature and humidity condition

<b>Test date</b>	2019-04-04 / 2019-04-08	<b>Test engineer</b>	Ji-Yeon Lee
<b>Climate condition</b>	Ambient temperature	(23.1 ~ 23.5) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(41.6 ~ 42.6) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(100.8 ~ 101.1) kPa	Limit (86.0 to 106.0) kPa
<b>Test place</b>	Semi-Anechoic Chamber (SAC4)		

### 5.2.3 Test results

#### ☐ Operating Mode 1

#### - Frequencies below 1 GHz

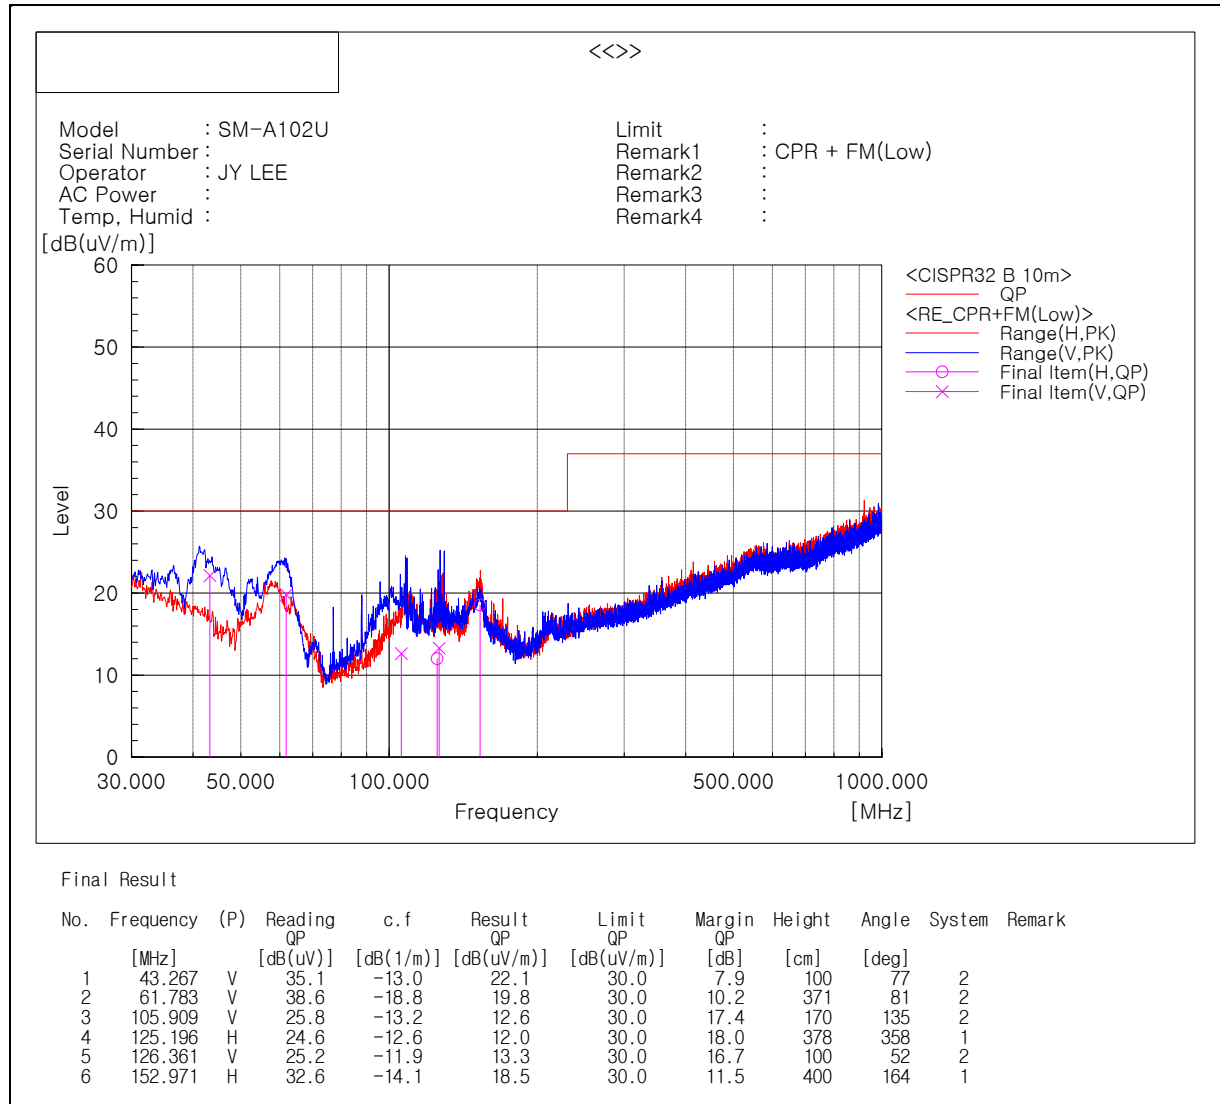

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

## - Frequencies above 1 GHz

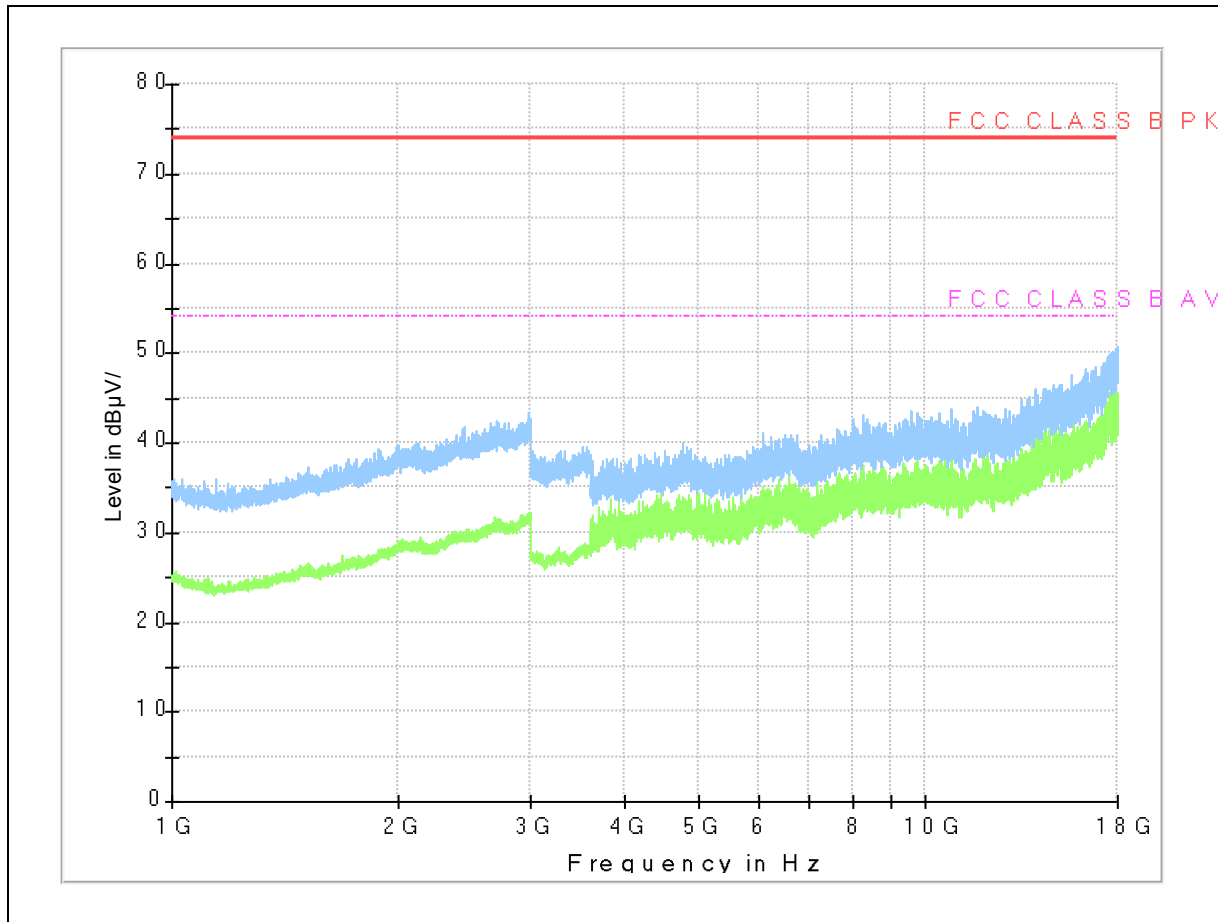

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions


Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

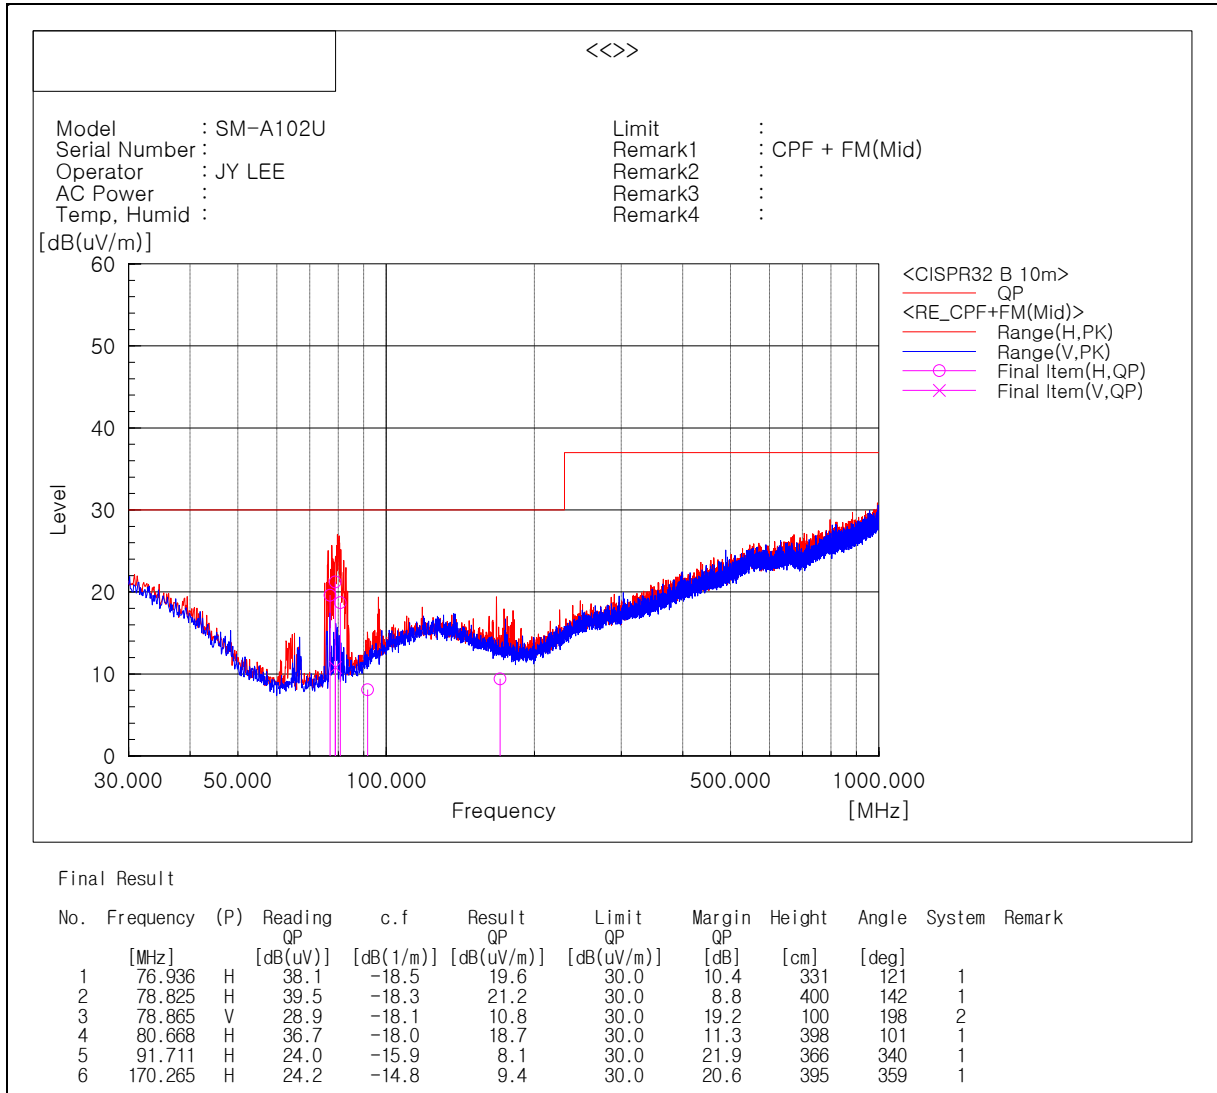☐ Operating Mode 2**- Frequencies below 1 GHz**

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

## - Frequencies above 1 GHz

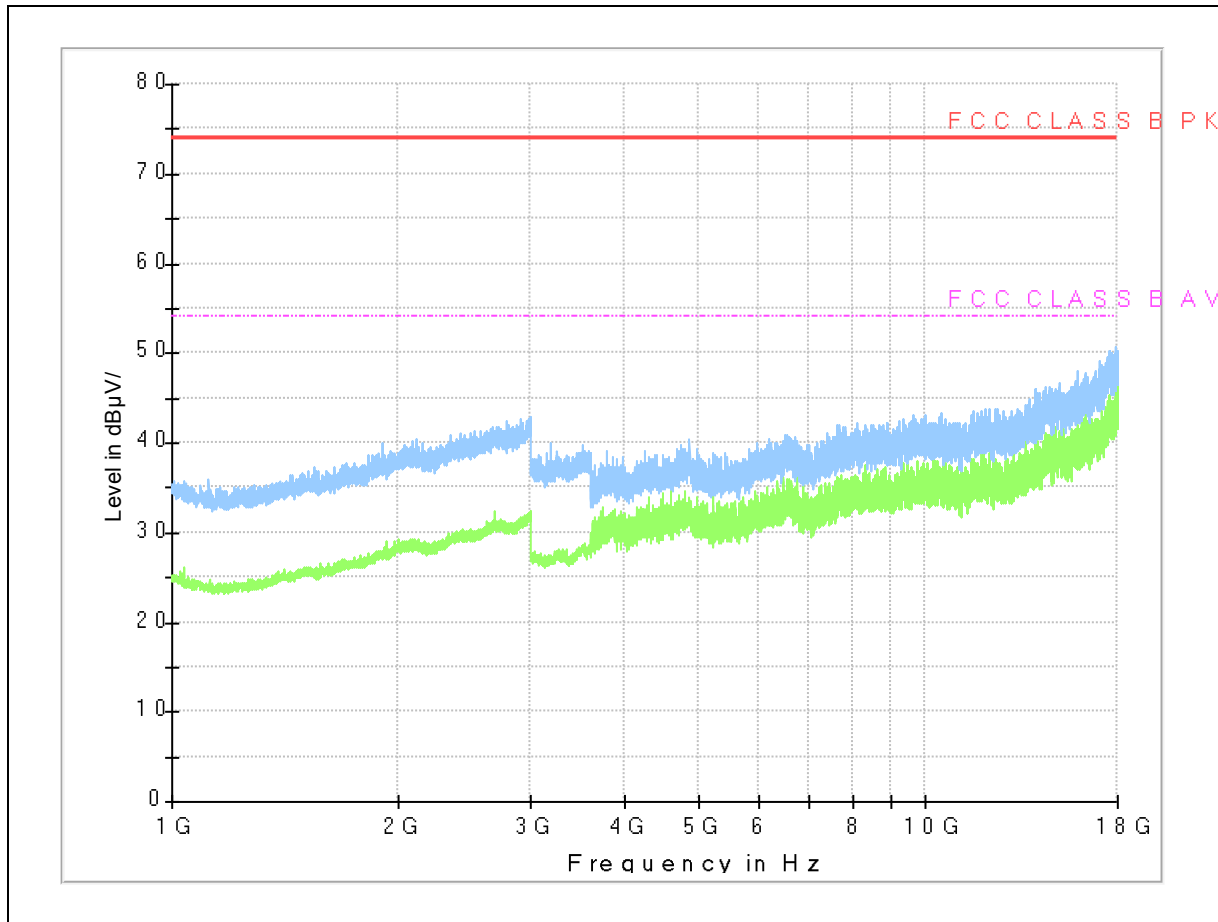

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

☐ Operating Mode 3

## - Frequencies below 1 GHz

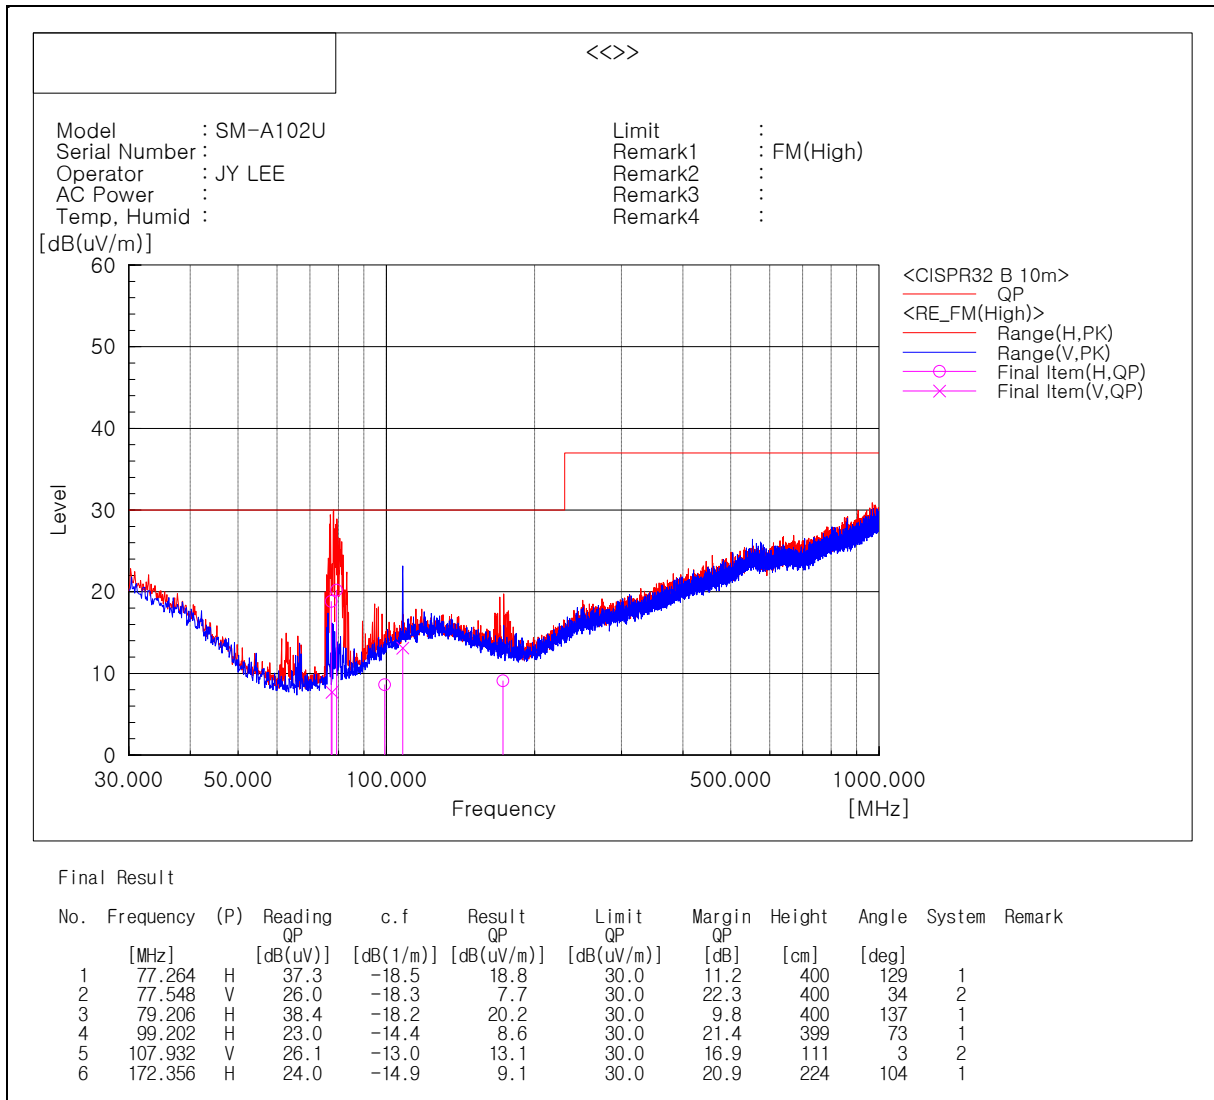

\* Radiated emissions (Rx frequency 107.932) from the transceiver shall be ignored


Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

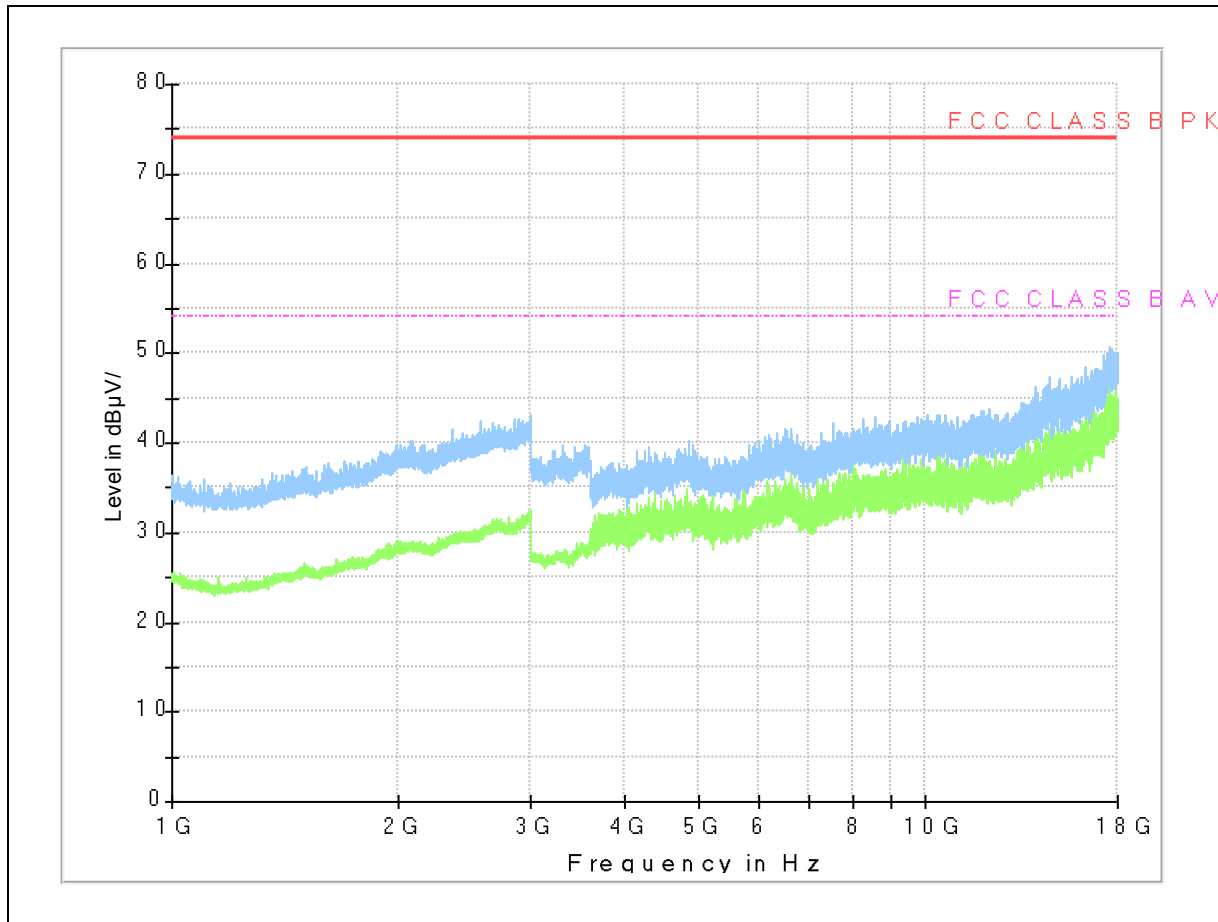**- Frequencies above 1 GHz**

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

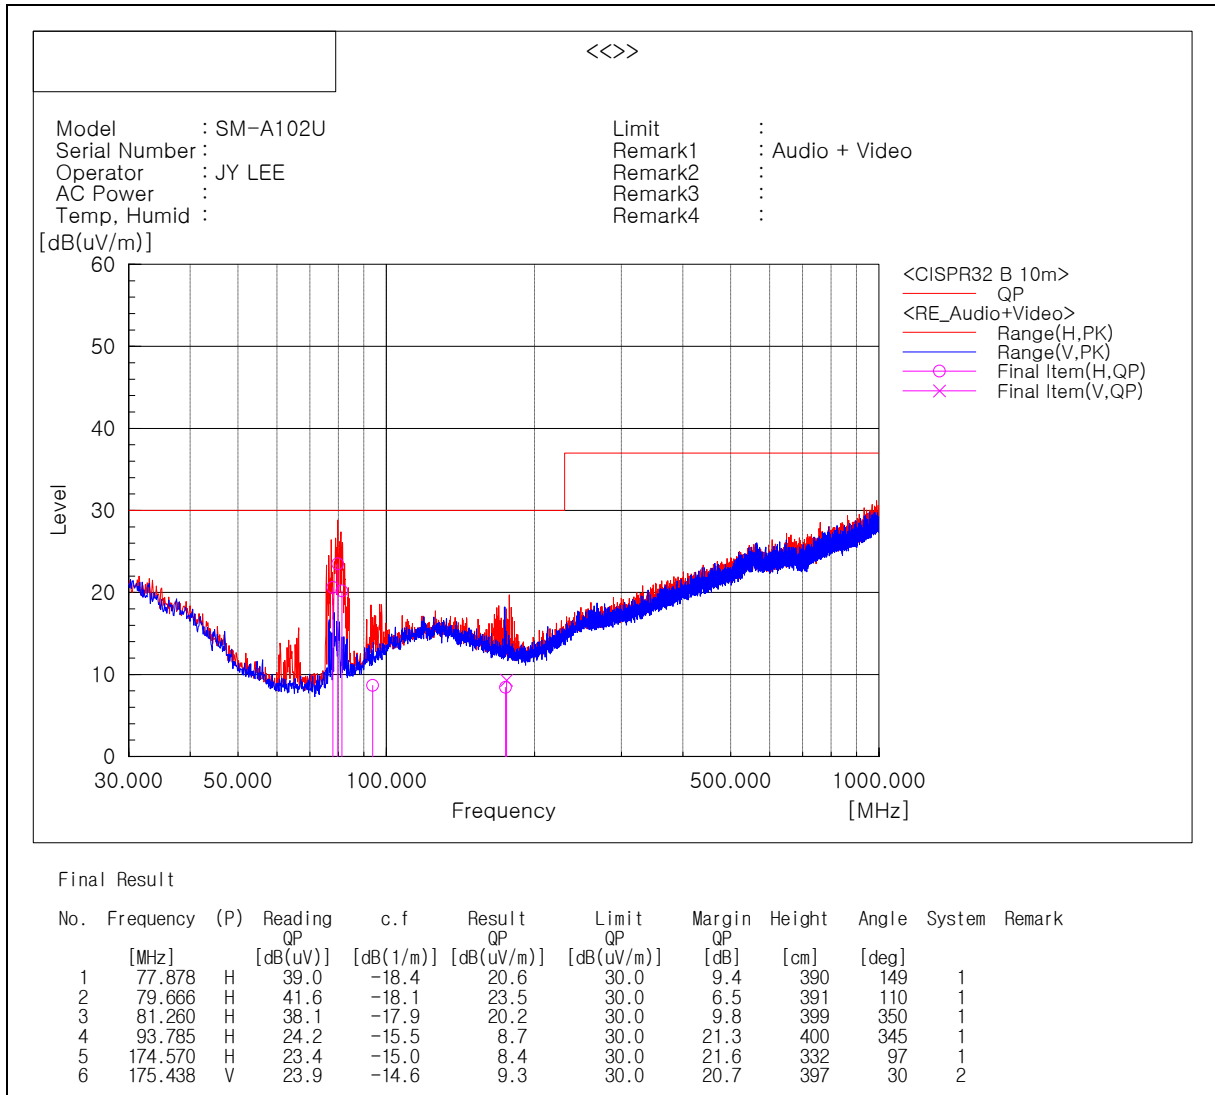

☐ Operating Mode 4**- Frequencies below 1 GHz**

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

## - Frequencies above 1 GHz

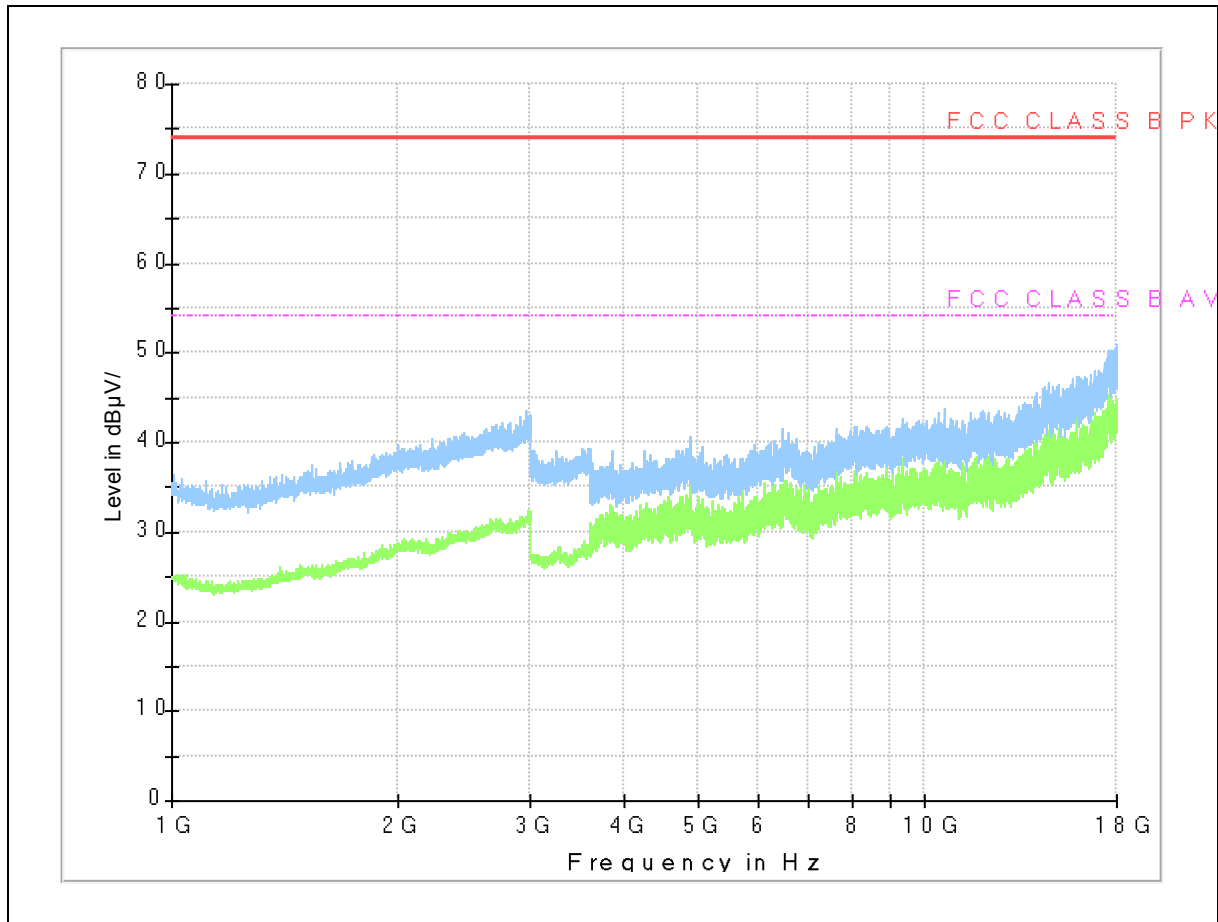

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

☐ Operating Mode 5

## - Frequencies below 1 GHz

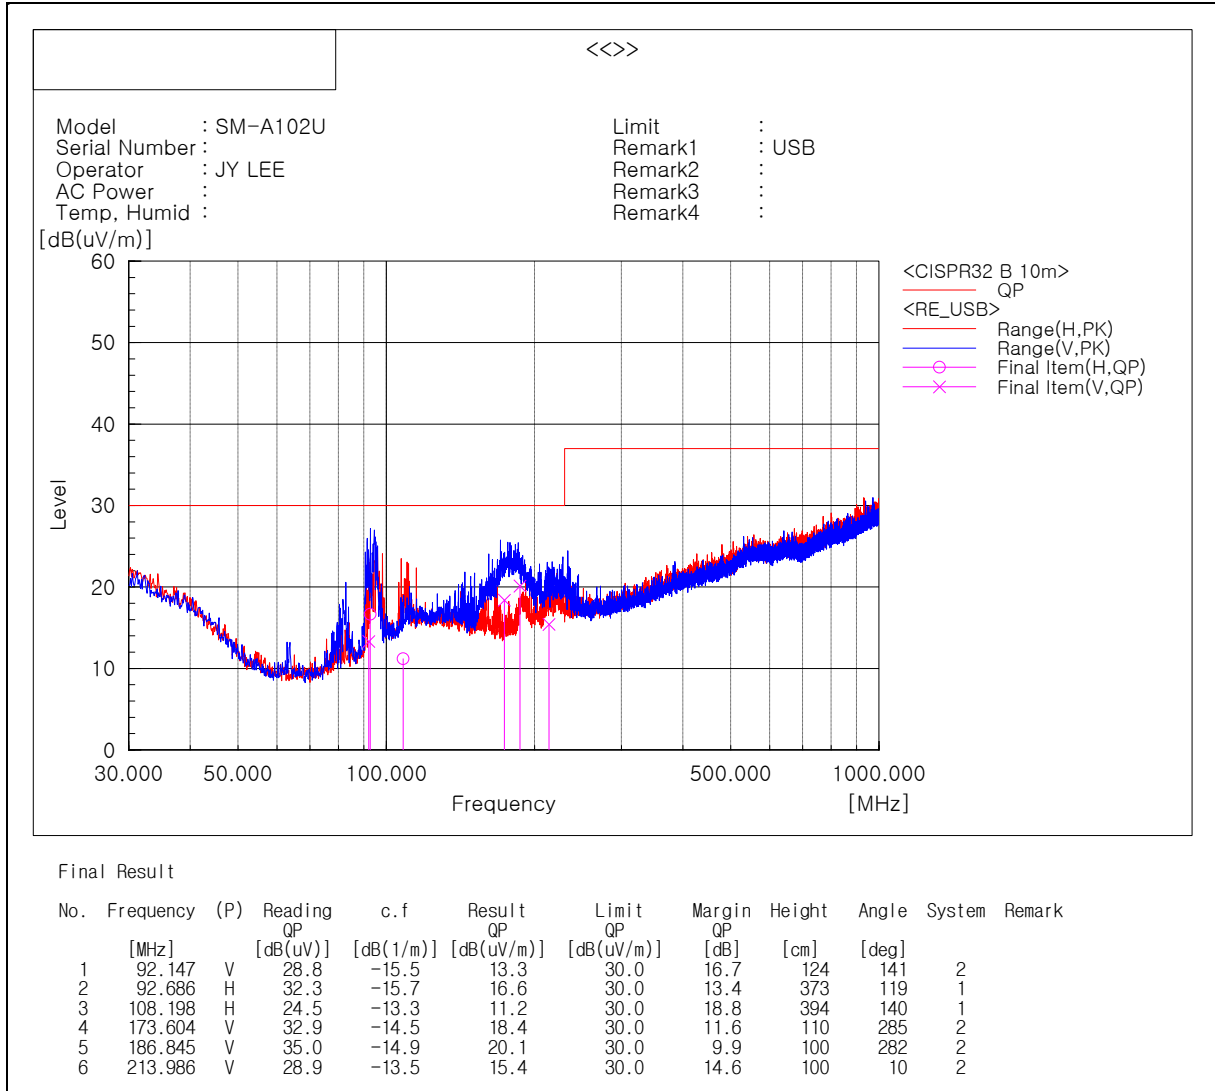


Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

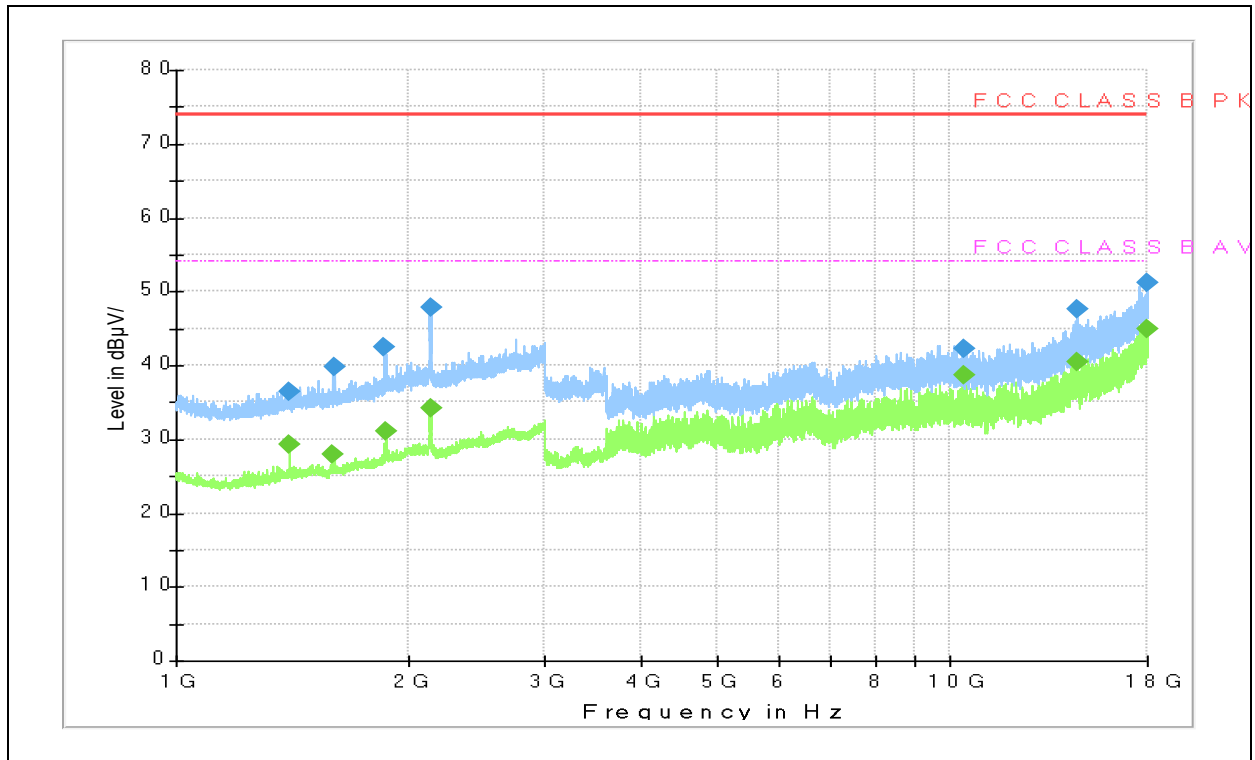**- Frequencies above 1 GHz**

Frequency (MHz)	PK (dBμV/m)	CAV (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 398.800	---	29.3	54.0	24.7	100.0	H	82.0	8.6
1 399.200	36.5	---	74.0	37.5	100.0	H	71.0	8.6
1 597.200	---	28.0	54.0	26.0	100.0	V	174.0	9.8
1 598.000	39.8	---	74.0	34.2	100.0	V	75.0	9.8
1 860.000	42.4	---	74.0	31.6	100.0	V	359.0	11.7
1 864.800	---	31.1	54.0	22.9	100.0	V	0.0	11.7
2 132.000	---	34.2	54.0	19.8	100.0	V	352.0	12.9
2 132.000	47.7	---	74.0	26.3	100.0	V	352.0	12.9
10 415.000	42.2	---	74.0	31.8	100.0	V	266.0	17.0
10 418.500	---	38.7	54.0	15.3	100.0	V	33.0	17.0
14 597.500	47.5	---	74.0	26.5	100.0	H	124.0	27.3
14 630.500	---	40.4	54.0	13.6	100.0	H	124.0	27.3
17 978.500	51.2	---	74.0	22.8	100.0	V	247.0	35.0
17 995.000	---	45.0	54.0	9.0	100.0	V	58.0	35.2

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor