

PART 24 MEASUREMENT REPORT

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
05/13/2021 – 06/17/2021
Test Site/Location:
PCTEST Lab. Yongin-Si, Gyeonggi-do,
South Korea
Test Report Serial No.:
1K210511001903-03.A3L

FCC ID:	A3LSMA127FN
Applicant Name:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-A127F/DSN
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: 24
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by



Reviewed by






FCC ID: A3LSMA127FN	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset	Page 1 of 34


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
2.5	Software and Firmware	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	14
7.4	Band Edge Emissions at Antenna Terminal	20
7.5	Peak-Average Ratio	22
7.6	Radiated Power (EIRP).....	24
7.7	Radiated Spurious Emissions Measurements.....	27
7.8	Frequency Stability / Temperature Variation	32
8.0	CONCLUSION.....	34



FCC ID: A3LSMA127FN	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset	Page 2 of 34



PART 24 MEASUREMENT REPORT



Mode	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	GMSK	1850.2 - 1909.8	0.716	28.55	246KGXW
EDGE	8-PSK	1850.2 - 1909.8	0.366	25.63	246KG7W

FCC ID: A3LSMA127FN	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 3 of 34

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954 South Korea.

- PCTEST is an ISO 17025-2017 accredited test facility under the National Voluntary Laboratory Accreditation Program (NVLAP) with Certificate number 600143-0 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada (ISED) rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (26168) test laboratory with the site description on file with ISED.

FCC ID: A3LSMA127FN		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset	Page 4 of 34	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMA127FN**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: 2445M, 2950M, 2966M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802. 11b/g/n WLAN, BT (1x, EDR, LE), NFC

2.3 Test Configuration



The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 3.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Software and Firmware

The test was conducted with firmware version A127FXXE0AUE7 installed on the EUT.

FCC ID: A3LSMA127FN		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 5 of 34

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Innco is placed on top of the turn table. An Innco table is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01.



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMA127FN	 PCTEST <small>Proud to be part of element</small>	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset	Page 6 of 34	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.20
Radiated Disturbance (<1GHz)	3.01
Radiated Disturbance (>1GHz)	5.56
Radiated Disturbance (>18GHz)	3.16

FCC ID: A3LSMA127FN	 PCTEST® Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 7 of 34

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E5515C	Wireless Communications Test Set	2/19/2021	Annual	2/18/2022	MY50262130
Agilent	N9030A	PXA Signal Analyzer	6/29/2020	Annual	6/28/2021	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	6/29/2020	Annual	6/28/2021	1839097
Anritsu	MA24106A	USB Power Sensor	6/29/2020	Annual	6/28/2021	1244512
Anritsu	MA24106A	USB Power Sensor	2/19/2021	Annual	2/18/2022	1344557
Com-Power	AL-130R	Active Loop Antenna	10/29/2020	Biennial	10/28/2022	10160045
Com-Power	PAM-118A	Preamplifier	6/29/2020	Annual	6/28/2021	551042
Espec	SH-242	Environmental Chamber	9/16/2020	Annual	9/15/2021	93011064
ETS Lindgren	3110C	Biconical Antenna	7/9/2020	Biennial	7/8/2022	00211248
ETS Lindgren	3110C	Biconical Antenna	7/9/2020	Biennial	7/8/2022	00211250
ETS Lindgren	3148B	Log-periodic Antenna	7/9/2020	Biennial	7/8/2022	00211278
ETS Lindgren	3148B	Log-periodic Antenna	7/9/2020	Biennial	7/8/2022	00211263
Keysight Technologies	N9020B	MXA Signal Analyzer	11/13/2020	Annual	11/12/2021	MY55470135
Keysight Technologies	N9030B	PXA Signal Analyzer	5/1/2021	Annual	4/30/2022	MY57142018
Mini-Circuits	ZHDC-16-63-S+	Coupler	6/29/2020	Annual	6/28/2021	F709401716
Mini-Circuits	ZNDC-18-2G-S+	Coupler	6/29/2020	Annual	6/28/2021	F280401542
Mini-Circuits	BW-N10W5+	Attenuator	6/29/2020	Annual	6/28/2021	1607
Mini-Circuits	BW-N10W5+	Attenuator	6/29/2020	Annual	6/28/2021	1607
Rohde & Schwarz	TS-PR18	Preamplifier	6/29/2020	Annual	6/28/2021	102141
Rohde & Schwarz	TS-PR1840	Preamplifier	6/29/2020	Annual	6/28/2021	100049
Rohde & Schwarz	SMBV100B	Signal Generator	11/5/2020	Annual	11/4/2021	101568
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	6/29/2020	Annual	6/28/2021	116851
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/19/2021	Annual	2/18/2022	131453
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/19/2021	Annual	2/18/2022	131454
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/19/2021	Annual	2/18/2022	150117
Rohde & Schwarz	ENV216	Two-Line V-Network	5/24/2021	Annual	5/23/2022	101319
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	6/29/2020	Annual	6/28/2021	101761
Rohde & Schwarz	FSW43	Signal & Spectrum Analyzer	9/17/2020	Annual	9/16/2021	101250
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	2/19/2021	Annual	2/18/2022	102131
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	3/29/2021	Annual	3/28/2022	102151
Schwarzbeck	UHA9105	Dipole Antenna	7/9/2020	Biennial	7/8/2022	91052522
Sunol Sciences	DRH-118	Horn Antenna	8/9/2019	Biennial	8/8/2021	A102416-1
Sunol Sciences	DRH-118	Horn Antenna	1/12/2021	Biennial	1/11/2023	A060215

Table 5-1. Test Equipment

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMA127FN	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset	Page 8 of 34

6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info



D = Data transmission, telemetry, telecommand

FCC ID: A3LSMA127FN	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 9 of 34

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMA127FN		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 10 of 34

7.0 TEST RESULTS

7.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMA127FN
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/GPRS/EDGE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	RSS-133(6.5)	> 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	RSS-133(4.1)	N/A	PASS	See RF Exposure Report
	Peak to average power ratio	24.232(d)	RSS-133(6.4)	< 13 dB	PASS	Section 7.5
	Frequency Stability	2.1055, 24.235	RSS-133(6.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	24.232(c)	RSS-133(6.4)	< 2 Watts max. EIRP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 24.238(a)	RSS-133(6.5)	> 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool Beta 8.

FCC ID: A3LSMA127FN	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 11 of 34

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

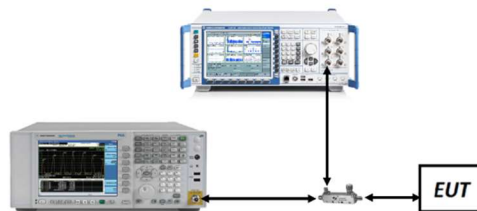



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 12 of 34

GSM/GPRS PCS

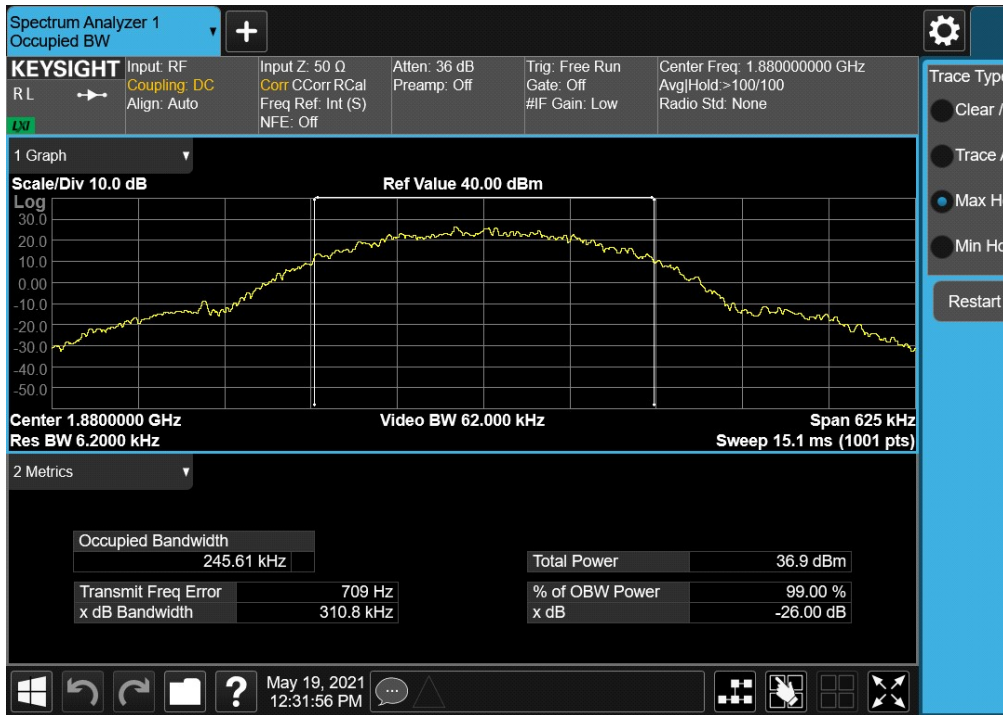

Plot 7-1. Occupied Bandwidth Plot (GPRS, Ch. 661)

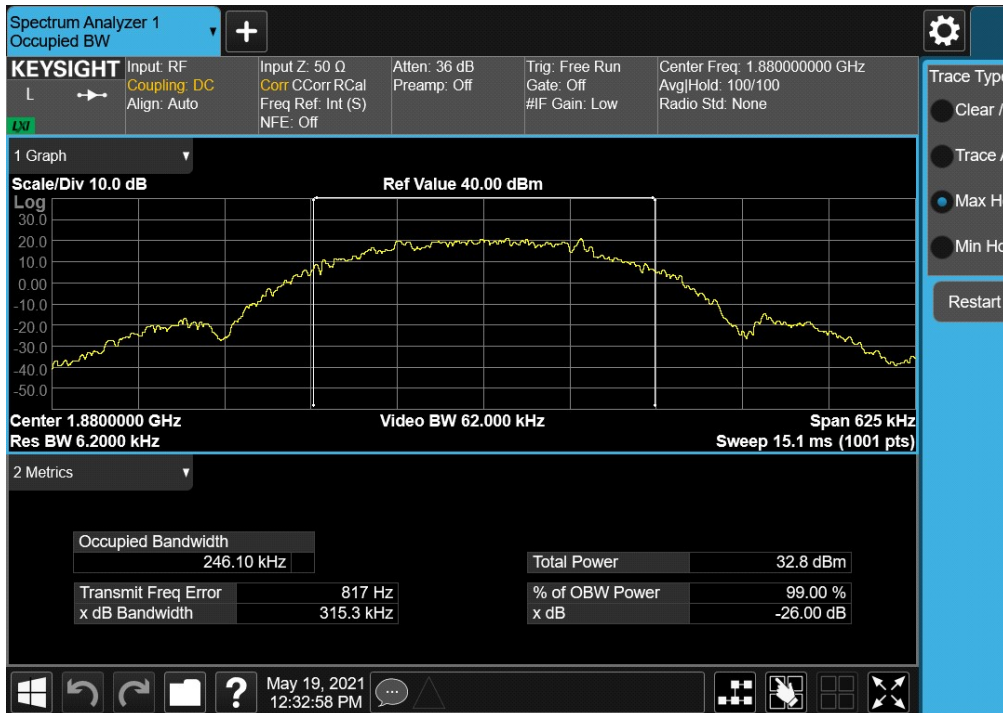

Plot 7-2. Occupied Bandwidth Plot (EDGE, Ch. 661)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 13 of 34

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

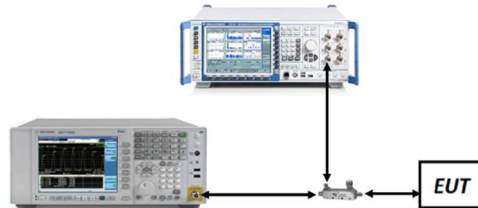



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Per Part 24 and RSS-133, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 1 MHz or greater for measurements above 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 14 of 34

GPRS PCS

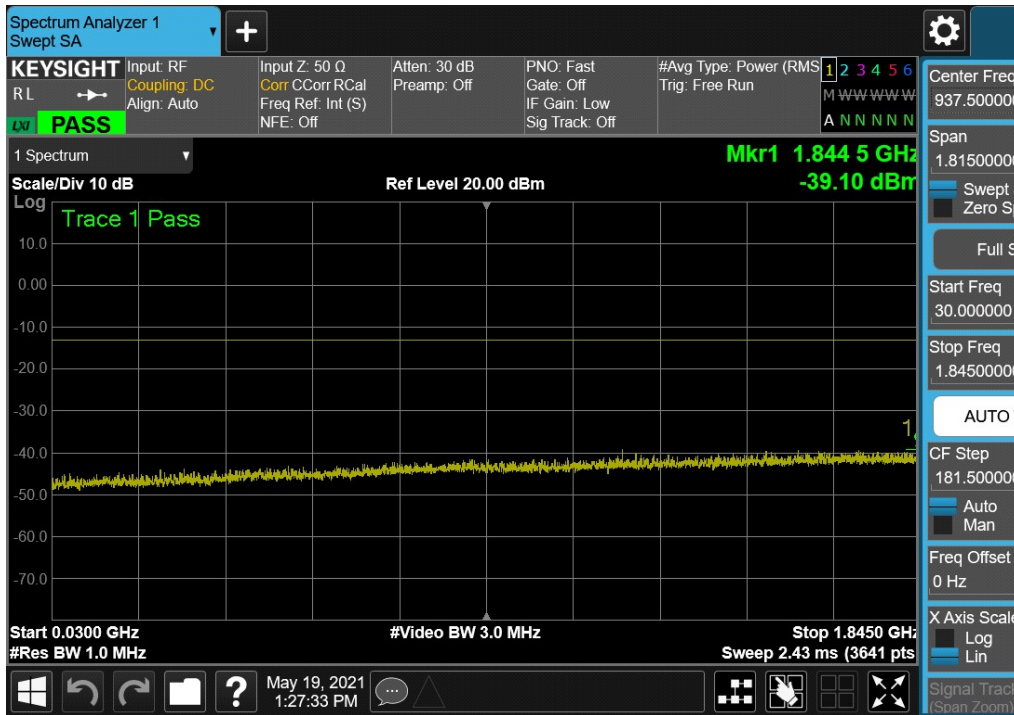


Plot 7-3. Conducted Spurious Plot (GPRS Ch. 512)

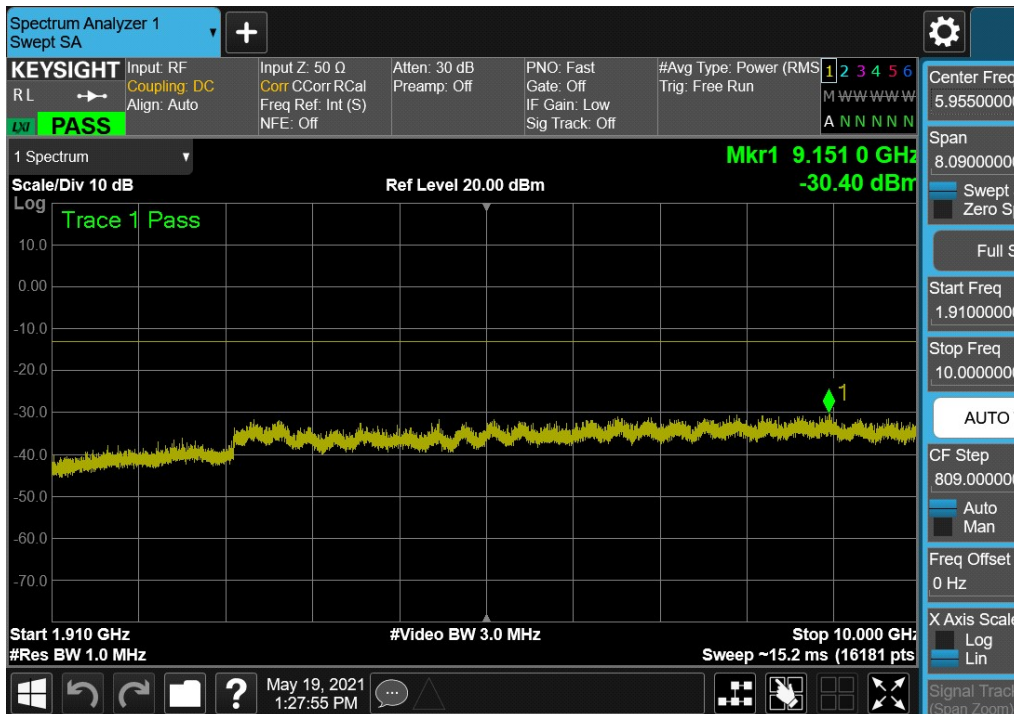


Plot 7-4. Conducted Spurious Plot (GPRS Ch. 512)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 15 of 34

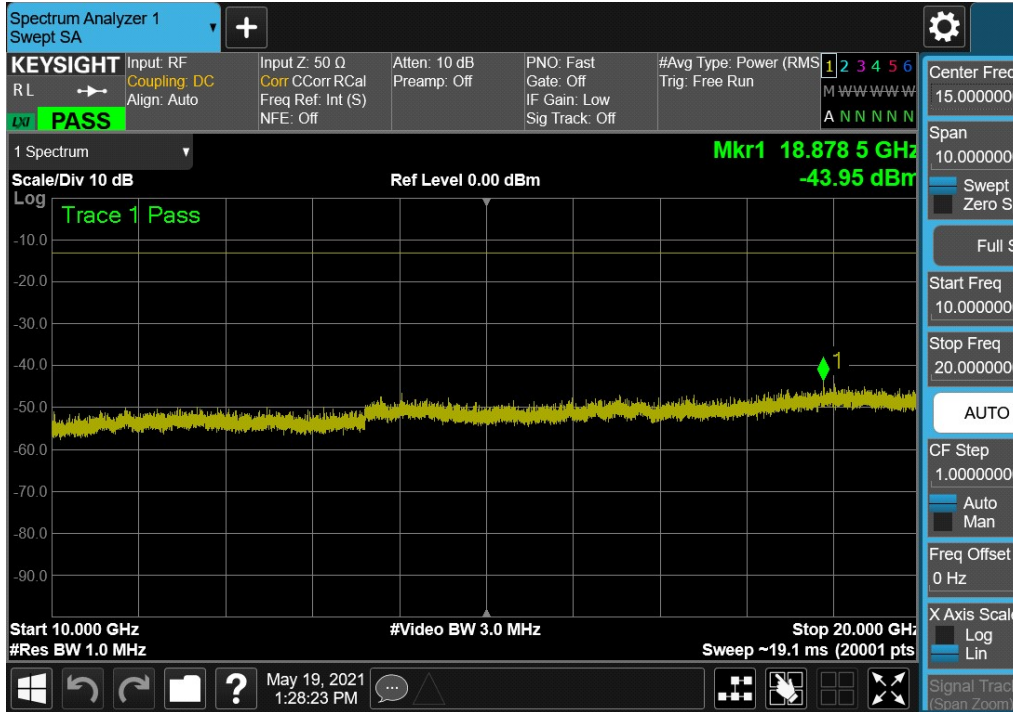


Plot 7-5. Conducted Spurious Plot (GPRS Ch. 512)

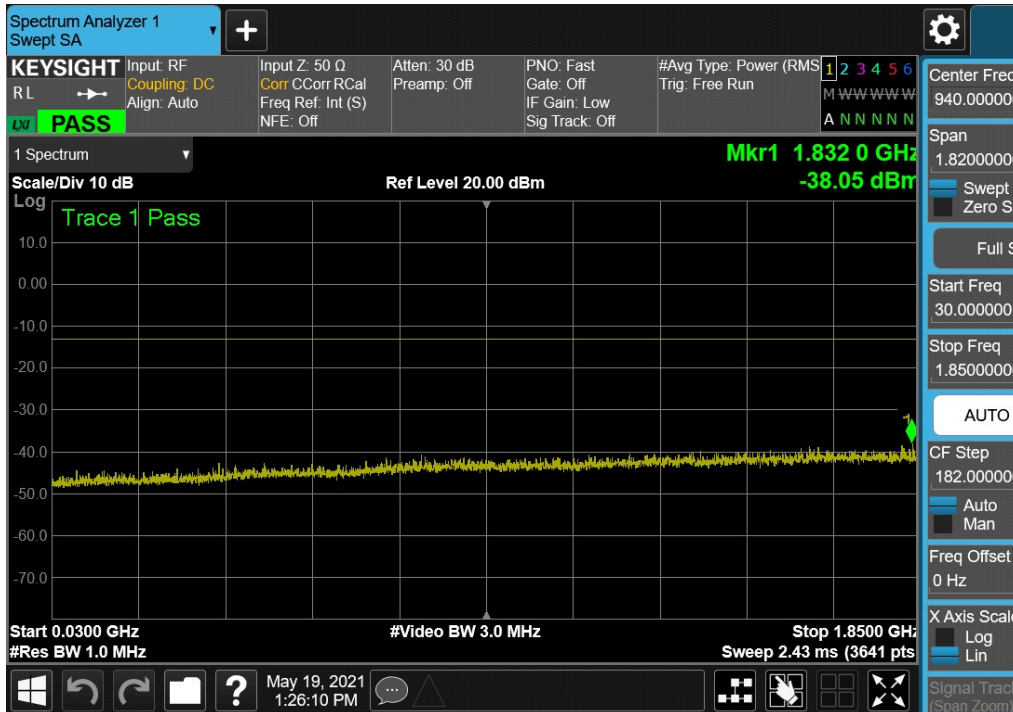


Plot 7-6. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 16 of 34

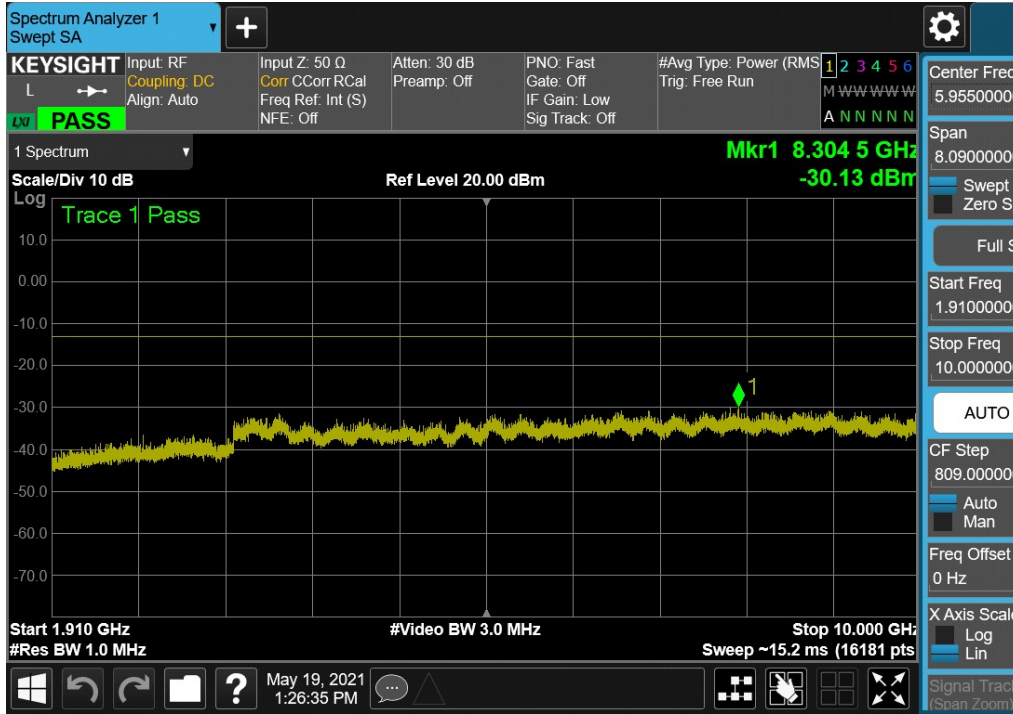

Plot 7-7. Conducted Spurious Plot (GPRS Ch. 661)

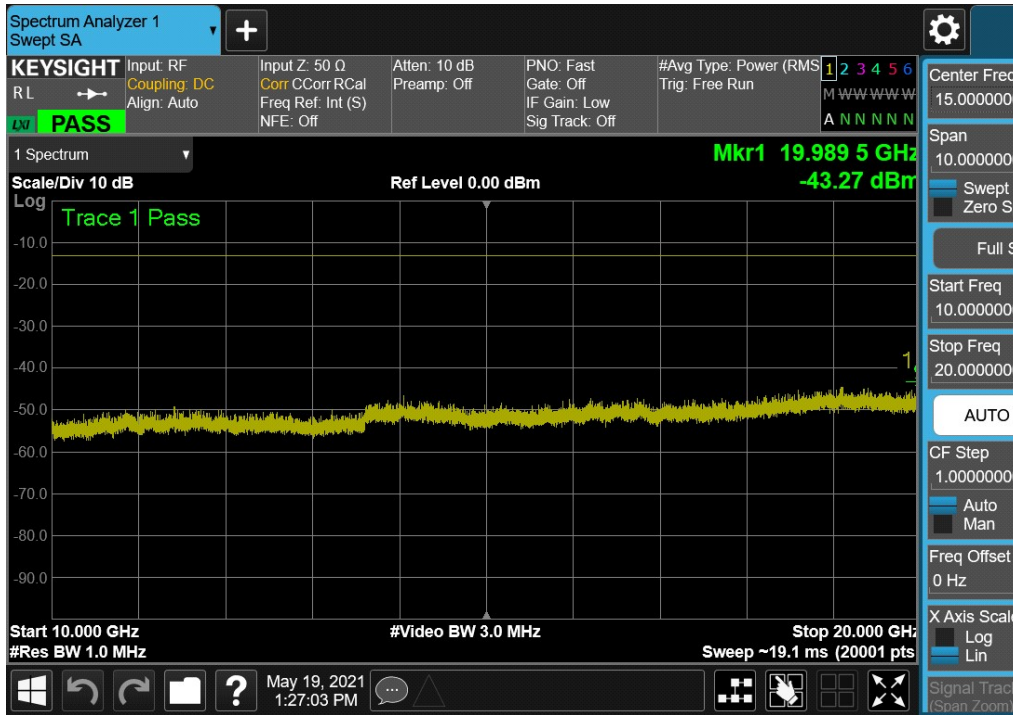


Plot 7-8. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 17 of 34




Plot 7-9. Conducted Spurious Plot (GPRS Ch. 810)

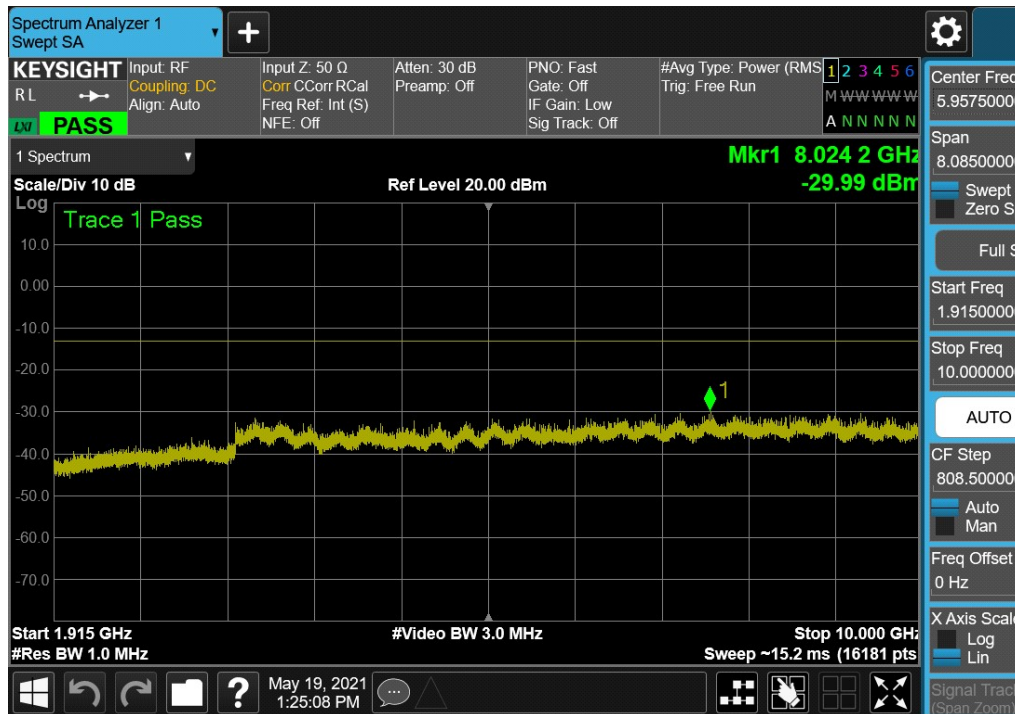

Plot 7-10. Conducted Spurious Plot (GPRS Ch. 810)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 18 of 34

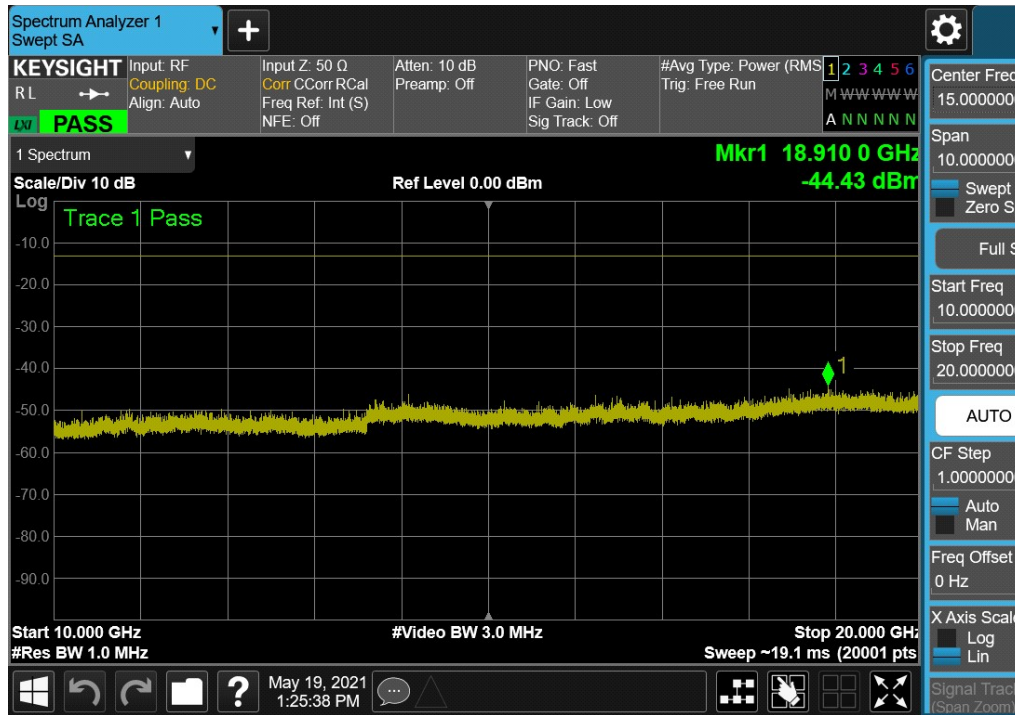

Plot 7-11. Conducted Spurious Plot (GPRS Ch. 810)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 19 of 34

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates, including GSM and GPRS, were investigated to determine the worst case configuration. All modes of operation, including GSM and GPRS, were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

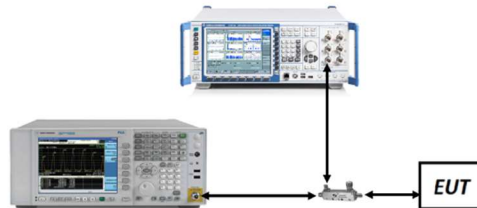



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


Per 24.238(a) and RSS-132(5.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 20 of 34

GPRS PCS

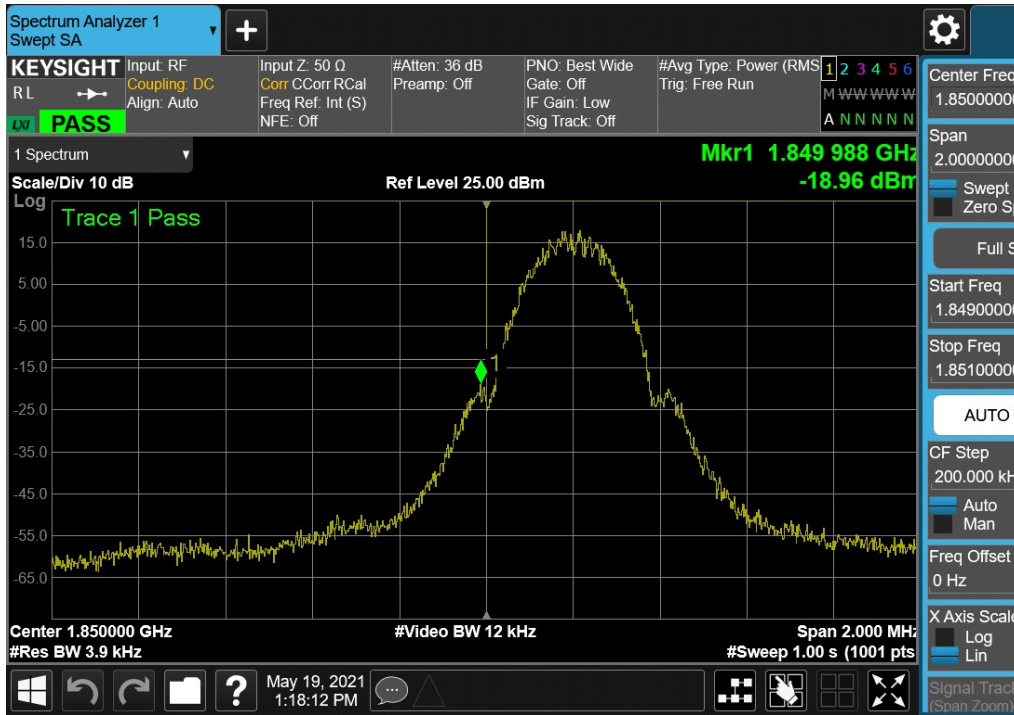

Plot 7-12. Lower Band Edge Plot (GPRS PCS – Ch. 512)

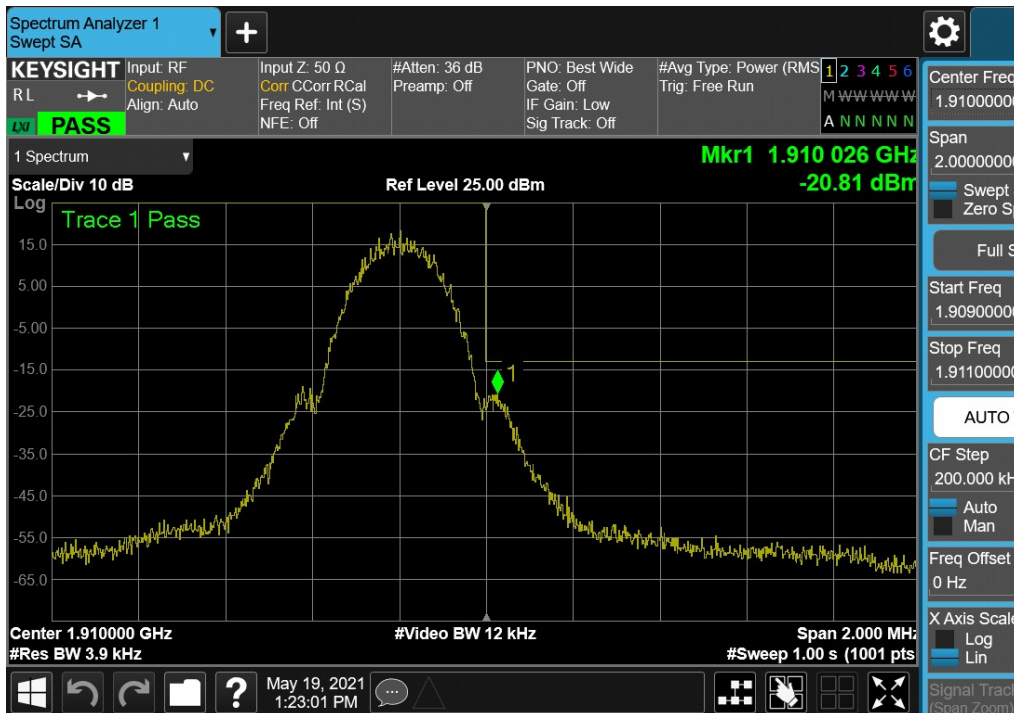

Plot 7-13. Upper Band Edge Plot (GPRS PCS – Ch. 810)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 21 of 34

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

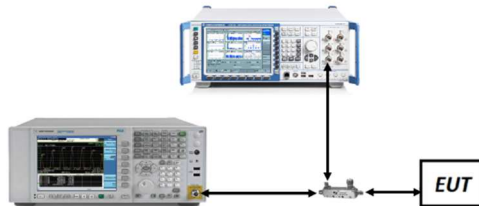



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 22 of 34

GPRS PCS

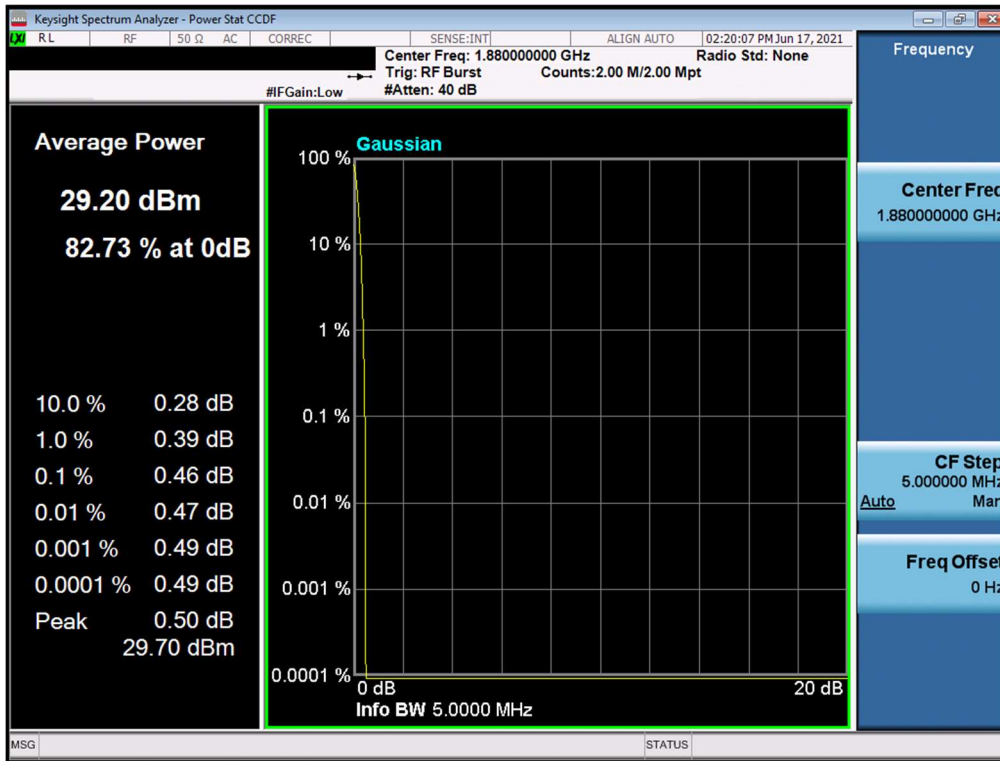

Plot 7-14. PAR Plot (GPRS, Ch. 661)



Plot 7-15. PAR Plot (EDGE, Ch. 661)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 23 of 34

7.6 Radiated Power (EIRP)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurement is performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMA127FN		PART 24 MEASUREMENT REPORT	 Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset	Page 24 of 34

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

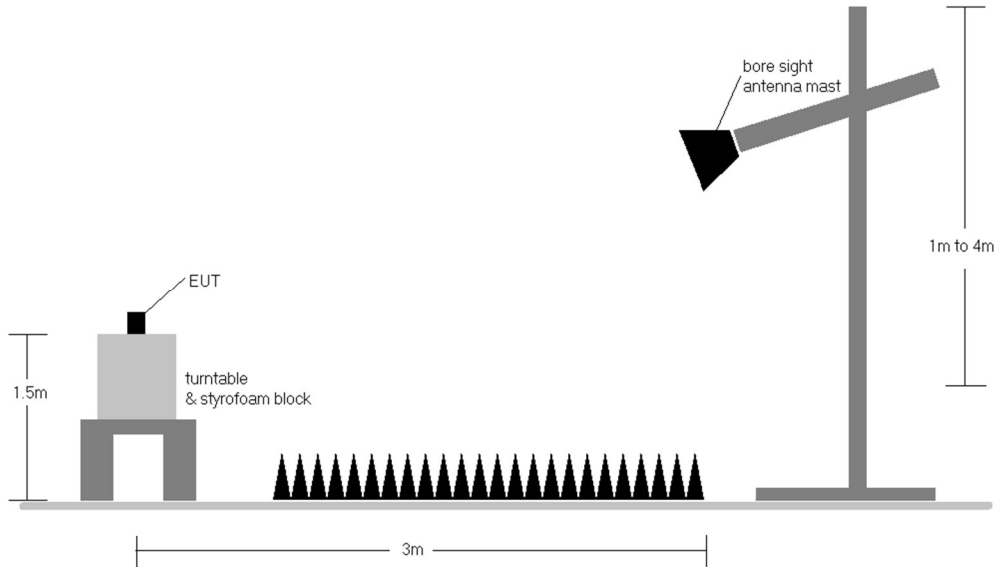


Figure 7-5. Radiated Test Setup <1GHz



Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

<p>FCC ID: A3LSMA127FN</p>		<p>PART 24 MEASUREMENT REPORT</p>	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1K210511001902-03.A3L</p>	<p>Test Dates: 05/13/2021 – 06/17/2021</p>	<p>EUT Type: Portable Handset</p>	<p>Page 25 of 34</p>

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	H	133	7	19.72	8.27	27.99	0.630	33.01	-5.02
1880.00	GPRS1900	H	118	0	20.26	8.29	28.55	0.716	33.01	-4.46
1909.80	GPRS1900	H	147	358	19.34	8.35	27.69	0.587	33.01	-5.32
1880.00	GPRS1900	V	110	119	19.98	8.29	28.27	0.672	33.01	-4.74
1880.00	EDGE1900	H	118	0	17.34	8.29	25.63	0.366	33.01	-7.38

Table 7-2. EIRP Data (GPRS PCS)

FCC ID: A3LSMA127FN	 PCTEST® Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 26 of 34

7.7 Radiated Spurious Emissions Measurements

Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMA127FN		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 27 of 34

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

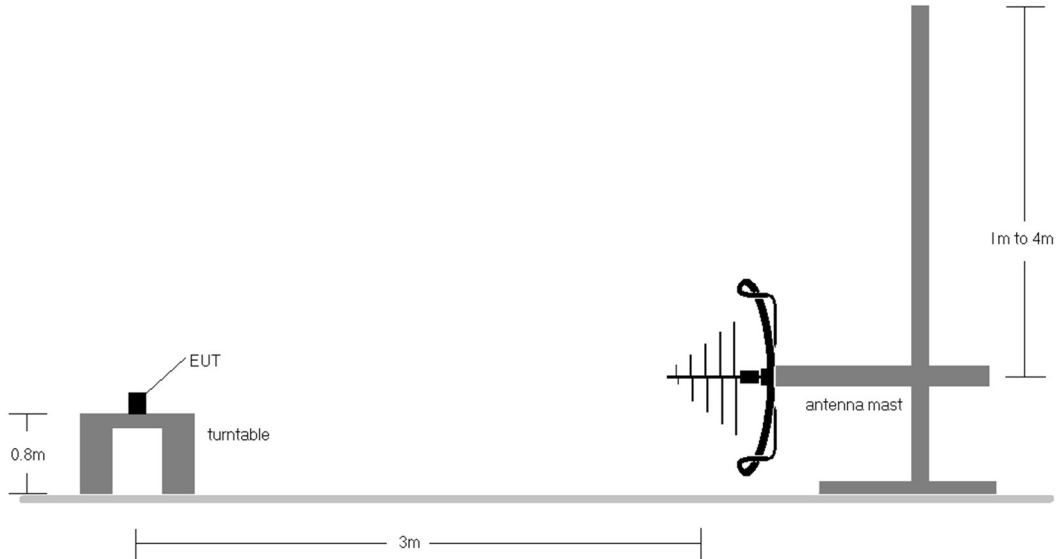


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

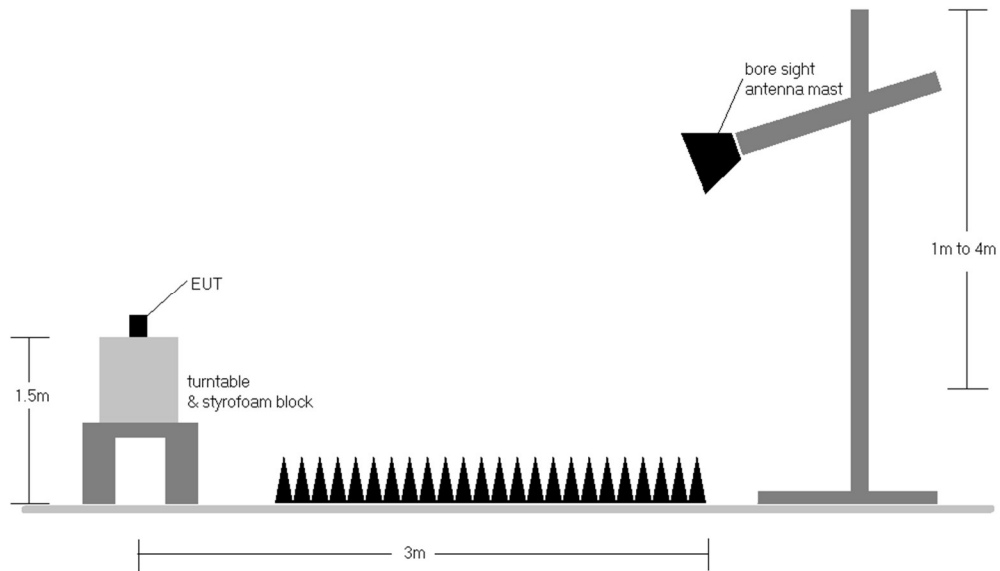




Figure 7-7. Test Instrument & Measurement Setup >1 GHz


<p>FCC ID: A3LSMA127FN</p>	<p>PCTEST Proud to be part of element</p>	<p>PART 24 MEASUREMENT REPORT</p>	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1K210511001902-03.A3L</p>	<p>Test Dates: 05/13/2021 – 06/17/2021</p>	<p>EUT Type: Portable Handset</p>	<p>Page 28 of 34</p>

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - a) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMA127FN		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 29 of 34

GPRS PCS

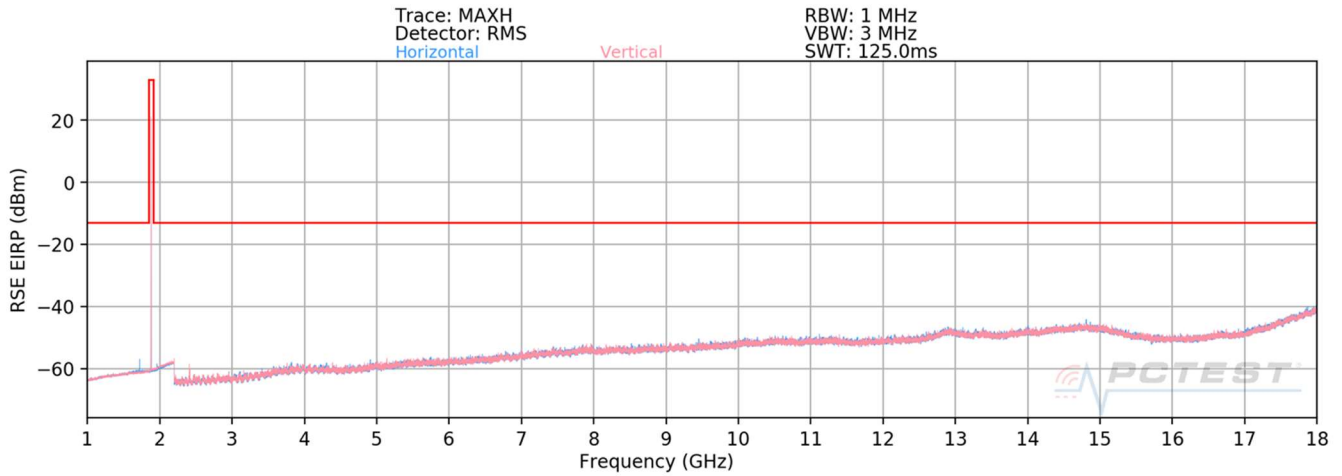

Plot 7-16. Radiated Spurious Plot (GPRS PCS)

Mode:	GPRS 1 Tx Slot
Channel:	512
Frequency (MHz):	1850.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3700.4	H	223	58	-66.65	0.31	40.66	-54.60	-13.00	-41.60
5550.6	H	196	33	-71.37	4.28	39.91	-55.35	-13.00	-42.35
7400.8	H	-	-	-74.18	8.90	41.72	-53.54	-13.00	-40.54
9251.0	H	-	-	-78.75	11.48	39.73	-55.52	-13.00	-42.52
11101.2	H	-	-	-79.31	14.04	41.73	-53.52	-13.00	-40.52

Table 7-3. Radiated Spurious Data (GPRS PCS – Low Channel)

Mode:	GPRS 1 Tx Slot
Channel:	661
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.0	H	231	66	-66.25	0.35	41.10	-54.16	-13.00	-41.16
5640.0	H	231	38	-71.05	5.01	40.96	-54.30	-13.00	-41.30
7520.0	H	-	-	-74.42	9.21	41.79	-53.47	-13.00	-40.47
9400.0	H	-	-	-78.62	11.80	40.18	-55.07	-13.00	-42.07
11280.0	H	-	-	-79.67	14.35	41.68	-53.58	-13.00	-40.58



Table 7-4. Radiated Spurious Data (GPRS PCS – Mid Channel)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset	Page 30 of 34	

Mode:	GPRS 1 Tx Slot
Channel:	810
Frequency (MHz):	1909.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3819.6	H	261	64	-66.58	0.76	41.18	-54.08	-13.00	-41.08
5729.4	H	257	39	-71.25	5.26	41.01	-54.25	-13.00	-41.25
7639.2	H	-	-	-74.24	9.08	41.84	-53.42	-13.00	-40.42
9549.0	H	-	-	-78.95	11.91	39.96	-55.30	-13.00	-42.30
11458.8	H	-	-	-79.59	14.39	41.80	-53.45	-13.00	-40.45

Table 7-5. Radiated Spurious Data (GPRS PCS – High Channel)

FCC ID: A3LSMA127FN	 PCTEST® Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 31 of 34

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.


Test Notes

None

FCC ID: A3LSMA127FN	 PCTEST® Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset		Page 32 of 34

GSM/GPRS PCS					
Operating Frequency (Hz):		1,880,000,000			
Ref. Voltage (VDC):		4.36			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.36	- 30	1,879,999,792	-419	-0.0000223
		- 20	1,879,999,910	-301	-0.0000160
		- 10	1,879,999,822	-389	-0.0000207
		0	1,880,000,032	-179	-0.0000095
		+ 10	1,880,000,168	-43	-0.0000023
		+ 20 (Ref)	1,880,000,211	0	0.0000000
		+ 30	1,880,000,222	11	0.0000006
		+ 40	1,880,000,037	-174	-0.0000093
Battery Endpoint	3.57	+ 20	1,880,000,210	-1	-0.0000001

Table 7-6. GSM/GPRS PCS Frequency Stability Data

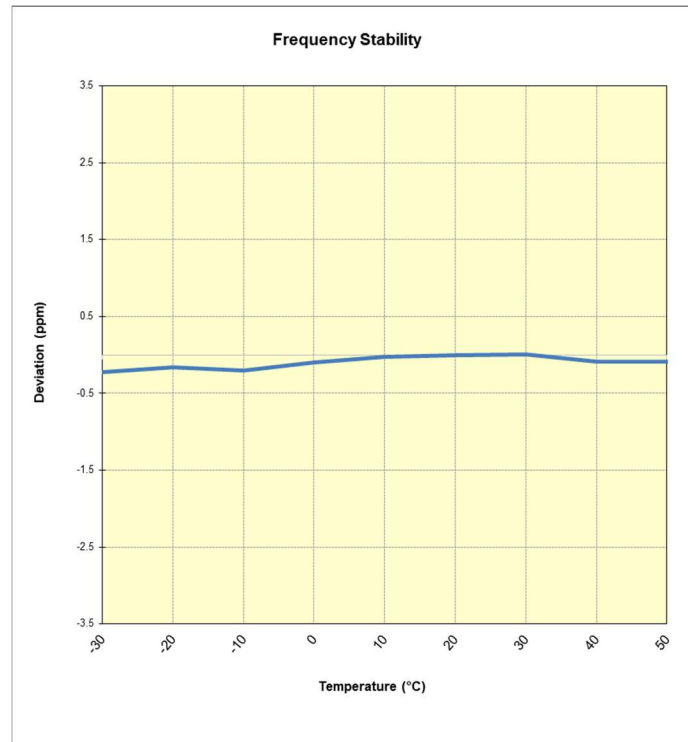



Plot 7-17. GSM/GPRS PCS Frequency Stability Chart

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset	Page 33 of 34	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Samsung **Portable Handset** **FCC ID: A3LSMA127FN** complies with all the requirements of Part 24 of the FCC rules.

FCC ID: A3LSMA127FN		PART 24 MEASUREMENT REPORT	 Approved by: Technical Manager
Test Report S/N: 1K210511001902-03.A3L	Test Dates: 05/13/2021 – 06/17/2021	EUT Type: Portable Handset	Page 34 of 34