

HEARING AID COMPATIBILITY

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro, Maetan dong,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do 16677, Korea

Date of Testing:
 10/23/2023 – 11/1/2023
Test Site/Location:
 Element Washington DC LLC,
 Columbia, MD, USA
Test Report Serial No.:
 1M2309070100-18-R2.A3L
Date of Issue:
 11/13/2023

FCC ID:	A3LSMA156U
APPLICANT:	SAMSUNG ELECTRONICS CO., LTD.

Scope of Test: RF Emissions Testing
Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2019
 285076 D01 HAC Guidance v06r02
 285076 D02 T-Coil testing for CMRS IP v04

DUT Type: Portable Handset
Model: SM-A156U
Additional Model(s): SM-A156U1/DS, SM-S156V
Test Device Serial No.: *Pre-Production Sample [S/N: 0678M]*

C63.19-2019 HAC Verdict:	PASS
---------------------------------	-------------

Note: This revised Test Report (S/N: 1M2309070100-18-R2.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible as specified in ANSI/IEEE Std. C63.19-2019 and has been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. Test results reported herein relate only to the item(s) tested. North America bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 RJ Ortanez
 Executive Vice President




FCC ID: A3LSMA156U		HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 1 of 42

REV 4.3.M
11/29/2022

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION.....	4
3.	ANSI/IEEE C63.19-2019 PERFORMANCE REQUIRMENTS	6
4.	RF SYSTEM SPECIFICATIONS.....	7
5.	TEST PROCEDURE	12
6.	CONDUCTED POWER CONFIGURATIONS AND TARGETS	13
7.	JUSTIFICATION OF HELD TO EAR MODES TESTED	37
8.	EQUIPMENT LIST.....	38
9.	MEASUREMENT UNCERTAINTY	39
10.	CONCLUSION.....	40
11.	REFERENCES	41

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 2 of 42

REV 4.3.M
11/29/2022

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index
- T-coil mode, acoustic-signal conversational gain in the audio band
- T-coil mode, acoustic-signal frequency response through the audio band
- T-coil mode, acoustic-signal distortion through audio band
- Volume Control, receive volume control performance
- Volume Control, receive distortion and noise performance
- Volume Control, receive acoustic frequency response performance

The hearing aid may be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.

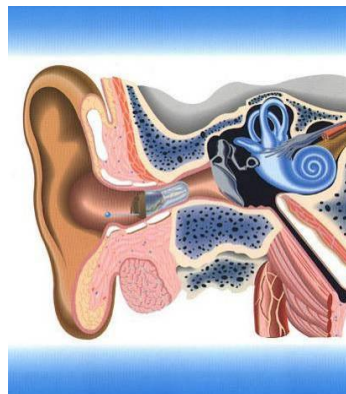



Figure 1-1 Hearing Aid *in-vitu*

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 3 of 42

REV 4.3.M
11/29/2022

2. DUT DESCRIPTION



FCC ID: A3LSMA156U
Manufacturer: Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 16677, Korea
Model: SM-A156U
Additional Model(s): SM-A156U1/DS, SM-S156V
Serial Number: 0678M
Antenna Configurations: Internal Antenna
DUT Type: Portable Handset

I. LTE Band Selection

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, hearing-aid compatibility compliance was only assessed for the band with the larger transmission frequency range. However, overlapped LTE bands which are anchor bands for dual connectivity (EN-DC) scenarios between LTE and NR were evaluated as independent LTE bands.

II. NR Band Selection


This device supports NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of an NR band falls completely within an NR band with a larger transmission frequency range, both NR bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both NR bands share the same transmission path and signal characteristics, hearing-aid compatibility compliance was only assessed for the band with the larger transmission frequency range.

FCC ID: A3LSMA156U	element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 4 of 42

REV 4.3.M
11/29/2022

**Table 2-1
HAC Air Interfaces**

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	
GSM	850	VO	No ¹	Yes: WIFI or BT	CMRS Voice	
	1900					
	GPRS/EDGE	VD				Yes: WIFI or BT
UMTS	850	VD	No ¹	Yes: WIFI or BT	CMRS Voice	
	1700					
	1900	VD			Yes: WIFI or BT	Google Meet
	HSPA					
LTE (FDD)	680 (B71)	VD	No ¹	Yes: NR, WIFI or BT	VoLTE, Google Meet	
	700 (B12)					
	780 (B13)					
	790 (B14)					
	850 (B5)					
	850 (B26)					
	1700 (B4)					
	1700 (B66)					
	1900 (B2)					
	1900 (B25)					
	2300 (B30)					
	2500 (B7)					
LTE (TDD)	2600 (B38)	VD	No ¹	Yes: NR, WIFI or BT	VoLTE, Google Meet	
	2600 (B41)					
	3600 (B48)					
NR (FDD)	680 (n71)	VD	No ¹	Yes: LTE, WIFI or BT	VoNR, Google Meet	
	850 (n5)					
	1700 (n70)					
	1700 (n66)					
	1900 (n2)					
	1900 (n25)					
NR (TDD)	2600 (n41)	VD	No ¹	Yes: LTE, WIFI or BT	VoNR, Google Meet	
	3500 (n77, DoD)					
	3500 (n78, DoD)					
	3600 (n48)					
	3750 (n78)					
	3800 (n77)					
WIFI	2450	VD	No ¹	Yes: GSM, UMTS, LTE, or NR	VoWIFI, Google Meet	
	5200 (U-NII 1)					
	5300 (U-NII 2A)					
	5500 (U-NII 2C)					
	5800 (U-NII 3)					
BT	2450	DT	No	Yes: GSM, UMTS, LTE, or NR	N/A	
Type Transport VO = Voice Only DT = Digital Data - Not intended for Voice Services VD = CMRS and/or IP Voice over Data Transport			Notes: 1. Evaluated for WD RF peak power level requirements.			

FCC ID: A3LSMA156U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2-A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset
		Page 5 of 42

REV 4.3.M
11/29/2022

3. ANSI/IEEE C63.19-2019 PERFORMANCE REQUIREMENTS

I. WD EMISSIONS Requirements

The ANSI Standard provides guidance on measuring the potential for wireless device (WD) RF emissions to cause audio frequency interference in a hearing aid. When the performance requirements of the Standard below are met, the WD demonstrates compliance to emission requirements for operation in close proximity with a hearing aid. The WD may demonstrate compliance by meeting any of the four requirements listed below for each of its operating bands.

Frequency Range (MHz)	RF _{AIPL} (dBm)
<960	29
960-2000	26
>2000	25

Table 3-1
WD RF audio interference power level requirements

Frequency Range (MHz)	RF _{Peak Power} (dBm)
<960	35
960-2000	32
>2000	31


Table 3-2
WD RF peak power level requirements

Frequency Range (MHz)	RF _{AIL} (dB(V/m))
<960	39
960-2000	36
>2000	35

Table 3-3
WD RF audio interference level requirements

Frequency Range (MHz)	RF _{Peak} (dB(V/m))
<960	29
960-2000	26
>2000	25

Table 3-4
WD RF peak near-field level requirements

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 6 of 42

REV 4.3.M
11/29/2022

4. RF SYSTEM SPECIFICATIONS

Description of test system for measurement of near-field RF audio interference level

EF3DV3 E-Field Probe Description

Construction:	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges
Calibration:	In air from 30 MHz to 6.0 GHz (absolute accuracy $\pm 5.1\%$, $k=2$)
Frequency:	30 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m (M3 or better device readings fall well below diode compression point)
Linearity:	± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 4.0 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.5 mm

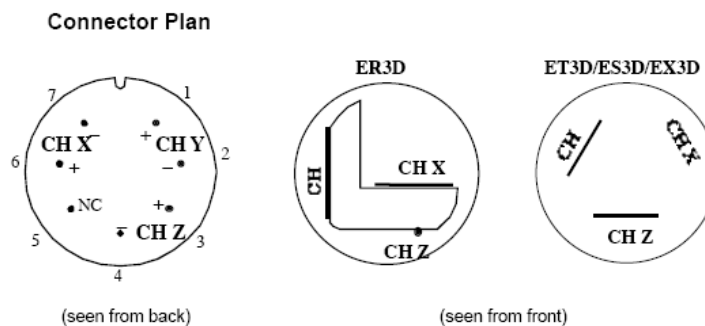


Figure 4-1
E-field Free-space Probe

Probe Tip Description

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).

The electric field probes have an irregular internal geometry because it is physically not possible to have the 3 orthogonal sensors situated with the same center. The effect of the different sensor centers is accounted for in the HAC uncertainty budget ("sensor displacement").



The antistatic shielding inside the probe is connected to the probe connector case.

FCC ID: A3LSMA156U	element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 7 of 42

REV 4.3.M
11/29/2022

Instrumentation Chain

Equation 1

Conversion of Connector Voltage u_i to E-Field E_i

$$E_i = \sqrt{\frac{u_i + (u_i^2 \cdot CF)/(DCP)}{Norm_i \cdot ConvF}}$$

whereby

E_i : electric field in V/m
 u_i : voltage of channel i at the connector in μV
 $Norm_i$: sensitivity of channel i in $\mu\text{V}/(\text{V/m})^2$
 $ConvF$: enhancement factor in liquid ($ConvF=1$ for Air)
 DCP : diode compression point in μV
 CF : signal crest factor (peak power/average power)

Conditions of Calibration



Please note:


- a lower input impedance of the amplifier will result in different sensitivity factors $Norm_i$ and DCP
- larger bias currents will cause higher offset

Probe Response to Frequency

The E-field sensors have inherently a very flat frequency response. They are calibrated with a number of frequencies resulting in a common calibration factor, with the frequency behavior documented in the calibration certificate (See also below).

Frequency Response of E-Field

(TEM-Cell:if110 EXX, Waveguide R22)



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Figure 4-2 E-Field Probe Frequency Response

FCC ID: A3LSMA156U	element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 8 of 42

REV 4.3.M

11/29/2022

SPEAG Robotic System


E-field measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel CORE i7 computer, near-field probe, probe alignment sensor, and the HAC phantom. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).



Figure 4-3
SPEAG Robotic System

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the computer with operating system and RF Measurement Software DASY5 v52.8 (with HAC Extension), A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 9 of 42

REV 4.3.M
11/29/2022

System Electronics

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.




Figure 4-4
SPEAG Robotic System Diagram

DASY5 Instrumentation Chain

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i	= compensated signal of channel i	(i = x, y, z)
U_i	= input signal of channel i	(i = x, y, z)
cf	= crest factor of exciting field	(DASY parameter)
dcp_i	= diode compression point	(DASY parameter)

FCC ID: A3LSMA156U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset
		Page 10 of 42

REV 4.3.M
11/29/2022

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes} : \quad E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
 $\mu\text{V}/(\text{V}/\text{m})^2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.


The measurement/integration time per point, as specified by the system manufacturer is >500ms.

The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500ms and a probe response time of <5 ms. In the current implementation, DASy5 waits longer than 100ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

Environmental Conditions

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.


FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 11 of 42

REV 4.3.M
11/29/2022

5. TEST PROCEDURE

I. PEAK POWER LEVEL EVALUATION

To demonstrate hearing aid compliance with the ANSI standard C63.19-2019, an evaluation was performed using the peak power level requirements detailed in Table 3-2. Conducted power measurements were performed to verify maximum target power levels for all relevant operating bands/modes. An evaluation of each applicable air interface was performed to ensure compliance for each band.

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 12 of 42

REV 4.3.M

11/29/2022

6. CONDUCTED POWER CONFIGURATIONS AND TARGETS

I. Procedures Used to Establish RF Signal for HAC Testing

The handset was configured to transmit the required air interface in a shielded chamber. Measurements were taken with a fully charged battery.

II. HAC Target Powers

All applicable modes supported by the device have their held-to-ear conducted power targets listed below and were used for the individual mode evaluations in Section 7. All conducted power targets have a tolerance of +1.0dB and -1.5dB unless otherwise noted. For WIFI modes, the overall maximum power amongst all bands per IEEE standards is listed.

III. RF Conducted Power Measurement Setup and Conditions

Output Power Verification

Maximum output power is verified for all applicable test channels for all air interfaces which require HAC compliance. See Table 6-1 for air interface specific settings of transmit power parameters.

**Table 6-1
Power Control Parameters and Settings by Air Interface**

Air Interface:	Parameter Name:	Parameter Set To:
GSM	PCL	GSM850: "5"; GSM1900: "0"
UMTS	TPC	"All 1's"
LTE	TPC	"Max Power"
NR	PLS	Mfr Specified
WIFI	PLS	Mfr Specified

The general setup for conducted powers included in Tables 6-10 to 6-40 is shown in Figure 6-1 below. The power measurement equipment could be a base station simulator, signal analyzer, or power meter depending on the applicable air interface.

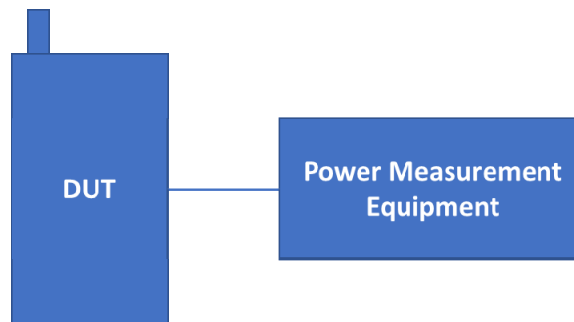



Figure 6-1
Power Measurement Setup

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 13 of 42

REV 4.3.M
11/29/2022

IV. GSM Target Powers

**Table 6-2
GSM Conducted Power Targets**

Band	Modulated Average Output Power (in dBm)	
	Voice	Data
GSM/EDGE 850	32.5	26.5
GSM/EDGE 1900	29.5	25.5

V. UMTS Target Powers


**Table 6-3
UMTS Conducted Power Targets**

Band	Modulated Average Output Power (in dBm)	
	3GPP WCDMA Rel 99	3GPP HSUPA Rel 6
UMTS V	24.5	21.5
UMTS IV	24.0	21.0
UMTS II	24.0	21.0

VI. LTE FDD Target Powers

**Table 6-4
LTE FDD Conducted Power Targets**

Band	Modulated Average Output Power (in dBm)
LTE Band 71	24.5
LTE Band 12	24.5
LTE Band 13	23.5
LTE Band 14	23.5
LTE Band 5	24.5
LTE Band 26	24.5
LTE Band 4	24.5
LTE Band 66	24.5
LTE Band 2	24.5
LTE Band 25	24.5
LTE Band 30	23.0
LTE Band 7	23.0

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 14 of 42

REV 4.3.M
11/29/2022

VII. LTE TDD Target Powers

Table 6-5
LTE TDD Conducted Power Targets

Band	Modulated Average Output Power (in dBm)
LTE Band 38	23.0
LTE Band 41 PC3	24.0
LTE Band 41 PC2	25.5
LTE Band 48	23.0


Table 6-6
LTE TDD Uplink Carrier Aggregation Conducted Power Targets

Band	Modulated Average Output Power (in dBm)
LTE Band 41 PC3	24.0
LTE Band 41 PC2	25.5
LTE Band 48	23.0

VIII. NR FDD Target Powers

Table 6-7
NR FDD Conducted Power Targets

Band	Modulated Average Output Power (in dBm)
NR Band n71	24.5
NR Band n5	24.5
NR Band n70	24.5
NR Band n66	24.5
NR Band n2	24.5
NR Band n25	24.5

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 15 of 42

REV 4.3.M
11/29/2022

IX. NR TDD Target Powers


**Table 6-8
NR TDD Conducted Power Targets**

Band	Modulated Average Output Power (in dBm)
NR Band n41 PC2	26.0
NR Band n48	23.0
NR Band n77	26.0
NR Band n77 (DoD)	26.0
NR Band n78	26.0
NR Band n78 (DoD)	26.0

X. WIFI Target Powers

**Table 6-9
IEEE 802.11a/b/g/n/ac Average RF Power Targets**

Band	Modulated Average Output Power (in dBm)
WLAN - 2.4GHz	20.0
WLAN - 5GHz	19.0

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 16 of 42

REV 4.3.M
11/29/2022

XI. Conducted Power Measurements

**Table 6-10
GSM Conducted Powers**


Band	Channel	GSM [dBm] CS (1 Slot)	EDGE [dBm] 1 Tx Slot
GSM 850	128	32.76	26.27
	190	32.95	26.40
	251	32.98	26.55
GSM 1900	512	29.89	25.55
	661	30.03	25.65
	810	29.65	25.23

**Table 6-11
UMTS Conducted Powers**

Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]		
		4132	4183	4233	1312	1412	1513	9262	9400	9538
WCDMA	12.2 kbps RMC	22.73	22.88	22.80	20.42	19.96	19.62	20.03	20.26	19.97
	12.2 kbps AMR	22.78	22.86	22.75	20.45	19.97	19.65	20.11	20.34	19.91
HSUPA	Subtest 1	20.11	20.17	20.09	18.01	18.05	18.02	17.56	17.64	17.23

**Table 6-12
LTE Band 71 Conducted Powers**

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	133222	673.0	1 / 50	23.65
		133297	680.5	1 / 99	23.96
		133372	688.0	1 / 99	23.91
	16-QAM	133372	688.0	1 / 99	23.25
15 MHz	QPSK	133197	670.5	1 / 37	23.67
		133297	680.5	1 / 74	23.77
		133397	690.5	1 / 37	24.23
	16-QAM	133397	690.5	1 / 74	23.54
10 MHz	QPSK	133172	668.0	1 / 25	23.52
		133297	680.5	1 / 49	23.94
		133422	693.0	1 / 49	24.16
	16-QAM	133422	693.0	1 / 49	23.44
5 MHz	QPSK	133147	665.5	1 / 0	23.64
		133297	680.5	1 / 12	23.68
		133447	695.5	1 / 24	24.19
	16-QAM	133447	695.5	1 / 12	23.57

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 17 of 42

REV 4.3.M
11/29/2022

**Table 6-13
LTE Band 12 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23060	704.0	1 / 49	24.48
		23095	707.5	1 / 49	24.46
		23130	711.0	1 / 49	24.49
	16-QAM	23060	704.0	1 / 49	23.92
5 MHz	QPSK	23035	701.5	1 / 24	24.44
		23095	707.5	1 / 24	24.30
		23155	713.5	1 / 12	24.44
	16-QAM	23035	701.5	1 / 24	23.70
3 MHz	QPSK	23025	700.5	1 / 7	24.02
		23095	707.5	1 / 7	24.34
		23165	714.5	1 / 14	24.34
	16-QAM	23095	707.5	1 / 14	23.67
1.4 MHz	QPSK	23017	699.7	1 / 5	24.18
		23095	707.5	1 / 0	24.29
		23173	715.3	1 / 3	24.38
	16-QAM	23095	707.5	1 / 3	23.62

**Table 6-14
LTE Band 13 Conducted Powers**

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23230	782.0	1 / 49	23.64
	16-QAM	23230	782.0	1 / 49	22.64
5 MHz	QPSK	23205	779.5	1 / 24	23.50
		23230	782.0	1 / 24	23.54
		23255	784.5	1 / 12	23.84
	16-QAM	23255	784.5	1 / 12	22.80

**Table 6-15
LTE Band 14 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23330	793.0	1 / 49	23.78
	16-QAM	23330	793.0	1 / 49	22.82
5 MHz	QPSK	23305	790.5	1 / 24	23.56
		23330	793.0	1 / 0	23.77
		23355	795.5	1 / 24	23.80
	16-QAM	23305	790.5	1 / 24	22.60
		23330	793.0	1 / 0	22.62
		23355	795.5	1 / 24	23.06

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 18 of 42

REV 4.3.M
11/29/2022

**Table 6-16
LTE Band 26/5 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15MHz	QPSK	26865	831.5	1 / 37	25.30
		26915	836.5	1 / 74	25.21
		26965	841.5	1 / 74	25.27
	16QAM	26865	831.5	1 / 37	24.57
		26915	836.5	1 / 74	24.29
		26965	841.5	1 / 74	24.34
10 MHz	QPSK	26840	829.0	1 / 25	25.24
		26915	836.5	1 / 25	25.40
		26990	844.0	1 / 0	25.25
	16QAM	26840	829.0	1 / 25	24.31
		26915	836.5	1 / 25	24.29
		26990	844.0	1 / 0	24.46
5 MHz	QPSK	26815	826.5	1 / 24	25.34
		26915	836.5	1 / 24	25.33
		27015	846.5	1 / 12	25.25
	16QAM	26815	826.5	1 / 24	24.57
		26915	836.5	1 / 24	24.48
		27015	846.5	1 / 12	24.25
3 MHz	QPSK	26805	825.5	1 / 14	25.08
		26915	836.5	1 / 0	25.21
		27025	847.5	1 / 14	25.21
	16QAM	26805	825.5	1 / 14	24.18
		26915	836.5	1 / 0	24.10
		27025	847.5	1 / 14	24.44
1.4 MHz	QPSK	26797	824.7	1 / 5	24.33
		26915	836.5	1 / 3	25.28
		27033	848.3	1 / 5	25.25
	16QAM	26797	824.7	1 / 5	23.24
		26915	836.5	1 / 3	23.99
		27033	848.3	1 / 5	24.18

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 19 of 42

REV 4.3.M
11/29/2022

Table 6-17
LTE Band 66/4 Conducted Powers


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	132072	1720.0	1 / 0	24.95
		132322	1745.0	1 / 50	24.68
		132572	1770.0	1 / 0	24.61
	16-QAM	132322	1745.0	1 / 50	24.13
15 MHz	QPSK	132047	1717.5	1 / 0	24.98
		132322	1745.0	1 / 74	24.57
		132597	1772.5	1 / 0	24.59
	16-QAM	132322	1745.0	1 / 37	23.93
10 MHz	QPSK	132022	1715.0	1 / 25	24.96
		132322	1745.0	1 / 25	24.68
		132622	1775.0	1 / 25	24.49
	16-QAM	132322	1745.0	1 / 0	24.01
5 MHz	QPSK	131997	1712.5	1 / 0	24.97
		132322	1745.0	1 / 12	24.62
		132647	1777.5	1 / 24	24.60
	16-QAM	132322	1745.0	1 / 24	24.08
3 MHz	QPSK	131987	1711.5	1 / 7	24.97
		132322	1745.0	1 / 0	24.52
		132657	1778.5	1 / 0	24.52
	16-QAM	132322	1745.0	1 / 0	23.86
1.4 MHz	QPSK	131979	1710.7	1 / 3	24.98
		132322	1745.0	1 / 5	24.48
		132665	1779.3	1 / 3	24.48
	16-QAM	132322	1745.0	1 / 3	23.86

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 20 of 42

REV 4.3.M
11/29/2022

**Table 6-18
LTE Band 25/2 Conducted Powers**

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	26140	1860.0	1 / 99	24.53
		26365	1882.5	1 / 50	24.68
		26590	1905.0	1 / 99	24.53
	16-QAM	26140	1860.0	1 / 99	23.81
		26365	1882.5	1 / 50	23.91
		26590	1905.0	1 / 99	23.68
15 MHz	QPSK	26115	1857.5	1 / 0	24.52
		26365	1882.5	1 / 37	24.76
		26615	1907.5	1 / 74	24.48
	16-QAM	26115	1857.5	1 / 0	23.62
		26365	1882.5	1 / 37	24.05
		26615	1907.5	1 / 74	23.57
10 MHz	QPSK	26090	1855.0	1 / 0	24.55
		26365	1882.5	1 / 25	24.65
		26640	1910.0	1 / 49	24.51
	16-QAM	26090	1855.0	1 / 0	23.72
		26365	1882.5	1 / 25	23.97
		26640	1910.0	1 / 49	23.61
5 MHz	QPSK	26065	1852.5	1 / 24	24.52
		26365	1882.5	1 / 12	24.63
		26665	1912.5	1 / 12	24.44
	16-QAM	26065	1852.5	1 / 24	23.56
		26365	1882.5	1 / 12	23.77
		26665	1912.5	1 / 12	23.70
3 MHz	QPSK	26055	1851.5	1 / 7	24.48
		26365	1882.5	1 / 7	24.70
		26675	1913.5	1 / 14	24.49
	16-QAM	26055	1851.5	1 / 7	23.51
		26365	1882.5	1 / 7	23.57
		26675	1913.5	1 / 14	23.74
1.4 MHz	QPSK	26047	1850.7	1 / 3	24.32
		26365	1882.5	1 / 0	24.40
		26683	1914.3	1 / 0	24.61
	16-QAM	26047	1850.7	1 / 3	23.72
		26365	1882.5	1 / 0	23.90
		26683	1914.3	1 / 0	23.89

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 21 of 42


REV 4.3.M
11/29/2022

**Table 6-19
LTE Band 30 Conducted Powers**

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	27710	2310.0	1 / 25	22.32
	16-QAM	27710	2310.0	1 / 25	21.47
5 MHz	QPSK	27685	2307.5	1 / 0	22.42
		27710	2310.0	1 / 0	22.48
		27735	2312.5	1 / 24	22.27
	16-QAM	27685	2307.5	1 / 0	21.45
		27710	2310.0	1 / 0	21.51
		27735	2312.5	1 / 24	21.32

**Table 6-20
LTE Band 7 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	20850	2510.0	1 / 50	23.33
		21100	2535.0	1 / 99	23.45
		21350	2560.0	1 / 50	23.78
	16-QAM	20850	2510.0	1 / 50	22.38
		21100	2535.0	1 / 99	22.45
		21350	2560.0	1 / 50	22.76
15 MHz	QPSK	20825	2507.5	1 / 37	23.37
		21100	2535.0	1 / 37	23.47
		21375	2562.5	1 / 37	23.67
	16-QAM	20825	2507.5	1 / 37	22.42
		21100	2535.0	1 / 37	22.54
		21375	2562.5	1 / 37	22.67
10 MHz	QPSK	20800	2505.0	1 / 25	23.14
		21100	2535.0	1 / 49	23.29
		21400	2565.0	1 / 25	23.59
	16-QAM	20800	2505.0	1 / 25	22.17
		21100	2535.0	1 / 49	22.31
		21400	2565.0	1 / 25	22.60
5 MHz	QPSK	20775	2502.5	1 / 0	23.21
		21100	2535.0	1 / 12	23.26
		21425	2567.5	1 / 0	23.74
	16-QAM	20775	2502.5	1 / 0	22.19
		21100	2535.0	1 / 12	22.43
		21425	2567.5	1 / 0	22.73

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 22 of 42

REV 4.3.M
11/29/2022

**Table 6-21
LTE Band 41/38 Power Class 3 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	39750	2506.0	1 / 50	24.49
		40620	2593.0	1 / 0	23.55
		41490	2680.0	1 / 50	24.12
	16-QAM	39750	2506.0	1 / 50	23.58
		40620	2593.0	1 / 0	22.67
		41490	2680.0	1 / 50	23.23
15 MHz	QPSK	39725	2503.5	1 / 37	24.45
		40620	2593.0	1 / 0	23.49
		41515	2682.5	1 / 0	24.12
	16-QAM	39725	2503.5	1 / 37	23.56
		40620	2593.0	1 / 0	22.61
		41515	2682.5	1 / 0	23.19
10 MHz	QPSK	39700	2501.0	1 / 49	24.47
		40620	2593.0	1 / 25	23.50
		41540	2685.0	1 / 0	24.15
	16-QAM	39700	2501.0	1 / 0	23.57
		40620	2593.0	1 / 25	22.54
		41540	2685.0	1 / 0	23.24
5 MHz	QPSK	39675	2498.5	1 / 12	24.44
		40620	2593.0	1 / 12	23.51
		41565	2687.5	1 / 0	24.12
	16-QAM	39675	2498.5	1 / 12	23.58
		40620	2593.0	1 / 12	22.53
		41565	2687.5	1 / 0	23.17

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 23 of 42

REV 4.3.M
11/29/2022

**Table 6-22
LTE Band 41 Power Class 2 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	39750	2506.0	1 / 50	25.85
		40620	2593.0	1 / 0	25.03
		41490	2680.0	1 / 50	25.51
	16-QAM	39750	2506.0	1 / 50	24.97
		40620	2593.0	1 / 0	24.06
		41490	2680.0	1 / 50	24.66
15 MHz	QPSK	39725	2503.5	1 / 74	25.75
		40620	2593.0	1 / 0	25.01
		41515	2682.5	1 / 0	25.53
	16-QAM	39725	2503.5	1 / 74	24.85
		40620	2593.0	1 / 0	24.09
		41515	2682.5	1 / 0	24.62
10 MHz	QPSK	39700	2501.0	1 / 49	25.73
		40620	2593.0	1 / 0	24.83
		41540	2685.0	1 / 25	25.47
	16-QAM	39700	2501.0	1 / 49	24.90
		40620	2593.0	1 / 0	23.97
		41540	2685.0	1 / 25	24.61
5 MHz	QPSK	39675	2498.5	1 / 12	25.66
		40620	2593.0	1 / 0	24.83
		41565	2687.5	1 / 12	25.54
	16-QAM	39675	2498.5	1 / 12	24.78
		40620	2593.0	1 / 0	24.02
		41565	2687.5	1 / 12	24.60

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 24 of 42

REV 4.3.M
11/29/2022

**Table 6-23
LTE Band 48 Power Class 3 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	55340	3560.0	1 / 49	23.73
		55990	3625.0	1 / 1	23.37
		56640	3690.0	1 / 25	22.09
	16-QAM	55340	3560.0	1 / 49	22.75
		55990	3625.0	1 / 1	22.39
		56640	3690.0	1 / 49	21.13
15 MHz	QPSK	55315	3557.5	1 / 36	23.63
		55990	3625.0	1 / 1	23.19
		56665	3692.5	1 / 36	22.11
	16-QAM	55315	3557.5	1 / 36	22.62
		55990	3625.0	1 / 1	22.19
		56665	3692.5	1 / 36	21.13
10 MHz	QPSK	55290	3555.0	1 / 22	23.52
		55990	3625.0	1 / 1	23.18
		56690	3695.0	1 / 22	22.09
	16-QAM	55290	3555.0	1 / 22	22.56
		55990	3625.0	1 / 1	22.19
		56690	3695.0	1 / 22	21.09
5 MHz	QPSK	55265	3552.5	1 / 5	23.53
		55990	3625.0	1 / 5	23.22
		56715	3697.5	1 / 5	22.08
	16-QAM	55265	3552.5	1 / 5	22.53
		55990	3625.0	1 / 5	22.25
		56715	3697.5	1 / 5	21.11

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 25 of 42

REV 4.3.M
11/29/2022

**Table 6-24
NR Band 71 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	π/2 BPSK	134600	673.0	1 / 104	23.65
		136100	680.5	1 / 104	23.79
		137600	688.0	1 / 104	24.05
	QPSK	134600	673.0	1 / 53	23.64
		136100	680.5	1 / 104	23.80
		137600	688.0	1 / 104	24.21
16-QAM	137600	688.0	1 / 104	23.48	
15 MHz	π/2 BPSK	134100	670.5	1 / 39	23.73
		136100	680.5	1 / 77	23.90
		138100	690.5	1 / 77	24.21
	QPSK	134100	670.5	1 / 1	23.66
		136100	680.5	1 / 77	23.77
		138100	690.5	1 / 77	24.13
16-QAM	138100	690.5	1 / 77	23.53	
10 MHz	π/2 BPSK	133600	668.0	1 / 1	23.68
		136100	680.5	1 / 50	23.82
		138600	693.0	1 / 50	24.32
	QPSK	133600	668.0	1 / 1	23.61
		136100	680.5	1 / 50	23.79
		138600	693.0	1 / 50	24.09
16-QAM	138600	693.0	1 / 50	23.49	
5 MHz	π/2 BPSK	133100	665.5	1 / 12	23.74
		136100	680.5	1 / 12	23.76
		139100	695.5	1 / 12	24.24
	QPSK	133100	665.5	1 / 12	23.62
		136100	680.5	1 / 12	23.82
		139100	695.5	1 / 12	24.24
16-QAM	139100	695.5	1 / 12	23.19	

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 26 of 42

REV 4.3.M
11/29/2022

**Table 6-25
NR Band 5 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	π/2 BPSK	166800	834.0	1 / 1	24.03
		167300	836.5	1 / 104	24.20
		167800	839.0	1 / 53	23.88
	QPSK	166800	834.0	1 / 104	24.02
		167300	836.5	1 / 104	24.02
		167800	839.0	1 / 1	23.93
	16-QAM	166800	834.0	1 / 1	23.24
		167300	836.5	1 / 104	23.12
		167800	839.0	1 / 1	23.16
15 MHz	π/2 BPSK	166300	831.5	1 / 77	24.17
		167300	836.5	1 / 77	24.11
		168300	841.5	1 / 77	24.08
	QPSK	166300	831.5	1 / 39	24.03
		167300	836.5	1 / 77	24.08
		168300	841.5	1 / 77	24.12
	16-QAM	166300	831.5	1 / 77	23.15
		167300	836.5	1 / 77	23.22
		168300	841.5	1 / 77	23.07
10 MHz	π/2 BPSK	165800	829.0	1 / 50	23.89
		167300	836.5	1 / 26	24.13
		168800	844.0	1 / 26	24.19
	QPSK	165800	829.0	1 / 50	24.15
		167300	836.5	1 / 50	24.24
		168800	844.0	1 / 1	24.16
	16-QAM	165800	829.0	1 / 50	23.31
		167300	836.5	1 / 50	23.36
		168800	844.0	1 / 26	23.28
5 MHz	π/2 BPSK	165300	826.5	1 / 23	24.08
		167300	836.5	1 / 23	24.14
		169300	846.5	1 / 12	24.09
	QPSK	165300	826.5	1 / 12	24.14
		167300	836.5	1 / 12	24.07
		169300	846.5	1 / 1	24.19
	16-QAM	165300	826.5	1 / 12	23.33
		167300	836.5	1 / 23	22.87
		169300	846.5	1 / 1	23.16

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 27 of 42

REV 4.3.M
11/29/2022

**Table 6-26
NR Band 70 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15 MHz	$\pi/2$ BPSK	340500	1702.5	1 / 39	25.04
	QPSK	340500	1702.5	1 / 39	24.97
	16-QAM	340500	1702.5	1 / 1	24.83
10 MHz	$\pi/2$ BPSK	340000	1700.0	1 / 26	25.09
		340500	1702.5	1 / 26	25.03
		341000	1705.0	1 / 1	25.22
	QPSK	340000	1700.0	1 / 26	25.05
		340500	1702.5	1 / 26	24.98
		341000	1705.0	1 / 1	25.10
	16-QAM	340000	1700.0	1 / 26	24.43
5 MHz	$\pi/2$ BPSK	339500	1697.5	1 / 1	25.35
		340500	1702.5	1 / 23	25.15
		341500	1707.5	1 / 12	25.01
	QPSK	339500	1697.5	1 / 1	25.28
		340500	1702.5	1 / 12	25.05
		341500	1707.5	1 / 12	25.05
	16-QAM	340500	1702.5	1 / 12	24.23

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 28 of 42

REV 4.3.M
11/29/2022

**Table 6-27
NR Band 66 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	346000	1730.0	1 / 1	24.44
		349000	1745.0	1 / 1	24.04
		352000	1760.0	1 / 214	23.51
	QPSK	346000	1730.0	1 / 1	24.44
		349000	1745.0	1 / 1	23.85
		352000	1760.0	1 / 214	23.43
16-QAM	349000	1745.0	1 / 1	22.97	
30 MHz	π/2 BPSK	345000	1725.0	1 / 1	24.61
		349000	1745.0	1 / 80	23.61
		353000	1765.0	1 / 1	23.63
	QPSK	345000	1725.0	1 / 1	24.41
		349000	1745.0	1 / 80	23.67
		353000	1765.0	1 / 1	23.67
16-QAM	349000	1745.0	1 / 80	23.02	
25 MHz	π/2 BPSK	344500	1722.5	1 / 66	24.48
		349000	1745.0	1 / 66	23.85
		353500	1767.5	1 / 131	23.68
	QPSK	344500	1722.5	1 / 1	24.46
		349000	1745.0	1 / 66	23.86
		353500	1767.5	1 / 131	23.65
16-QAM	344500	1722.5	1 / 1	23.56	
20 MHz	π/2 BPSK	344000	1720.0	1 / 53	24.49
		349000	1745.0	1 / 53	23.63
		354000	1770.0	1 / 53	23.45
	QPSK	344000	1720.0	1 / 53	24.55
		349000	1745.0	1 / 53	23.85
		354000	1770.0	1 / 53	23.53
16-QAM	344000	1720.0	1 / 53	23.47	
10 MHz	π/2 BPSK	343000	1715.0	1 / 50	24.66
		349000	1745.0	1 / 26	23.83
		355000	1775.0	1 / 26	23.50
	QPSK	343000	1715.0	1 / 50	24.28
		349000	1745.0	1 / 26	23.67
		355000	1775.0	1 / 26	23.66
16-QAM	355000	1775.0	1 / 26	22.74	
5 MHz	π/2 BPSK	342500	1712.5	1 / 12	24.08
		349000	1745.0	1 / 12	23.57
		355500	1777.5	1 / 1	23.39
	QPSK	342500	1712.5	1 / 12	24.10
		349000	1745.0	1 / 12	23.58
		355500	1777.5	1 / 1	23.40
16-QAM	342500	1712.5	1 / 12	23.28	

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 29 of 42

REV 4.3.M
11/29/2022

**Table 6-28
NR Band 25/2 Conducted Powers**


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	374000	1870.0	1 / 214	24.35
		376500	1882.5	1 / 108	24.43
		379000	1895.0	1 / 1	24.27
	QPSK	374000	1870.0	1 / 214	24.19
		376500	1882.5	1 / 108	24.26
		379000	1895.0	1 / 1	24.32
	16-QAM	374000	1870.0	1 / 214	23.01
		376500	1882.5	1 / 108	23.08
		379000	1895.0	1 / 1	22.62
30 MHz	π/2 BPSK	372000	1865.0	1 / 158	24.36
		376500	1882.5	1 / 80	24.35
		381000	1900.0	1 / 1	24.23
	QPSK	372000	1865.0	1 / 158	24.48
		376500	1882.5	1 / 80	24.22
		381000	1900.0	1 / 158	24.38
	16-QAM	372000	1865.0	1 / 158	23.07
		376500	1882.5	1 / 80	23.10
		381000	1900.0	1 / 158	22.99
25 MHz	π/2 BPSK	372000	1862.5	1 / 131	24.27
		376500	1882.5	1 / 66	24.45
		381000	1902.5	1 / 1	24.28
	QPSK	372000	1862.5	1 / 131	24.28
		376500	1882.5	1 / 66	24.41
		381000	1902.5	1 / 131	24.36
	16-QAM	372000	1862.5	1 / 131	23.09
		376500	1882.5	1 / 66	23.10
		381000	1902.5	1 / 131	23.07
20 MHz	π/2 BPSK	372000	1860.0	1 / 53	24.08
		376500	1882.5	1 / 53	24.29
		381000	1905.0	1 / 1	24.24
	QPSK	372000	1860.0	1 / 104	24.25
		376500	1882.5	1 / 53	24.51
		381000	1905.0	1 / 104	24.23
	16-QAM	372000	1860.0	1 / 104	22.90
		376500	1882.5	1 / 53	23.26
		381000	1905.0	1 / 1	22.64
15 MHz	π/2 BPSK	371500	1857.5	1 / 77	24.11
		376500	1882.5	1 / 77	24.44
		381500	1907.5	1 / 77	24.39
	QPSK	371500	1857.5	1 / 77	24.11
		376500	1882.5	1 / 39	24.44
		381500	1907.5	1 / 77	24.25
	16-QAM	371500	1857.5	1 / 77	23.13
		376500	1882.5	1 / 77	22.90
		381500	1907.5	1 / 77	23.17
10 MHz	π/2 BPSK	371000	1855.0	1 / 50	24.17
		376500	1882.5	1 / 50	24.33
		382000	1910.0	1 / 1	24.24
	QPSK	371000	1855.0	1 / 26	24.26
		376500	1882.5	1 / 50	24.35
		382000	1910.0	1 / 50	24.29
	16-QAM	371000	1855.0	1 / 26	22.65
		376500	1882.5	1 / 50	23.23
		382000	1910.0	1 / 50	22.91
5 MHz	π/2 BPSK	370500	1852.5	1 / 12	24.04
		376500	1882.5	1 / 1	24.29
		382500	1912.5	1 / 12	24.36
	QPSK	370500	1852.5	1 / 12	24.08
		376500	1882.5	1 / 1	24.33
		382500	1912.5	1 / 23	24.49
	16-QAM	370500	1852.5	1 / 12	22.80
		376500	1882.5	1 / 1	22.94
		382500	1912.5	1 / 23	22.51

FCC ID: A3LSMA156U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset
		Page 30 of 42

REV 4.3.M
11/29/2022

**Table 6-29
NR Band 41/38 Power Class 2 Conducted Powers**

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	11/2 BPSK	509202	2546.01	1 / 1	26.28
		518598	2592.99	1 / 1	26.21
		528000	2640.00	1 / 271	26.14
		509202	2546.01	1 / 1	26.54
		518598	2592.99	1 / 1	26.29
		528000	2640.00	1 / 271	26.26
	16-QAM	509202	2546.01	1 / 1	25.36
		518598	2592.99	1 / 1	25.25
		528000	2640.00	1 / 271	25.21
		509202	2546.01	1 / 1	25.41
		518598	2592.99	1 / 1	26.11
		528000	2640.00	1 / 271	26.11
90 MHz	11/2 BPSK	508200	2541.00	1 / 122	26.41
		518598	2592.99	1 / 1	26.11
		528996	2644.98	1 / 243	26.11
		508200	2541.00	1 / 122	26.54
		518598	2592.99	1 / 1	26.18
		528996	2644.98	1 / 243	26.19
	16-QAM	508200	2541.00	1 / 122	25.41
		518598	2592.99	1 / 1	25.22
		528996	2644.98	1 / 243	25.23
		508200	2541.00	1 / 122	26.31
		518598	2592.99	1 / 1	26.07
		529998	2649.99	1 / 215	26.16
80 MHz	11/2 BPSK	507204	2536.02	1 / 1	26.49
		518598	2592.99	1 / 1	26.19
		529998	2649.99	1 / 215	26.31
		507204	2536.02	1 / 1	25.36
		518598	2592.99	1 / 1	25.15
		529998	2649.99	1 / 215	25.22
	16-QAM	507204	2536.02	1 / 1	26.43
		518598	2592.99	1 / 1	25.87
		531000	2655.00	1 / 187	26.10
		506202	2531.01	1 / 94	26.80
		518598	2592.99	1 / 1	26.02
		531000	2655.00	1 / 187	26.17
70 MHz	11/2 BPSK	506202	2531.01	1 / 94	25.42
		518598	2592.99	1 / 1	24.99
		531000	2655.00	1 / 187	25.19
		506202	2531.01	1 / 94	26.43
		518598	2592.99	1 / 1	25.80
		531000	2655.00	1 / 187	26.23
	16-QAM	506202	2531.01	1 / 94	26.48
		518598	2592.99	1 / 1	25.84
		531000	2655.00	1 / 187	26.32
		505200	2526.00	1 / 81	25.54
		518598	2592.99	1 / 1	24.90
		531000	2655.00	1 / 187	25.34
60 MHz	11/2 BPSK	504204	2521.02	1 / 66	26.54
		518598	2592.99	1 / 1	25.75
		532998	2664.99	1 / 131	26.31
		504204	2521.02	1 / 66	26.76
		518598	2592.99	1 / 1	25.80
		532998	2664.99	1 / 131	26.43
	16-QAM	504204	2521.02	1 / 66	25.54
		518598	2592.99	1 / 1	24.84
		532998	2664.99	1 / 131	25.42
		503202	2516.01	1 / 53	26.60
		518598	2592.99	1 / 1	25.71
		534000	2670.00	1 / 104	26.21
50 MHz	11/2 BPSK	503202	2516.01	1 / 53	26.54
		518598	2592.99	1 / 1	25.72
		534000	2670.00	1 / 104	26.26
		503202	2516.01	1 / 53	25.63
		518598	2592.99	1 / 1	24.75
		534000	2670.00	1 / 104	25.26
	16-QAM	502200	2511.00	1 / 39	26.59
		518598	2592.99	1 / 39	25.69
		534996	2674.98	1 / 39	26.35
		502200	2511.00	1 / 39	26.69
		518598	2592.99	1 / 39	25.72
		534996	2674.98	1 / 39	26.45
40 MHz	11/2 BPSK	502200	2511.00	1 / 39	25.74
		518598	2592.99	1 / 39	24.61
		534996	2674.98	1 / 39	25.50
		501204	2506.02	1 / 25	26.72
		518598	2592.99	1 / 25	25.54
		535998	2679.99	1 / 25	26.48
	16-QAM	501204	2506.02	1 / 25	26.70
		518598	2592.99	1 / 25	25.83
		535998	2679.99	1 / 25	26.37
		501204	2506.02	1 / 25	25.66
		518598	2592.99	1 / 25	24.61
		535998	2679.99	1 / 25	25.42
30 MHz	11/2 BPSK	500700	2503.50	1 / 19	26.63
		518598	2592.99	1 / 19	25.67
		536496	2682.48	1 / 19	26.26
		500700	2503.50	1 / 19	26.67
		518598	2592.99	1 / 19	25.71
		536496	2682.48	1 / 19	26.27
	16-QAM	500700	2503.50	1 / 19	25.67
		518598	2592.99	1 / 19	24.74
		536496	2682.48	1 / 19	25.37
		500202	2501.01	1 / 1	26.45
		518598	2592.99	1 / 12	25.55
		537000	2685.00	1 / 1	25.96
20 MHz	11/2 BPSK	500202	2501.01	1 / 1	26.68
		518598	2592.99	1 / 12	25.57
		537000	2685.00	1 / 1	26.05
		500202	2501.01	1 / 1	25.46
		518598	2592.99	1 / 12	24.60
		537000	2685.00	1 / 1	25.06
	16-QAM	500202	2501.01	1 / 1	25.06
		518598	2592.99	1 / 12	25.06
		537000	2685.00	1 / 1	25.06
		500202	2501.01	1 / 1	25.06
		518598	2592.99	1 / 12	25.06
		537000	2685.00	1 / 1	25.06


FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 31 of 42

REV 4.3.M
11/29/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-30
NR Band 77 (C-Band) Power Class 2 Conducted Powers (100MHz through 50MHz)


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	π/2 BPSK	650000	3750.00	1 / 271	26.63
		656000	3840.00	1 / 136	26.59
		662000	3930.00	1 / 271	26.67
	QPSK	650000	3750.00	1 / 271	26.60
		656000	3840.00	1 / 136	26.61
		662000	3930.00	1 / 271	26.68
16-QAM	662000	3930.00	1 / 271	25.80	
90 MHz	π/2 BPSK	649668	3745.02	1 / 243	26.61
		656000	3840.00	1 / 1	26.55
		662332	3934.98	1 / 122	26.78
	QPSK	649668	3745.02	1 / 243	26.63
		656000	3840.00	1 / 1	26.63
		662332	3934.98	1 / 122	26.76
16-QAM	662332	3934.98	1 / 122	25.82	
80 MHz	π/2 BPSK	649334	3740.01	1 / 215	26.61
		656000	3840.00	1 / 1	26.60
		662666	3939.99	1 / 215	26.72
	QPSK	649334	3740.01	1 / 215	26.64
		656000	3840.00	1 / 1	26.59
		662666	3939.99	1 / 215	26.74
16-QAM	662666	3939.99	1 / 215	25.87	
70 MHz	π/2 BPSK	649000	3735.00	1 / 187	26.51
		656000	3840.00	1 / 94	26.52
		663000	3945.00	1 / 94	26.75
	QPSK	649000	3735.00	1 / 187	26.50
		656000	3840.00	1 / 94	26.77
		663000	3945.00	1 / 94	26.80
16-QAM	649000	3735.00	1 / 187	25.66	
656000	3840.00	1 / 94	25.52		
663000	3945.00	1 / 94	25.77		
60 MHz	π/2 BPSK	648668	3730.02	1 / 160	26.42
		656000	3840.00	1 / 1	26.72
		663332	3949.98	1 / 81	26.64
	QPSK	648668	3730.02	1 / 160	26.41
		656000	3840.00	1 / 1	26.43
		663332	3949.98	1 / 81	26.66
16-QAM	663332	3949.98	1 / 81	25.76	
50 MHz	π/2 BPSK	648334	3725.01	1 / 131	26.30
		656000	3840.00	1 / 1	26.48
		663666	3954.99	1 / 66	26.89
	QPSK	648334	3725.01	1 / 131	26.29
		656000	3840.00	1 / 1	26.47
		663666	3954.99	1 / 66	26.72
16-QAM	663666	3954.99	1 / 66	26.00	

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 32 of 42

REV 4.3.M
11/29/2022

**Table 6-31
NR Band 77 (C-Band) Power Class 2 Conducted Powers (40MHz through 10MHz)**

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	648000	3720.00	1 / 104	26.20
		656000	3840.00	1 / 1	26.47
		664000	3960.00	1 / 53	26.80
	QPSK	648000	3720.00	1 / 104	26.19
		656000	3840.00	1 / 1	26.50
		664000	3960.00	1 / 53	26.72
16-QAM	664000	3960.00	1 / 53	25.93	
30 MHz	π/2 BPSK	647668	3715.02	1 / 76	25.96
		656000	3840.00	1 / 1	26.46
		664332	3964.98	1 / 39	26.91
	QPSK	647668	3715.02	1 / 76	26.02
		656000	3840.00	1 / 1	26.46
		664332	3964.98	1 / 39	26.82
16-QAM	664332	3964.98	1 / 39	25.92	
25 MHz	π/2 BPSK	647500	3712.50	1 / 63	26.02
		656000	3840.00	1 / 32	26.49
		664500	3967.50	1 / 63	26.65
	QPSK	647500	3712.50	1 / 63	26.00
		656000	3840.00	1 / 32	26.61
		664500	3967.50	1 / 63	26.72
16-QAM	664500	3967.50	1 / 63	25.78	
20 MHz	π/2 BPSK	647334	3710.01	1 / 25	25.97
		656000	3840.00	1 / 1	26.45
		664666	3969.99	1 / 49	26.77
	QPSK	647334	3710.01	1 / 25	26.23
		656000	3840.00	1 / 1	26.43
		664666	3969.99	1 / 49	26.75
16-QAM	664666	3969.99	1 / 49	25.92	
15 MHz	π/2 BPSK	647168	3707.52	1 / 36	25.75
		656000	3840.00	1 / 19	26.55
		664832	3972.48	1 / 19	26.68
	QPSK	647168	3707.52	1 / 36	25.72
		656000	3840.00	1 / 19	26.69
		664832	3972.48	1 / 19	26.71
16-QAM	664832	3972.48	1 / 19	25.90	
10 MHz	π/2 BPSK	647000	3705.00	1 / 22	25.63
		656000	3840.00	1 / 1	26.44
		664332	3975.00	1 / 22	26.69
	QPSK	647000	3705.00	1 / 22	25.69
		656000	3840.00	1 / 1	26.43
		664332	3975.00	1 / 22	26.72
16-QAM	664332	3975.00	1 / 22	25.81	

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 33 of 42

REV 4.3.M
11/29/2022

Table 6-32
2.4GHz 802.11b WLAN Conducted Powers

Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	20.50
2437	6	20.87
2462	11	20.62

Table 6-33
2.4GHz 802.11g WLAN Conducted Powers


Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	19.47
2437	6	19.84
2462	11	19.60

Table 6-34
2.4GHz 802.11n WLAN Conducted Powers

Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	19.92
2437	6	19.74
2462	11	19.58

Table 6-35
5GHz 20MHz BW 802.11a WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5180	36	19.52
	5200	40	19.73
	5220	44	19.59
	5240	48	19.90
UNII-2A	5260	52	19.73
	5280	56	19.88
	5300	60	19.91
UNII-2C	5320	64	19.65
	5500	100	19.86
	5600	120	19.73
	5620	124	19.91
UNII-3	5720	144	19.78
	5745	149	19.99
	5785	157	19.79
	5825	165	19.85

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 34 of 42

REV 4.3.M
11/29/2022

**Table 6-36
5GHz 20MHz BW 802.11n WLAN Conducted Powers**


Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5180	36	19.79
	5200	40	19.97
	5220	44	19.87
	5240	48	19.82
UNII-2A	5260	52	19.61
	5280	56	19.72
	5300	60	19.73
UNII-2C	5320	64	19.15
	5500	100	19.68
	5600	120	19.52
	5620	124	19.67
UNII-3	5720	144	19.98
	5745	149	19.91
	5785	157	19.67
	5825	165	19.67

**Table 6-37
5GHz 20MHz BW 802.11ac WLAN Conducted Powers**

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5180	36	17.74
	5200	40	17.88
	5220	44	17.92
	5240	48	17.72
UNII-2A	5260	52	17.54
	5280	56	17.68
	5300	60	17.72
UNII-2C	5320	64	17.75
	5500	100	17.51
	5600	120	17.81
	5620	124	17.98
UNII-3	5720	144	17.84
	5745	149	17.76
	5785	157	17.59
	5825	165	17.55

**Table 6-38
5GHz 40MHz BW 802.11n WLAN Conducted Powers**

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	17.62
	5230	46	17.73
UNII-2A	5270	54	17.71
	5310	62	16.31
UNII-2C	5510	102	17.97
	5590	118	17.85
	5630	126	17.83
UNII-3	5710	142	17.98
	5755	151	17.99
	5795	159	17.49

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 35 of 42


REV 4.3.M
11/29/2022

Table 6-39
5GHz 40MHz BW 802.11ac WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	17.51
	5230	46	17.69
UNII-2A	5270	54	17.69
	5310	62	16.14
UNII-2C	5510	102	17.54
	5590	118	17.44
	5630	126	17.73
UNII-3	5710	142	17.89
	5755	151	17.75
	5795	159	17.54

Table 6-40
5GHz 80MHz BW 802.11ac WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	13.99
UNII-2A	5290	58	13.94
UNII-2C	5530	106	13.87
	5610	122	13.91
	5690	138	13.76
UNII-3	5775	155	13.83

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 36 of 42

REV 4.3.M
11/29/2022

7. JUSTIFICATION OF HELD TO EAR MODES TESTED

I. Analysis of RF Air Interface Technologies

An analysis was performed, following the guidance of §4.7 of the ANSI standard, of the RF air interface technologies being evaluated. For this analysis, the stated peak power levels were verified to be within the requirements detailed in Table 3-2.


II. Individual Mode Evaluations

Table 7-1
Peak power levels of individual air interfaces evaluated for emission compliance

Air Interface	Peak Power [dBm]	Peak Power Level Margin [dB]	Emission Compliance
GSM - GSM850	33.50	1.50	PASS
GSM - GSM1900	30.50	1.50	PASS
GSM - EDGE850	27.50	7.50	PASS
GSM - EDGE1900	26.50	5.50	PASS
UMTS - RMC	25.50	9.50	PASS
UMTS - AMR	25.50	9.50	PASS
UMTS - HSPA	22.50	12.50	PASS
LTE FDD	25.50	9.50	PASS
LTE TDD - Band 41 (PC3)	25.00	6.00	PASS
LTE TDD - Band 41 (PC2)	26.50	4.50	PASS
LTE TDD - Band 48	24.00	7.00	PASS
LTE TDD - Uplink Carrier Aggregation	26.50	4.50	PASS
NR FDD	25.50	9.50	PASS
NR TDD - n41	27.00	4.00	PASS
NR TDD - n77 (DoD)	27.00	4.00	PASS
NR TDD - n48	24.00	7.00	PASS
NR TDD - n77	27.00	4.00	PASS
WIFI - 2.4GHz	21.00	10.00	PASS
WIFI - 5GHz	20.00	11.00	PASS

III. WD RF Peak power level conclusions

Per ANSI C63.19-2019, all applicable air interfaces demonstrate compliance to the peak power requirements shown in Table 3-2 of this report.

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 37 of 42

REV 4.3.M
11/29/2022


8. EQUIPMENT LIST

Table 8-1
Equipment List

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4438C	ESG Vector Signal Generator	1/18/2023	Annual	1/18/2024	MY47270002
Agilent	N5182A	MXG Vector Signal Generator	11/30/2022	Annual	11/30/2023	MY47420603
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2023	Annual	3/15/2024	US46470561
Amplifier Research	15S1G6	Amplifier	N/A	CBT*	N/A	433978
Anritsu	MA2411B	Pulse Power Sensor	1/10/2023	Annual	1/10/2024	1315051
Anritsu	MA24106A	USB Power Sensor	2/14/2023	Annual	2/14/2024	1827529
Anritsu	ML2496A	Power Meter	4/4/2023	Annual	4/4/2024	1840005
Control Company	4040	Digital Thermometer	3/27/2023	Biennial	3/27/2025	230208036
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	N/A	CBT*	N/A	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	N/A	CBT*	N/A	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	N/A	CBT*	N/A	1226
Pasternack	PE2237-20	Bidirectional Coupler	N/A	CBT*	N/A	N/A
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/9/2023	Annual	8/9/2024	162125
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester				167283
Rohde & Schwarz	CMW500	Radio Communication Tester	8/10/2023	Annual	8/10/2024	140144
Rohde & Schwarz	CMX500	Radio Communication Tester	N/A		N/A	100298
Seekonk	NC-100	Torque Wrench (8" lb)	N/A		N/A	21053

Calibration traceable to the National Institute of Standards and Technology (NIST).

***Note: CBT (Calibrated Before Testing).** Prior to testing, the measurement paths containing a cable, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 38 of 42

REV 4.3.M

11/29/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9. MEASUREMENT UNCERTAINTY

Table 9-1
Uncertainty Estimation Table

Wireless Communications Device Near-Field Measurement Uncertainty Estimation							
Uncertainty Component	Data (dB)	Data Type	Prob. Dist.	Divisor	Ci (E)	Unc. (dB)	Notes/Comments
Measurement System							
RF System Reflections	0.50	Tolerance	N	1.00	1	0.50	* Refl. < -20 dB
Field Probe Calibration	0.21	Tolerance	N	1.00	1	0.21	
Field Probe Isotropy	0.01	Tolerance	N	1.00	1	0.01	
Field Probe Frequency Response	0.135	Tolerance	N	1.00	1	0.14	
Field Probe Linearity	0.013	Tolerance	N	1.00	1	0.01	
Modulation Interference Factor	0.20	Tolerance	R	1.73	1	0.12	Applicable for M-rating testing
Boundary Effects	0.105	Accuracy	R	1.73	1	0.06	*
Probe Positioning Accuracy	0.20	Accuracy	R	1.73	1	0.12	*
Probe Positioner	0.050	Accuracy	R	1.73	1	0.03	*
Extrapolation/Interpolation	0.045	Tolerance	R	1.73	1	0.03	*
Resolution to 2mm error	0.21	Tolerance	N	1.00	1	0.21	
System Detection Limit	0.05	Tolerance	R	1.73	1	0.03	*
Readout Electronics	0.015	Tolerance	N	1.00	1	0.02	*
Integration Time	0.11	Tolerance	R	1.73	1	0.06	*
Response Time	0.033	Tolerance	R	1.73	1	0.02	*
Phantom Thickness	0.10	Tolerance	R	1.73	1	0.06	*
System Repeatability (Field x 2=power)	0.17	Tolerance	N	1.00	1	0.17	*
Test Sample Related							
Device Positioning Vertical	0.2	Tolerance	R	1.73	1	0.12	*
Device Positioning Lateral	0.045	Tolerance	R	1.73	1	0.03	*
Device Holder and Phantom	0.1	Tolerance	R	1.73	1	0.06	*
Power Drift	0.21	Tolerance	R	1.73	1	0.12	
<i>Combined Standard Uncertainty (k=1)</i>						0.66	16.3%
<i>Expanded Uncertainty [95% confidence]</i>						1.31	32.6%
<i>Expanded Uncertainty [95% confidence] on Field</i>						0.66	16.3%

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.
2. * Uncertainty specifications from Schmidt & Partner Engineering AG (not site specific)


Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid immunity tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: A3LSMA156U	element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2-A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 39 of 42

REV 4.3.M
11/29/2022

10. CONCLUSION


The measurements indicate that the referenced wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19-2019 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 40 of 42

REV 4.3.M
11/29/2022


11. REFERENCES

1. ANSI C63.19-2019, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.”, New York, NY, IEEE, August 2019
2. FCC Office of Engineering and Technology KDB, “285076 D01 HAC Guidance v06r02,” September 19, 2022
3. FCC Office of Engineering and Technology KDB, “285076 D02 T-Coil Testing for CMRS IP v04,” February 23, 2022
4. FCC Public Notice DA 06-1215, *Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard*, June 6, 2006
5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
6. Berger, H. S., “Compatibility Between Hearing Aids and Wireless Devices,” Electronic Industries Forum, Boston, MA, May, 1997
7. Berger, H. S., “Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions,” *Wireless Telephones and Hearing Aids: New Challenges for Audiology*, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
8. Berger, H. S., “Hearing Aid Compatibility with Wireless Communications Devices,” IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
9. Bronaugh, E. L., “Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells,” in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
11. Crawford, M. L., “Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells,” U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
12. Crawford, M. L., and Workman, J. L., “Using a TEM Cell for EMC Measurements of Electronic Equipment,” U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
13. Decker, W. F., Crawford, M. L., and Wilson, W. A., “Construction of a Large Transverse Electromagnetic Cell”, U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Feb. 1979.
14. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
15. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 41 of 42

REV 4.3.M
11/29/2022

16. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
17. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
18. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
19. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
20. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
21. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
25. Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: A3LSMA156U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Managing Director
Filename: 1M2309070100-18-R2.A3L	Test Dates: 10/23/2023 – 11/1/2023	DUT Type: Portable Handset	Page 42 of 42

REV 4.3.M
11/29/2022