



# TEST REPORT

<b>KCTL Inc.</b> 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel: 82-31-285-0894 Fax: 82-505-299-8311 <a href="http://www.kctl.co.kr">www.kctl.co.kr</a>	Report No.: KR21-SEF0042 Page (1) of (22)	
<p><b>1. Client</b></p> <ul style="list-style-type: none"> <li>◦ Name : Samsung Electronics Co., Ltd.</li> <li>◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea</li> <li>◦ Date of Receipt : 2021-03-31</li> </ul> <p><b>2. Use of Report</b> : -</p> <p><b>3. Name of Product / Model</b> : Mobile Phone / SM-A225M/DSN</p> <p><b>4. Manufacturer / Country of Origin</b> : Samsung Electronics Co., Ltd. / Vietnam</p> <p><b>5. Date of Test</b> : 2021-05-03</p> <p><b>6. Location of Test</b> : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing          (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)</p> <p><b>7. Test method used</b> : ANSI C63.4:2014, Class B          ICES-003 Issue 7(ANSI C63.4a:2017)</p> <p><b>8. FCC ID</b> : A3LSMA225M</p> <p><b>9. Test Results</b> : Refer to the test result in the test report</p>		
Affirmation	Tested by  Name : Dootae Lee (Signature)	Technical Manager  Name : Gunsu Park (Signature)
2021-05-04		
<h2>KCTL Inc.</h2>		
<p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.</p>		

**REPORT REVISION HISTORY**

Date	Revision	Page No
2021-05-04	Originally issued	-

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.*

**General remarks for test reports**

**Statement concerning the uncertainty of the measurement systems used for the tests**

(may be required by the product standard or client)

**Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

**Procedure number, issue date and title:**

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

**Statement not required by the standard or client used for type testing**

(Note: When standard requires a statement concerning the uncertainty of the measurement systems used for tests, this should be reported above. The informative text in parenthesis should be delete in both cases after selecting the applicable option)

## Contents

<b>1. Applicant information .....</b>	<b>4</b>
<b>2. Laboratory information.....</b>	<b>5</b>
<b>3. Test system configuration.....</b>	<b>6</b>
3.1 Operation environment.....	6
3.2 Measurement Uncertainty .....	7
<b>4. Description of EUT .....</b>	<b>9</b>
4.1 General information.....	9
4.2 Product description.....	10
4.3 Auxiliary equipments .....	11
4.4 Test configuration .....	12
4.5 Operating conditions .....	13
<b>5. Summary of test results .....</b>	<b>14</b>
5.1 Summary of EMI emission test results .....	14
<b>6. Test results .....</b>	<b>15</b>
6.1 Conducted Emissions.....	15
6.2 Radiated Emission .....	18

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
Tel: 82-31-285-0894 Fax: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SEF0042  
Page (4) of (22)



## 1. Applicant information

**Applicant:** Samsung Electronics Co., Ltd.  
**Address:** 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,  
16677, Rep. of Korea

**Manufacturer:** Samsung Electronics Co., Ltd.  
**Address:** 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,  
16677, Rep. of Korea

**Factory:** SAMSUNG ELECTRONICS VIETNAM CO.,LTD.  
Yenphong 1 -I.P YenTrung Commune, Yenphong Dist.,  
Bac Ninh Province, Vietnam

## KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
Tel: 82-31-285-0894 Fax: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SEF0042  
Page (5) of (22)

# KCTL

## 2. Laboratory information

### Address

#### **KCTL Inc. (Suwon Lab.)**

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 31 285 0894

Facsimile Number: 82 505 299 8311

FCC Site Designation No: KR0040

VCCI Registration No.: R-20080, G-20078, C-20059, T-20056

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

### **SITE MAP**



### 3. Test system configuration

#### 3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber 10 m (RE)	23.9 °C / 24.0 °C	24.5 % R.H. / 24.1 % R.H.	-
Shielded room(CE)	24.0 °C	23.8 % R.H.	-

#### Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

### 3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted Emission measurement (Confidence level about 95 %, $k = 2$ )			
Shielded Room (CE#1)	9 kHz ~ 150 kHz:	3.50 dB	
	150 kHz ~ 30 MHz:	3.06 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz:	3.05 dB	
	150 kHz ~ 30 MHz:	3.06 dB	
Radiated Emission measurement (Confidence level about 95 %, $k = 2$ )			
10 m Chamber (4F)	30 MHz ~ 300 MHz	3 m:	5.36 dB
		10 m:	5.34 dB
	300 MHz ~ 1 000 MHz	3 m:	5.46 dB
		10 m:	5.44 dB
	1 GHz ~ 6 GHz	3 m:	6.24 dB
	6 GHz ~ 18 GHz	3 m:	6.60 dB
	18 GHz ~ 30 GHz	3 m:	6.72 dB
30 GHz ~ 40 GHz	3 m:	6.14 dB	
10 m Chamber (2F)	30 MHz ~ 300 MHz	3 m:	4.88 dB
		10 m:	4.86 dB
	300 MHz ~ 1 000 MHz	3 m:	4.94 dB
		10 m:	4.94 dB
1 GHz ~ 6 GHz	3 m:	6.28 dB	

### 3.3 Measurement Program

These test items were performed by software programs;

Test item	Measurement Program		Used
Conducted Emission	EP5/CE_Ver 5.4.0(TOYO)		☒
Radiated Emission	2F	EP5/RE_Ver 4.6.0(TOYO)	☒
	4F	EP5/RE_Ver 5.11.10(TOYO)	



## 4. Description of EUT

### 4.1 General information

Declared Hardware Version	REV1.0
Declared Software Version	A225M.001
IMEI No	351333210001228/01
Operating Band(s)	GSM 850/900/1800/1900 WCDMA FDD 1/2/4/5/8 LTE FDD 1/2/3/4/5/7/8/12/17/20/26/28/66 LTE TDD 38/40/41

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
Tel: 82-31-285-0894 Fax: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SEF0042  
Page (10) of (22)



## 4.2 Product description

Type of product	Mobile Phone
Model name (Basic)	SM-A225M/DSN
Model name (Variant)	SM-A225M/N
Difference	SIM tray difference
Serial no	-
Testing voltage	120 V, 60 Hz
Input/Output rating	Adapter (EP-TA200) Input: AC 100 V - 240 V, 50-60 Hz, 0.5 A Output: DC 9.0 V, 1.67 A or DC 5.0 V, 2.0 A Serial no: R37R2JT80F5DK3
Internal clock frequency	Above 108 MHz
RF Frequency	Bluetooth(BDR/EDR/BLE)_2 402 MHz ~ 2 480 MHz 2 412 MHz ~ 2 472 MHz (802.11b/g/n_HT20) UNII-1: 5 180 MHz ~ 5 240 MHz (802.11a/n/ac_HT20/VHT20) UNII-1: 5 190 MHz ~ 5 230 MHz (802.11n/ac_HT40/VHT40) UNII-1: 5 210 MHz (802.11ac_VHT80) UNII-2A: 5 260 MHz ~ 5 320 MHz (802.11a/n/ac_HT20/VHT20) UNII-2A: 5 270 MHz ~ 5 310 MHz (802.11n/ac_HT40/VHT40) UNII-2A: 5 290 MHz (802.11ac_VHT80) UNII-2C: 5 500 MHz ~ 5 720 MHz (802.11a/n/ac_HT20/VHT20) UNII-2C: 5 510 MHz ~ 5 710 MHz (802.11n/ac_HT40/VHT40) UNII-2C: 5 530 MHz ~ 5 690 MHz (802.11ac_VHT80) UNII-3: 5 745 MHz ~ 5 825 MHz (802.11a/n/ac_HT20/VHT20) UNII-3: 5 755 MHz ~ 5 795 MHz (802.11n/ac_HT40/VHT40) UNII-3: 5 775 MHz (802.11ac_VHT80) LTE Band 2_1 850.7 MHz ~ 1 909.3 MHz LTE Band 4_1 710.7 MHz ~ 1 754.3 MHz LTE Band 5_824.7 MHz ~ 848.3 MHz LTE Band 12_699.7 MHz ~ 715.3 MHz LTE Band 17_706.5 MHz ~ 713.5 MHz LTE Band 26_824.7 MHz ~ 848.3 MHz, 814.7 MHz ~ 823.3 MHz LTE Band 41_2 498.5 MHz ~ 2 687.5 MHz LTE Band 66_1 710.7 MHz ~ 1 779.3 MHz GSM 850_824.2 MHz ~ 848.8 MHz GSM 1900_1 850.2 MHz ~ 1 909.8 MHz WCDMA 850_826.4 MHz ~ 846.6 MHz WCDMA 1700_1 712.4 MHz ~ 1 752.6 MHz WCDMA 1900_1 852.4 MHz ~ 1 907.6 MHz NFC_13.56 MHz
Note	-

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
Tel: 82-31-285-0894 Fax: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SEF0042  
Page (11) of (22)



### 4.3 Auxiliary equipments

Type	Model / Part #	S/N	Manufacturer
Adapter (EUT)	EP-TA200	R37R2JT80F5DK3	SAMSUNG
Earphone	-	-	SAMSUNG
USIM Card	-	-	-
Micro SD Card (64 GB)	-	-	-
Radio Communication Tester	CMU200	108667	R&S
Spiral ANT	PSA-75301R/170	406827-0001	COBHAM

#### 4.4 Test configuration

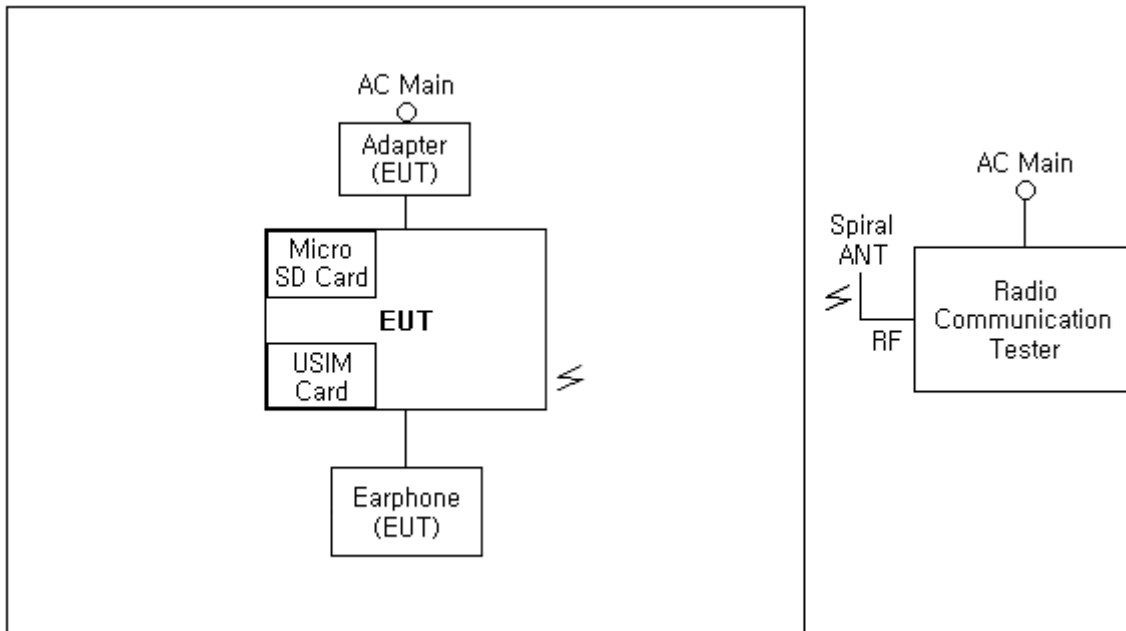

	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	<b>EUT</b>	Power	Adapter (EUT)	-	0.8	Shield
2		USIM	USIM Card	-	Direct	-
3		Micro SD	Micro SD Card	-	Direct	-
4		Earphone	Earphone (EUT)	-	1.7	Unshield
5	Adapter (EUT)	Power	AC Main	-	Direct	-
6	Radio Communication Tester	RF	Spiral ANT	-	3.0	Shield

## 4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating
Test #1	Charging(w/TA) + Cellular receiver (GSM 850_Low)

Note 1. All cellular RX bands operating below 1 GHz, including GSM, WCDMA and LTE have been investigated with low/middle/high channels. Among the bands, GSM 850 is the worst mode.

Note 2. It means this device needs to be tested with 3 orientations (x, y and z) and at least the worst case orientation shall be set for final test.

It was determined that Z orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Z orientation.

## 5. Summary of test results

### 5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
☒	Conducted Emission	ANSI C63.4:2014, Class B FCC Part 15 Subpart B ICES-003 Issue 7 (ANSI C63.4a:2017)	Pass
☒	Radiated Emission	ANSI C63.4:2014, Class B FCC Part 15 Subpart B ICES-003 Issue 7 (ANSI C63.4a:2017)	Pass

These results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations.

## 6. Test results

### 6.1 Conducted Emissions

Testing voltage	120 V, 60 Hz		
Test facility	Shielded room (CE#2)		
Date	2021-05-03		
Temperature (°C)	24.0 °C	Humidity (% R.H.)	23.8 % R.H.
Remarks	Pass		

#### 6.1.1 Limits of conducted emissions measurement

Frequency [MHz]	Class A (dB( $\mu$ V))		Class B (dB( $\mu$ V))	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79	66	66 ~ 56 <sup>1)</sup>	56 ~ 46 <sup>1)</sup>
0.5 ~ 5	73	60	56	46
5 ~ 30	73	60	60	50

<sup>1)</sup> The limit decreases linearly with the logarithm of frequency

### 6.1.2 Measurement procedure

The measurements were performed in a shielded room. EUT was setup as shown in photograph and placed on a non-metallic table height of 0.8 m above the reference ground plane. The rear of table was located 0.4 m to the vertical conducted plane. EUT was power through the LISN, which was bonded to the ground plane. The LISN power was filtered. Each EUT power lead, except ground (safety) lead was individually connected through a LISN to input power source. EUT signal cables that hung closer than 0.4 m to the Horizontal metal ground 0.3 m ~ 0.4 m long. The power cord was bundles in the center. All peripheral equipment was powered from a sub LISN. The LISN and ISN were positioned 0.8 m from the EUT. Peak and Average detection were used in preliminary testing and Quasi-peak and Average detections were used at final measurement.

### 6.1.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
EMI TEST RECEIVER	ESCI	100710	R&S	2022.04.14	<input checked="" type="checkbox"/>
TWO-LINE V-NETWORK	ENV216	101584	R&S	2022.04.05	<input checked="" type="checkbox"/>
TWO-LINE V-NETWORK	NNLK8121	8121-472	SCHWARZBECK	2021.08.20	<input type="checkbox"/>



# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
Tel: 82-31-285-0894 Fax: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SEF0042  
Page (17) of (22)



## 6.1.4 Conducted emissions measurement result

### AC Main

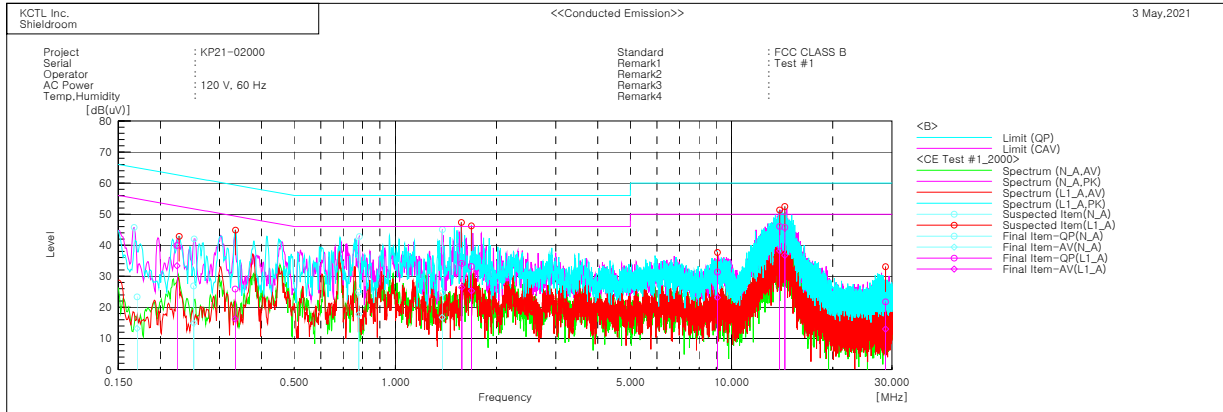

#### Final Result

--- N_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.17076	13.2	3.1	10.1	23.3	13.2	64.9	54.9	41.6	41.7
2	0.25119	17.2	5.2	9.7	26.9	14.9	61.7	51.7	34.8	36.8
3	0.77888	15.0	7.8	9.9	24.9	17.7	56.0	46.0	31.1	28.3
4	1.3794	14.8	7.0	9.8	24.6	16.8	56.0	46.0	31.4	29.2

--- L1_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.22423	30.1	23.6	9.8	39.9	33.4	62.7	52.7	22.8	19.3
2	0.33412	16.1	6.5	9.8	25.9	16.3	59.3	49.3	33.4	33.0
3	1.57674	24.4	16.6	9.8	34.2	26.4	56.0	46.0	21.8	19.6
4	1.68453	23.4	15.5	9.8	33.2	25.3	56.0	46.0	22.8	20.7
5	9.08091	21.3	13.1	10.1	31.4	23.2	60.0	50.0	28.6	26.8
6	13.90911	35.8	27.9	10.3	46.1	38.2	60.0	50.0	13.9	11.8
7	14.39076	35.4	26.5	10.3	45.7	36.8	60.0	50.0	14.3	13.2
8	28.72618	10.9	2.1	10.9	21.8	13.0	60.0	50.0	38.2	37.0

## 6.2 Radiated Emission

Testing voltage		120 V, 60 Hz		
Test facility		10 m Chamber (4F)		
Test distance		3 m		
Date		2021-05-03		
30 MHz ~ 1 GHz	Temperature (°C)	23.9 °C	Humidity (% R.H.)	24.5 % R.H.
1 GHz ~ 30 GHz		24.0 °C		24.1 % R.H.
Remarks		Pass		

### 6.2.1 Limits of radiated emission measurement

Frequency [MHz]	Class A at 10 m QP(dB(μV/m))		Class B at 3 m QP(dB(μV/m))	
	FCC <sup>1)</sup>	ISED (ICES Issue 7)	FCC <sup>1)</sup>	ISED (ICES Issue 7)
30-88	39.1	40.0	40.0	40.0
88-216	43.5	43.5	43.5	43.5
216-230	46.4	46.4	46.0	46.0
230-960	46.4	47.0	46.0	47.0
Above 960	49.5	49.5	54.0	54.0

- <sup>1)</sup>: Alternative standard: CISPR, Pub. 22

- Test data in this section has been taken against the FCC 15.109(a) or (B) Limit as it is the most stringent limit.

By complying with more restrictive FCC 15.109 Limit compliance with the ICES-003 Issue 7 limit also demonstrated.

### 6.2.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### 6.2.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
EMI TEST RECEIVER	ESR7	101078	R&S	2021.08.20	☒
Bilog Antenna	CBL 6112D	37876	TESEQ	2022.12.08	☒
AMPLIFIER	310N	293004	SONOMA	2021.08.20	☒
ATTENUATOR	8491B	MY39270292	AGILENT	-	☒
Antenna Mast	MA4640-XP-ET	-	Innco Systems	-	☒
Turn Table	TT 3.0-3t	-	MATURO	-	☒
DOUBLE RIDGED HORN ANTENNA	3117	00155787	ETS-LINDGREN	2021.10.28	☒
Broadband Preampfier	BBV9718	9718-233	SCHWARZBECK	2021.08.20	☒
AMPLIFIER	JS44-18004000-33-8P	2000996	L-3Narda-MITEQ	2022.01.21	☒
UXA Signal Analyzer	N9040B	US55230151	KEYSIGHT	2021.07.29	☒
Horn antenna	3116	00086635	ETS-LINDGREN	2021.05.12	☒

### 6.2.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 6 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G = Amplifier Gain

6 dB Att = 6 dB Attenuator

If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 6 dB, A.G 35 dB

The result is  $30 + 12 + 5 + 6 - 35 = 18 \text{ dB } (\mu\text{V/m})$

Bilog Antenna and ATTENUATOR (6 dB) were calibrated together.

AV = CAV : Abbreviation of CISPR Average

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
Tel: 82-31-285-0894 Fax: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SEF0042  
Page (20) of (22)



## 6.2.5 Radiated emission measurement result

30 MHz ~ 1 GHz

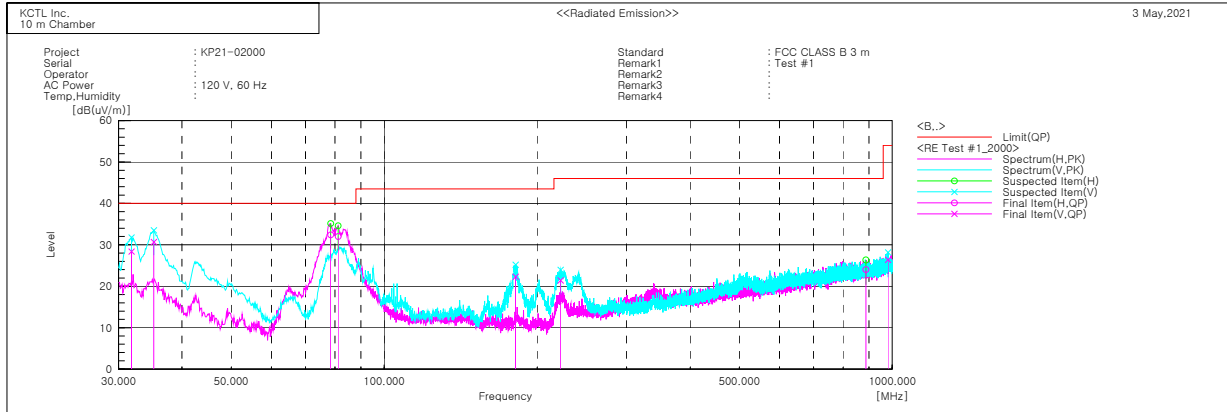

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
1	31.819	V	34.0	-5.6	28.4	40.0	11.6	107.0	241.0
2	35.214	V	38.0	-7.3	30.7	40.0	9.3	102.0	221.0
3	78.500	H	47.7	-15.3	32.4	40.0	7.6	395.0	331.0
4	81.168	H	46.9	-14.9	32.0	40.0	8.0	380.0	142.0
5	181.441	V	33.1	-10.8	22.3	43.5	21.2	107.0	212.0
6	222.545	V	30.2	-8.8	21.4	46.0	24.6	241.0	26.0
7	887.480	H	14.2	9.8	24.0	46.0	22.0	393.0	235.0
8	981.206	V	14.4	12.0	26.4	54.0	27.6	102.0	344.0


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
Tel: 82-31-285-0894 Fax: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SEF0042  
Page (21) of (22)



## 1 GHz ~ 18 GHz

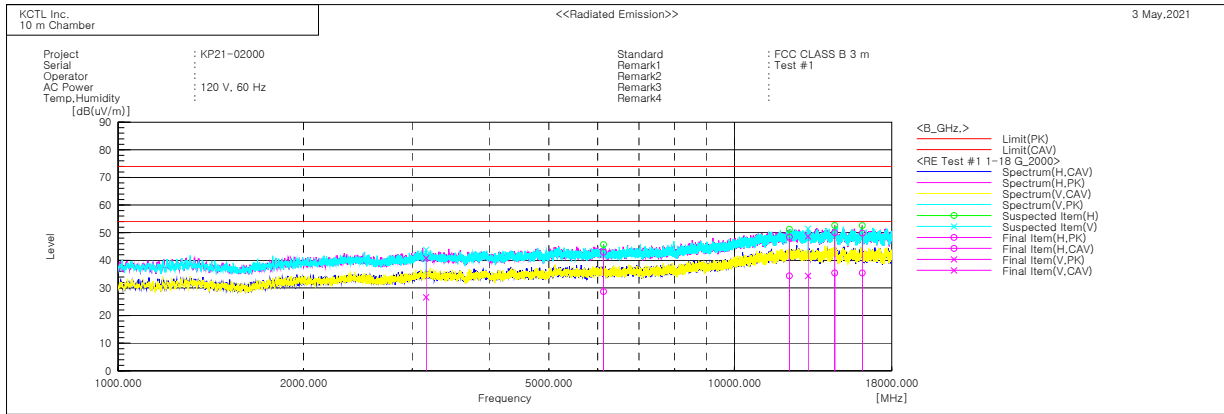

### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	3161.002	V	41.1	26.9	-0.3	40.8	26.6	74.0	54.0	33.2	27.4	127.0	295.0
2	6133.340	H	37.0	22.8	5.9	42.9	28.7	74.0	54.0	31.1	25.3	392.0	79.0
3	12274.470	H	35.5	21.5	12.9	48.4	34.4	74.0	54.0	25.6	19.6	221.0	134.0
4	13161.340	V	35.9	21.6	12.8	48.7	34.4	74.0	54.0	25.3	19.6	108.0	71.0
5	14543.140	H	37.0	22.4	13.0	50.0	35.4	74.0	54.0	24.0	18.6	135.0	72.0
6	16126.130	H	37.6	23.1	12.3	49.9	35.4	74.0	54.0	24.1	18.6	105.0	282.0


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
Tel: 82-31-285-0894 Fax: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SEF0042  
Page (22) of (22)



## 18 GHz ~ 30 GHz

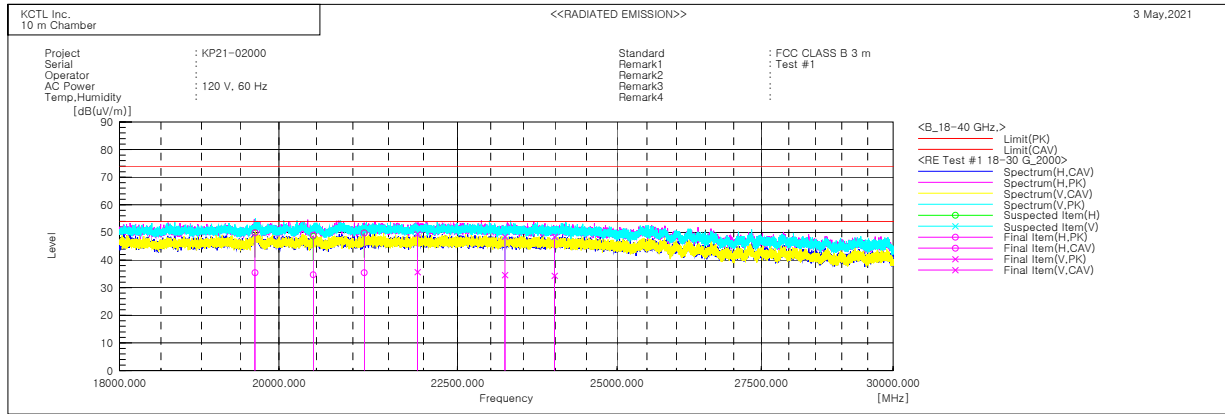

### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	19683.920	H	46.9	32.4	3.0	49.9	35.4	74.0	54.0	24.1	18.6	124.0	112.0
2	20455.990	H	47.3	33.0	1.7	49.0	34.7	74.0	54.0	25.0	19.3	382.0	322.0
3	21155.510	H	47.8	33.4	2.0	49.8	35.4	74.0	54.0	24.2	18.6	142.0	281.0
4	21915.990	V	46.9	33.0	2.6	49.5	35.6	74.0	54.0	24.5	18.4	175.0	352.0
5	23216.940	V	45.6	31.8	2.8	48.4	34.6	74.0	54.0	25.6	19.4	271.0	180.0
6	23990.320	V	45.7	31.5	2.8	48.5	34.3	74.0	54.0	25.5	19.7	122.0	224.0