



DESIGN SPECIFICATION
Part Number: MF20117

DESIGN SPECIFICATION

DESIGN	INTERNAL ANTENNA
MODEL / TYPE	SM-A245M/DSN / MAIN2 INTENNA
KYOCERA AVX P/N	MF20117
SEC CODE	GH42-06968A
CUSTOMER	SAMSUNG ELECTRONICS CO., LTD.
SUPPLIER	KYOCERA AVX INC.


This document is issued by Kyocera AVX Inc. (hereinafter called Kyocera AVX) in confidence, and is not to be reproduced in whole or in part without the prior written permission of Kyocera AVX. The information contained herein is the property of Kyocera AVX and is to be used only for the purpose for which it is BT/Main1mitted and is not to be released in whole or in part without the prior written permission of Kyocera AVX.



DESIGN SPECIFICATION

Part Number: MF20117

1. SM-A245M/DSN Phone MAIN2 ANTENNA

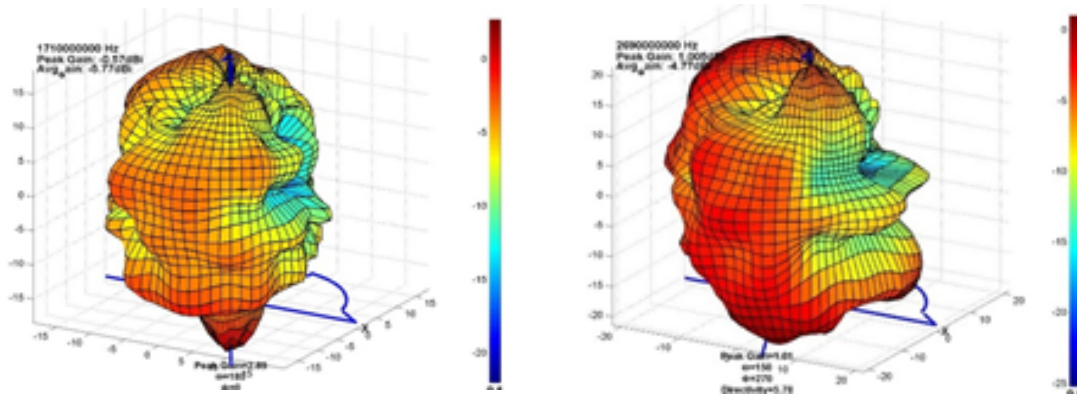

<Phone mounted typical measurements>

Frequency	Efficiency	Average Gain			Max Gain		
		Ver	Hor	Total	Ver	Hor	Total
1,710,000,000 Hz	26.5 %	-8.2 dBi	-9.4 dBi	-5.8 dBi	-0.3 dBi	-0.3 dBi	-0.6 dBi
1,732,500,000 Hz	22.1 %	-9.1 dBi	-10.1 dBi	-6.6 dBi	-1.1 dBi	-1.1 dBi	-1.8 dBi
1,745,000,000 Hz	24.4 %	-8.7 dBi	-9.6 dBi	-6.1 dBi	-0.5 dBi	-0.5 dBi	-1.4 dBi
1,755,000,000 Hz	25.0 %	-8.6 dBi	-9.5 dBi	-6.0 dBi	-0.2 dBi	-0.2 dBi	-1.1 dBi
1,780,000,000 Hz	29.4 %	-8.0 dBi	-8.7 dBi	-5.3 dBi	0.6 dBi	0.6 dBi	-0.2 dBi
1,850,000,000 Hz	39.0 %	-6.8 dBi	-7.4 dBi	-4.1 dBi	2.1 dBi	2.1 dBi	0.3 dBi
1,880,000,000 Hz	70.6 %	-4.2 dBi	-4.9 dBi	-1.5 dBi	4.9 dBi	4.9 dBi	3.5 dBi
1,910,000,000 Hz	52.5 %	-5.1 dBi	-6.7 dBi	-2.8 dBi	2.8 dBi	2.8 dBi	1.7 dBi
1,930,000,000 Hz	30.2 %	-7.8 dBi	-8.7 dBi	-5.2 dBi	1.0 dBi	1.0 dBi	0.5 dBi
1,960,000,000 Hz	32.5 %	-7.6 dBi	-8.3 dBi	-4.9 dBi	1.3 dBi	1.3 dBi	1.0 dBi
1,990,000,000 Hz	28.2 %	-8.0 dBi	-9.1 dBi	-5.5 dBi	-0.4 dBi	-0.4 dBi	-0.1 dBi



DESIGN SPECIFICATION

Part Number: MF20117

2,110,000,000 Hz	17.8 %	-10.3 dBi	-10.7 dBi	-7.5 dBi	-1.5 dBi	-1.5 dBi	0.4 dBi
2,132,500,000 Hz	20.9 %	-9.7 dBi	-9.9 dBi	-6.8 dBi	-1.0 dBi	-1.0 dBi	0.7 dBi
2,155,000,000 Hz	17.1 %	-10.6 dBi	-10.8 dBi	-7.7 dBi	-1.9 dBi	-1.9 dBi	-0.2 dBi
2,200,000,000 Hz	17.2 %	-10.4 dBi	-10.9 dBi	-7.6 dBi	-2.0 dBi	-2.0 dBi	-0.1 dBi
2,300,000,000 Hz	27.3 %	-8.7 dBi	-8.6 dBi	-5.6 dBi	-0.6 dBi	-1.3 dBi	1.4 dBi
2,350,000,000 Hz	27.9 %	-8.8 dBi	-8.3 dBi	-5.5 dBi	-0.7 dBi	-1.8 dBi	1.5 dBi
2,400,000,000 Hz	37.2 %	-7.8 dBi	-6.9 dBi	-4.3 dBi	0.9 dBi	-1.0 dBi	2.7 dBi
2,496,000,000 Hz	32.8 %	-7.7 dBi	-8.0 dBi	-4.8 dBi	0.3 dBi	-0.9 dBi	1.2 dBi
2,593,000,000 Hz	31.4 %	-8.1 dBi	-8.0 dBi	-5.0 dBi	-0.3 dBi	-1.1 dBi	0.6 dBi
2,690,000,000 Hz	33.3 %	-7.9 dBi	-7.7 dBi	-4.8 dBi	0.5 dBi	-1.2 dBi	1.0 dBi

Main1 /2

2. TEST METHOD

2.1. Measurement information

Measurement: KYOCERA AVX Ant Lab

Address : 306, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea (16675)

Equipment: KSS Chamber, E5071B Network Analyzer


*KSS Chamber

The Test Systems is the ideal choice for developers of wireless devices and components as well as operators wanting to verify their suppliers' wireless devices. Over-The-Air (OTA) measurements reflect the true performance of the device and ensure that the tested product performs as intended once released to the market. The patented design creates a rich and isotropic multipath environment inside the chamber allowing for fast, easy and realistic performance measurements on SISO as well as MIMO devices like LTE and WLAN. The RTS is capable of performing passive measurements like antenna efficiency, diversity and MIMO gain as well as active measurements like TRP, TIS and Throughput (TPUT).

* Test Equipment list

Description	Manufacturer	Model	S/N	Cal Date
Network Analyzer	Agilent	E5071B	MY42403625	2022-05-12

Test dates : 2022.12.08 ~ 2022.12.12

Names of test personnel : Ikhyun Cho, Signature: 

2.2. Return Loss & VSWR Test

The VSWR measurement of antennas assembled into a fully operating SM-A245F Phone is measured on the Network Analyzer. The Phone is set up with a 50 Ohm coaxial cable connected to the 50 Ohm point. Calibration is done at the end of the 50 Ohm coaxial cable connection. The other end of the 50 Ohm coaxial cable is connected to a network analyzer. The phone is positioned on a non-conductive table for free space measurements.



Figure 1: Testing with network analyzer

2.3. Return Loss & VSWR Test

Antenna Lab has a system that can measure VSWR using KSS chamber and E5071B network analyzer. In order to measure the VSWR of each antenna, the lab connects the coaxial cable to the point in contact with the antenna on the Sub board. The VSWR is measured through the coaxial cable connected in the set. At this time, SM-A245F is assembled in the same state as the user environment.

2.4. Radiation Pattern Test

Antennas tested for Gain and Efficiency must be assembled into the enclosure and tested in the fully assembled and operating SM-A245F Phone. The antenna is tested in free space in the anechoic chamber in the H, E1 and, E2 planes. The radiation patterns are measured at the center of transmit and receive bands.

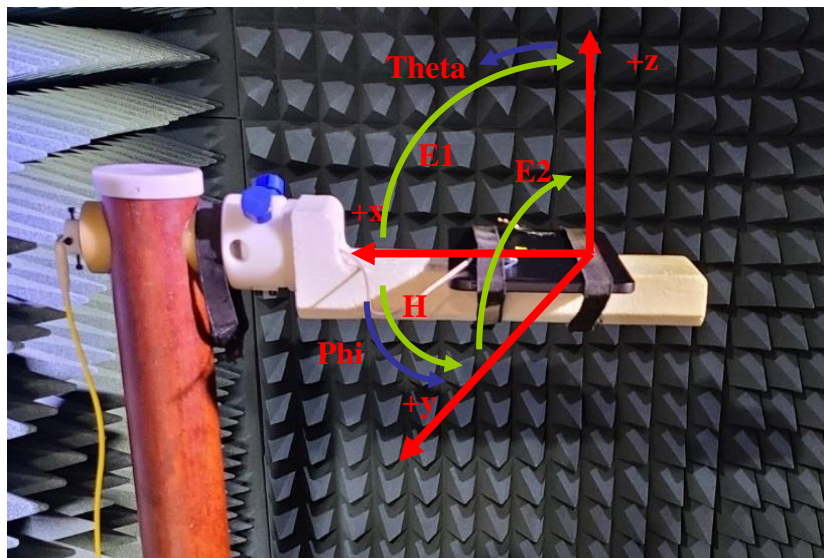


Figure 4: Geometry for SM-A245F for Radiation patterns.

2.5. Test Method (Manufacturing)

All measurements are done with SM-A245F fully assembled. Measure in consideration of the customer's usage environment. Use a fully shielded chamber environment to prevent any noise-induced errors. Typically, the electrical properties of the antenna are measured using a jig that can hold the set.