



**FCC 47 CFR PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**For**

**GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n, ANT+ & NFC**

**MODEL NUMBER: SM-A300FU**

**FCC ID: A3LSMA300FU**

**REPORT NUMBER: 14I19248-E2**

**ISSUE DATE: 10/30/14**

*Prepared for*

**SAMSUNG ELECTRONICS CO., LTD.  
416, MAETAN 3-DONG, YEONGTONG-GU  
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

*Prepared by*

**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
-	10/30/14	Initial issue	P. Zhang

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	6
4.2. SAMPLE CALCULATION .....	6
4.3. MEASUREMENT UNCERTAINTY.....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. DESCRIPTION OF EUT .....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	9
5.5. DESCRIPTION OF TEST SETUP.....	10
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>12</b>
<b>7. SUMMARY TABLE .....</b>	<b>13</b>
<b>8. ANTENNA PORT TEST RESULTS .....</b>	<b>14</b>
8.1. 20 dB AND 99% BANDWIDTH .....	14
8.1.1. BASIC DATA RATE GFSK MODULATION .....	14
8.1.2. ENHANCED DATA RATE 8PSK MODULATION .....	14
8.2. HOPPING FREQUENCY SEPARATION .....	27
8.3. NUMBER OF HOPPING CHANNELS.....	29
8.4. AVERAGE TIME OF OCCUPANCY.....	34
8.5. OUTPUT POWER.....	42
8.5.1. BASIC DATA RATE GFSK MODULATION .....	42
8.5.2. ENHANCED DATA RATE 8PSK MODULATION .....	43
8.6. AVERAGE POWER.....	50
8.6.1. BASIC DATA RATE GFSK MODULATION .....	50
8.6.2. ENHANCED DATA RATE 8PSK MODULATION .....	50
8.7. CONDUCTED SPURIOUS EMISSIONS.....	51
8.7.1. BASIC DATA RATE GFSK MODULATION .....	52
8.7.2. ENHANCED DATA RATE 8PSK MODULATION .....	60

**9. RADIATED TEST RESULTS.....68**  
    9.1. *LIMITS AND PROCEDURE.....68*  
    9.2. *TRANSMITTER ABOVE 1 GHz.....70*  
        9.2.1. BASIC DATA RATE GFSK MODULATION.....70  
        9.2.2. ENHANCED DATA RATE 8PSK MODULATION .....83  
    9.3. *WORST-CASE BELOW 1 GHz.....96*

**10. AC POWER LINE CONDUCTED EMISSIONS .....99**

**11. SETUP PHOTOS .....104**

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + Bluetooth, WLAN DTS b/g/n & ANT+ & NFC  
**MODEL:** SM-A300FU  
**SERIAL NUMBER:** 1950050 (Radiated), 1951552 (Conducted)  
**DATE TESTED:** September 2-10 & October 29, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:



PENG ZHANG  
CONSUMER TECHNOLOGY DIVISION  
PROJECT LEAD  
UL Verification Services Inc.

Tested By:



DANIEL SOPER  
CONSUMER TECHNOLOGY DIVISION  
LAB ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 26000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n, ANT+ & NFC.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	10.50	11.22
2402 - 2480	Enhanced 8PSK	10.91	12.33

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.85 dBi.

#### **5.4. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	ETA0U83EWE	N/A	N/A
Earphone	Samsung	EHS64AVFWE	N/A	N/A

### I/O CABLES


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BT communications.

**SETUP DIAGRAM FOR TESTS**

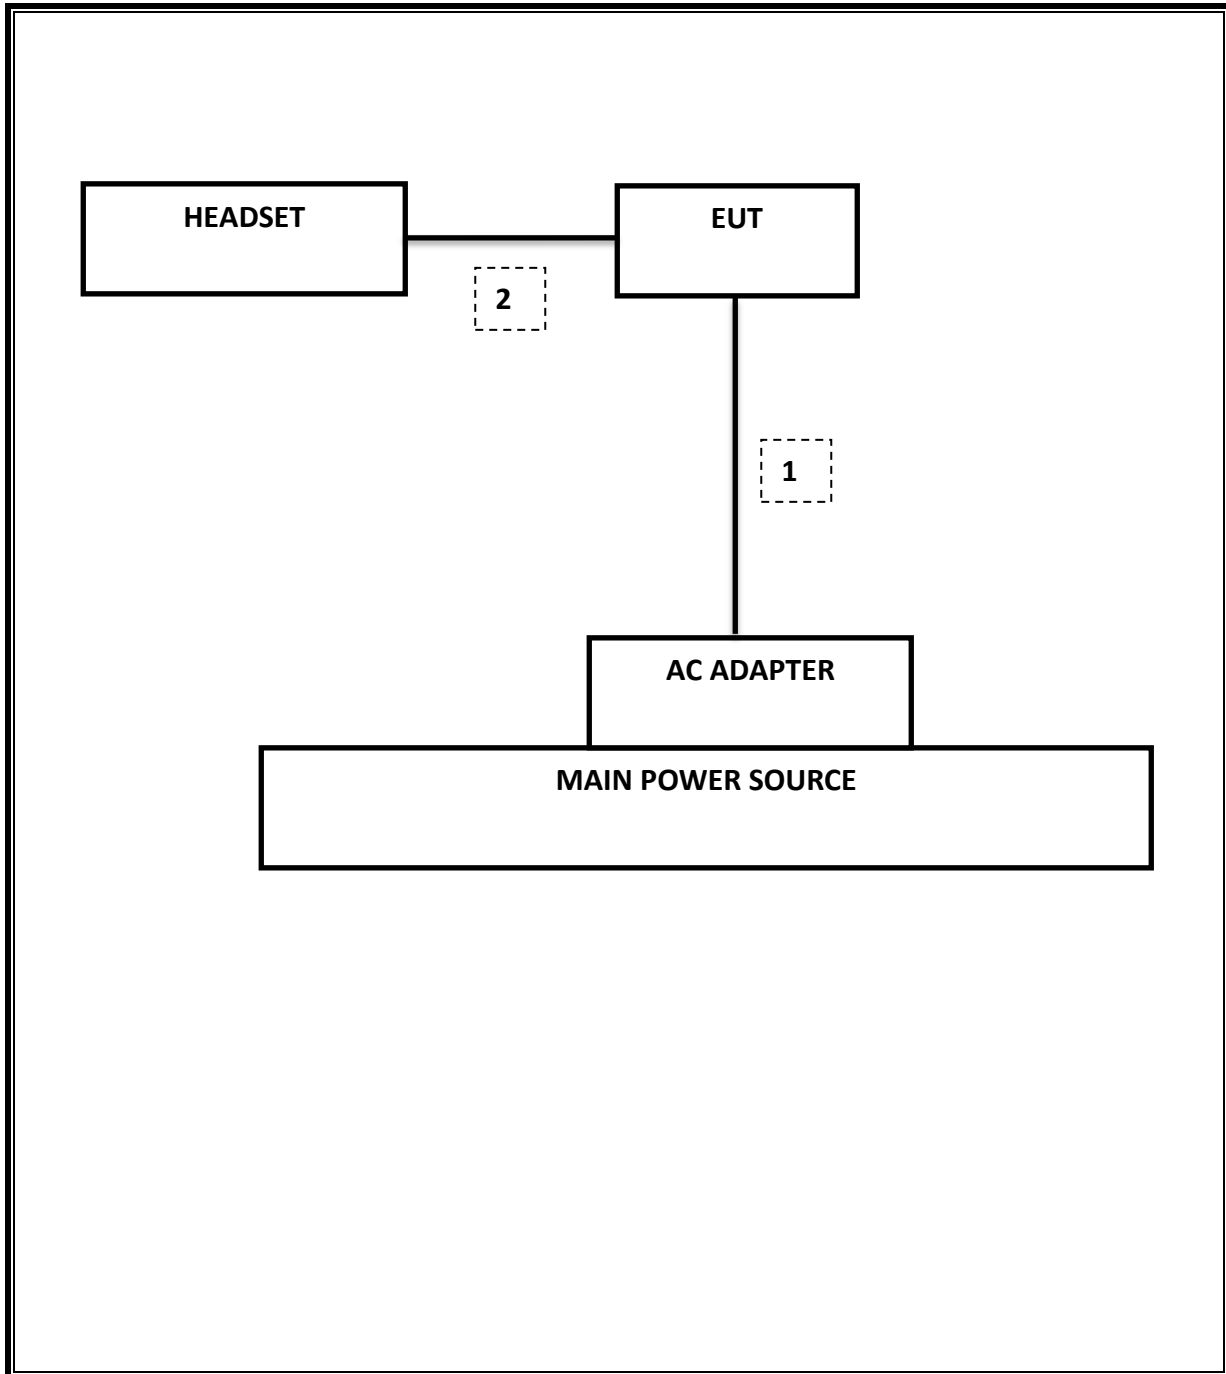

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	100987	04/21/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

## 7. SUMMARY TABLE

The FCC ID: A3LSMA300FU shares the same enclosure and circuit board as FCC ID: A3LSMA300F. The Bluetooth circuitry and layout, including antennas, are almost identical between the two units. The Bluetooth antennas and surrounding circuitry are the same between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMA300FU remains representative of FCC ID: A3LSMA300F, test data for FCC ID: A3LSMA300F is being submitted for this application to cover Bluetooth features.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.196 Mhz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-33.07 dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	10.91 dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.257 sec
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	54.59dBuV
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission			Pass	49.06dBuV/m

## 8. ANTENNA PORT TEST RESULTS

### 8.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

##### 8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.978	0.849
Middle	2441	0.971	0.923
High	2480	0.965	0.908
Worst		0.965	0.849


##### 8.1.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.305	1.196
Middle	2441	1.302	1.194
High	2480	1.307	1.136
Worst		1.307	1.196

**20 dB AND 99% BANDWIDTH PLOTS**

**GFSK 20 dB BANDWIDTH**

**LOW CHANNEL**

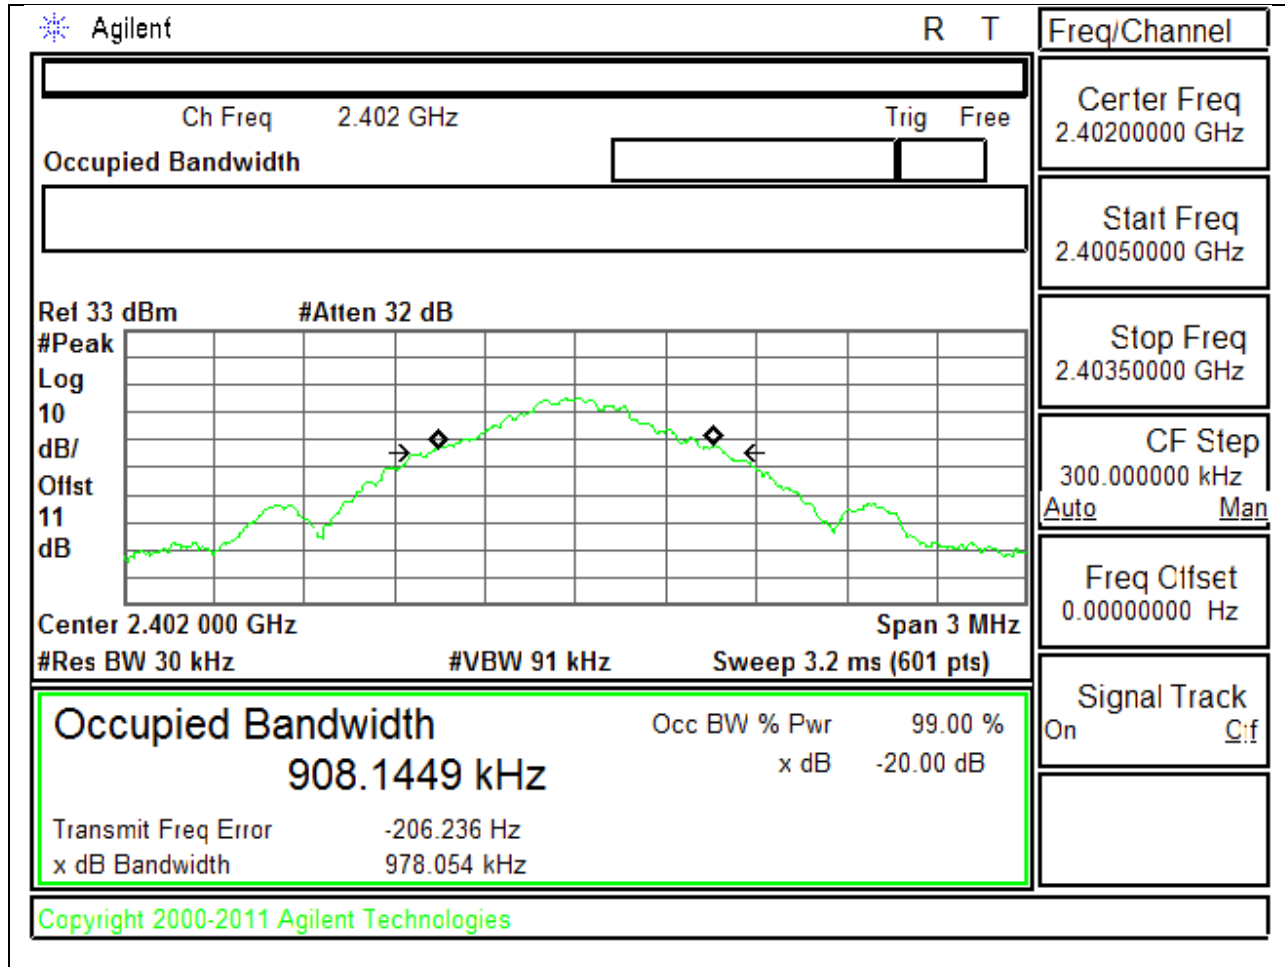

**MID CHANNEL**


Agilent		R T	Freq/Channel
Ch Freq 2.441 GHz		Trig Free	Center Freq 2.44100000 GHz
Occupied Bandwidth			Start Freq 2.43950000 GHz
Ref 33 dBm #Atten 32 dB			Stop Freq 2.44250000 GHz
#Peak Log 10 dB/Offst 11 dB		CF Step 300.000000 kHz Auto Man	
Center 2.441 000 GHz		Span 3 MHz	
#Res BW 30 kHz		#VBW 91 kHz Sweep 3.2 ms (601 pts)	
<b>Occupied Bandwidth</b>		Occ BW % Pwr 99.00 %	
<b>896.6014 kHz</b>		x dB -20.00 dB	
Transmit Freq Error -970.545 Hz			
x dB Bandwidth 970.800 kHz			
Signal Track On Clf			
Copyright 2000-2011 Agilent Technologies			

### HIGH CHANNEL


Agilent		R T	Freq/Channel
Ch Freq 2.48 GHz		Trig Free	Center Freq 2.48000000 GHz
Occupied Bandwidth			Start Freq 2.47850000 GHz
Ref 33 dBm #Atten 32 dB			Stop Freq 2.48150000 GHz
#Peak Log 10 dB/Offst 11 dB		CF Step 300.000000 kHz Auto Man	
Center 2.480 000 GHz		Span 3 MHz	
#Res BW 30 kHz		#VBW 91 kHz Sweep 3.2 ms (601 pts)	
<div style="border: 2px solid green; padding: 5px;"> <p><b>Occupied Bandwidth</b></p> <p style="font-size: 1.2em;">878.3134 kHz</p> <p>Transmit Freq Error -2.511 kHz</p> <p>x dB Bandwidth 964.547 kHz</p> </div>		<p>Occ BW % Pwr 99.00 %</p> <p>x dB -20.00 dB</p>	
		Signal Track On Clf	
Copyright 2000-2011 Agilent Technologies			

**GFSK 99% BANDWIDTH**


**LOW CHANNEL**

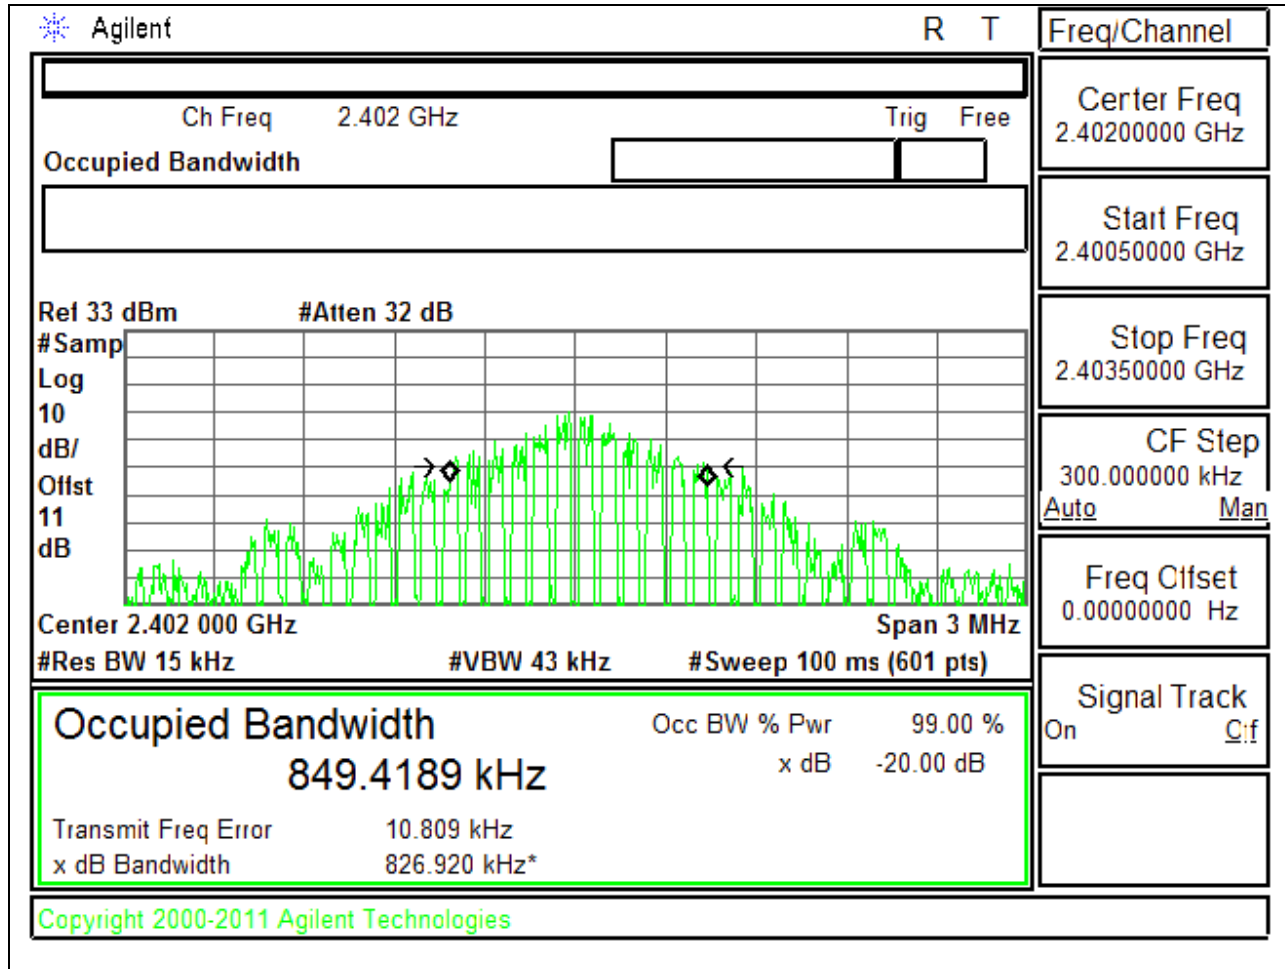

MID CHANNEL

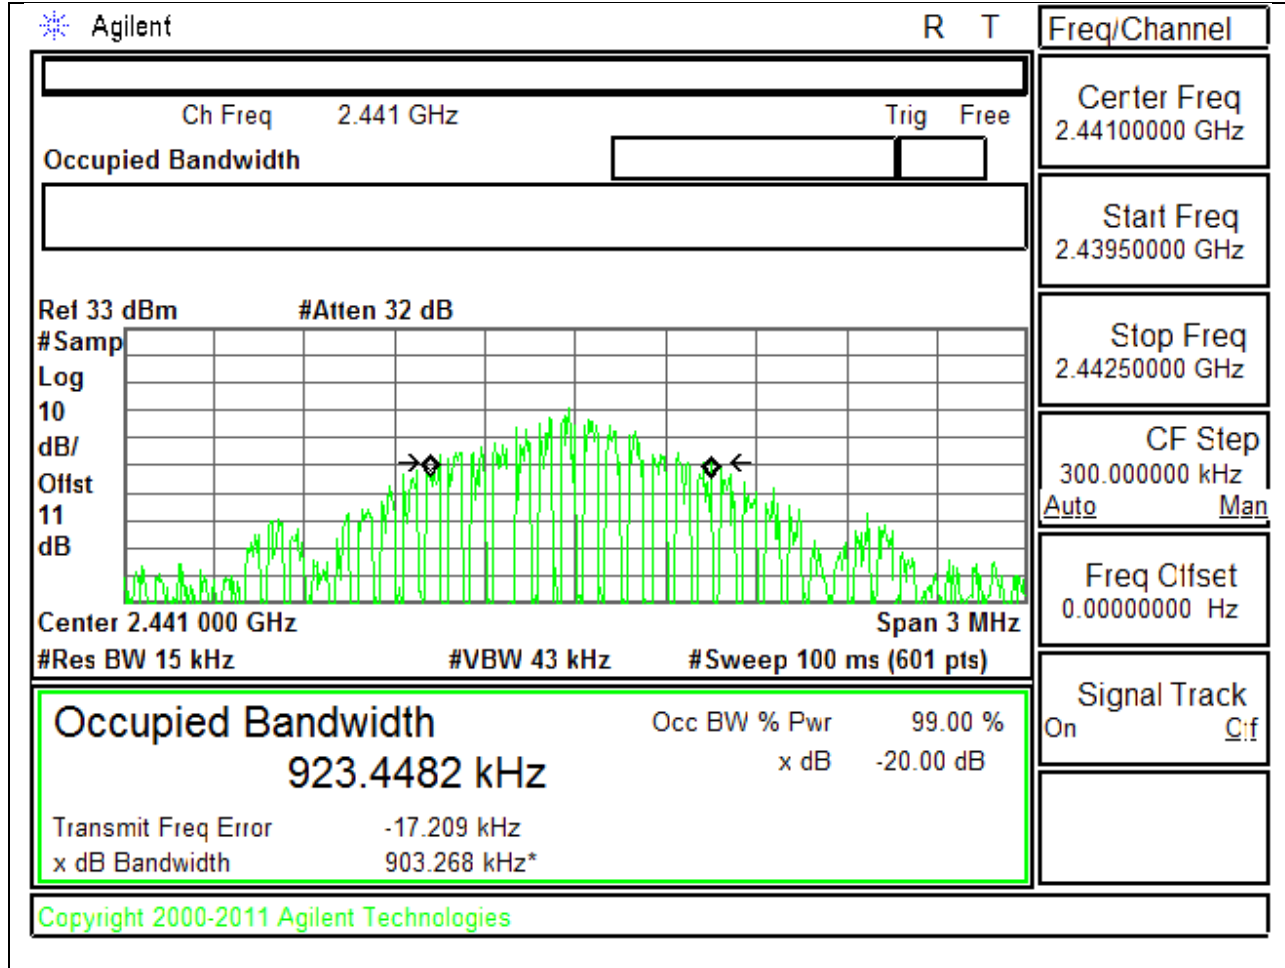


### HIGH CHANNEL

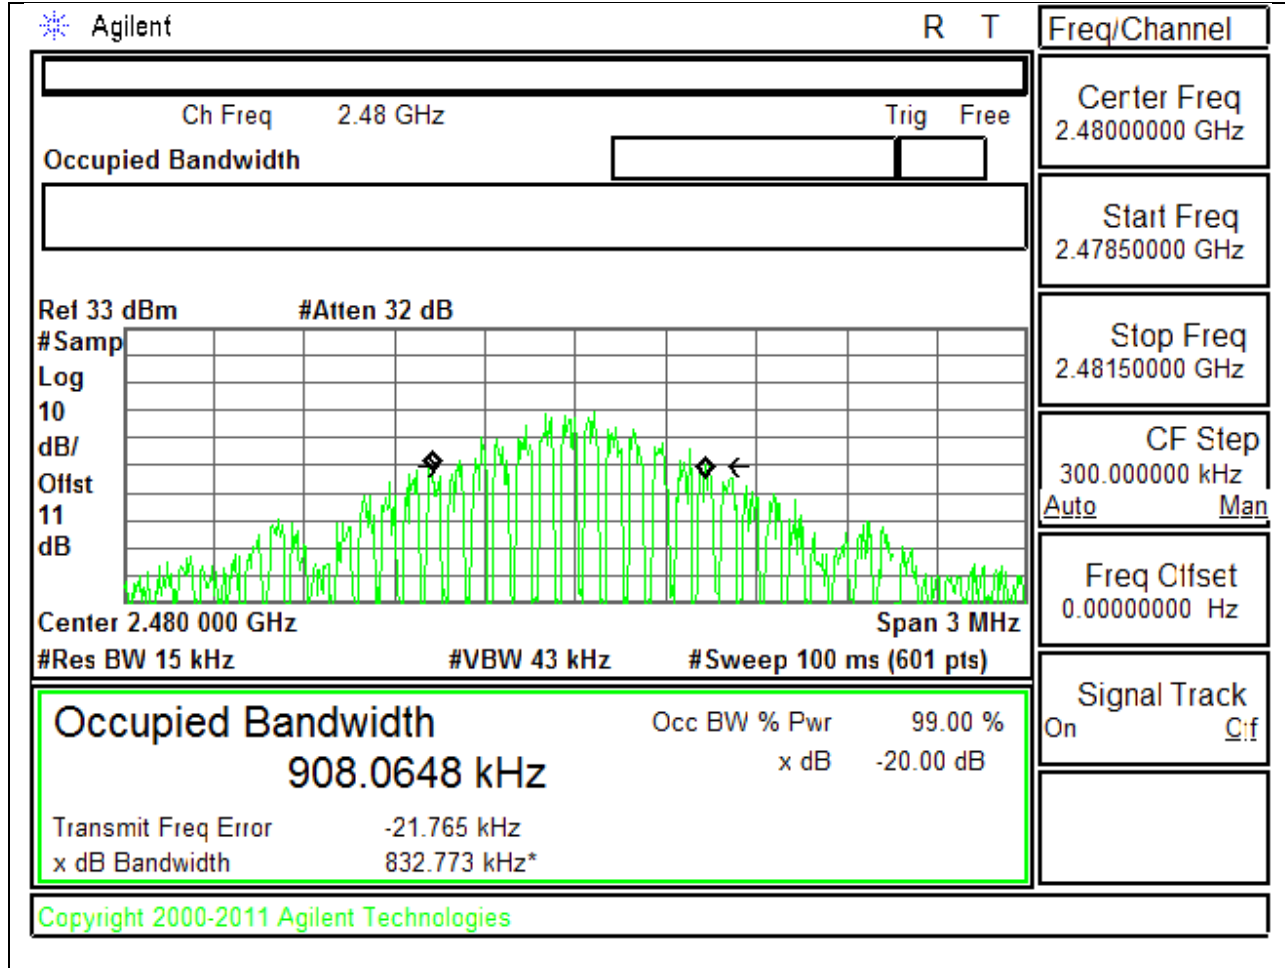

**8PSK 20 dB BANDWIDTH**

**LOW CHANNEL**

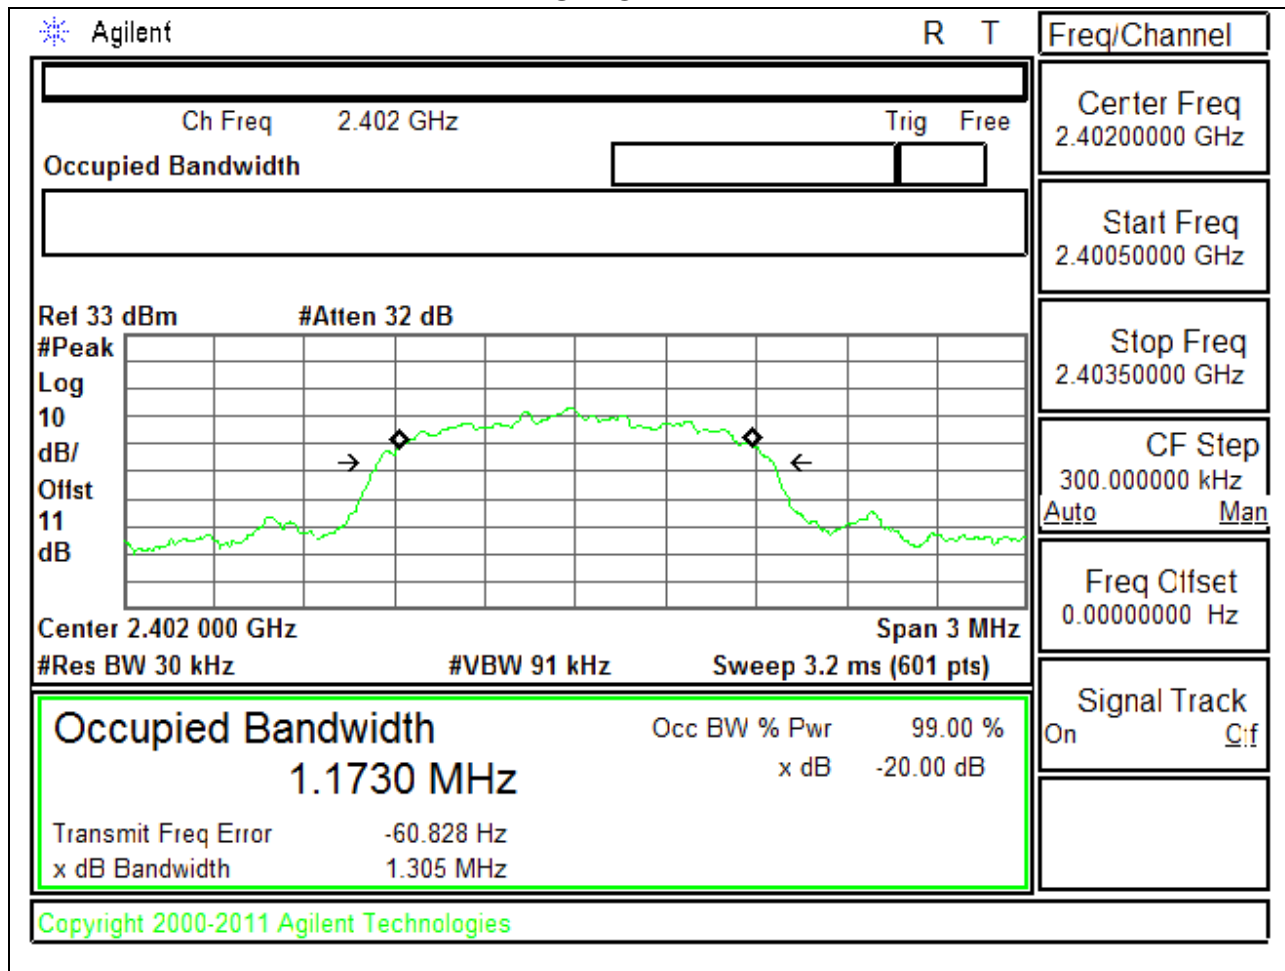

**MID CHANNEL**


Agilent		R T	Freq/Channel
Ch Freq 2.441 GHz		Trig Free	Center Freq 2.44100000 GHz
Occupied Bandwidth			Start Freq 2.43950000 GHz
Ref 33 dBm #Atten 32 dB			Stop Freq 2.44250000 GHz
#Peak Log 10 dB/ Offst 11 dB		CF Step 300.000000 kHz Auto Man	
Center 2.441 000 GHz		Span 3 MHz	
#Res BW 30 kHz		#VBW 91 kHz Sweep 3.2 ms (601 pts)	
<div style="border: 2px solid green; padding: 5px;"> <p><b>Occupied Bandwidth</b></p> <p style="font-size: 1.2em;">1.1749 MHz</p> <p>Transmit Freq Error -2.140 kHz</p> <p>x dB Bandwidth 1.302 MHz</p> </div>		<p>Occ BW % Pwr 99.00 %</p> <p>x dB -20.00 dB</p>	
		Signal Track On Clf	
Copyright 2000-2011 Agilent Technologies			

### HIGH CHANNEL

Agilent		R T	Freq/Channel
Ch Freq 2.48 GHz		Center Freq 2.4800000 GHz	
Occupied Bandwidth		Start Freq 2.4785000 GHz	
Ref 33 dBm #Atten 32 dB		Stop Freq 2.4815000 GHz	
		CF Step 300.000000 kHz Auto Man	
		Freq Offset 0.0000000 Hz	
Center 2.480 000 GHz Span 3 MHz		Signal Track On Clf	
#Res BW 30 kHz #VBW 91 kHz Sweep 3.2 ms (601 pts)			
<b>Occupied Bandwidth</b> 1.1833 MHz		Occ BW % Pwr 99.00 % x dB -20.00 dB	
Transmit Freq Error -2.085 kHz			
x dB Bandwidth 1.307 MHz			
Copyright 2000-2011 Agilent Technologies			

**8PSK 99% BANDWIDTH**

**LOW CHANNEL**

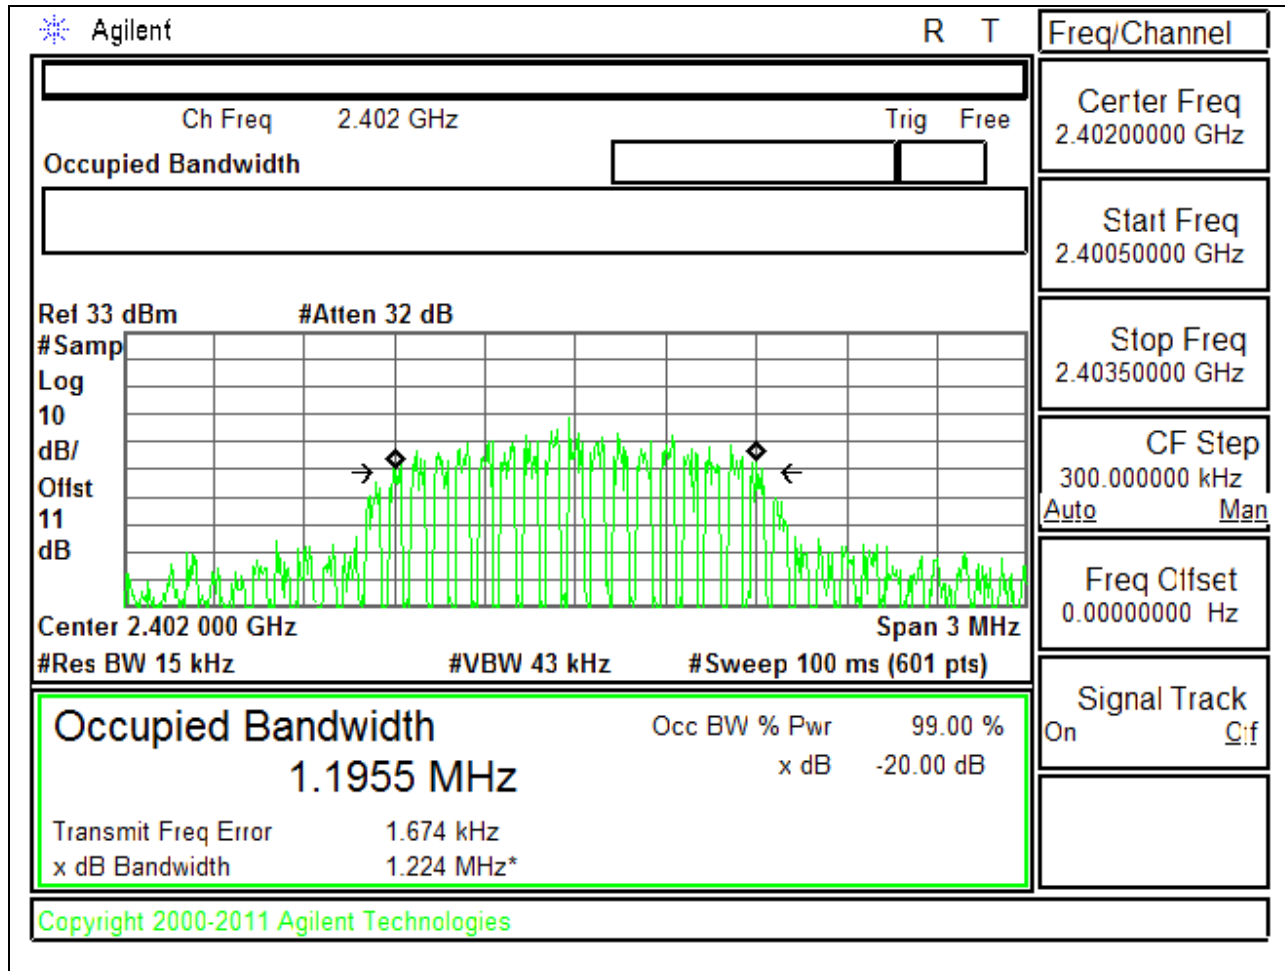

**MID CHANNEL**

Agilent		R T	Freq/Channel
Ch Freq 2.441 GHz		Trig Free	Center Freq 2.44100000 GHz
Occupied Bandwidth			Start Freq 2.43950000 GHz
Ref 33 dBm #Atten 32 dB			Stop Freq 2.44250000 GHz
# Samp			CF Step 300.000000 kHz Auto Man
Log			Freq Offset 0.00000000 Hz
10 dB/			Signal Track On Cif
Offst			
11 dB			
Center 2.441 000 GHz		Span 3 MHz	
#Res BW 15 kHz	#VBW 43 kHz	#Sweep 100 ms (601 pts)	
<b>Occupied Bandwidth</b> 1.1936 MHz		Occ BW % Pwr 99.00 % x dB -20.00 dB	
Transmit Freq Error -3.551 kHz			
x dB Bandwidth 1.280 MHz*			
Copyright 2000-2011 Agilent Technologies			

### HIGH CHANNEL

Agilent		R T	Freq/Channel
Ch Freq 2.48 GHz		Trig Free	Center Freq 2.4800000 GHz
Occupied Bandwidth			Start Freq 2.47850000 GHz
Ref 33 dBm #Atten 32 dB			Stop Freq 2.48150000 GHz
# Samp			CF Step 300.000000 kHz Auto Man
Log			Freq Offset 0.00000000 Hz
10 dB/			Signal Track On Cif
Offst			
11 dB			
Center 2.480 000 GHz Span 3 MHz			
#Res BW 15 kHz	#VBW 43 kHz	#Sweep 100 ms (601 pts)	
<b>Occupied Bandwidth</b> 1.1356 MHz		Occ BW % Pwr 99.00 % x dB -20.00 dB	
Transmit Freq Error -9.569 kHz			
x dB Bandwidth 1.132 MHz*			
Copyright 2000-2011 Agilent Technologies			

## **8.2. HOPPING FREQUENCY SEPARATION**

### **LIMIT**

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **TEST PROCEDURE**

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

### **RESULTS**

**HOPPING FREQUENCY SEPARATION PLOT**

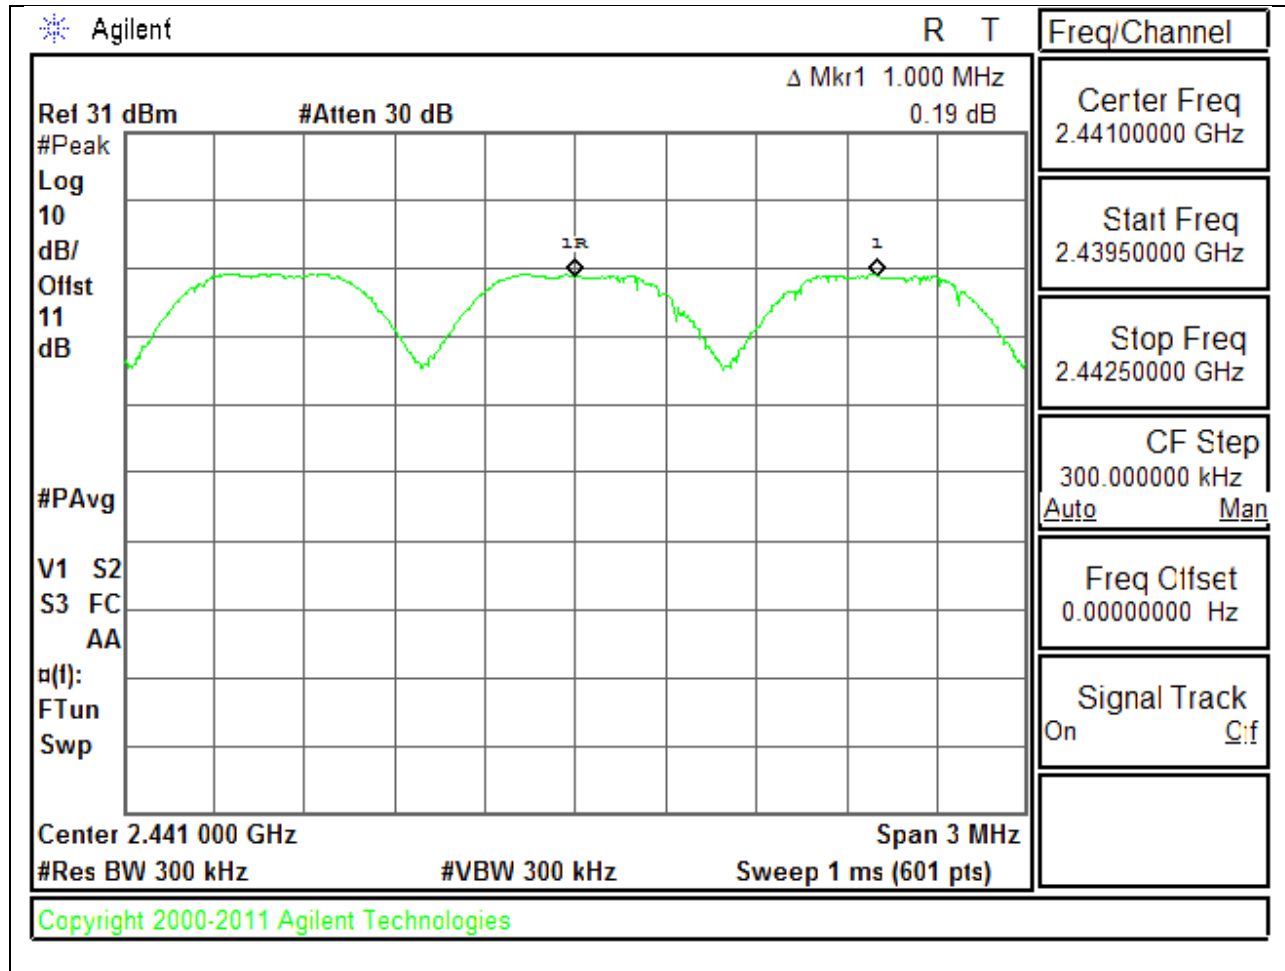

### **8.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

#### **TEST PROCEDURE**


DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### **RESULTS**


Normal Mode: 79 Channels observed.

**NUMBER OF HOPPING CHANNELS PLOTS**


**NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)**

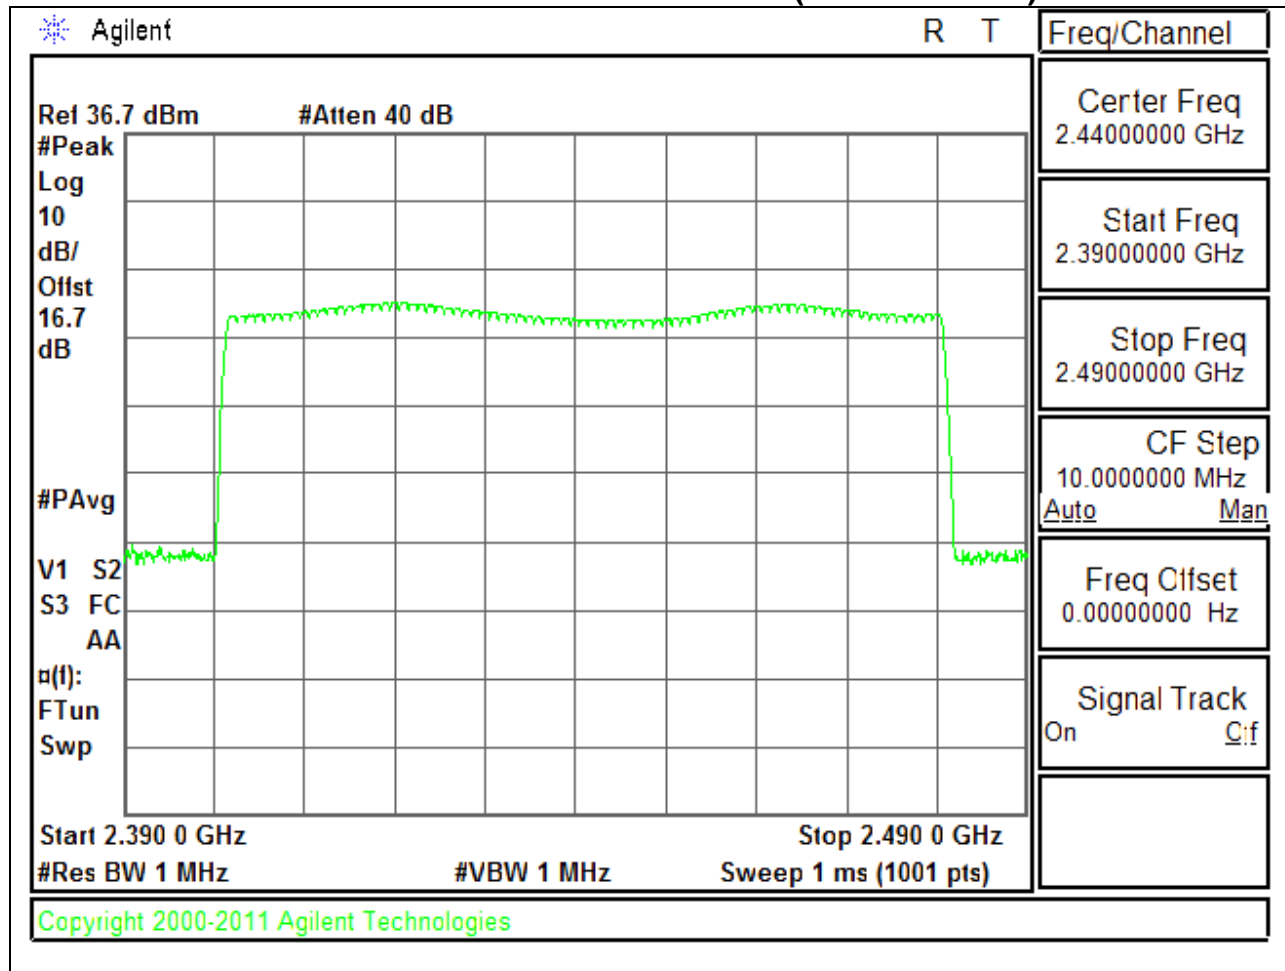


**NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)**

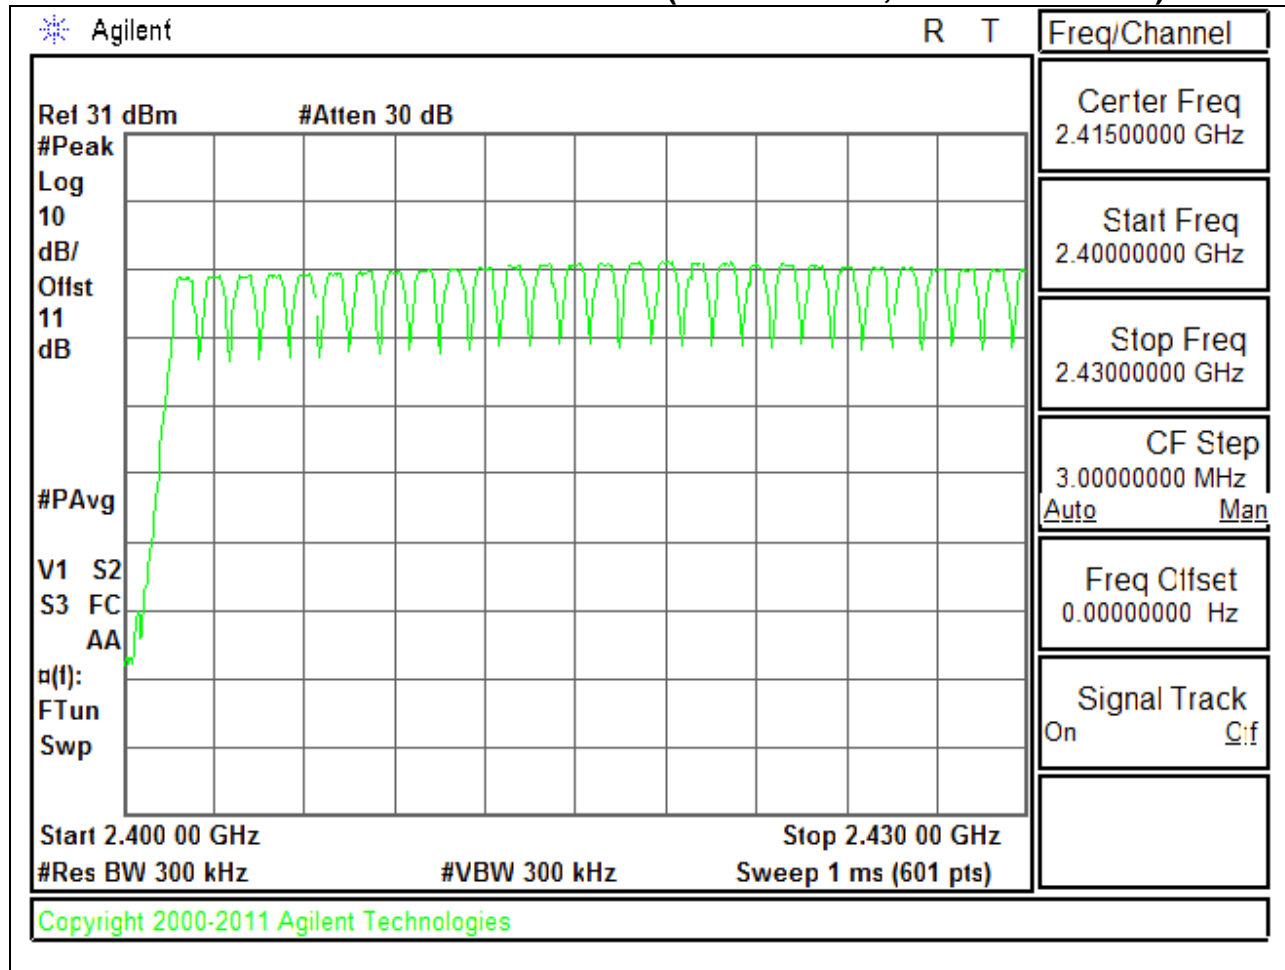

**NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)**

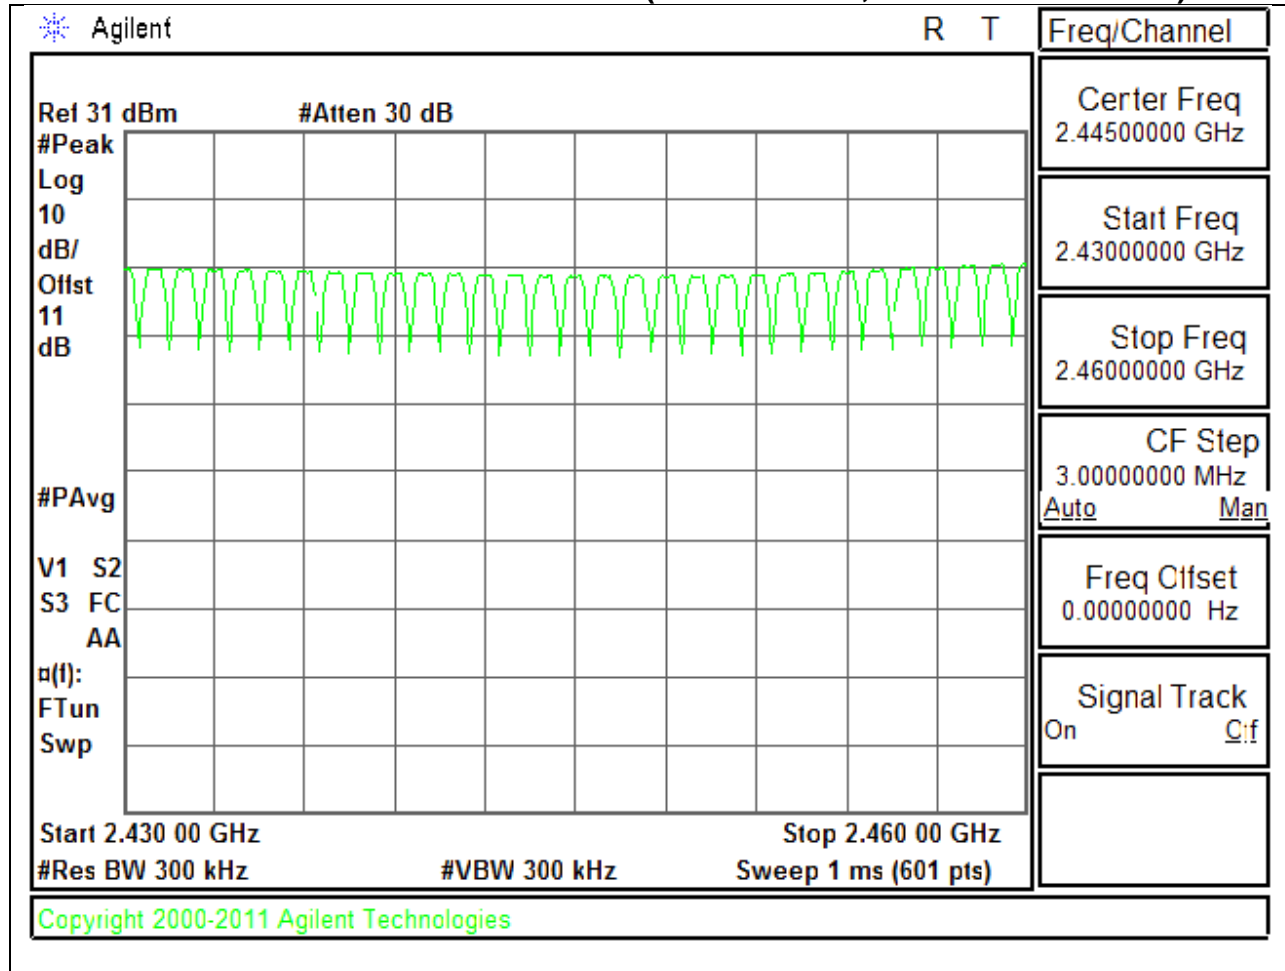

**NUMBER OF HOPPING CHANNELS (30 MZH SPAN, THIRD SEGMENT)**

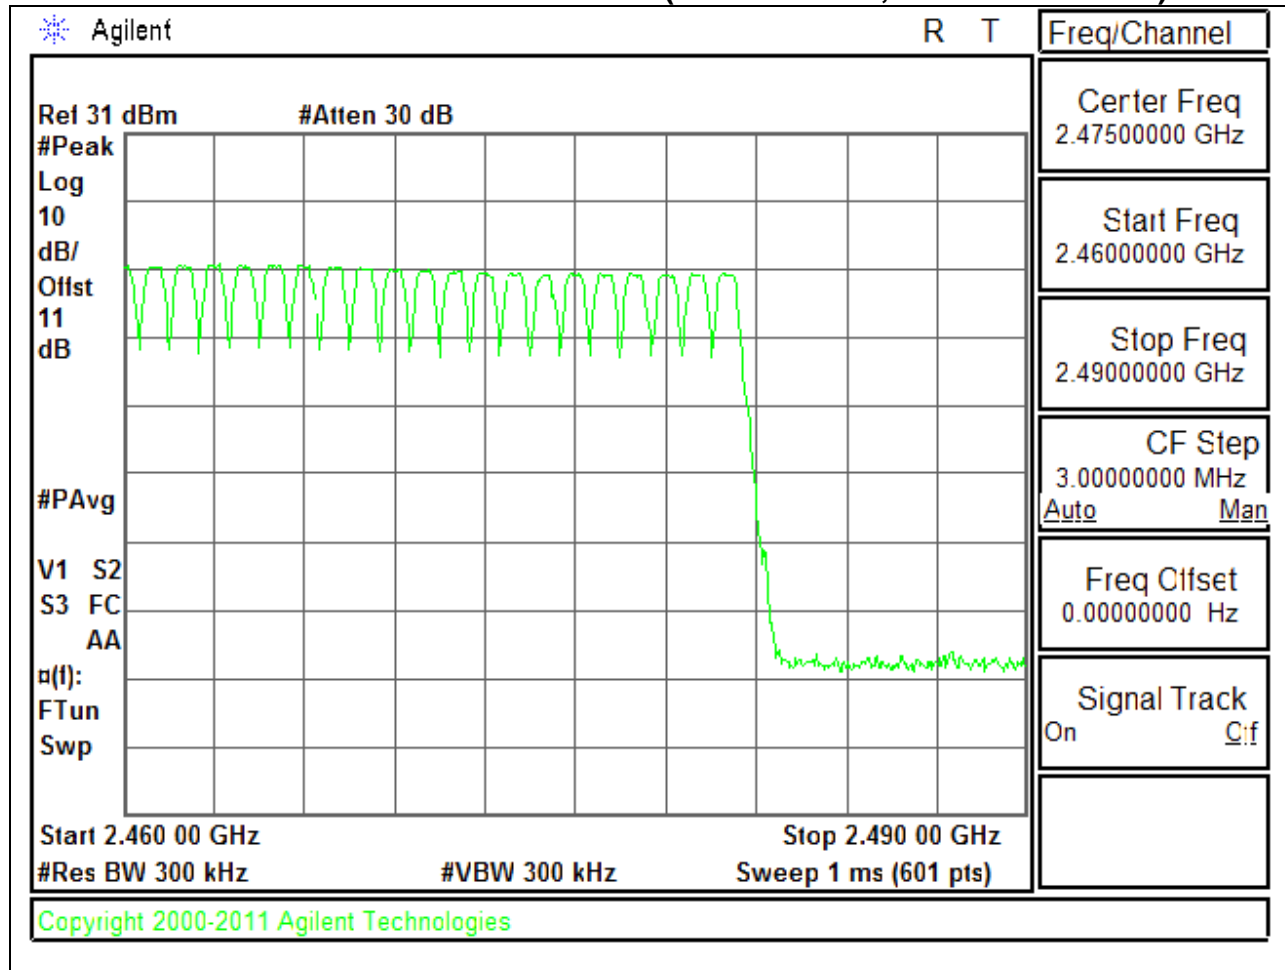

## **8.4. AVERAGE TIME OF OCCUPANCY**

### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .

**RESULTS**


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.35	31	0.1085	0.4	-0.2915
DH3	1.617	15	0.24255	0.4	-0.15745
DH5	2.858	9	0.25722	0.4	-0.14278
GFSK AFH Mode					
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.35	7.75	0.027125	0.4	-0.37288
DH3	1.617	3.75	0.0606375	0.4	-0.33936
DH5	2.858	2.25	0.064305	0.4	-0.3357




**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1**

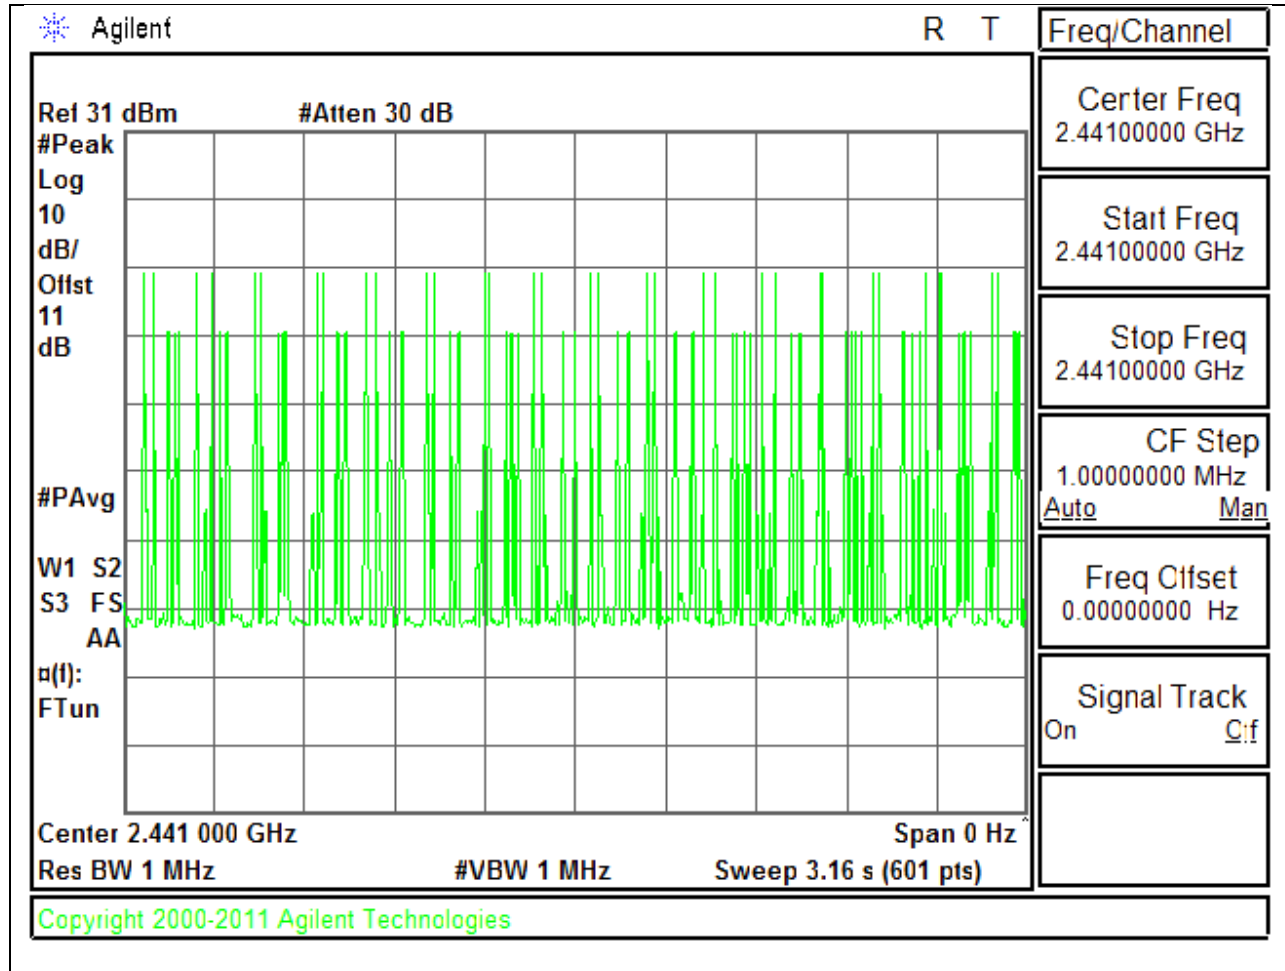


### PULSE WIDTH - DH3

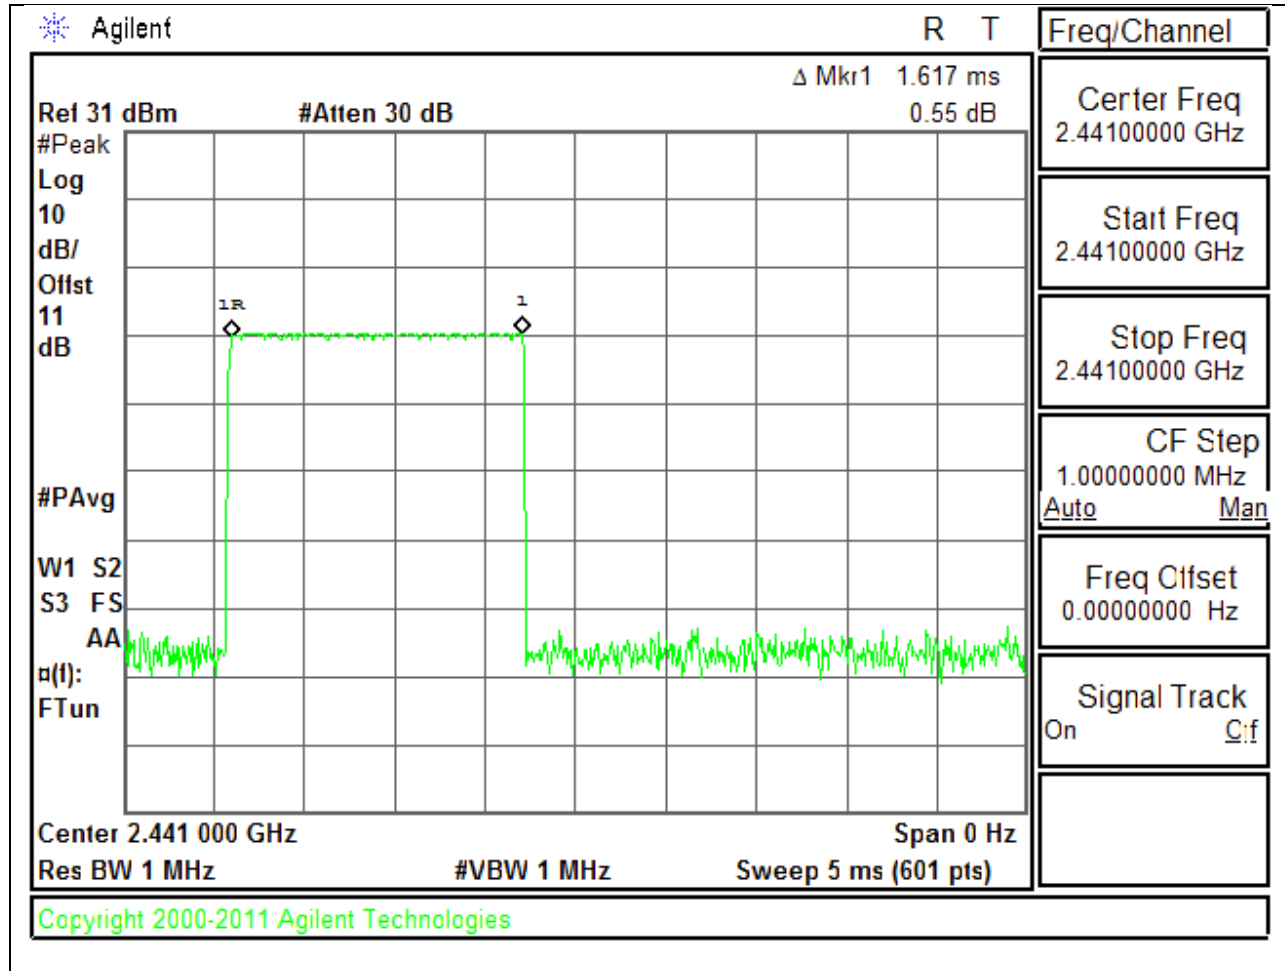


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH3**

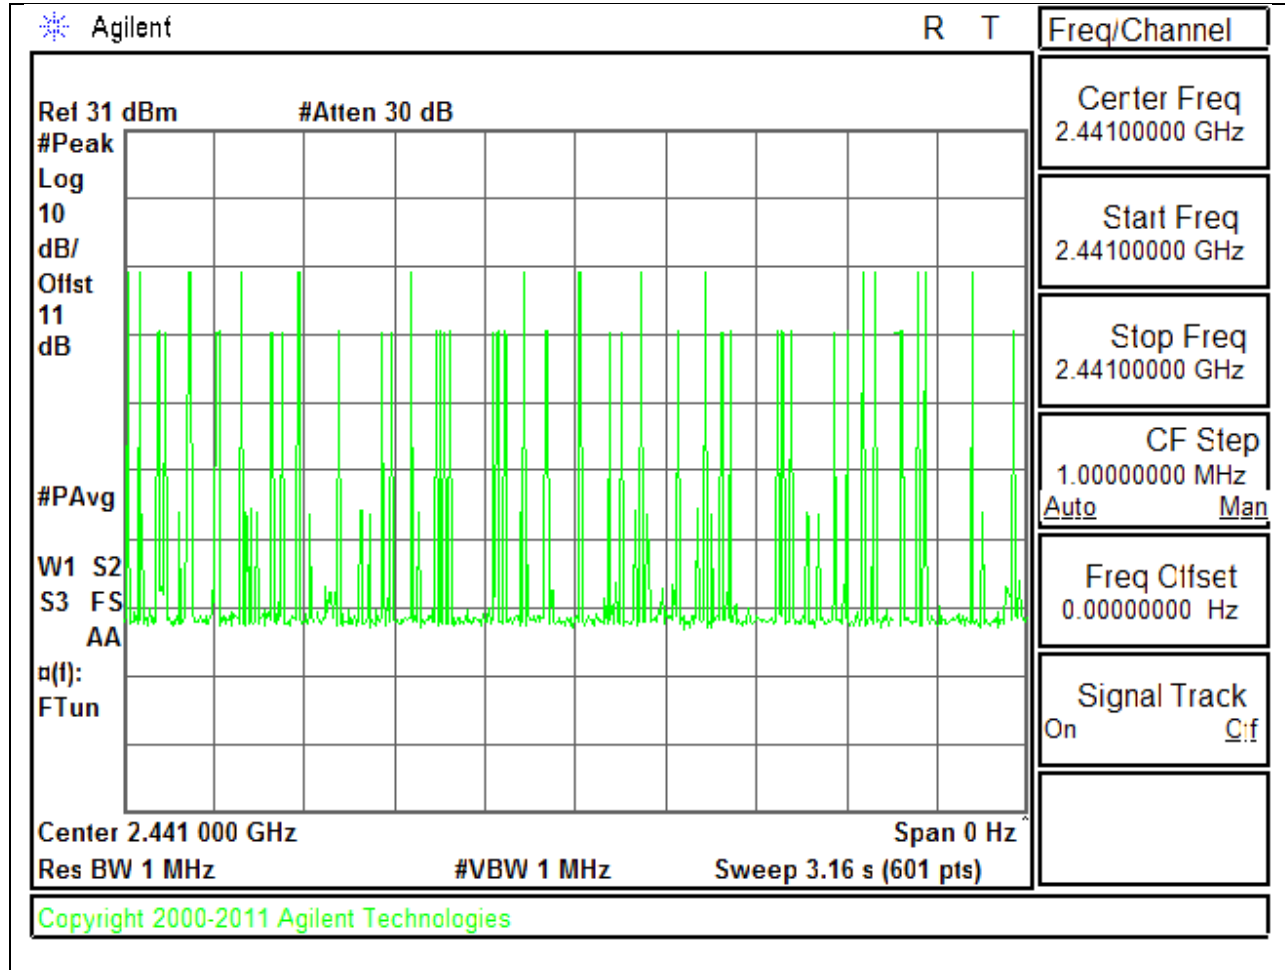

### PULSE WIDTH - DH5

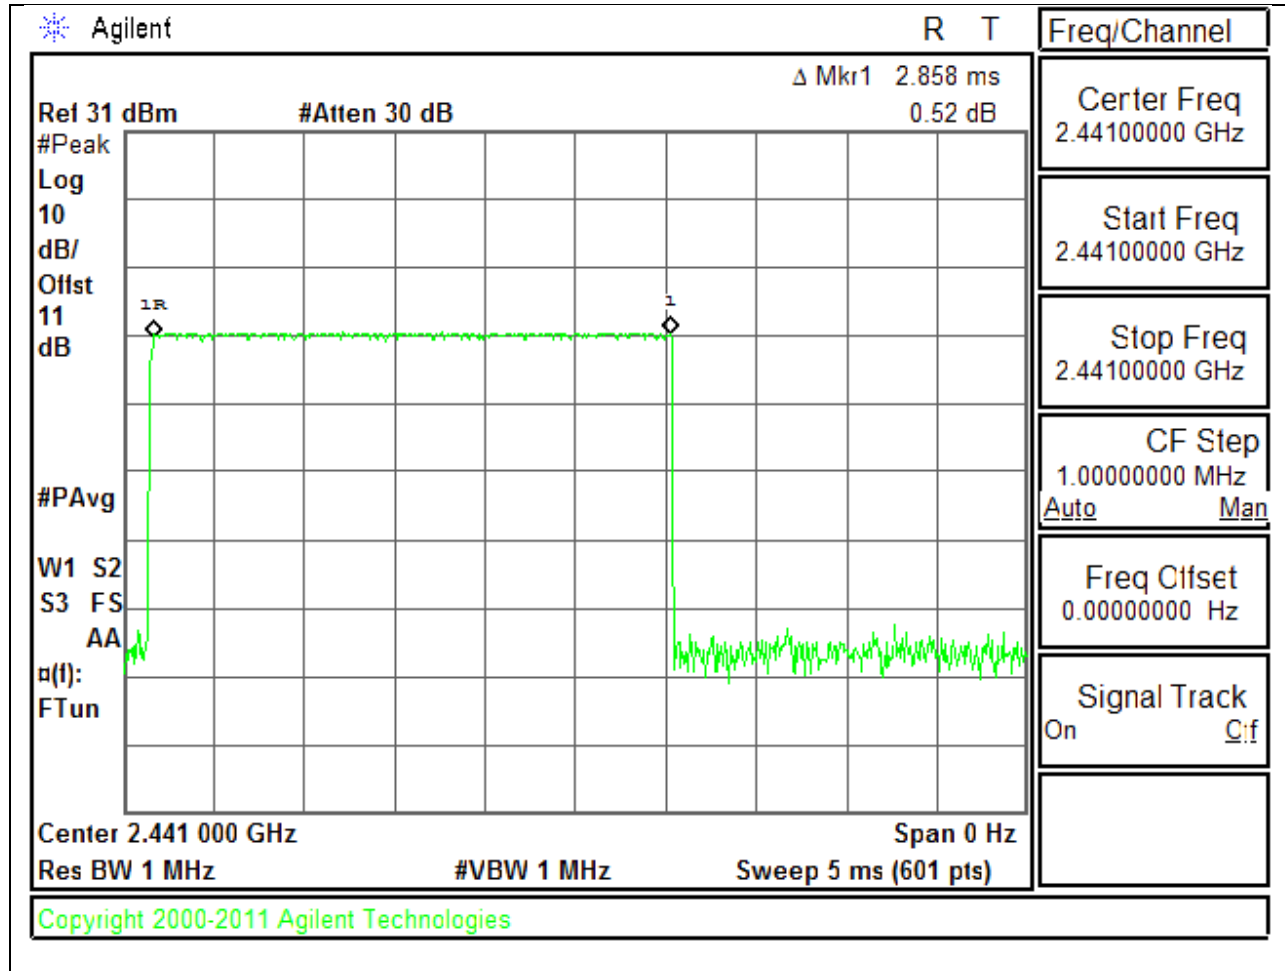

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH5**

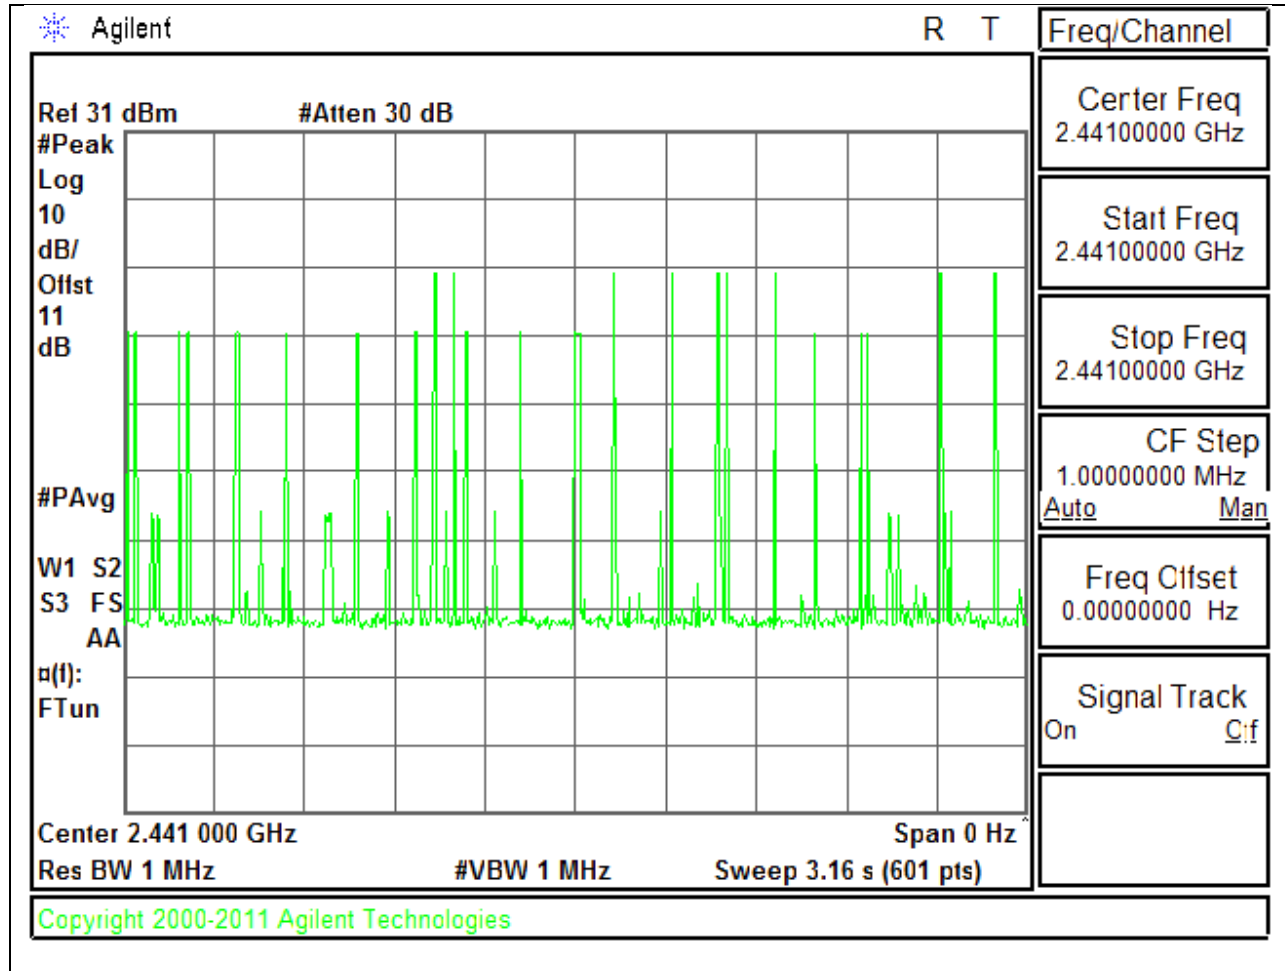

## 8.5. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

#### 8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.32	21	-10.68
Middle	2441	9.9	21	-11.1
High	2480	10.5	21	-10.5
Worst		10.5		-10.5


### 8.5.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.73	21	-10.27
Middle	2441	10.29	21	-10.71
High	2480	10.91	21	-10.09
Worst		10.91		-10.09


**OUTPUT POWER PLOTS**

**GFSK OUTPUT POWER**


**LOW CHANNEL**

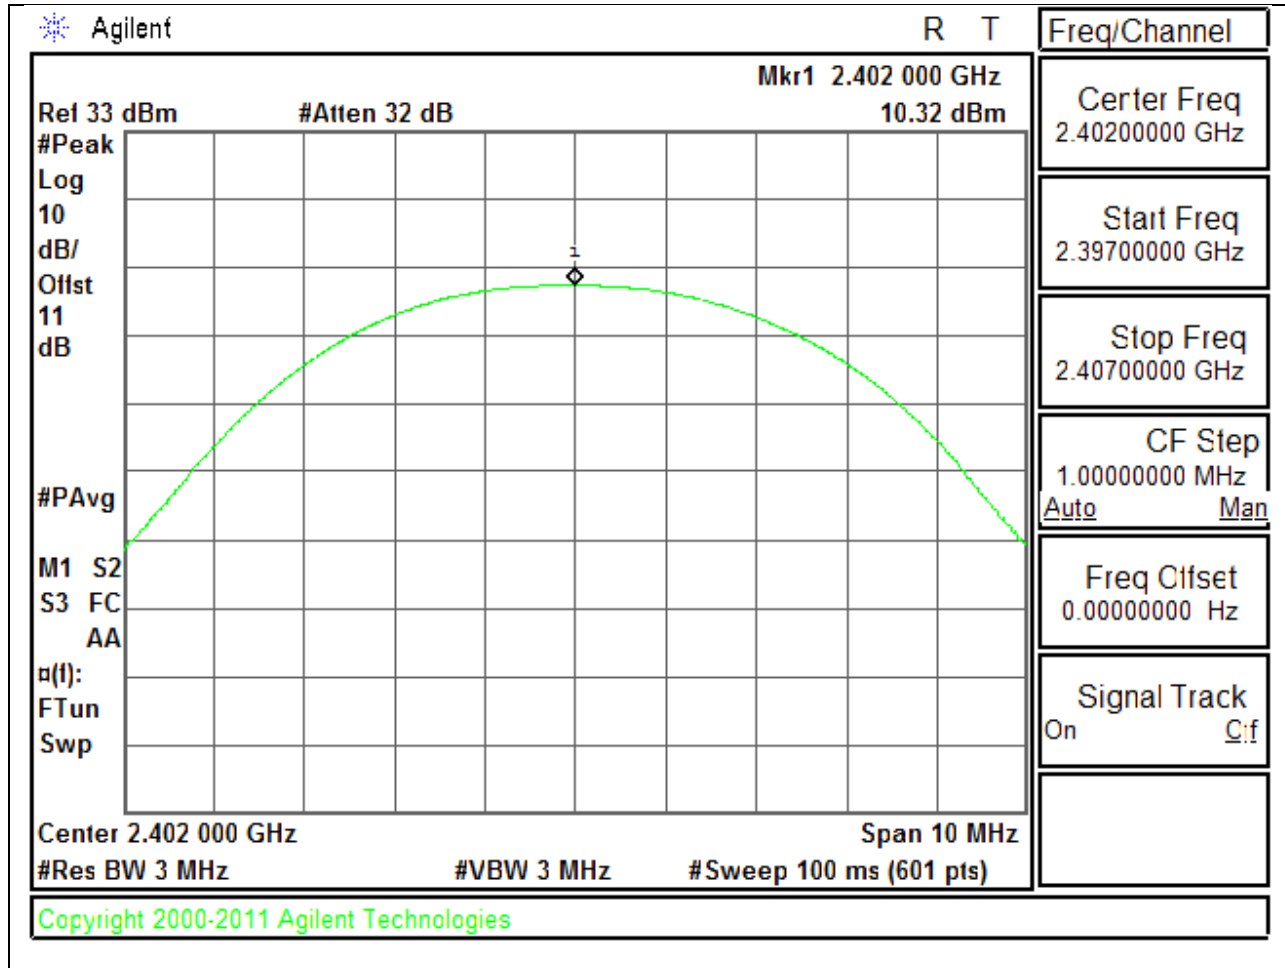

**MID CHANNEL**

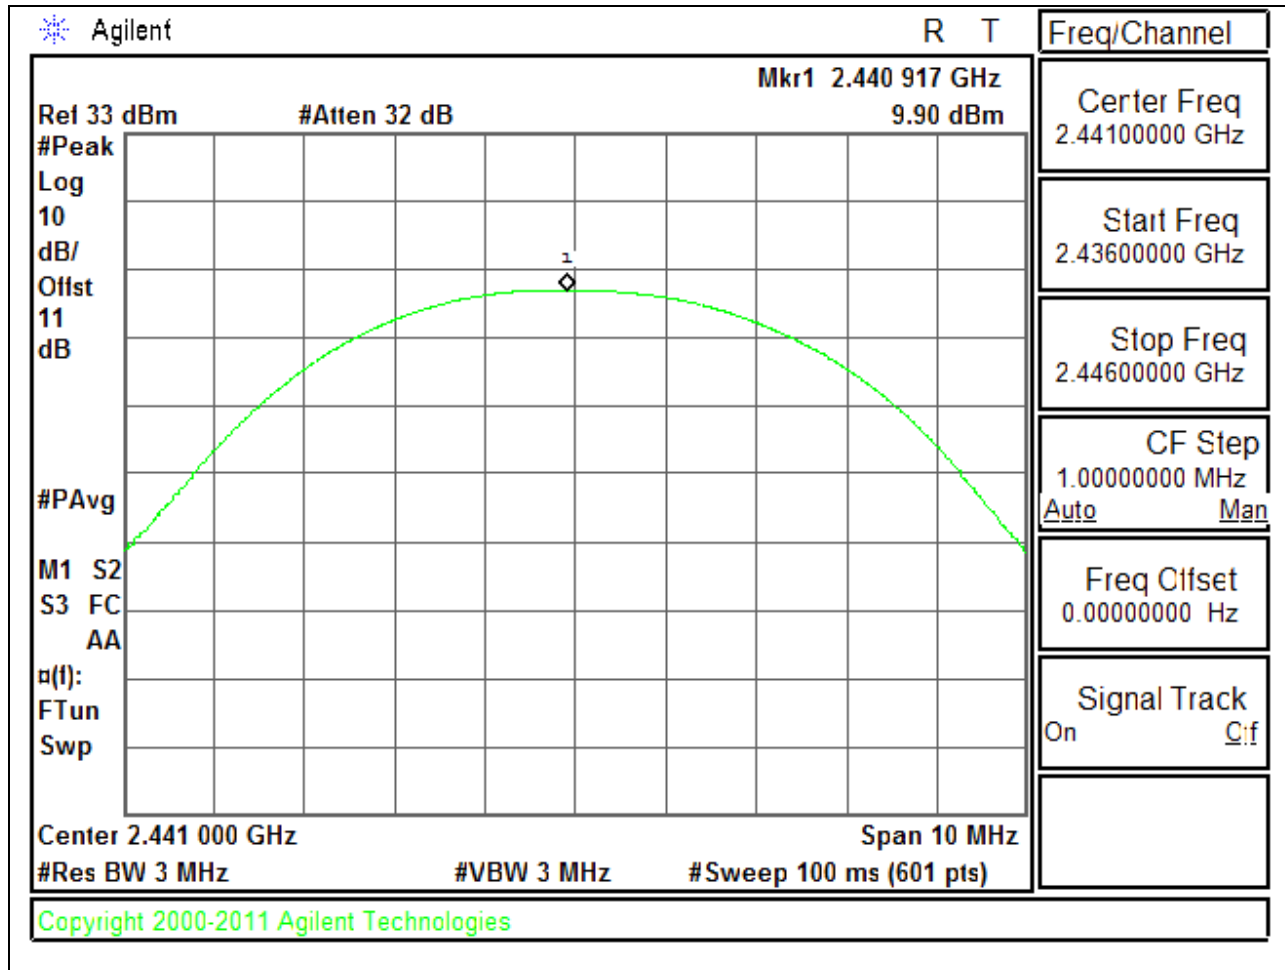


### HIGH CHANNEL

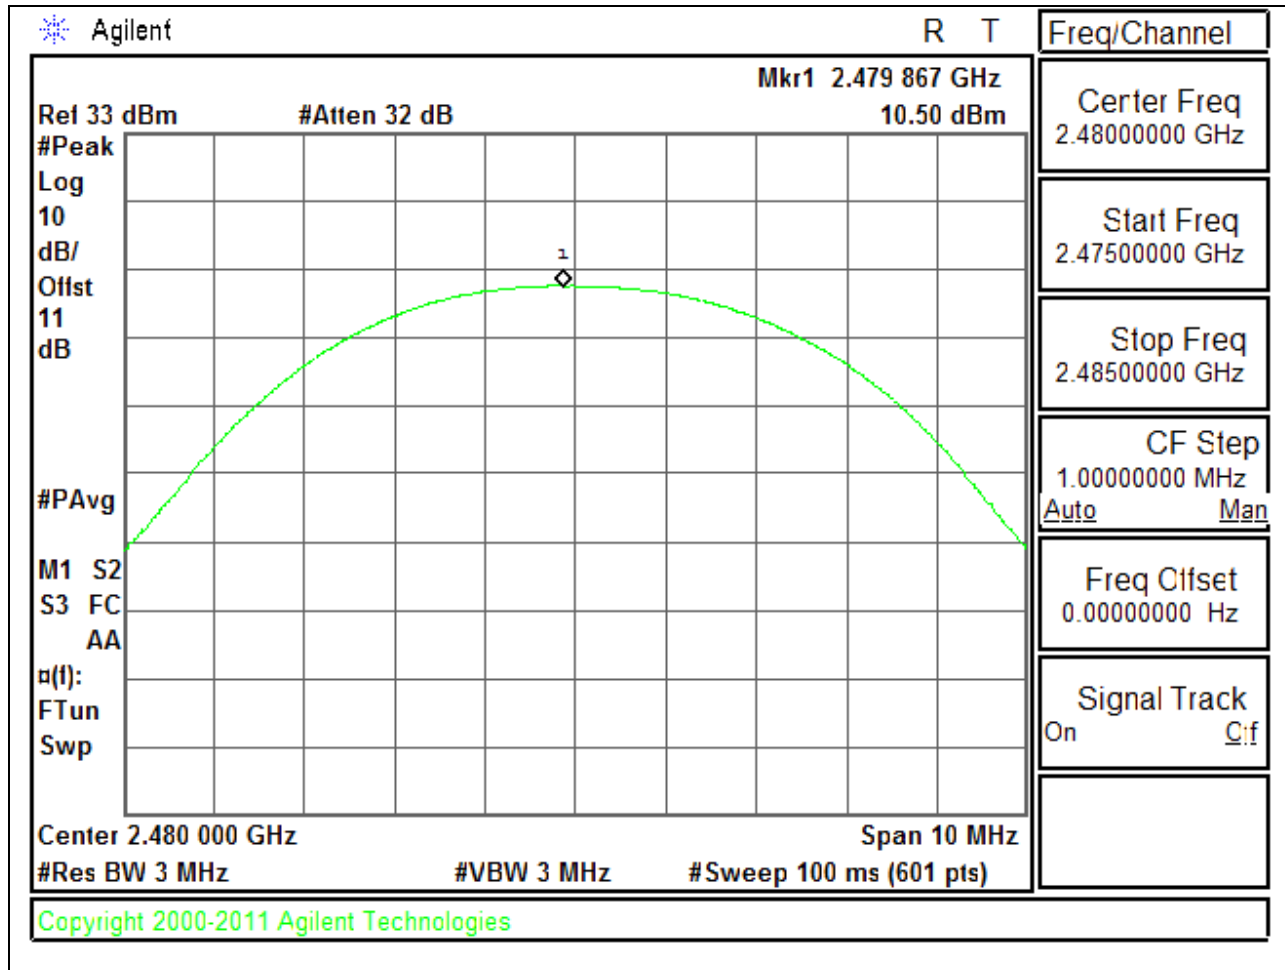


**8PSK OUTPUT POWER**


**LOW CHANNEL**

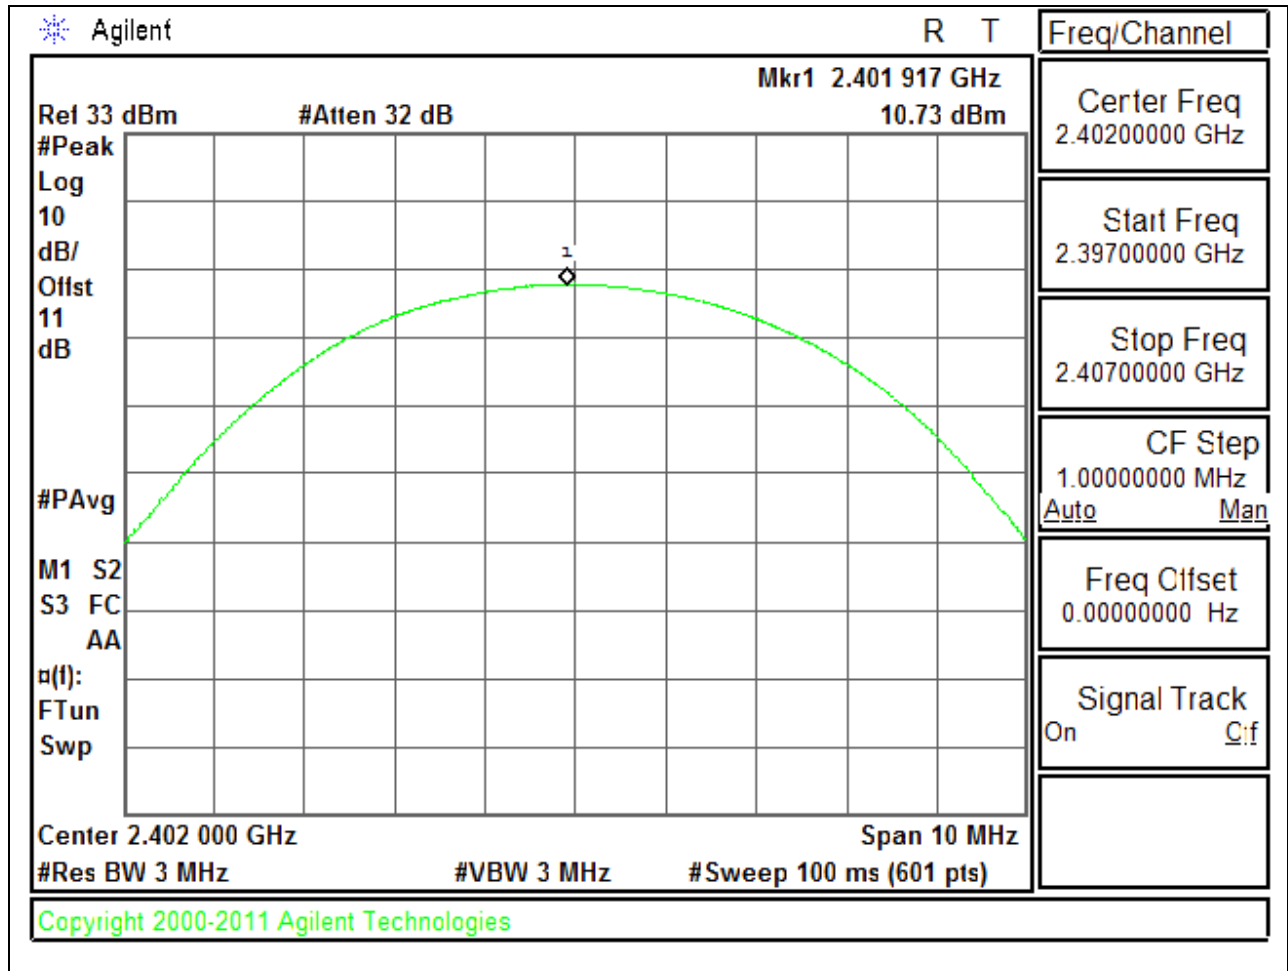

### MID CHANNEL

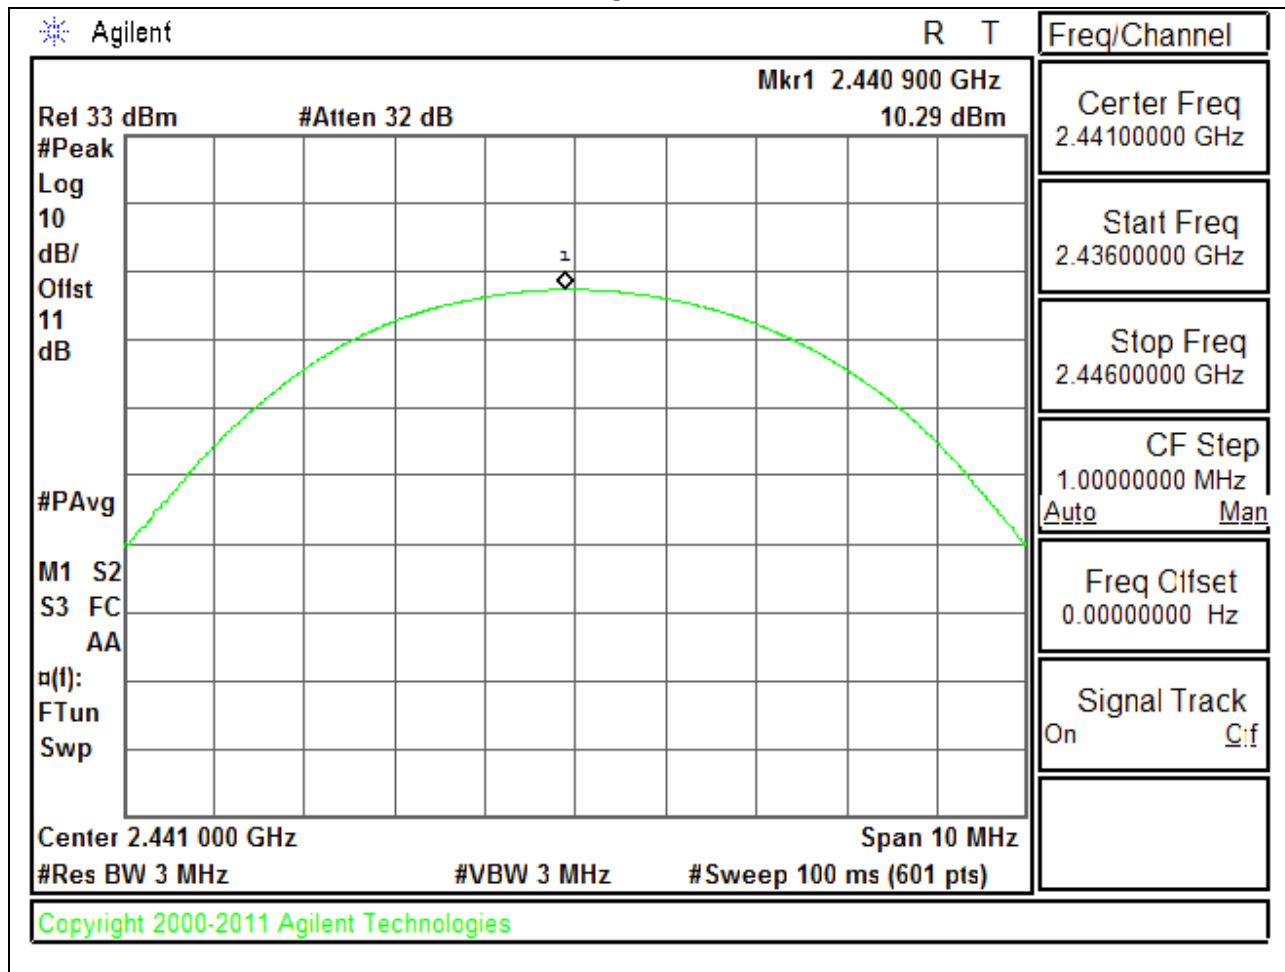

### HIGH CHANNEL

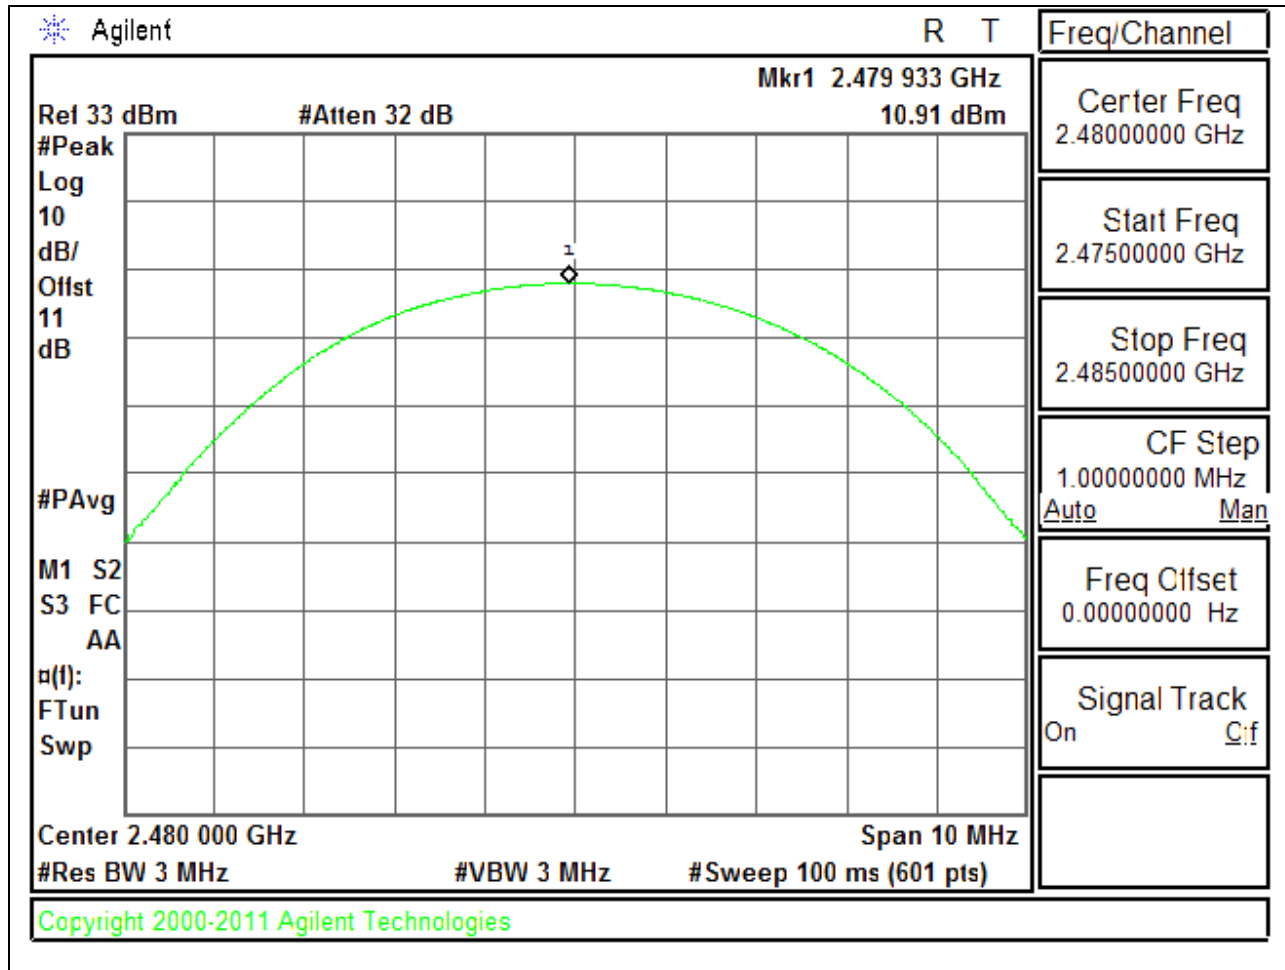

## 8.6. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.4
Middle	2441	9.4
High	2480	9.7
Worst		9.7

#### 8.6.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7
Middle	2441	7.1
High	2480	7.4
Worst		7.4

## **8.7. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

### **RESULTS**


### 8.7.1. BASIC DATA RATE GFSK MODULATION

#### SPURIOUS EMISSIONS, LOW CHANNEL

#### LOW CHANNEL BANDEDGE

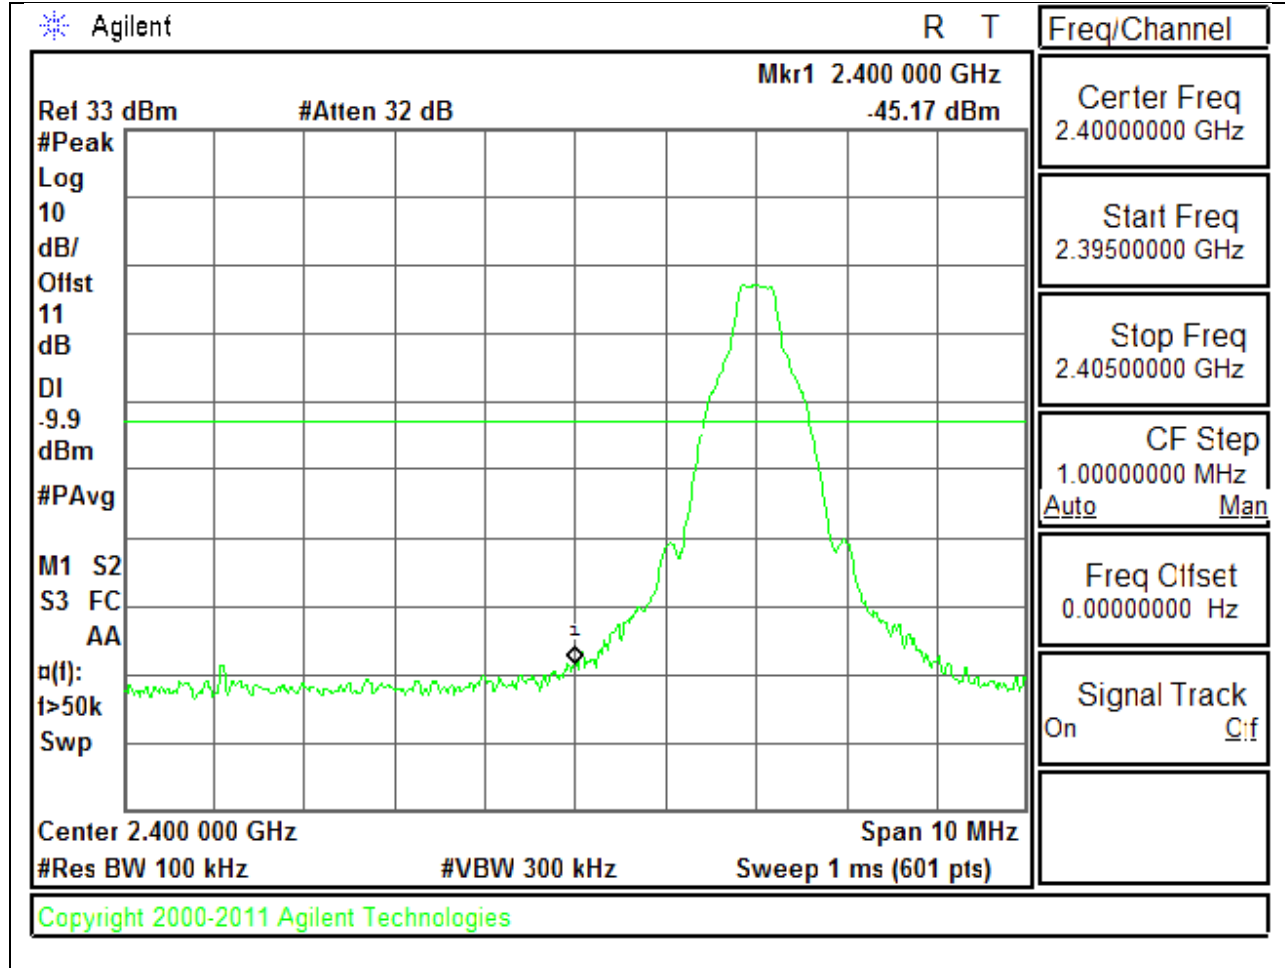


### LOW CHANNEL SPURIOUS

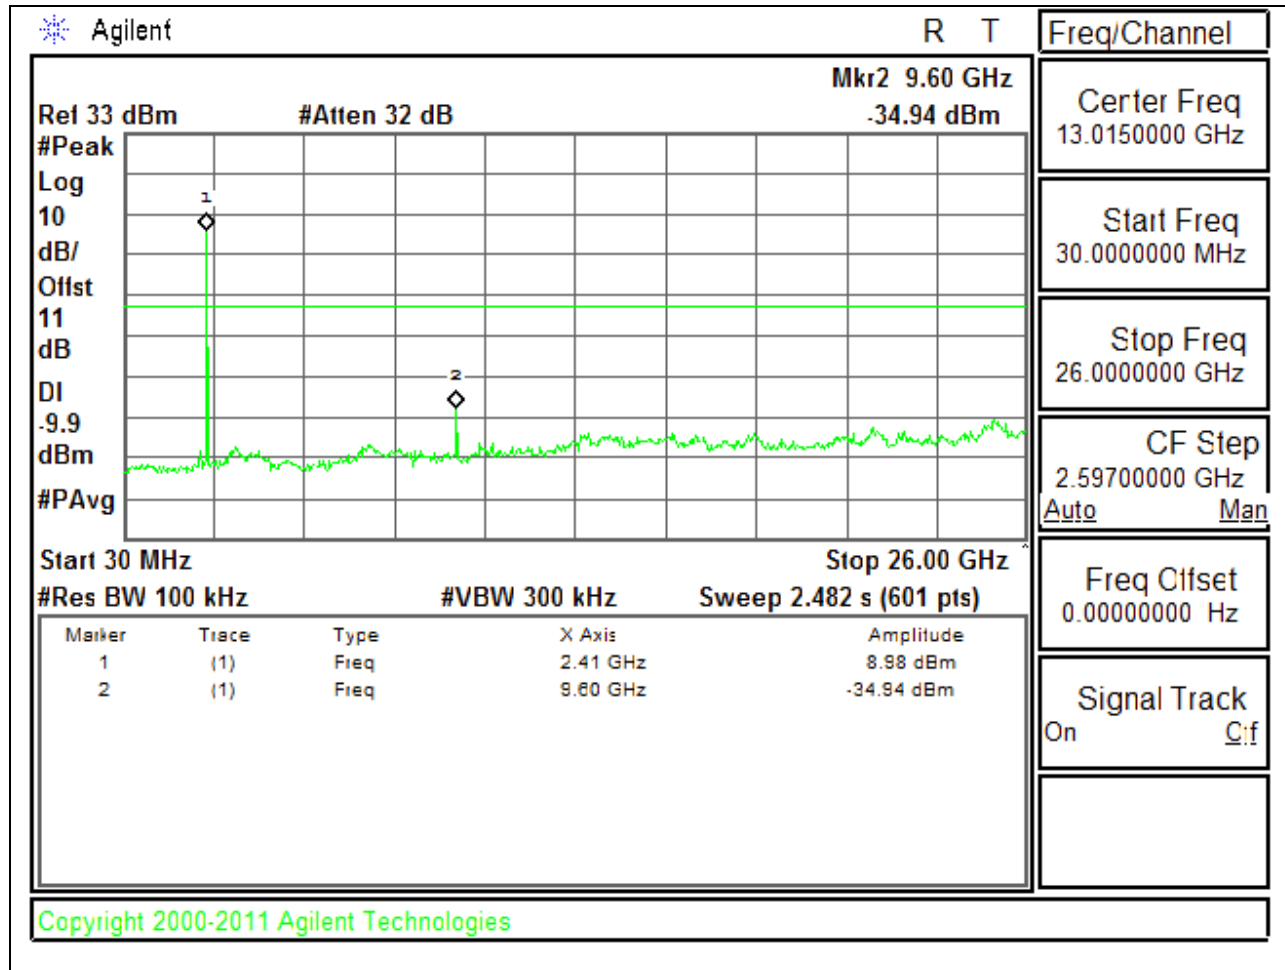


**SPURIOUS EMISSIONS, MID CHANNEL**

**MID CHANNEL REFERENCE**

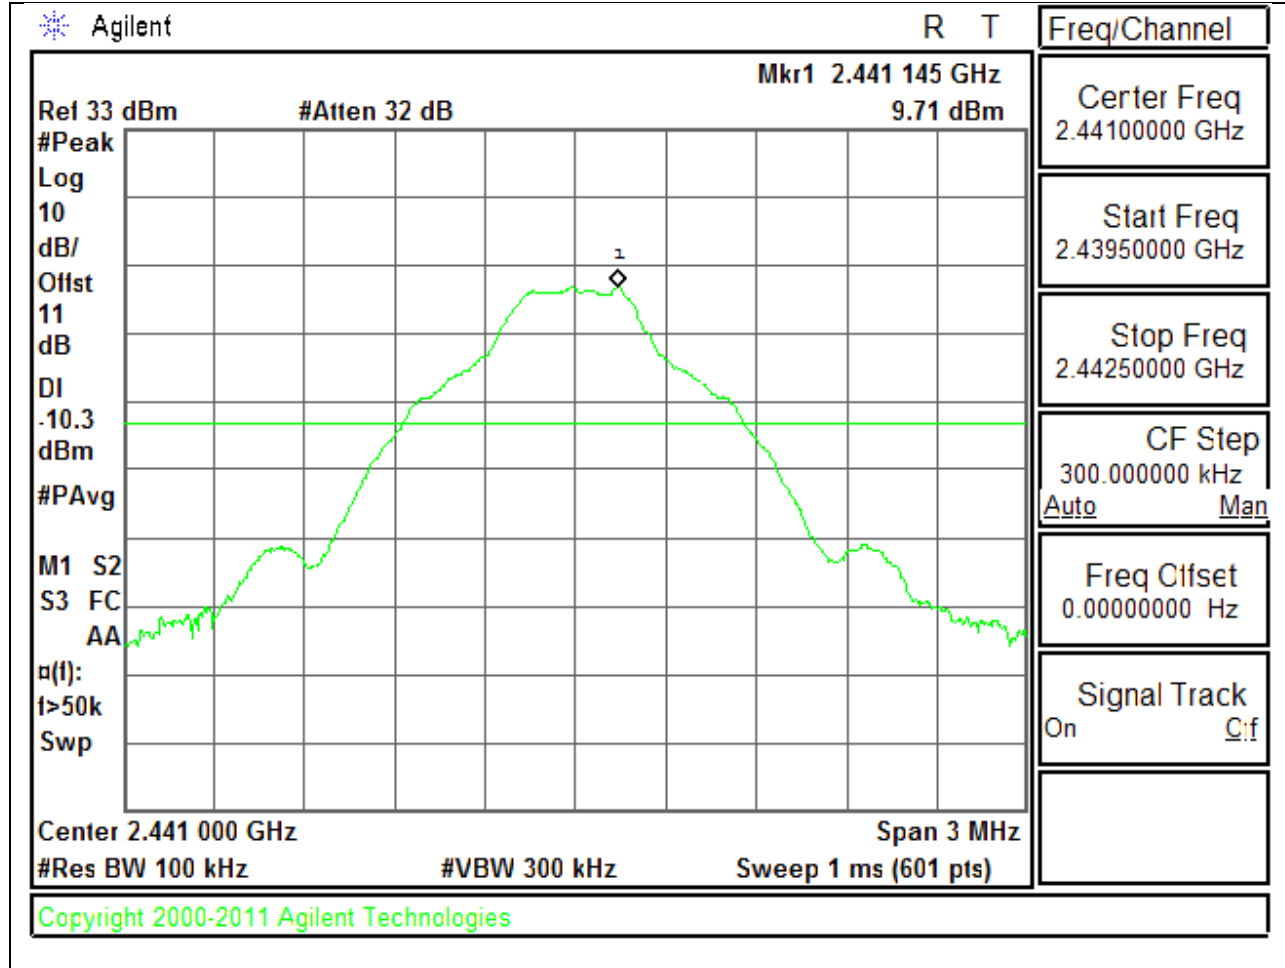


### MID CHANNEL SPURIOUS

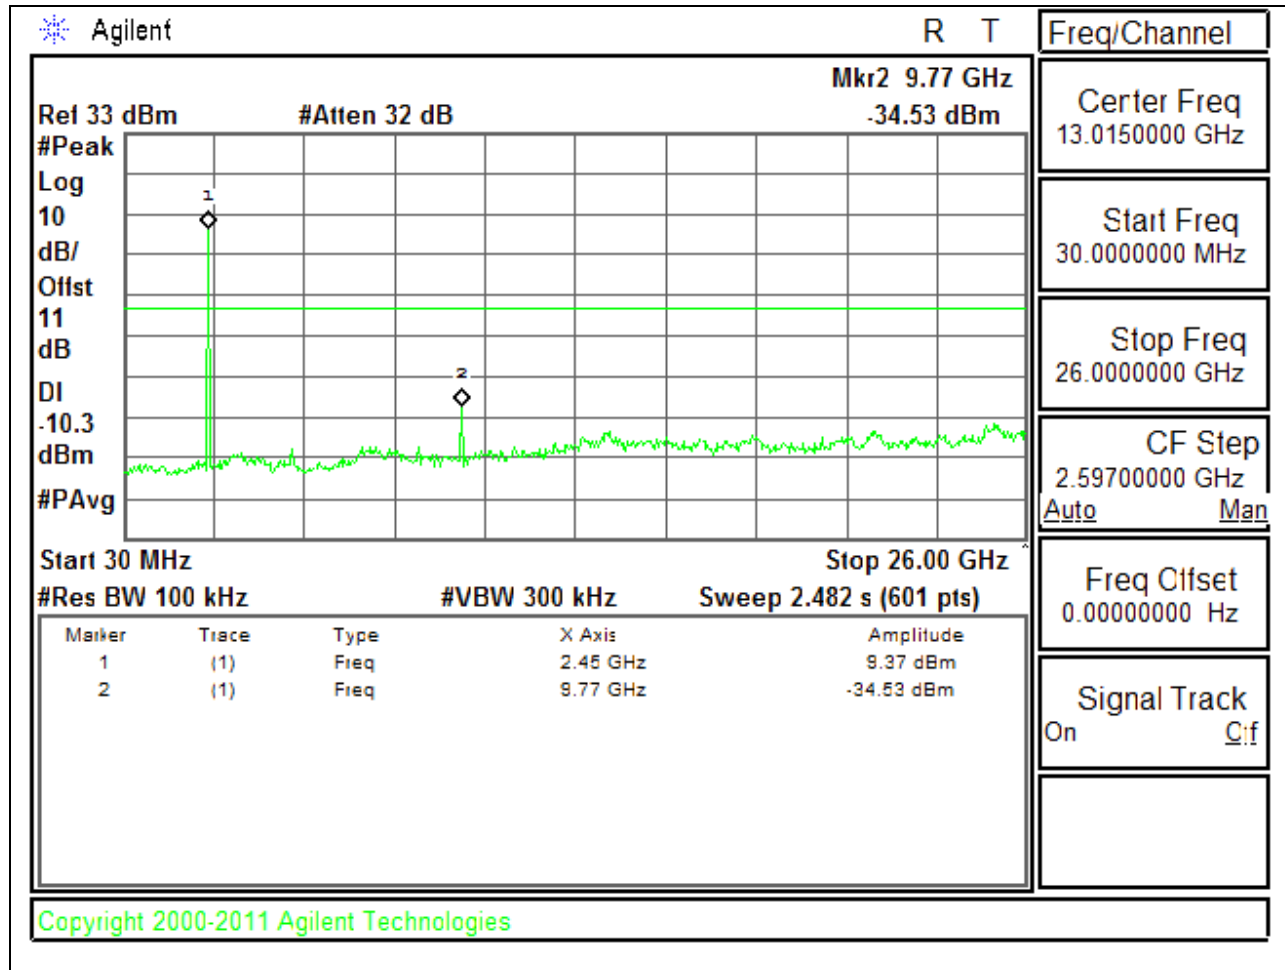


**SPURIOUS EMISSIONS, HIGH CHANNEL**

**HIGH CHANNEL BANDEDGE**

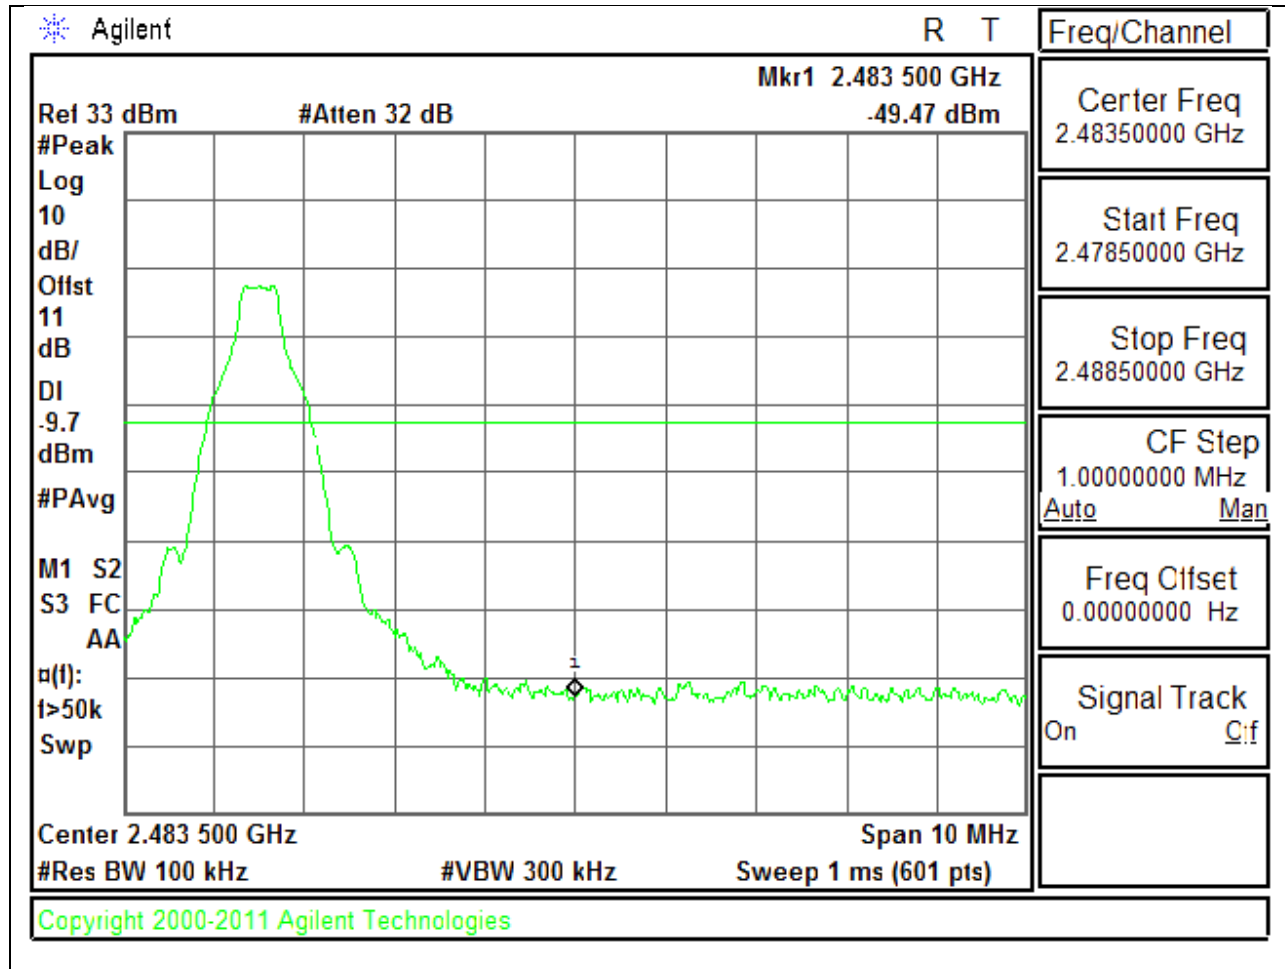


### HIGH CHANNEL SPURIOUS

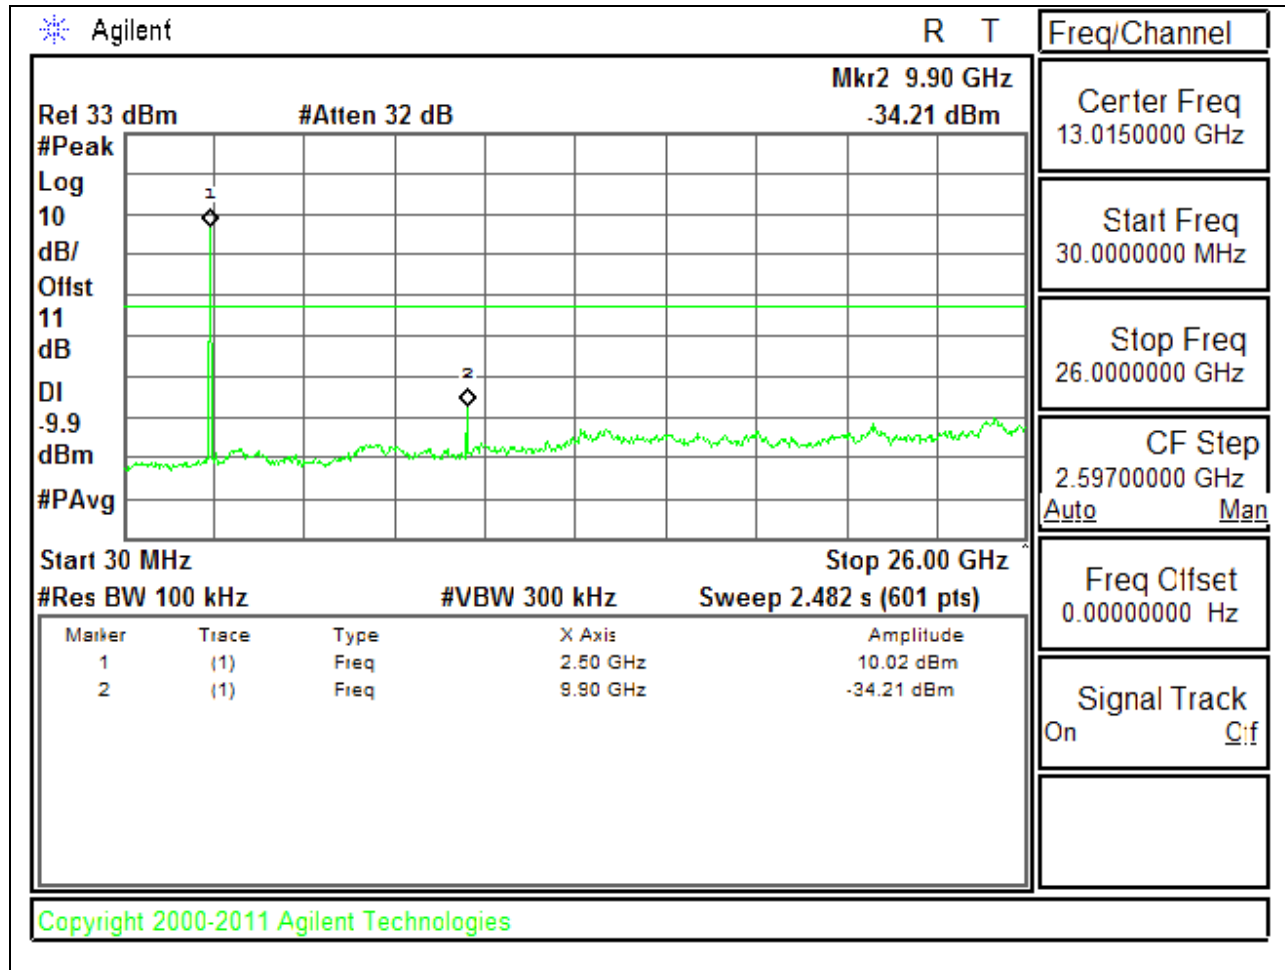


**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

**LOW BANDEDGE WITH HOPPING ON**

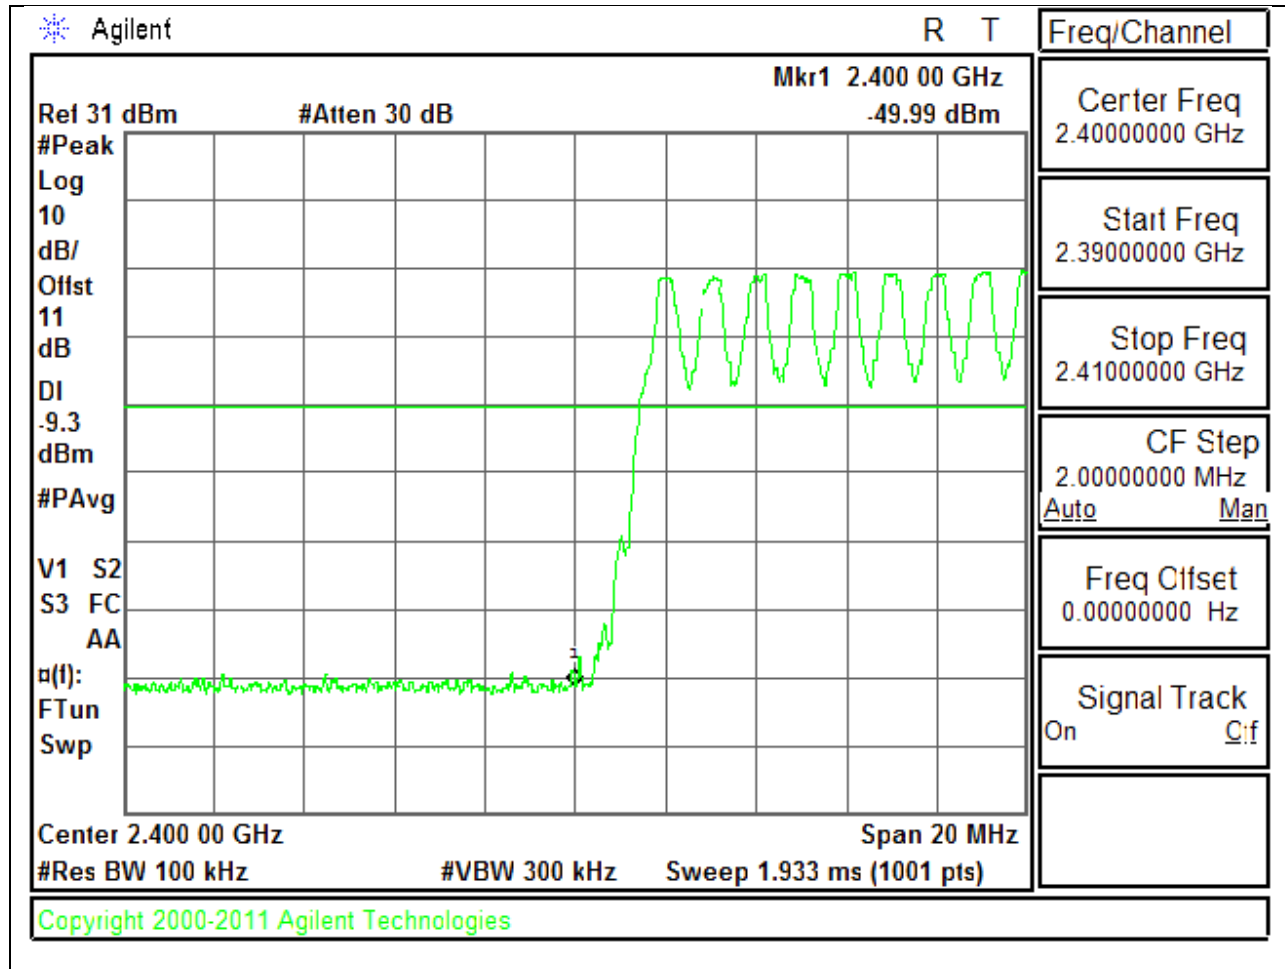


### HIGH BANDEDGE WITH HOPPING ON

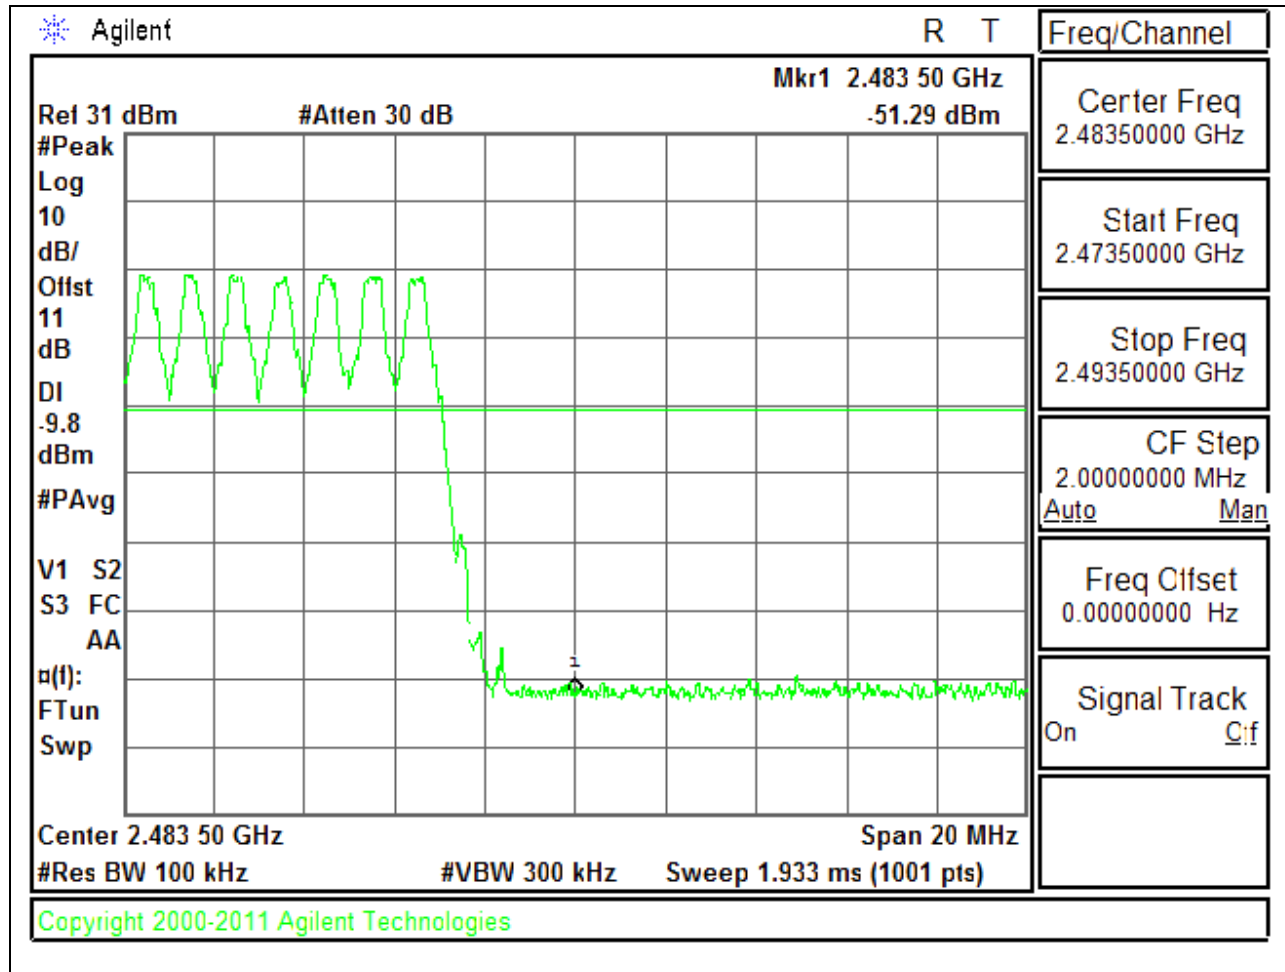


### 8.7.2. ENHANCED DATA RATE 8PSK MODULATION

#### SPURIOUS EMISSIONS, LOW CHANNEL

#### LOW CHANNEL BANDEDGE

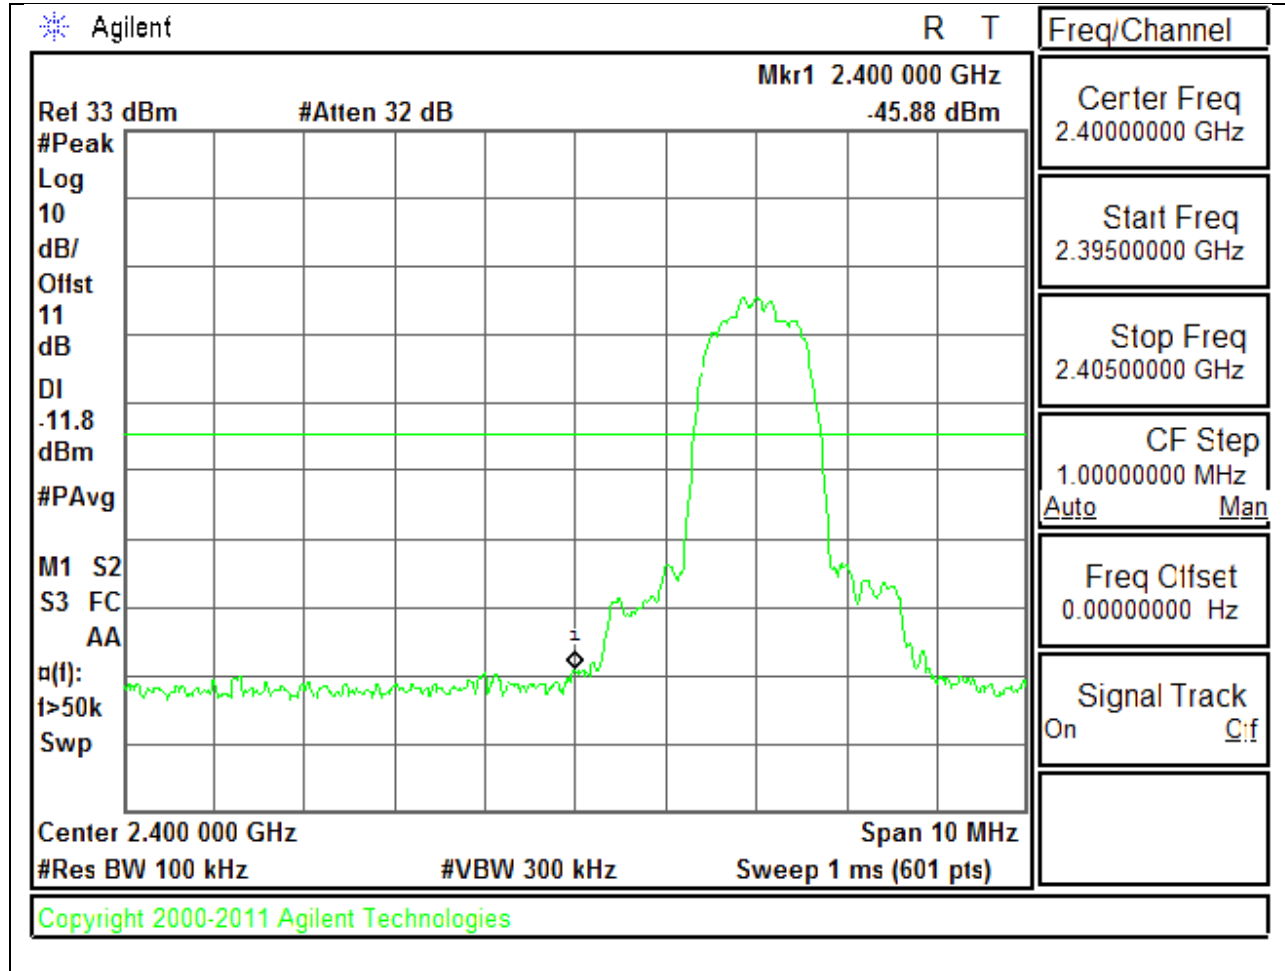


### LOW CHANNEL SPURIOUS

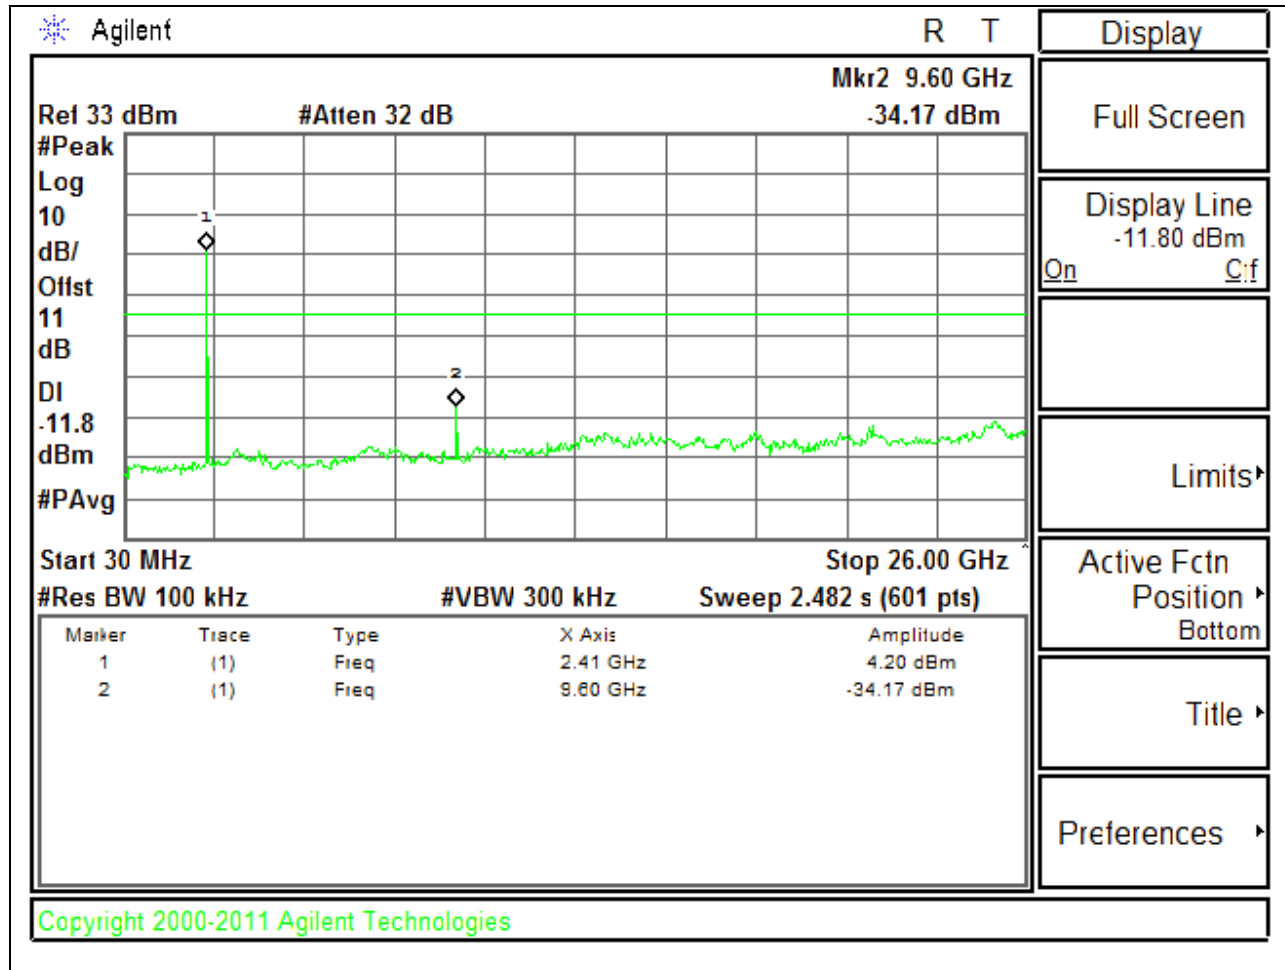


**SPURIOUS EMISSIONS, MID CHANNEL**

**MID CHANNEL REFERENCE**

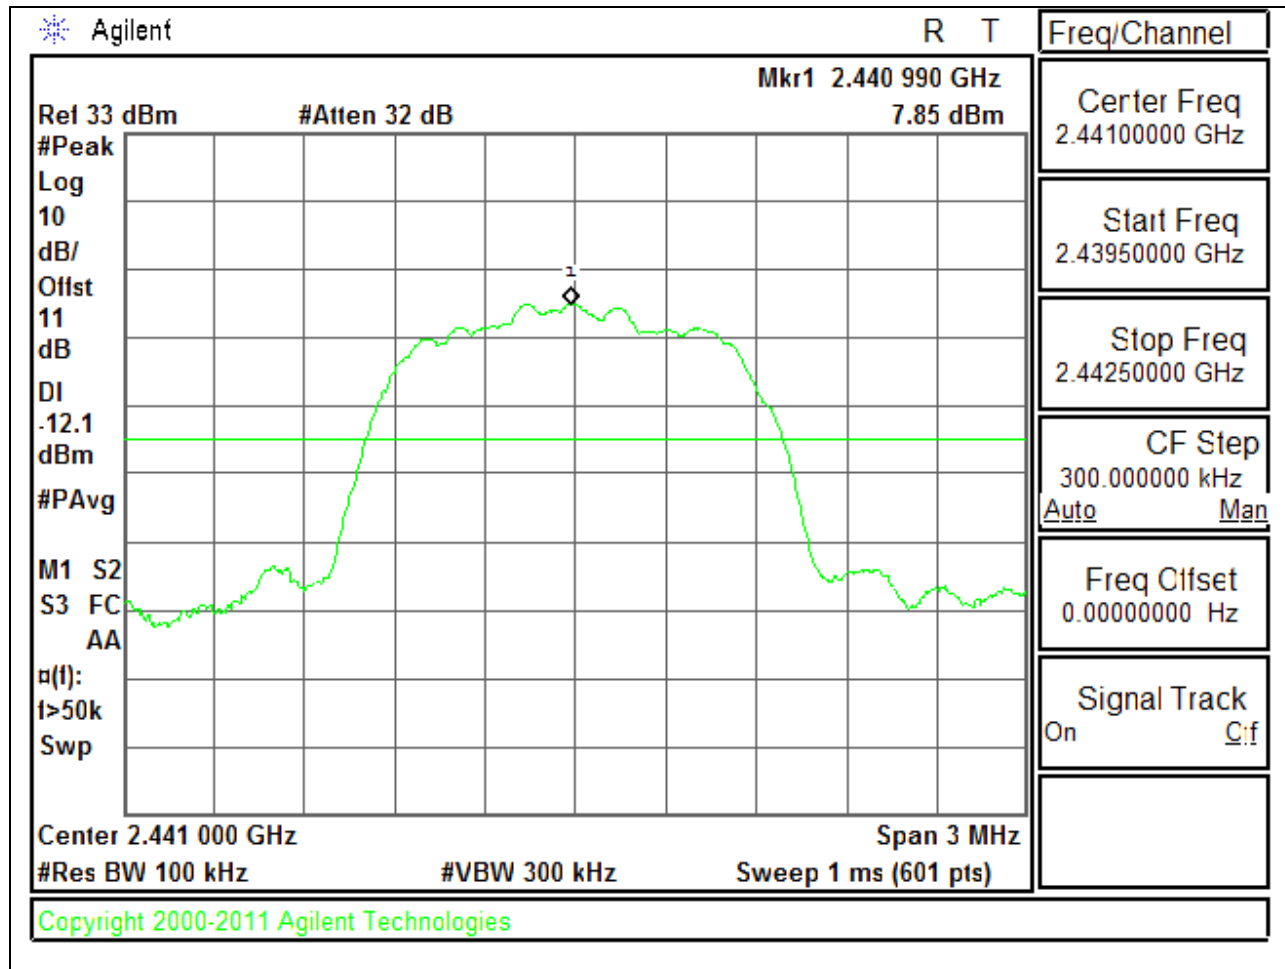


### MID CHANNEL SPURIOUS

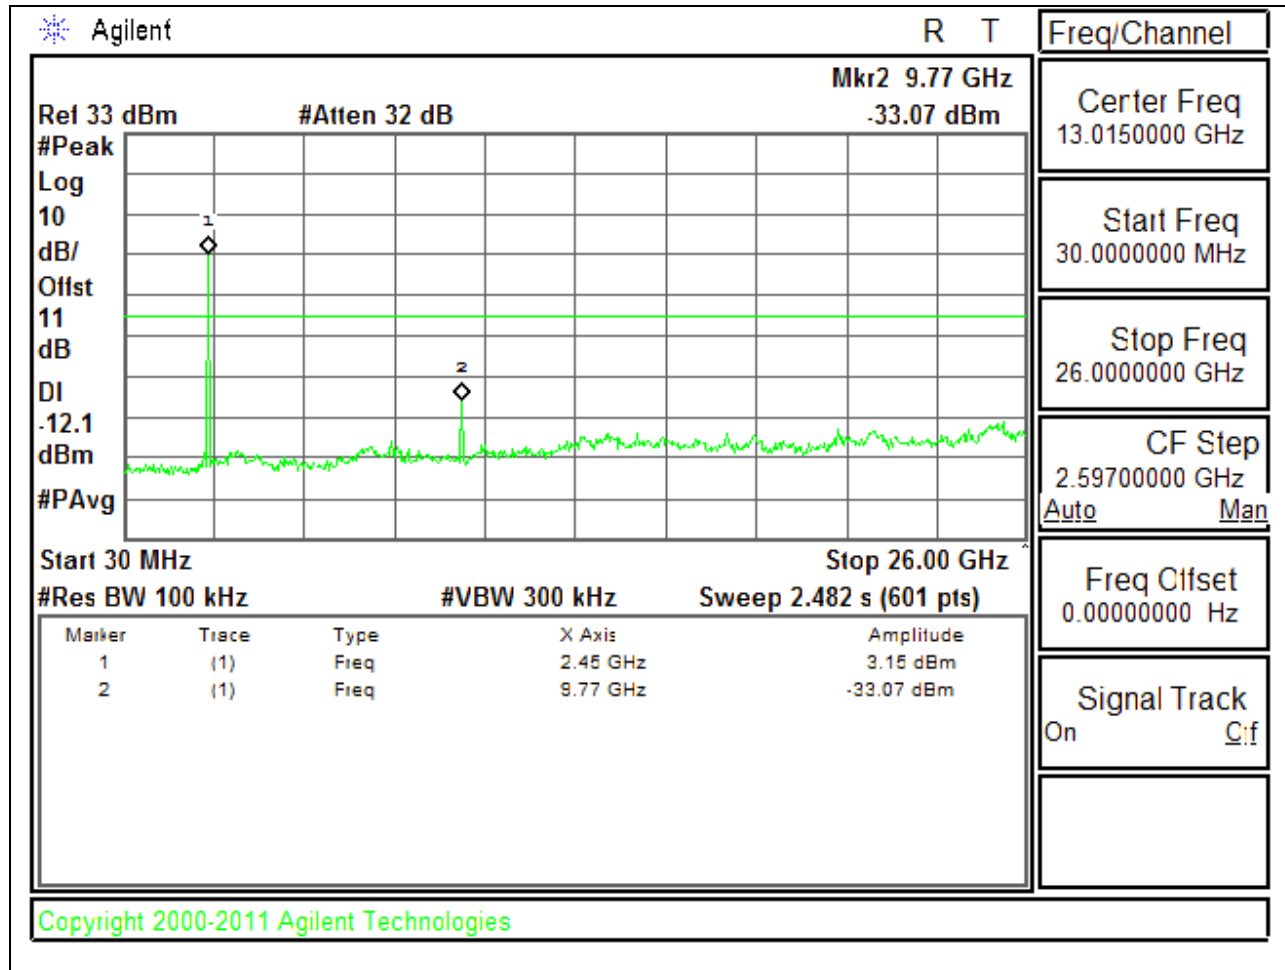


**SPURIOUS EMISSIONS, HIGH CHANNEL**

**HIGH CHANNEL BANDEDGE**

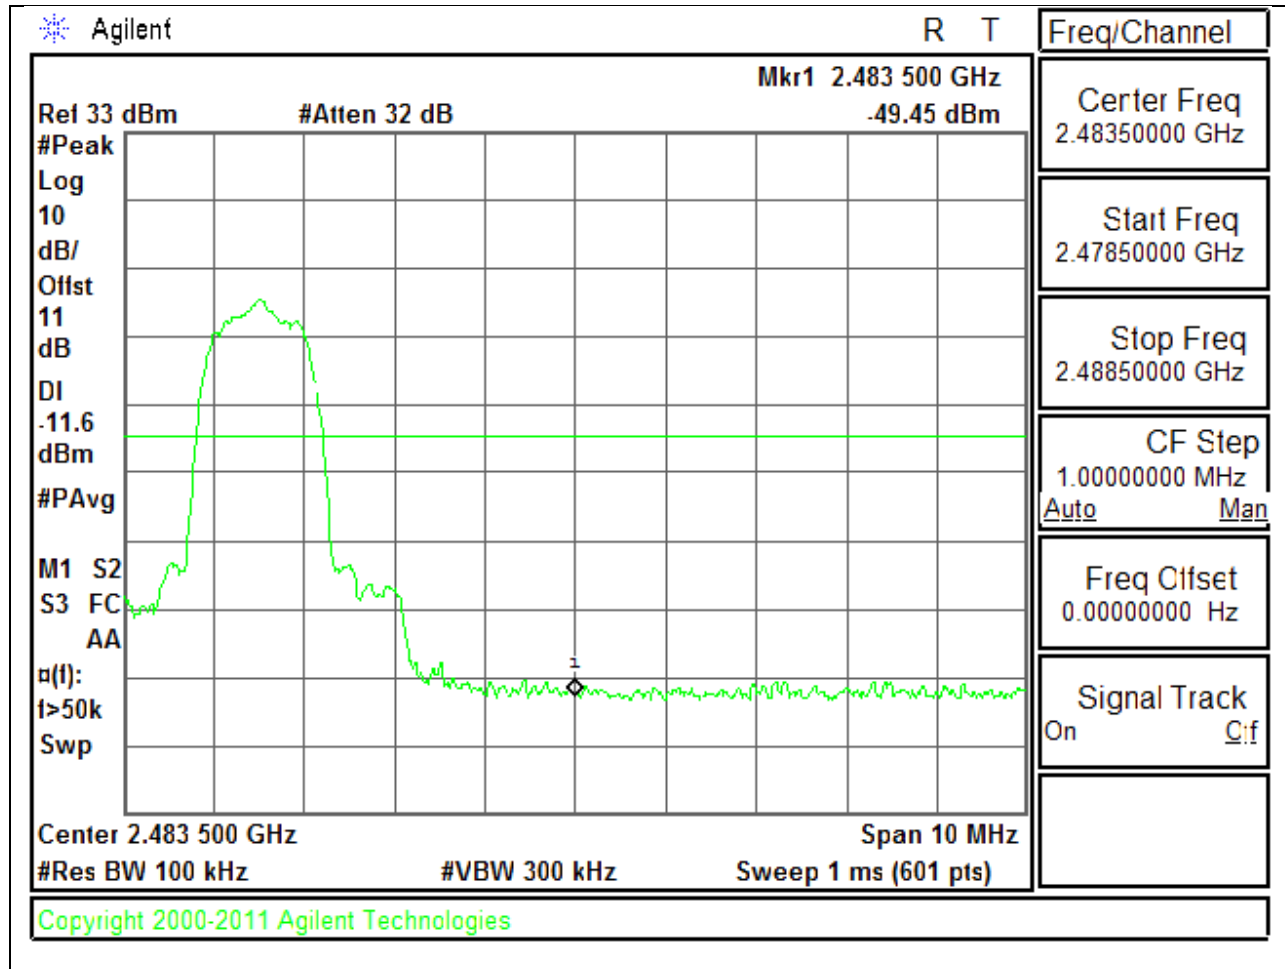


### HIGH CHANNEL SPURIOUS

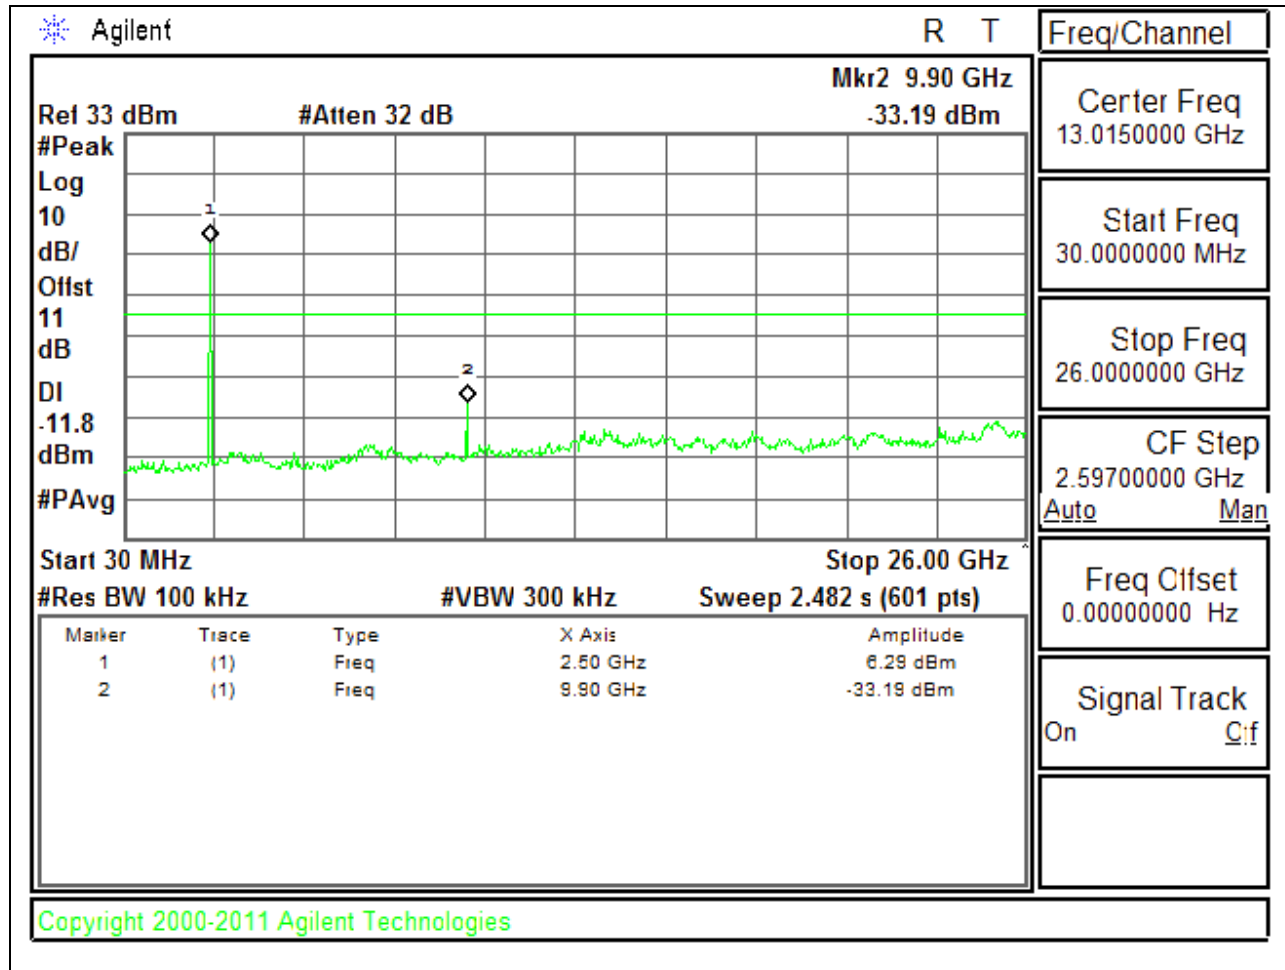


**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

**LOW BANDEDGE WITH HOPPING ON**

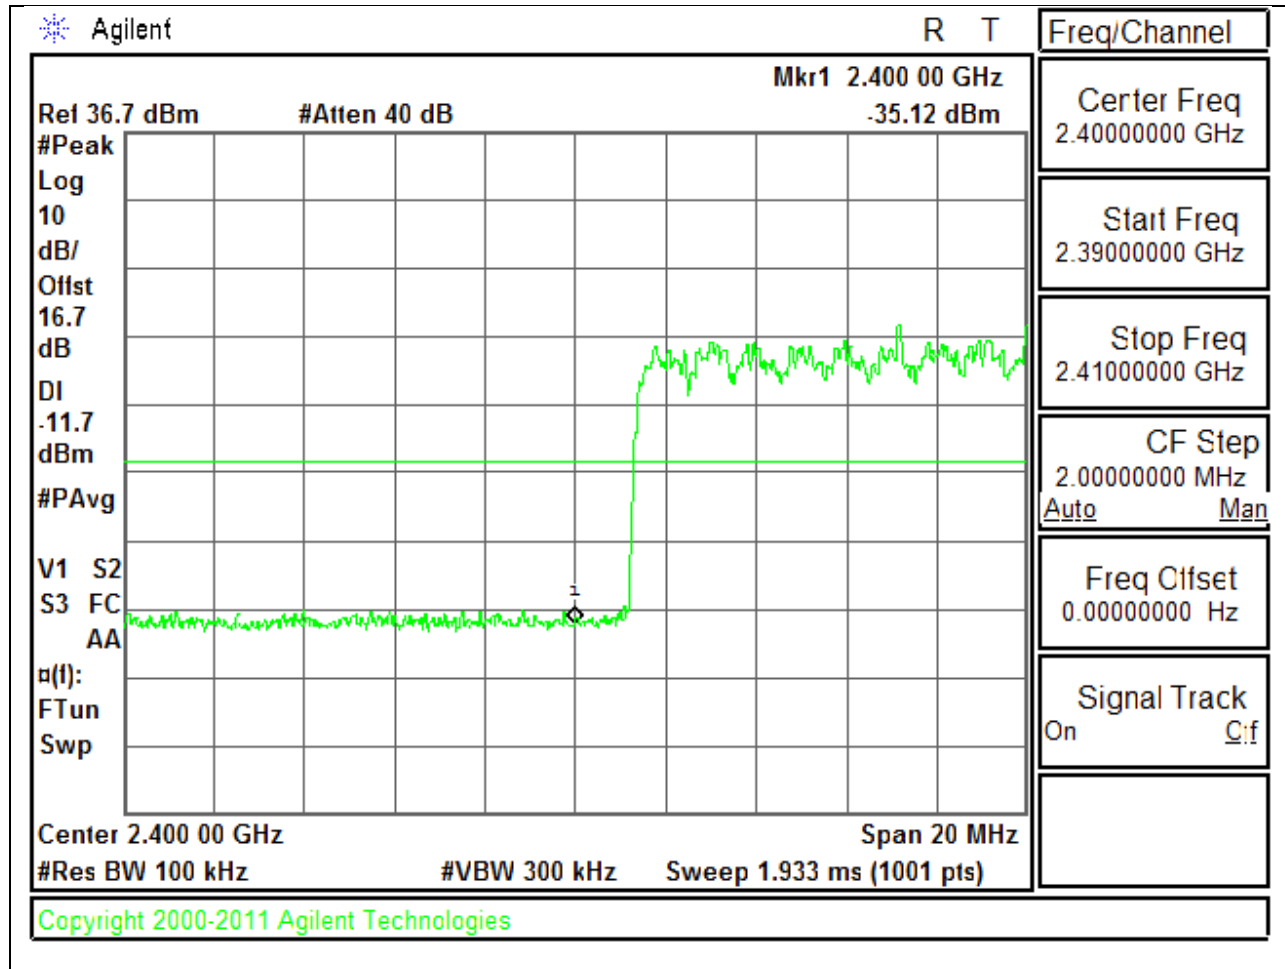

### HIGH BANDEDGE WITH HOPPING ON

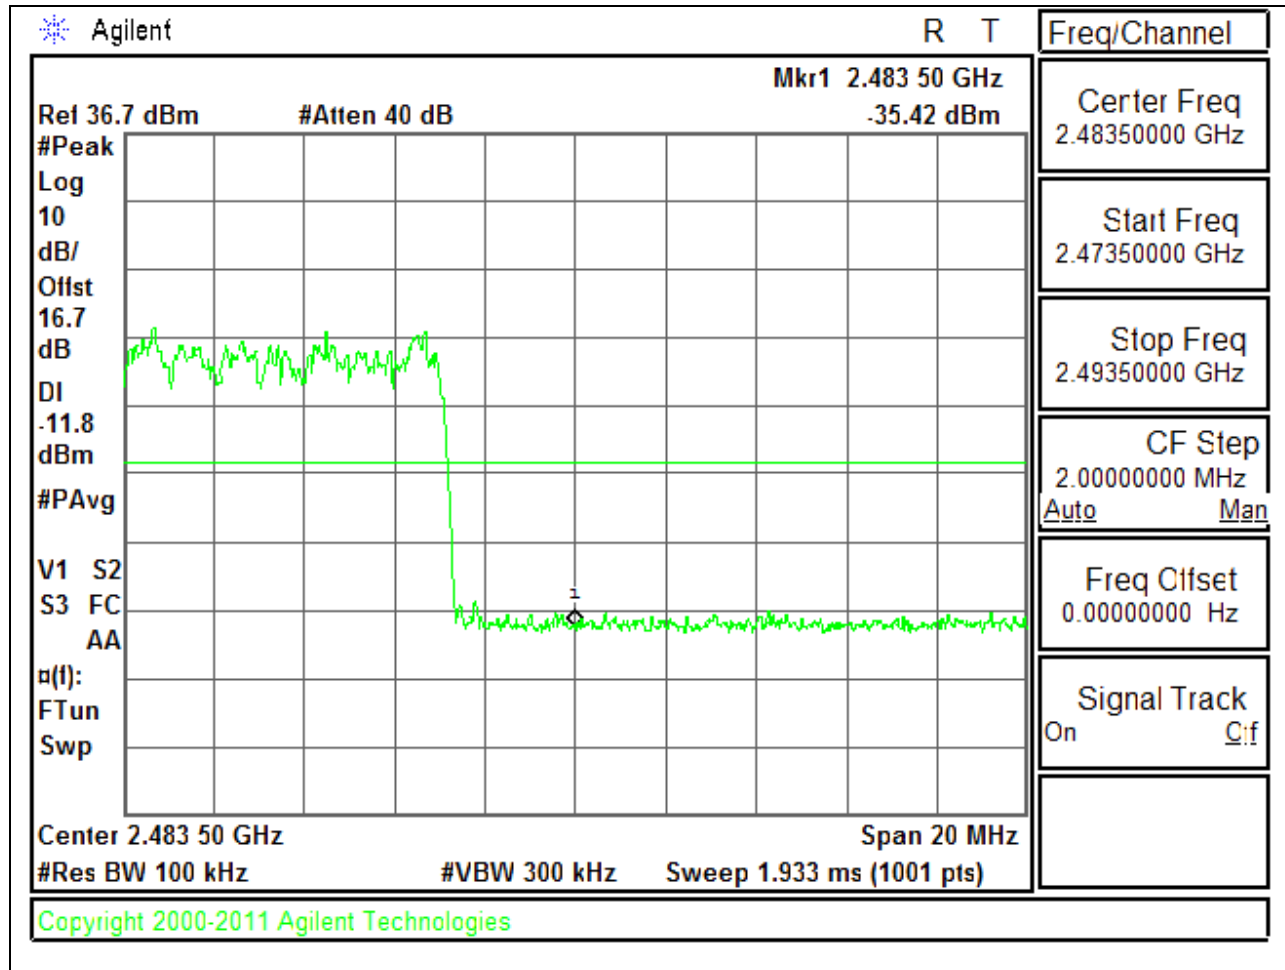

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit ( $\mu\text{V}/\text{m}$ ) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.0028 \text{ S} = 360\text{Hz}.$$

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 9.2. TRANSMITTER ABOVE 1 GHz

### 9.2.1. BASIC DATA RATE GFSK MODULATION

#### RESTRICTED BANDEDGE (LOW CHANNEL)


#### HORIZONTAL PEAK AND AVERAGE PLOT

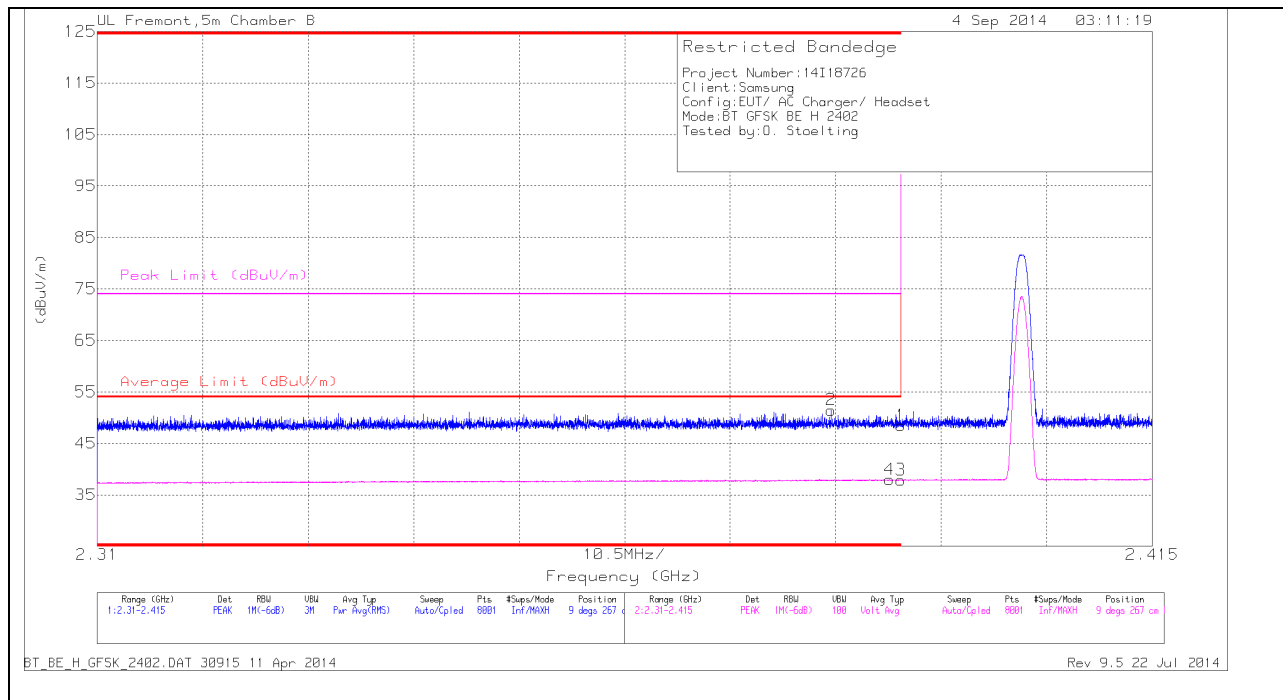

#### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.06	PK	32.1	-22.7	48.46	-	-	74	-25.54	9	267	H
2	* 2.383	42.08	PK	32.1	-22.7	51.48	-	-	74	-22.52	9	267	H
3	* 2.39	28.48	VB1T	32.1	-22.7	37.88	54	-16.12	-	-	9	267	H
4	* 2.389	28.56	VB1T	32.1	-22.7	37.96	54	-16.04	-	-	9	267	H

**VERTICAL PEAK AND AVERAGE PLOT**

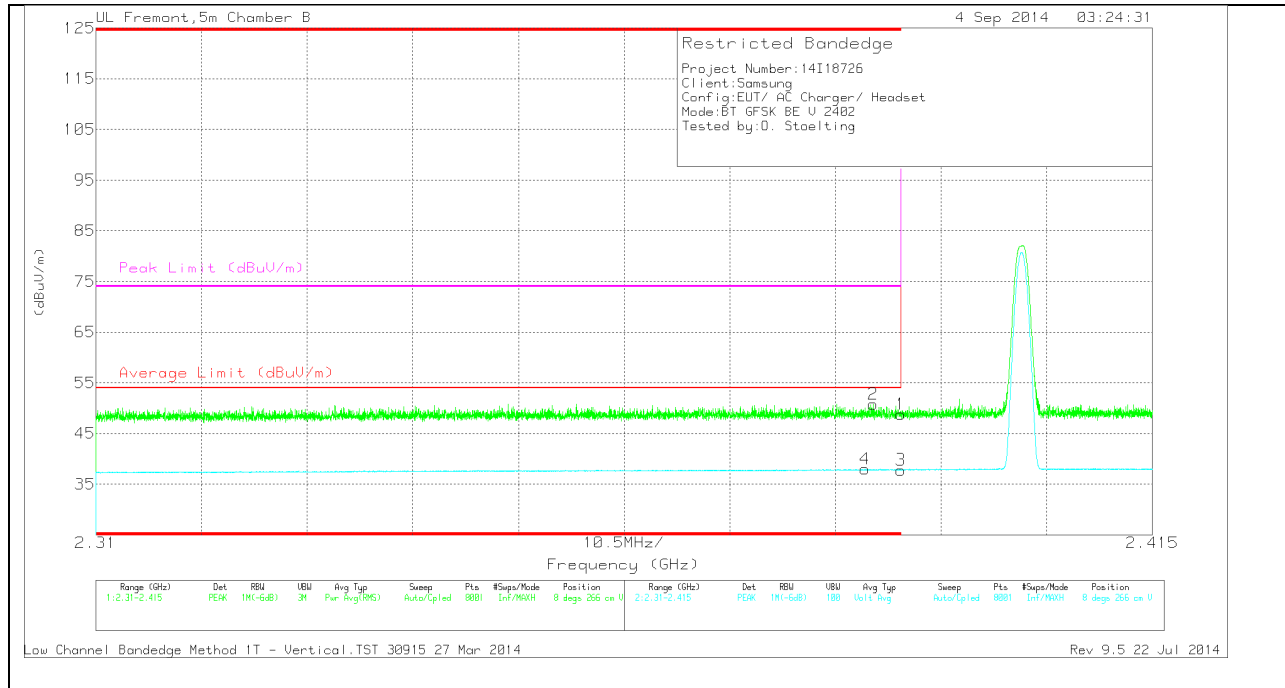


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.43	PK	32.1	-22.7	48.83	-	-	74	-25.17	8	266	V
2	* 2.387	41.43	PK	32.1	-22.7	50.83	-	-	74	-23.17	8	266	V
3	* 2.39	28.41	VB1T	32.1	-22.7	37.81	54	-16.19	-	-	8	266	V
4	* 2.386	28.56	VB1T	32.1	-22.7	37.96	54	-16.04	-	-	8	266	V

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

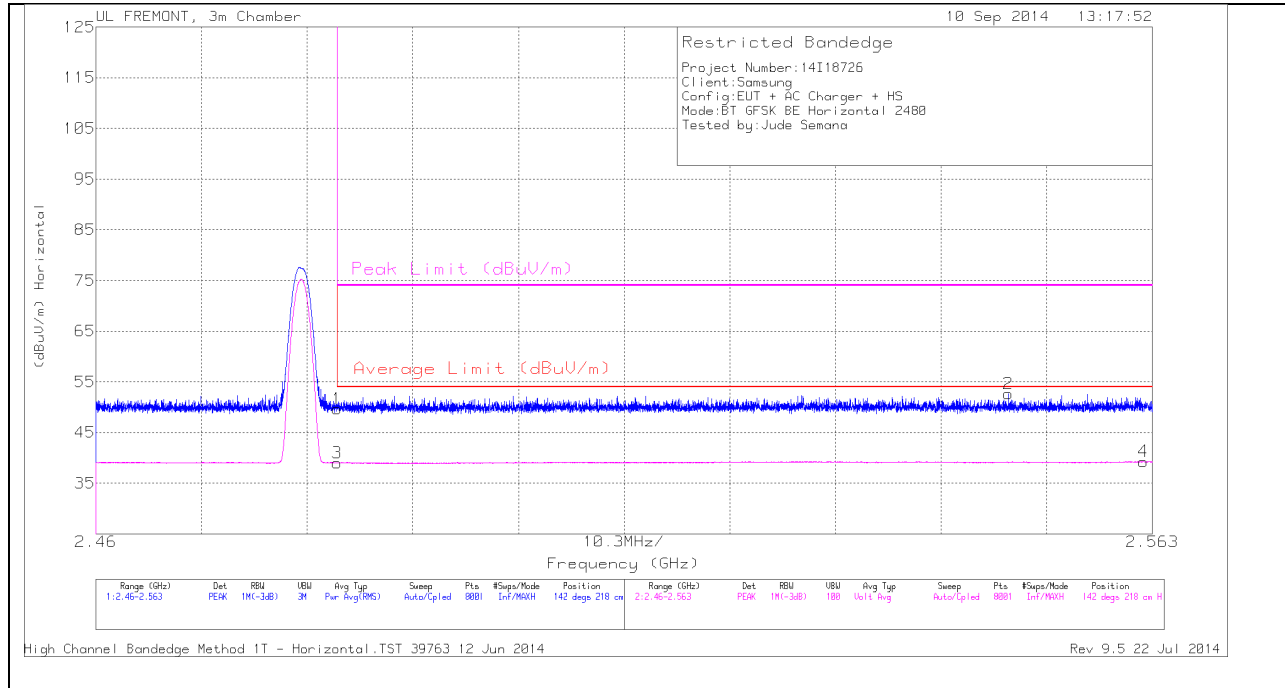

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	40.22	PK	32.3	-22.8	49.72	-	-	74	-24.28	142	218	H
3	2.484	29.5	VB1T	32.3	-22.8	39	54	-15	-	-	142	218	H
2	2.549	42.94	PK	32.4	-22.7	52.64	-	-	74	-21.36	142	218	H
4	2.562	29.6	VB1T	32.4	-22.7	39.3	54	-14.7	-	-	142	218	H


**VERTICAL PEAK AND AVERAGE PLOT**

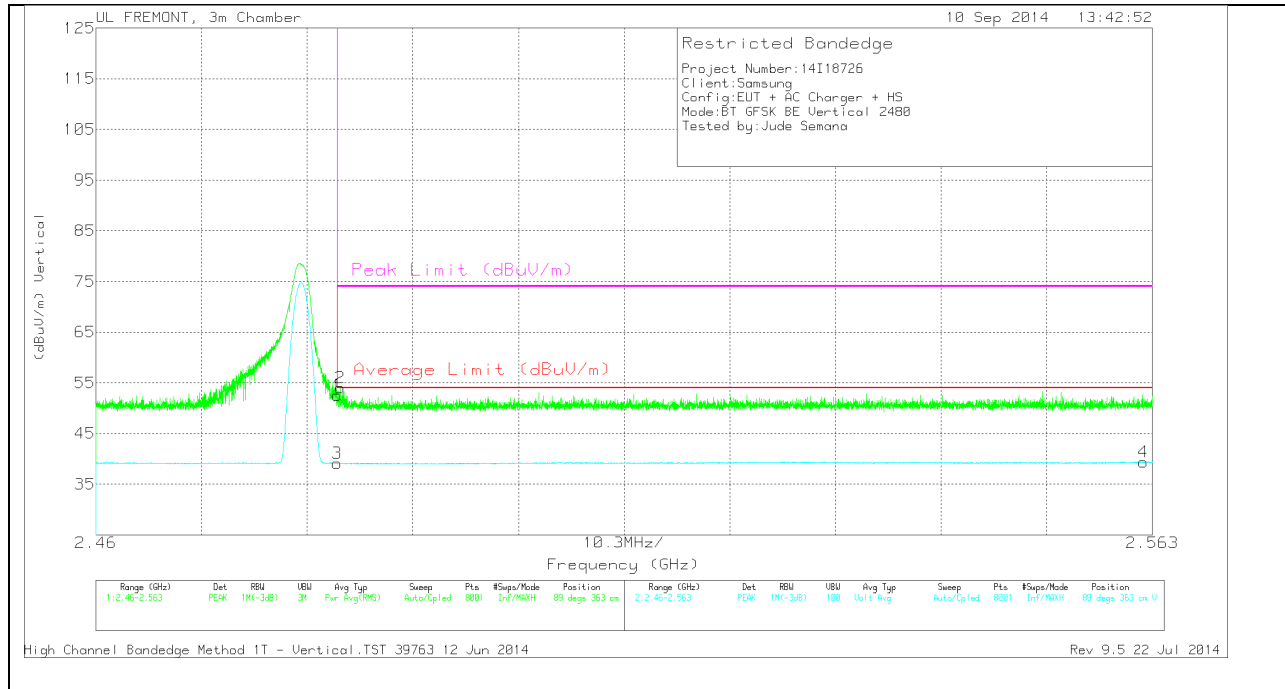

**VERTICAL DATA**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	43.03	PK	32.3	-22.8	52.53	-	-	74	-21.47	89	363	V
2	2.484	44.55	PK	32.3	-22.8	54.05	-	-	74	-19.95	89	363	V
3	2.484	29.63	VB1T	32.3	-22.8	39.13	54	-14.87	-	-	89	363	V
4	2.562	29.7	VB1T	32.4	-22.7	39.4	54	-14.6	-	-	89	363	V

## HARMONICS AND SPURIOUS EMISSIONS

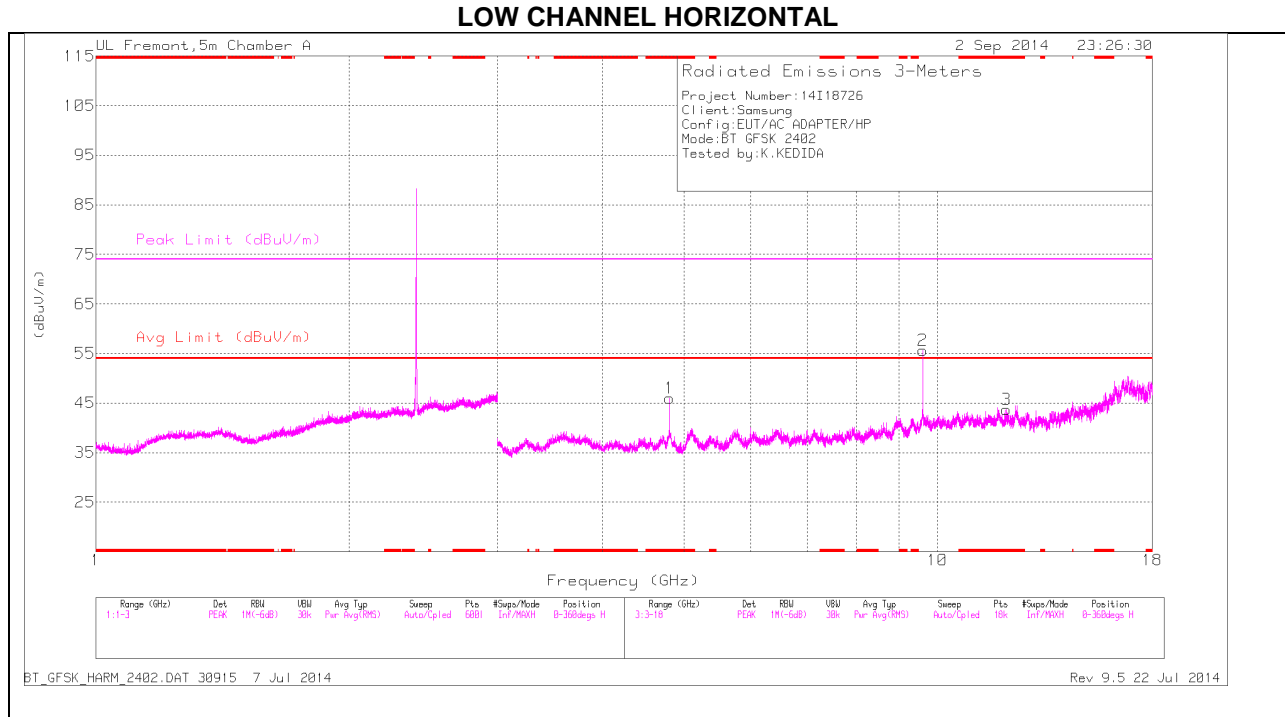

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

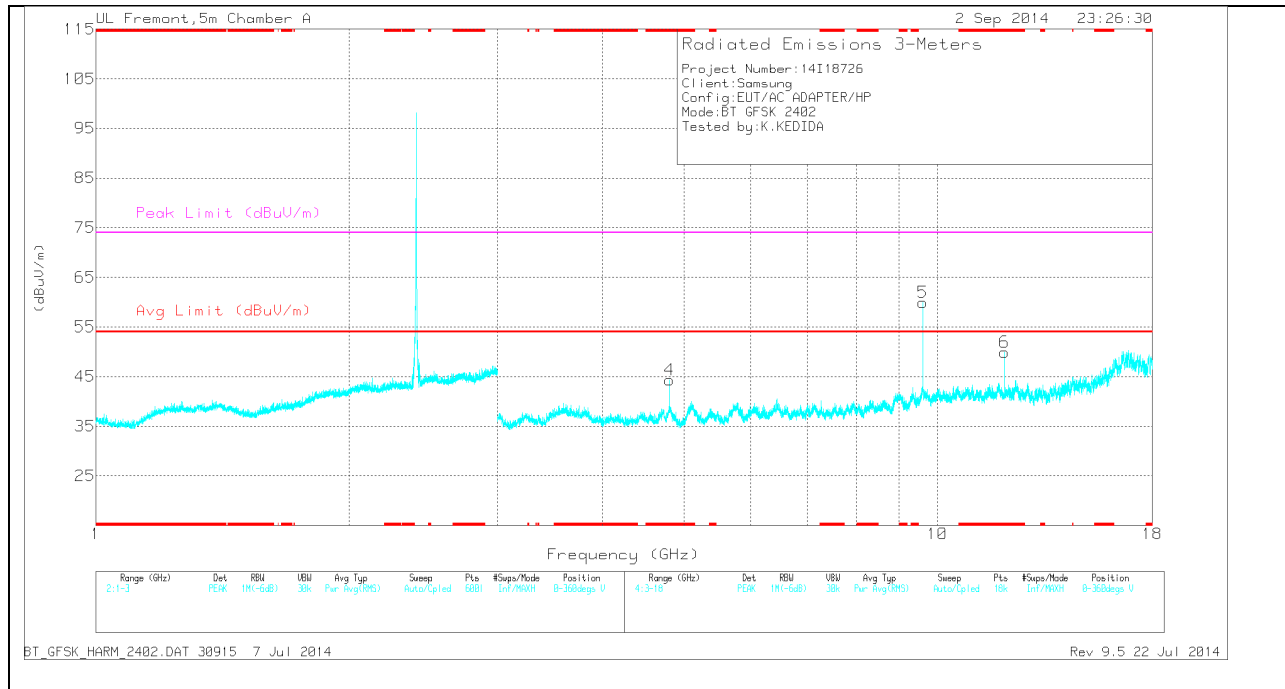

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	39.27	PK	34.1	-27.4	45.97	-	-	74	-28.03	0-360	201	H
3	* 12.079	27.19	PK	39	-22.5	43.69	-	-	74	-30.31	0-360	201	H
4	* 4.804	37.65	PK	34.1	-27.4	44.35	-	-	74	-29.65	0-360	201	V
6	* 12.01	34.23	PK	39	-23.3	49.93	-	-	74	-24.07	0-360	201	V
2	9.608	40.1	PK	36.9	-21.4	55.6	-	-	-	-	0-360	201	H
5	9.608	44.49	PK	36.9	-21.4	59.99	-	-	-	-	0-360	201	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	44.68	PK3	34.1	-27.4	51.38	-	-	74	-22.62	79	274	H
* 4.804	36.48	VB1T	34.1	-27.4	43.18	54	-10.82	-	-	79	274	H
9.608	48.84	PK3	36.9	-21.4	64.34	-	-	-	-	149	252	V
9.608	42.98	VB1T	36.9	-21.4	58.48	-	-	-	-	149	252	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**MID CHANNEL HORIZONTAL**

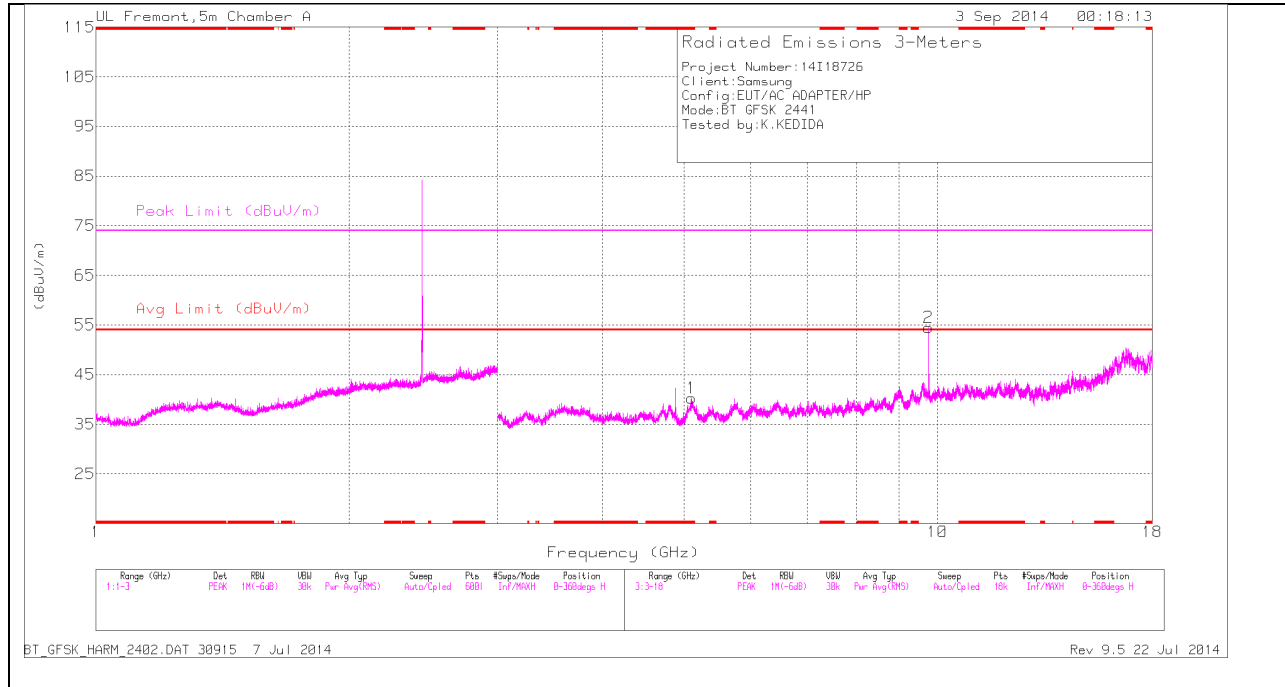

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL VERTICAL**

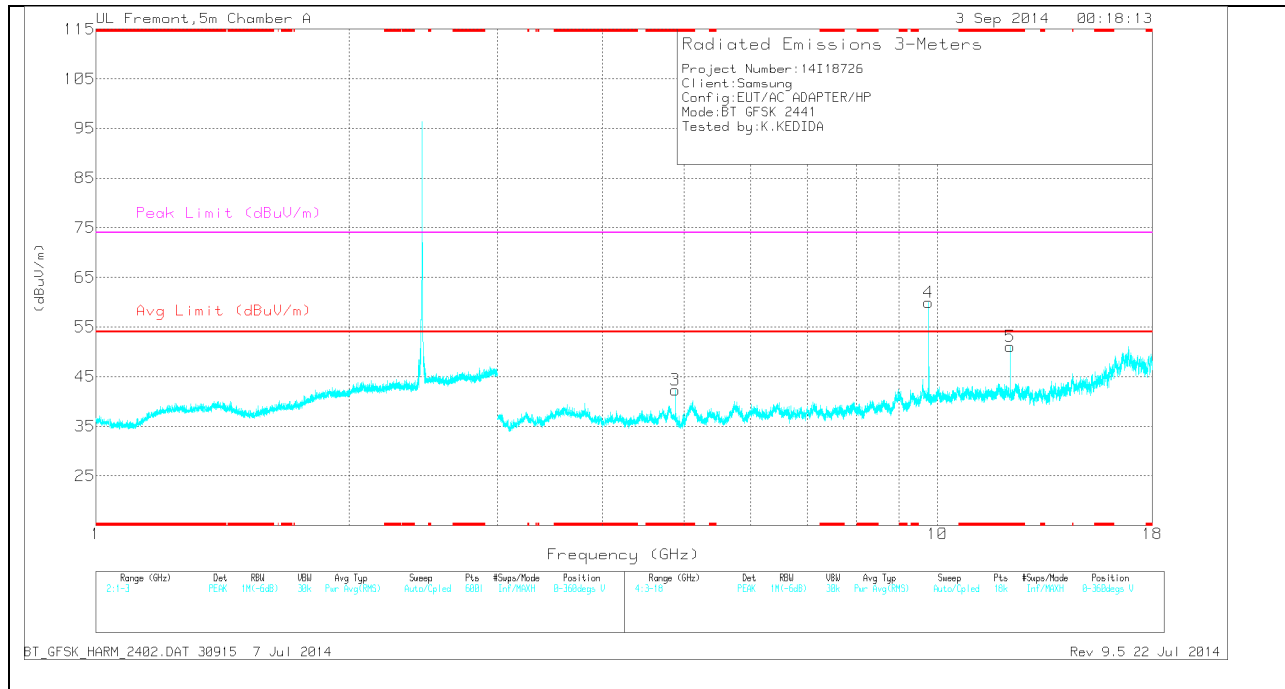

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.104	33.11	PK	34.3	-27.1	40.31	-	-	74	-33.69	0-360	201	H
3	* 4.882	35.98	PK	34.2	-27.9	42.28	-	-	74	-31.72	0-360	201	V
5	* 12.205	34.97	PK	38.9	-22.8	51.07	-	-	74	-22.93	0-360	201	V
2	9.764	40.52	PK	37.1	-23.1	54.52	-	-	-	-	0-360	201	H
4	9.764	45.93	PK	37.1	-23.1	59.93	-	-	-	-	0-360	201	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.882	42.5	PK3	34.2	-27.9	48.8	-	-	74	-25.2	228	256	V
* 4.882	34.48	VB1T	34.2	-27.9	40.78	54	-13.22	-	-	228	256	V
* 12.205	40.4	PK3	38.9	-22.8	56.5	-	-	74	-17.5	148	156	V
* 12.205	32.96	VB1T	38.9	-22.8	49.06	54	-4.94	-	-	148	156	V
9.764	50.05	PK3	37.1	-23.1	64.05	-	-	-	-	152	242	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**HIGH CHANNEL HORIZONTAL**

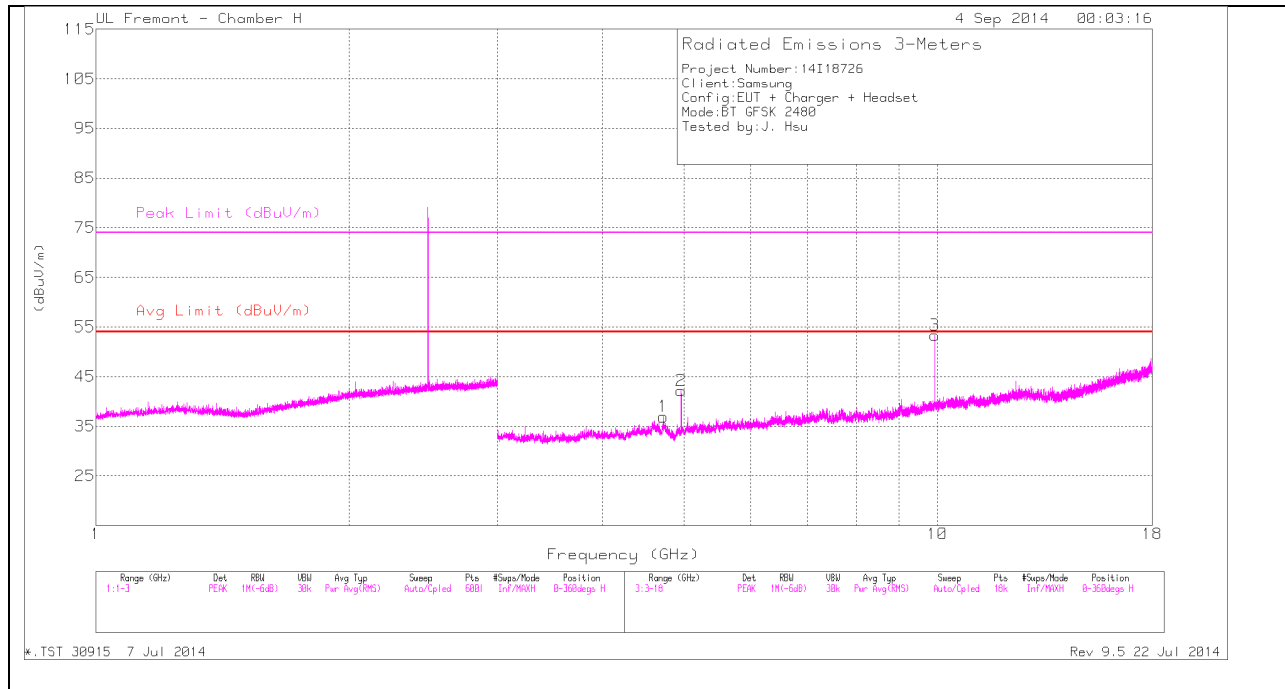

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### HIGH CHANNEL VERTICAL

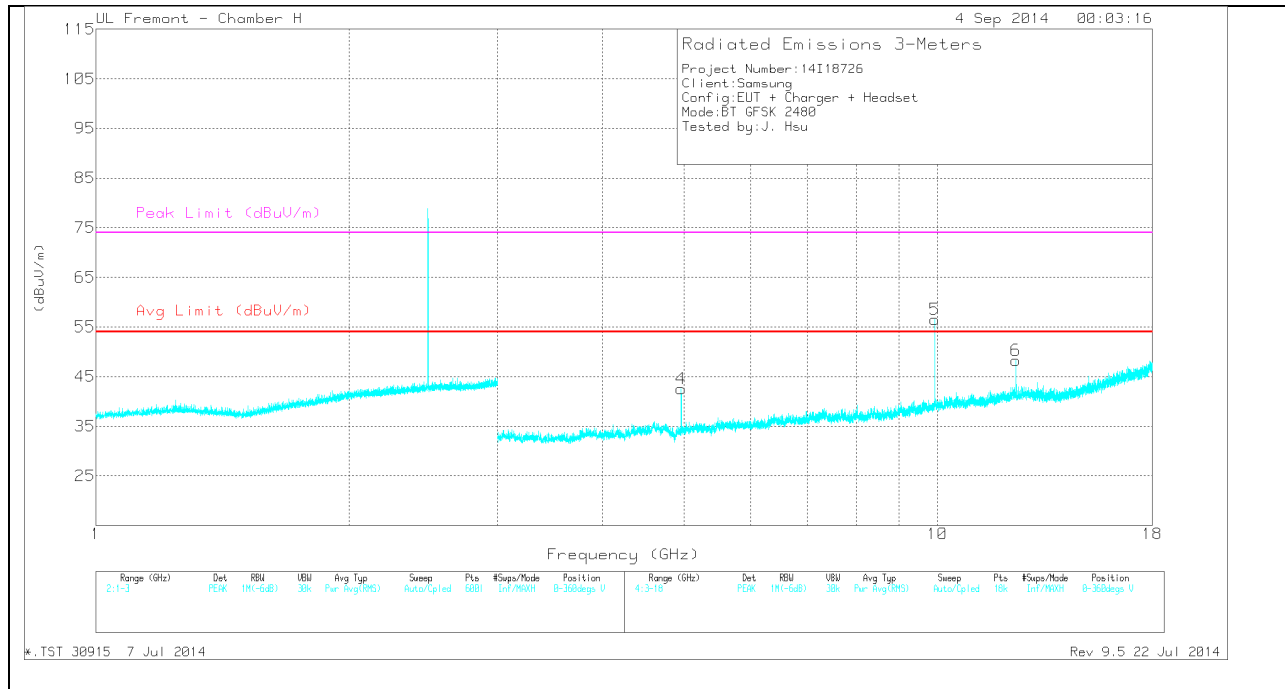

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.727	34.51	PK	34.3	-31.9	36.91	-	-	74	-37.09	0-360	201	H
2	* 4.96	39.65	PK	34.3	-31.8	42.15	-	-	74	-31.85	0-360	201	H
4	* 4.96	40.09	PK	34.3	-31.8	42.59	-	-	74	-31.41	0-360	201	V
6	* 12.4	35.04	PK	39.1	-25.9	48.24	-	-	74	-25.76	0-360	201	V
3	9.92	42.1	PK	37.2	-25.9	53.4	-	-	-	-	0-360	201	H
5	9.92	45.23	PK	37.2	-25.9	56.53	-	-	-	-	0-360	201	V

PK - Peak detector


*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	46.53	PK3	34.3	-31.8	49.03	-	-	74	-24.97	310	329	V
* 4.96	39.51	VB1T	34.3	-31.8	42.01	54	-11.99	-	-	310	329	V
* 12.4	43.42	PK3	39.1	-25.9	56.62	-	-	74	-17.38	111	130	V
* 12.4	35.48	VB1T	39.1	-25.9	48.68	54	-5.32	-	-	111	130	V
9.92	52.39	PK3	37.2	-25.9	63.69	-	-	-	-	115	253	V
9.92	45.63	VB1T	37.2	-25.9	56.93	-	-	-	-	115	253	V

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

## 9.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)


### HORIZONTAL PEAK AND AVERAGE PLOT

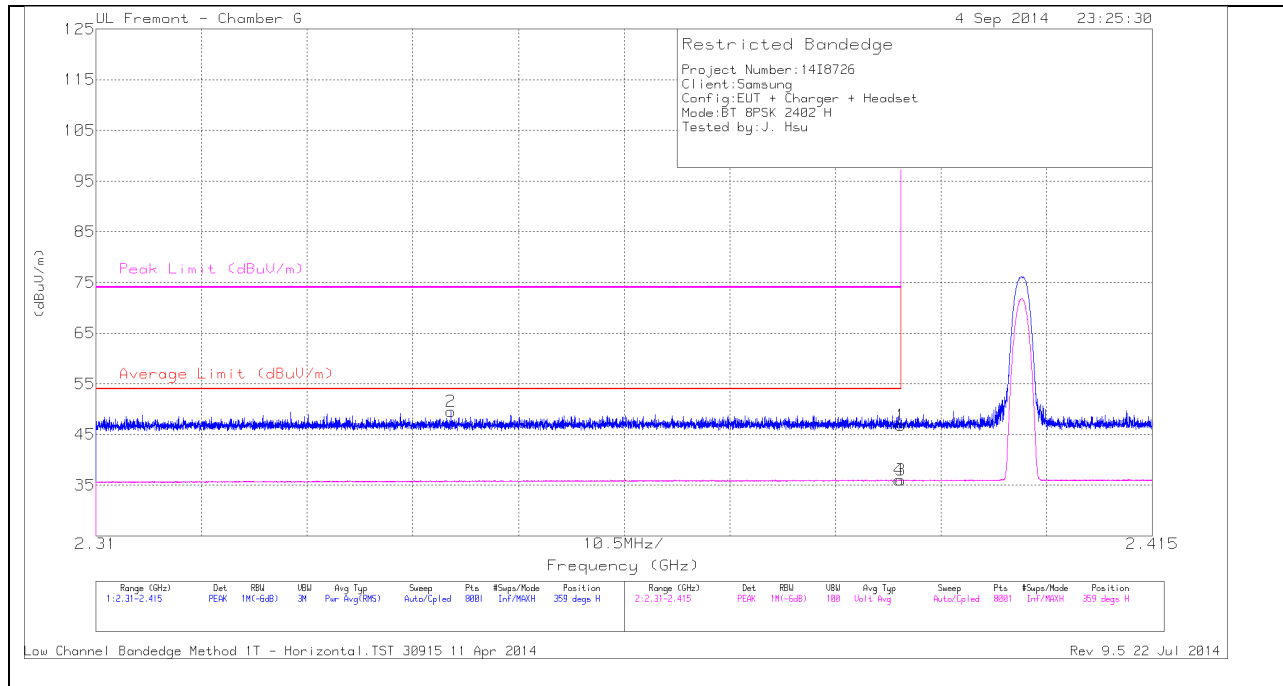

### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.345	42.8	PK	31.7	-25	49.5	-	-	74	-24.5	359	136	H
1	* 2.39	39.86	PK	31.8	-24.9	46.76	-	-	74	-27.24	359	136	H
3	* 2.39	29.08	VB1T	31.8	-24.9	35.98	54	-18.02	-	-	359	136	H
4	* 2.39	29.17	VB1T	31.8	-24.9	36.07	54	-17.93	-	-	359	136	H

**VERTICAL PEAK AND AVERAGE PLOT**

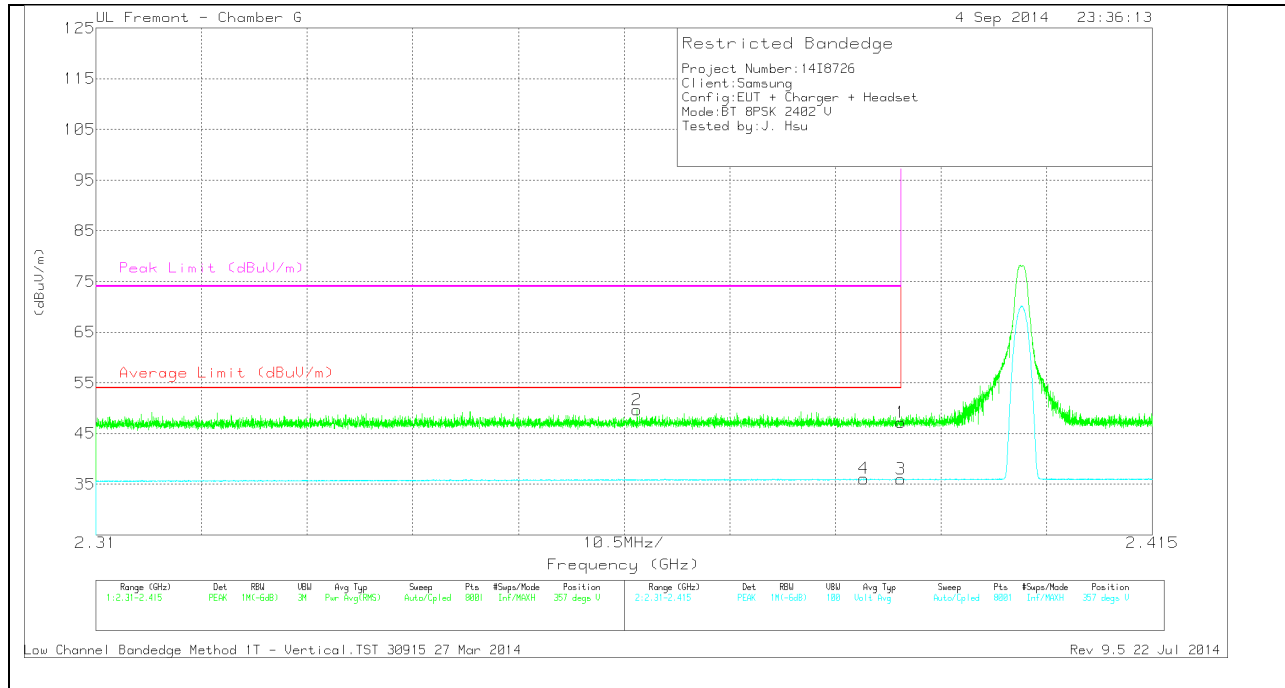


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.27	PK	31.8	-24.9	47.17	-	-	74	-26.83	357	207	V
2	* 2.364	42.86	PK	31.7	-24.9	49.66	-	-	74	-24.34	357	207	V
3	* 2.39	29.1	VB1T	31.8	-24.9	36	54	-18	-	-	357	207	V
4	* 2.386	29.18	VB1T	31.8	-24.9	36.08	54	-17.92	-	-	357	207	V

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

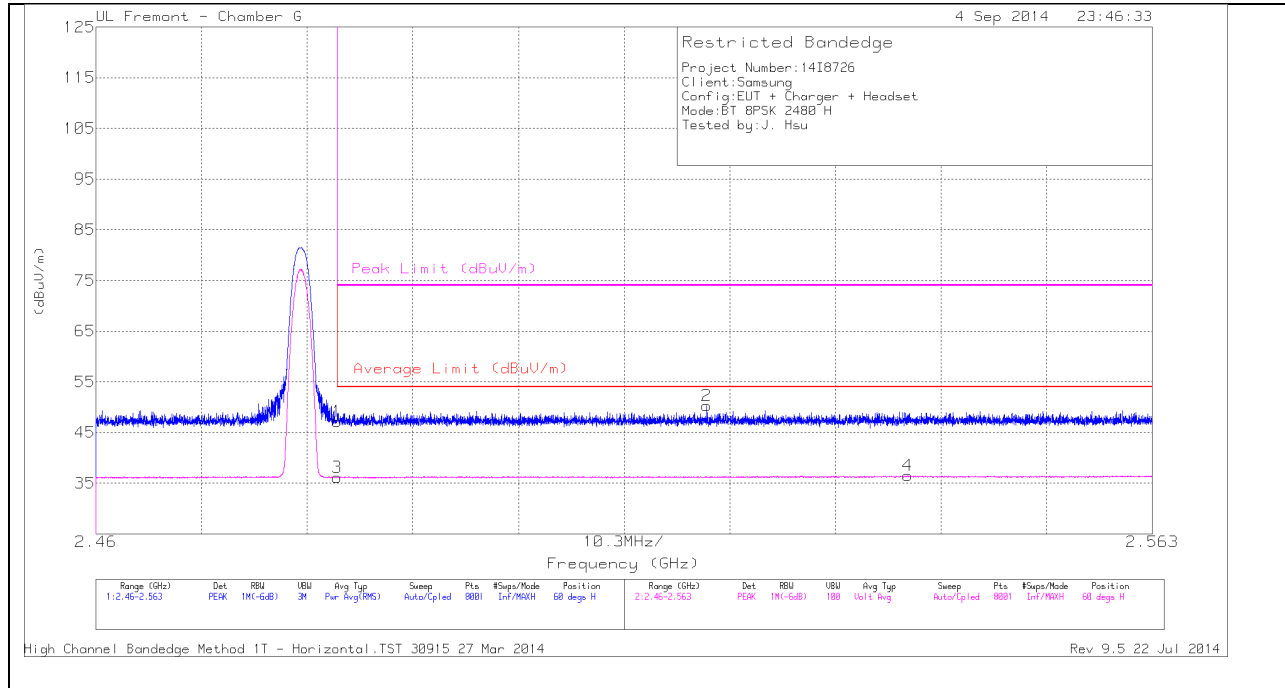

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.12	PK	32	-24.9	47.22	-	-	74	-26.78	60	208	H
3	* 2.484	29	VB1T	32	-24.9	36.1	54	-17.9	-	-	60	208	H
2	2.52	43.17	PK	32	-24.9	50.27	-	-	74	-23.73	60	208	H
4	2.539	29.38	VB1T	32	-24.9	36.48	54	-17.52	-	-	60	208	H


**VERTICAL PEAK AND AVERAGE PLOT**

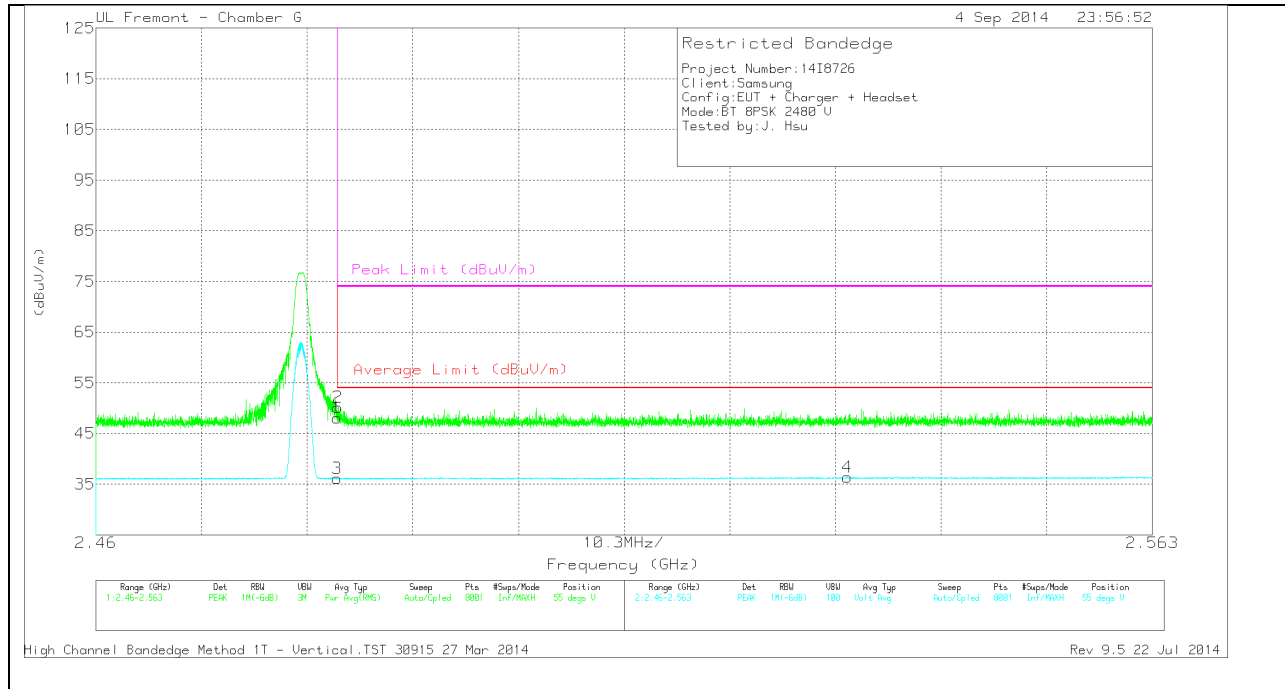

**VERTICAL DATA**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.9	PK	32	-24.9	48	-	-	74	-26	55	175	V
2	* 2.484	43.11	PK	32	-24.9	50.21	-	-	74	-23.79	55	175	V
3	* 2.484	29.01	VB1T	32	-24.9	36.11	54	-17.89	-	-	55	175	V
4	2.533	29.31	VB1T	32	-24.9	36.41	54	-17.59	-	-	55	175	V

### HARMONICS AND SPURIOUS EMISSIONS

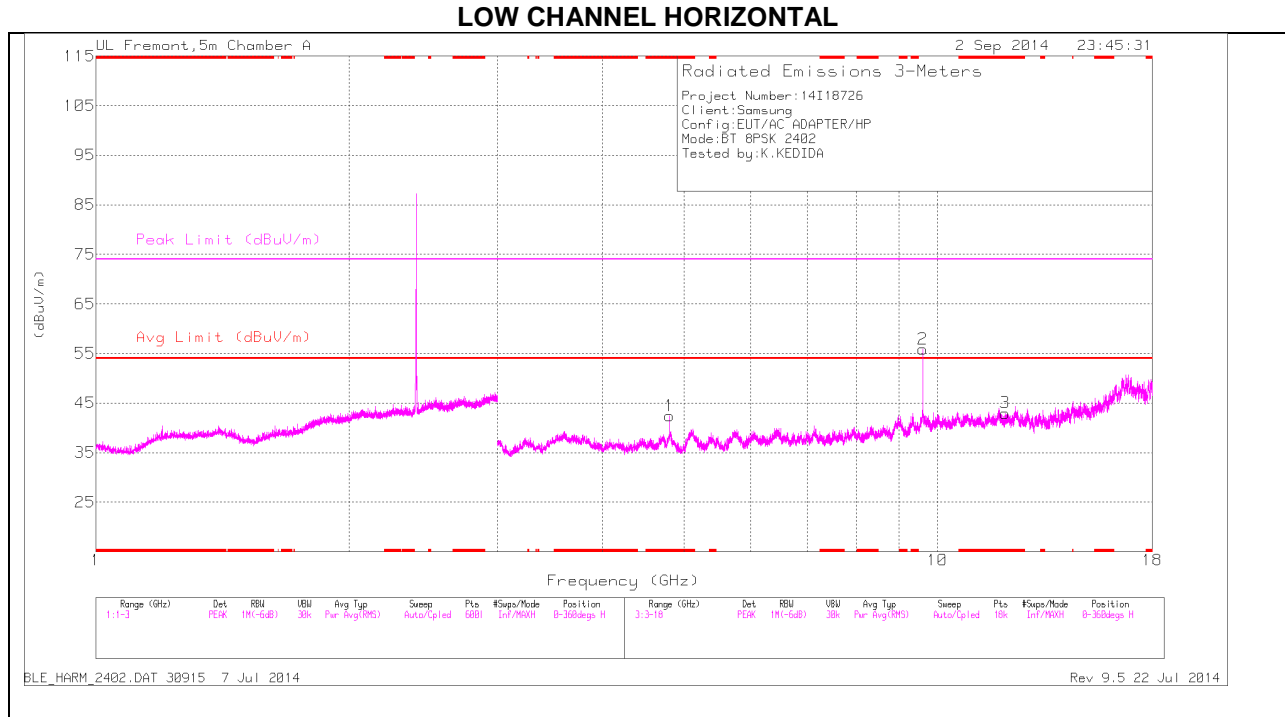

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

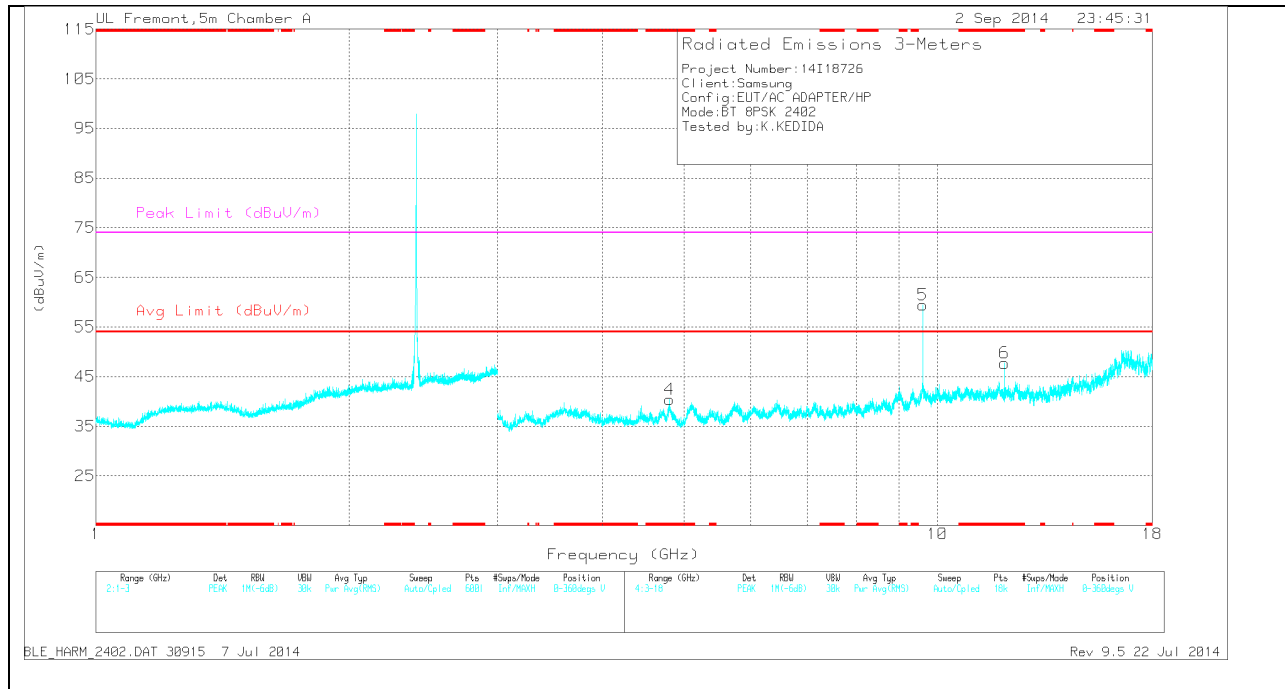

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	35.75	PK	34.1	-27.4	42.45	-	-	74	-31.55	0-360	201	H
3	* 12.027	26.3	PK	39	-22.3	43	-	-	74	-31	0-360	201	H
4	* 4.803	33.73	PK	34.1	-27.4	40.43	-	-	74	-33.57	0-360	201	V
6	* 12.01	32	PK	39	-23.3	47.7	-	-	74	-26.3	0-360	201	V
2	9.608	40.41	PK	36.9	-21.4	55.91	-	-	-	-	0-360	201	H
5	9.608	43.95	PK	36.9	-21.4	59.45	-	-	-	-	0-360	201	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	43.07	PK3	34.1	-27.4	49.77	-	-	74	-24.23	74	273	H
* 4.804	31.86	VB1T	34.1	-27.4	38.56	54	-15.44	-	-	74	274	H
9.608	48.74	PK3	36.9	-21.4	64.24	-	-	-	-	150	252	V
9.608	44.48	VB1T	36.9	-21.4	59.98	-	-	-	-	150	252	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**MID CHANNEL HORIZONTAL**

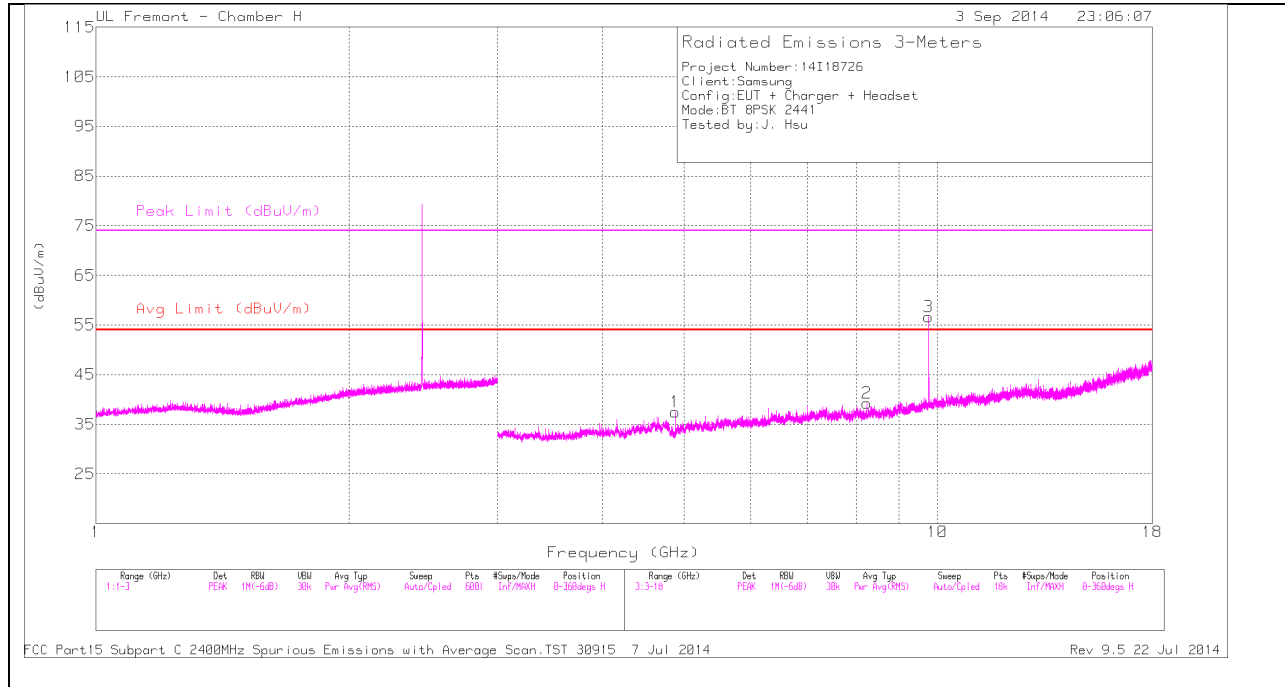

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL VERTICAL**

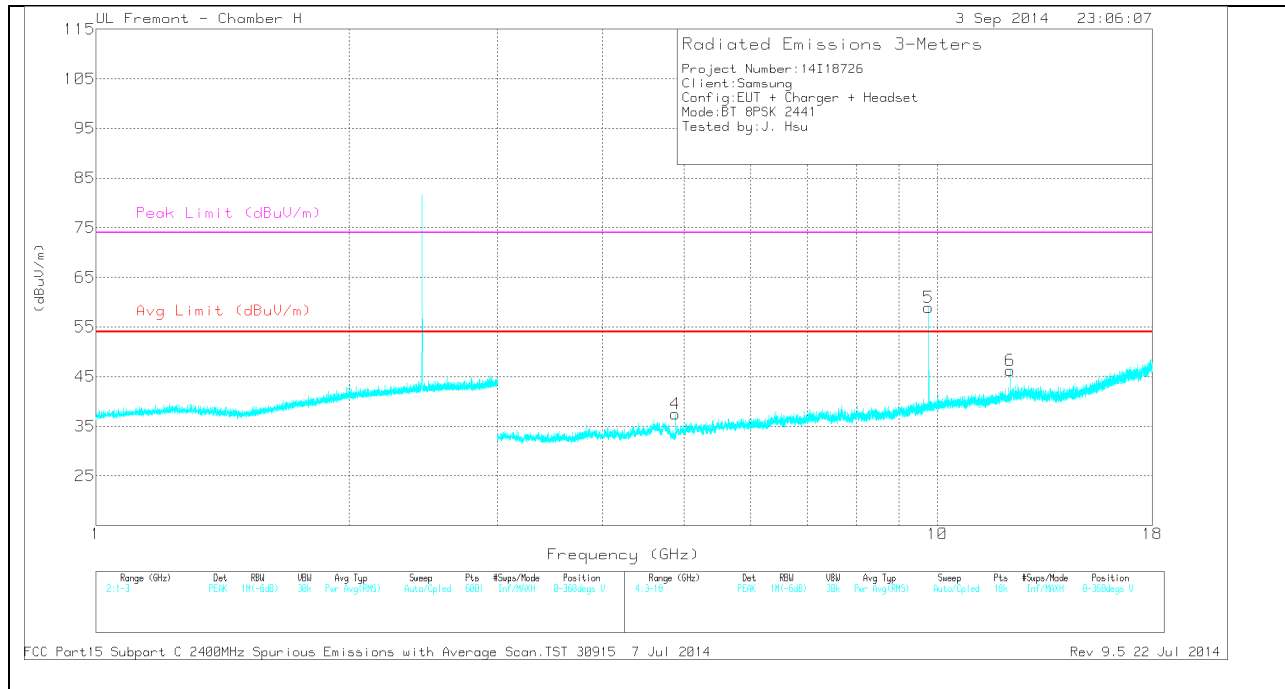

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.882	35.23	PK	34.3	-32.1	37.43	-	-	74	-36.57	0-360	100	H
2	* 8.24	32.28	PK	36.1	-29.1	39.28	-	-	74	-34.72	0-360	201	H
4	* 4.882	35.3	PK	34.3	-32.1	37.5	-	-	74	-36.5	0-360	201	V
6	* 12.205	32.6	PK	39	-25.4	46.2	-	-	74	-27.8	0-360	201	V
3	9.764	46.27	PK	36.9	-26.5	56.67	-	-	-	-	0-360	201	H
5	9.764	48.56	PK	36.9	-26.5	58.96	-	-	-	-	0-360	201	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 12.205	39.68	PK3	39	-25.4	53.28	-	-	74	-20.72	114	157	V
* 12.205	29.83	VB1T	39	-25.4	43.43	54	-10.57	-	-	114	157	V
9.764	52.54	PK3	36.9	-26.5	62.94	-	-	-	-	106	259	V
9.764	47.84	VB1T	36.9	-26.5	58.24	-	-	-	-	106	259	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**HIGH CHANNEL HORIZONTAL**

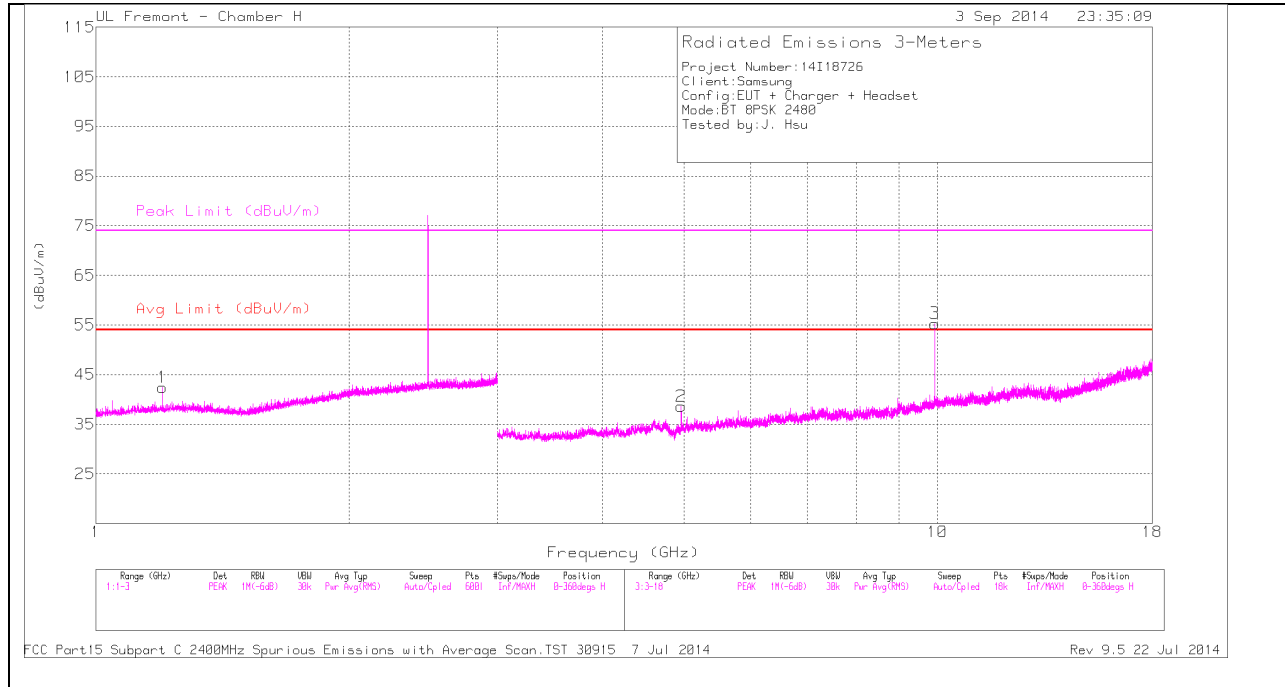

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL VERTICAL**

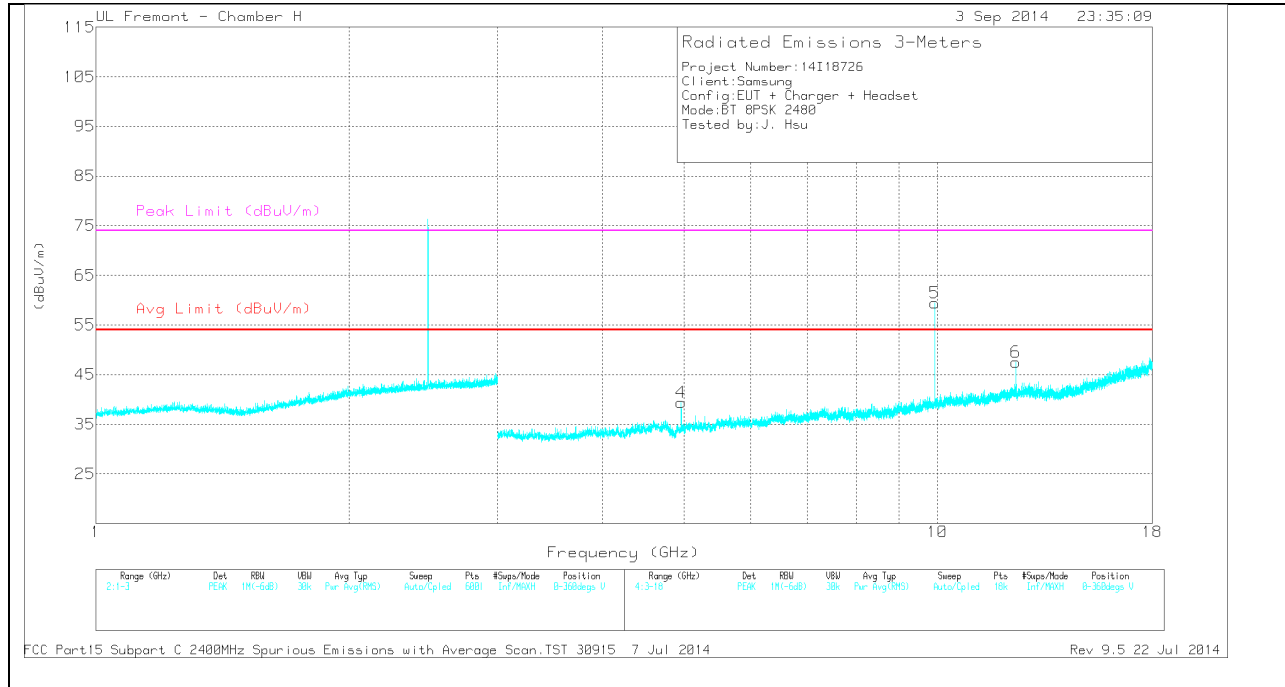

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.2	39.61	PK	28.7	-25.9	42.41	-	-	74	-31.59	0-360	201	H
2	* 4.96	36.13	PK	34.3	-31.8	38.63	-	-	74	-35.37	0-360	201	H
4	* 4.96	36.88	PK	34.3	-31.8	39.38	-	-	74	-34.62	0-360	201	V
6	* 12.4	34.33	PK	39.1	-25.9	47.53	-	-	74	-26.47	0-360	201	V
3	9.92	44.01	PK	37.2	-25.9	55.31	-	-	-	-	0-360	201	H
5	9.92	48.16	PK	37.2	-25.9	59.46	-	-	-	-	0-360	201	V

PK - Peak detector


*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	45.24	PK3	34.3	-31.8	47.74	-	-	74	-26.26	309	332	V
* 4.96	34.78	VB1T	34.3	-31.8	37.28	54	-16.72	-	-	309	332	V
* 12.4	40.72	PK3	39.1	-25.9	53.92	-	-	74	-20.08	109	118	V
* 12.4	31.37	VB1T	39.1	-25.9	44.57	54	-9.43	-	-	109	118	V
9.92	52.19	PK3	37.2	-25.9	63.49	-	-	-	-	114	294	V
9.92	46.88	VB1T	37.2	-25.9	58.18	-	-	-	-	114	294	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

### 9.3. WORST-CASE BELOW 1 GHz

#### GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

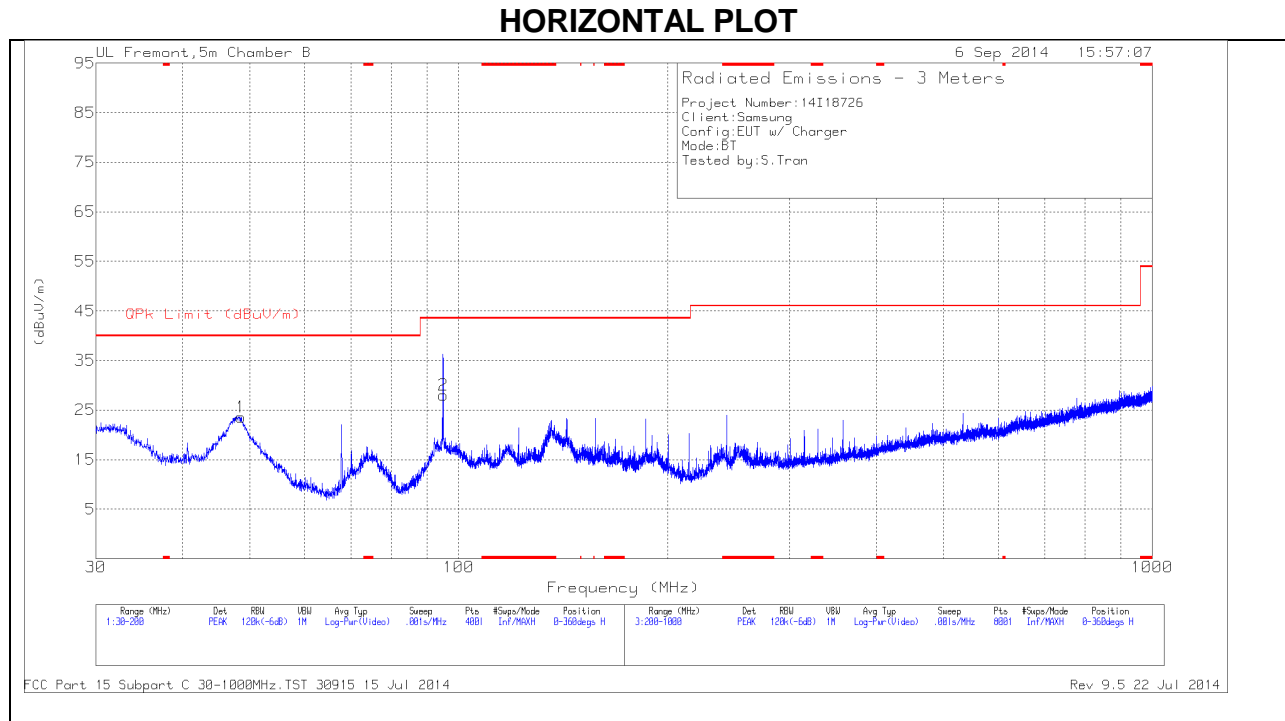

### VERTICAL PLOT

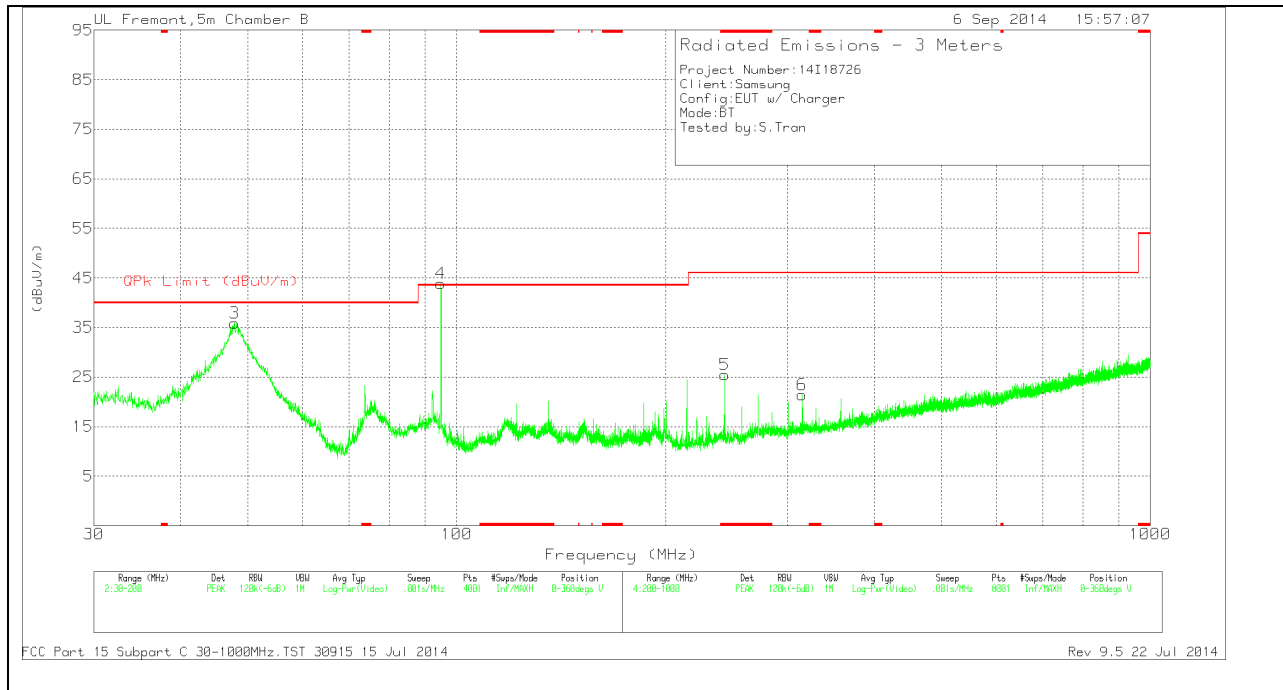

**BELOW 1 GHz TABLE**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 243.4	40.21	PK	11.7	-26.4	25.51	46.02	-20.51	0-360	200	V
3	47.85	55.55	PK	8.9	-28.6	35.85	40	-4.15	0-360	101	V
1	48.5725	43.48	PK	8.6	-28.5	23.58	40	-16.42	0-360	400	H
4	94.8975	63.18	PK	8.8	-28.1	43.88	43.52	.36	0-360	101	V
2	95.0675	47.29	PK	8.8	-28.1	27.99	43.52	-15.53	0-360	400	H
6	315	33.54	PK	13.8	-25.9	21.44	46.02	-24.58	0-360	101	V

PK - Peak detector

**Radiated Emissions**

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
94.8975	45.4	QP	8.8	-28.1	26.1	43.52	-17.42	359	101	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

QP - Quasi-Peak detector

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

**6 WORST EMISSIONS**

**LINE 1 PLOT**

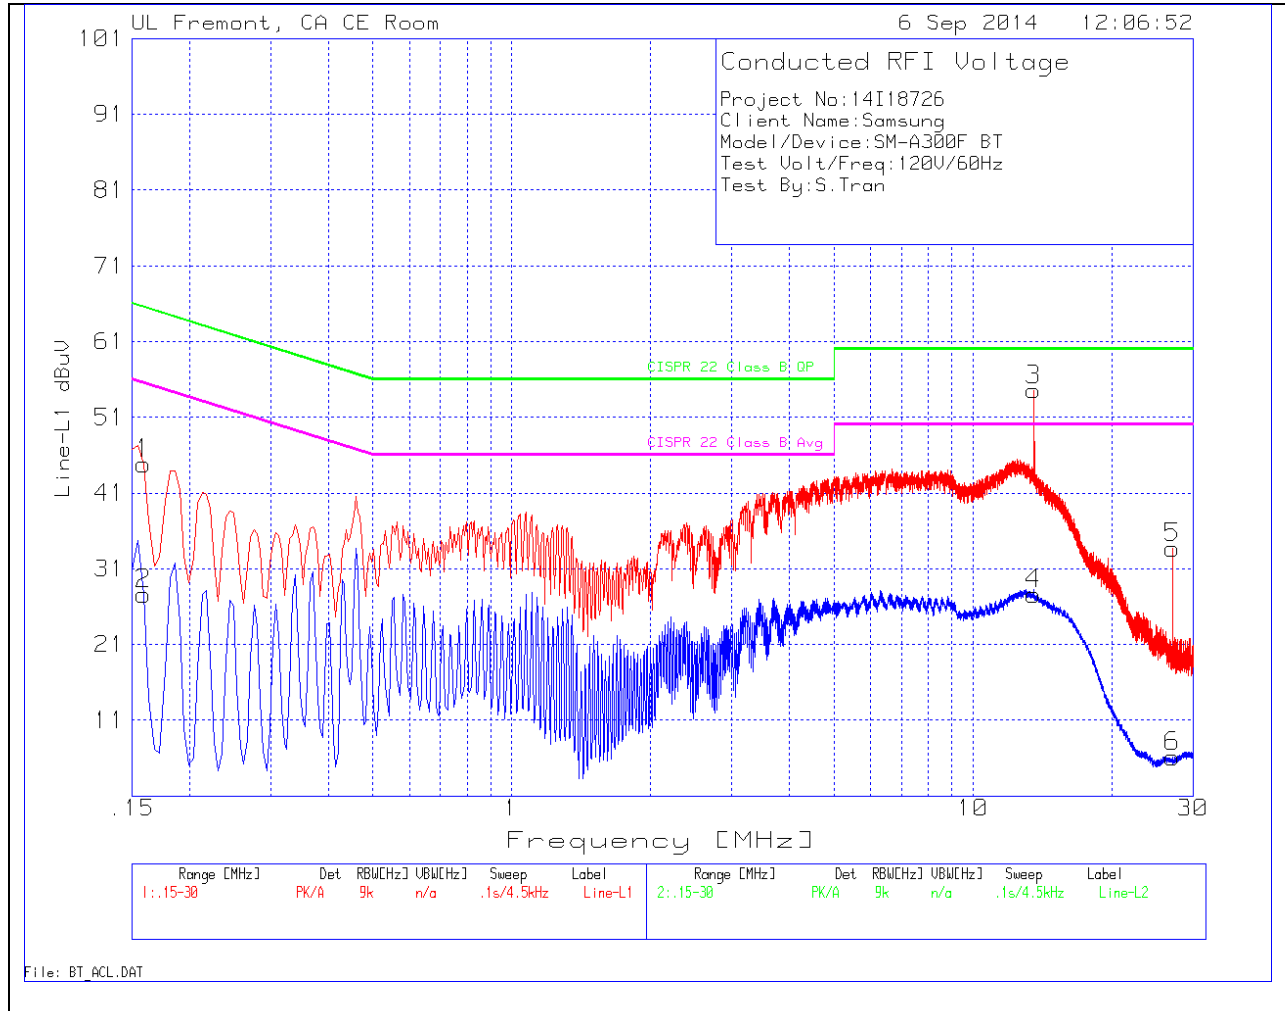


### LINE 1 RESULTS

#### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.159	43.5	PK	1.3	0	44.8	65.5	-20.7	-	-
2	.159	26.35	Av	1.3	0	27.65	-	-	55.5	-27.85
3	13.56	54.19	PK	.2	.2	54.59	60	-5.41	-	-
4	13.56	27.25	Av	.2	.2	27.65	-	-	50	-22.35
5	27.1185	33.14	PK	.3	.3	33.74	60	-26.26	-	-
6	27.1185	5.54	Av	.3	.3	6.14	-	-	50	-43.86

### LINE 2 PLOT

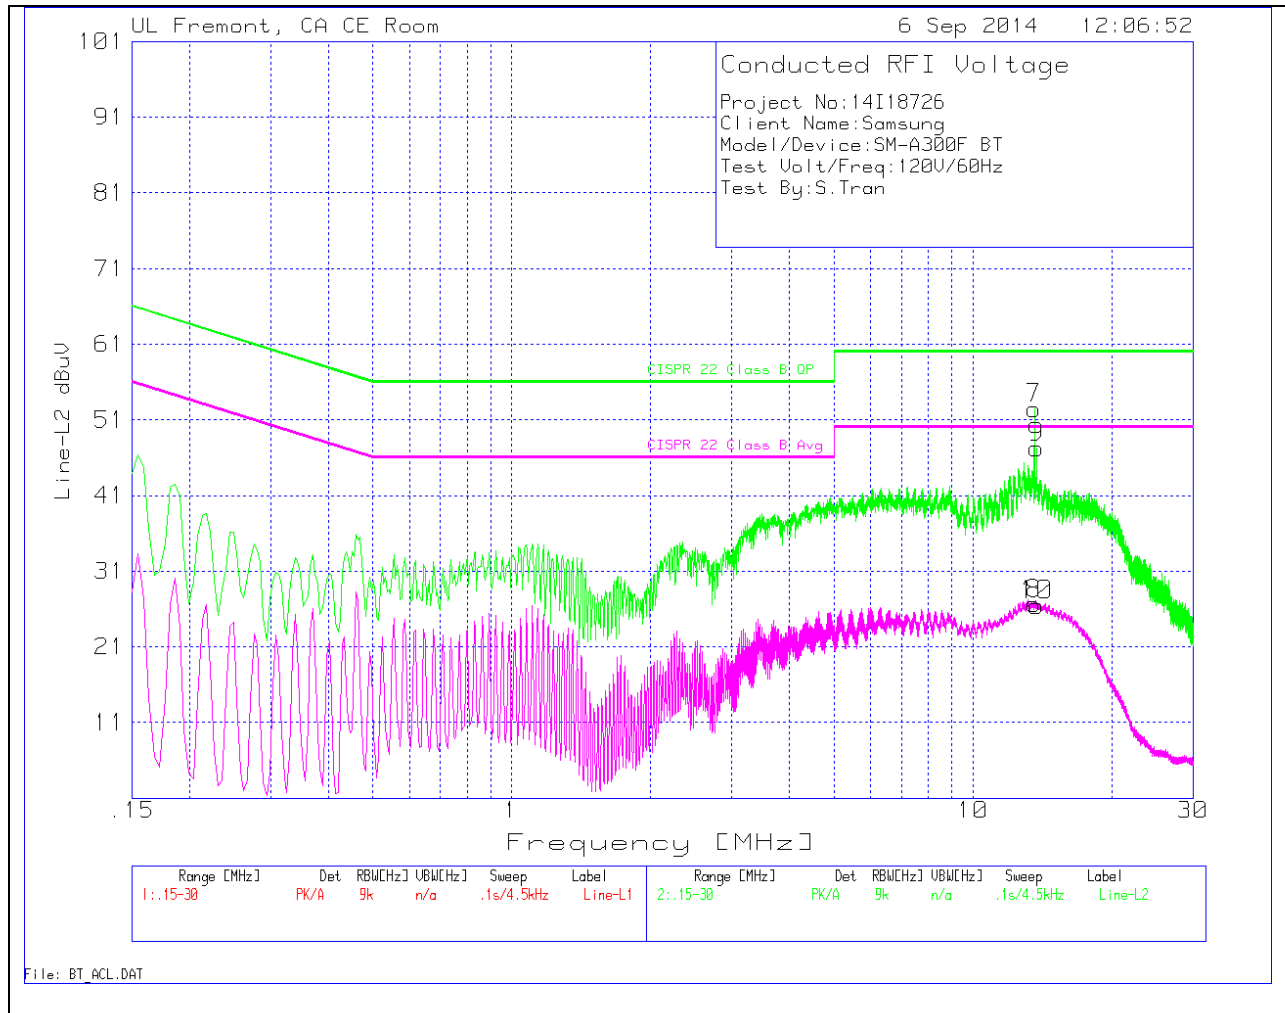

## LINE 2 RESULTS

### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
7	13.5735	51.92	PK	.3	.2	52.42	60	-7.58	-	-
8	13.5735	26.14	Av	.3	.2	26.64	-	-	50	-23.36
9	13.767	46.79	PK	.3	.2	47.29	60	-12.71	-	-
10	13.767	25.94	Av	.3	.2	26.44	-	-	50	-23.56
11	13.767	46.79	PK	.3	.2	47.29	60	-12.71	-	-
12	13.767	25.94	Av	.3	.2	26.44	-	-	50	-23.56