

# FCC BT LE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Address:**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Date of Issue:**  
January 21, 2021

**Test Site/Location:**  
74, Seocheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

**Report No.:** HCT-RF-2101-FC084

**FCC ID:** A3LSMA325M

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

**Model:** SM-A325M/DS

**Additional Model:** SM-A325M

**EUT Type:** Mobile Phone

**Average Output Power:** 6.09 dBm (4.06 mW)

**Frequency Range:** 2 402 MHz ~ 2 480 MHz

**Modulation type** GFSK

**FCC Classification:** Digital Transmission System(DTS)

**FCC Rule Part(s):** Part 15.247

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

## REVIEWED BY

Report prepared by : Woong Jin Kim  
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.  
The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2101-FC084	January 21, 2021	- First Approval Report

# Table of Contents

REVIEWED BY .....	2
1. EUT DESCRIPTION .....	5
2. TEST METHODOLOGY .....	6
EUT CONFIGURATION.....	6
EUT EXERCISE.....	6
GENERAL TEST PROCEDURES.....	6
DESCRIPTION OF TEST MODES .....	7
3. INSTRUMENT CALIBRATION .....	7
4. FACILITIES AND ACCREDITATIONS.....	7
FACILITIES.....	7
EQUIPMENT.....	7
5. ANTENNA REQUIREMENTS.....	8
6. MEASUREMENT UNCERTAINTY .....	8
7. DESCRIPTION OF TESTS .....	9
8. SUMMARY TEST OF RESULTS .....	24
9. TEST RESULT .....	25
9.1 DUTY CYCLE .....	25
9.2 6dB BANDWIDTH .....	30
9.3 OUTPUT POWER.....	39
9.4 POWER SPECTRAL DENSITY .....	41
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	44
9.6 RADIATED SPURIOUS EMISSIONS .....	60
9.7 RADIATED RESTRICTED BAND EDGES.....	66
9.8 POWERLINE CONDUCTED EMISSIONS .....	68
10. LIST OF TEST EQUIPMENT.....	72
11. ANNEX A_ TEST SETUP PHOTO.....	74

**1. EUT DESCRIPTION**

<b>Model</b>	SM-A325M/DS	
<b>Additional Model</b>	SM-A325M	
<b>EUT Type</b>	Mobile Phone	
<b>Power Supply</b>	DC 3.86 V	
<b>Frequency Range</b>	2 402 MHz ~ 2 480 MHz	
<b>Max. RF Output Power</b>	Peak (For information only)	125k Bit/s : 6.121 dBm (4.09 mW) 500k Bit/s : 6.186 dBm (4.16 mW) 1M Bit/s : 6.158 dBm (4.13 mW) 2M Bit/s : 6.256 dBm (4.22 mW)
	Average	125k Bit/s : 5.93 dBm (3.91 mW) 500k Bit/s : 6.08 dBm (4.06 mW) 1M Bit/s : 6.01 dBm (3.99 mW) 2M Bit/s : 6.09 dBm (4.06 mW)
<b>Modulation Type</b>	GFSK	
<b>Bluetooth Version</b>	5.0	
<b>Number of Channels</b>	40 Channels	
<b>Date(s) of Tests</b>	December 23, 2020 ~ January 20, 2021	
<b>Serial number</b>	Radiated : R38NC01F3VV Conducted : R38NC01F2JD	

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled "guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

## GENERAL TEST PROCEDURES

### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

**DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

**3. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

**4. FACILITIES AND ACCREDITATIONS****FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

**EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

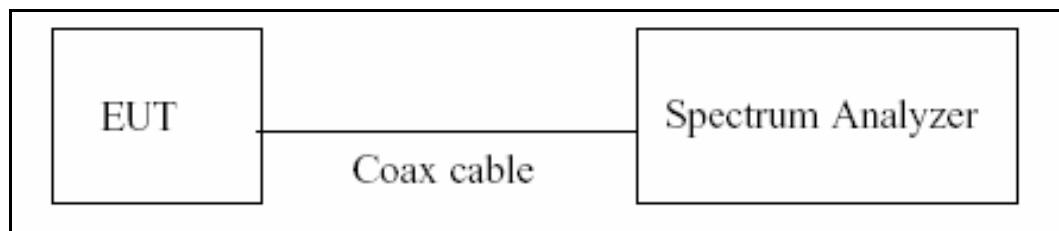

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02,

Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
  - : Measure the peak power of the transmitter.
  
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log (1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

#### 7.4. Power Spectral Density

##### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3 kHz BW.

##### Test Configuration

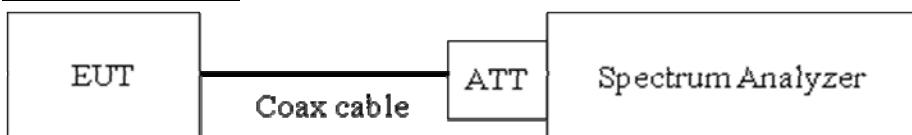

##### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) RBW = 3 kHz  $\leq$  RBW  $\leq$  100 kHz.
- 4) VBW  $\geq$  3 x RBW.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.  
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

##### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration

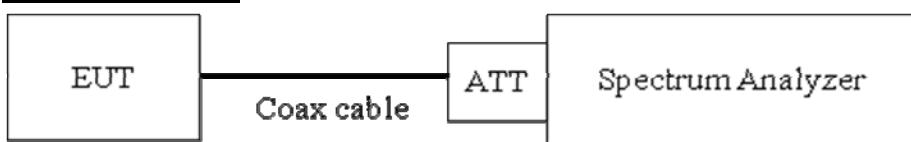

### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq$  2 x Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	10.04
100	10.07
200	10.12
300	10.17
400	10.20
500	10.21
600	10.21
700	10.23
800	10.24
900	10.26
1000	10.27
2000	10.41
2400	10.45
2500	10.47
3000	10.52
4000	10.60
5000	10.71
6000	10.73
7000	10.80
8000	10.85
9000	10.91
10000	10.97
11000	11.02
12000	11.10
13000	11.19
14000	11.16
15000	11.21
16000	11.22
17000	11.25
18000	11.30
19000	11.32
20000	11.36
21000	11.48
22000	11.55
23000	11.55
24000	11.59
25000	11.68
26000	11.69

Note : 1. 2 400 ~ 2 500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(10 dB) + Cable loss(1ea) + EUT cable (0.2 dB)


## 7.6. Radiated Test

### Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Test Configuration


Below 30 MHz

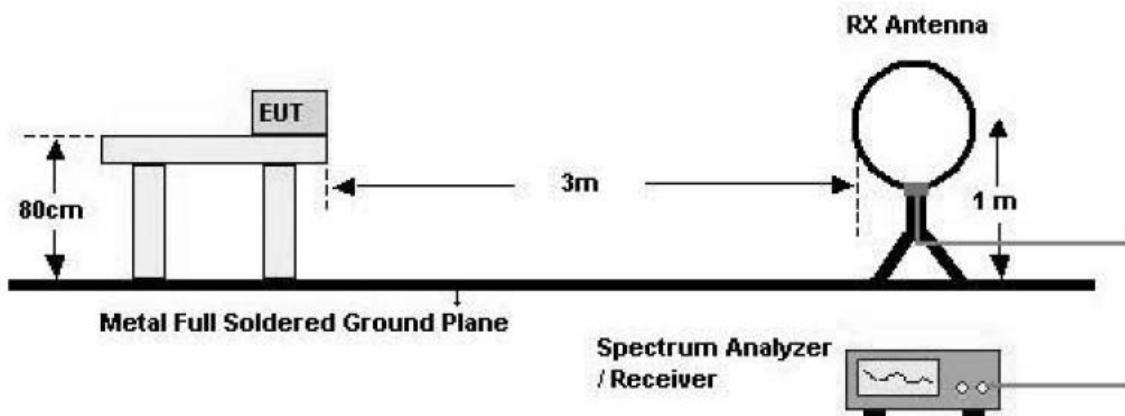

30 MHz - 1 GHz

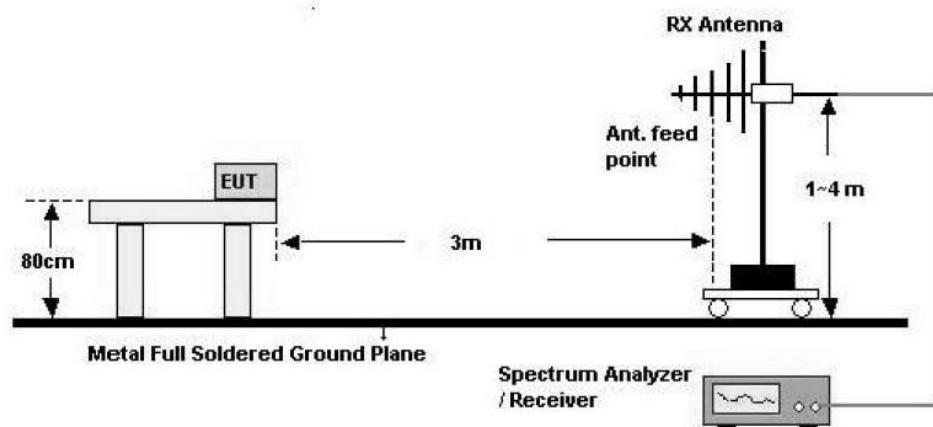

Above 1 GHz

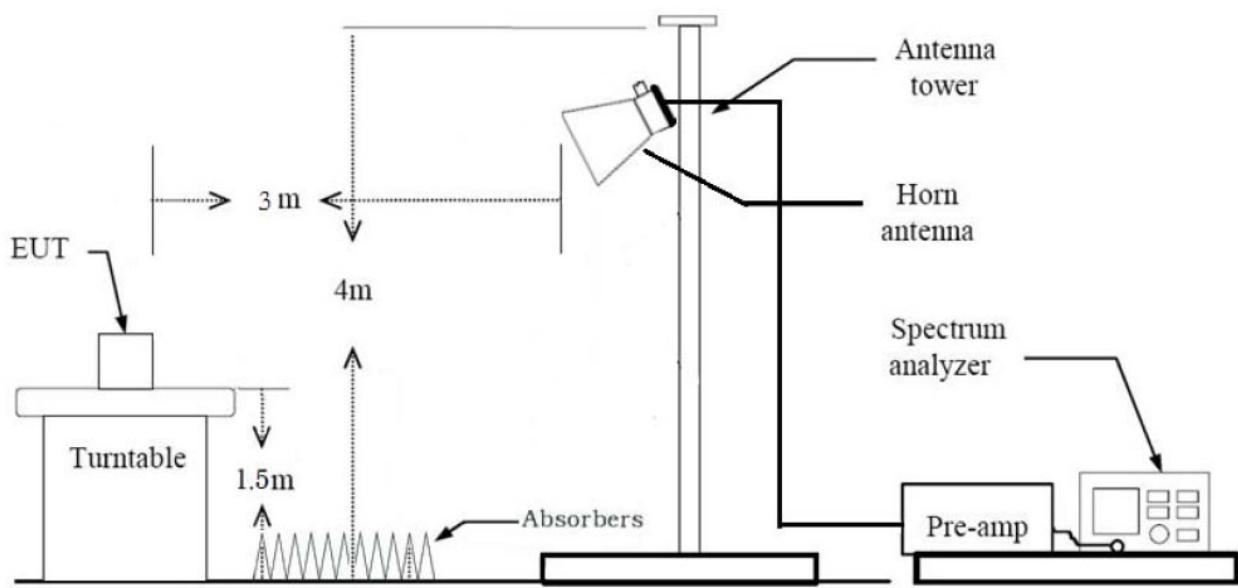

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor( $0.009 \text{ MHz} - 0.490 \text{ MHz}$ ) =  $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor( $0.490 \text{ MHz} - 30 \text{ MHz}$ ) =  $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$

Measurement Distance : 3 m

**8. Spectrum Setting**

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW  $\geq 3 \times \text{RBW}$

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

## (1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

## (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

## (1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

## (2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
  - Measured Frequency Range : 1 GHz – 25 GHz
  - Detector = RMS
  - Averaging type = power (*i.e.*, RMS)
  - RBW = 1 MHz
  - VBW  $\geq$  3 x RBW
  - Sweep time = auto.
  - Trace mode = average (at least 100 traces).
  - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
  11. Total (Measurement Type : Peak)  
= Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## Total (Measurement Type : Average)

$$= \text{Average Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)}$$

+ Distance Factor(D.F) + Duty Cycle Factor

### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak

$$= \text{Peak Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average)

= Average Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)  
+ Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

### 7.8. Worst case configuration and mode

#### Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis:
  - Radiated Spurious Emissions : X
  - Radiated Restricted Band Edge : X,Z
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.  
(Worst case : 37 Byte)
4. All datarate of operation were investigated and the worst case configuration results are reported.  
(Worst case : 500K, 2M)
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane
6. SM-A325M/DS, SM-A325M were tested and the worst case results are reported.  
(Worst case : SM-A325M/DS)

#### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter
    - Stand alone + Travel Adapter
  - Worstcase : Stand alone + Travel Adapter
2. SM-A325M/DS, SM-A325M were tested and the worst case results are reported.  
(Worst case : SM-A325M/DS)

#### Conducted test

1. The EUT was configured with packet length of highest power.  
(Worst case : 37 Byte)
2. SM-A325M/DS, SM-A325M were tested and the worst case results are reported.  
(Worst case : SM-A325M/DS)

## 8. SUMMARY TEST OF RESULTS


Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

**9. TEST RESULT****9.1 DUTY CYCLE**

Data rate (Bit/s)	Packet length (Byte)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
125k	37	3.100	3.750	0.827	0.83
	255	17.050	17.500	0.974	0.11
500k	37	1.063	1.877	0.566	2.47
	255	4.550	5.000	0.910	0.41
1M	37	0.383	0.626	0.611	2.14
	255	2.125	2.500	0.850	0.71
2M	37	0.199	0.624	0.318	4.97
	255	1.072	1.876	0.571	2.43


□ 125k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

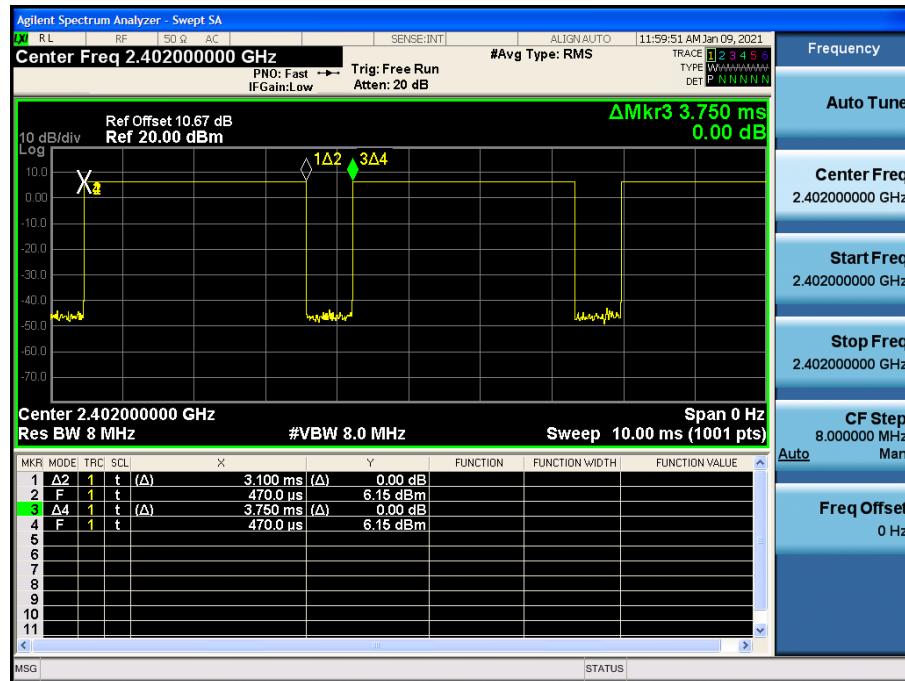


□ 125k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

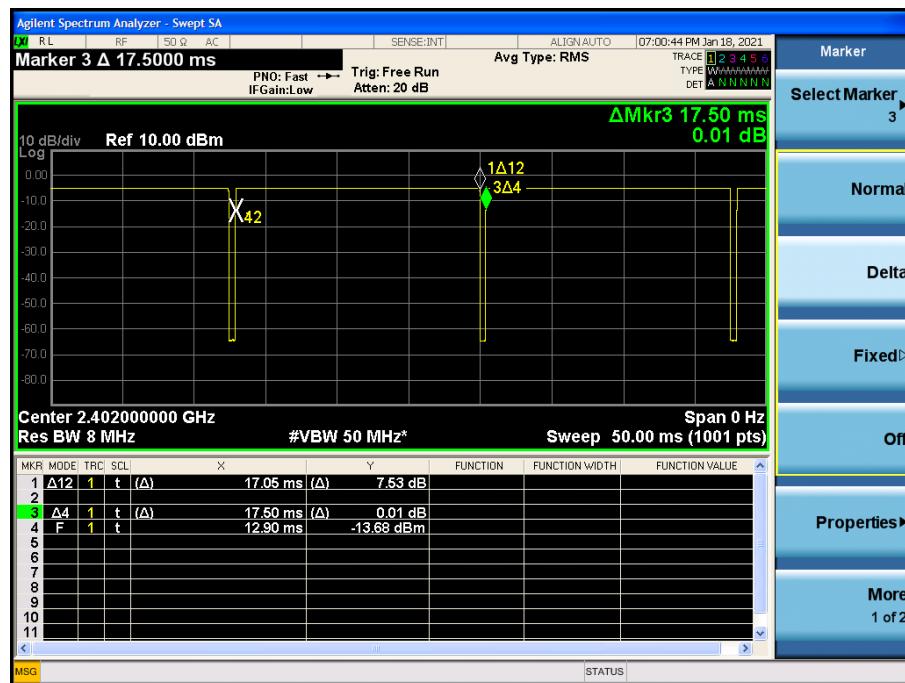


■ 500k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

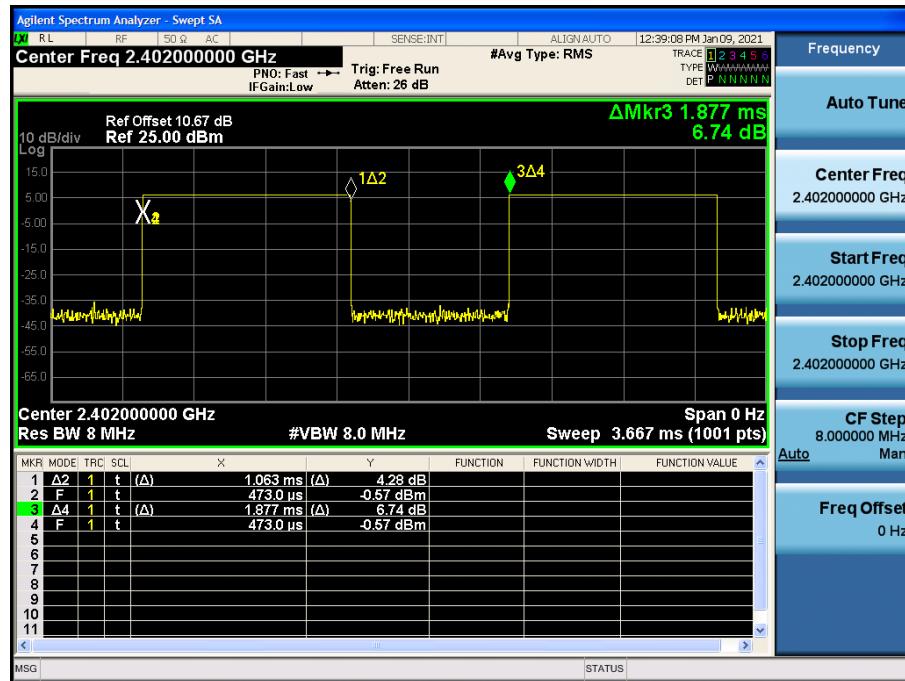


■ 500k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

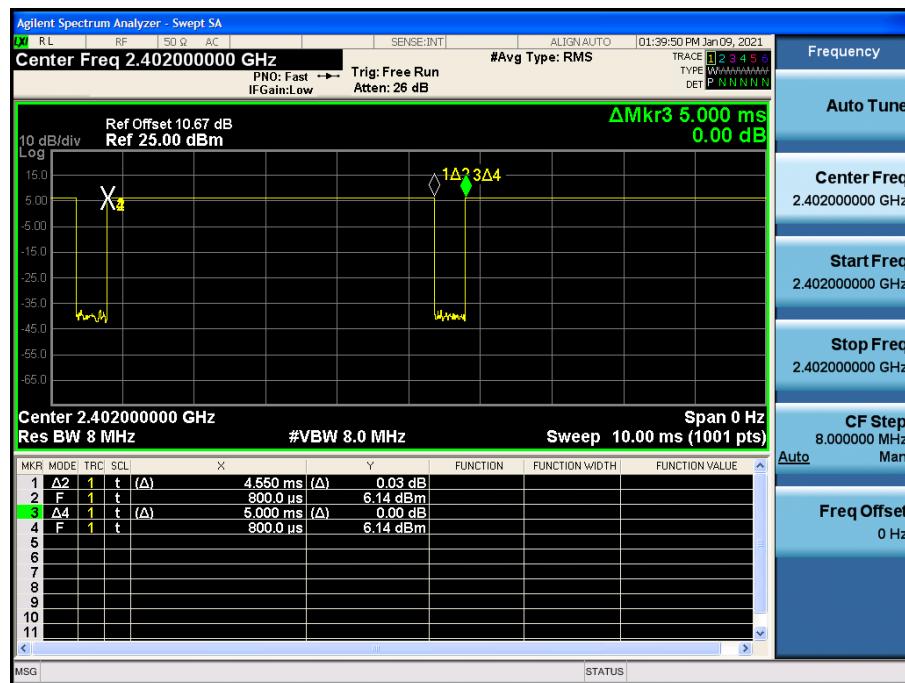


1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

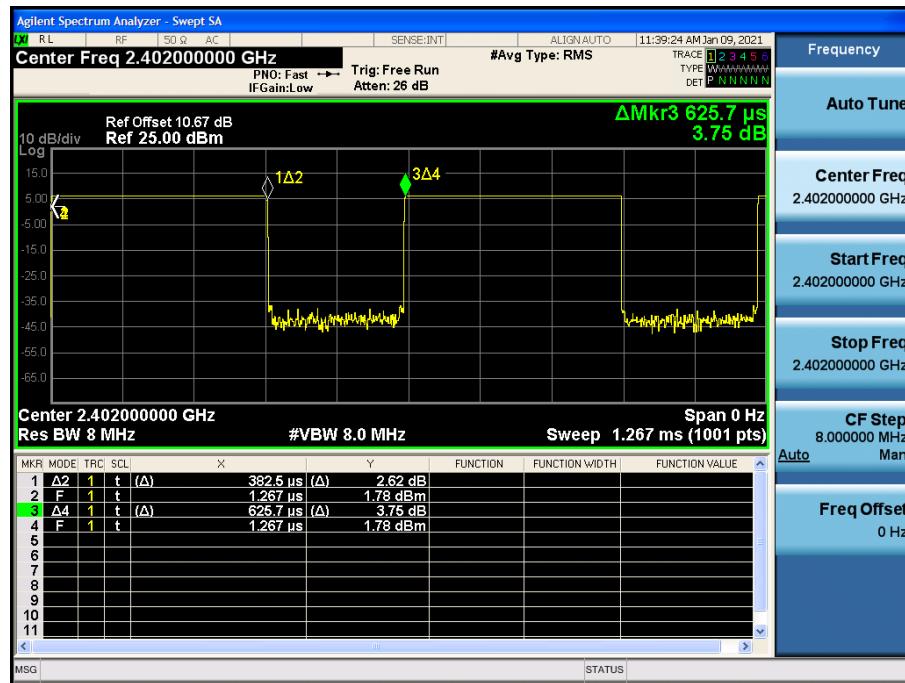


1M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

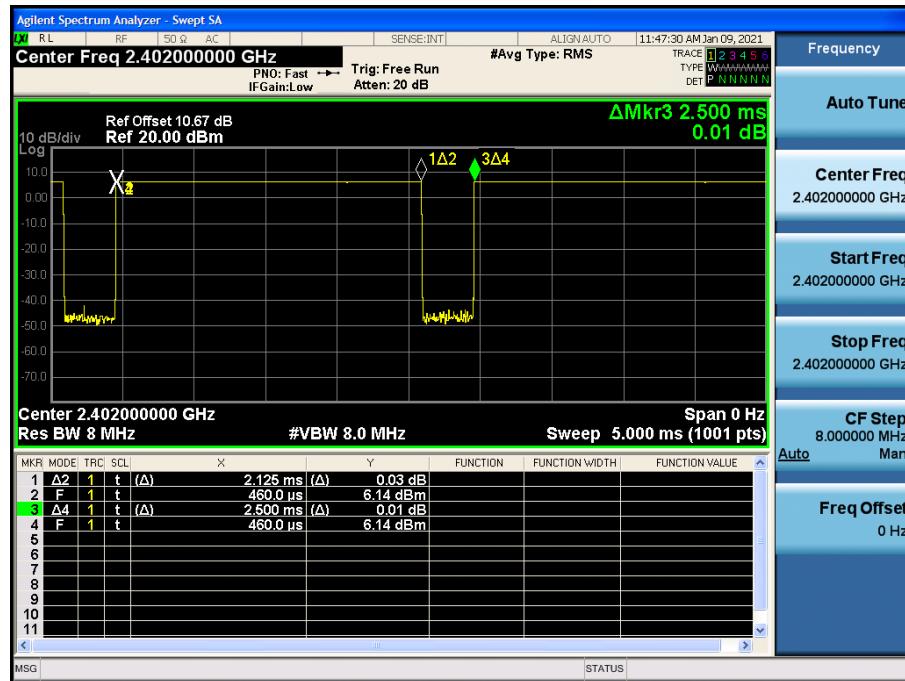


2M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

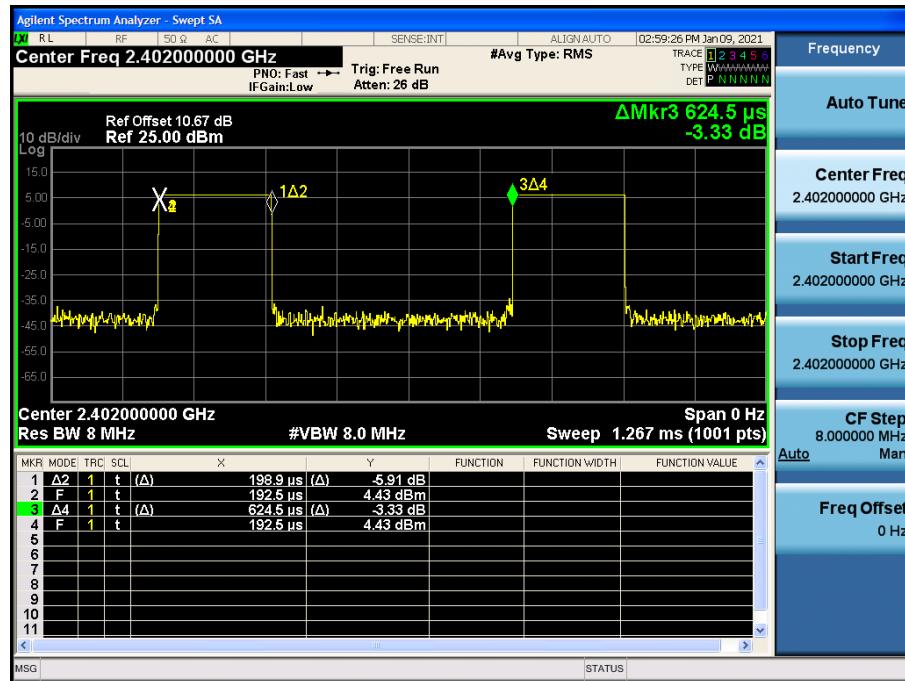

2M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

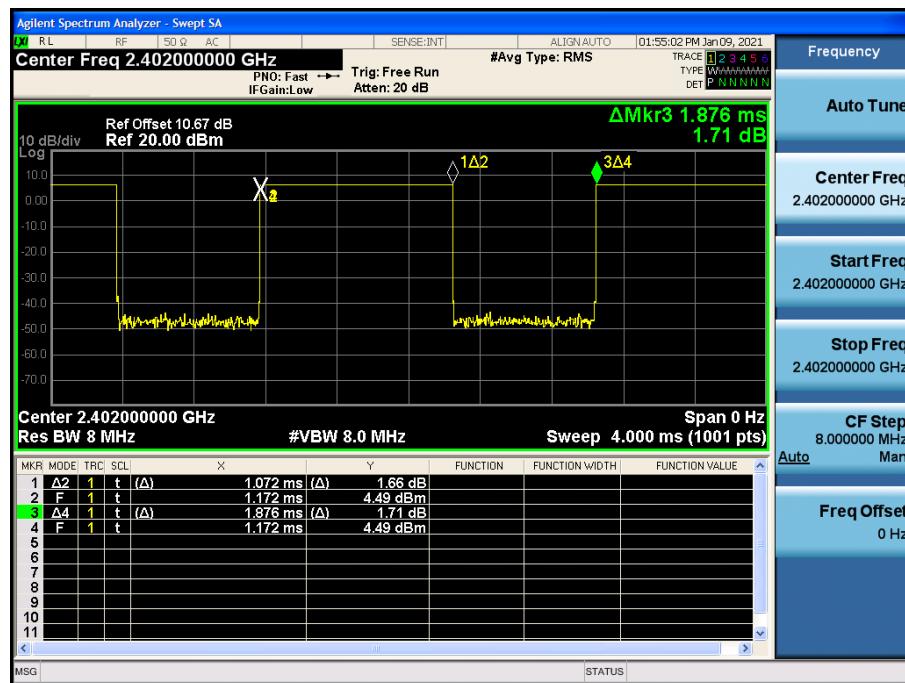

## 9.2 6dB BANDWIDTH

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
125k	0	690.2	> 500
	19	689.1	
	39	688.7	
500k	0	669.8	> 500
	19	664.5	
	39	668.0	
1M	0	696.6	> 500
	19	701.0	
	39	690.3	
2M	0	1160	> 500
	19	1164	
	39	1164	

**125k Bit/s(37 Byte) Test Plots**

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



**500k Bit/s(37 Byte) Test Plots**

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



**□ 1M Bit/s (37 Byte) Test Plots**

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



### □ 2M Bit/s (37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



### 9.3 OUTPUT POWER

#### Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
125k	37	2402	0	6.121	30
		2440	19	6.011	
		2480	39	6.084	
	255	2402	0	6.090	
		2440	19	5.982	
		2480	39	6.062	
500k	37	2402	0	6.168	30
		2440	19	6.107	
		2480	39	6.186	
	255	2402	0	6.120	
		2440	19	6.013	
		2480	39	6.100	
1M	37	2402	0	6.158	30
		2440	19	6.071	
		2480	39	6.100	
	255	2402	0	6.126	
		2440	19	6.000	
		2480	39	6.079	
2M	37	2402	0	6.175	30
		2440	19	6.091	
		2480	39	6.256	
	255	2402	0	6.166	
		2440	19	6.066	
		2480	39	6.211	

Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
125k	37	2402	0	5.02	0.83	5.85	30
		2440	19	5.03	0.83	5.86	
		2480	39	5.10	0.83	5.93	
	255	2402	0	5.78	0.11	5.89	
		2440	19	5.75	0.11	5.86	
		2480	39	5.75	0.11	5.86	
500k	37	2402	0	3.58	2.47	6.05	30
		2440	19	3.56	2.47	6.03	
		2480	39	3.61	2.47	6.08	
	255	2402	0	5.46	0.41	5.87	
		2440	19	5.46	0.41	5.87	
		2480	39	5.39	0.41	5.80	
1M	37	2402	0	3.87	2.14	6.01	30
		2440	19	3.73	2.14	5.87	
		2480	39	3.79	2.14	5.93	
	255	2402	0	5.21	0.71	5.92	
		2440	19	5.18	0.71	5.89	
		2480	39	5.23	0.71	5.94	
2M	37	2402	0	0.70	4.97	5.67	30
		2440	19	0.91	4.97	5.88	
		2480	39	1.12	4.97	6.09	
	255	2402	0	3.55	2.43	5.98	
		2440	19	3.60	2.43	6.03	
		2480	39	3.58	2.43	6.01	

Note :

1. Power meter offset = Attenuator loss + Cable loss + EUT Cable
  2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
- So, 10.67 dB is offset for 2.4 GHz Band.

#### 9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode	Test Result			
			Measured Power(dBm)	Duty Cycle Factor(dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
2402	0	125k Bit/s 37 Byte	-0.733	0.83	0.094	8
2440	19		-0.884	0.83	-0.057	
2480	39		-0.646	0.83	0.181	
2402	0	500k Bit/s 37 Byte	-3.070	2.47	-0.601	
2440	19		-3.374	2.47	-0.905	
2480	39		-3.090	2.47	-0.621	
2402	0	1M Bit/s 37 Byte	-2.068	2.14	0.069	
2440	19		-2.710	2.14	-0.573	
2480	39		-2.631	2.14	-0.494	
2402	0	2M Bit/s 37 Byte	-5.608	4.97	-0.639	
2440	19		-6.407	4.97	-1.438	
2480	39		-5.807	4.97	-0.838	

**Note :**

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss + EUT Cable

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 10.67 dB is offset for 2.4 GHz Band.

4. Worst case test Plot Only : 125k Bit/s (37 Byte)

□ 1M Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



Power Spectral Density (High-CH 39)



## 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

### □ 500k Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39

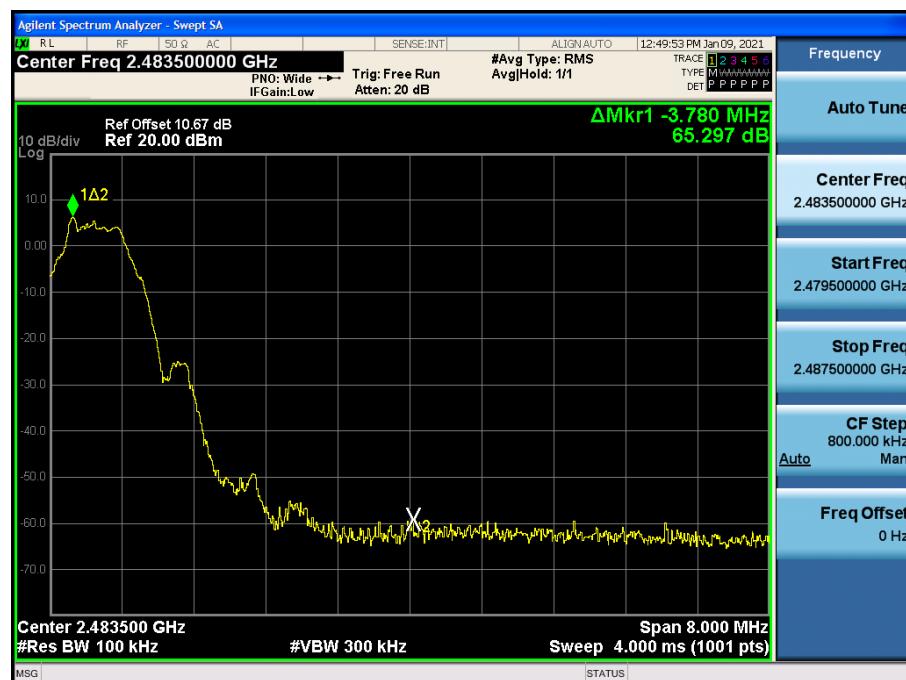

□ 500k Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (High-CH 39)

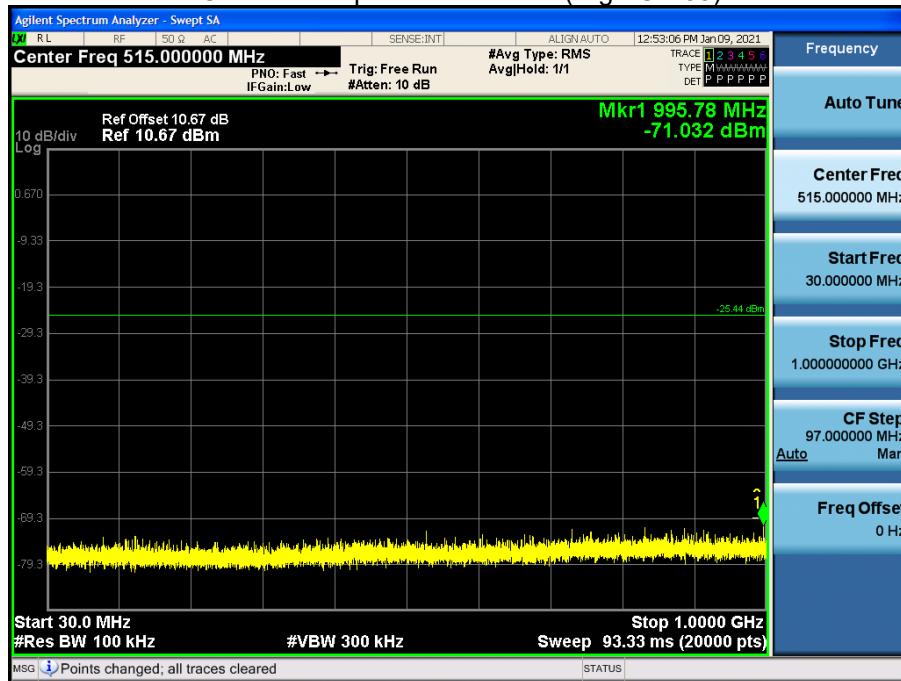

1 GHz ~ 3 GHz

Conducted Spurious Emission (High-CH 39)

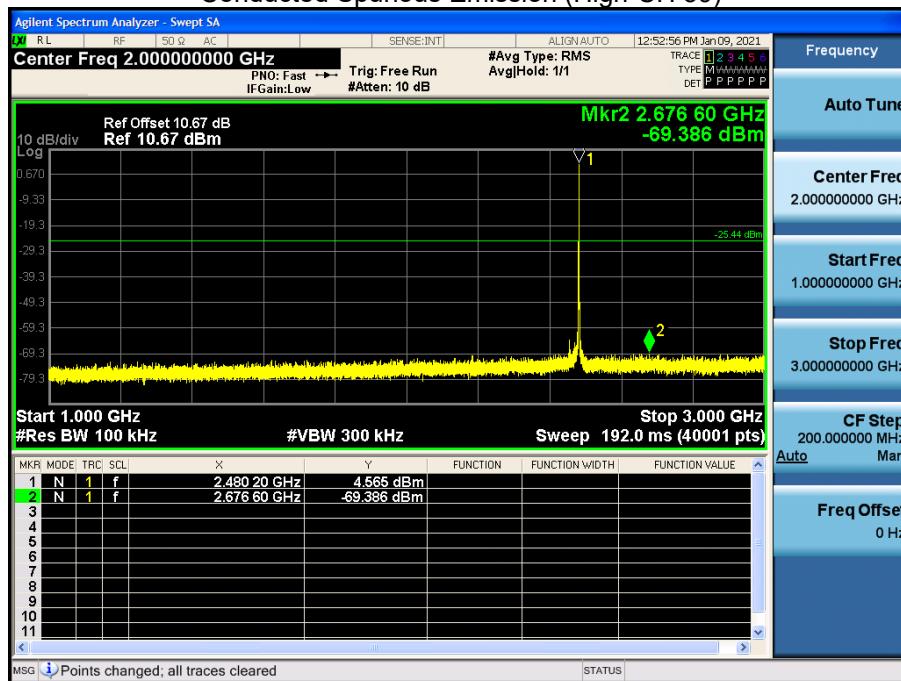


3 GHz ~ 5 GHz

### Conducted Spurious Emission (High-CH 39)




5 GHz ~ 7 GHz

### Conducted Spurious Emission (High-CH 39)

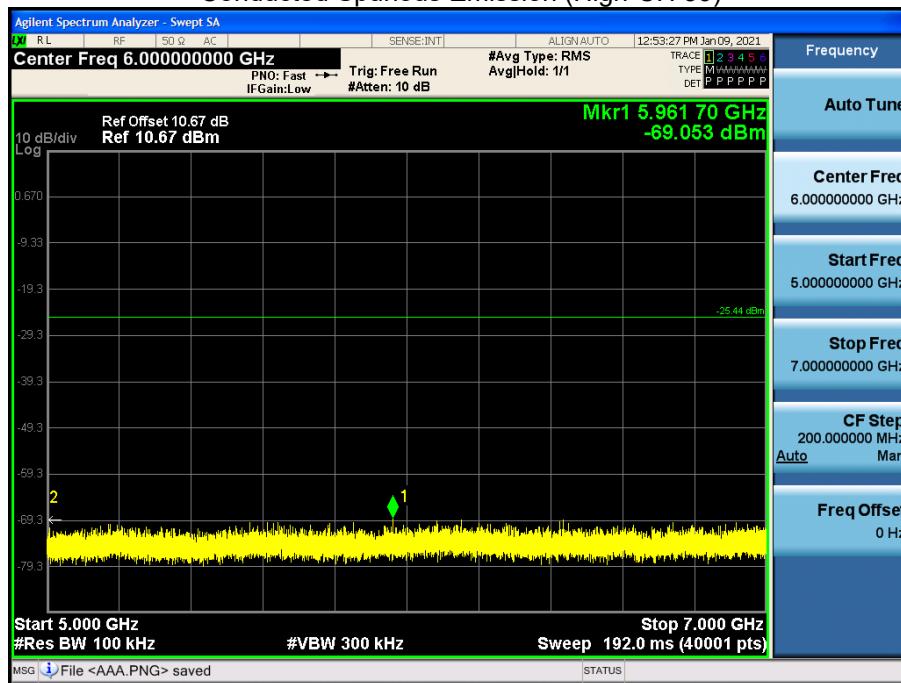


7 GHz ~ 9 GHz

## Conducted Spurious Emission (High-CH 39)

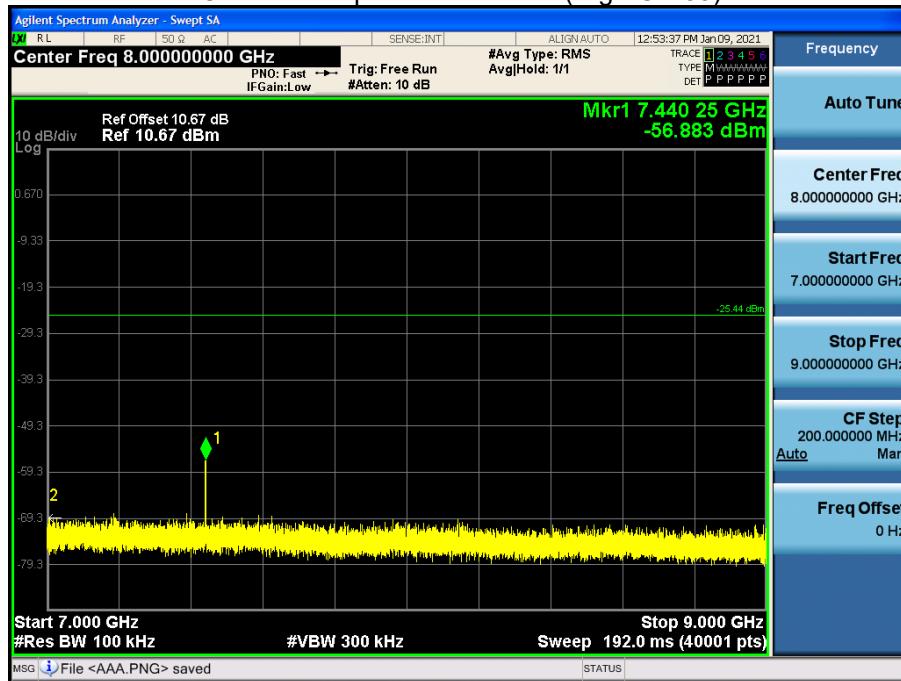


9 GHz ~ 11 GHz

## Conducted Spurious Emission (High-CH 39)

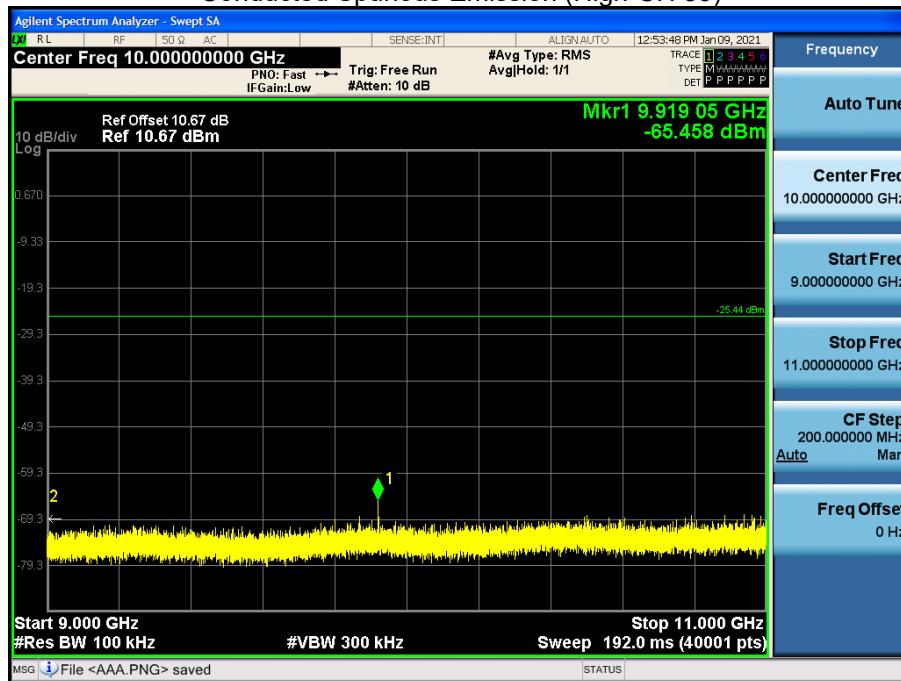


11 GHz ~ 13 GHz

Conducted Spurious Emission (High-CH 39)

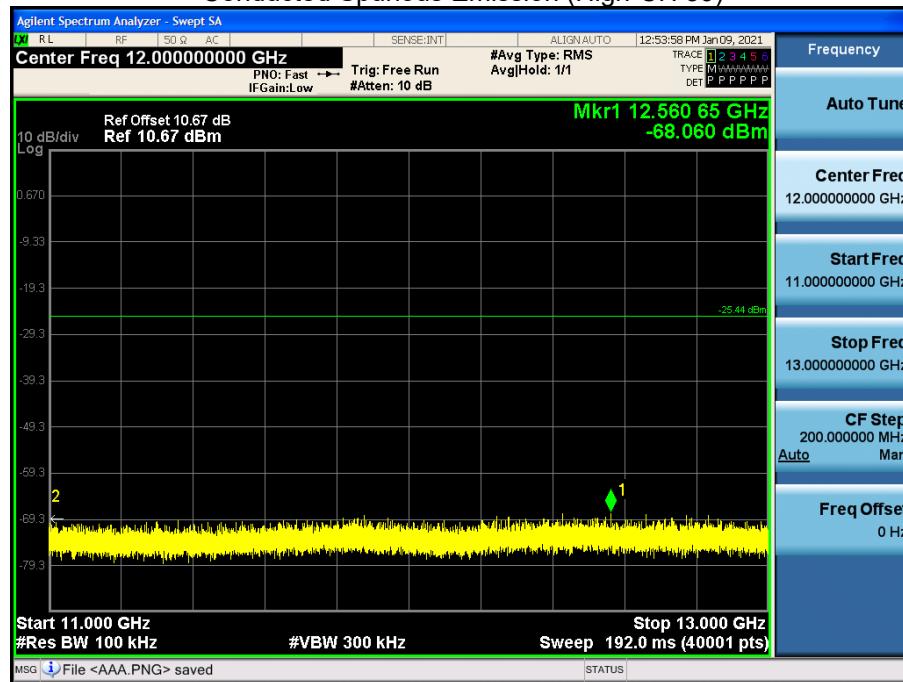


13 GHz ~ 15 GHz

Conducted Spurious Emission (High-CH 39)

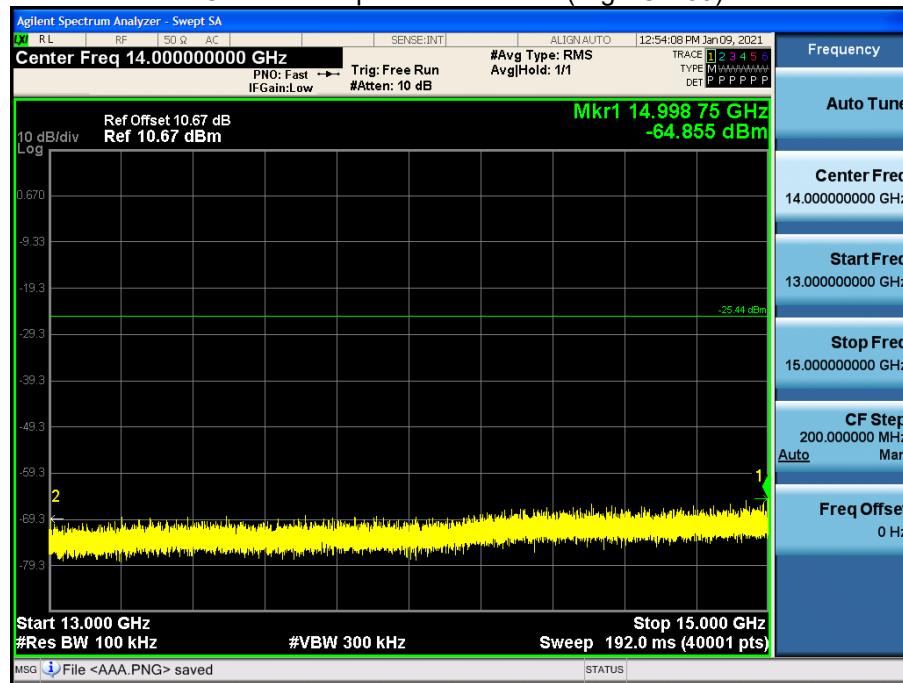


15 GHz ~ 17 GHz

Conducted Spurious Emission (High-CH 39)

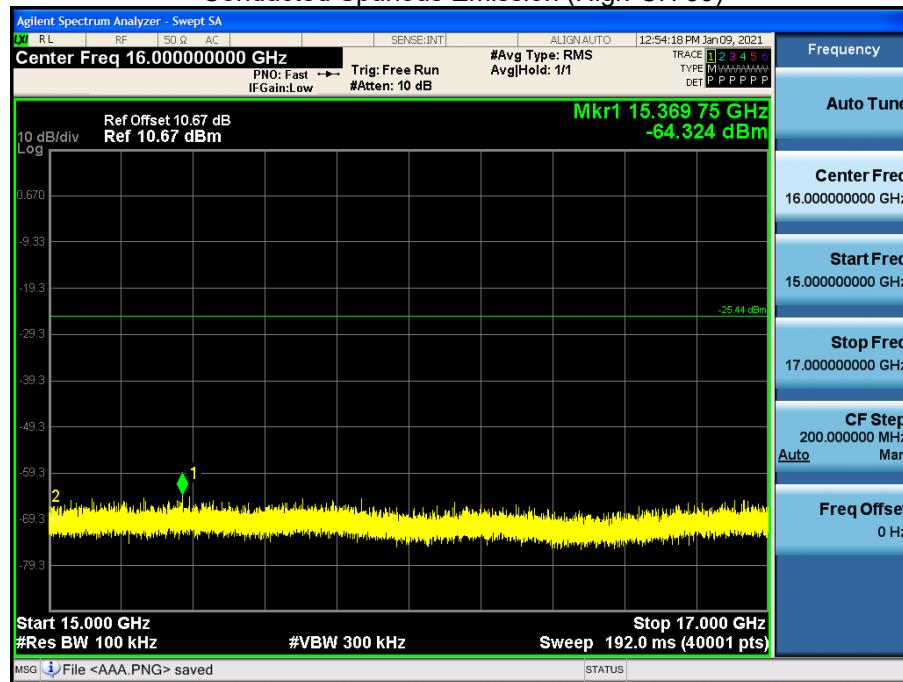


17 GHz ~ 19 GHz

Conducted Spurious Emission (High-CH 39)

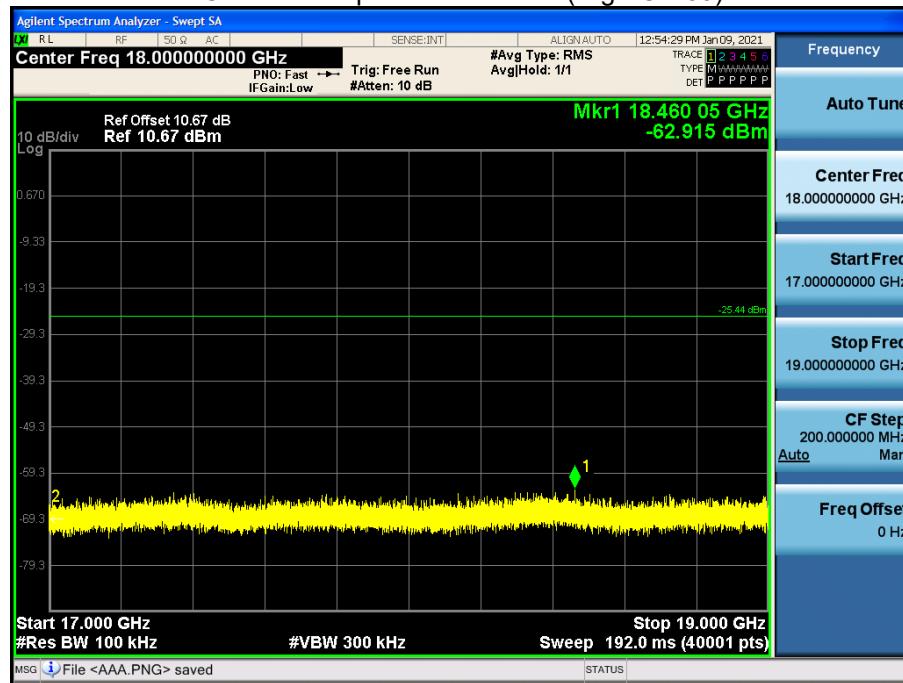


19 GHz ~ 21 GHz

Conducted Spurious Emission (High-CH 39)

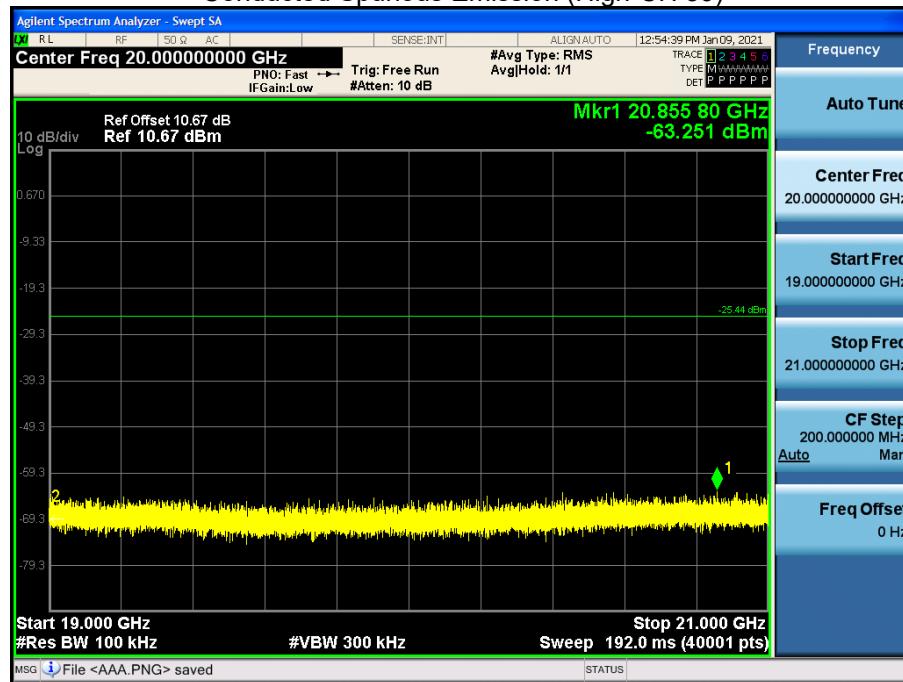


21 GHz ~ 23 GHz

Conducted Spurious Emission (High-CH 39)

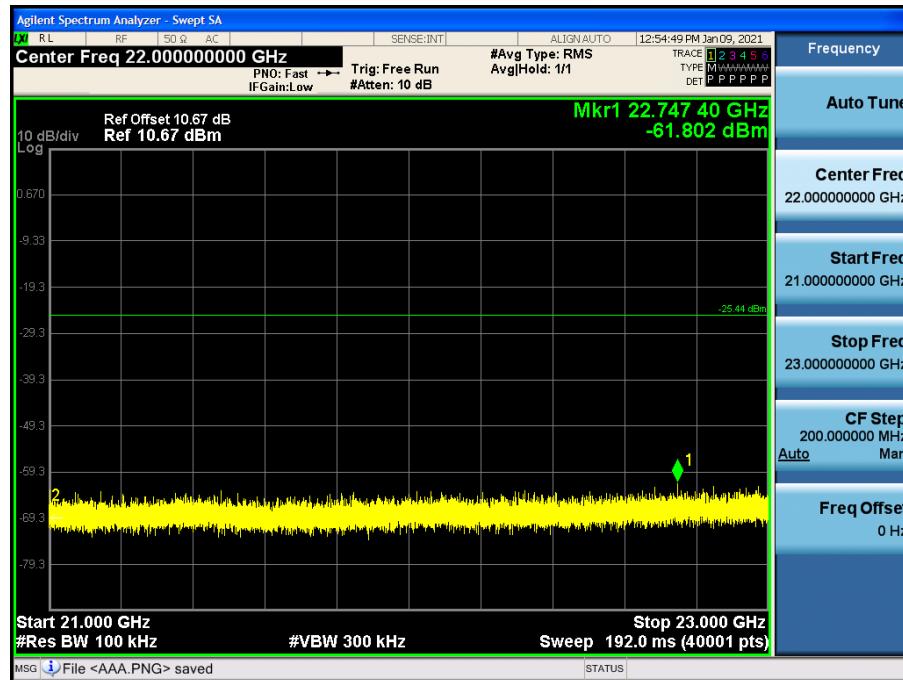

23 GHz ~ 25 GHz

Conducted Spurious Emission (High-CH 39)

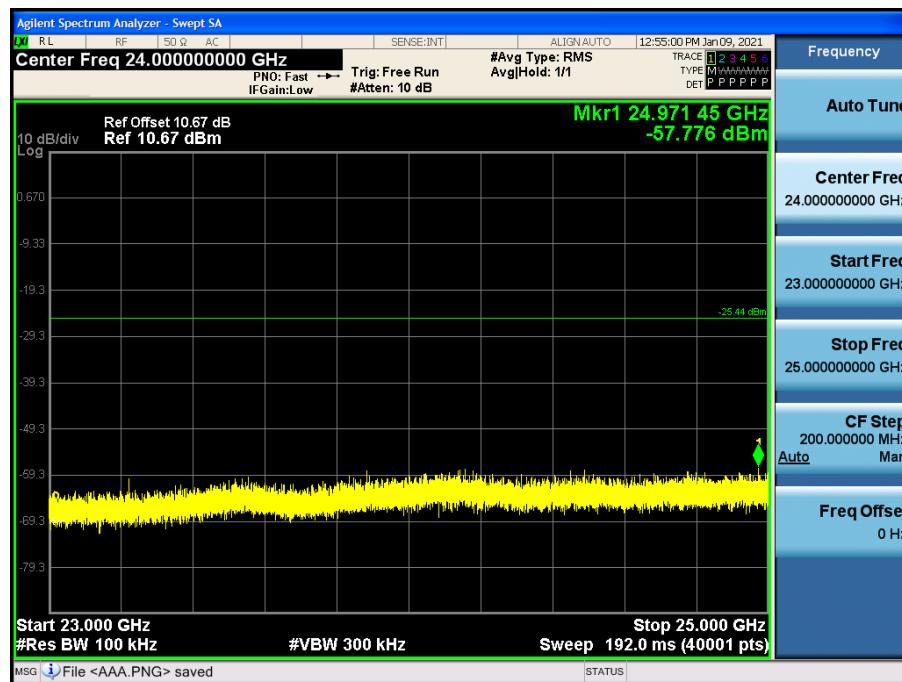


**□ 2M Bit/s (37 Byte) Test Plots -BandEdge**

Low-CH 0




High-CH 39

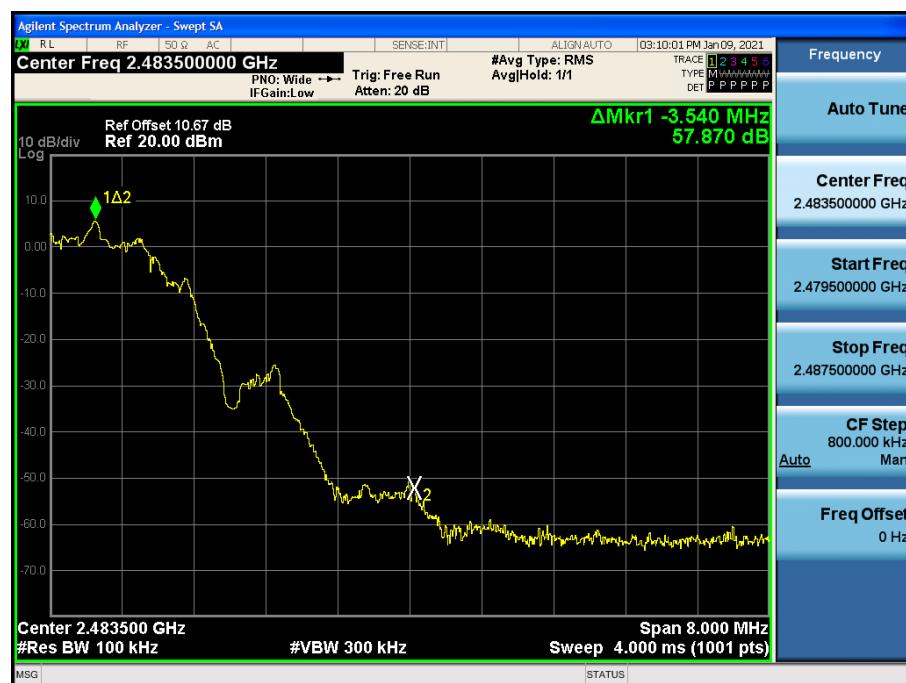

□ 2M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (High-CH 39)

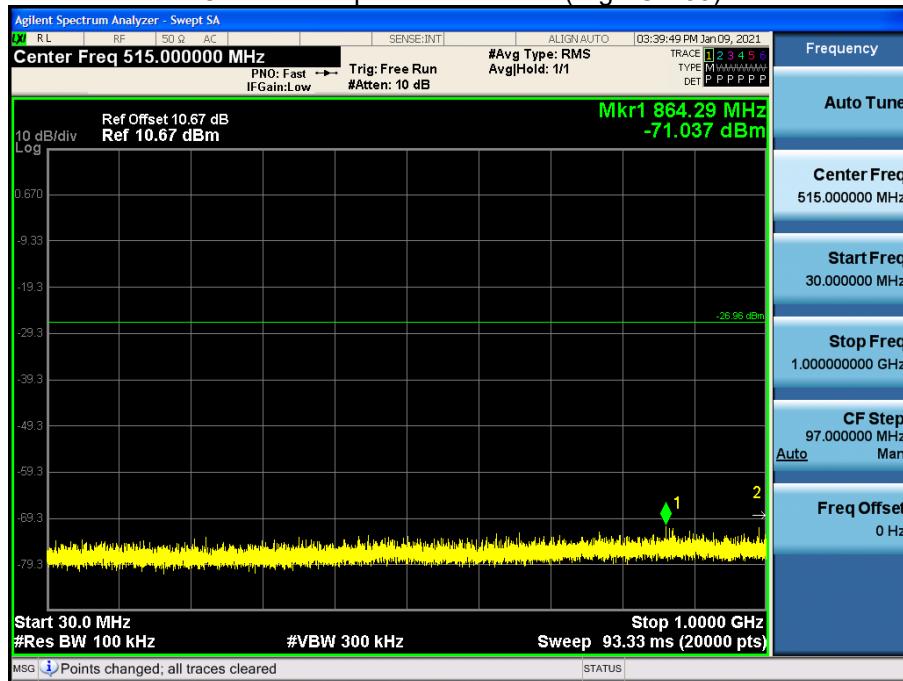


1 GHz ~ 3 GHz

Conducted Spurious Emission (High-CH 39)

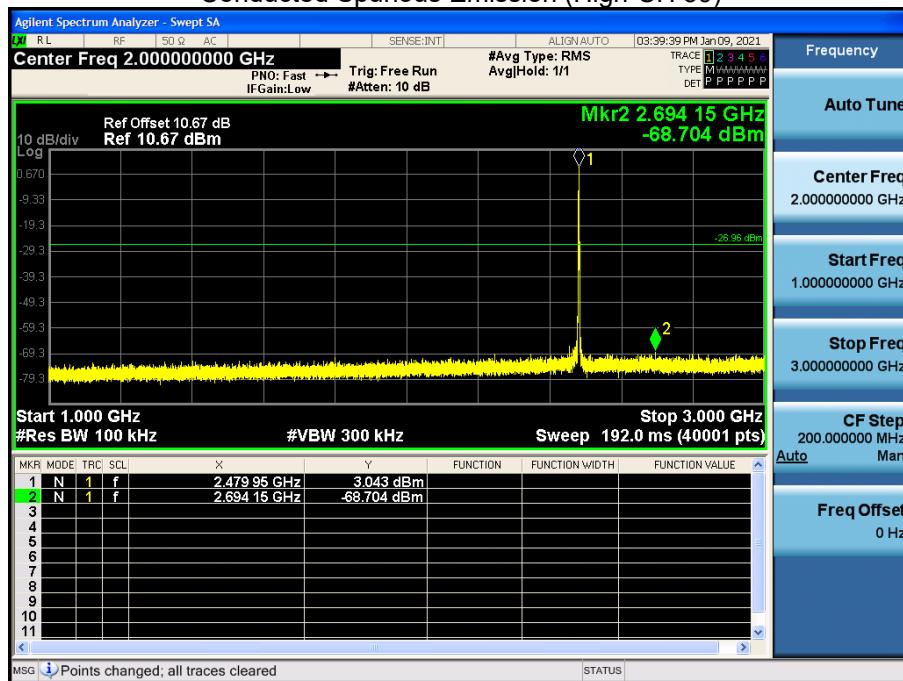


3 GHz ~ 5 GHz

Conducted Spurious Emission (High-CH 39)

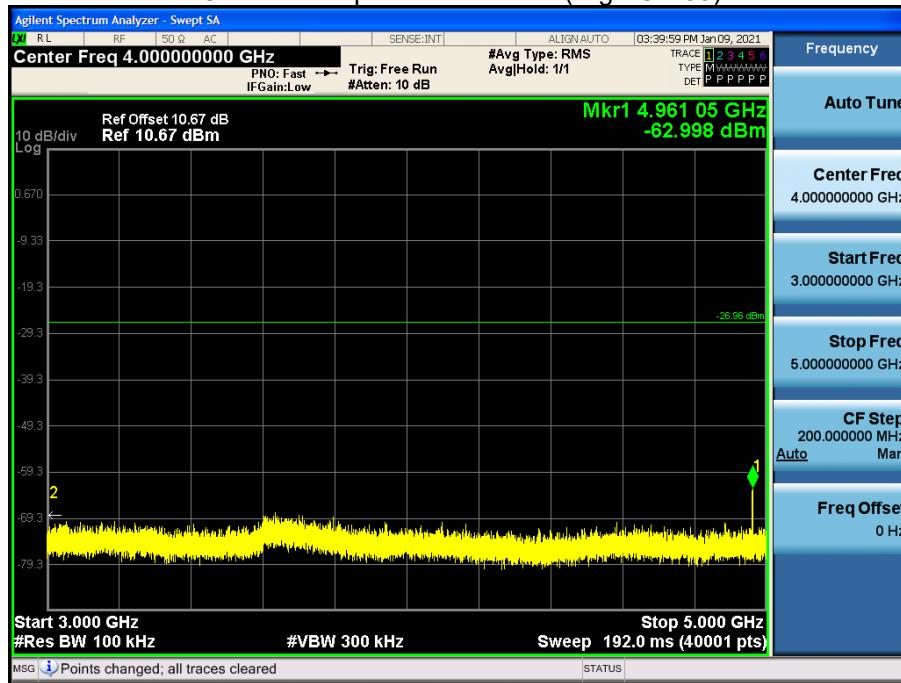


5 GHz ~ 7 GHz

Conducted Spurious Emission (High-CH 39)

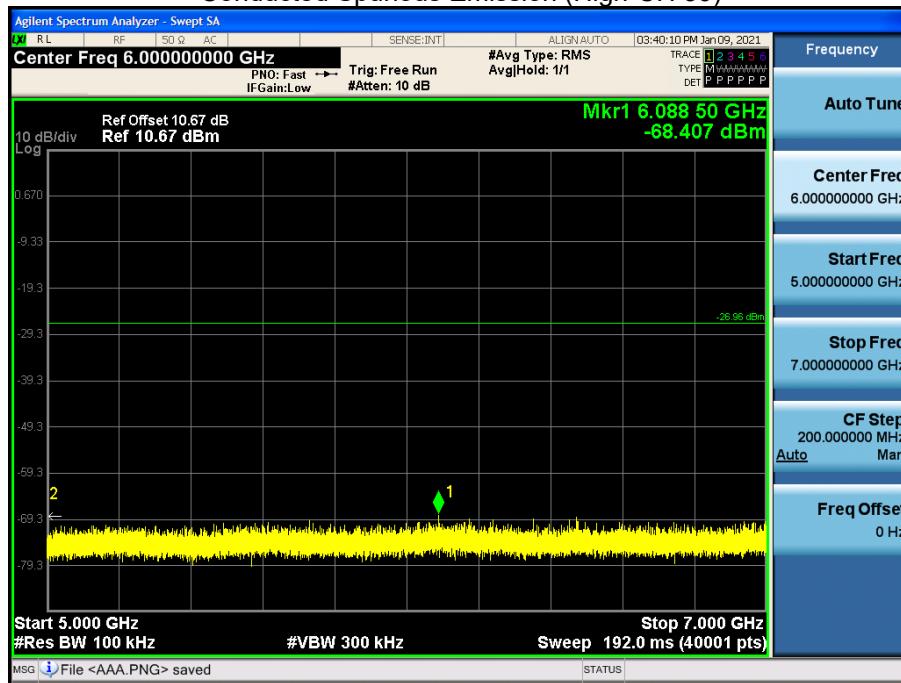


7 GHz ~ 9 GHz

Conducted Spurious Emission (High-CH 39)

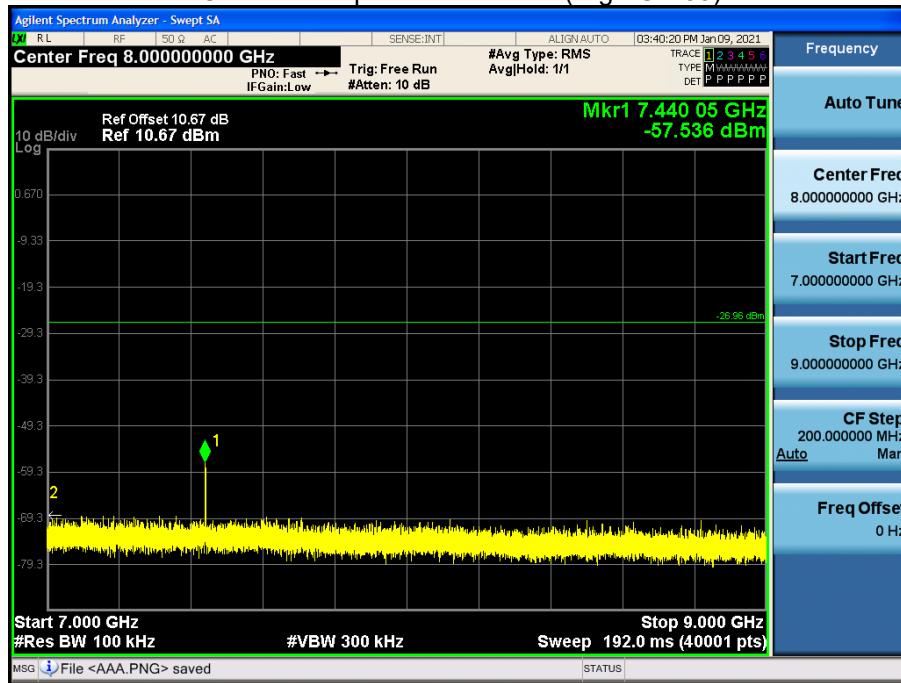


9 GHz ~ 11 GHz

Conducted Spurious Emission (High-CH 39)

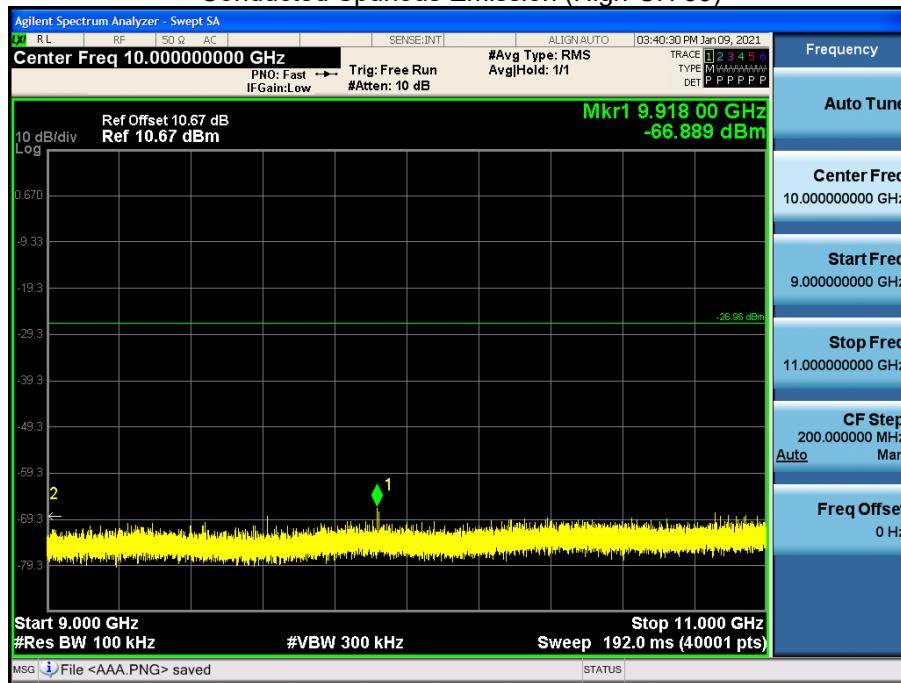


11 GHz ~ 13 GHz

Conducted Spurious Emission (High-CH 39)

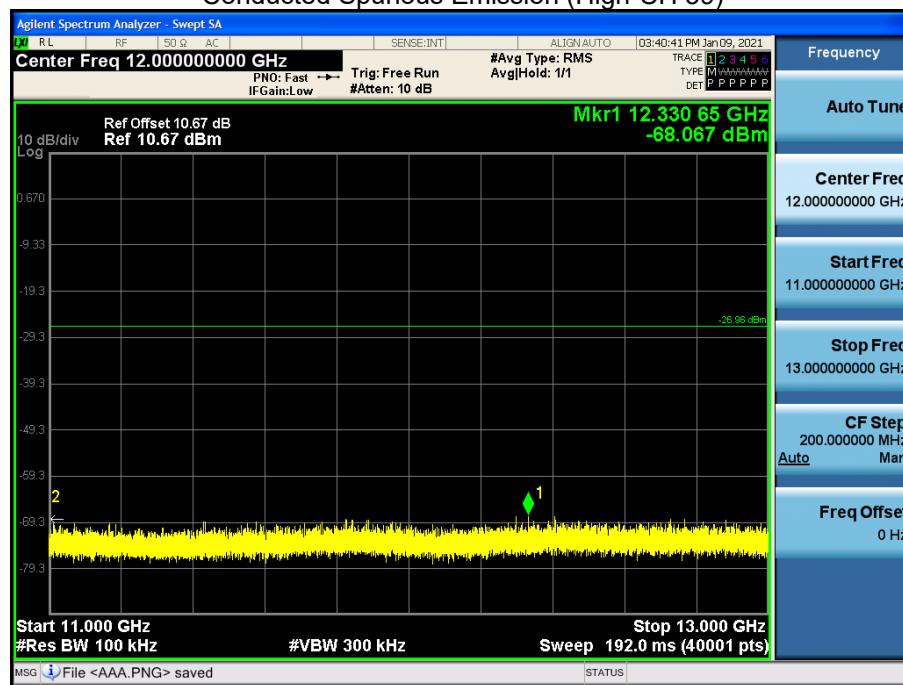


13 GHz ~ 15 GHz

Conducted Spurious Emission (High-CH 39)

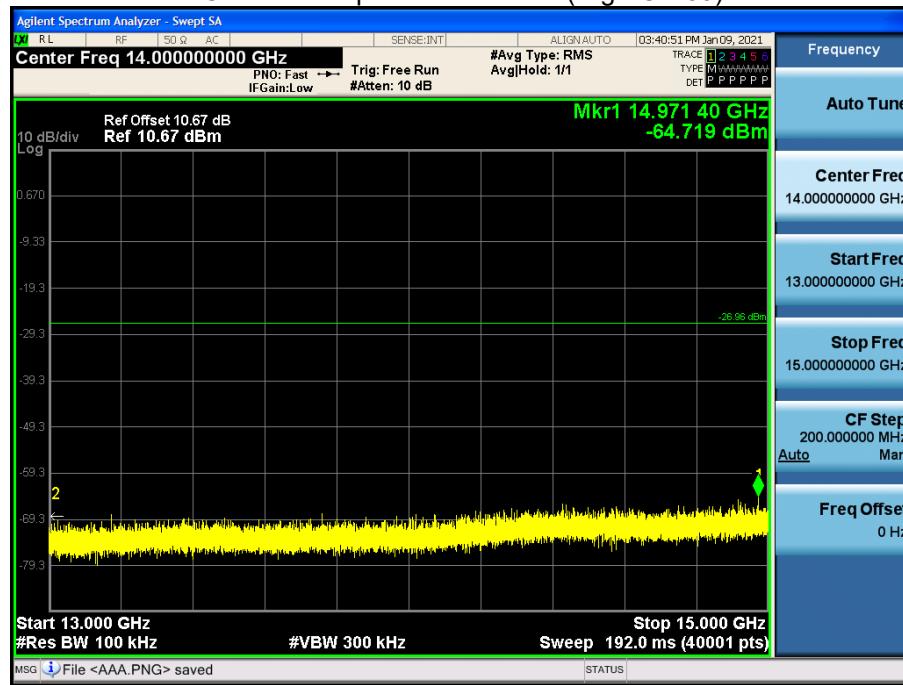


15 GHz ~ 17 GHz

Conducted Spurious Emission (High-CH 39)

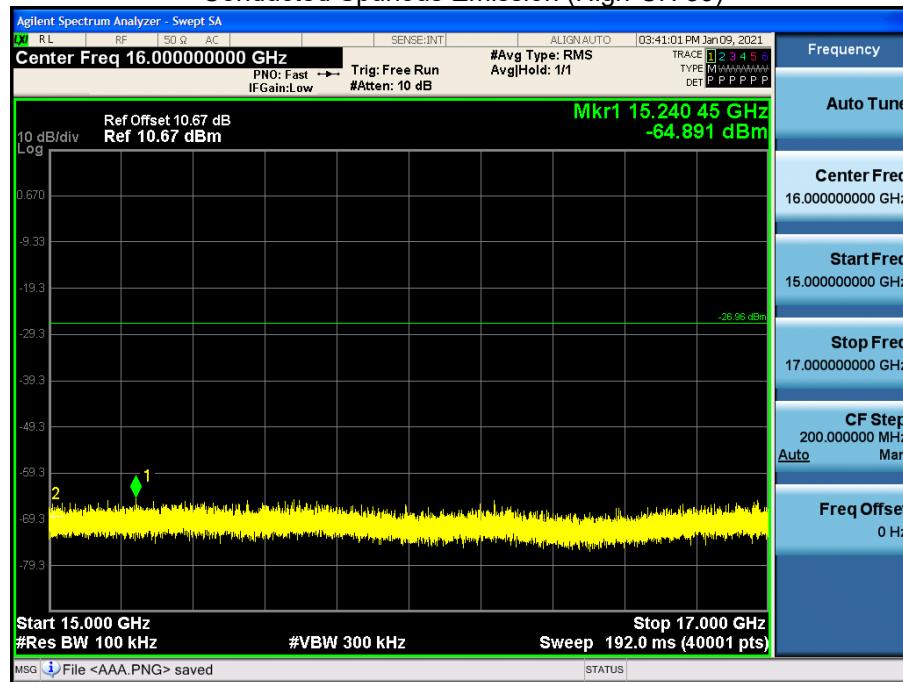


17 GHz ~ 19 GHz

Conducted Spurious Emission (High-CH 39)

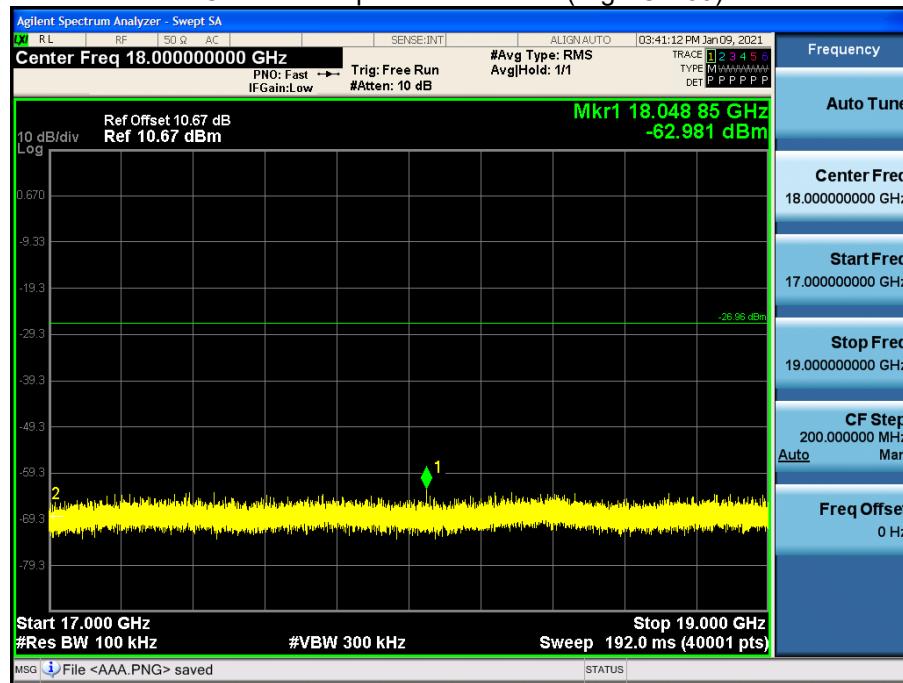


19 GHz ~ 21 GHz

Conducted Spurious Emission (High-CH 39)

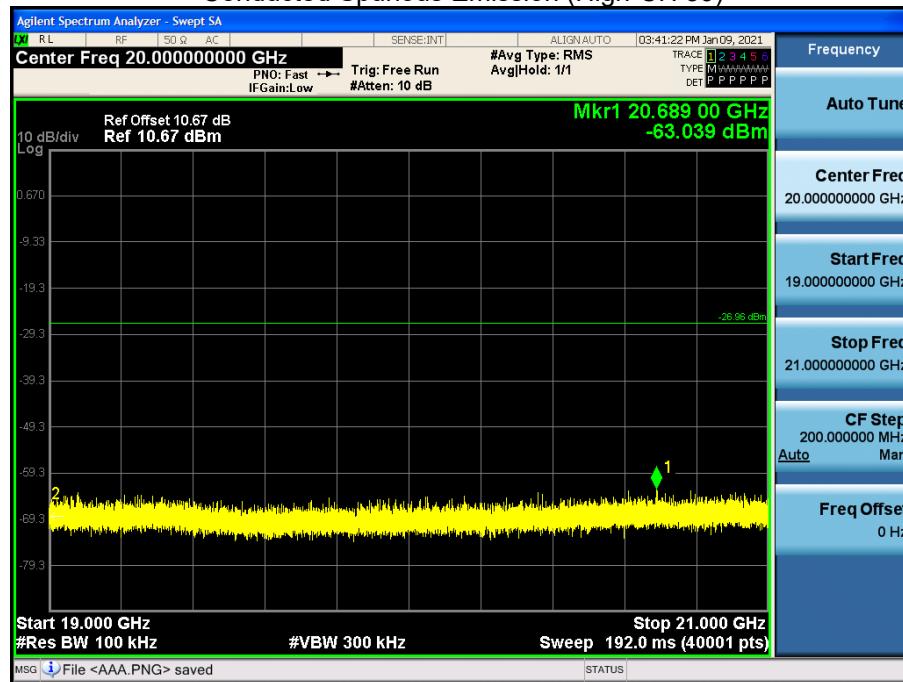


21 GHz ~ 23 GHz

Conducted Spurious Emission (High-CH 39)

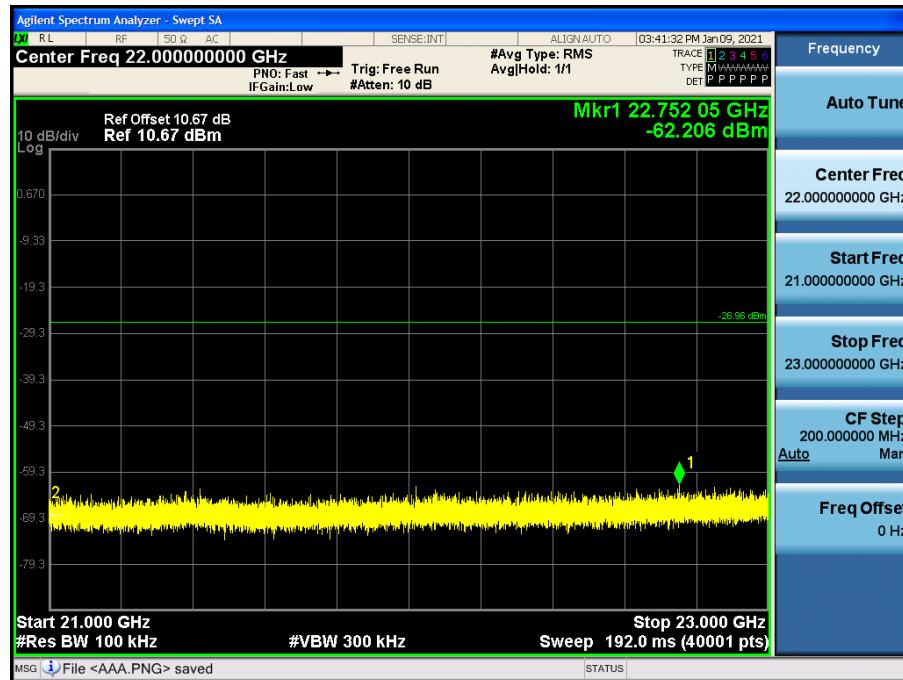

23 GHz ~ 25 GHz

Conducted Spurious Emission (High-CH 39)

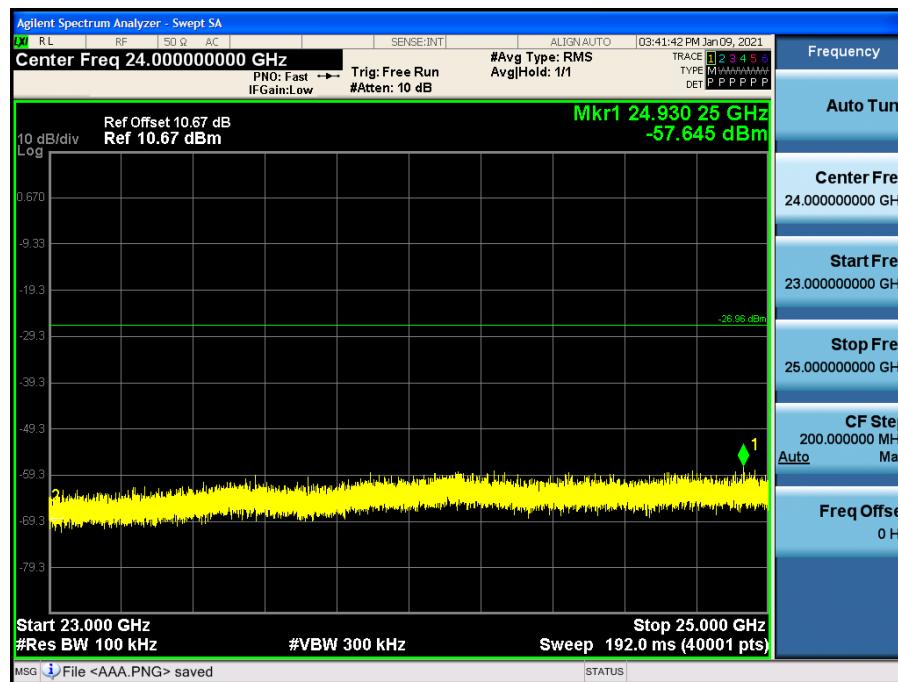

## 9.6 RADIATED SPURIOUS EMISSIONS

### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz****Mode : 500k Bit/s (37 Byte)**

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	42.87	0.00	2.30	V	45.17	73.98	28.81	PK
4804	30.65	2.47	2.30	V	35.42	53.98	18.56	AV
7206	40.44	0.00	12.07	V	52.51	73.98	21.47	PK
7206	29.05	2.47	12.07	V	43.59	53.98	10.39	AV
4804	43.07	0.00	2.30	H	45.37	73.98	28.61	PK
4804	30.55	2.47	2.30	H	35.32	53.98	18.66	AV
7206	40.65	0.00	12.07	H	52.72	73.98	21.26	PK
7206	29.57	2.47	12.07	H	44.11	53.98	9.87	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	41.86	0.00	1.83	V	43.69	73.98	30.29	PK
4880	29.87	2.47	1.83	V	34.17	53.98	19.81	AV
7320	40.12	0.00	10.83	V	50.95	73.98	23.03	PK
7320	29.01	2.47	10.83	V	42.31	53.98	11.67	AV
4880	42.05	0.00	1.83	H	43.88	73.98	30.10	PK
4880	30.98	2.47	1.83	H	35.28	53.98	18.70	AV
7320	40.69	0.00	10.83	H	51.52	73.98	22.46	PK
7320	29.22	2.47	10.83	H	42.52	53.98	11.46	AV

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G+ D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	41.99	0.00	2.59	V	44.58	73.98	29.40	PK
4960	29.86	2.47	2.59	V	34.92	53.98	19.06	AV
7440	38.68	0.00	11.91	V	50.59	73.98	23.39	PK
7440	27.03	2.47	11.91	V	41.41	53.98	12.57	AV
4960	42.42	0.00	2.59	H	45.01	73.98	28.97	PK
4960	30.52	2.47	2.59	H	35.58	53.98	18.40	AV
7440	39.11	0.00	11.91	H	51.02	73.98	22.96	PK
7440	27.95	2.47	11.91	H	42.33	53.98	11.65	AV

**Mode : 2M Bit/s (37 Byte)**

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	43.02	0.00	2.30	V	45.32	73.98	28.66	PK
4804	29.87	4.97	2.30	V	37.14	53.98	16.84	AV
7206	39.85	0.00	12.07	V	51.92	73.98	22.06	PK
7206	27.98	4.97	12.07	V	45.02	53.98	8.96	AV
4804	43.47	0.00	2.30	H	45.77	73.98	28.21	PK
4804	30.34	4.97	2.30	H	37.61	53.98	16.37	AV
7206	40.43	0.00	12.07	H	52.50	73.98	21.48	PK
7206	28.02	4.97	12.07	H	45.06	53.98	8.92	AV

Operation Mode: CH Mid


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	42.86	0.00	1.83	V	44.69	73.98	29.29	PK
4880	29.75	4.97	1.83	V	36.55	53.98	17.43	AV
7320	40.12	0.00	10.83	V	50.95	73.98	23.03	PK
7320	28.88	4.97	10.83	V	44.68	53.98	9.30	AV
4880	43.36	0.00	1.83	H	45.19	73.98	28.79	PK
4880	30.64	4.97	1.83	H	37.44	53.98	16.54	AV
7320	42.73	0.00	10.83	H	53.56	73.98	20.42	PK
7320	29.27	4.97	10.83	H	45.07	53.98	8.91	AV

Operation Mode: CH High


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	41.25	0.00	2.59	V	43.84	73.98	30.14	PK
4960	29.75	4.97	2.59	V	37.31	53.98	16.67	AV
7440	38.11	0.00	11.91	V	50.02	73.98	23.96	PK
7440	26.97	4.97	11.91	V	43.85	53.98	10.13	AV
4960	41.93	0.00	2.59	H	44.52	73.98	29.46	PK
4960	30.06	4.97	2.59	H	37.62	53.98	16.36	AV
7440	38.71	0.00	11.91	H	50.62	73.98	23.36	PK
7440	27.03	4.97	11.91	H	43.91	53.98	10.07	AV

□ 2M Bit/s 37 Byte Test Plots (Worst case : X-H)

Radiated Spurious Emissions plot – Average Reading (Ch.19 3rd Harmonic)

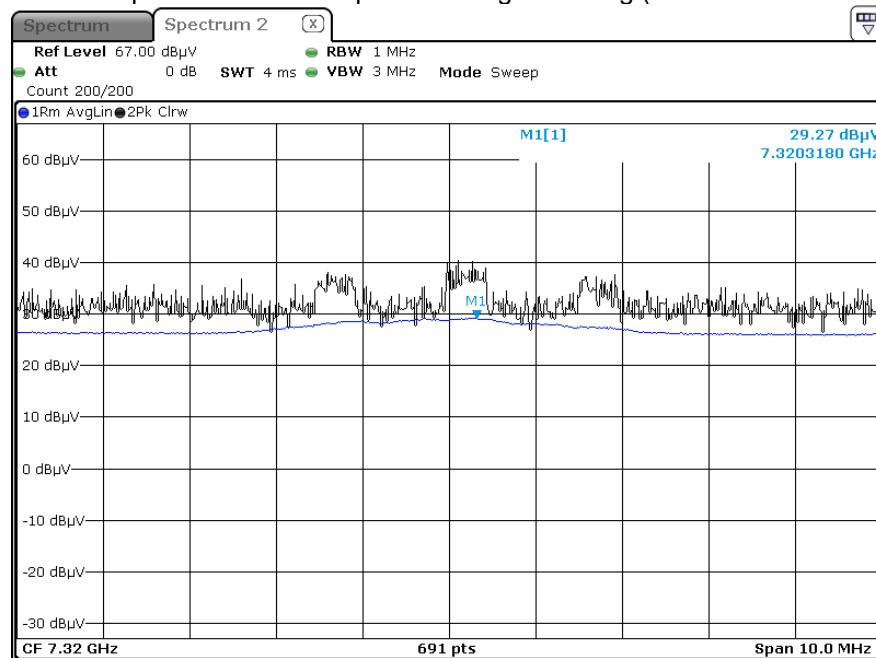

Radiated Spurious Emissions plot – Peak Reading (Ch.19 3rd Harmonic)

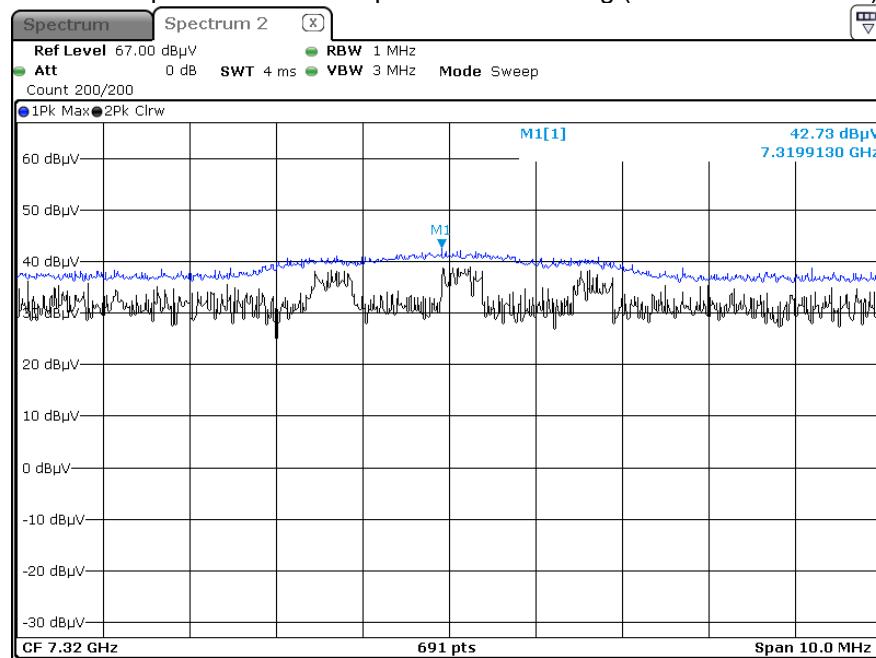

**Note:**

Plot of worst case are only reported.

### 9.7 RADIATED RESTRICTED BAND EDGES

**Mode : 500k Bit/s (37 Byte)**

Operating Frequency	2402 MHz, 2480 MHz							
Channel No.	0 CH, 39 CH							

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	21.48	0.00	34.77	H	56.25	73.98	17.73	PK
2390.0	9.44	2.47	34.77	H	46.68	53.98	7.30	AV
2390.0	21.32	0.00	34.77	V	56.09	73.98	17.89	PK
2390.0	9.39	2.47	34.77	V	46.63	53.98	7.36	AV
2483.5	21.53	0.00	34.25	H	55.78	73.98	18.20	PK
2483.5	9.78	2.47	34.25	H	46.50	53.98	7.48	AV
2483.5	21.42	0.00	34.25	V	55.67	73.98	18.31	PK
2483.5	9.68	2.47	34.25	V	46.40	53.98	7.58	AV

**Mode : 2M Bit/s (37 Byte)**

Operating Frequency	2402 MHz, 2480 MHz							
Channel No.	0 CH, 39 CH							


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	21.09	0.00	34.77	H	55.86	73.98	18.12	PK
2390.0	9.50	4.97	34.77	H	49.24	53.98	4.74	AV
2390.0	20.85	0.00	34.77	V	55.62	73.98	18.36	PK
2390.0	9.43	4.97	34.77	V	49.17	53.98	4.81	AV
2483.5	21.60	0.00	34.25	H	55.85	73.98	18.13	PK
2483.5	10.54	4.97	34.25	H	49.76	53.98	4.22	AV
2483.5	21.05	0.00	34.25	V	55.30	73.98	18.68	PK
2483.5	10.15	4.97	34.25	V	49.37	53.98	4.61	AV

**□ Mode : 2M Bit/s (37 Byte) Test Plots**

Radiated Restricted Band Edges plot – Average Reading (Ch.39, X-H)



Radiated Restricted Band Edges plot – Peak Reading (Ch.39, X-H)

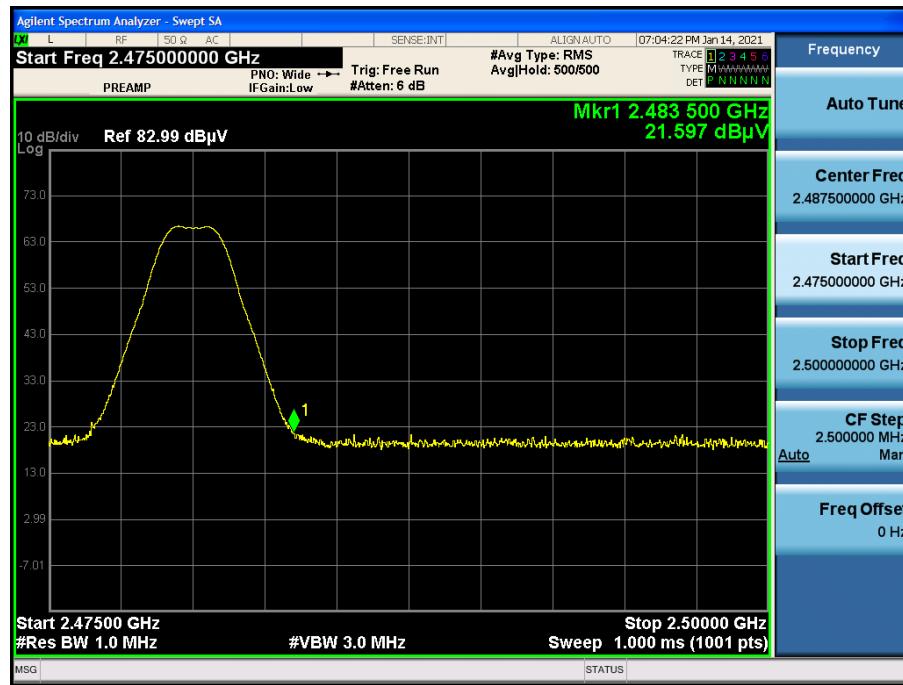

**Note:**

Plot of worst case are only reported.

## 9.8 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)


BLE L1

1 / 2

## Test Report

### Common Information

EUT : SM-A325M/DS  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : BLE L1  
 Operator Name:  
 Comment:

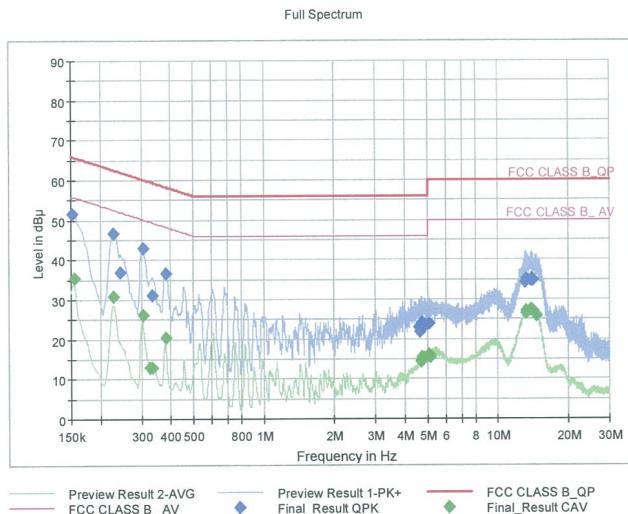

### Final\_Result\_QPK

Frequency (MHz)	QuasiPeak	Limit (dBuV)	MARGIN	Bandwidth	Line	Filter	Corr. (dB)
0.152250	51.63	65.88	14.24	9.000	L1	OFF	9.6
0.226500	46.67	62.58	15.91	9.000	L1	OFF	9.6
0.244500	36.83	61.94	25.11	9.000	L1	OFF	9.6
0.303000	42.88	60.16	17.28	9.000	L1	OFF	9.6
0.332250	31.11	59.40	28.28	9.000	L1	OFF	9.6
0.379500	36.63	58.29	21.66	9.000	L1	OFF	9.6
4.601750	23.15	56.00	32.85	9.000	L1	OFF	9.9
4.649000	21.97	56.00	34.03	9.000	L1	OFF	9.9
4.676000	23.87	56.00	32.13	9.000	L1	OFF	9.9
4.750250	24.17	56.00	31.83	9.000	L1	OFF	9.9
4.826750	23.50	56.00	32.50	9.000	L1	OFF	9.9
5.058500	23.81	60.00	36.19	9.000	L1	OFF	9.9
13.059500	34.26	60.00	25.74	9.000	L1	OFF	10.2
13.230500	35.11	60.00	24.89	9.000	L1	OFF	10.2
13.824500	34.95	60.00	25.05	9.000	L1	OFF	10.2
13.903250	35.03	60.00	24.97	9.000	L1	OFF	10.2
13.986500	35.09	60.00	24.91	9.000	L1	OFF	10.2
14.069750	34.96	60.00	25.04	9.000	L1	OFF	10.2

### Final\_Result\_CAV

2021-01-07

오후 3:27:22

BLE L1

2 / 2

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	35.46	55.75	20.29	9.000	L1	OFF	9.6
0.226500	30.80	52.58	21.77	9.000	L1	OFF	9.6
0.303000	26.20	50.16	23.96	9.000	L1	OFF	9.6
0.325500	13.03	49.57	36.53	9.000	L1	OFF	9.6
0.332250	13.04	49.40	36.36	9.000	L1	OFF	9.6
0.379500	20.49	48.29	27.80	9.000	L1	OFF	9.6
4.673750	14.45	46.00	31.55	9.000	L1	OFF	9.9
4.698500	14.85	46.00	31.15	9.000	L1	OFF	9.9
4.750250	15.71	46.00	30.29	9.000	L1	OFF	9.9
4.826750	15.41	46.00	30.59	9.000	L1	OFF	9.9
5.056250	16.16	50.00	33.84	9.000	L1	OFF	9.9
5.123750	15.49	50.00	34.51	9.000	L1	OFF	9.9
13.138250	26.64	50.00	23.36	9.000	L1	OFF	10.2
13.230500	27.17	50.00	22.83	9.000	L1	OFF	10.2
13.824500	27.29	50.00	22.71	9.000	L1	OFF	10.2
13.903250	27.33	50.00	22.67	9.000	L1	OFF	10.2
14.072000	27.21	50.00	22.79	9.000	L1	OFF	10.2
14.578250	26.04	50.00	23.96	9.000	L1	OFF	10.2

2021-01-07

오후 3:27:22

### Conducted Emissions (Line 2)

BLE N


1 / 2

## Test Report

### Common Information

EUT : SM-A325M/DS  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : BLE N  
 Operator Name:  
 Comment:

Full Spectrum

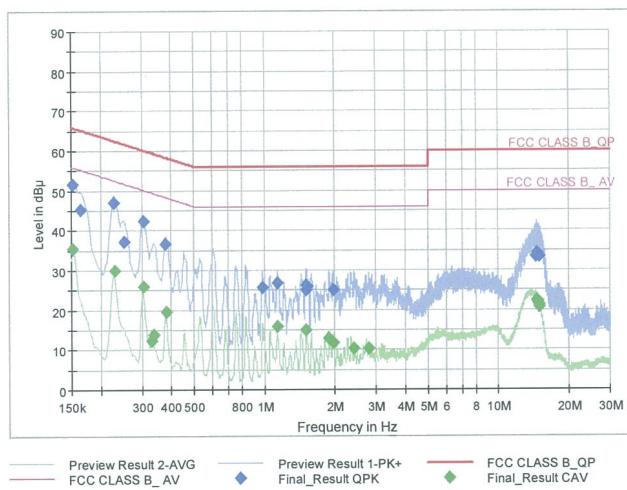

### Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dB <sub>μ</sub> V)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.152250	51.63	65.88	14.25	9.000	N	OFF	9.6
0.163500	45.30	65.28	19.98	9.000	N	OFF	9.6
0.226500	46.93	62.58	15.65	9.000	N	OFF	9.6
0.251250	37.32	61.72	24.39	9.000	N	OFF	9.6
0.303000	42.37	60.16	17.79	9.000	N	OFF	9.6
0.377250	36.55	58.34	21.79	9.000	N	OFF	9.6
0.981500	25.72	56.00	30.28	9.000	N	OFF	9.7
1.134500	26.82	56.00	29.18	9.000	N	OFF	9.7
1.508000	25.15	56.00	30.85	9.000	N	OFF	9.7
1.512500	26.24	56.00	29.76	9.000	N	OFF	9.7
1.517000	25.84	56.00	30.16	9.000	N	OFF	9.7
1.967000	25.06	56.00	30.94	9.000	N	OFF	9.7
14.420750	33.47	60.00	26.53	9.000	N	OFF	10.3
14.580500	34.24	60.00	25.76	9.000	N	OFF	10.3
14.657000	33.96	60.00	26.04	9.000	N	OFF	10.3
14.733500	33.83	60.00	26.17	9.000	N	OFF	10.3
14.882000	33.59	60.00	26.41	9.000	N	OFF	10.3
14.958500	33.46	60.00	26.54	9.000	N	OFF	10.3

### Final\_Result\_CAV

2021-01-07

오후 3:32:47

BLE N

2 / 2

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.152250	35.42	55.88	20.45	9.000	N	OFF	9.6
0.228750	30.04	52.50	22.45	9.000	N	OFF	9.6
0.303000	25.92	50.16	24.24	9.000	N	OFF	9.6
0.330000	12.35	49.45	37.10	9.000	N	OFF	9.6
0.336750	13.83	49.28	35.45	9.000	N	OFF	9.6
0.379500	19.63	48.29	28.66	9.000	N	OFF	9.6
1.134500	15.73	46.00	30.27	9.000	N	OFF	9.7
1.512500	15.11	46.00	30.89	9.000	N	OFF	9.7
1.892750	12.87	46.00	33.13	9.000	N	OFF	9.7
1.969250	11.85	46.00	34.15	9.000	N	OFF	9.7
2.421500	10.53	46.00	35.47	9.000	N	OFF	9.8
2.799500	10.26	46.00	35.74	9.000	N	OFF	9.8
14.578250	22.64	50.00	27.36	9.000	N	OFF	10.3
14.654750	22.28	50.00	27.72	9.000	N	OFF	10.3
14.731250	22.11	50.00	27.89	9.000	N	OFF	10.3
14.805500	21.70	50.00	28.30	9.000	N	OFF	10.3
14.884250	21.25	50.00	28.75	9.000	N	OFF	10.3
14.958500	20.82	50.00	29.18	9.000	N	OFF	10.3

2021-01-07

오후 3:32:47

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESR / EMI Test Receiver	09/16/2020	Annual	101910
ESPAC	SU-642 /Temperature Chamber	03/18/2020	Annual	0093008124
Agilent	N9030A / Signal Analyzer	01/11/2021	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/02/2020	Annual	101231
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Keysight	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/25/2020	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/12/2020	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	06/26/2020	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	04/29/2019	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	07/28/2020	Annual	102168
Agilent	N9030A / Signal Analyzer	01/11/2021	Annual	MY49431210
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	03/02/2020	Annual	8
Wainwright Instruments	WHKX8-6090-7000-18000-40SS/ High Pass Filter	03/02/2020	Annual	25
Api tech.	18B-03 / Attenuator (3 dB)	03/02/2020	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	03/02/2020	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	03/02/2020	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	03/02/2020	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

**11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2101-FC084-P