



ELEMENT SUWON

13, Heungdeok 1-ro, Giheung-gu, Yongin-si,
Gyeonggi-do, 16954 South Korea
Tel. 031.660.7319 / Fax 031.660.7318
<http://www.element.com>

PART 27 MEASUREMENT REPORT

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
11/30/2023 - 12/12/2023
Test Report Issue Date:
12/19/2023
Test Site/Location:
Element lab., Gyeonggi-do, South Korea
Test Report Serial No.:
1M2310260110-04.A3L

FCC ID:	A3LSMA356E
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-A356E/DS
Additional Model(s): SM-A356E
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: 27
Test Procedure(s): ANSI C63.26-2015

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Prepared by

Reviewed by

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 1 of 137

TABLE OF CONTENTS

1.0	INTRODUCTION	6
1.1	Scope	6
1.2	Element Test Location.....	6
1.3	Test Facility / Accreditations.....	6
2.0	PRODUCT INFORMATION.....	7
2.1	Equipment Description	7
2.2	Device Capabilities.....	7
2.3	Test Configuration	7
2.4	Software and Firmware	7
2.5	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Power and Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS	12
7.1	Summary.....	12
7.2	Conducted Output Power Data	14
7.3	Occupied Bandwidth	19
7.4	Spurious and Harmonic Emissions at Antenna Terminal	64
7.5	Band Edge Emissions at Antenna Terminal.....	77
7.6	Peak-Average Ratio	97
7.7	Radiated Power (ERP/EIRP).....	107
7.8	Radiated Spurious Emissions Measurements	114
7.9	Frequency Stability / Temperature Variation	131
8.0	CONCLUSION.....	137

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 2 of 137

MEASUREMENT REPORT

FCC Part 27

Antenna-A								
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
LTE Band 12/17	10 MHz	QPSK	704.0 - 711.0	0.077	18.86	0.126	21.01	9M04G7D
		16QAM	704.0 - 711.0	0.067	18.26	0.110	20.41	9M05W7D
	5 MHz	QPSK	701.5 - 713.5	0.087	19.40	0.143	21.55	4M55G7D
		16QAM	701.5 - 713.5	0.074	18.68	0.121	20.83	4M55W7D
	3 MHz	QPSK	700.5 - 714.5	0.088	19.45	0.145	21.60	2M73G7D
		16QAM	700.5 - 714.5	0.075	18.73	0.122	20.88	2M73W7D
	1.4 MHz	QPSK	699.7 - 715.3	0.091	19.59	0.149	21.74	1M10G7D
		16QAM	699.7 - 715.3	0.076	18.78	0.124	20.93	1M10W7D
LTE Band 13	10 MHz	QPSK	782.0	0.056	17.48	0.092	19.63	9M04G7D
		16QAM	782.0	0.048	16.78	0.078	18.93	8M99W7D
	5 MHz	QPSK	779.5 - 784.5	0.057	17.56	0.094	19.71	4M55G7D
		16QAM	779.5 - 784.5	0.048	16.78	0.078	18.93	4M54W7D

Overview Table (<1GHz Bands)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 3 of 137

Antenna-B							
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator	
				Max. Power [W]	Max. Power [dBm]		
WCDMA1700	N/A	Spread Spectrum	1712.4 - 1752.6	0.184	22.64	4M17F9W	
LTE Band 66/4	20 MHz	QPSK	1720.0 - 1770.0	0.211	23.24	18M1G7D	
		16QAM	1720.0 - 1770.0	0.166	22.20	18M0W7D	
	15 MHz	QPSK	1717.5 - 1772.5	0.210	23.23	13M5G7D	
		16QAM	1717.5 - 1772.5	0.174	22.41	13M6W7D	
	10 MHz	QPSK	1715.0 - 1775.0	0.205	23.13	9M06G7D	
		16QAM	1715.0 - 1775.0	0.169	22.27	9M09W7D	
	5 MHz	QPSK	1712.5 - 1777.5	0.214	23.30	4M56G7D	
		16QAM	1712.5 - 1777.5	0.167	22.22	4M55W7D	
	3 MHz	QPSK	1711.5 - 1778.5	0.217	23.37	2M72G7D	
		16QAM	1711.5 - 1778.5	0.173	22.39	2M74W7D	
	1.4 MHz	QPSK	1710.7 - 1779.3	0.219	23.41	1M10G7D	
		16QAM	1710.7 - 1779.3	0.169	22.28	1M10W7D	
	NR Band n66	40 MHz	$\pi/2$ BPSK	1730.0 - 1760.0	0.216	23.34	39M0G7D
			QPSK	1730.0 - 1760.0	0.223	23.49	38M9G7D
16QAM			1730.0 - 1760.0	0.171	22.34	38M8W7D	
30 MHz		$\pi/2$ BPSK	1725.0 - 1765.0	0.215	23.33	28M8G7D	
		QPSK	1725.0 - 1765.0	0.218	23.39	28M8G7D	
		16QAM	1725.0 - 1765.0	0.172	22.36	28M8W7D	
25 MHz		$\pi/2$ BPSK	1722.5 - 1767.5	0.207	23.16	23M1G7D	
		QPSK	1722.5 - 1767.5	0.218	23.38	23M9G7D	
		16QAM	1722.5 - 1767.5	0.166	22.20	23M9W7D	
20 MHz		$\pi/2$ BPSK	1720.0 - 1770.0	0.213	23.28	18M0G7D	
		QPSK	1720.0 - 1770.0	0.220	23.42	19M0G7D	
		16QAM	1720.0 - 1770.0	0.174	22.41	19M1W7D	
15 MHz		$\pi/2$ BPSK	1717.5 - 1772.5	0.217	23.37	13M5G7D	
		QPSK	1717.5 - 1772.5	0.224	23.51	14M2G7D	
		16QAM	1717.5 - 1772.5	0.176	22.44	14M2W7D	
10 MHz		$\pi/2$ BPSK	1715.0 - 1775.0	0.211	23.25	9M06G7D	
		QPSK	1715.0 - 1775.0	0.219	23.40	9M35G7D	
		16QAM	1715.0 - 1775.0	0.176	22.45	9M34W7D	
5 MHz		$\pi/2$ BPSK	1712.5 - 1777.5	0.201	23.03	4M54G7D	
		QPSK	1712.5 - 1777.5	0.206	23.14	4M54G7D	
		16QAM	1712.5 - 1777.5	0.159	22.02	4M53W7D	

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 4 of 137

Antenna-F						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 66/4	20 MHz	QPSK	1720.0 - 1770.0	0.089	19.48	18M0G7D
		16QAM	1720.0 - 1770.0	0.083	19.21	18M0W7D
	15 MHz	QPSK	1717.5 - 1772.5	0.088	19.45	13M5G7D
		16QAM	1717.5 - 1772.5	0.082	19.16	13M5W7D
	10 MHz	QPSK	1715.0 - 1775.0	0.087	19.42	9M04G7D
		16QAM	1715.0 - 1775.0	0.086	19.32	9M09W7D
	5 MHz	QPSK	1712.5 - 1777.5	0.086	19.33	4M55G7D
		16QAM	1712.5 - 1777.5	0.080	19.02	4M54W7D
	3 MHz	QPSK	1711.5 - 1778.5	0.085	19.30	2M73G7D
		16QAM	1711.5 - 1778.5	0.081	19.09	2M72W7D
	1.4 MHz	QPSK	1710.7 - 1779.3	0.085	19.27	1M10G7D
		16QAM	1710.7 - 1779.3	0.080	19.01	1M11W7D
NR Band n66	40 MHz	$\pi/2$ BPSK	1730.0 - 1760.0	0.110	20.40	38M9G7D
		QPSK	1730.0 - 1760.0	0.109	20.36	38M9G7D
		16QAM	1730.0 - 1760.0	0.097	19.85	38M8W7D
	30 MHz	$\pi/2$ BPSK	1725.0 - 1765.0	0.109	20.36	28M9G7D
		QPSK	1725.0 - 1765.0	0.107	20.28	28M8G7D
		16QAM	1725.0 - 1765.0	0.097	19.85	28M7W7D
	25 MHz	$\pi/2$ BPSK	1725.5 - 1767.5	0.110	20.43	23M1G7D
		QPSK	1725.5 - 1767.5	0.113	20.54	23M9G7D
		16QAM	1725.5 - 1767.5	0.094	19.71	23M9W7D
	20 MHz	$\pi/2$ BPSK	1720.0 - 1770.0	0.107	20.29	18M0G7D
		QPSK	1720.0 - 1770.0	0.110	20.43	19M1G7D
		16QAM	1720.0 - 1770.0	0.097	19.86	19M0W7D
	15 MHz	$\pi/2$ BPSK	1717.5 - 1772.5	0.112	20.50	13M5G7D
		QPSK	1717.5 - 1772.5	0.111	20.44	14M2G7D
		16QAM	1717.5 - 1772.5	0.094	19.75	14M2W7D
	10 MHz	$\pi/2$ BPSK	1715.0 - 1775.0	0.111	20.46	9M03G7D
		QPSK	1715.0 - 1775.0	0.110	20.43	9M34G7D
		16QAM	1715.0 - 1775.0	0.098	19.90	9M37W7D
	5 MHz	$\pi/2$ BPSK	1712.5 - 1777.5	0.103	20.15	4M55G7D
		QPSK	1712.5 - 1777.5	0.101	20.05	4M54G7D
		16QAM	1712.5 - 1777.5	0.092	19.62	4M53W7D

Overview Table (>1GHz Bands)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 5 of 137

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISED: 26168

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 6 of 137

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMA356E**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: 1034M, 1197M, 1245M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version A356BXXU0AWJ3 installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 7 of 137

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 8 of 137

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.95
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (>1GHz)	4.82
Radiated Disturbance (>18GHz)	4.96

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 9 of 137

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	2023-07-04	Annual	2024-07-03	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	2023-07-05	Annual	2024-07-04	1839097
Anritsu	MA24106A	USB Power Sensor	2023-07-05	Annual	2024-07-04	1244512
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	2022-10-21	Biennial	2024-10-20	10160045
Com-Power	PAM-118A	Preamplifier	2023-07-05	Annual	2024-07-04	551042
Espec	SH-242	Environmental Chamber	2023-07-05	Annual	2024-07-04	93011064
Fairview Microwave	FM2CP1122-10	2.92mm Directional Coupler	2023-07-04	Annual	2024-07-03	1946
Keysight Technologies	N9030B	MXA Signal Analyzer	2023-07-04	Annual	2024-07-03	MY57143276
Mini-Circuits	BW-N10W5+	Attenuator	2023-07-04	Annual	2024-07-03	1607
Mini-Circuits	BW-N10W5+	Attenuator	2023-07-04	Annual	2024-07-03	1607
Rohde & Schwarz	TS-PR18	Preamplifier	2023-07-05	Annual	2024-07-04	102141
Rohde & Schwarz	SMB100A03	Signal Generator	2023-01-17	Annual	2024-01-16	182487
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2023-02-17	Annual	2024-02-16	131453
Rohde & Schwarz	FSW43	Signal and Spectrum Analyzer	2023-01-13	Annual	2024-01-12	101955
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2023-02-17	Annual	2024-02-16	102131
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	2023-06-01	Biennial	2025-05-31	9162-217
Schwarzbeck	UHA9105	Dipole Antenna	2022-07-19	Biennial	2024-07-18	91052522
Sunol	DRH-118	Horn Antenna	2023-01-26	Biennial	2025-01-25	A060215

Table 5-1. Test Equipment

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 10 of 137

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 11 of 137

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMA356E
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): WCDMA/NR/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power*	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 13)	2.1051, 27.53(c), 27.53(f)	Undesirable emissions must meet the limits detailed in sections 27.53(c) and 27.53(f)	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (LTE Band 12)	2.1051, 27.53(g)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (WCDMA AWS; LTE Band 4, 66; NR Band n66)	2.1051, 27.53(h)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Sections 7.4, 7.5
	Peak-to-Average Ratio (WCDMA AWS; LTE Band 4, 66; NR Band n66)	27.50(d)(5)	≤ 13 dB	PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block	PASS	Section 7.9
RADIATED	Effective Radiated Power (LTE Band 13)	27.50(b)(10)	≤ 3 Watts max. ERP	PASS	Section 7.7
	Effective Radiated Power (LTE Band 12)	27.50(c)(10)	≤ 3 Watts max. ERP	PASS	Section 7.7
	Equivalent Isotropic Radiated Power (WCDMA AWS; LTE Band 4, 66; NR Band n66)	27.50(d)(4)	≤ 1 Watt max. EIRP	PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 13)	2.1053, 27.53(c), 27.53(f)	Undesirable emissions must meet the limits detailed in sections 27.53(c) and 27.53(f)	PASS	Section 7.8
	Radiated Spurious Emissions (LTE Band 12)	2.1053, 27.53(g)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Section 7.8
	Radiated Spurious Emissions (WCDMA AWS; LTE Band 4, 66; NR Band n66)	2.1053, 27.53(h)(1)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Section 7.8

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the RF Exposure Report.

Table 7-1. Summary of Test Results

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 12 of 137



Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 13 of 137

7.2 Conducted Output Power Data

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Detector = RMS
2. Trace mode = trace average for continuous emissions, max hold for pulse emissions
3. Sweep time = auto couple
4. The trace was allowed to stabilize
5. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

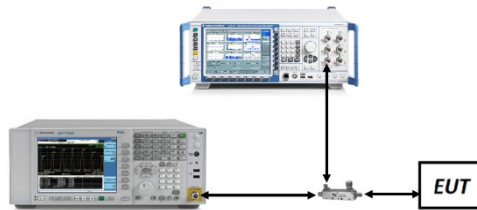


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. All other conducted power measurements are contained in the RF exposure report for this filing.
3. Conducted power was found to reduce for the higher order QAM modulations when compared to 16QAM. Due to this trend, only the worst-case QAM (16QAM) powers are included in this section.

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 14 of 137

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	132072	1720.0	1 / 0	23.64
		132322	1745.0	1 / 0	23.45
		132572	1770.0	1 / 0	23.68
	16-QAM	132072	1720.0	1 / 0	22.90
15 MHz	QPSK	132047	1717.5	1 / 0	23.64
		132322	1745.0	1 / 0	23.50
		132597	1772.5	1 / 0	23.63
	16-QAM	132047	1717.5	1 / 0	22.88
10 MHz	QPSK	132022	1715.0	1 / 0	23.54
		132322	1745.0	1 / 0	23.33
		132622	1775.0	1 / 0	23.56
	16-QAM	132022	1715.0	1 / 0	22.73
5 MHz	QPSK	131997	1712.5	1 / 24	23.71
		132322	1745.0	1 / 0	23.60
		132647	1777.5	1 / 0	23.74
	16-QAM	131997	1712.5	1 / 12	22.83
3 MHz	QPSK	131987	1711.5	1 / 0	23.78
		132322	1745.0	1 / 7	23.52
		132657	1778.5	1 / 0	23.78
	16-QAM	131987	1711.5	1 / 7	22.98
1.4 MHz	QPSK	131979	1710.7	1 / 0	23.83
		132322	1745.0	1 / 3	23.28
		132665	1779.3	1 / 0	23.76
	16-QAM	131979	1710.7	1 / 0	22.80

Table 7-2. Conducted Power Output Data (LTE Band 66/4 – Ant B)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	132072	1720.0	1 / 99	23.42
		132322	1745.0	1 / 0	23.23
		132572	1770.0	1 / 99	23.36
	16-QAM	132072	1720.0	1 / 50	22.95
15 MHz	QPSK	132047	1717.5	1 / 37	23.40
		132322	1745.0	1 / 74	23.18
		132597	1772.5	1 / 74	23.19
	16-QAM	132047	1717.5	1 / 74	22.90
10 MHz	QPSK	132022	1715.0	1 / 25	23.36
		132322	1745.0	1 / 0	23.23
		132622	1775.0	1 / 0	23.32
	16-QAM	132622	1775.0	1 / 49	23.08
5 MHz	QPSK	131997	1712.5	1 / 24	23.28
		132322	1745.0	1 / 24	23.19
		132647	1777.5	1 / 0	23.26
	16-QAM	132322	1745.0	1 / 12	22.86
3 MHz	QPSK	131987	1711.5	1 / 14	23.24
		132322	1745.0	1 / 0	23.11
		132657	1778.5	1 / 0	23.16
	16-QAM	132657	1778.5	1 / 7	22.88
1.4 MHz	QPSK	131979	1710.7	1 / 5	23.21
		132322	1745.0	1 / 5	23.14
		132665	1779.3	1 / 0	23.19
	16-QAM	132322	1745.0	1 / 5	22.81

Table 7-3. Conducted Power Output Data (LTE Band 66/4 – Ant F)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 15 of 137

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	346000	1730.0	1 / 1	23.95
		349000	1745.0	1 / 1	23.82
		352000	1760.0	1 / 1	23.86
	QPSK	346000	1730.0	1 / 1	23.93
		349000	1745.0	1 / 1	23.81
		352000	1760.0	1 / 1	23.92
16-QAM	349000	1745.0	1 / 1	22.82	
30 MHz	π/2 BPSK	345000	1725.0	1 / 1	23.95
		349000	1745.0	1 / 158	23.86
		353000	1765.0	1 / 80	23.89
	QPSK	345000	1725.0	1 / 80	23.83
		349000	1745.0	1 / 1	23.94
		353000	1765.0	1 / 158	23.86
16-QAM	353000	1765.0	1 / 80	22.90	
25 MHz	π/2 BPSK	344500	1722.5	1 / 66	23.78
		349000	1745.0	1 / 66	23.95
		353500	1767.5	1 / 131	23.73
	QPSK	344500	1722.5	1 / 66	23.83
		349000	1745.0	1 / 1	23.96
		353500	1767.5	1 / 1	23.66
16-QAM	349000	1745.0	1 / 131	22.94	
20 MHz	π/2 BPSK	344000	1720.0	1 / 104	23.89
		349000	1745.0	1 / 104	23.86
		354000	1770.0	1 / 104	23.87
	QPSK	344000	1720.0	1 / 53	23.86
		349000	1745.0	1 / 1	23.83
		354000	1770.0	1 / 104	23.74
16-QAM	349000	1745.0	1 / 1	22.89	
15 MHz	π/2 BPSK	343500	1717.5	1 / 39	23.98
		349000	1745.0	1 / 77	23.92
		354500	1772.5	1 / 39	23.94
	QPSK	343500	1717.5	1 / 1	23.95
		349000	1745.0	1 / 77	23.91
		354500	1772.5	1 / 1	23.89
16-QAM	349000	1745.0	1 / 77	22.97	
10 MHz	π/2 BPSK	343000	1715.0	1 / 1	23.86
		349000	1745.0	1 / 1	23.89
		355000	1775.0	1 / 50	23.82
	QPSK	343000	1715.0	1 / 1	23.84
		349000	1745.0	1 / 1	23.85
		355000	1775.0	1 / 26	23.71
16-QAM	343000	1715.0	1 / 1	22.92	
5 MHz	π/2 BPSK	342500	1712.5	1 / 1	23.65
		349000	1745.0	1 / 1	23.46
		355500	1777.5	1 / 1	23.62
	QPSK	342500	1712.5	1 / 1	23.58
		349000	1745.0	1 / 1	23.37
		355500	1777.5	1 / 1	23.59
16-QAM	342500	1712.5	1 / 1	22.49	

Table 7-4. Conducted Power Output Data (NR Band n66 – Ant B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 16 of 137

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	346000	1730.0	1 / 108	23.27
		349000	1745.0	1 / 1	23.14
		352000	1760.0	1 / 108	23.25
	QPSK	346000	1730.0	1 / 108	23.21
		349000	1745.0	1 / 1	23.05
		352000	1760.0	1 / 108	23.23
16-QAM	346000	1730.0	1 / 108	22.61	
30 MHz	π/2 BPSK	345000	1725.0	1 / 1	23.24
		349000	1745.0	1 / 1	23.31
		353000	1765.0	1 / 80	23.18
	QPSK	345000	1725.0	1 / 80	23.13
		349000	1745.0	1 / 1	23.20
		353000	1765.0	1 / 80	23.13
16-QAM	353000	1765.0	1 / 80	22.62	
25 MHz	π/2 BPSK	344500	1722.5	1 / 66	23.31
		349000	1745.0	1 / 131	23.13
		353500	1767.5	1 / 66	23.13
	QPSK	344500	1722.5	1 / 66	23.39
		349000	1745.0	1 / 1	23.17
		353500	1767.5	1 / 1	23.22
16-QAM	349000	1745.0	1 / 66	22.49	
20 MHz	π/2 BPSK	344000	1720.0	1 / 53	23.17
		349000	1745.0	1 / 1	23.18
		354000	1770.0	1 / 1	23.15
	QPSK	344000	1720.0	1 / 1	23.28
		349000	1745.0	1 / 1	23.18
		354000	1770.0	1 / 104	23.24
16-QAM	344000	1720.0	1 / 1	22.62	
15 MHz	π/2 BPSK	343500	1717.5	1 / 39	23.38
		349000	1745.0	1 / 77	23.18
		354500	1772.5	1 / 39	23.21
	QPSK	343500	1717.5	1 / 39	23.29
		349000	1745.0	1 / 77	23.25
		354500	1772.5	1 / 39	23.22
16-QAM	343500	1717.5	1 / 39	22.51	
10 MHz	π/2 BPSK	343000	1715.0	1 / 50	23.33
		349000	1745.0	1 / 26	23.17
		355000	1775.0	1 / 26	23.28
	QPSK	343000	1715.0	1 / 26	23.28
		349000	1745.0	1 / 26	23.18
		355000	1775.0	1 / 50	23.21
16-QAM	343000	1715.0	1 / 1	22.66	
5 MHz	π/2 BPSK	342500	1712.5	1 / 23	23.02
		349000	1745.0	1 / 1	22.76
		355500	1777.5	1 / 1	23.13
	QPSK	342500	1712.5	1 / 12	22.91
		349000	1745.0	1 / 1	22.63
		355500	1777.5	1 / 1	22.88
16-QAM	342500	1712.5	1 / 23	22.38	

Table 7-5. Conducted Power Output Data (NR Band n66 – Ant F)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 17 of 137



Mode	Modulation	Channel	Frequency [MHz]	Conducted Power [dBm]
WCDMA AWS	Spread Spectrum	1312	1710.0	23.78
		1413	1732.5	23.57
		1513	1755.0	23.62

Table 7-6. Conducted Power Output Data (WCDMA AWS Ant – B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 18 of 137

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

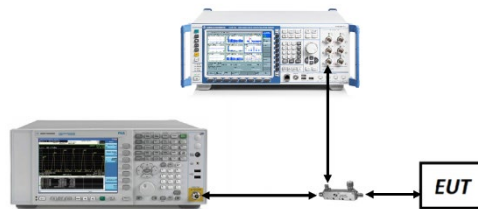


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 19 of 137

Mode	Bandwidth	Modulation	OBW [MHz]
LTE-B12-17	10 MHz	QPSK	9.04
		16QAM	9.05
	5 MHz	QPSK	4.55
		16QAM	4.55
	3 MHz	QPSK	2.73
		16QAM	2.73
	1.4 MHz	QPSK	1.10
		16QAM	1.10
LTE-B13	10 MHz	QPSK	9.04
		16QAM	8.99
	5 MHz	QPSK	4.55
		16QAM	4.54


Table 7-7. Occupied Bandwidth Test Results – Below 1GHz – Ant A

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 20 of 137

LTE Band 12/17 – Ant A

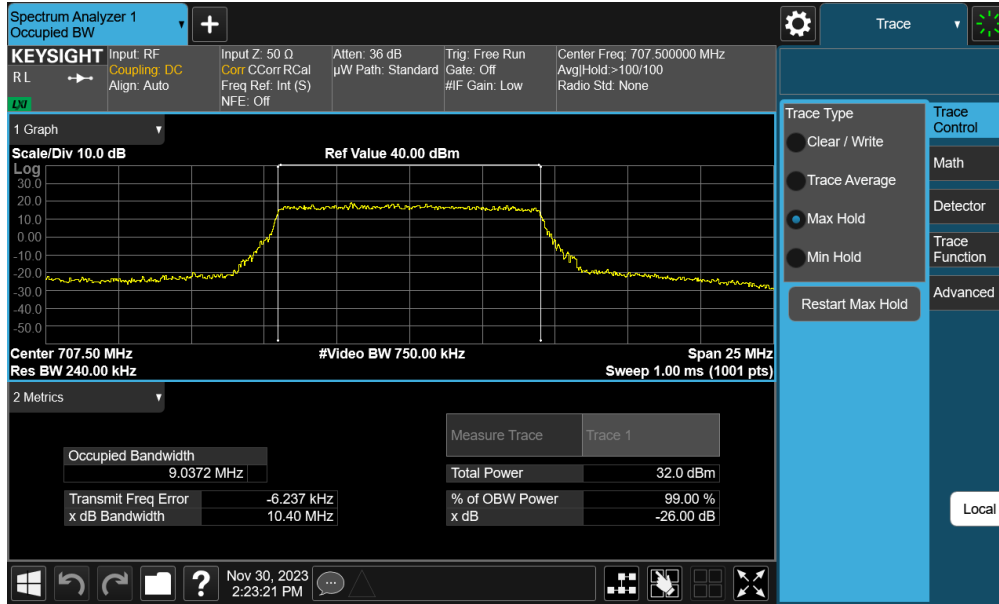


Plot 7-1. Occupied Bandwidth Plot (LTE Band 12/17 - 10MHz QPSK - Full RB – Ant A)

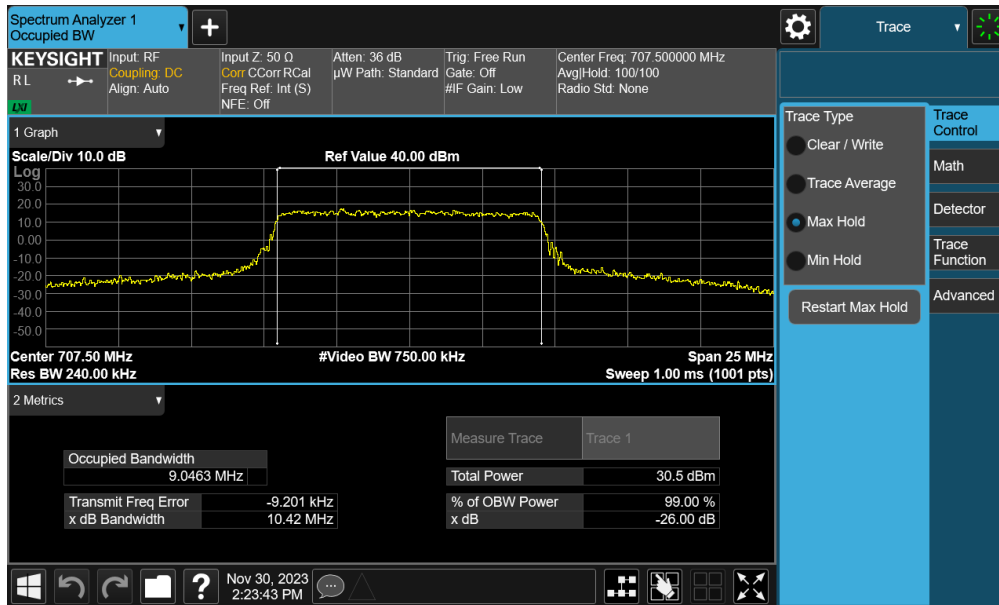


Plot 7-2. Occupied Bandwidth Plot (LTE Band 12/17 - 10MHz 16-QAM - Full RB – Ant A)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 21 of 137

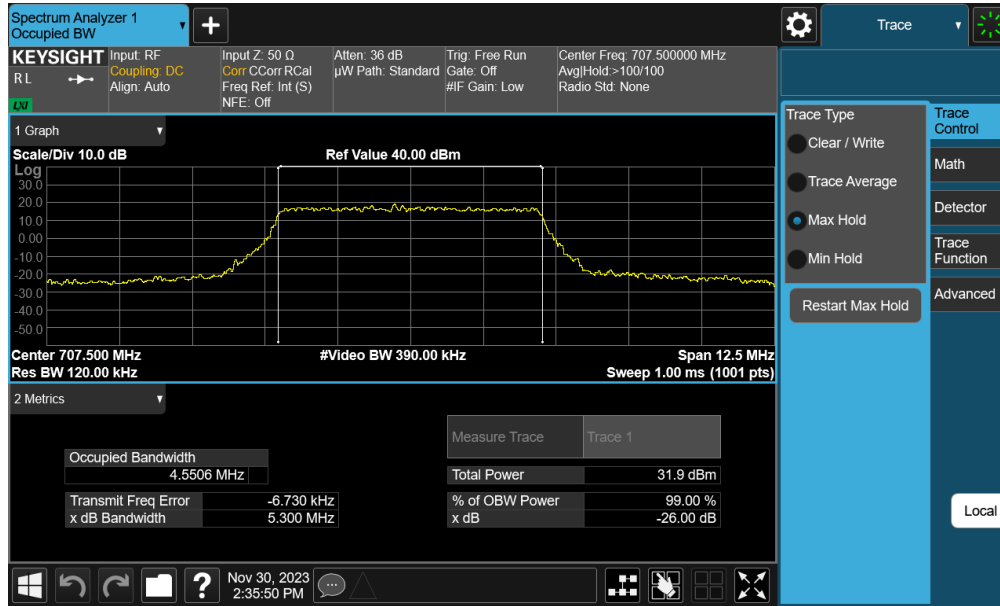


Plot 7-3. Occupied Bandwidth Plot (LTE Band 12/17 - 5MHz QPSK - Full RB – Ant A)

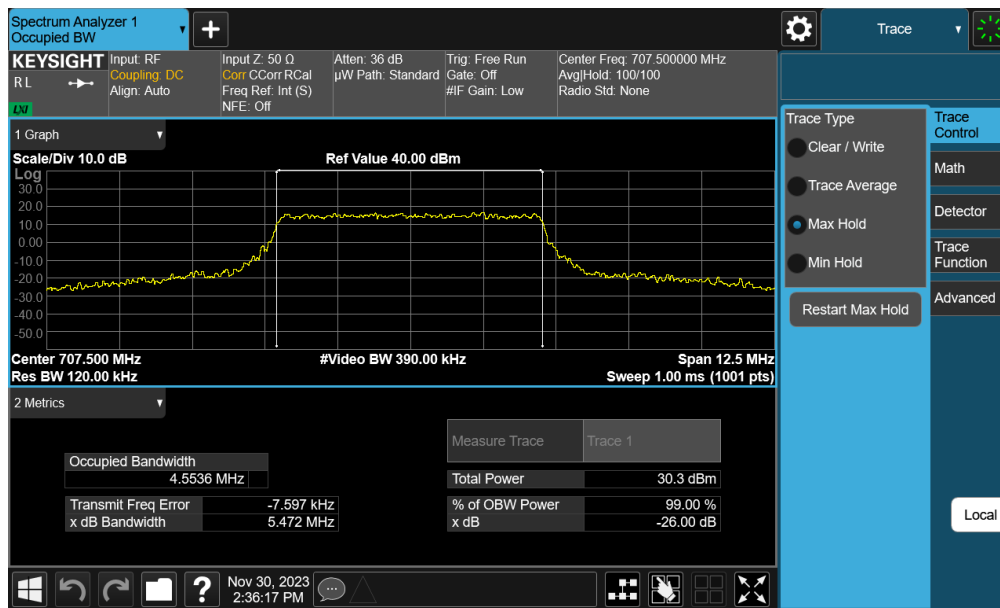


Plot 7-4. Occupied Bandwidth Plot (LTE Band 12/17 - 5MHz 16-QAM - Full RB – Ant A)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 22 of 137

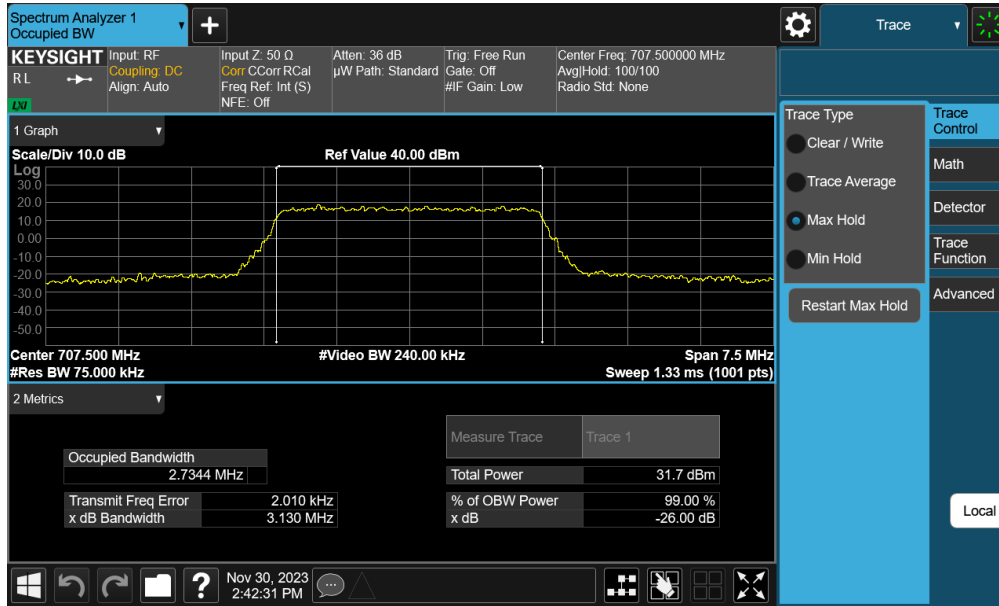


Plot 7-5. Occupied Bandwidth Plot (LTE Band 12 - 3MHz QPSK - Full RB – Ant A)

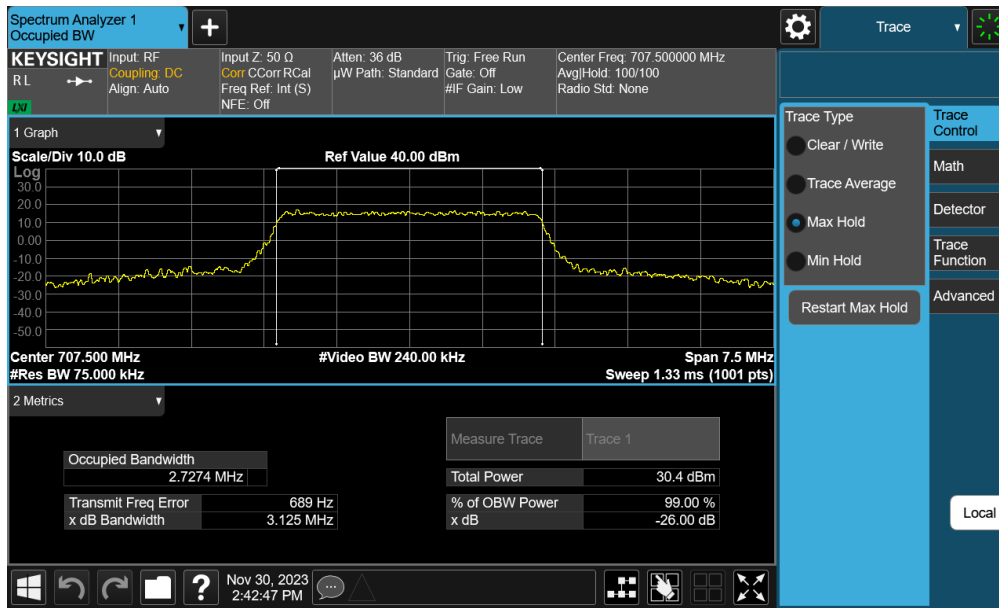

Plot 7-6. Occupied Bandwidth Plot (LTE Band 12 - 3MHz 16-QAM - Full RB – Ant A)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 23 of 137

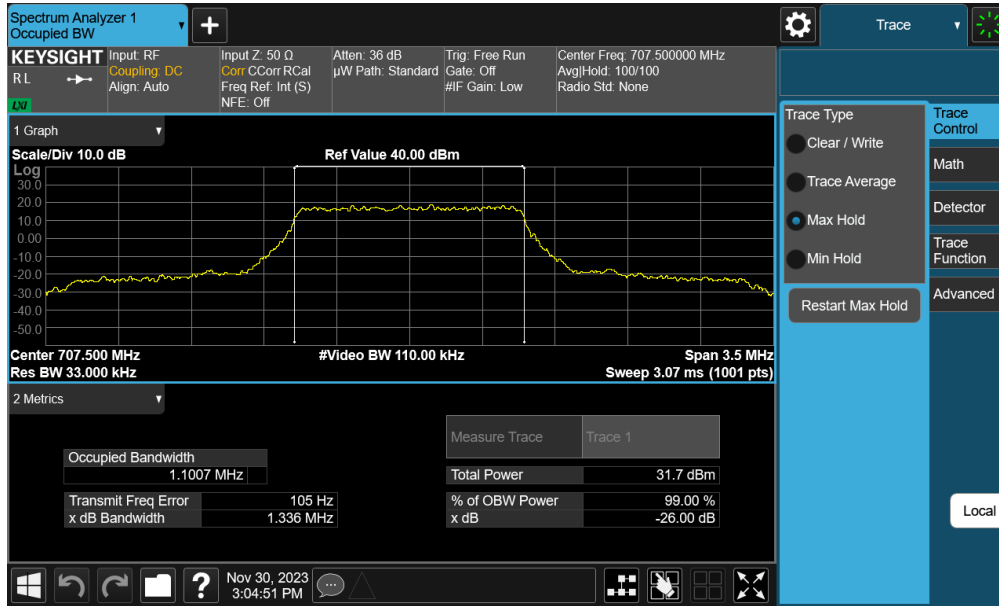


Plot 7-7. Occupied Bandwidth Plot (LTE Band 12 – 1.4MHz QPSK - Full RB – Ant A)




Plot 7-8. Occupied Bandwidth Plot (LTE Band 12 – 1.4MHz 16-QAM - Full RB – Ant A)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 24 of 137

LTE Band 13 – Ant A

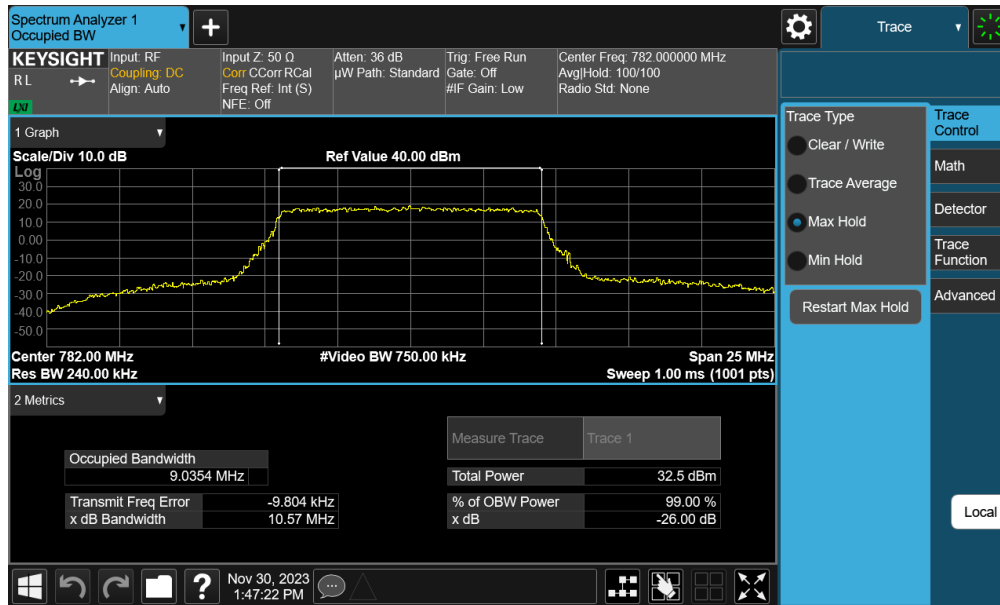


Plot 7-9. Occupied Bandwidth Plot (LTE Band 13 - 10MHz QPSK - Full RB – Ant A)

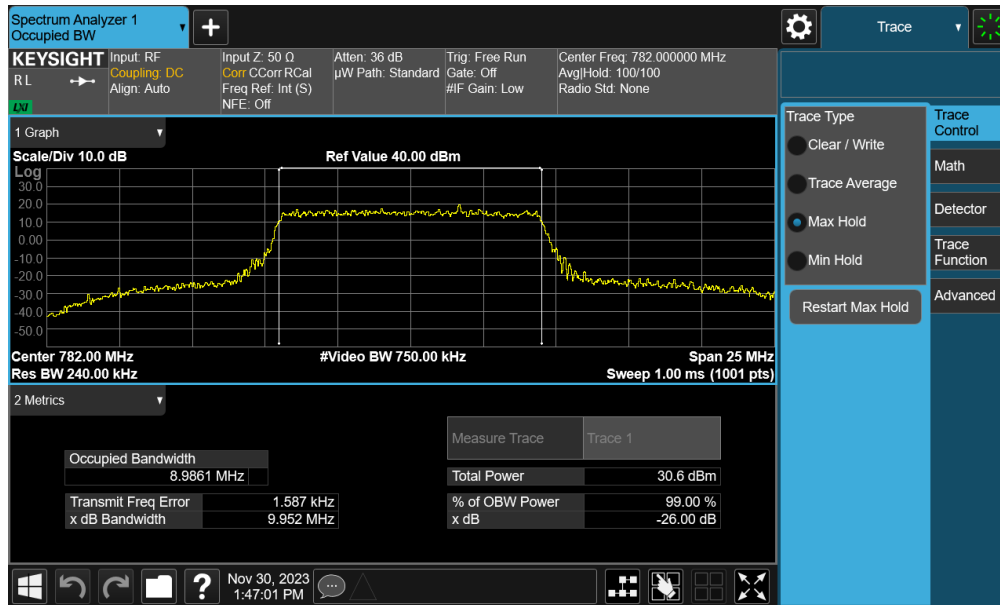


Plot 7-10. Occupied Bandwidth Plot (LTE Band 13 - 10MHz 16-QAM - Full RB – Ant A)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 25 of 137

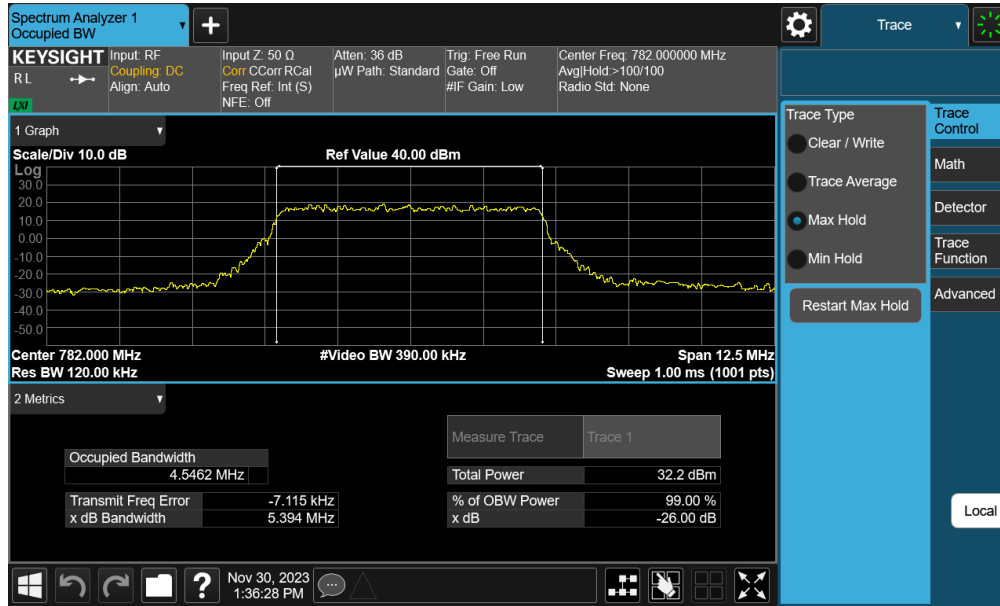

Plot 7-11. Occupied Bandwidth Plot (LTE Band 13 - 5MHz QPSK - Full RB - Ant A)

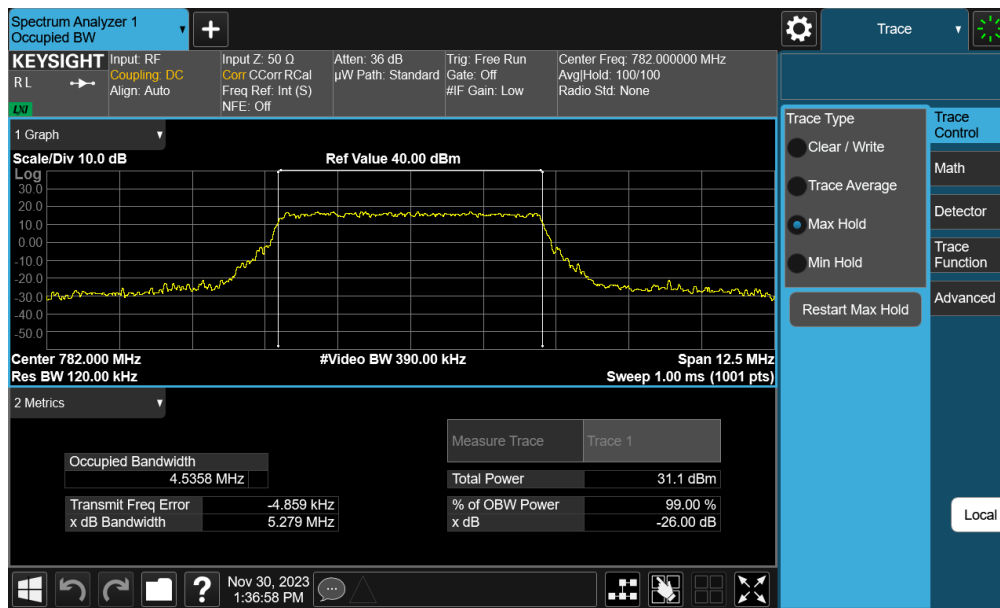

Plot 7-12. Occupied Bandwidth Plot (LTE Band 13 - 5MHz 16-QAM - Full RB - Ant A)


FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 26 of 137

Mode	Bandwidth	Modulation	OBW [MHz]	
WCDMA-AWS	N/A	GMSK	4.17	
LTE-B66-4	20 MHz	QPSK	18.06	
		16QAM	17.98	
	15 MHz	QPSK	13.54	
		16QAM	13.56	
	10 MHz	QPSK	9.06	
		16QAM	9.09	
	5 MHz	QPSK	4.56	
		16QAM	4.55	
	3 MHz	QPSK	2.72	
		16QAM	2.74	
	1.4 MHz	QPSK	1.10	
		16QAM	1.10	
	NR-n66	40 MHz	$\pi/2$ BPSK	38.97
			QPSK	38.86
16QAM			38.79	
30 MHz		$\pi/2$ BPSK	28.83	
		QPSK	28.79	
		16QAM	28.84	
25 MHz		$\pi/2$ BPSK	23.07	
		QPSK	23.92	
		16QAM	23.91	
20 MHz		$\pi/2$ BPSK	18.00	
		QPSK	19.02	
		16QAM	19.06	
15 MHz		$\pi/2$ BPSK	13.48	
		QPSK	14.20	
		16QAM	14.21	
10 MHz		$\pi/2$ BPSK	9.06	
		QPSK	9.35	
		16QAM	9.34	
5 MHz	$\pi/2$ BPSK	4.54		
	QPSK	4.54		
	16QAM	4.53		

Table 7-8. Occupied Bandwidth Test Results – Above 1GHz – Ant B

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 27 of 137



WCDMA AWS – Ant B

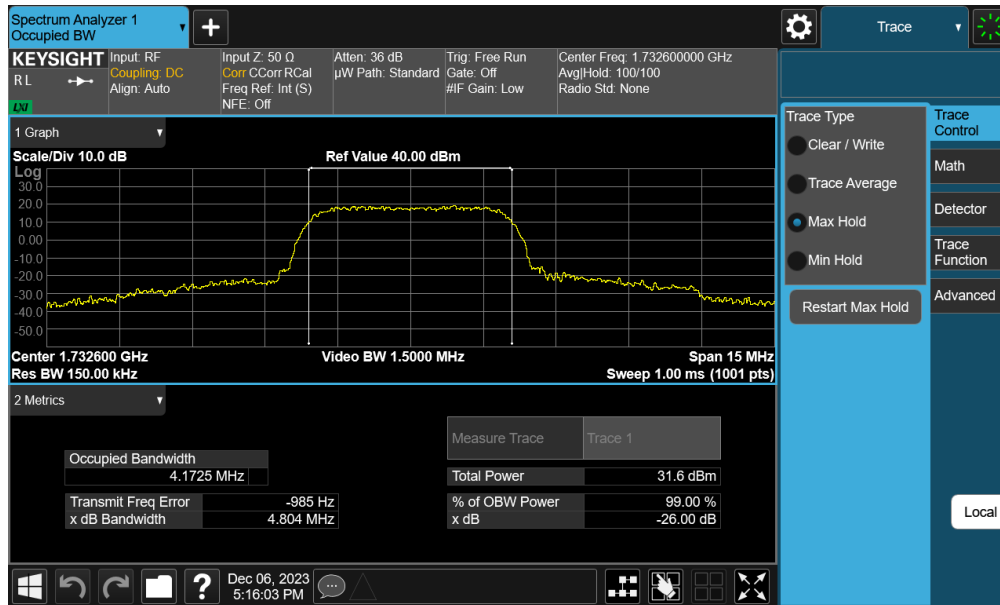


Plot 7-13. Occupied Bandwidth Plot (WCDMA, Ch. 1413 – Ant B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 28 of 137

LTE Band 66/4 - Ant B

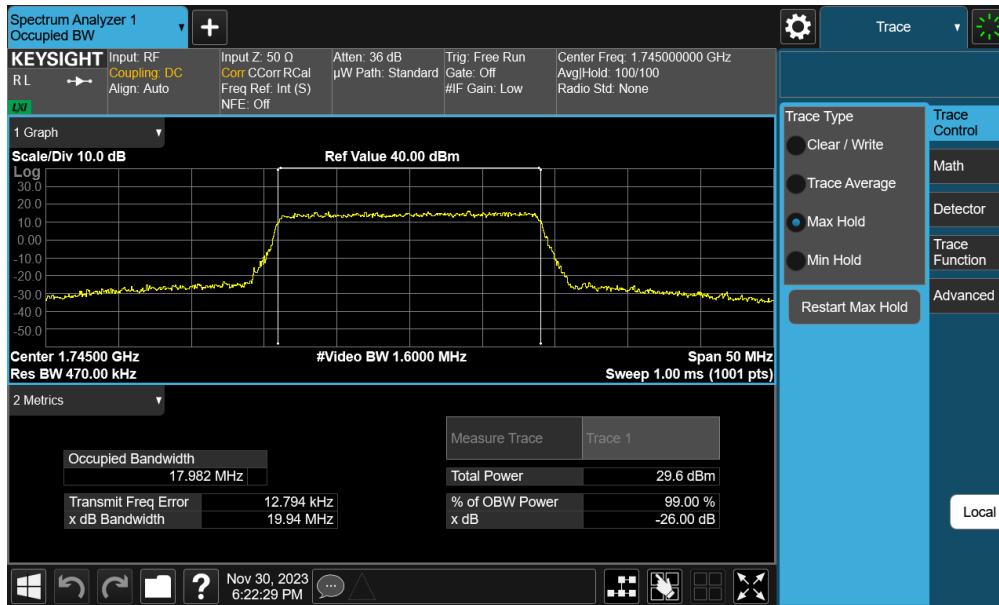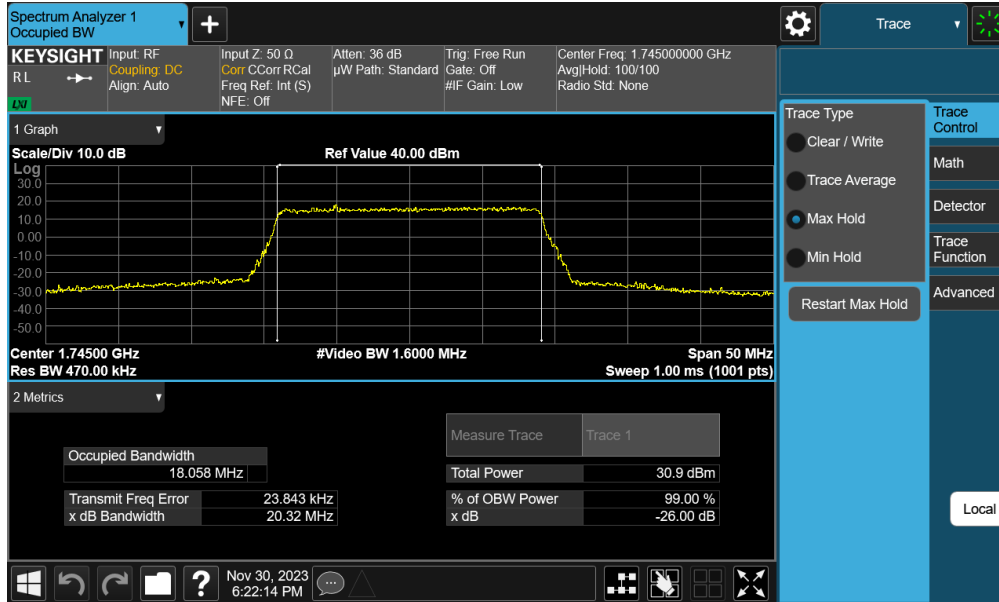

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 29 of 137

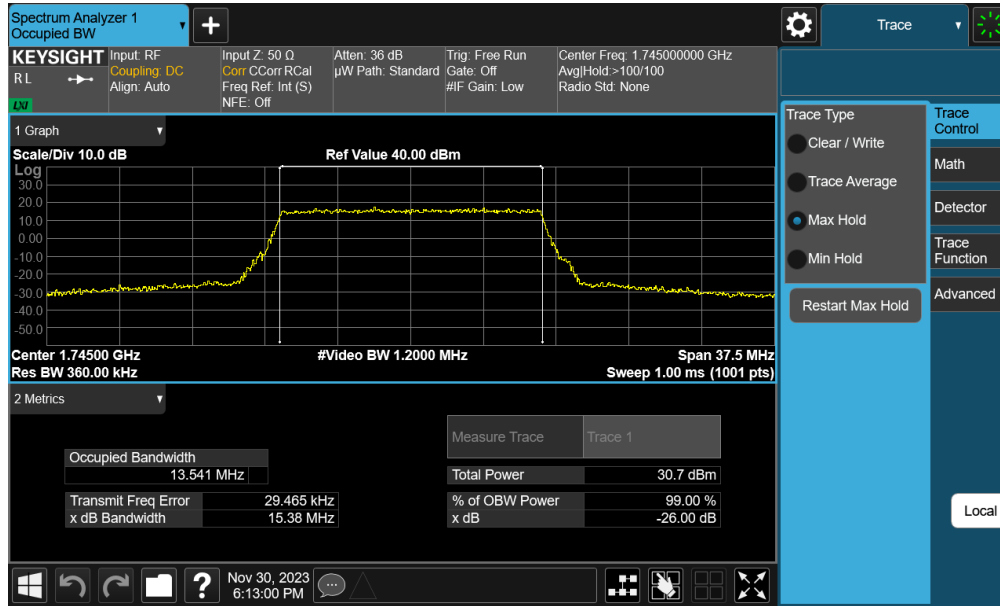


Plot 7-16. Occupied Bandwidth Plot (LTE Band 66/4 - 15MHz QPSK - Full RB - Ant B)



Plot 7-17. Occupied Bandwidth Plot (LTE Band 66/4 - 15MHz 16-QAM - Full RB - Ant B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 30 of 137

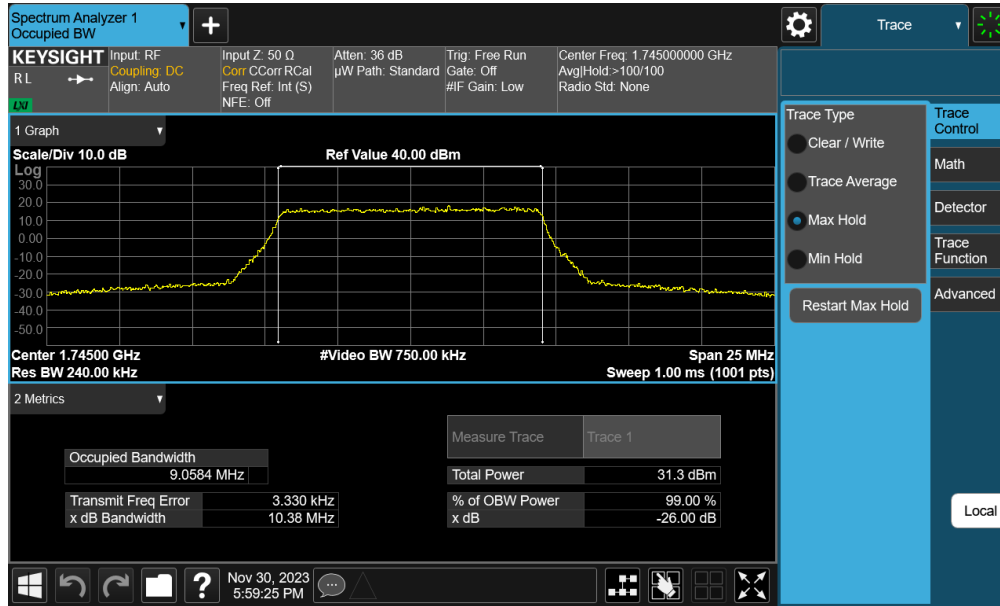


Plot 7-18. Occupied Bandwidth Plot (LTE Band 66/4 - 10MHz QPSK - Full RB - Ant B)




Plot 7-19. Occupied Bandwidth Plot (LTE Band 66/4 - 10MHz 16-QAM - Full RB - Ant B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 31 of 137

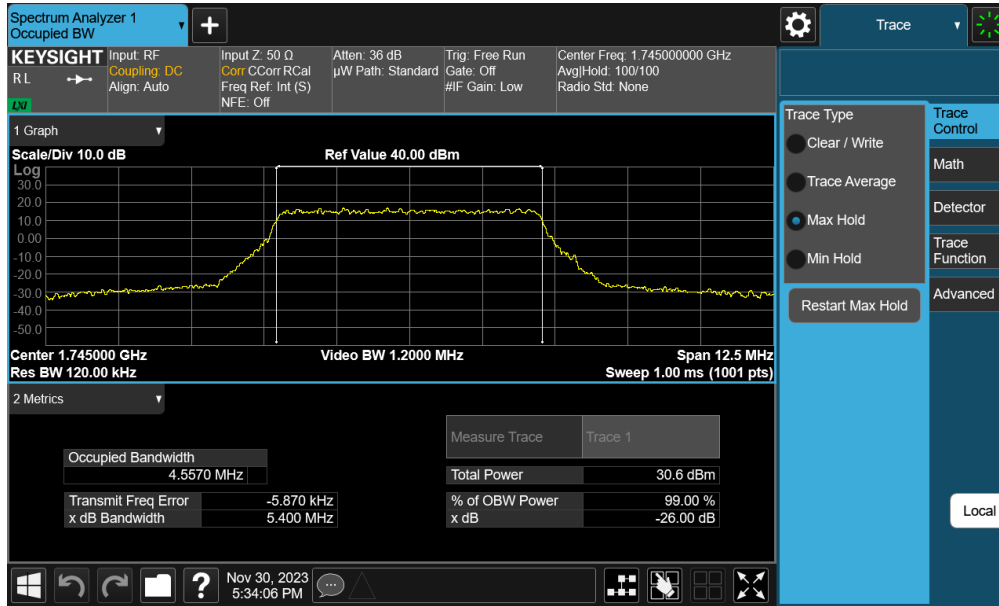


Plot 7-20. Occupied Bandwidth Plot (LTE Band 66/4 - 5MHz QPSK - Full RB - Ant B)

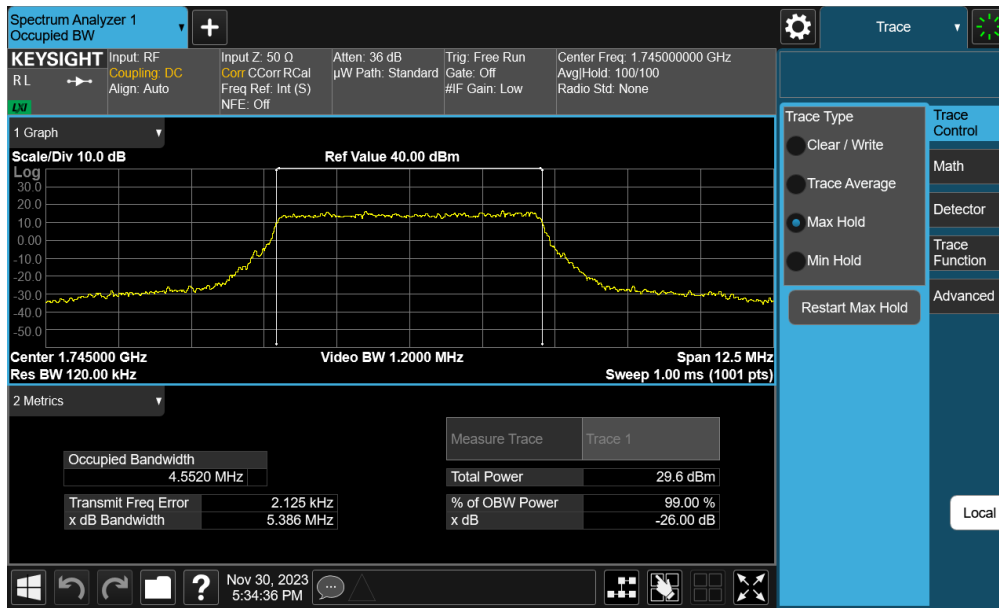


Plot 7-21. Occupied Bandwidth Plot (LTE Band 66/4 - 5MHz 16-QAM - Full RB - Ant B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 32 of 137

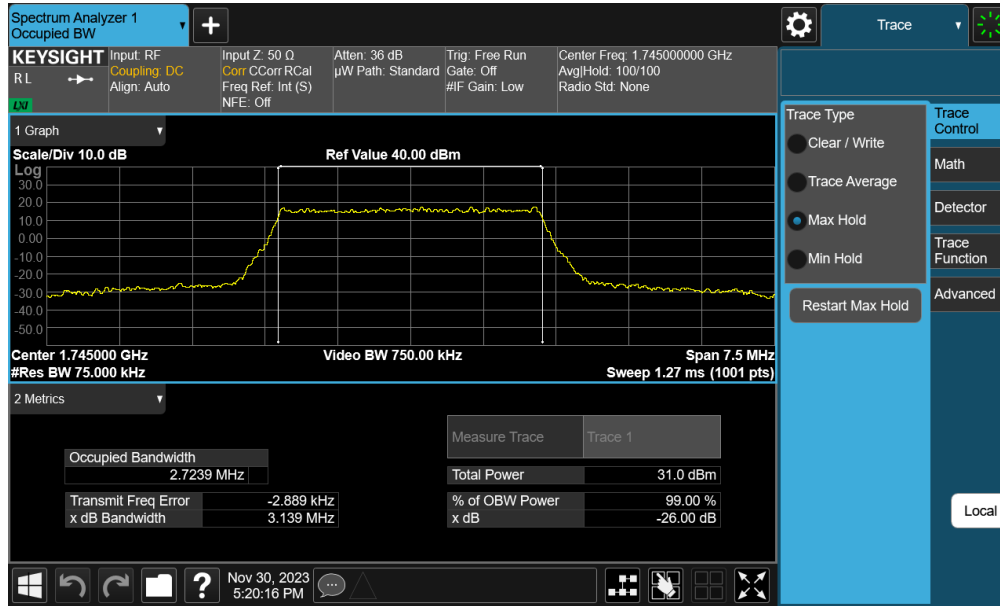


Plot 7-22. Occupied Bandwidth Plot (LTE Band 66/4 - 3MHz QPSK - Full RB - Ant B)

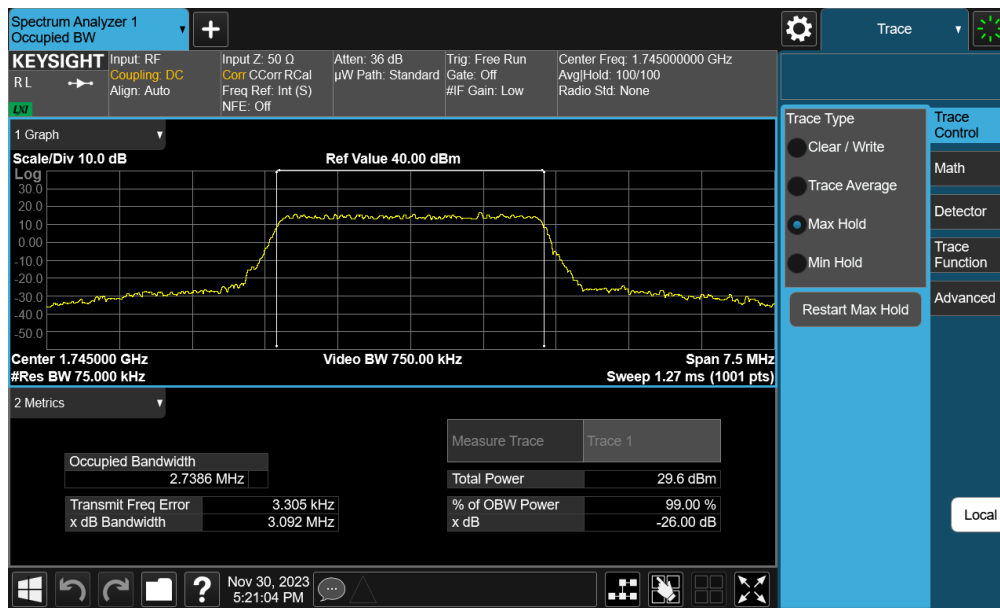


Plot 7-23. Occupied Bandwidth Plot (LTE Band 66/4 - 3MHz 16-QAM - Full RB - Ant B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 33 of 137

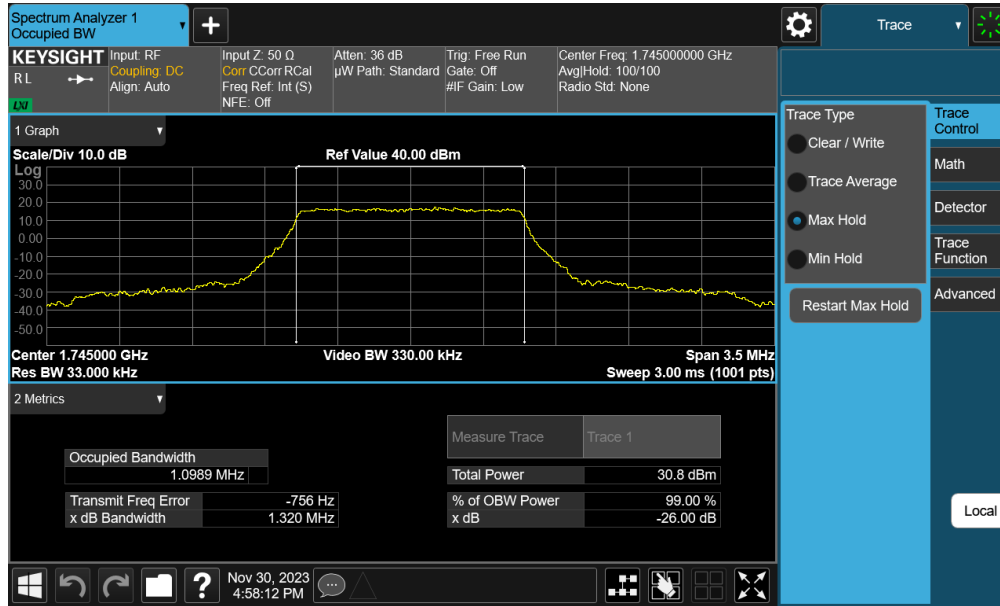


Plot 7-24. Occupied Bandwidth Plot (LTE Band 66/4 - 1.4MHz QPSK - Full RB - Ant B)

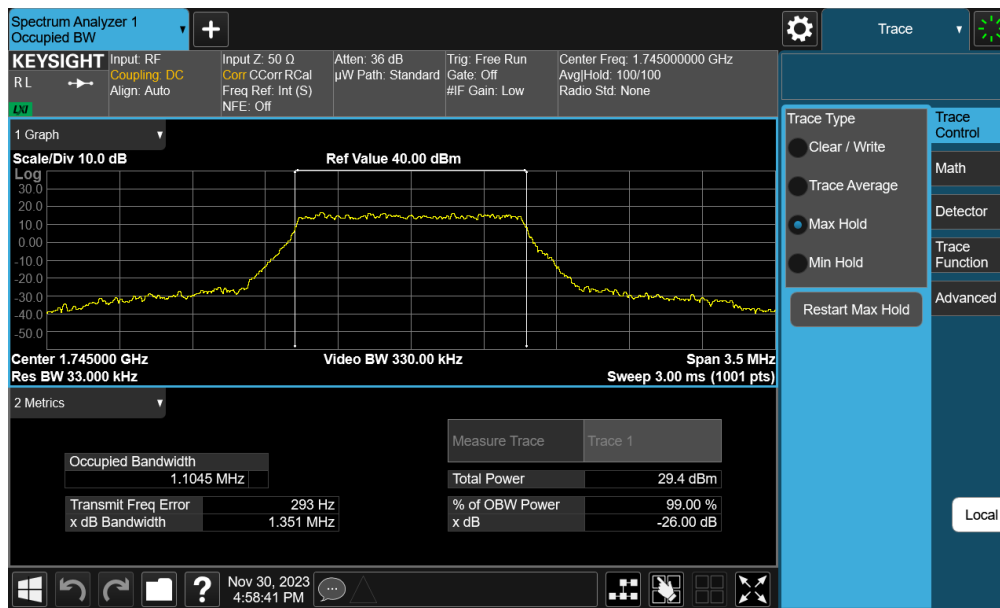

Plot 7-25. Occupied Bandwidth Plot (LTE Band 66/4 - 1.4MHz 16-QAM - Full RB - Ant B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 34 of 137

NR Band n66 – Ant B

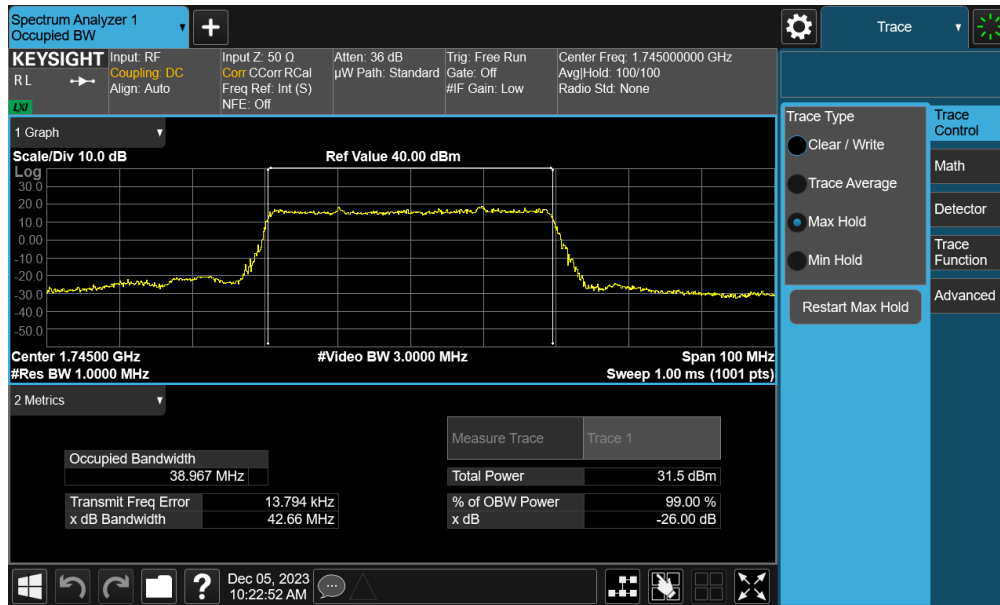


Plot 7-26. Occupied Bandwidth Plot (NR Band n66 - 40.0MHz DFT-s-OFDM BPSK - Full RB – Ant B)




Plot 7-27. Occupied Bandwidth Plot (NR Band n66 - 40.0MHz CP-OFDM QPSK - Full RB – Ant B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 35 of 137


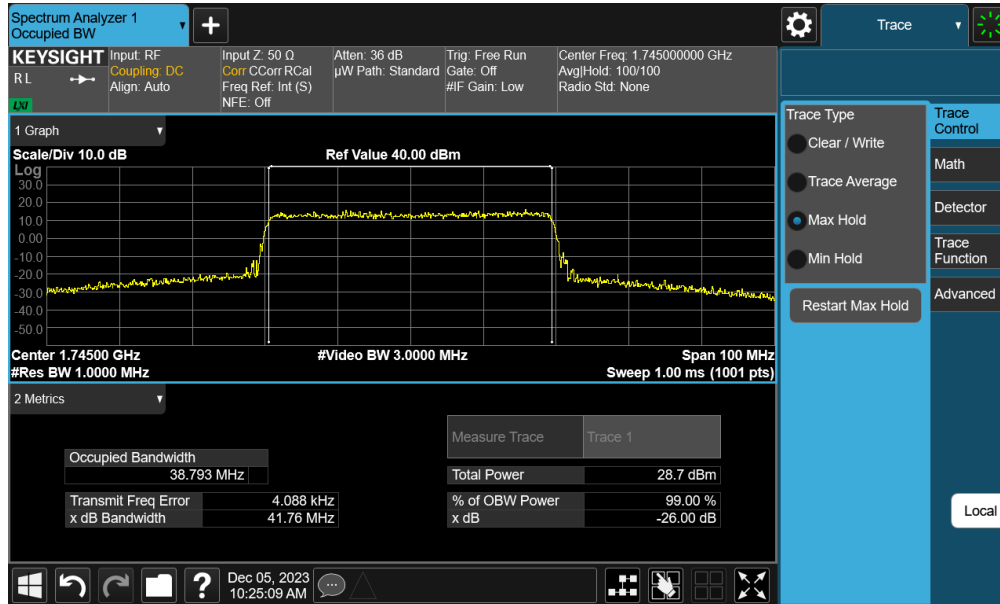


Plot 7-28. Occupied Bandwidth Plot (NR Band n66 - 40.0MHz CP-OFDM 16QAM - Full RB – Ant B)

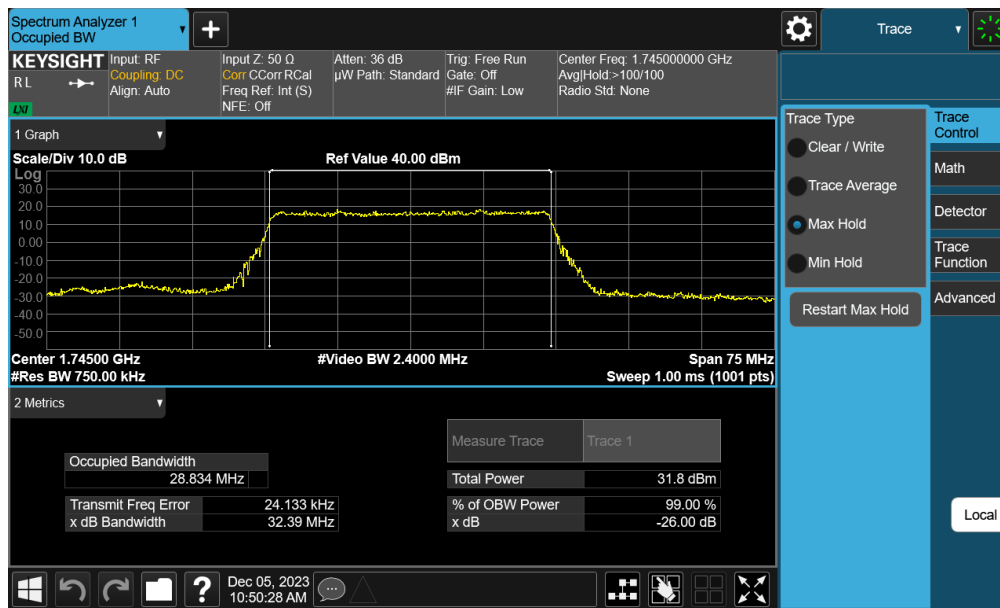


Plot 7-29. Occupied Bandwidth Plot (NR Band n66 - 30.0MHz DFT-s-OFDM BPSK - Full RB – Ant B)


FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 36 of 137

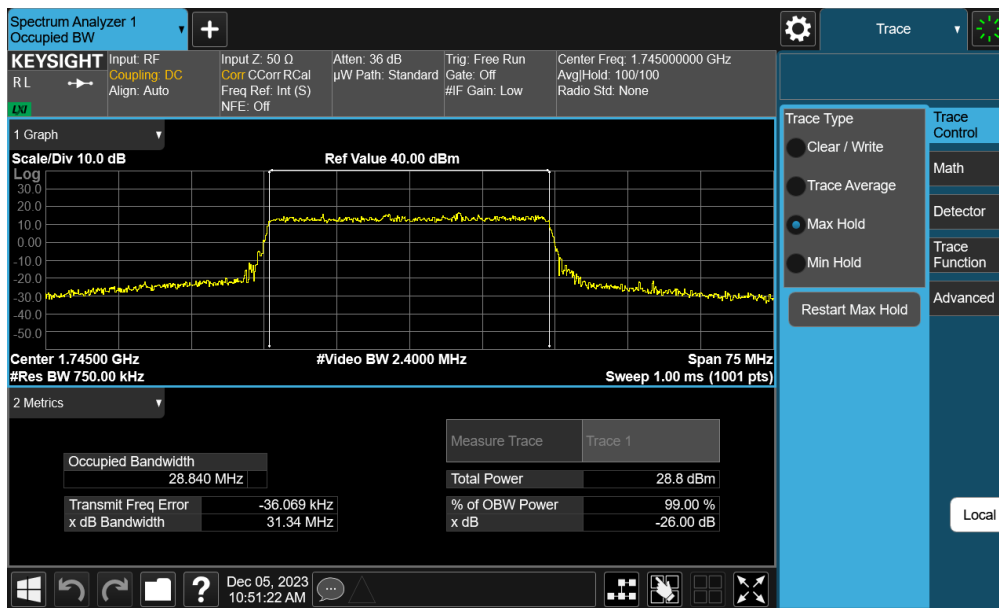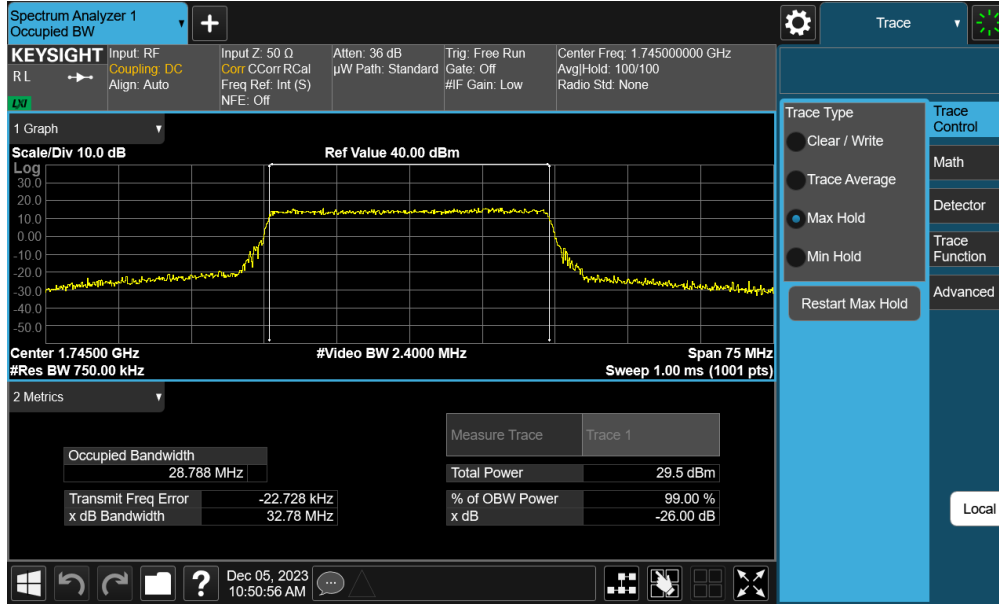

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 37 of 137


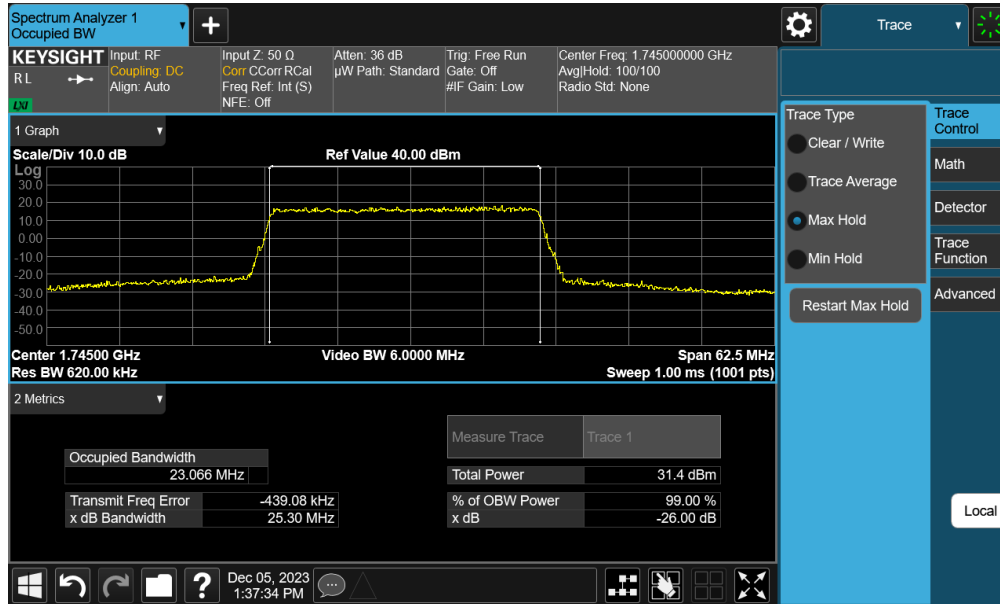


Plot 7-32. Occupied Bandwidth Plot (NR Band n66 - 25.0MHz DFT-s-OFDM BPSK - Full RB – Ant B)

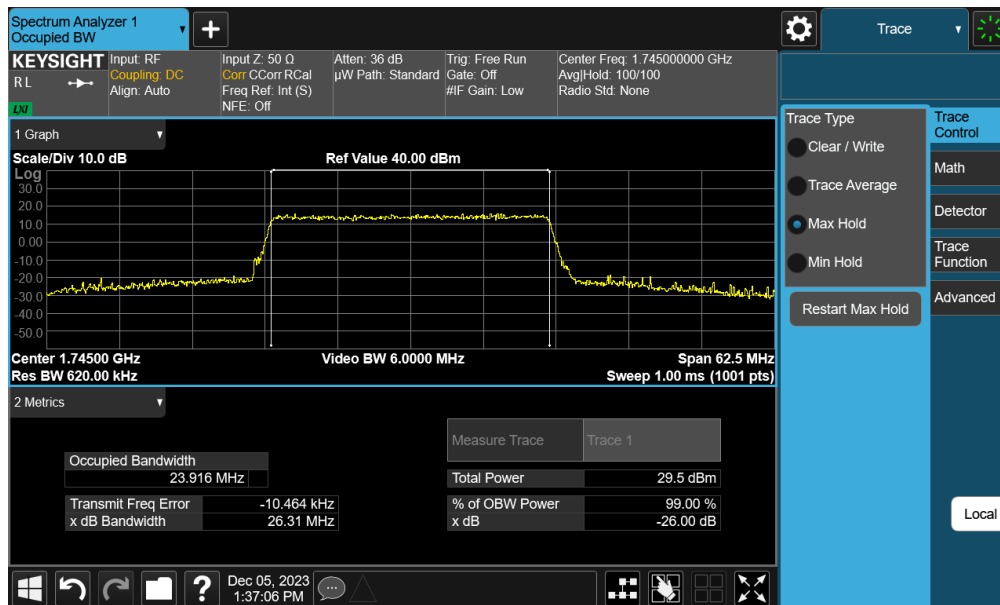

Plot 7-33. Occupied Bandwidth Plot (NR Band n66 - 25.0MHz CP-OFDM QPSK - Full RB – Ant B)

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 38 of 137

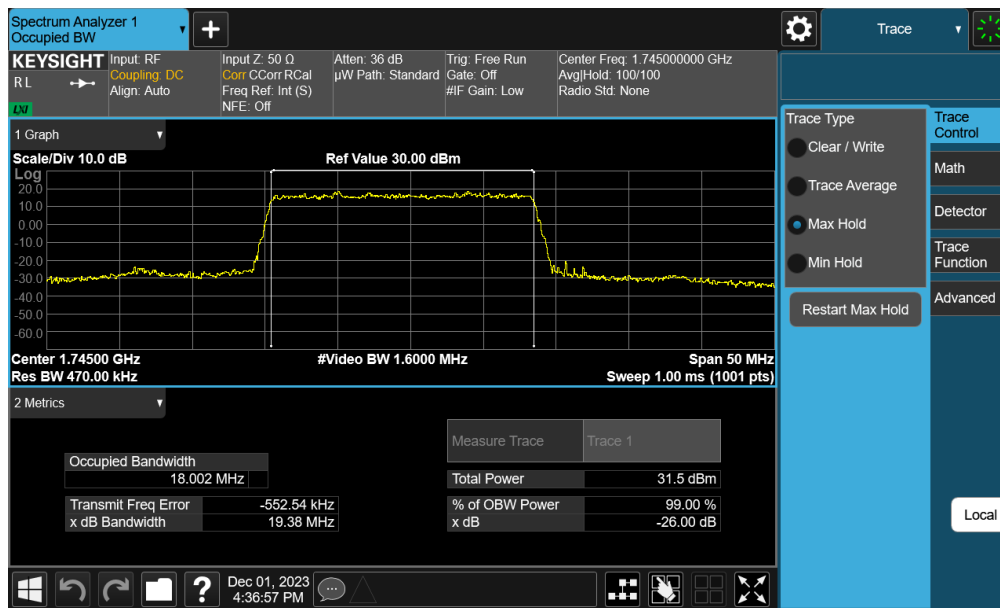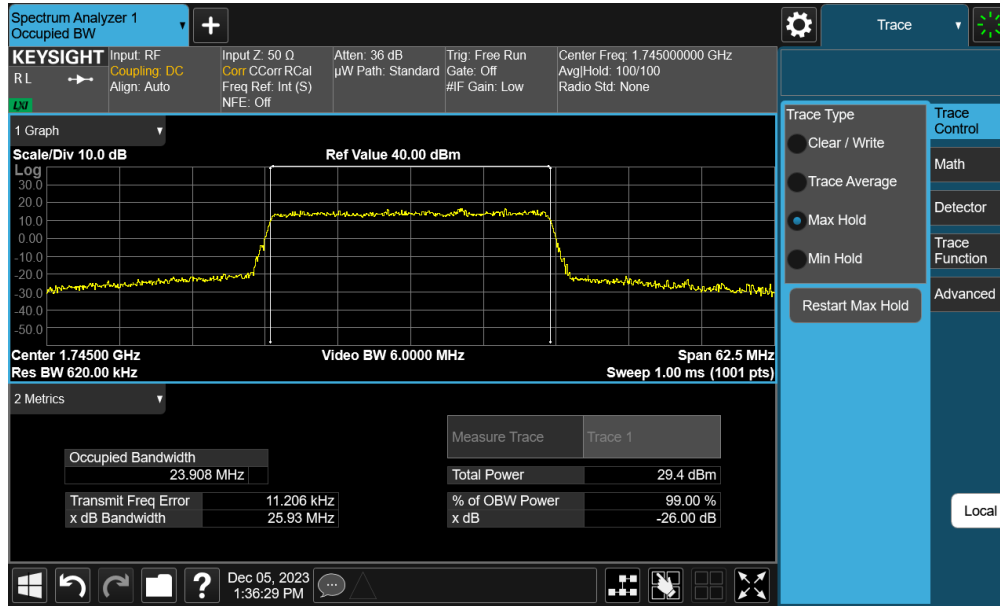

FCC ID: A3LSMA356E	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-04.A3L	Test Dates: 11/30/2023 - 12/12/2023	EUT Type: Portable Handset	Page 39 of 137