



MEASUREMENT REPORT FCC PART 15.407 UNII

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
01/08 - 02/19/2021
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2101040001-08-R1.A3L


FCC ID:	A3LSMA426U
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-A426U
Additional Model(s): SM-A426U1/DS, SM-S426DL, SM-A426U1
EUT Type: Portable Handset
Frequency Range: 5180 – 5825MHz
Modulation Type: OFDM
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15 Subpart E (15.407)
Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02 v02r01

Note: This revised Test Report (S/N: 1M2101040001-08-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 1 of 89	


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	6
2.4	Test Configuration.....	6
2.5	Software and Firmware	6
2.6	EMI Suppression Device(s)/Modifications.....	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	AC Line Conducted Emissions	7
3.3	Radiated Emissions.....	8
3.4	Environmental Conditions.....	8
4.0	ANTENNA REQUIREMENTS	9
5.0	MEASUREMENT UNCERTAINTY	10
6.0	TEST EQUIPMENT CALIBRATION DATA.....	11
7.0	TEST RESULTS	12
7.1	Summary.....	12
7.2	26dB Bandwidth Measurement – 802.11a/n/ac	13
7.3	6dB Bandwidth Measurement – 802.11a/n/ac	30
7.4	UNII Output Power Measurement – 802.11a/n/ac	36
7.5	Maximum Power Spectral Density – 802.11a/n/ac.....	39
7.6	Radiated Spurious Emission Measurements – Above 1GHz	61
7.6.1	Radiated Spurious Emission Measurements.....	64
7.6.2	Radiated Band Edge Measurements (20MHz BW)	73
7.6.3	Radiated Band Edge Measurements (40MHz BW)	75
7.6.4	Radiated Band Edge Measurements (80MHz BW)	77
7.7	Radiated Spurious Emissions Measurements – Below 1GHz.....	79
7.8	Line-Conducted Test Data.....	83
8.0	CONCLUSION.....	89

FCC ID: A3LSMA426U	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 2 of 89



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1	
			Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	62.517	17.96
2A		5260 - 5320	62.806	17.98
2C		5500 - 5720	62.806	17.98
3		5745 - 5825	61.094	17.86
1	40	5190 - 5230	62.806	17.98
2A		5270 - 5310	55.976	17.48
2C		5510 - 5710	62.806	17.98
3		5755 - 5795	61.518	17.89
1	80	5210	29.376	14.68
2A		5290	30.832	14.89
2C		5530 - 5690	31.333	14.96
3		5775	27.416	14.38

EUT Overview

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 3 of 89

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMA426U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 4 of 89

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMA426U**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 02055, 02063, 02048, 02022, 02030, 02014

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n5, n71, n41, n66, n2, n25, n77, n260, n261), 802.11b/g/n WLAN, 802.11a/n/ac UNII (5GHz), Bluetooth (1x, EDR, LE), NFC

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	120	5600	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795
				:	:		
				142	5710		

Table 2-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 5 of 89

Notes:

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		Duty Cycle [%]
5GHz	a	97.5
	n (HT20)	97.4
	ac (HT20)	97.4
	n (HT40)	94.9
	ac (HT40)	94.9
	ac (HT80)	90.2

Table 2-4. Measured Duty Cycles

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna Gain (dBi)
5.20	-1.4
5.30	-1.5
5.50	-1.1
5.80	-1.7

Table 2-5. Antenna Peak Gain

2.4 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

2.5 Software and Firmware

The test was conducted with firmware version A426UOYN0ATL5 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 6 of 89	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1-meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst-case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMA426U	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 7 of 89	

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMA426U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 8 of 89

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 9 of 89	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMA426U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 10 of 89

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	9/16/2020	Annual	9/16/2021	WL25-1
-	WL40-1	WLAN Cable Set (40GHz)	9/16/2020	Annual	9/16/2021	WL40-1
Agilent	N5183A	MXG Analog Signal Generator	1/21/2021	Annual	1/21/2022	MY50141900
Anritsu	ML2495A	Power Meter	1/18/2021	Annual	1/18/2022	941001
Anritsu	MA2411B	Pulse Power Sensor	9/22/2020	Annual	9/22/2021	1315051
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	8/7/2018	Triennial	8/7/2021	9203-2178
Espec	ESX-2CA	Environmental Chamber	8/27/2020	Biennial	8/27/2022	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS-Lindgren	3816/2NM	LISN	7/9/2020	Biennial	7/9/2022	114451
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/12/2020	Biennial	3/12/2022	150693
Keysight Technologies	N9020A	MXA Signal Analyzer	8/14/2020	Annual	8/14/2021	US46470561
Keysight Technologies	N9038A	MXE EMI Receiver	8/11/2020	Annual	8/11/2021	MY51210133
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/3/2020	Annual	3/3/2021	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/9/2020	Annual	9/9/2021	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	10/1/2019	Biennial	10/1/2021	310233
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol Science	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 11 of 89	

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMA426U
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.6]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.6]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “UNII Automation,” Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 1.3.1.

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 12 of 89	

7.2 26dB Bandwidth Measurement – 802.11a/n/ac RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 13 of 89


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	20.40
	5200	40	a	6	20.10
	5240	48	a	6	20.21
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	20.26
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	20.89
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	20.95
	5190	38	n (40MHz)	13.5/15 (MCS0)	41.15
	5230	46	n (40MHz)	13.5/15 (MCS0)	41.13
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	83.19
Band 2A	5260	52	a	6	19.88
	5280	56	a	6	20.09
	5320	64	a	6	20.20
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	20.91
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	20.63
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	20.82
	5270	54	n (40MHz)	13.5/15 (MCS0)	40.77
	5310	62	n (40MHz)	13.5/15 (MCS0)	41.12
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	83.75
Band 2C	5500	100	a	6	20.43
	5600	120	a	6	20.37
	5720	144	a	6	20.60
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	20.60
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	20.27
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	20.59
	5510	102	n (40MHz)	13.5/15 (MCS0)	41.12
	5590	118	n (40MHz)	13.5/15 (MCS0)	41.03
	5710	142	n (40MHz)	13.5/15 (MCS0)	40.77
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	82.73
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	83.25
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	83.23

Table 7-2. Conducted Bandwidth Measurements

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 14 of 89

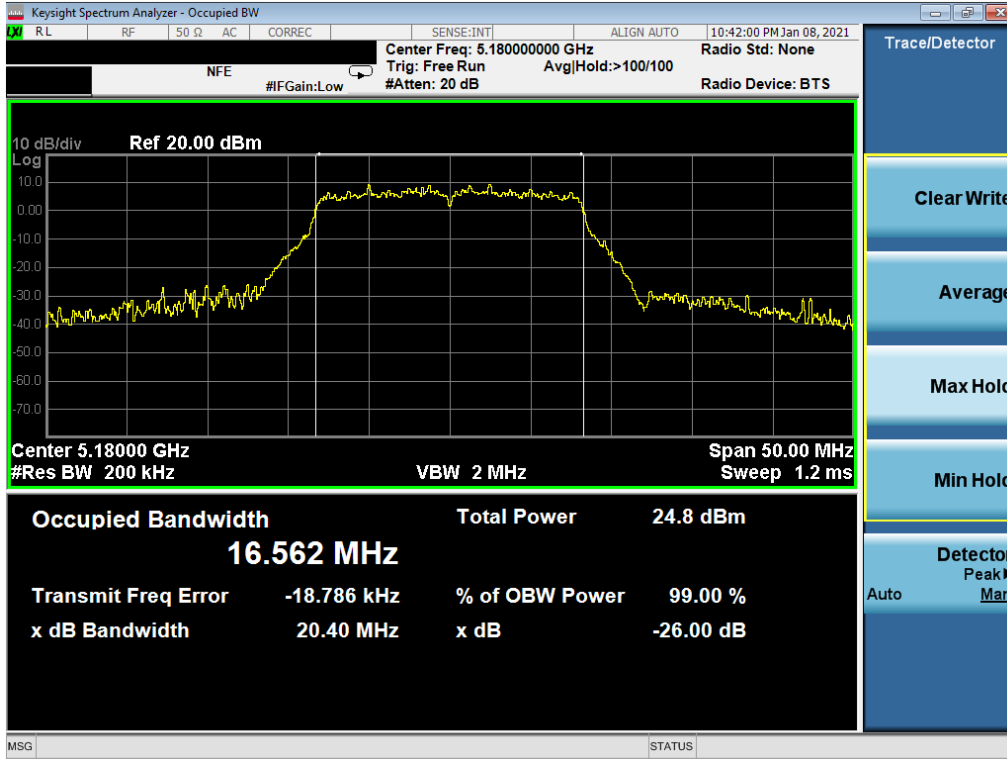


Plot 7-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

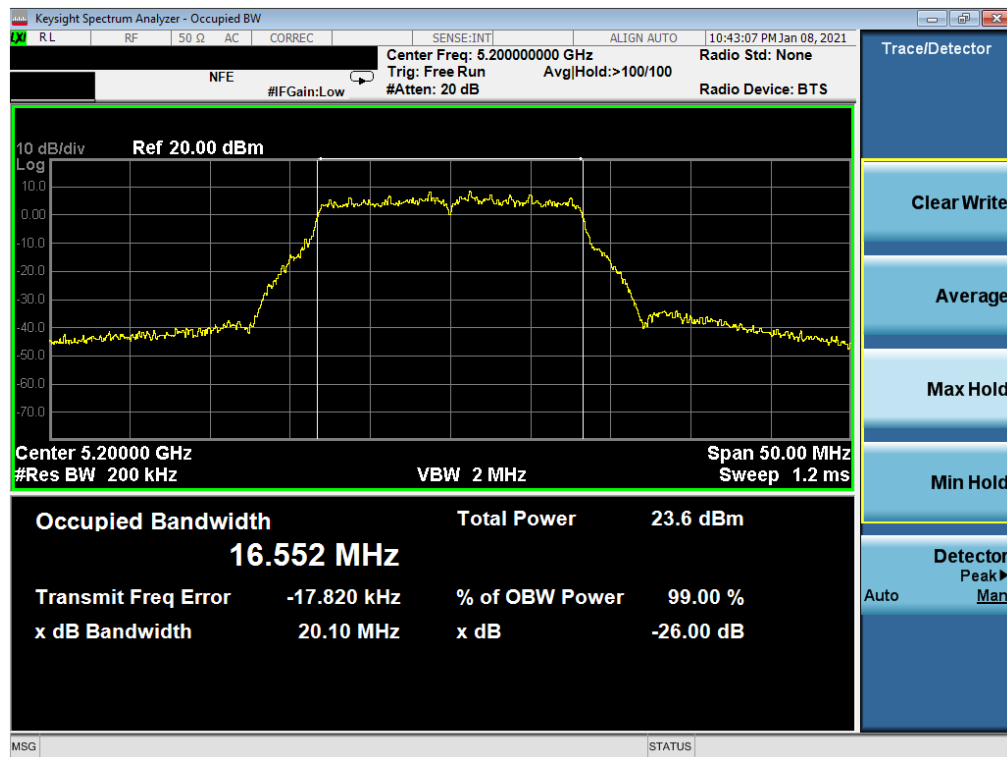


Plot 7-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 15 of 89

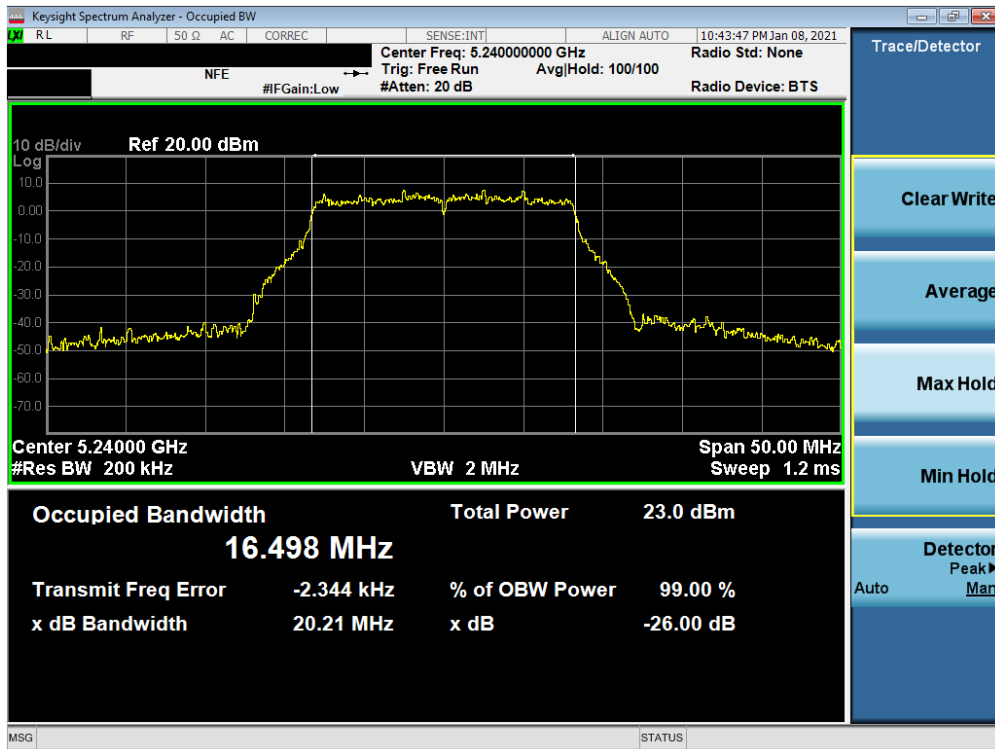


Plot 7-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

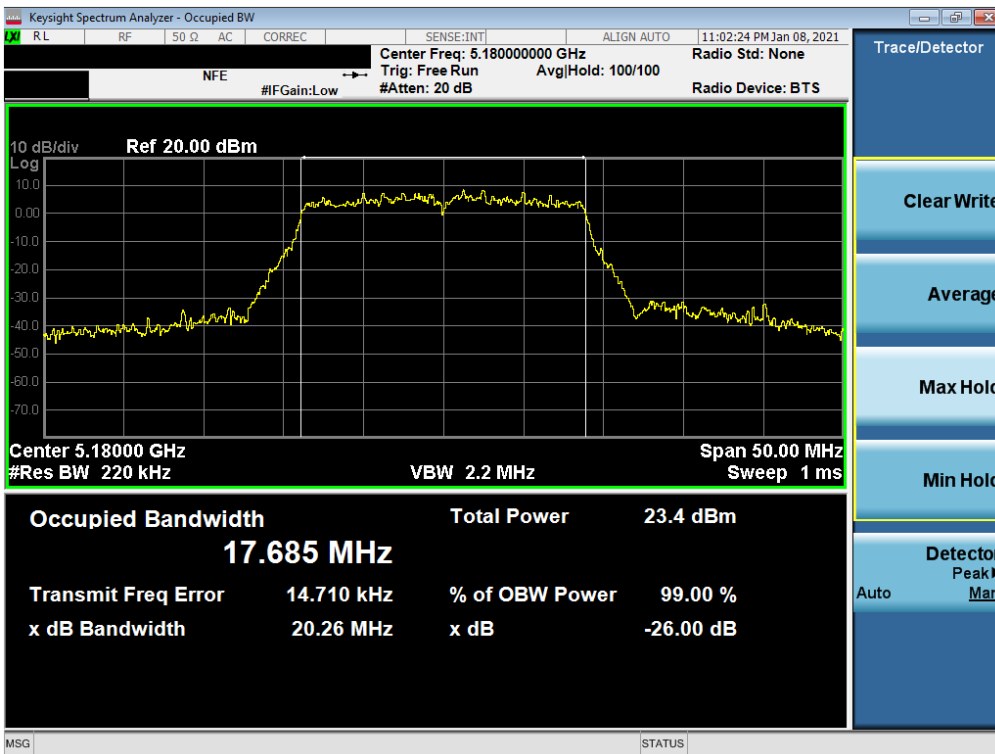


Plot 7-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 16 of 89

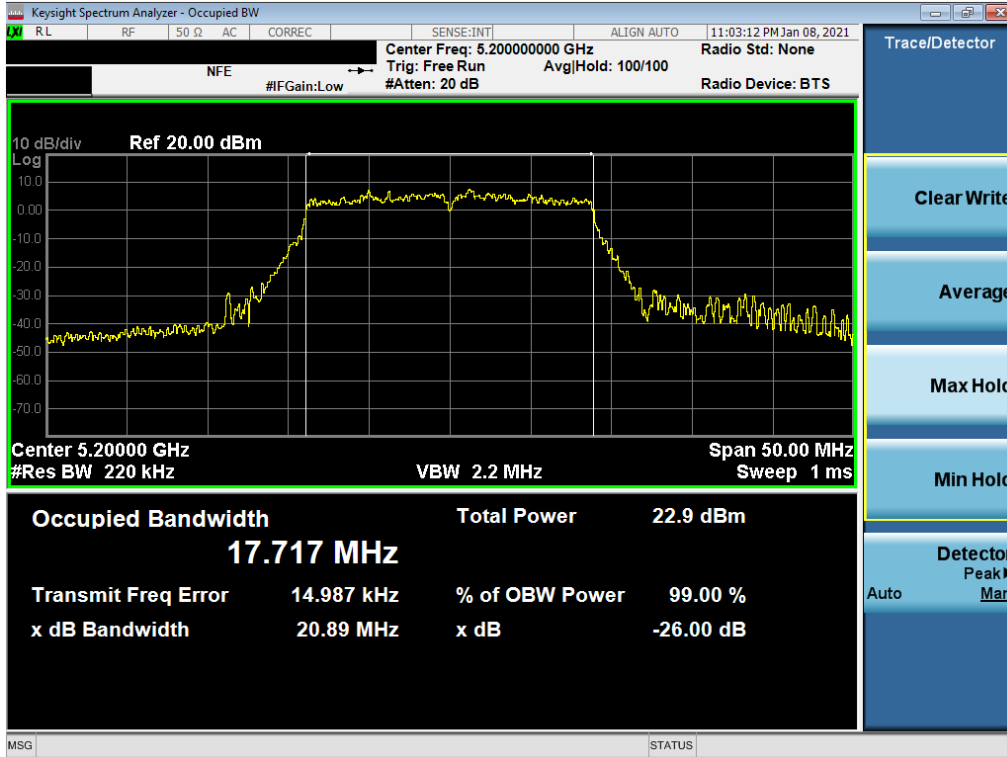


Plot 7-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

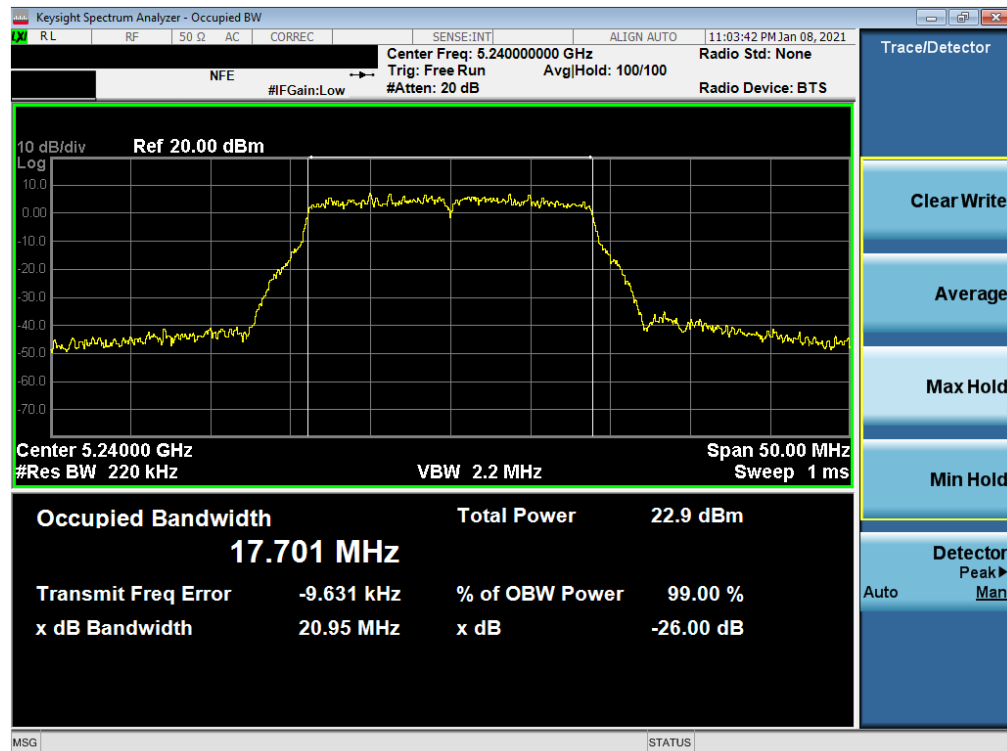


Plot 7-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMA426U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 17 of 89

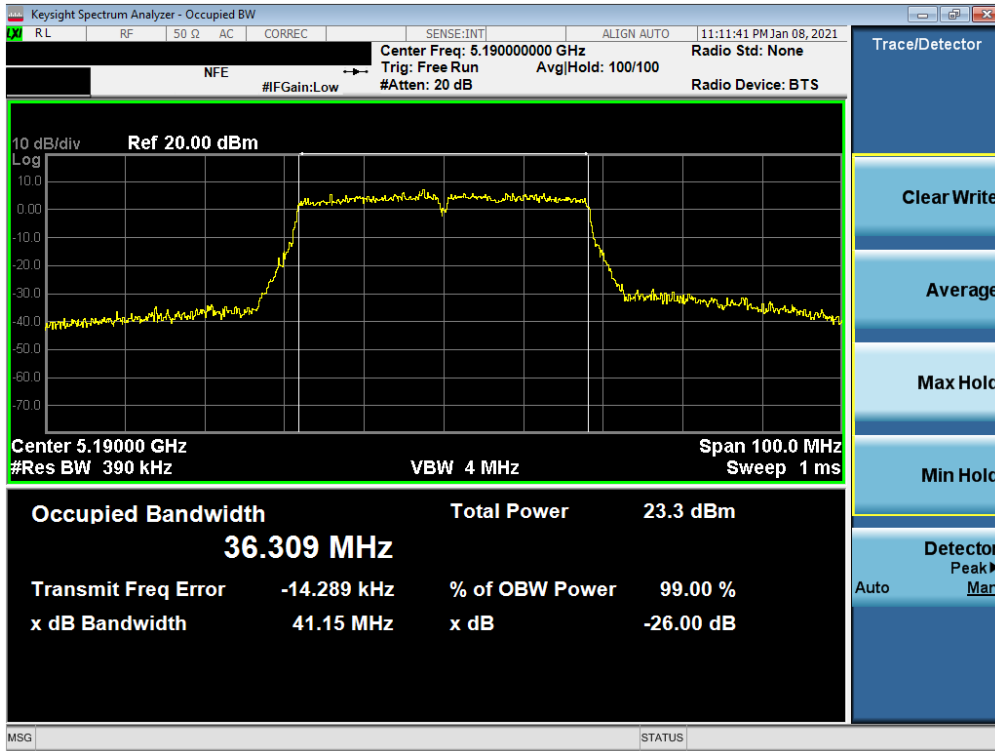


Plot 7-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

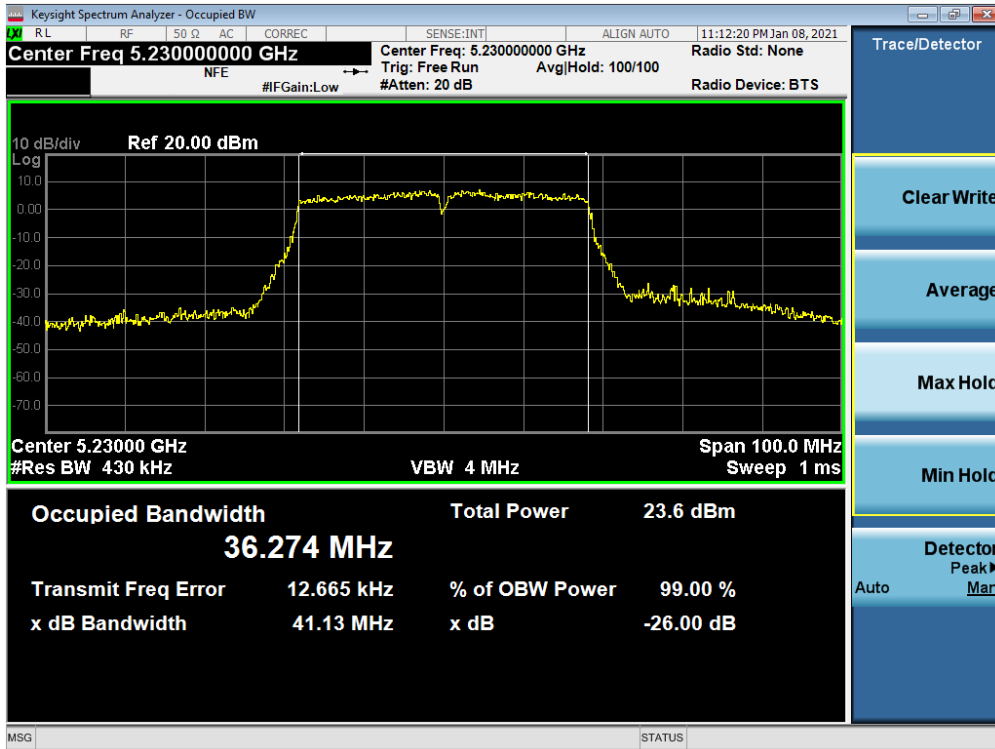


Plot 7-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 18 of 89

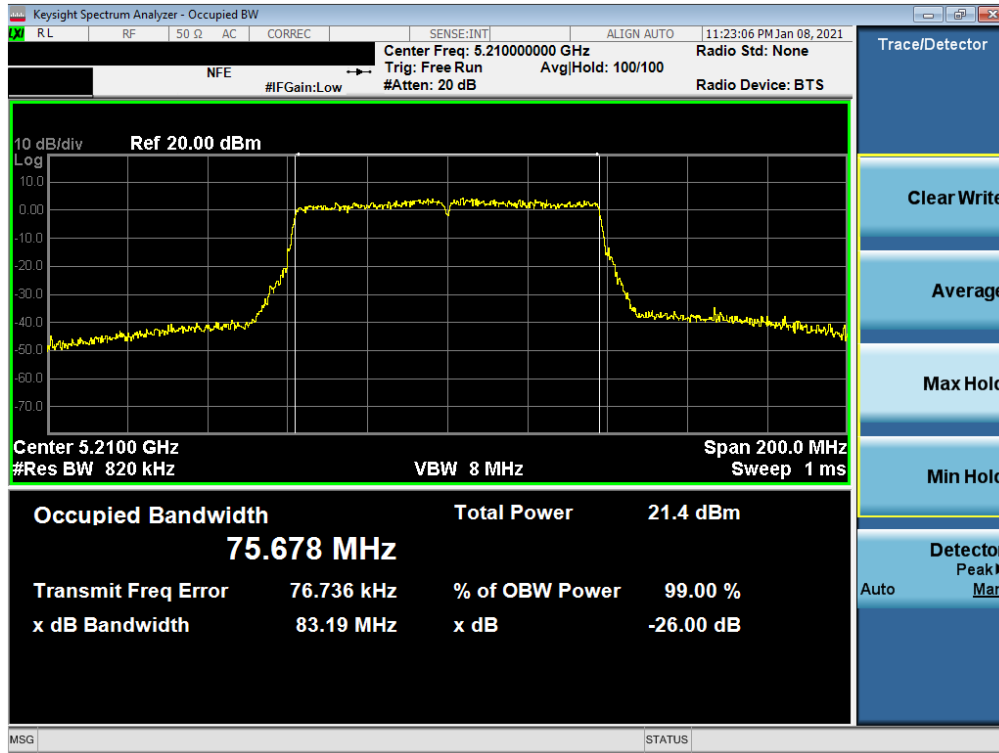


Plot 7-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

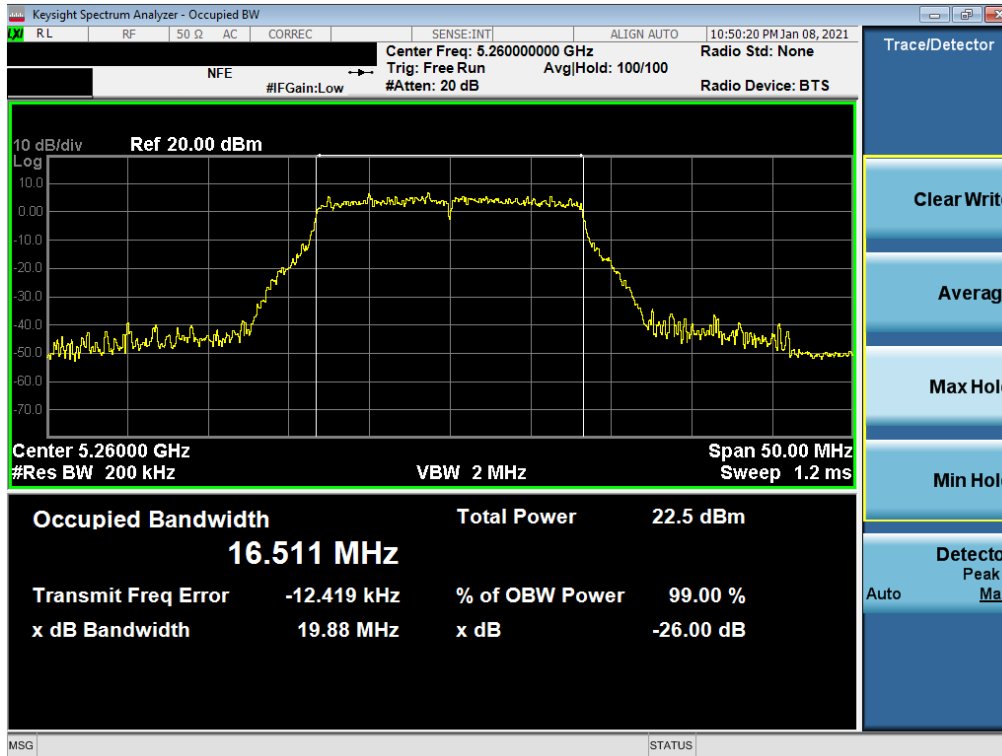


Plot 7-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 19 of 89

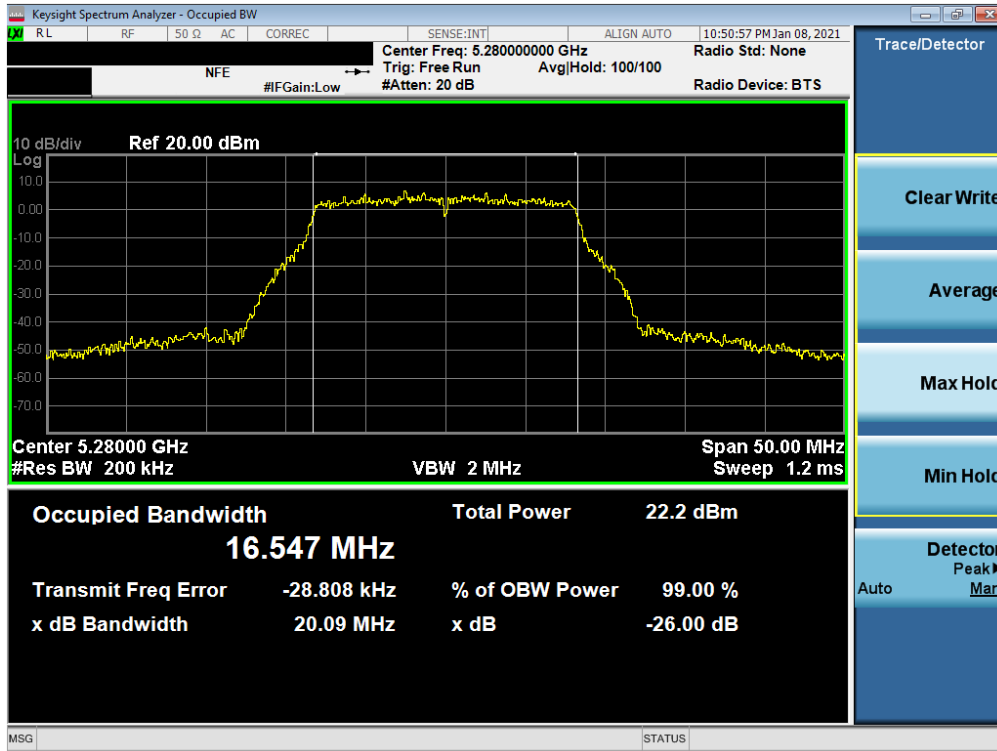


Plot 7-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

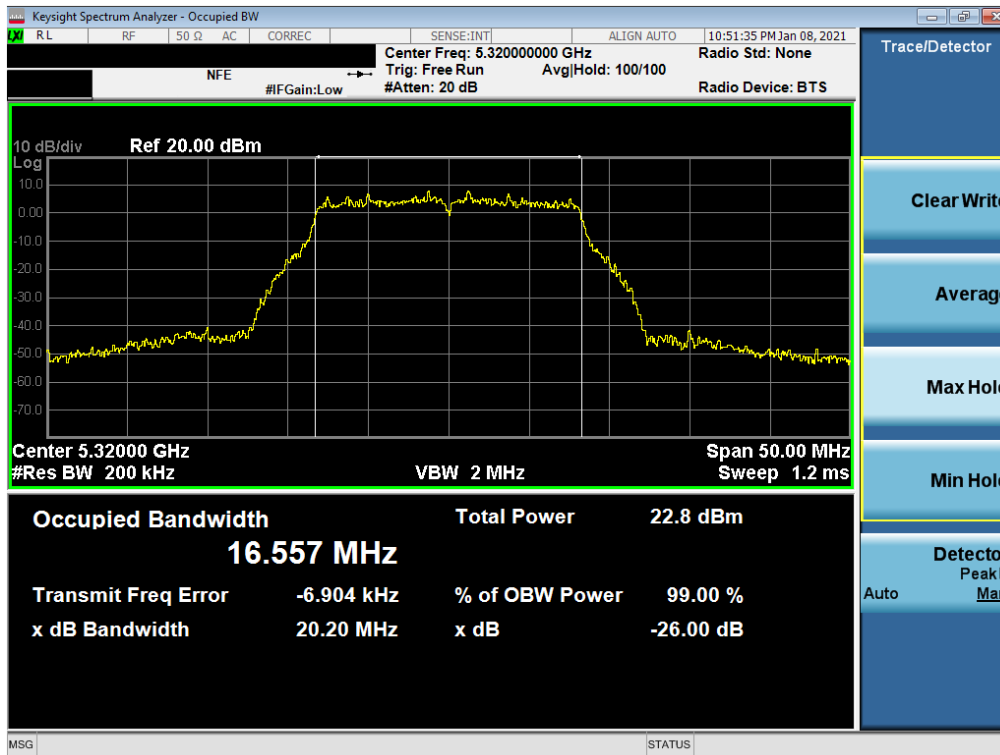


Plot 7-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMA426U	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 20 of 89

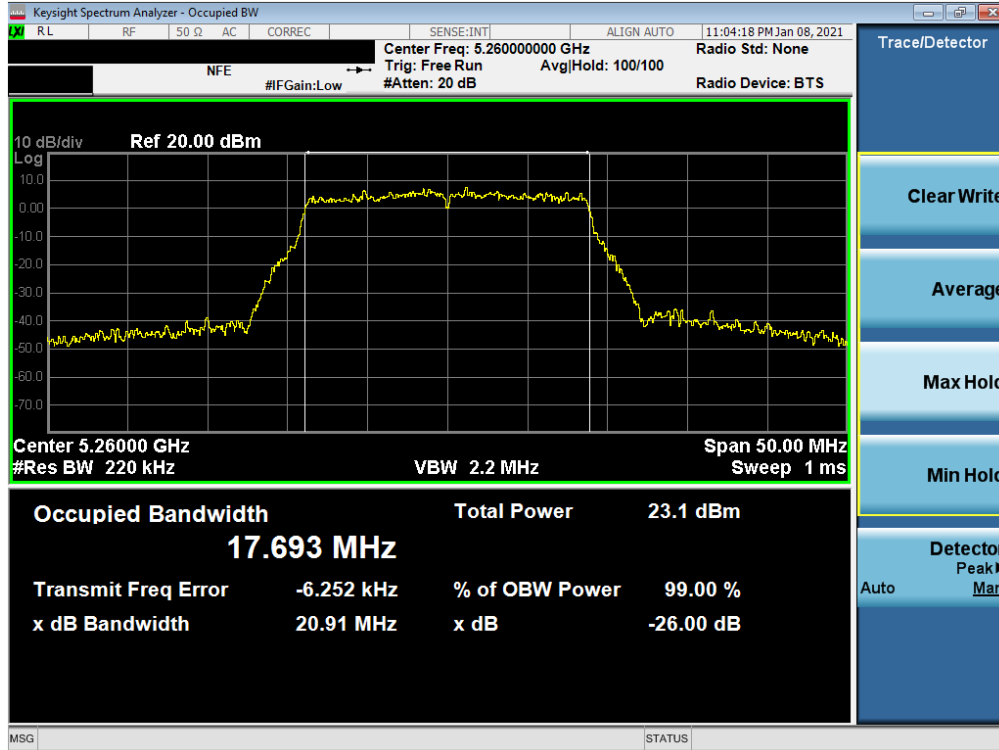


Plot 7-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

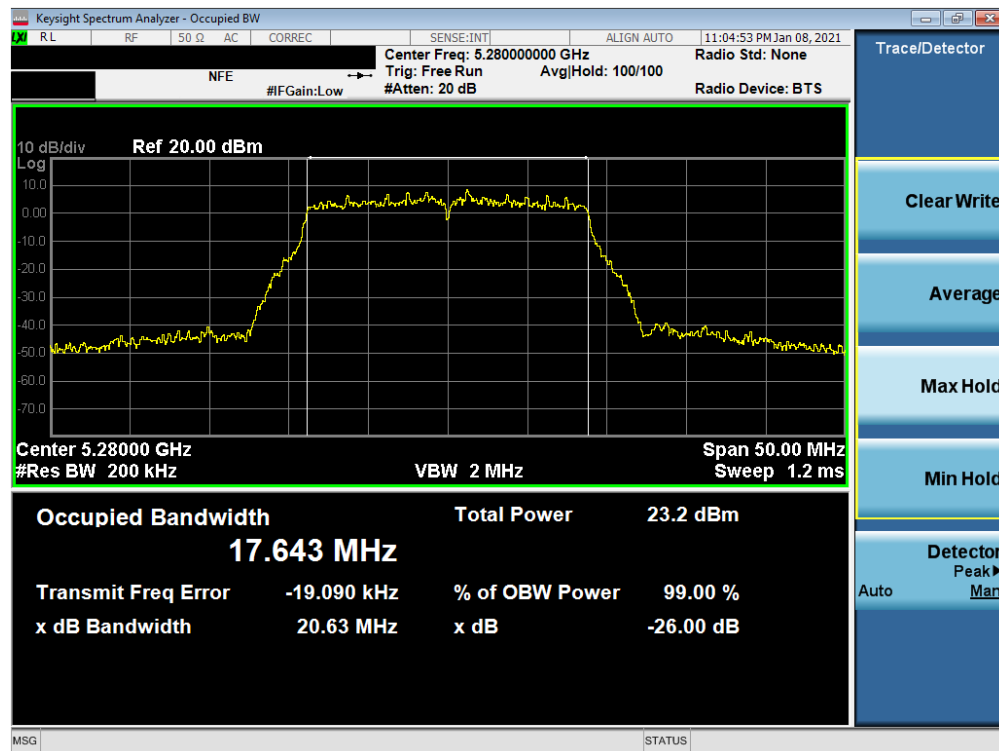


Plot 7-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 21 of 89

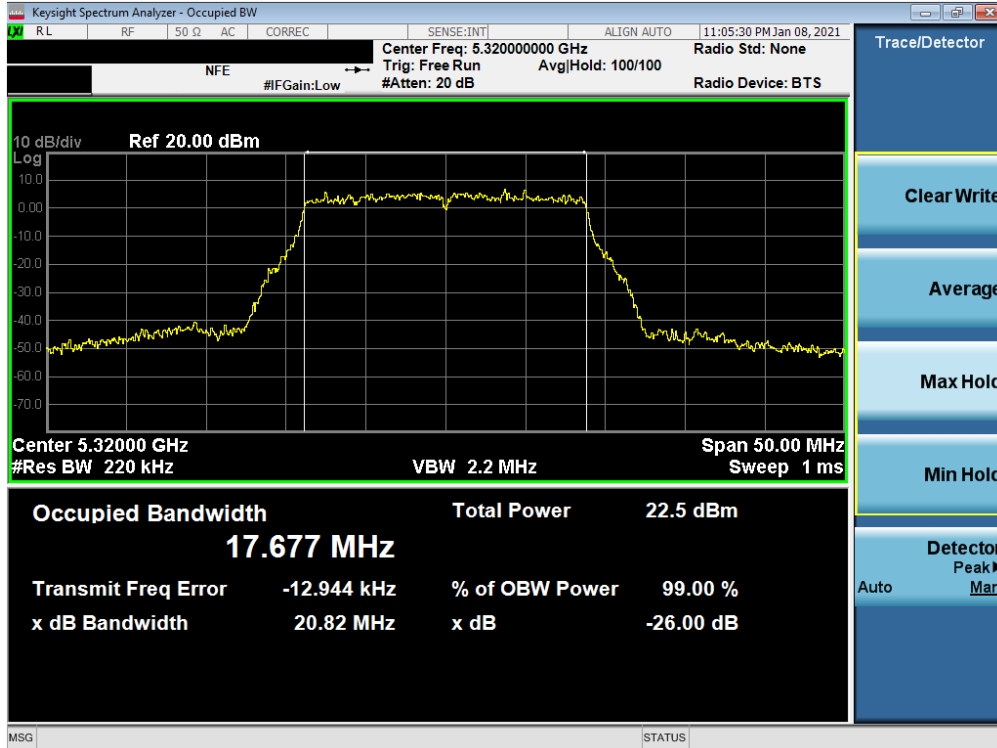


Plot 7-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

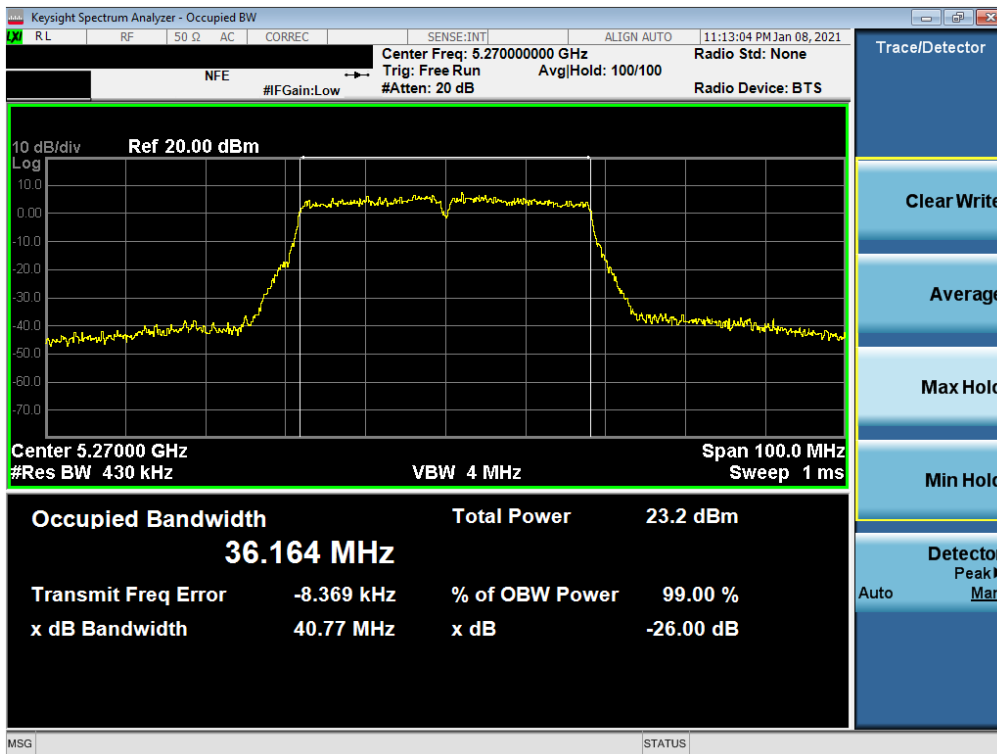


Plot 7-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 22 of 89

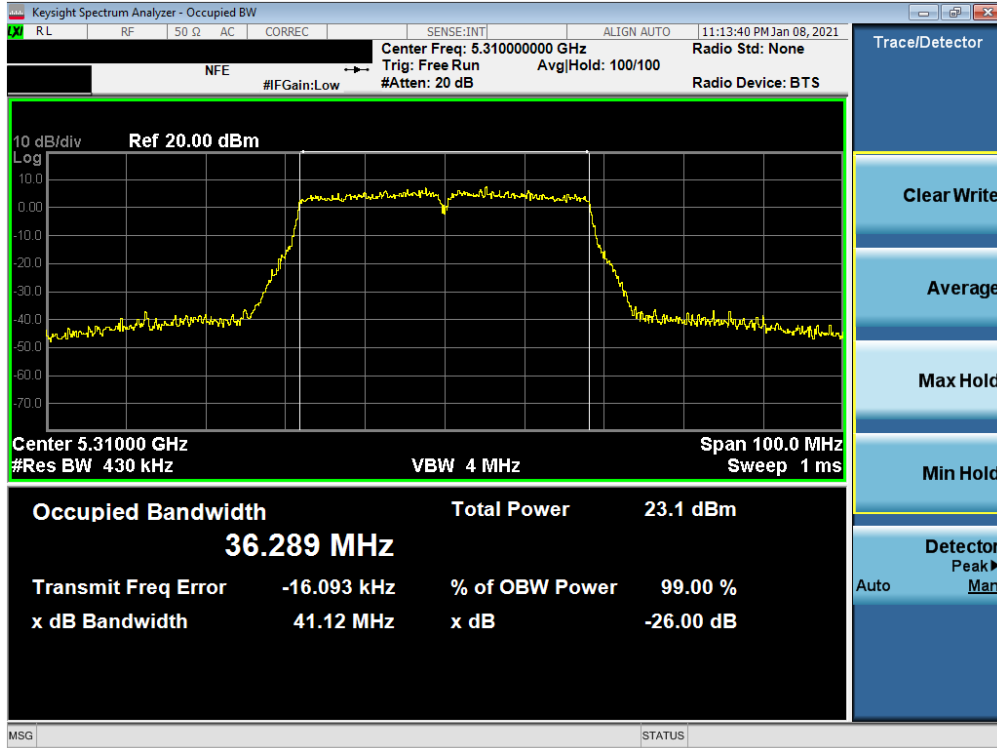


Plot 7-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

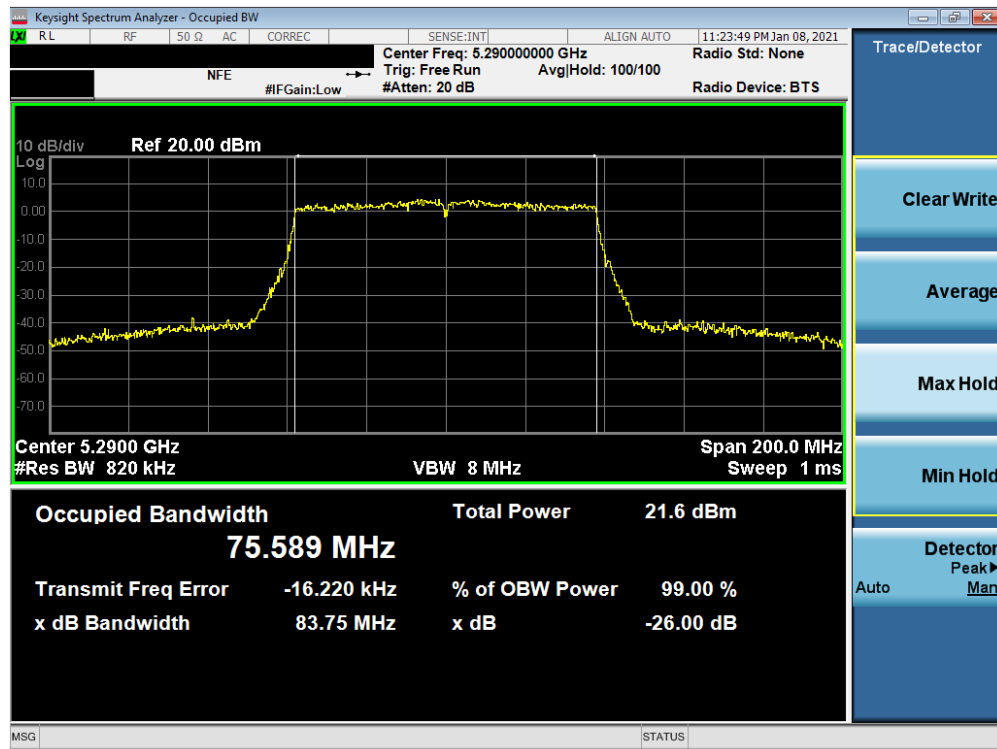


Plot 7-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 23 of 89

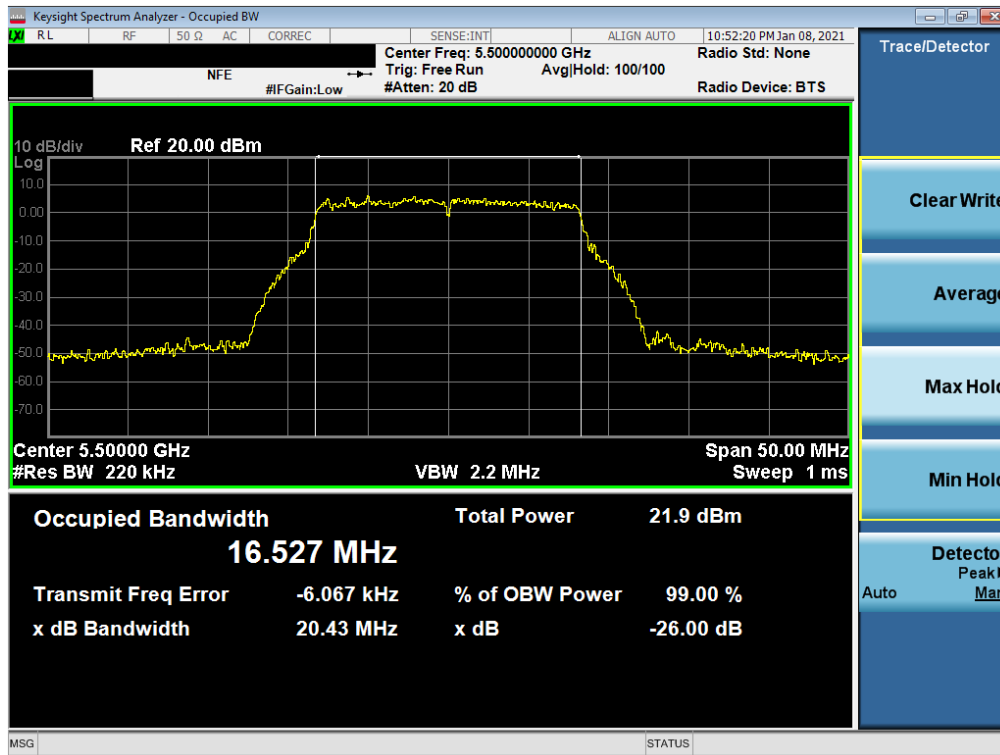


Plot 7-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

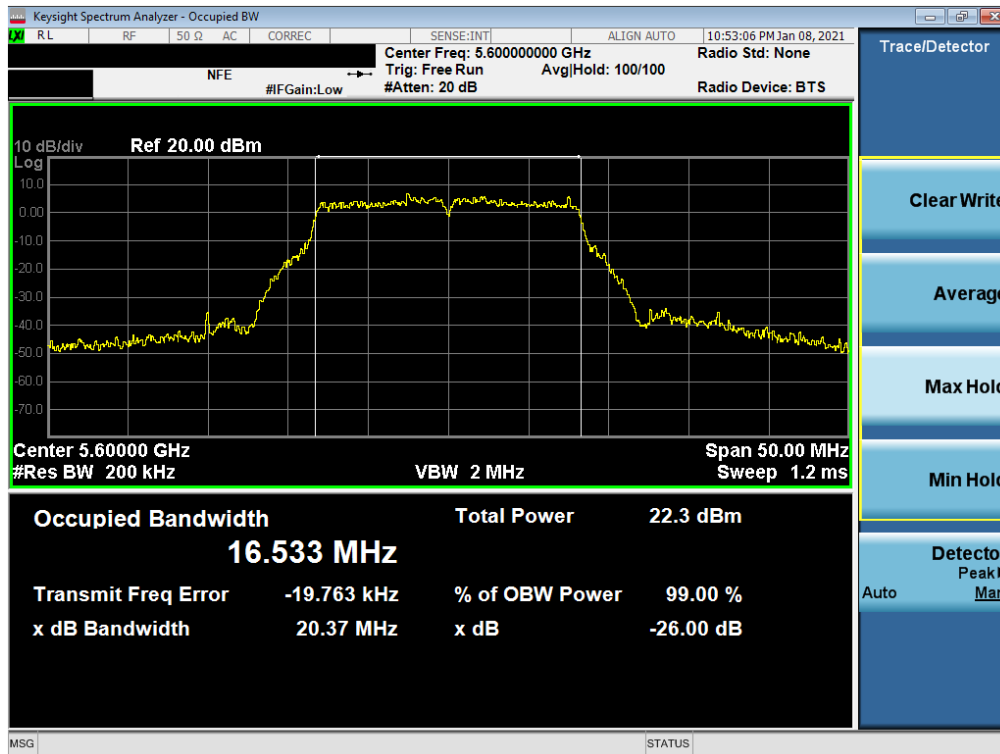


Plot 7-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMA426U	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 24 of 89

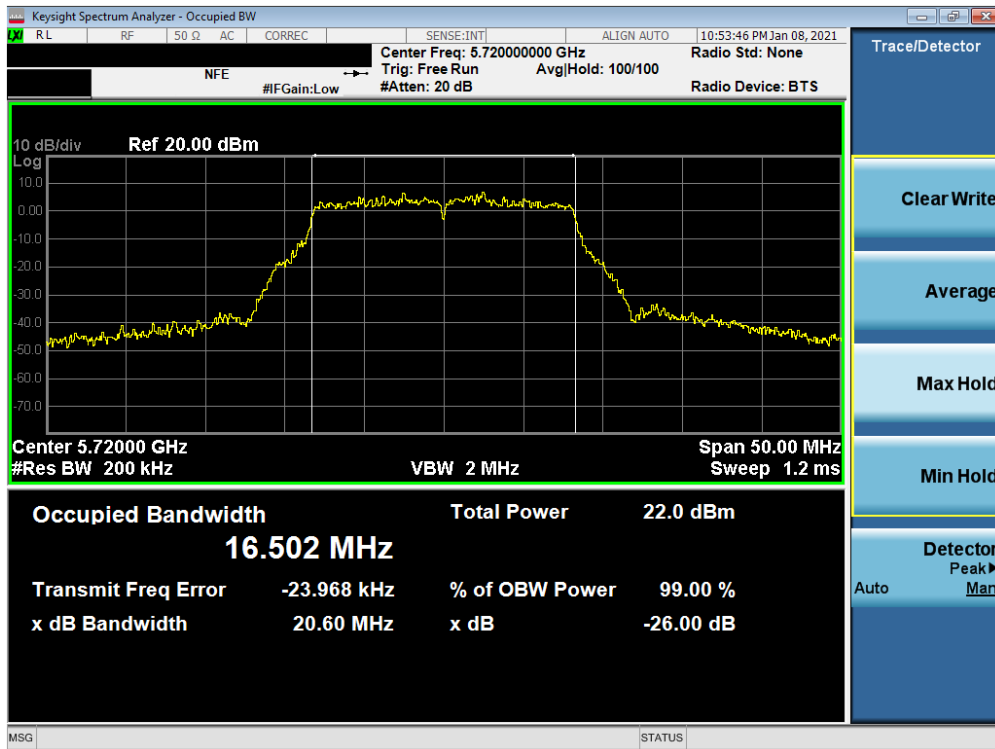


Plot 7-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

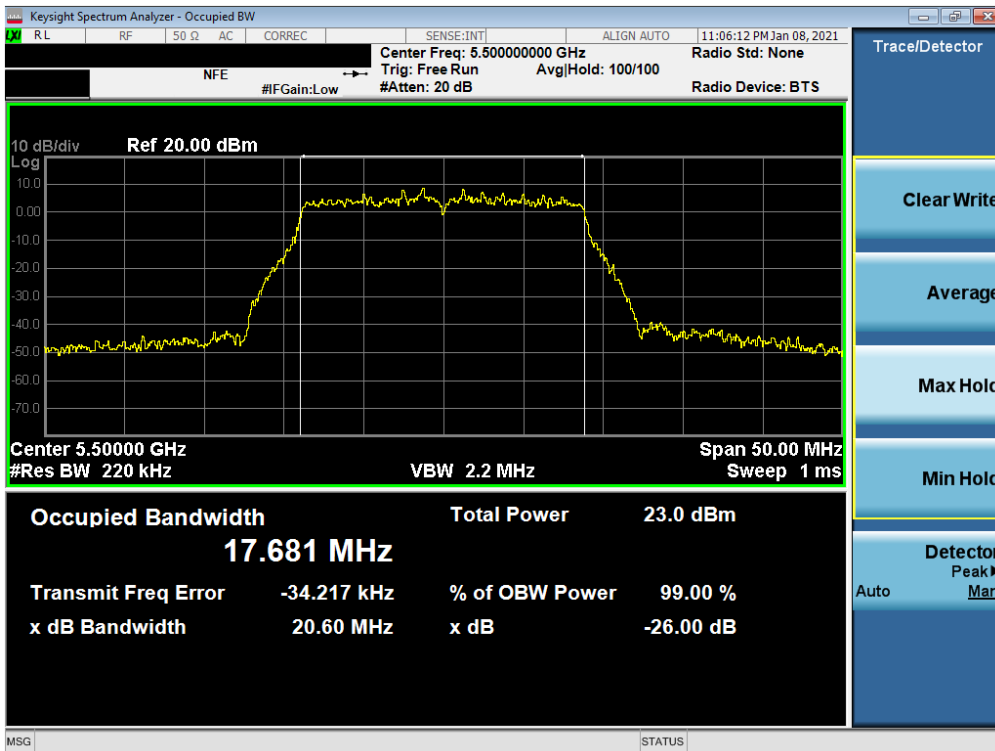


Plot 7-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 25 of 89

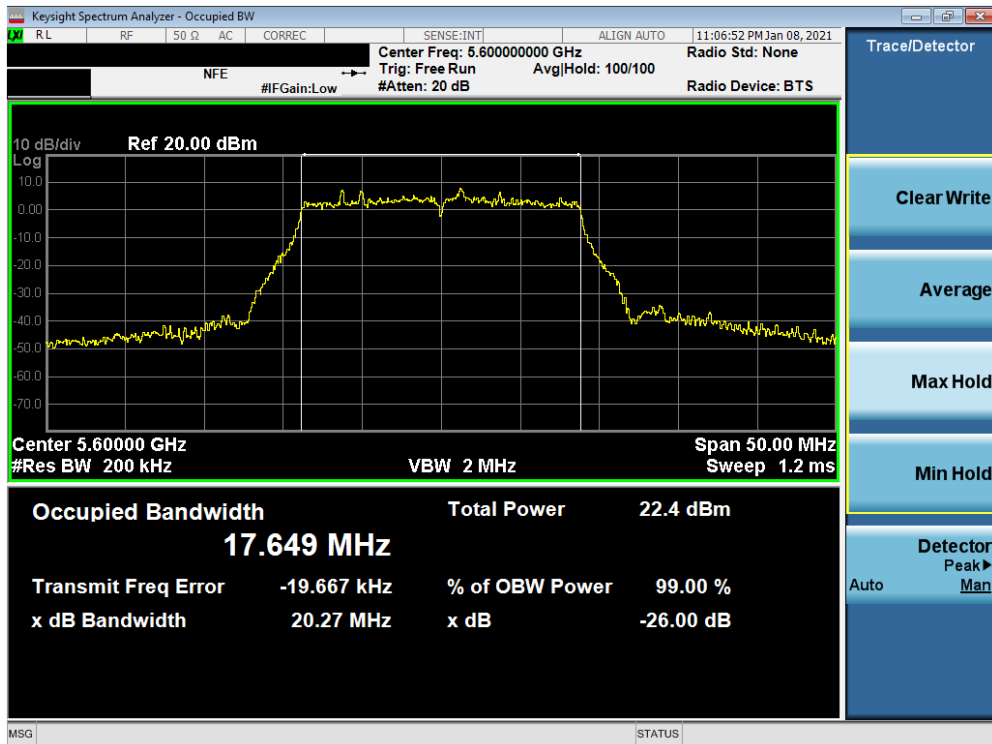


Plot 7-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

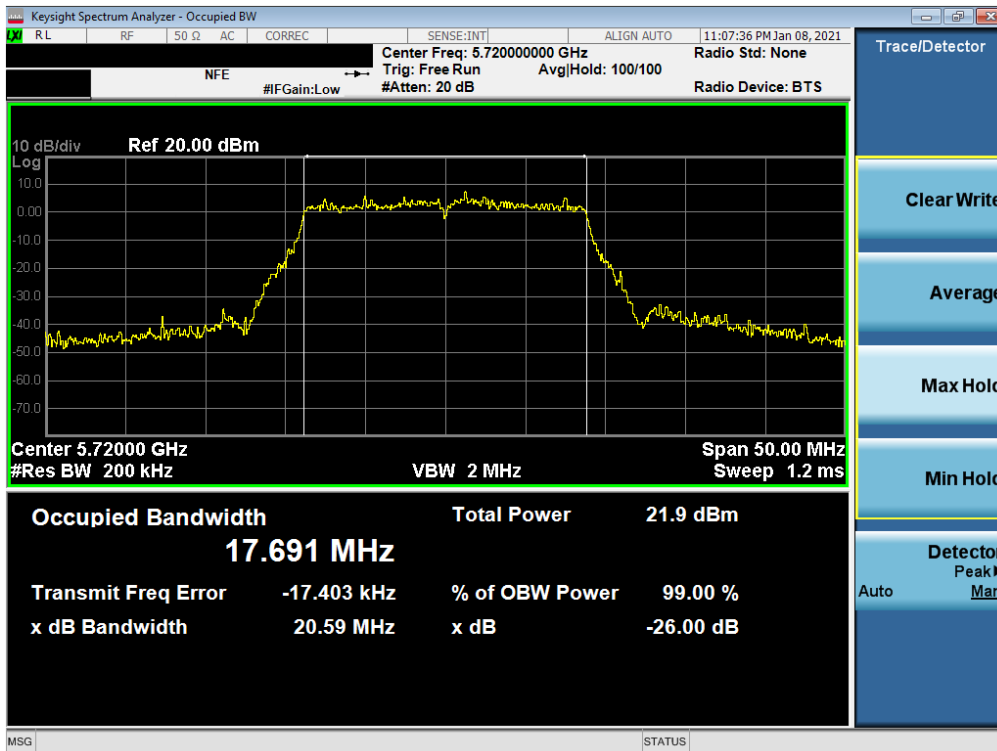


Plot 7-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 26 of 89

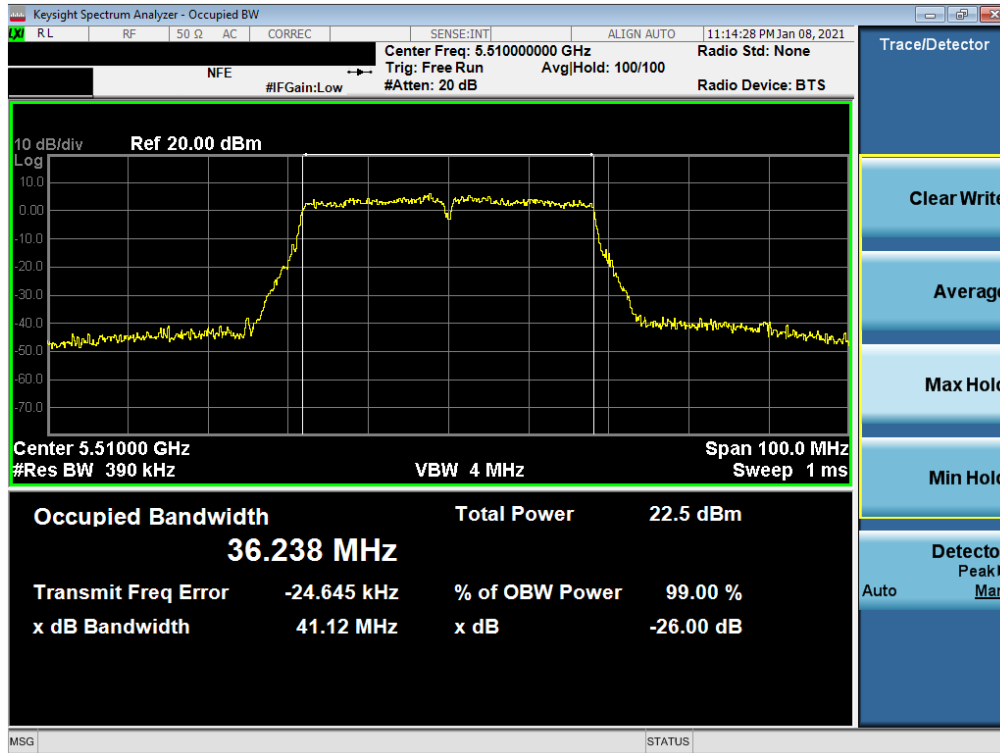


Plot 7-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

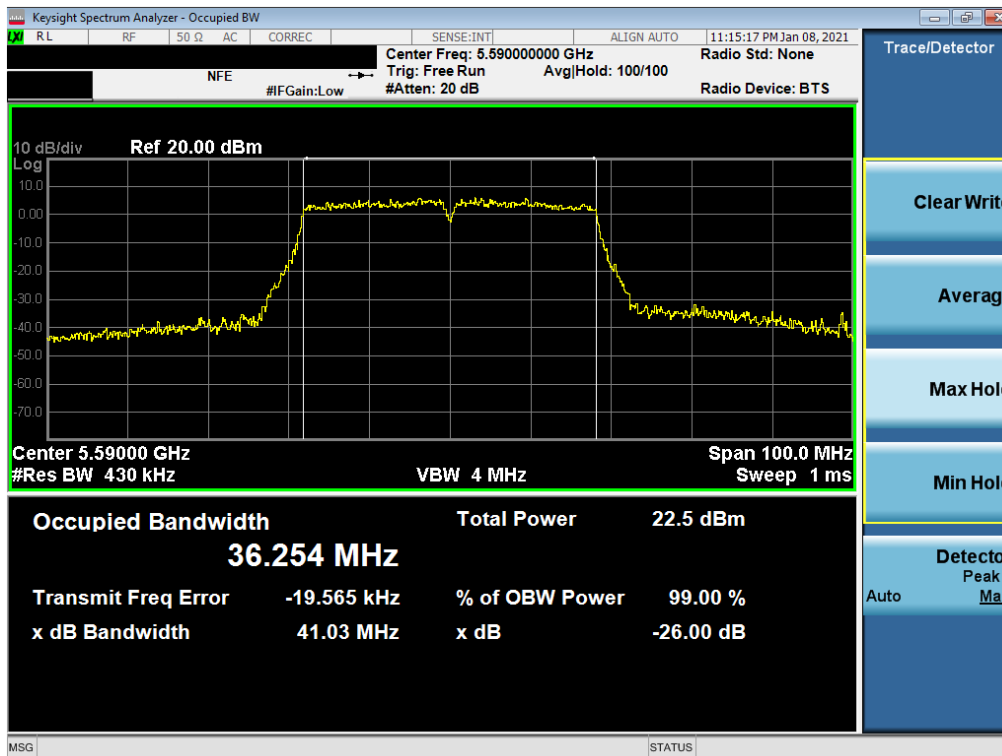


Plot 7-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 27 of 89

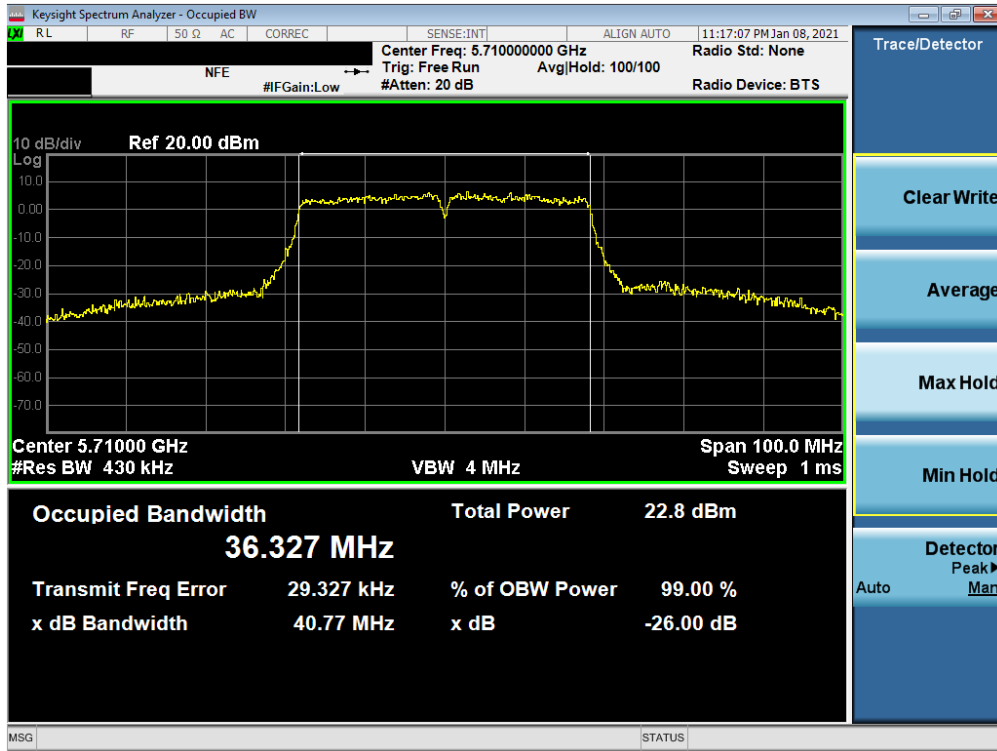


Plot 7-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

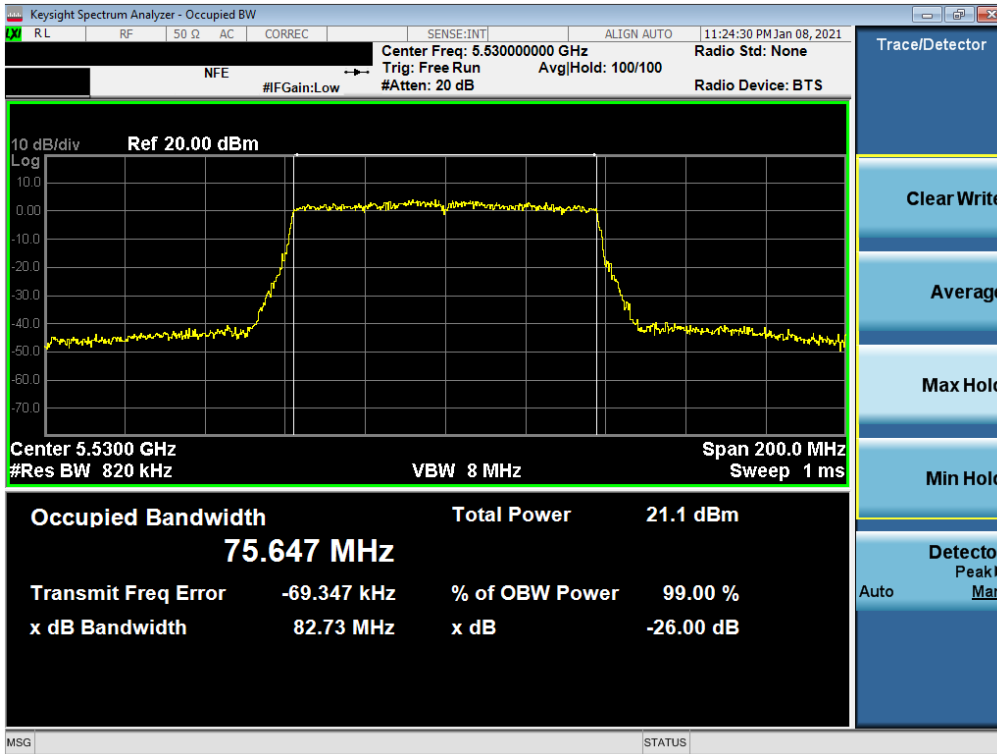


Plot 7-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 28 of 89

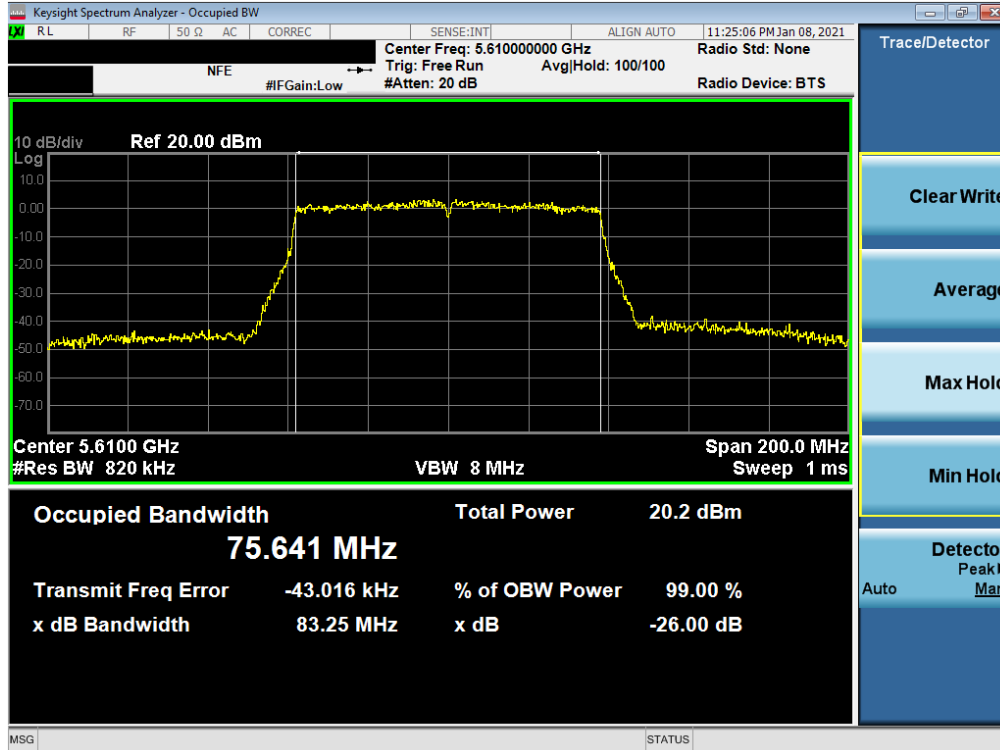

Plot 7-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

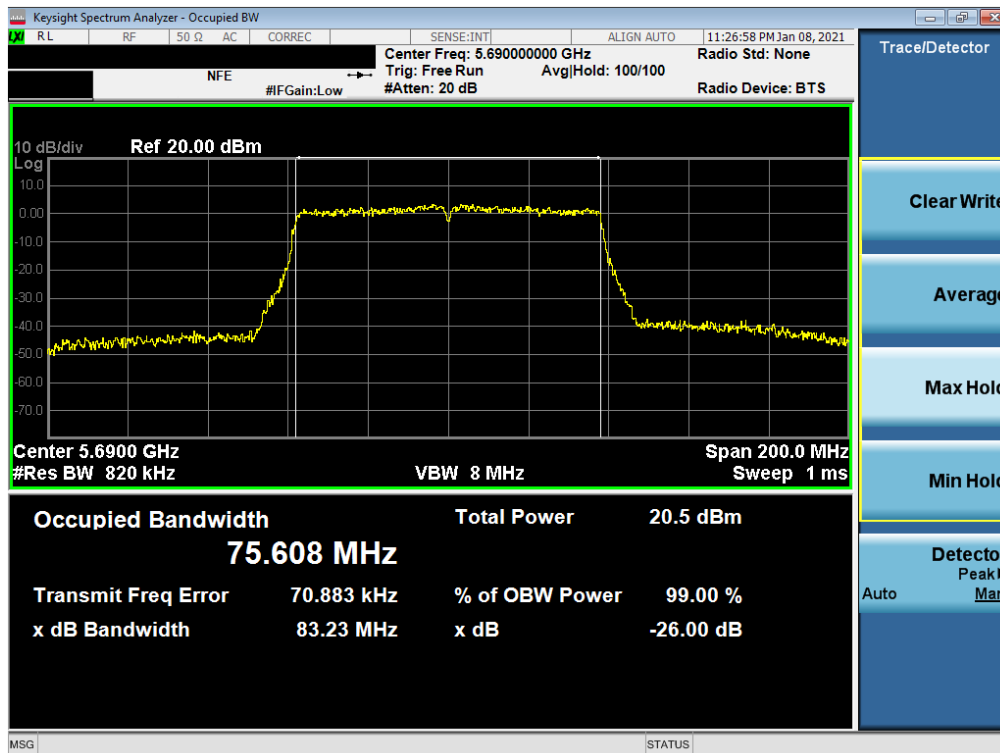

Plot 7-30. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 29 of 89

7.3 6dB Bandwidth Measurement – 802.11a/n/ac §15.407 (e); RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be \geq 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 30 of 89


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	15.15
	5785	157	a	6	15.28
	5825	165	a	6	16.33
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.58
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	15.02
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	13.94
	5755	151	n (40MHz)	13.5/15 (MCS0)	35.62
	5795	159	n (40MHz)	13.5/15 (MCS0)	34.01
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.41

Table 7-3. Conducted Bandwidth Measurements

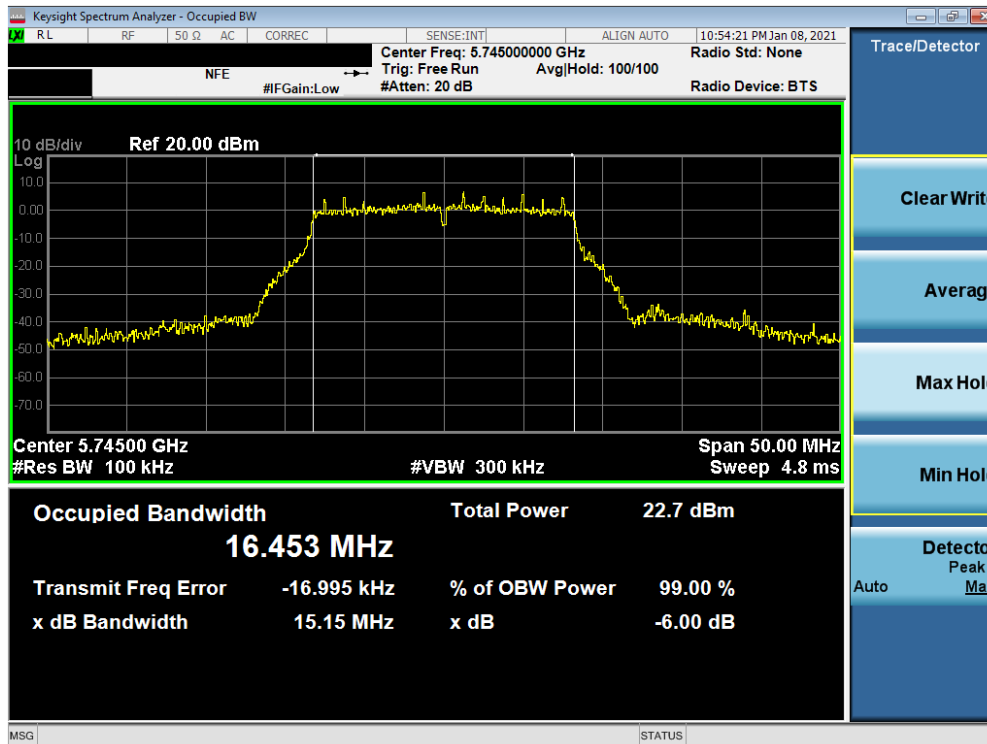


Plot 7-31. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 31 of 89

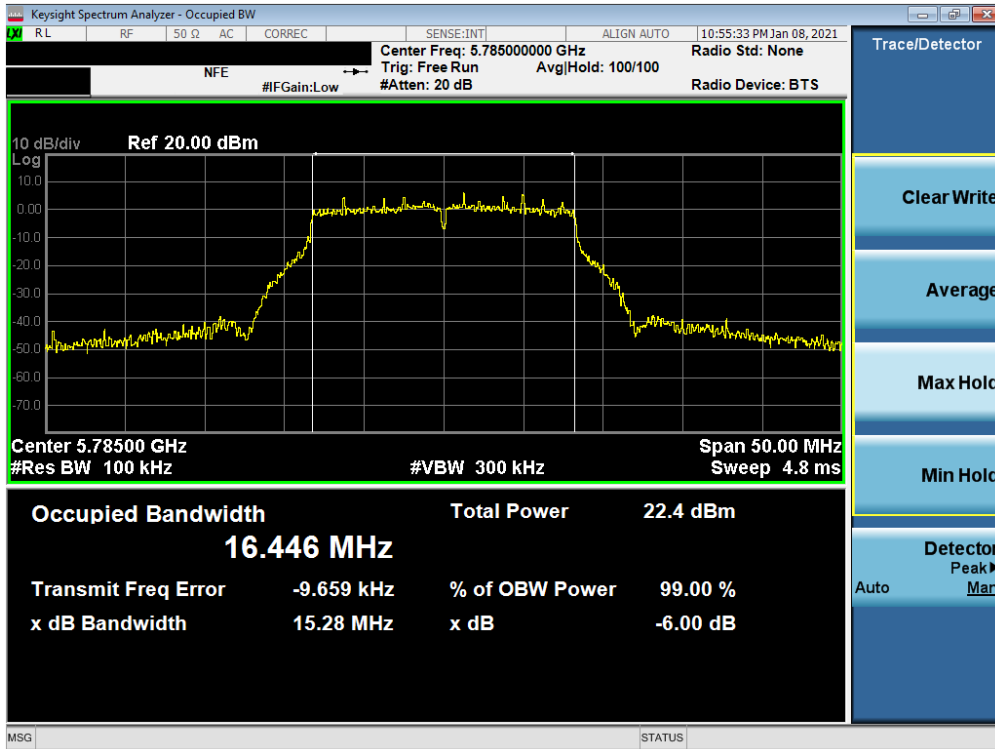


Plot 7-32. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

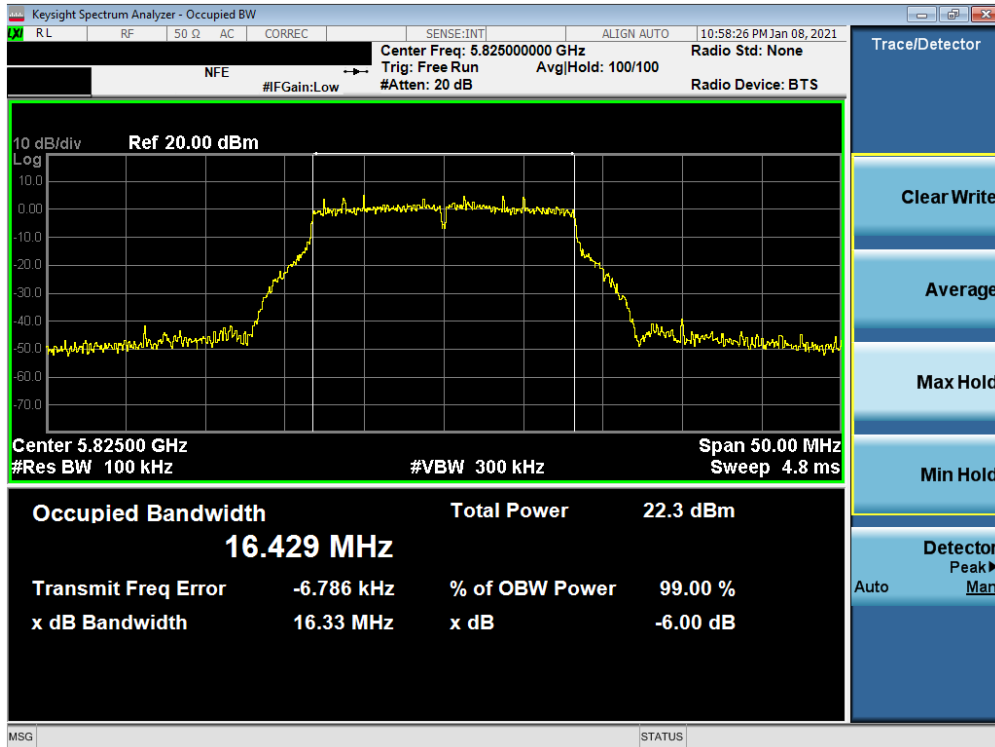


Plot 7-33. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMA426U	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 32 of 89

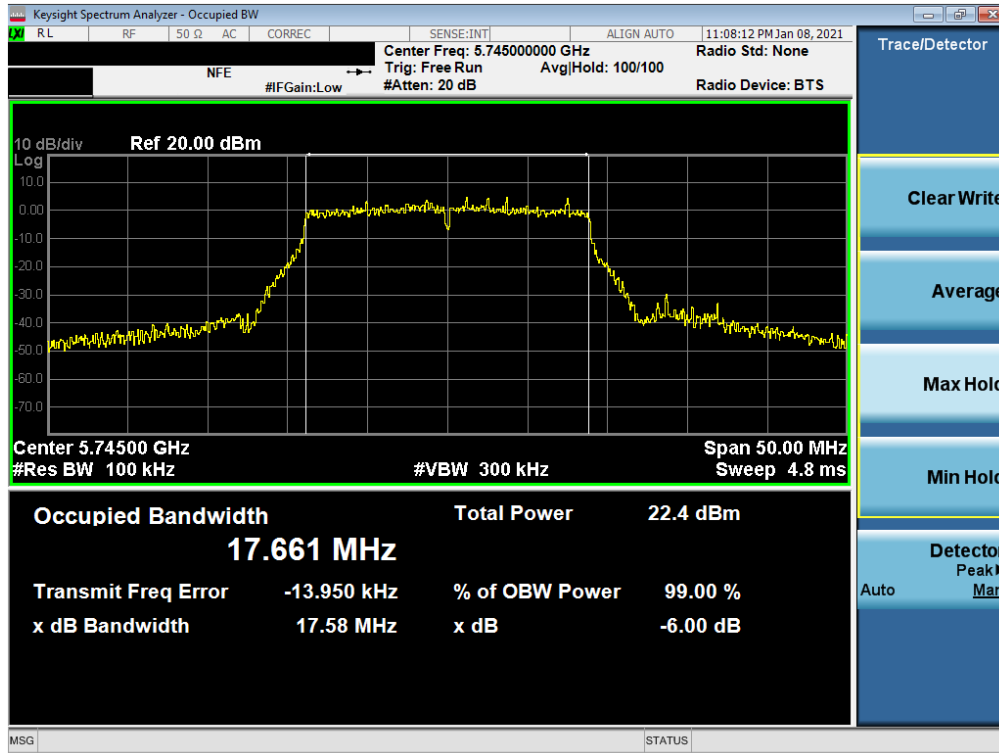


Plot 7-34. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

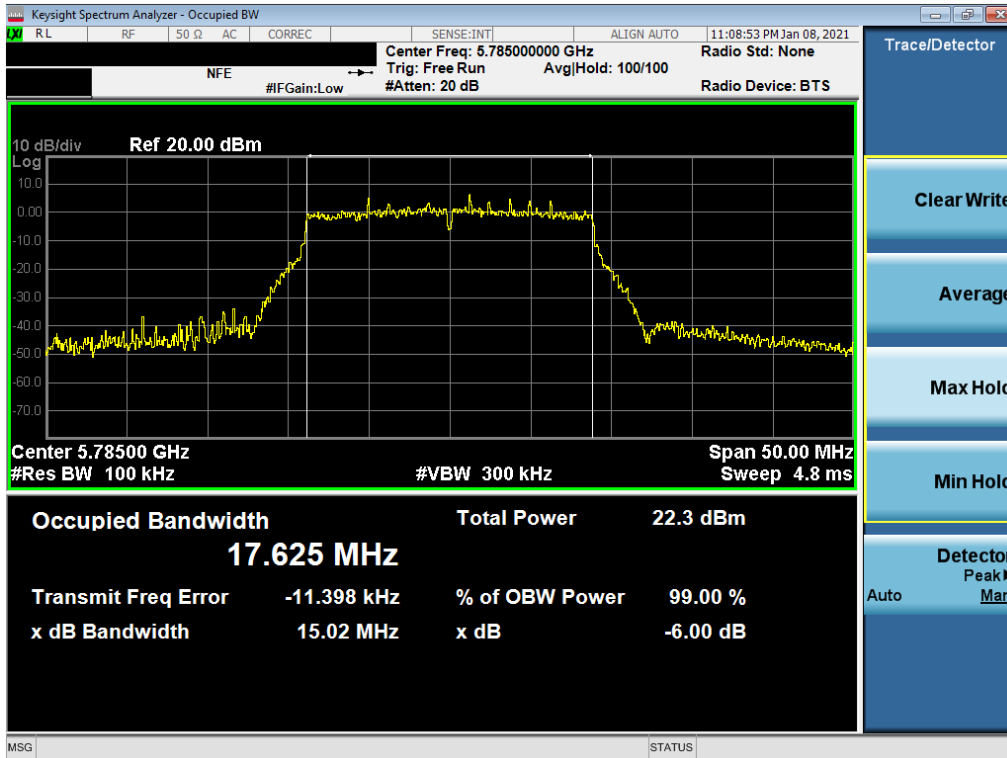


Plot 7-35. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 33 of 89

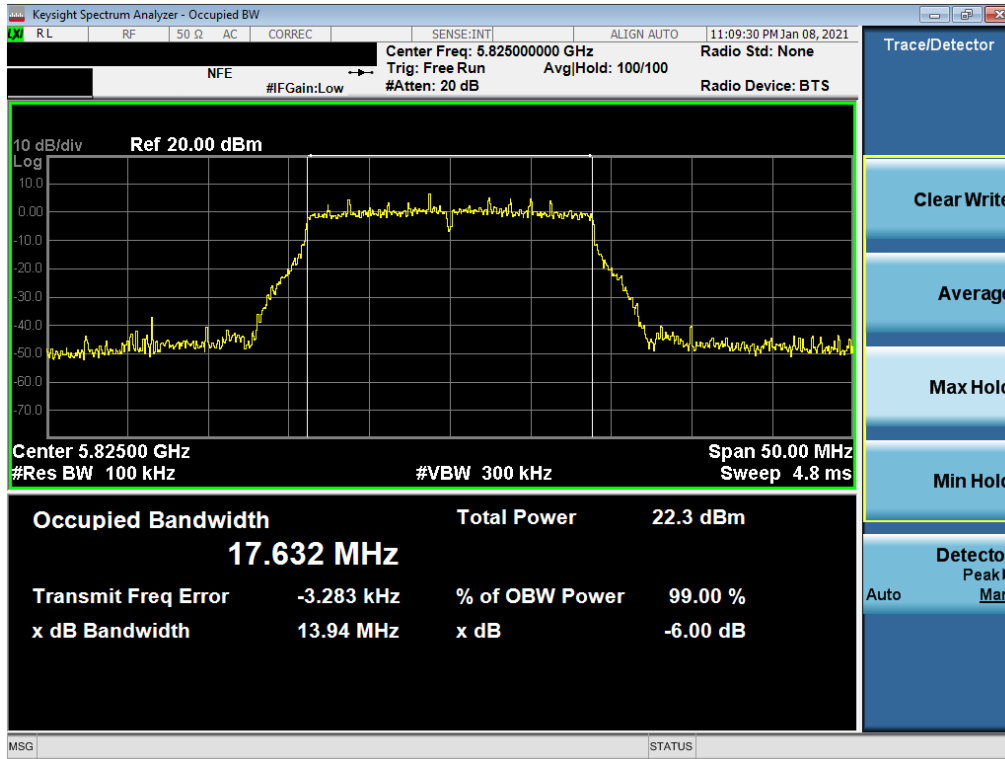


Plot 7-36. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

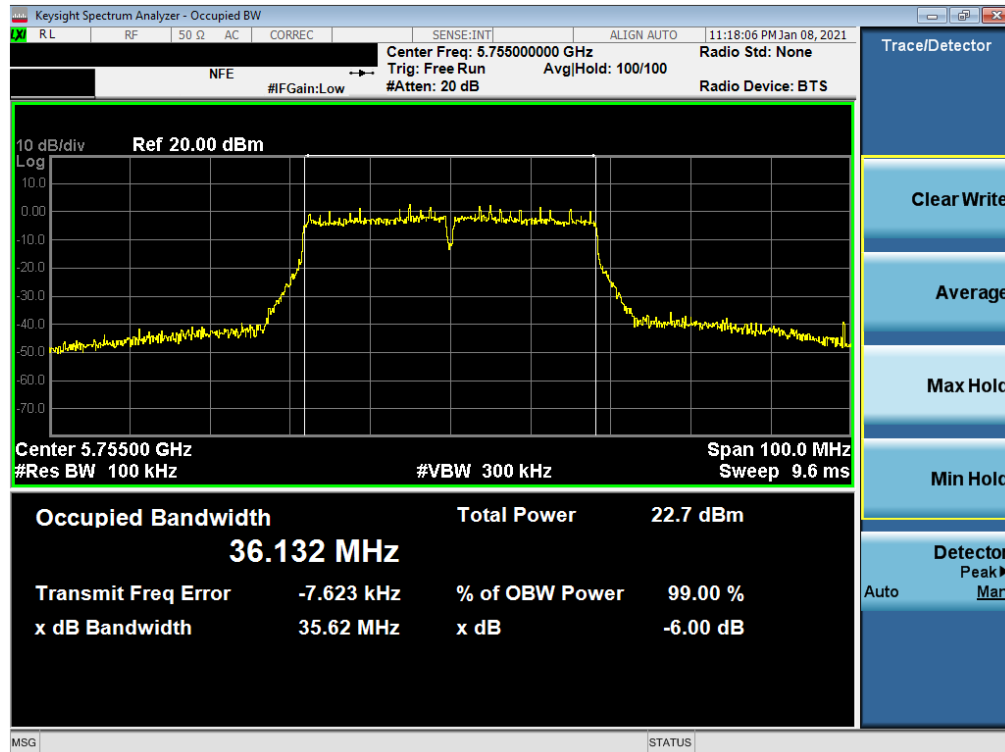


Plot 7-37. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 34 of 89

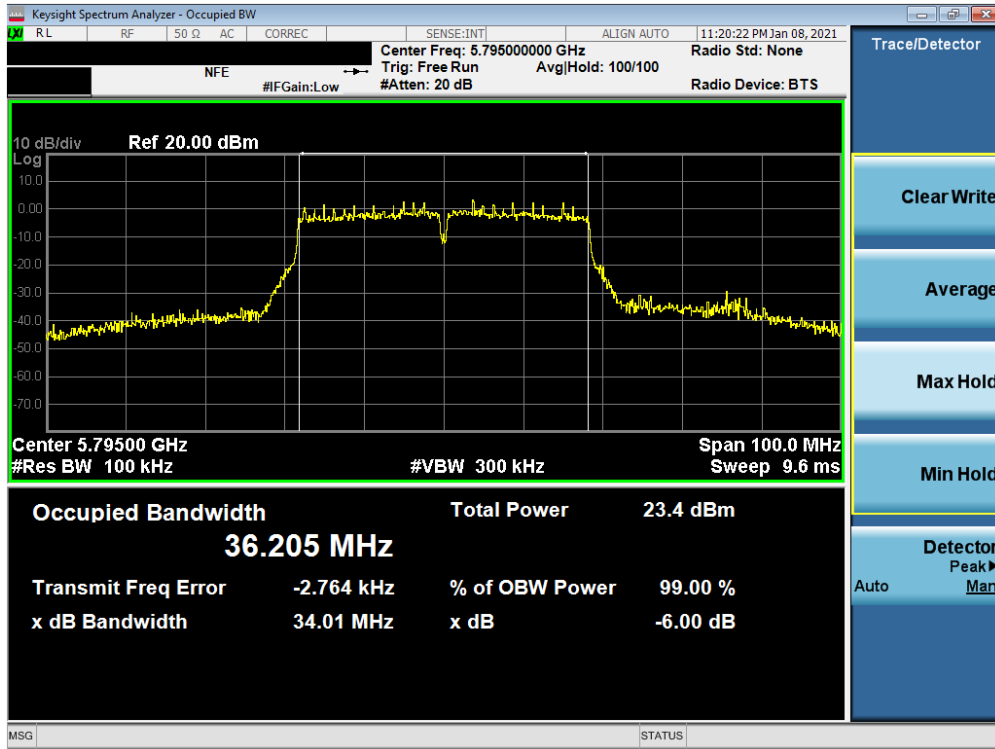

Plot 7-38. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

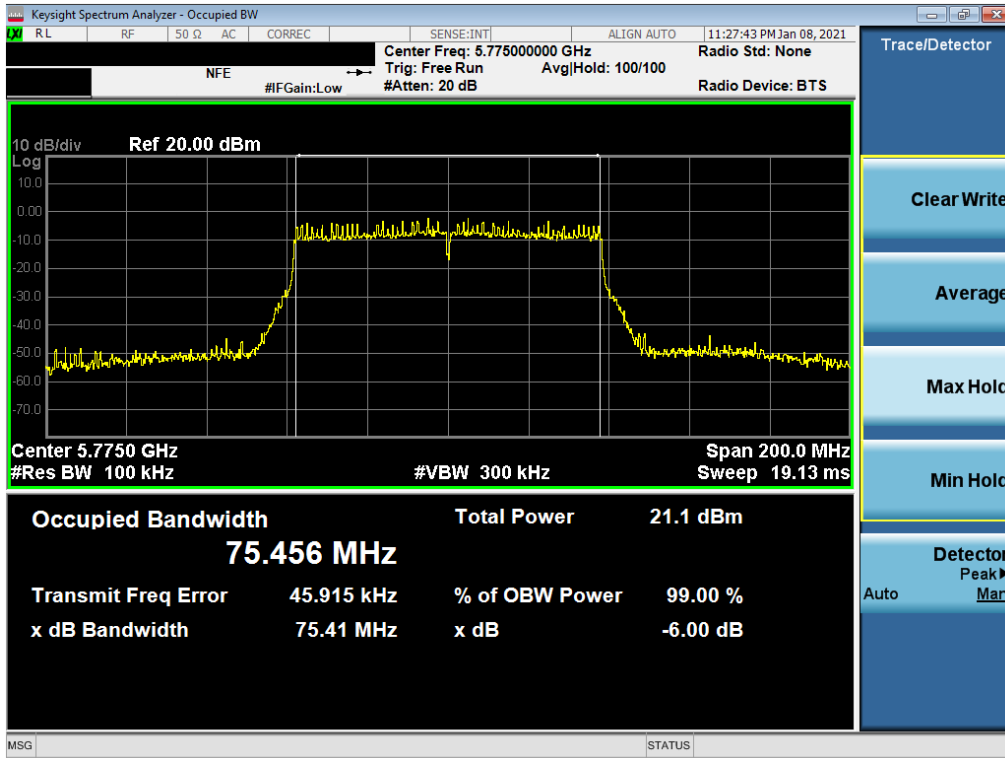

Plot 7-39. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 35 of 89

7.4 UNII Output Power Measurement – 802.11a/n/ac §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or 10 + 10 log10B, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or 11 dBm + 10log₁₀(26dB BW) = 11 dBm + 10log₁₀(19.88) = 23.98dBm. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or 17 + 10 log10B, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or 11 dBm + 10log₁₀(26dB BW) = 11 dBm + 10log₁₀(20.27) = 24.07dBm. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or 17 + 10 log10B, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 36 of 89

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ac		
				5180	36	AVG		
5200	40	AVG	17.65	17.49	16.61	23.98	-6.33	
5220	44	AVG	17.94	17.84	16.98	23.98	-6.04	
5240	48	AVG	17.89	17.66	16.71	23.98	-6.09	
5260	52	AVG	17.37	17.98	16.32	23.98	-6.00	
5280	56	AVG	17.21	17.86	16.96	23.98	-6.12	
5300	60	AVG	17.32	17.95	16.22	23.98	-6.03	
5320	64	AVG	17.75	17.44	16.47	23.98	-6.23	
5500	100	AVG	17.23	17.13	16.41	23.98	-6.75	
5600	120	AVG	17.91	17.75	16.48	23.98	-6.07	
5620	124	AVG	17.45	17.98	16.73	23.98	-6.00	
5720	144	AVG	17.62	17.39	16.51	23.98	-6.36	
5745	149	AVG	17.86	17.65	16.93	30.00	-12.14	
5785	157	AVG	17.60	17.53	16.59	30.00	-12.40	
5825	165	AVG	17.34	17.29	16.37	30.00	-12.66	

Table 7-4. 20MHz BW (UNII) Maximum Conducted Output Power

5GHz (40MHz) Bandwidth	Freq [MHz]	Channel	Detector	IEEE Transmission Mode		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ac		
				5190	38		
5230	46	AVG	17.98	15.88	23.98	-6.00	
5270	54	AVG	17.48	15.38	23.98	-6.50	
5310	62	AVG	17.47	15.59	23.98	-6.51	
5510	102	AVG	17.48	15.79	23.98	-6.50	
5590	118	AVG	17.51	15.91	23.98	-6.47	
5630	126	AVG	17.76	15.98	23.98	-6.22	
5710	142	AVG	17.98	15.56	23.98	-6.00	
5755	151	AVG	17.26	15.47	30.00	-12.74	
5795	159	AVG	17.89	15.79	30.00	-12.11	

Table 7-5. 40MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 37 of 89

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac		
	5210	42	AVG	14.68	23.98	-9.30
	5290	58	AVG	14.89	23.98	-9.09
	5530	106	AVG	14.96	23.98	-9.02
	5610	122	AVG	14.73	23.98	-9.25
5690	138	AVG	14.41	23.98	-9.57	
5775	155	AVG	14.38	30.00	-15.62	

Table 7-6. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMA426U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 38 of 89	

7.5 Maximum Power Spectral Density – 802.11a/n/ac

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 789033 D02 v02r01 – Section F
ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 39 of 89


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	6.42	11.0	-4.58
	5200	40	a	6	5.88	11.0	-5.12
	5240	48	a	6	5.98	11.0	-5.03
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	5.88	11.0	-5.12
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	5.47	11.0	-5.53
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.50	11.0	-5.50
	5190	38	n (40MHz)	13.5/15 (MCS0)	2.57	11.0	-8.43
	5230	46	n (40MHz)	13.5/15 (MCS0)	3.40	11.0	-7.60
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.27	11.0	-14.27
Band 2A	5260	52	a	6	5.50	11.0	-5.50
	5280	56	a	6	5.35	11.0	-5.66
	5320	64	a	6	5.71	11.0	-5.29
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	6.17	11.0	-4.83
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	5.84	11.0	-5.16
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	5.45	11.0	-5.55
	5270	54	n (40MHz)	13.5/15 (MCS0)	2.37	11.0	-8.63
	5310	62	n (40MHz)	13.5/15 (MCS0)	2.43	11.0	-8.57
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-3.34	11.0	-14.34
Band 2C	5500	100	a	6	5.13	11.0	-5.87
	5600	120	a	6	5.19	11.0	-5.81
	5720	144	a	6	5.09	11.0	-5.91
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	5.53	11.0	-5.47
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	4.89	11.0	-6.11
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	4.77	11.0	-6.23
	5510	102	n (40MHz)	13.5/15 (MCS0)	1.83	11.0	-9.17
	5590	118	n (40MHz)	13.5/15 (MCS0)	1.59	11.0	-9.41
	5710	142	n (40MHz)	13.5/15 (MCS0)	2.19	11.0	-8.81
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-3.84	11.0	-14.84
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-4.35	11.0	-15.35
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-4.54	11.0	-15.54

Table 7-7. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 40 of 89

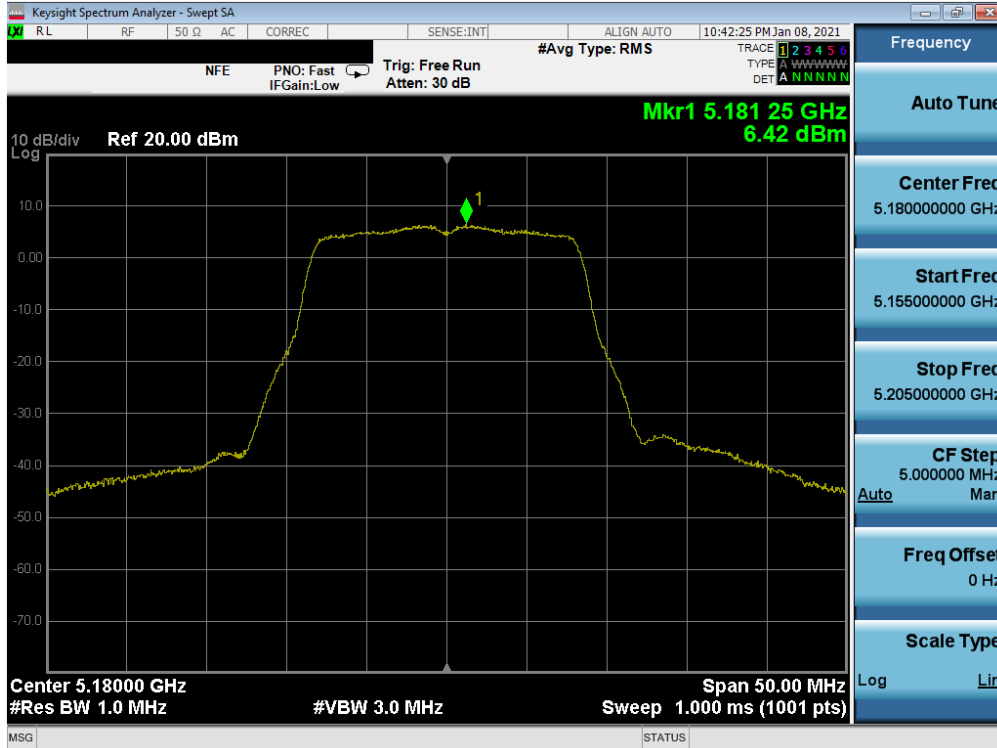


Plot 7-40. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

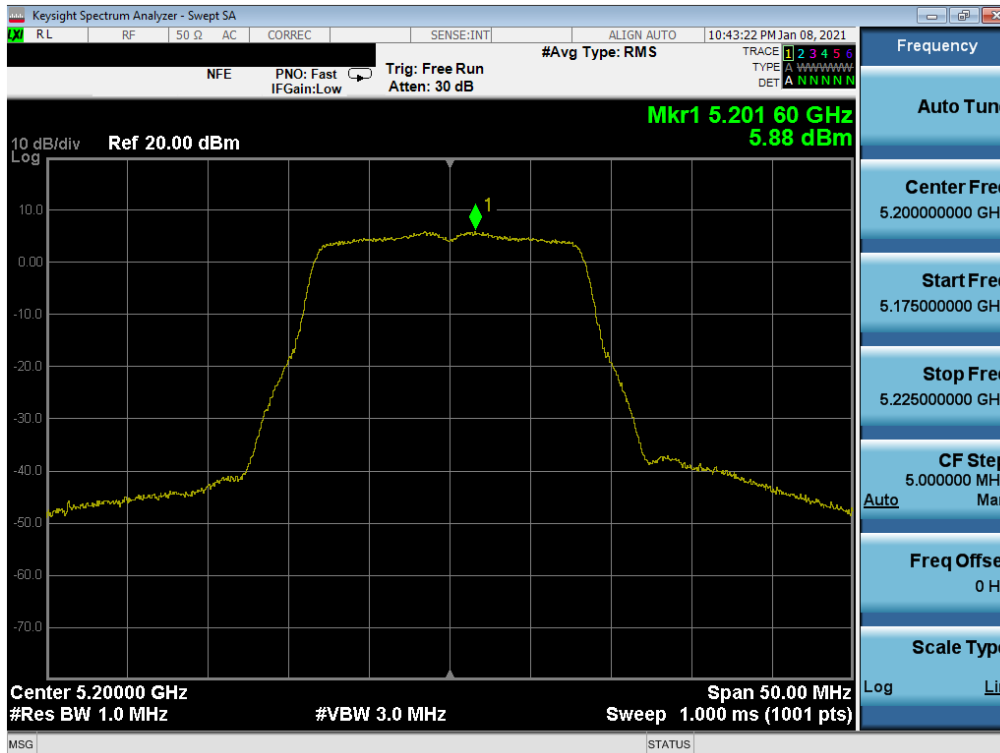


Plot 7-41. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMA426U	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 41 of 89

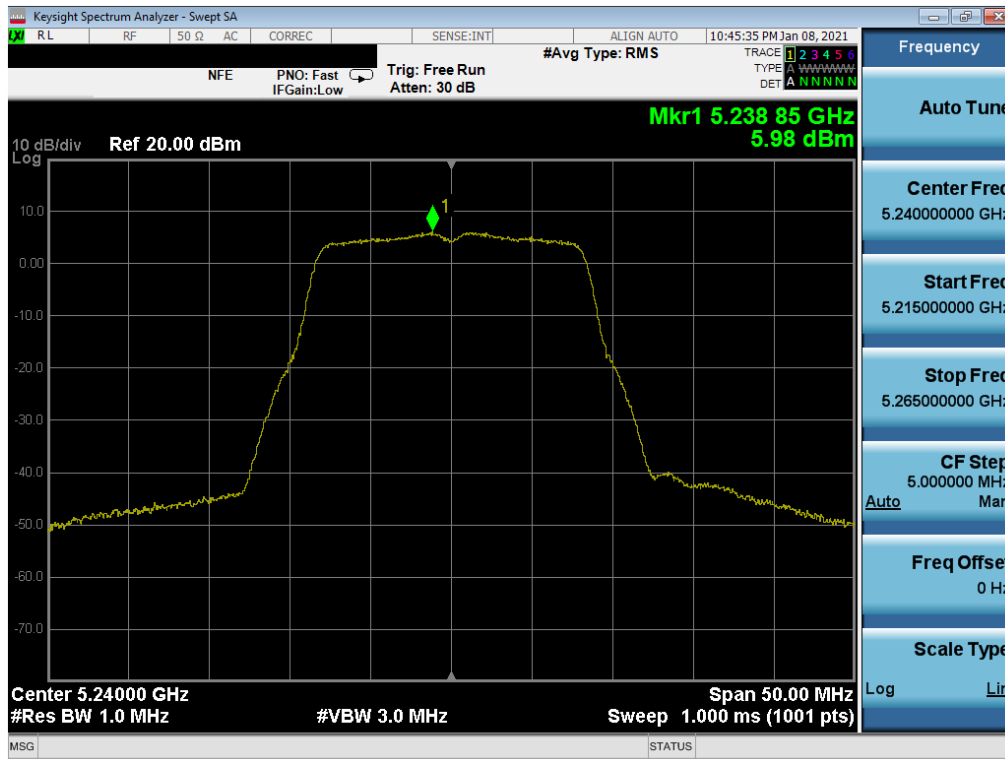


Plot 7-42. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

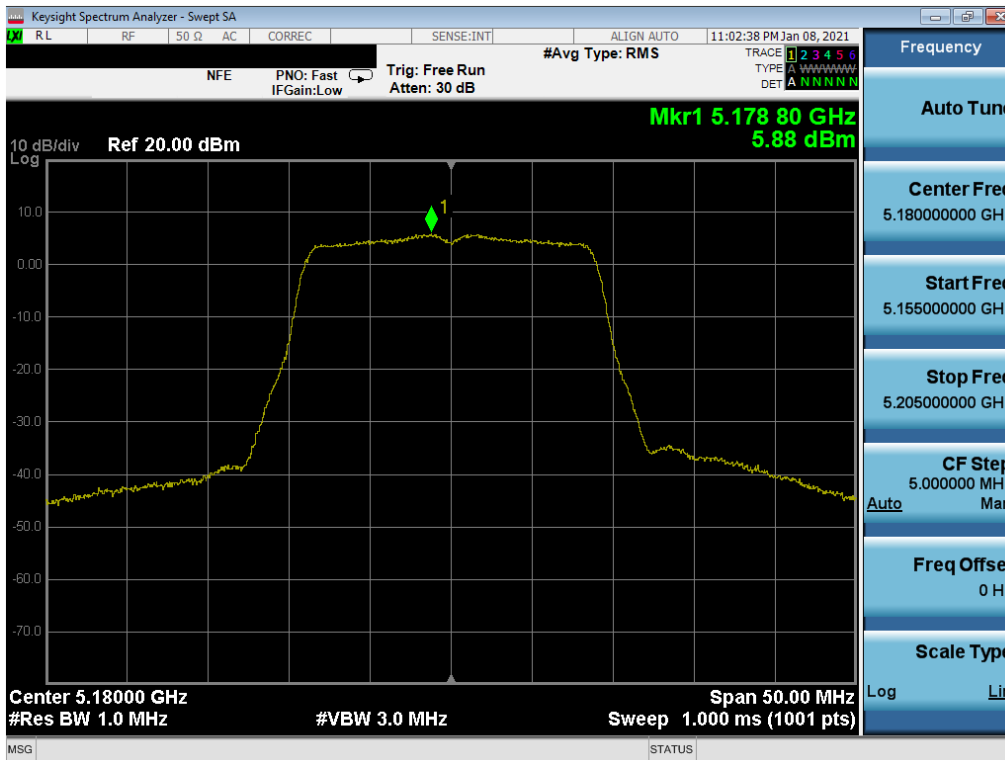


Plot 7-43. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 42 of 89

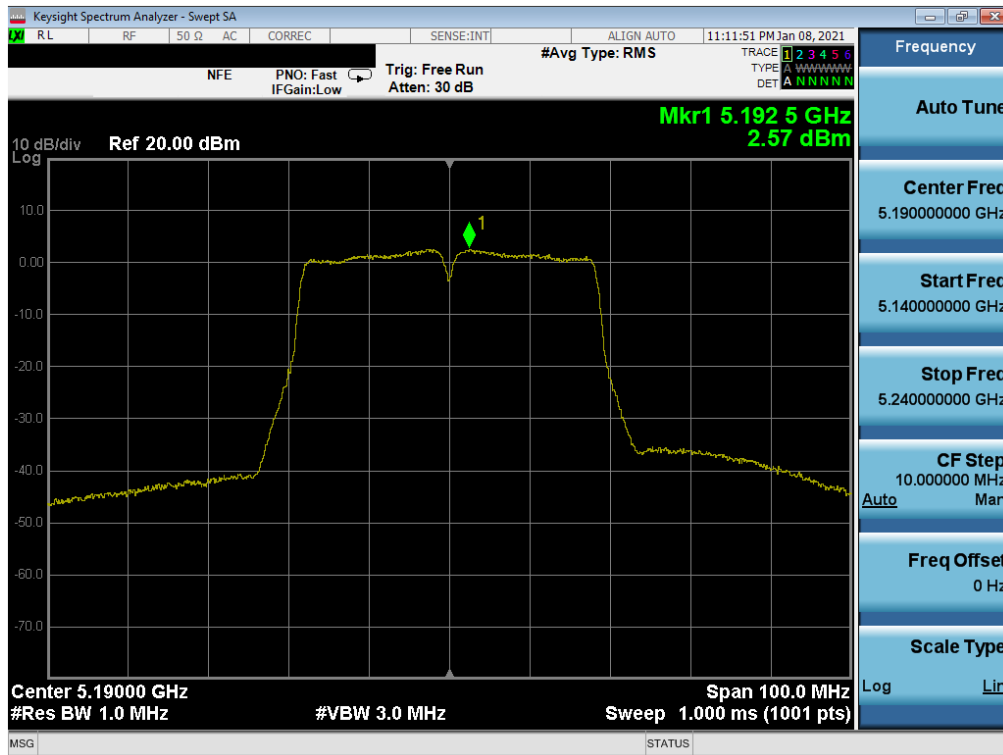


Plot 7-46. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

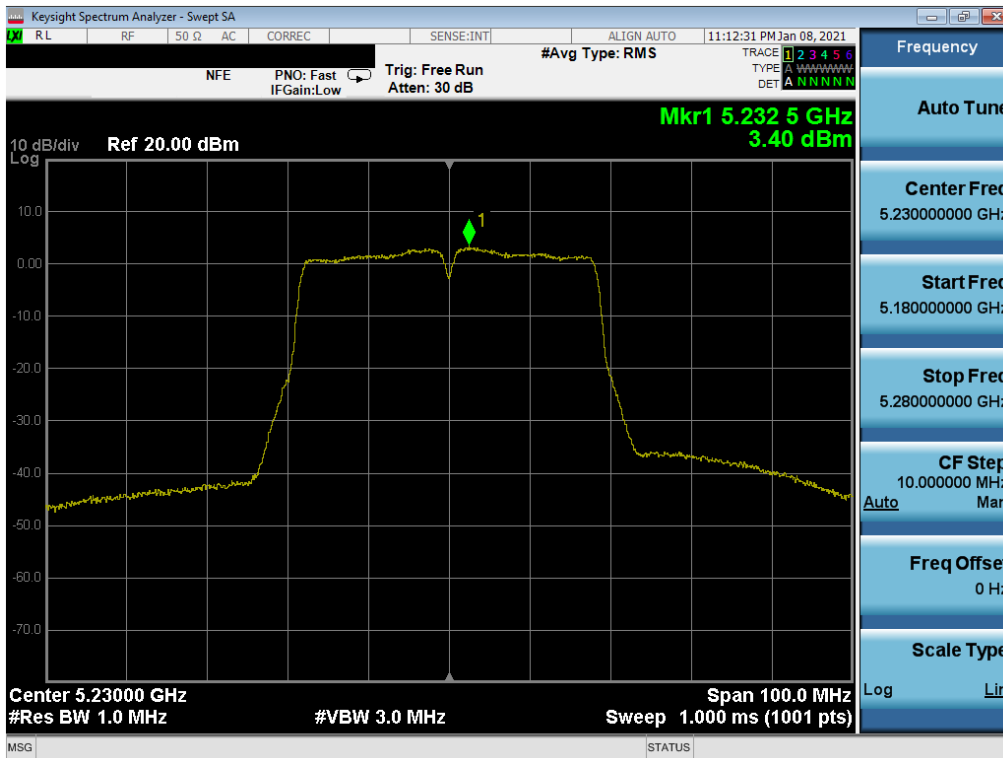


Plot 7-47. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 44 of 89

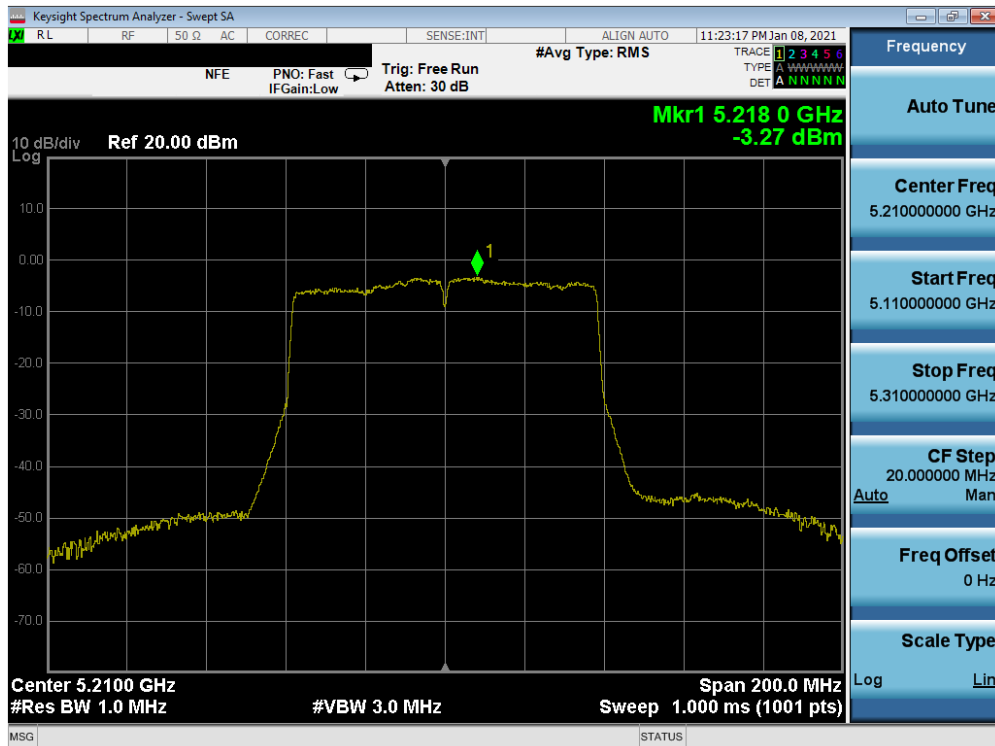


Plot 7-48. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

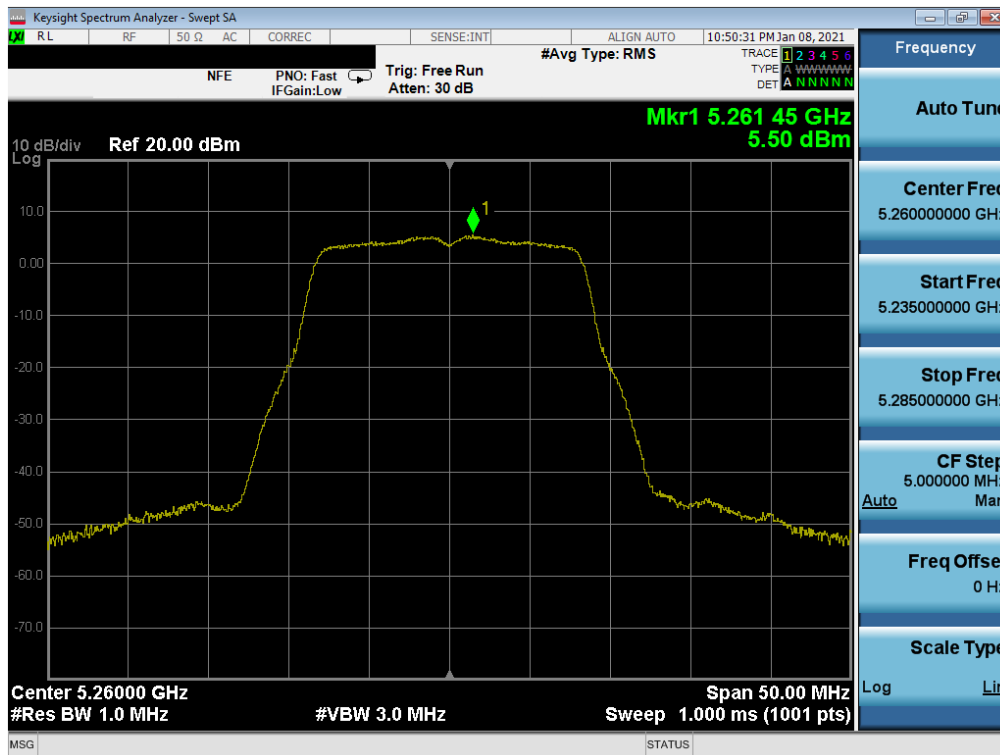


Plot 7-49. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 45 of 89

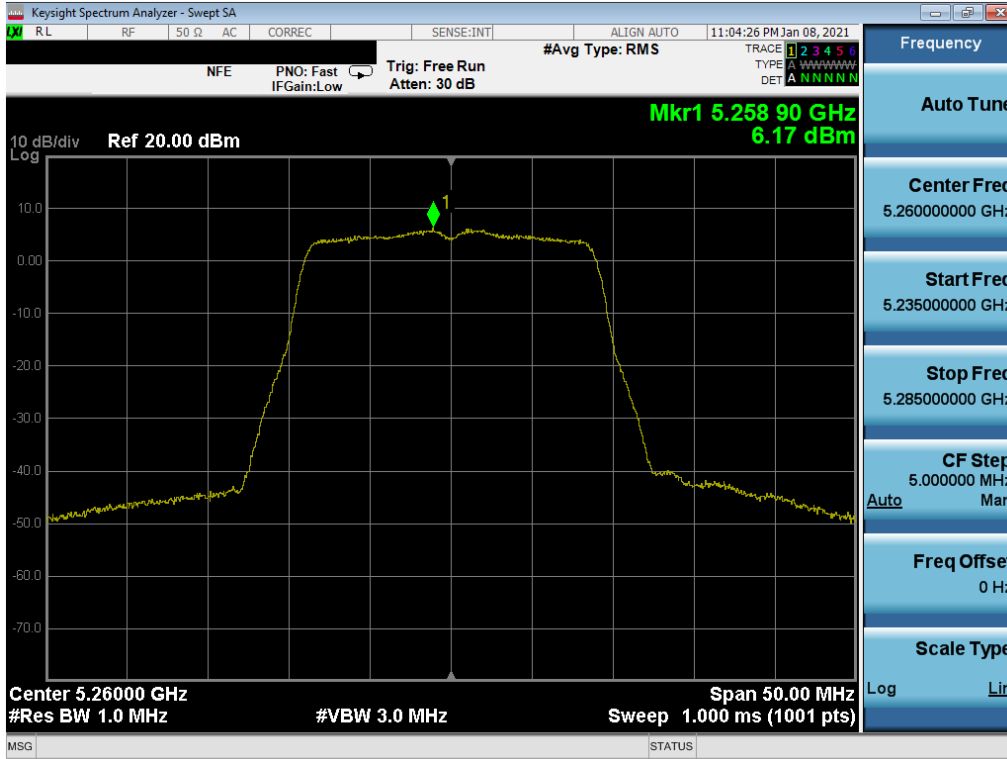


Plot 7-52. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

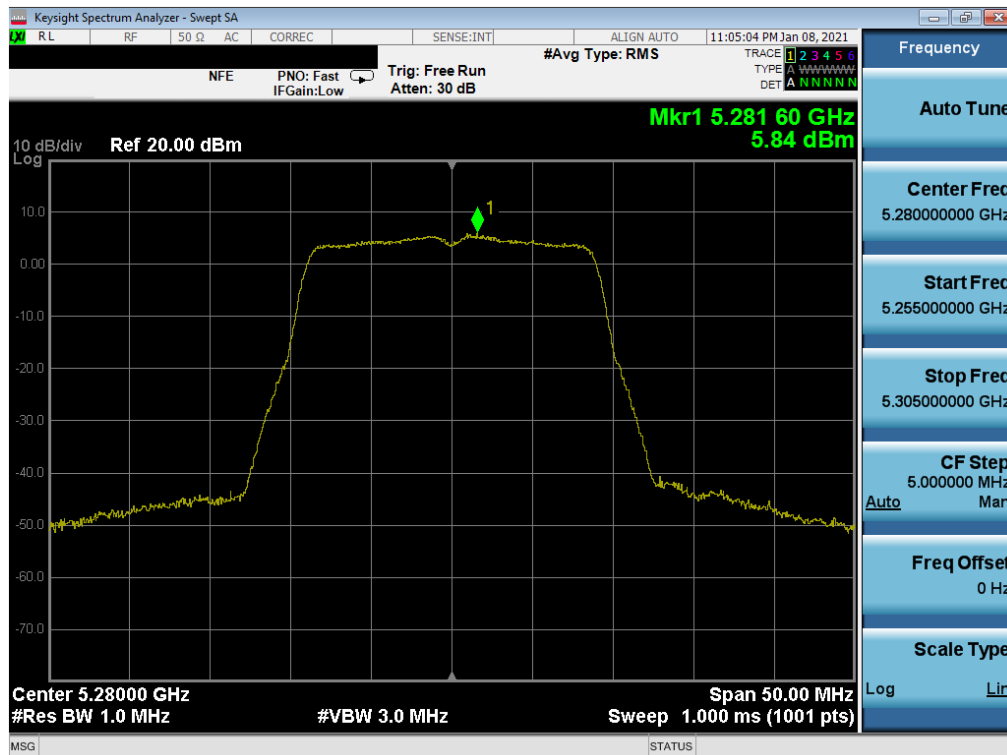


Plot 7-53. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 47 of 89

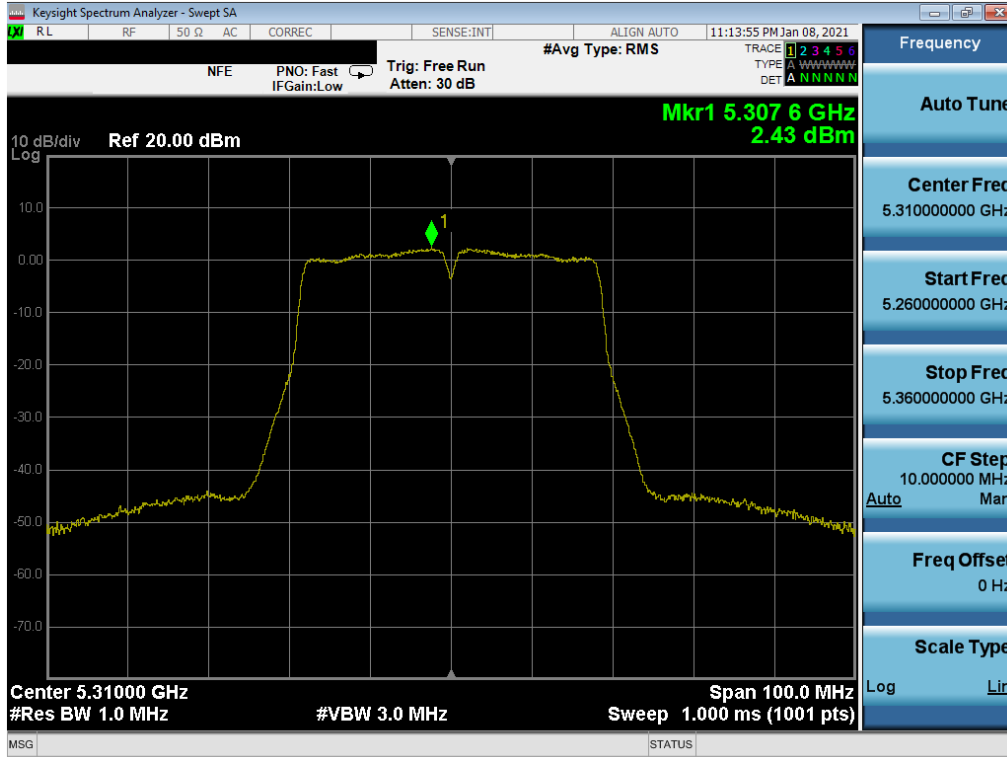


Plot 7-56. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

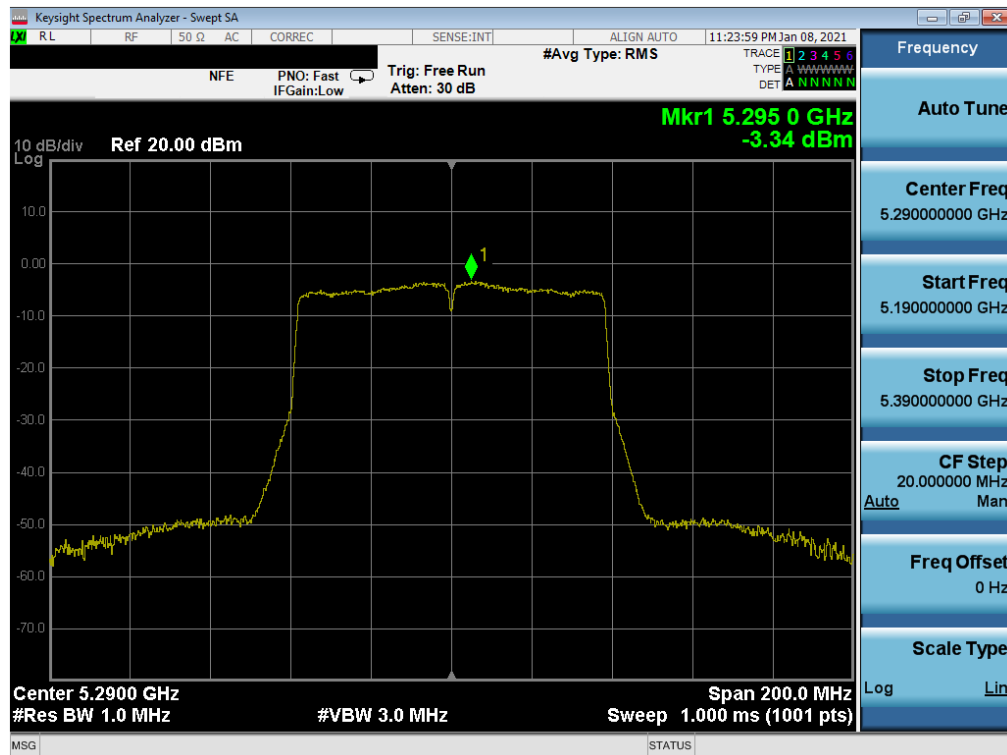


Plot 7-57. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMA426U	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 49 of 89

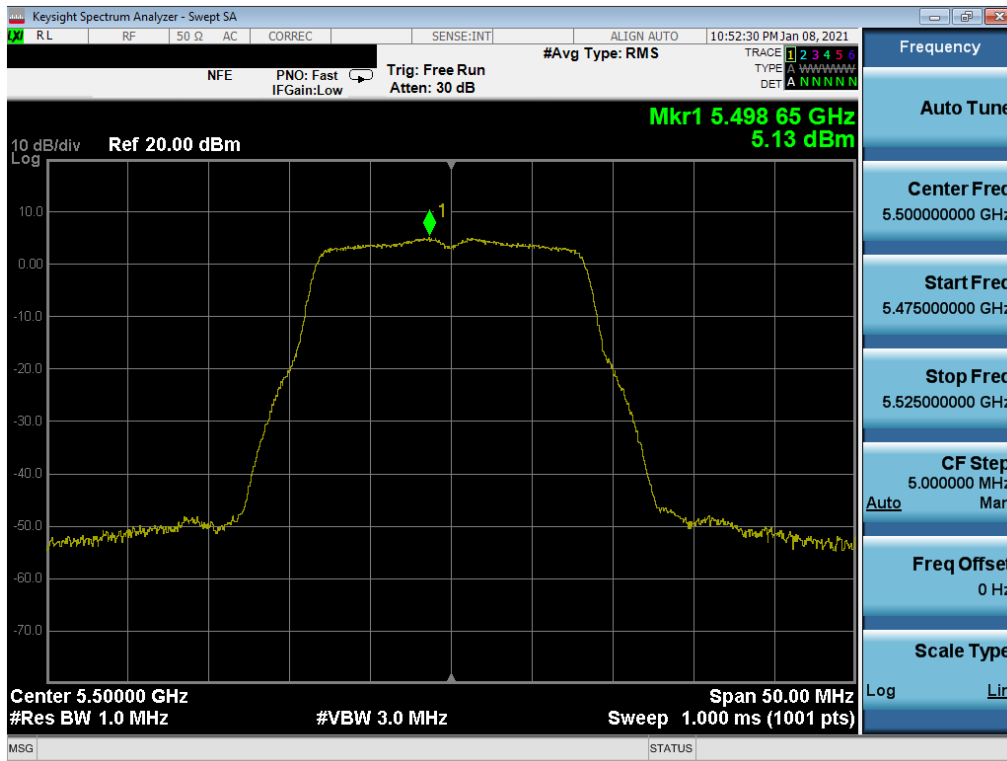


Plot 7-58. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

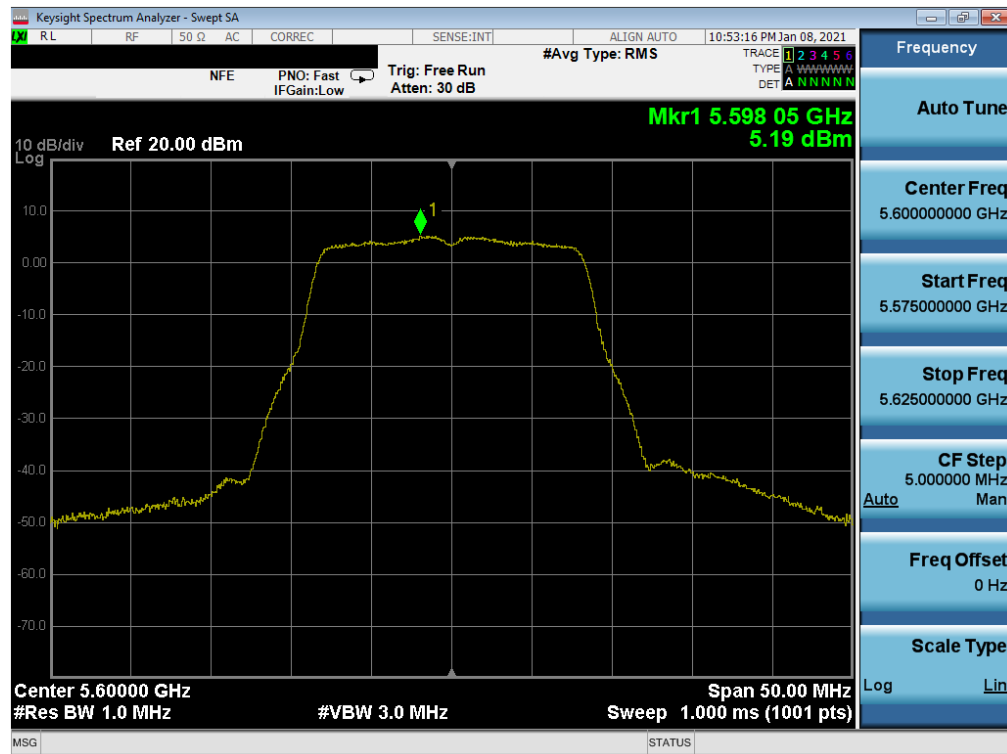


Plot 7-59. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 50 of 89

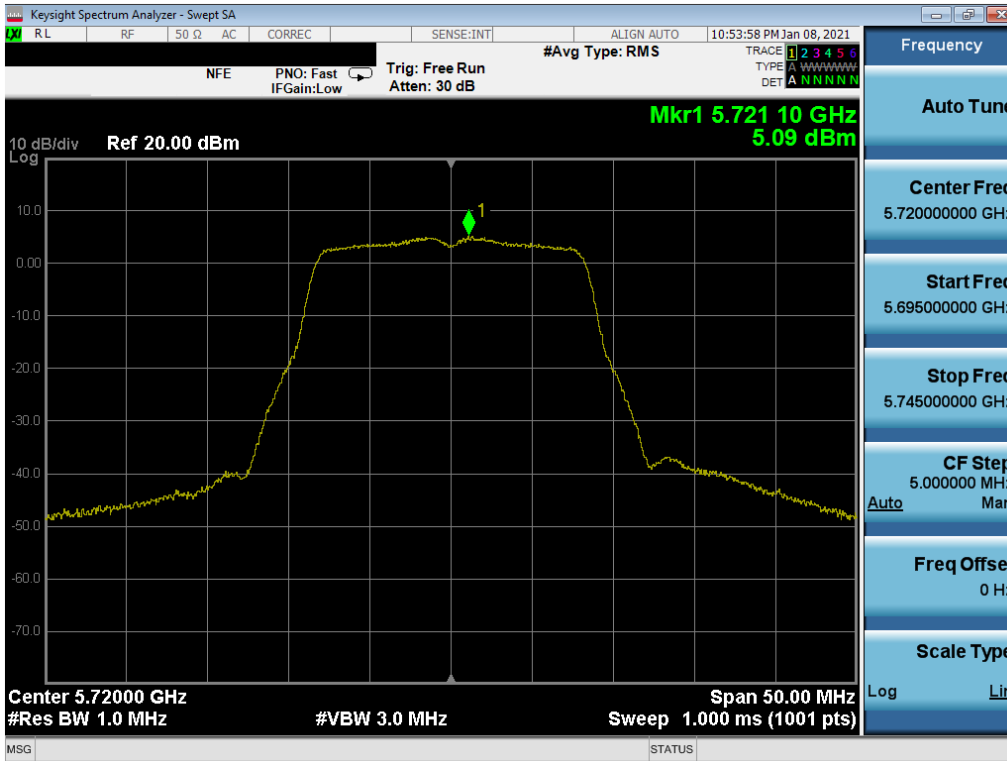


Plot 7-60. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)

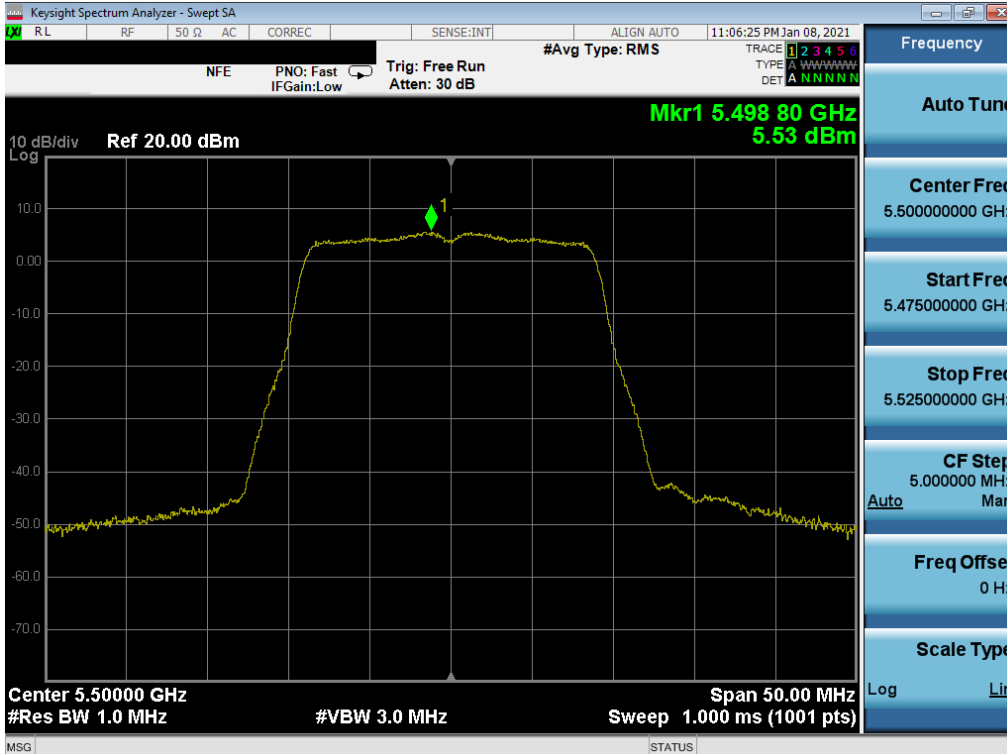


Plot 7-61. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMA426U	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 51 of 89

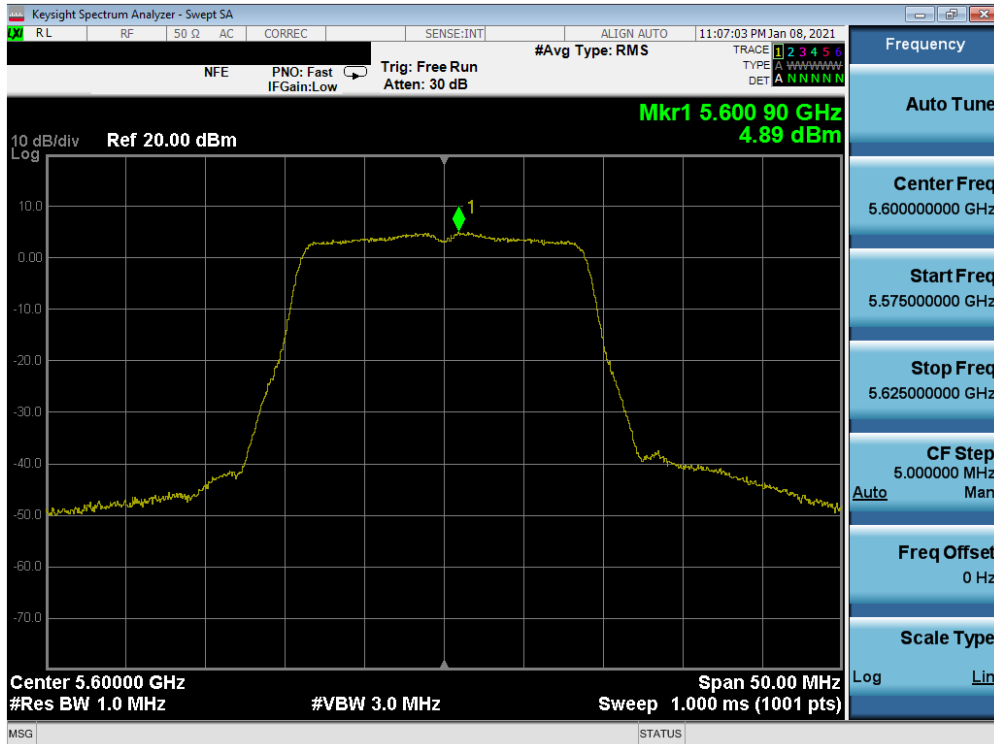


Plot 7-62. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

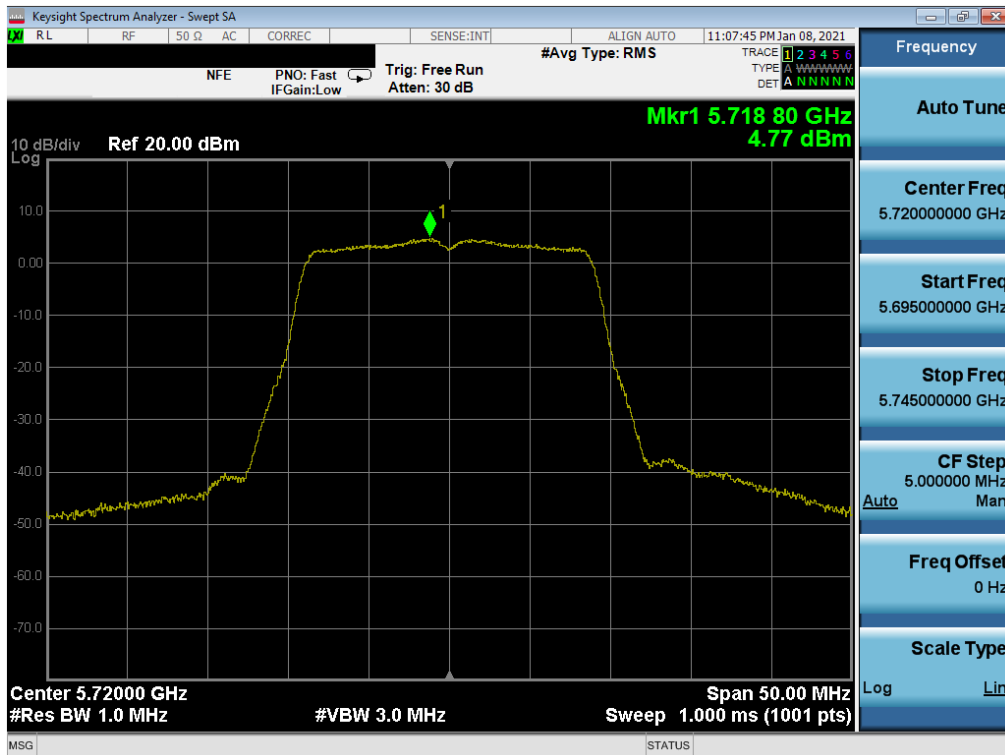


Plot 7-63. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMA426U	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 52 of 89

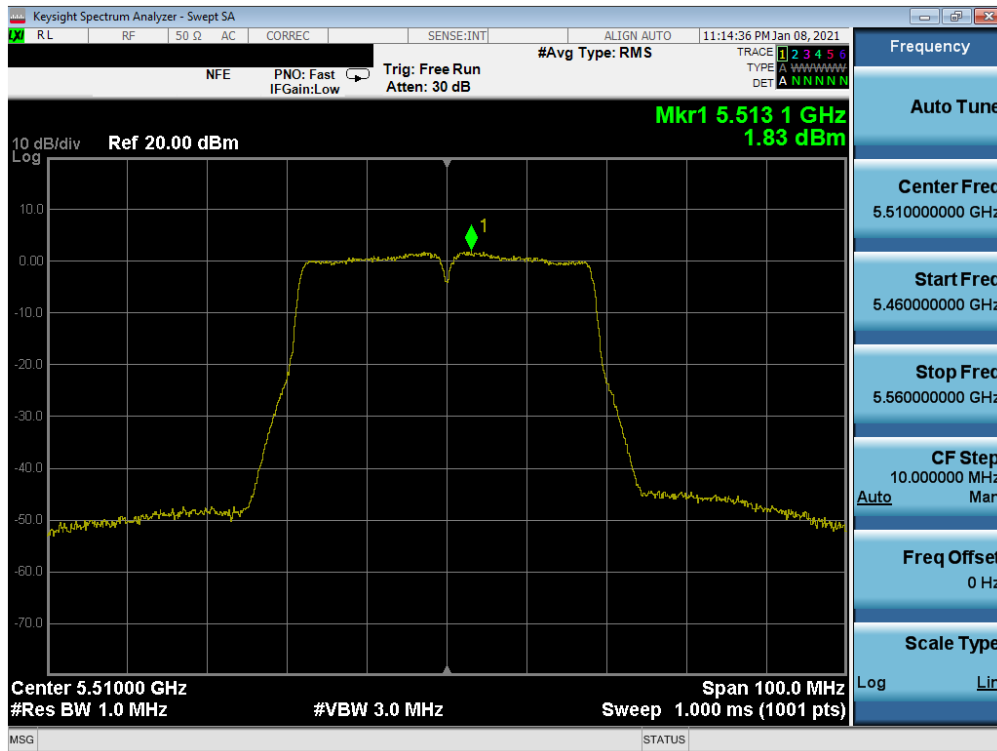


Plot 7-64. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

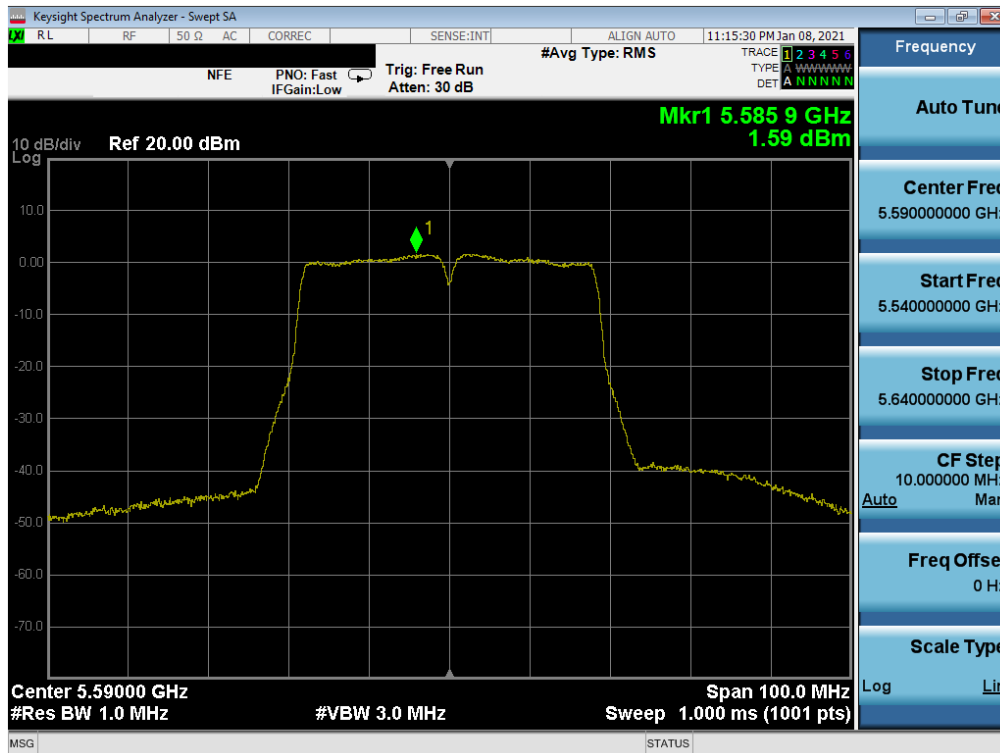


Plot 7-65. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 53 of 89

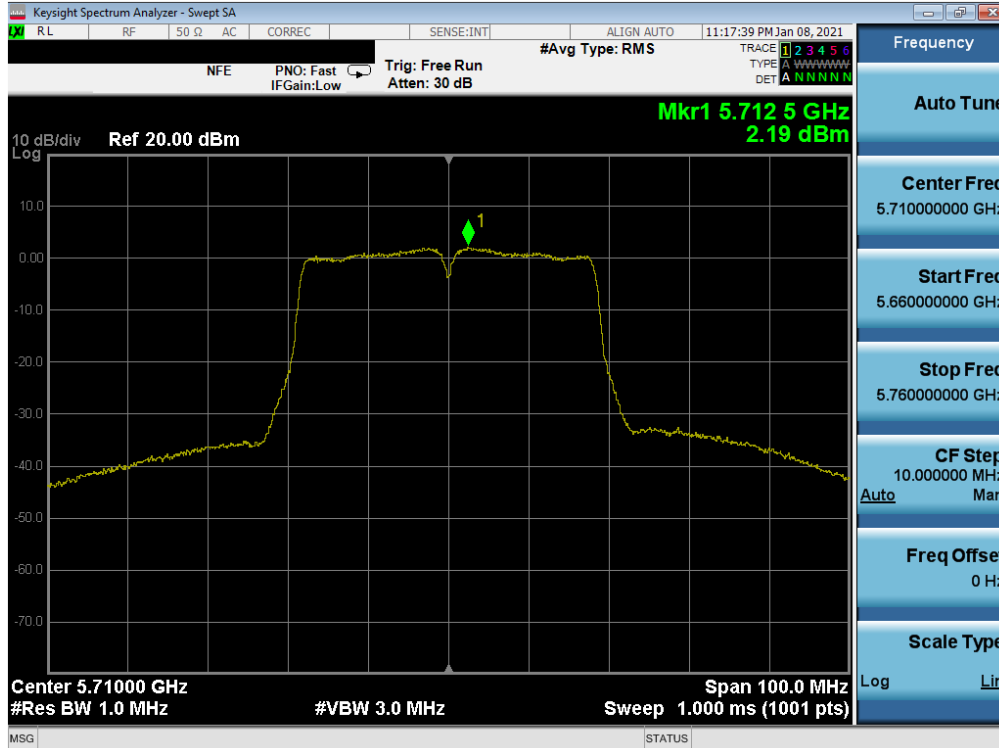


Plot 7-66. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

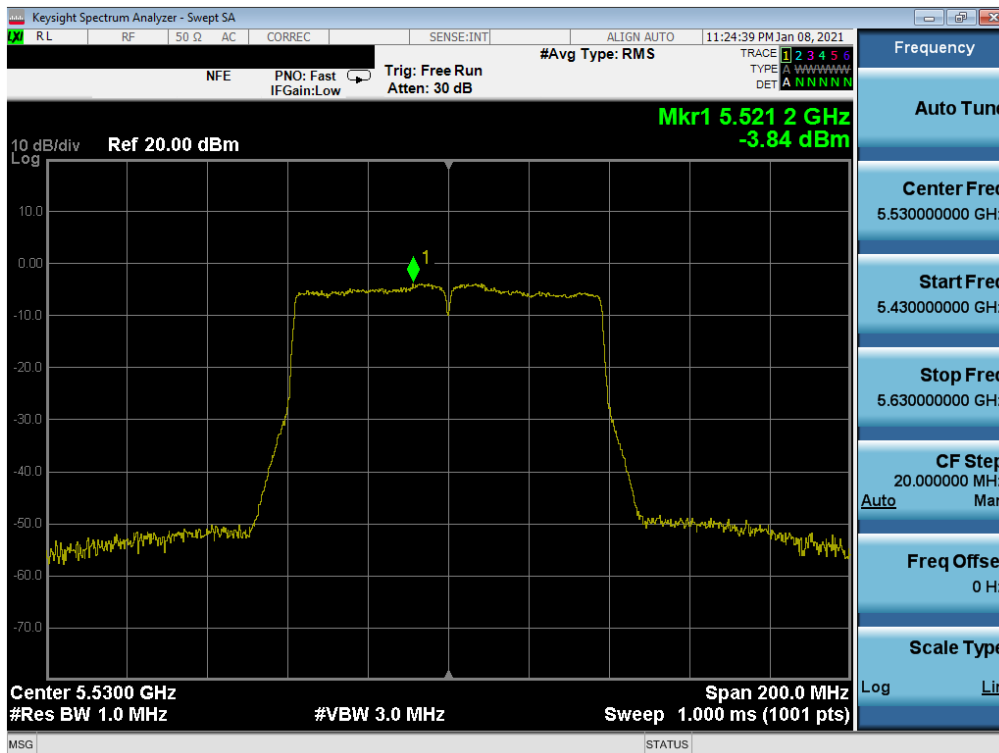


Plot 7-67. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 54 of 89

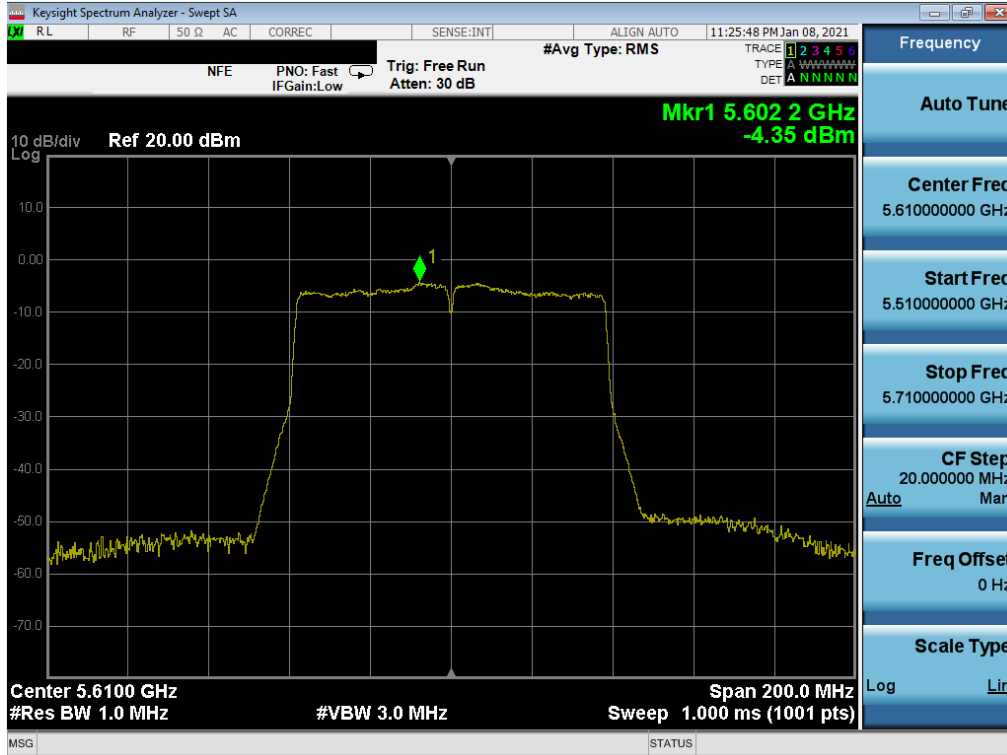

Plot 7-68. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

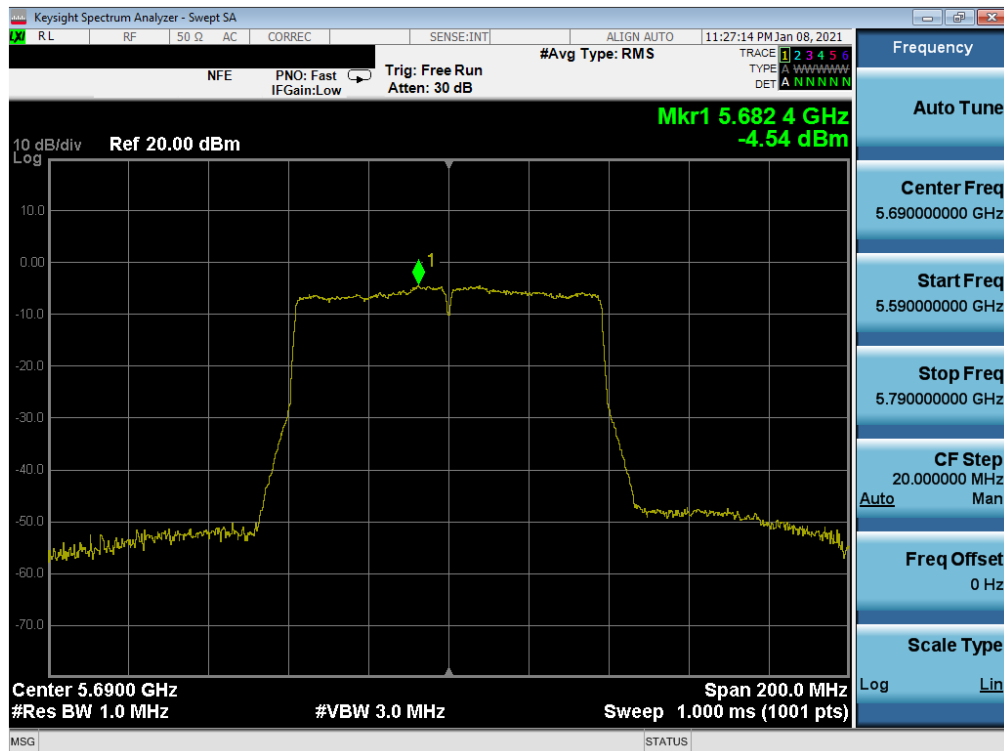


Plot 7-69. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMA426U	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 55 of 89


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	6	4.46	30.0	-25.54
	5785	157	a	6	3.96	30.0	-26.04
	5825	165	a	6	3.98	30.0	-26.02
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	3.96	30.0	-26.04
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	3.45	30.0	-26.55
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	3.57	30.0	-26.43
	5755	151	n (40MHz)	13.5/15 (MCS0)	0.73	30.0	-29.28
	5795	159	n (40MHz)	13.5/15 (MCS0)	1.03	30.0	-28.97
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-5.44	30.0	-35.44

Table 7-8. Band 3 Conducted Power Spectral Density Measurements

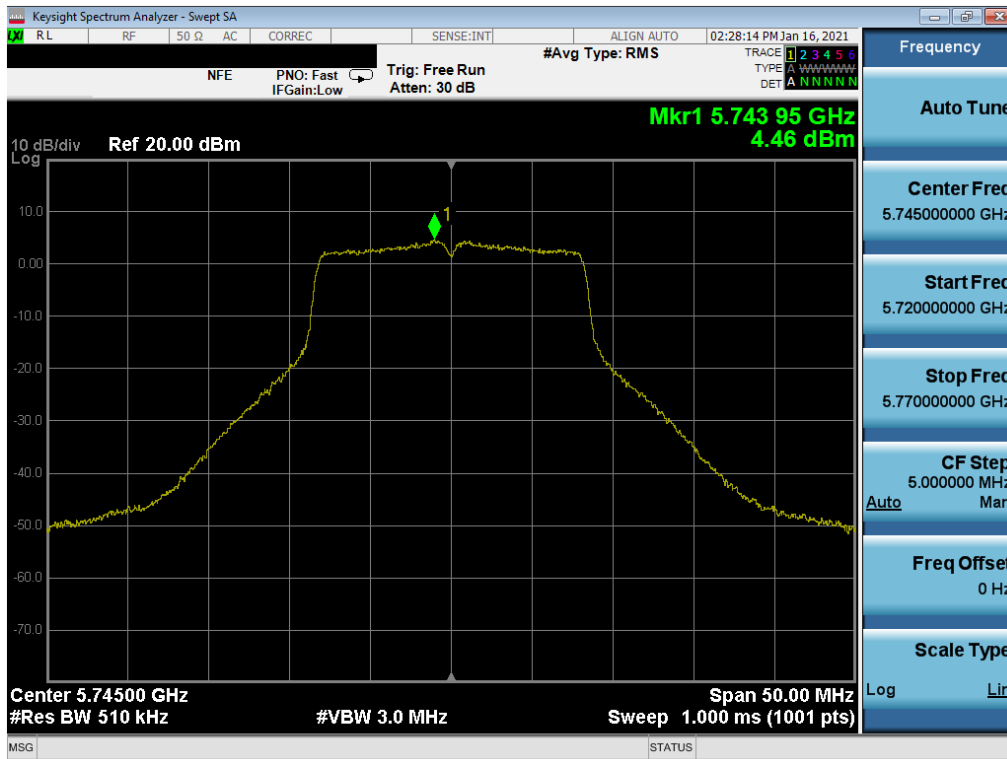


Plot 7-70. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 56 of 89

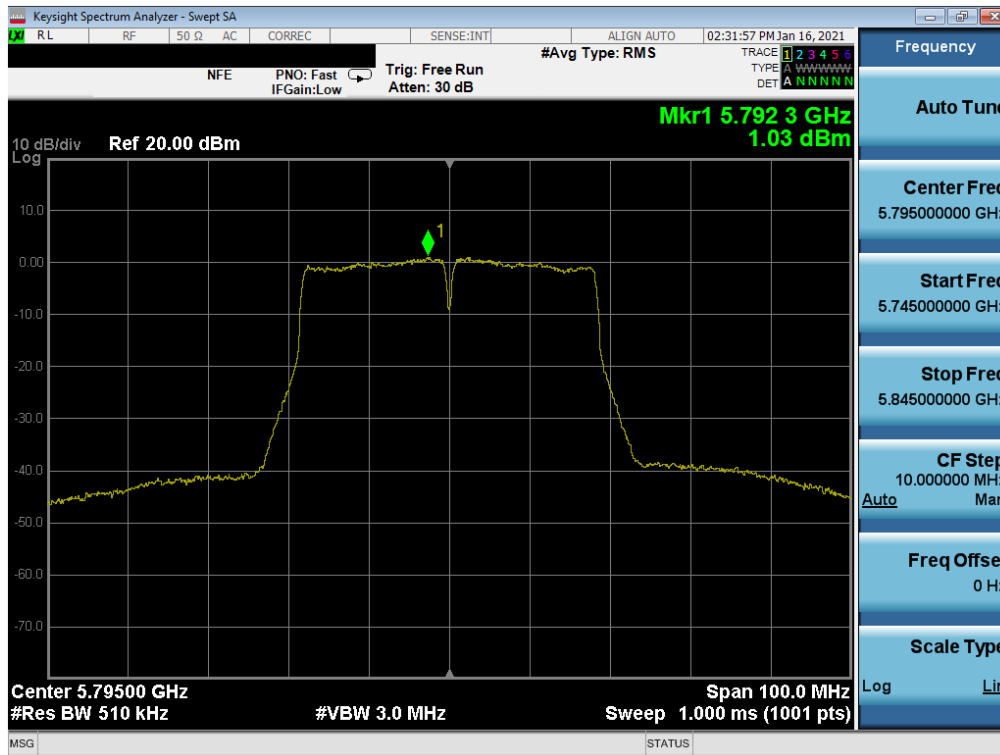

Plot 7-77. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

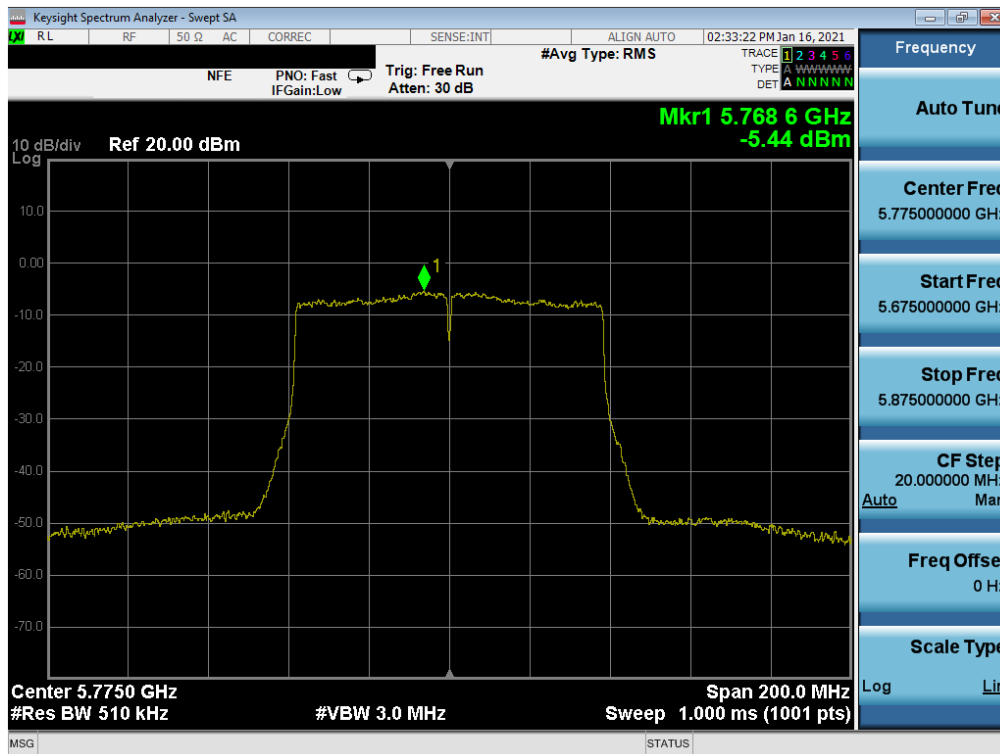

Plot 7-78. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 60 of 89

7.6 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-9 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-9. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span}/\text{RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 61 of 89

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

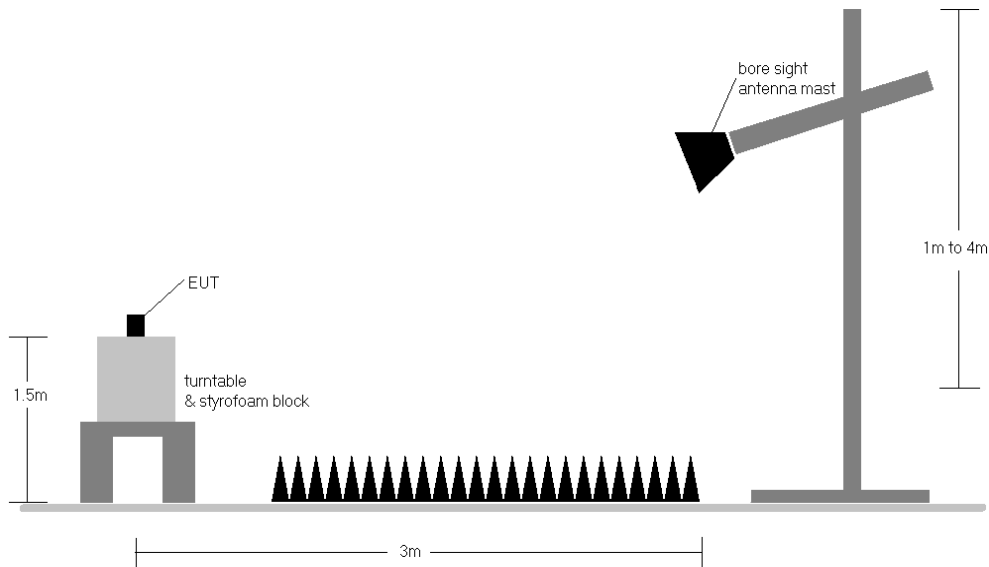


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: A3LSMA426U	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 62 of 89

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-9.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-9. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 63 of 89


7.6.1 Radiated Spurious Emission Measurements

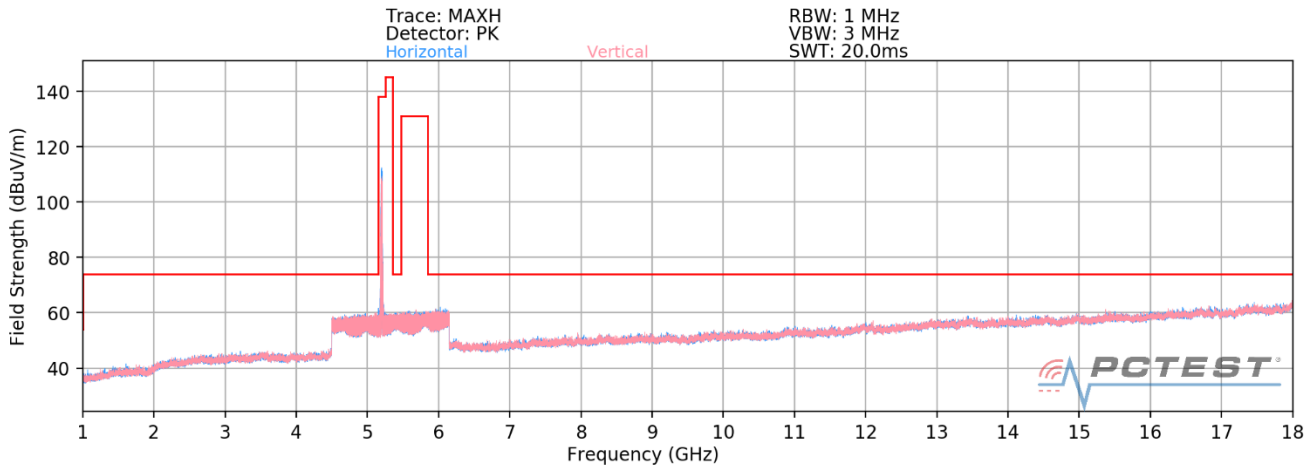

Plot 7-79. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40)

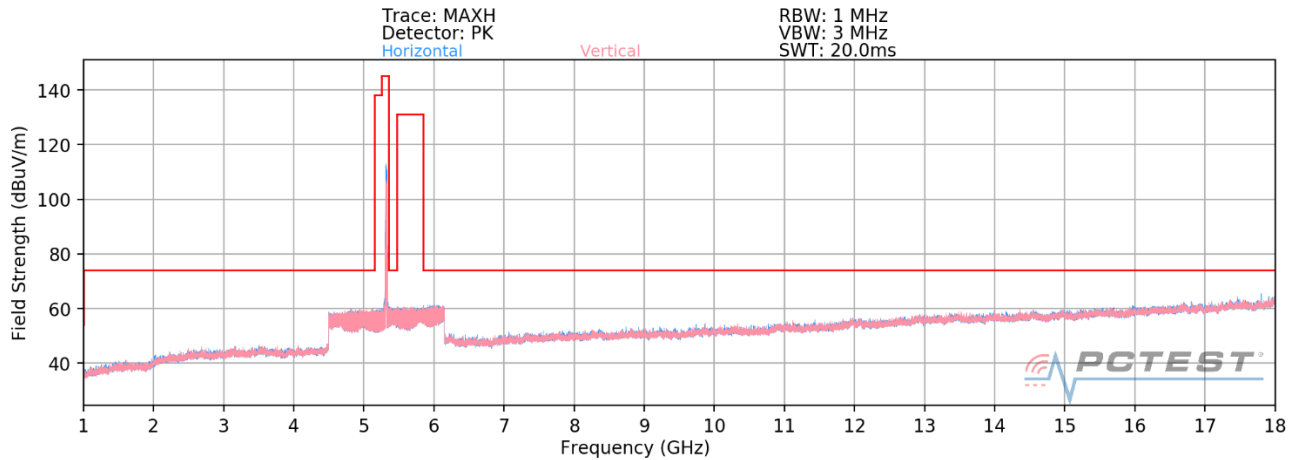


Plot 7-80. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56)

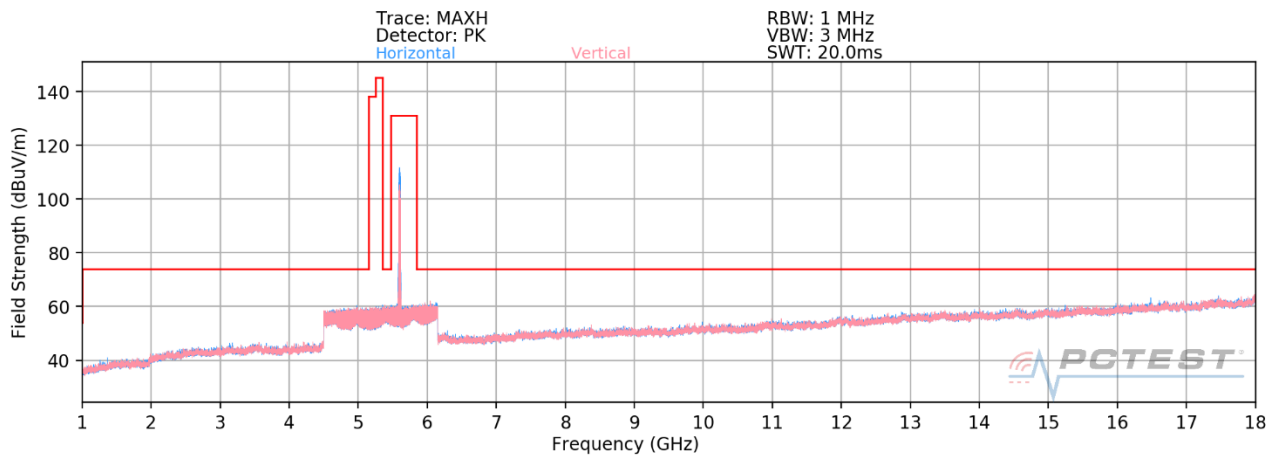

Plot 7-81. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 120)


FCC ID: A3LSMA426U	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 64 of 89

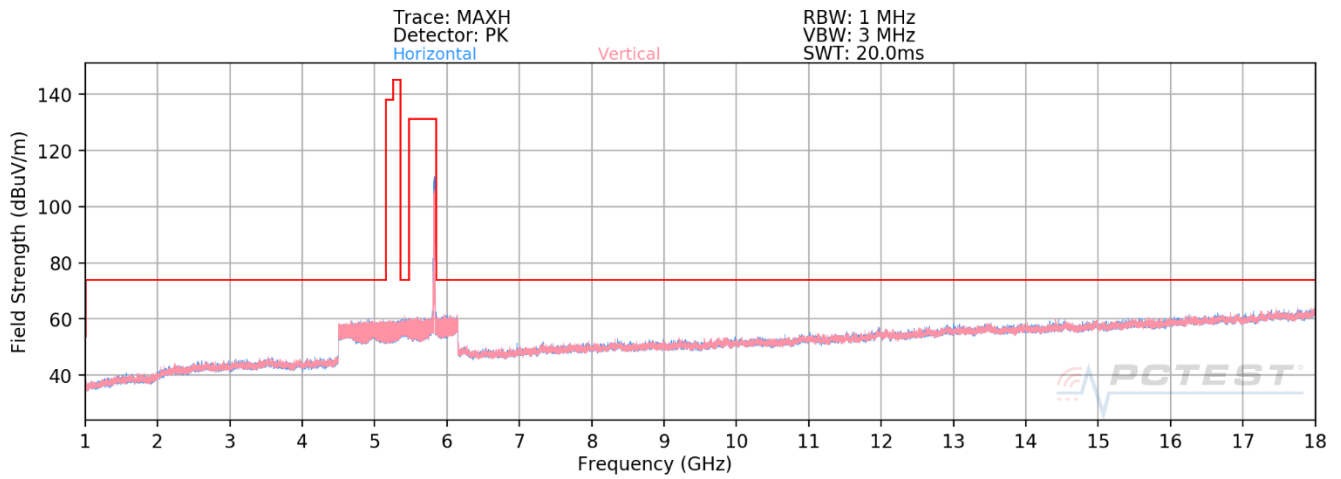


Plot 7-82. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157)

FCC ID: A3LSMA426U	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 65 of 89

Radiated Spurious Emissions Measurements (Above 18GHz)

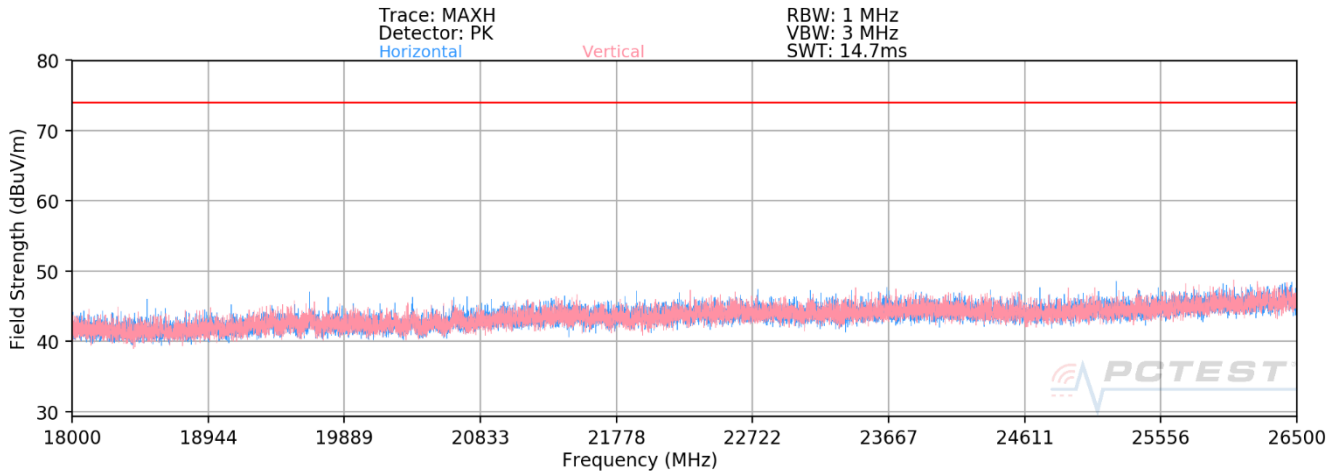

Plot 7-83. Radiated Spurious Plot 18GHz - 26.5GHz (802.11a)

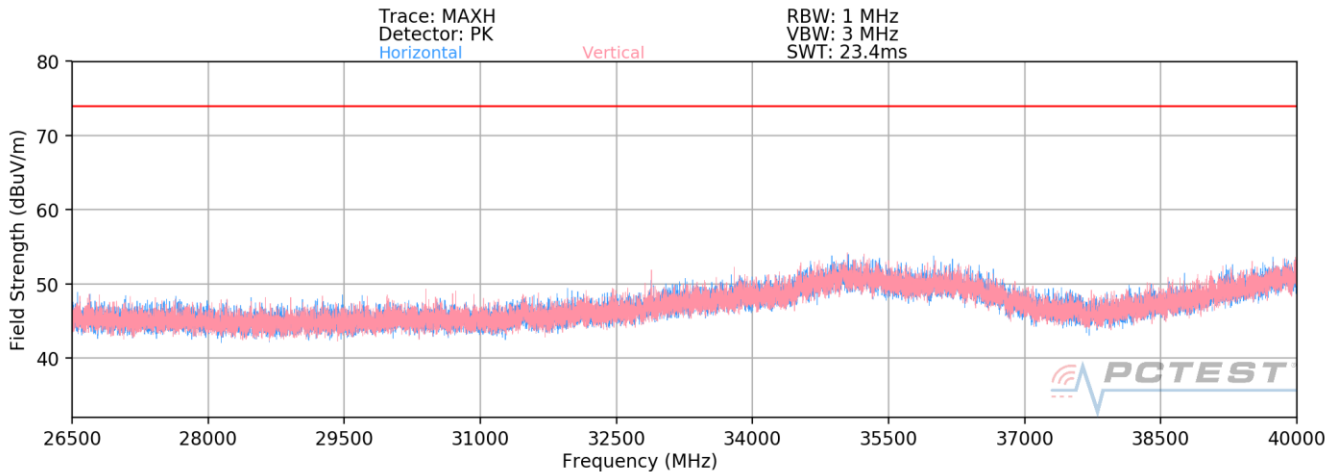

Plot 7-84. Radiated Spurious Plot 26.5GHz - 40GHz (802.11a)

FCC ID: A3LSMA426U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 66 of 89

Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.01	12.42	0.00	50.41	68.20	-17.79
* 15540.00	Average	H	-	-	-81.87	13.70	0.00	38.83	53.98	-15.15
* 15540.00	Peak	H	-	-	-70.01	13.70	0.00	50.69	73.98	-23.29
* 20720.00	Average	H	-	-	-67.44	4.05	-9.54	34.07	53.98	-19.91
* 20720.00	Peak	H	-	-	-57.72	4.05	-9.54	43.79	73.98	-30.19
25900.00	Peak	H	-	-	-54.99	5.99	-9.54	48.46	68.20	-19.74

Table 7-10. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	H	-	-	-68.28	11.82	0.00	50.54	68.20	-17.66
* 15600.00	Average	H	-	-	-81.62	14.25	0.00	39.63	53.98	-14.35
* 15600.00	Peak	H	-	-	-69.85	14.25	0.00	51.40	73.98	-22.58
* 20800.00	Average	H	-	-	-66.37	4.55	-9.54	35.64	53.98	-18.34
* 20800.00	Peak	H	-	-	-55.87	4.55	-9.54	46.14	73.98	-27.84
26000.00	Peak	H	-	-	-56.52	6.09	-9.54	47.03	68.20	-21.17

Table 7-11. Radiated Measurements

FCC ID: A3LSMA426U	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 67 of 89	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10480.00	Peak	H	-	-	-70.01	12.48	0.00	49.47	68.20	-18.73
* 15720.00	Average	H	-	-	-81.74	13.93	0.00	39.19	53.98	-14.79
* 15720.00	Peak	H	-	-	-70.33	13.93	0.00	50.60	73.98	-23.38
* 20960.00	Average	H	-	-	-67.13	4.88	-9.54	35.21	53.98	-18.77
* 20960.00	Peak	H	-	-	-57.26	4.88	-9.54	45.07	73.98	-28.91
26200.00	Peak	H	-	-	-55.50	6.04	-9.54	48.01	68.20	-20.19

Table 7-12. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10520.00	Peak	H	-	-	-68.94	12.44	0.00	50.50	68.20	-17.70
* 15780.00	Average	H	-	-	-81.53	13.73	0.00	39.20	53.98	-14.78
* 15780.00	Peak	H	-	-	-69.56	13.73	0.00	51.17	73.98	-22.81
* 21040.00	Average	H	-	-	-66.44	4.69	-9.54	35.72	53.98	-18.26
* 21040.00	Peak	H	-	-	-56.00	4.69	-9.54	46.15	73.98	-27.83
26300.00	Peak	H	-	-	-55.44	6.04	-9.54	48.06	68.20	-20.14

Table 7-13. Radiated Measurements

FCC ID: A3LSMA426U	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 68 of 89	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.46	12.18	0.00	49.72	68.20	-18.48
* 15840.00	Average	H	-	-	-82.22	13.87	0.00	38.65	53.98	-15.33
* 15840.00	Peak	H	-	-	-70.69	13.87	0.00	50.18	73.98	-23.80
* 21120.00	Average	H	-	-	-67.04	4.93	-9.54	35.36	53.98	-18.62
* 21120.00	Peak	H	-	-	-56.53	4.93	-9.54	45.87	73.98	-28.11
26400.00	Peak	H	-	-	-55.54	6.20	-9.54	48.12	68.20	-20.08

Table 7-14. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-81.09	12.46	0.00	38.37	53.98	-15.61
* 10640.00	Peak	H	-	-	-69.25	12.46	0.00	50.21	73.98	-23.77
* 15960.00	Average	H	-	-	-82.29	14.61	0.00	39.32	53.98	-14.66
* 15960.00	Peak	H	-	-	-70.00	14.61	0.00	51.61	73.98	-22.37
* 21280.00	Average	H	-	-	-66.67	4.87	-9.54	35.65	53.98	-18.33
* 21280.00	Peak	H	-	-	-56.49	4.87	-9.54	45.84	73.98	-28.14
26600.00	Peak	H	-	-	-54.96	6.10	-9.54	48.59	68.20	-19.61

Table 7-15. Radiated Measurements

FCC ID: A3LSMA426U	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 69 of 89	

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-81.01	12.76	0.00	38.75	53.98	-15.23
* 11000.00	Peak	H	-	-	-68.66	12.76	0.00	51.10	73.98	-22.88
16500.00	Peak	H	-	-	-70.19	15.39	0.00	52.20	68.20	-16.00
22000.00	Peak	H	-	-	-56.40	4.88	-9.54	45.94	68.20	-22.26
27500.00	Peak	H	-	-	-55.48	5.99	-9.54	47.97	68.20	-20.23

Table 7-16. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5600MHz
Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	H	-	-	-80.84	12.89	0.00	39.05	53.98	-14.93
* 11200.00	Peak	H	-	-	-69.01	12.89	0.00	50.88	73.98	-23.10
16800.00	Peak	H	-	-	-70.33	15.67	0.00	52.34	68.20	-15.86
* 22400.00	Average	H	-	-	-66.81	5.22	-9.54	35.87	53.98	-18.11
* 22400.00	Peak	H	-	-	-56.40	5.22	-9.54	46.28	73.98	-27.70
28000.00	Peak	H	-	-	-56.15	6.05	-9.54	47.36	68.20	-20.84

Table 7-17. Radiated Measurements

FCC ID: A3LSMA426U	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 70 of 89	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	H	-	-	-81.07	13.08	0.00	39.01	53.98	-14.97
* 11440.00	Peak	H	-	-	-68.87	13.08	0.00	51.21	73.98	-22.77
17160.00	Peak	H	-	-	-69.28	18.15	0.00	55.87	68.20	-12.33
* 22880.00	Average	H	-	-	-65.86	5.21	-9.54	36.81	53.98	-17.17
* 22880.00	Peak	H	-	-	-55.60	5.21	-9.54	47.07	73.98	-26.91
28600.00	Peak	H	-	-	-57.06	6.27	-9.54	46.67	68.20	-21.53

Table 7-18. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-81.29	13.64	0.00	39.35	53.98	-14.63
* 11490.00	Peak	H	-	-	-69.56	13.64	0.00	51.08	73.98	-22.90
17235.00	Peak	H	-	-	-68.89	18.48	0.00	56.59	68.20	-11.61
* 22980.00	Average	H	-	-	-66.11	-4.43	-9.54	26.92	53.98	-27.06
* 22980.00	Peak	H	-	-	-55.79	-4.43	-9.54	37.23	73.98	-36.74
28725.00	Peak	H	-	-	-56.50	-3.47	-9.54	37.48	68.20	-30.72

Table 7-19. Radiated Measurements

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 71 of 89	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-80.94	12.97	0.00	39.03	53.98	-14.95
* 11570.00	Peak	H	-	-	-68.62	12.97	0.00	51.35	73.98	-22.63
17355.00	Peak	H	-	-	-70.09	20.11	0.00	57.02	68.20	-11.18
23140.00	Peak	H	-	-	-55.33	-4.47	-9.54	37.66	68.20	-30.54
28925.00	Peak	H	-	-	-56.42	-3.49	-9.54	37.55	68.20	-30.65

Table 7-20. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-81.40	14.01	0.00	39.61	53.98	-14.37
* 11650.00	Peak	H	-	-	-69.63	14.01	0.00	51.38	73.98	-22.60
17475.00	Peak	H	-	-	-69.12	18.95	0.00	56.83	68.20	-11.37
23300.00	Peak	H	-	-	-56.17	-4.47	-9.54	36.82	68.20	-31.38
29125.00	Peak	H	-	-	-55.58	-3.71	-9.54	38.17	68.20	-30.03


Table 7-21. Radiated Measurements

FCC ID: A3LSMA426U	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 72 of 89	


7.6.2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

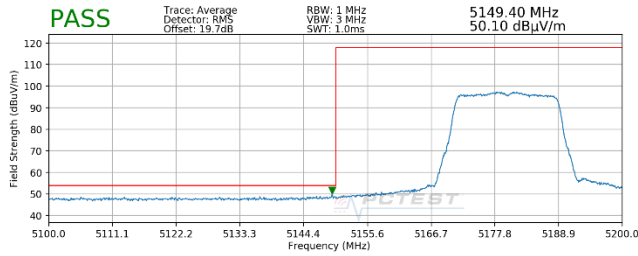


Plot 7-85. Radiated Lower Band Edge Plot (Average – UNII Band 1)

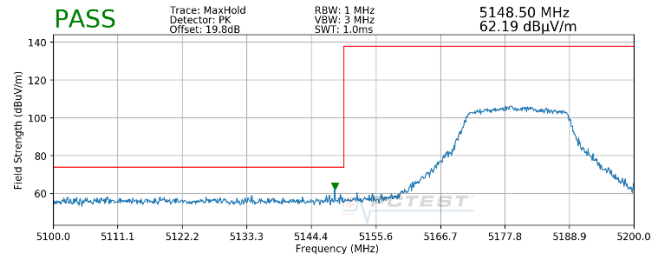


Plot 7-86. Radiated Lower Band Edge Plot (Peak – UNII Band 1)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

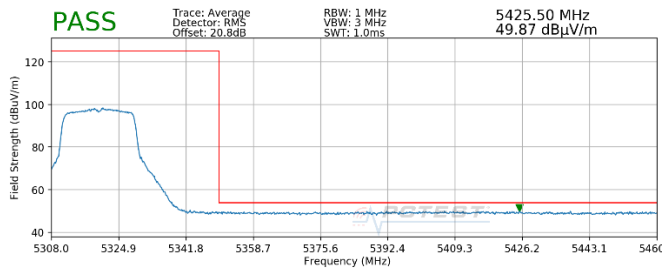


Plot 7-87. Radiated Upper Band Edge Plot (Average – UNII Band 2A)

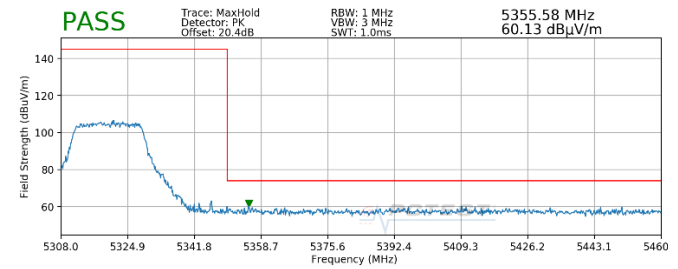


Plot 7-88. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 73 of 89

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

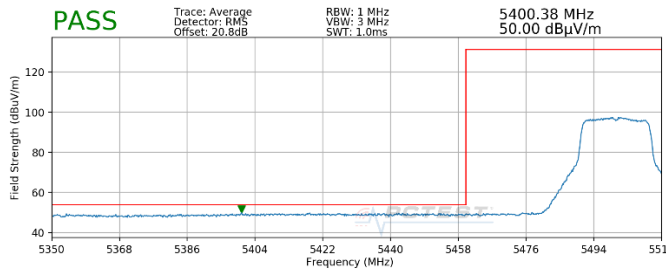


Plot 7-89. Radiated Lower Band Edge Plot (Average – UNII Band 2C)

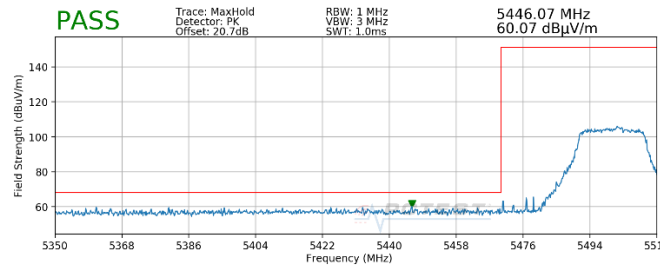

Plot 7-90. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

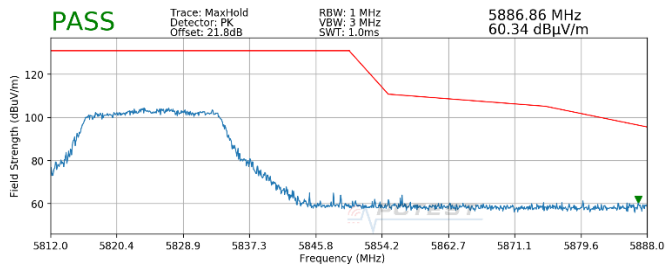


Plot 7-91. Radiated Upper Band Edge Plot (Peak – UNII Band 3)


FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 74 of 89

7.6.3 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

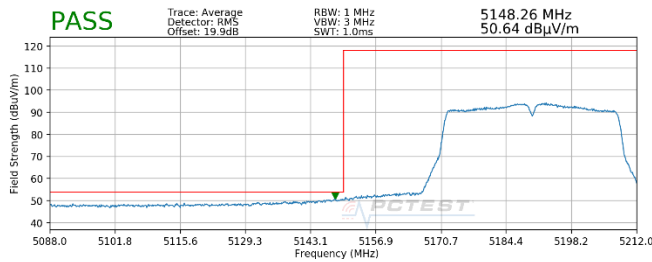


Plot 7-92. Radiated Lower Band Edge Plot (Average – UNII Band 1)

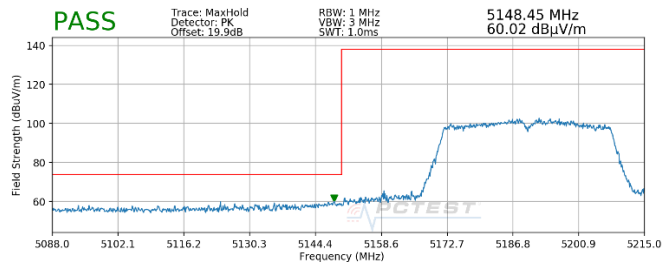


Plot 7-93. Radiated Lower Band Edge Plot (Peak – UNII Band 1)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

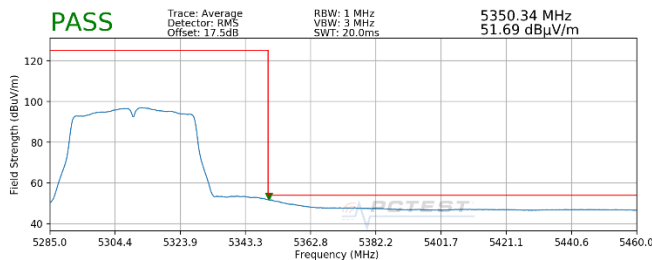


Plot 7-94. Radiated Upper Band Edge Plot (Average – UNII Band 2A)

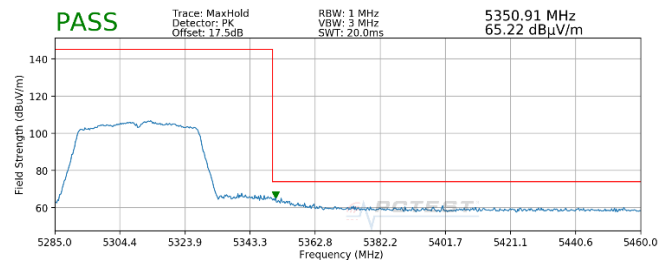


Plot 7-95. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 75 of 89

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

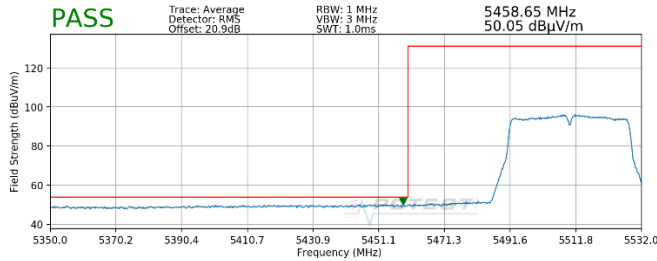


Plot 7-96. Radiated Lower Band Edge Plot (Average – UNII Band 2C)

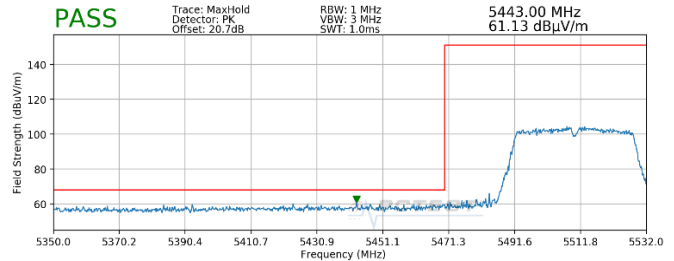

Plot 7-97. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

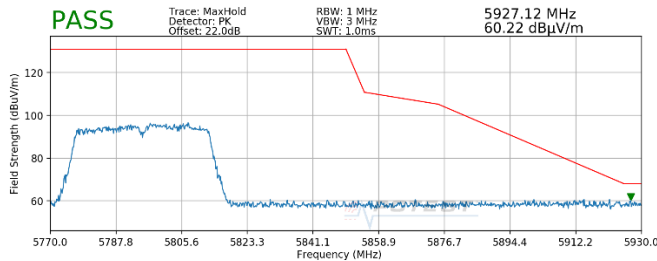


Plot 7-98. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 76 of 89


7.6.4 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

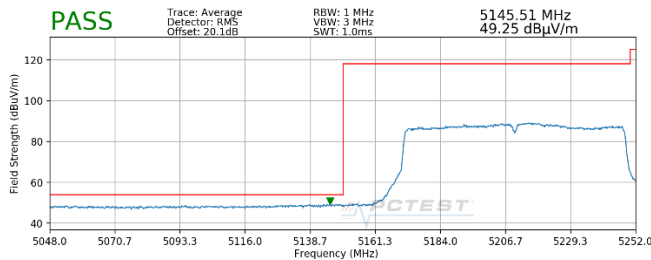


Plot 7-99. Radiated Lower Band Edge Plot (Average – UNII Band 1)

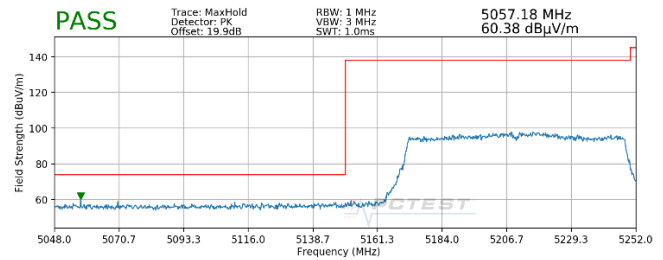


Plot 7-100. Radiated Lower Band Edge Plot (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

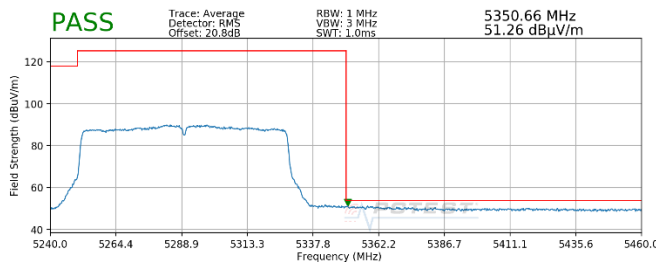


Plot 7-101. Radiated Upper Band Edge Plot (Average – UNII Band 2A)

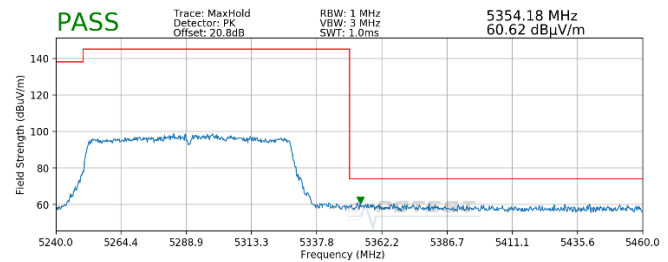


Plot 7-102. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 77 of 89

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

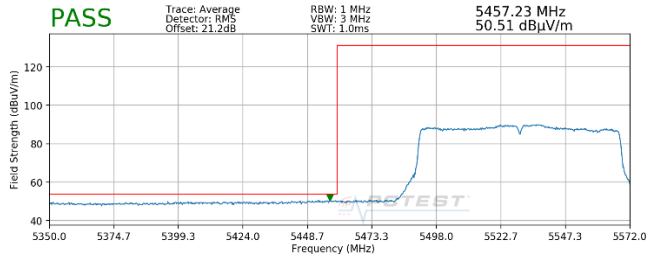


Plot 7-103. Radiated Lower Band Edge Plot (Average – UNII Band 2C)

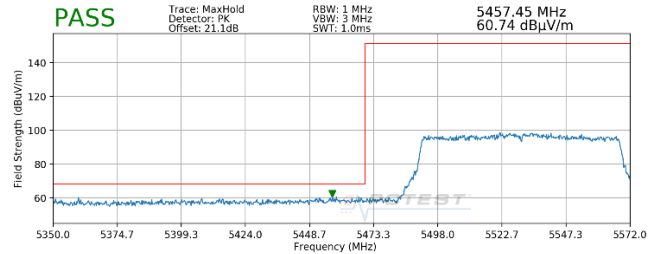

Plot 7-104. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

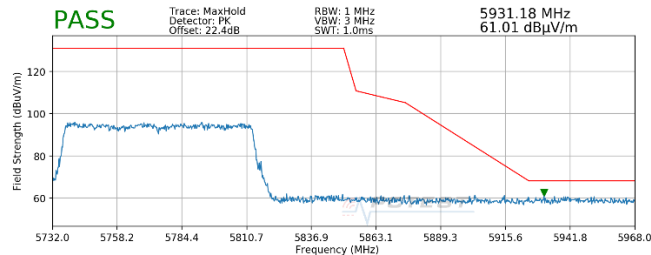

Plot 7-105. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 78 of 89

7.7 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-22 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-22. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 79 of 89	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

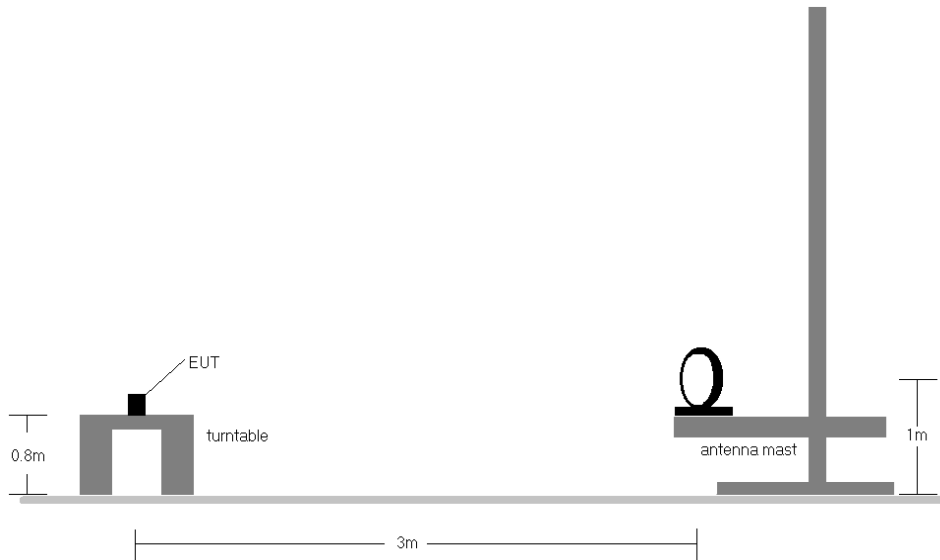


Figure 7-6. Radiated Test Setup < 30MHz

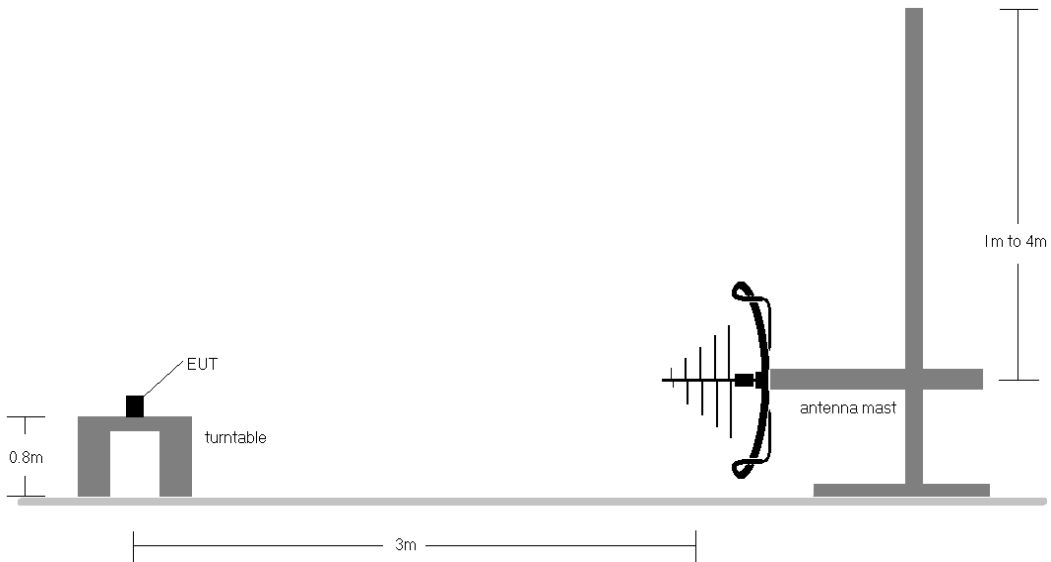


Figure 7-7. Radiated Test Setup < 1GHz


<p>FCC ID: A3LSMA426U</p>		<p>MEASUREMENT REPORT (CERTIFICATION)</p>	 <p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2101040001-08-R1.A3L</p>	<p>Test Dates: 01/08 – 02/19/2021</p>	<p>EUT Type: Portable Handset</p>	<p>Page 80 of 89</p>

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-22.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMA426U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 81 of 89

Radiated Spurious Emissions Measurements (Below 1GHz)
§15.209; RSS-Gen [8.9]

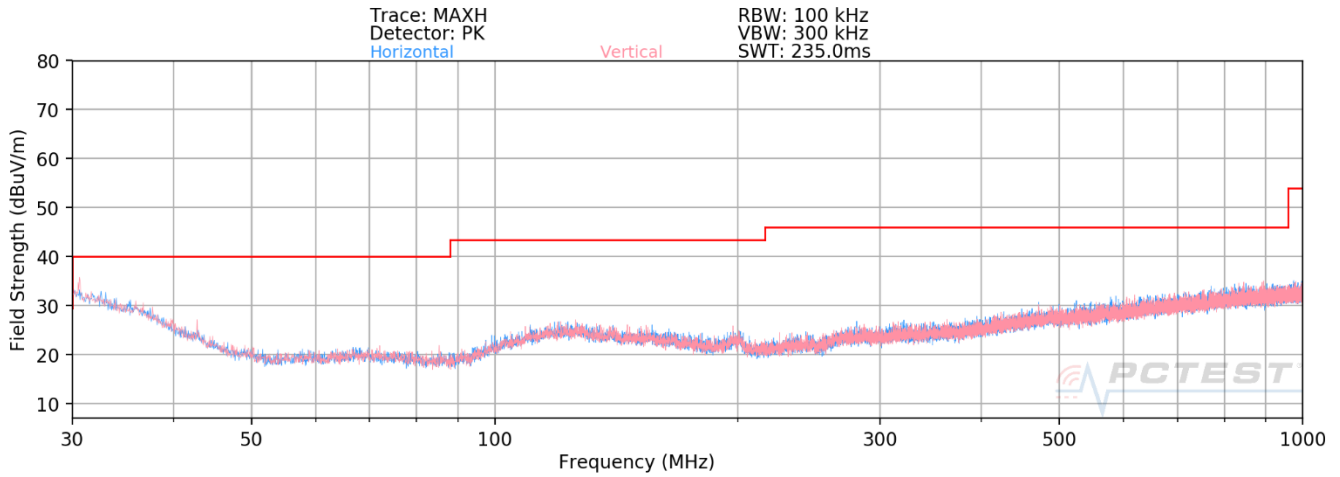

Plot 7-106. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 82 of 89	

7.8 Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-23. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 83 of 89

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


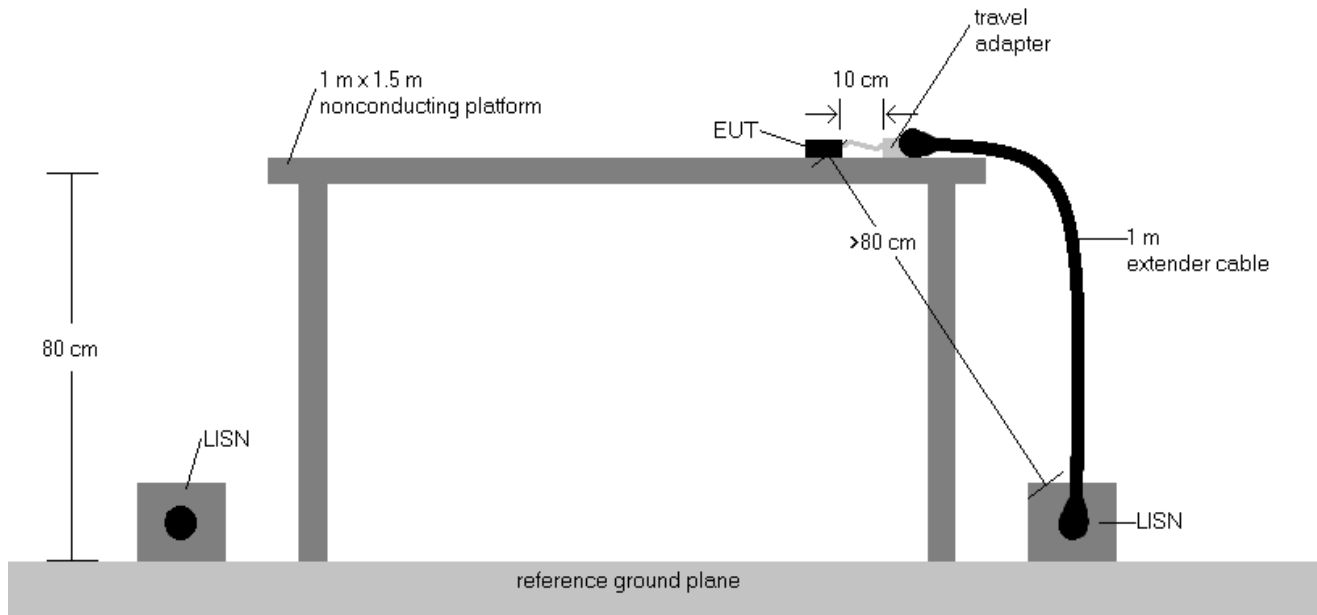


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $Corr. (dB) = Cable\ loss (dB) + LISN\ insertion\ factor (dB)$
4. $QP/AV\ Level (dB\mu V) = QP/AV\ Analyzer/Receiver\ Level (dB\mu V) + Corr. (dB)$
5. $Margin (dB) = QP/AV\ Limit (dB\mu V) - QP/AV\ Level (dB\mu V)$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 84 of 89

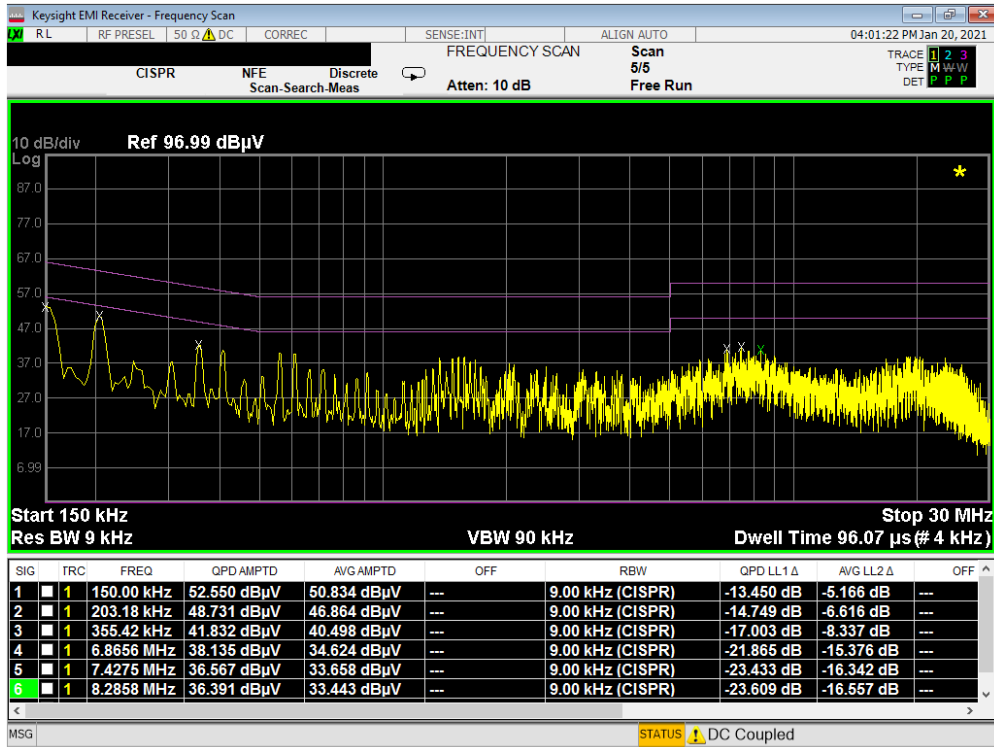


Plot 7-107. Line Conducted Plot with 802.11a UNII Band 1 (L1)

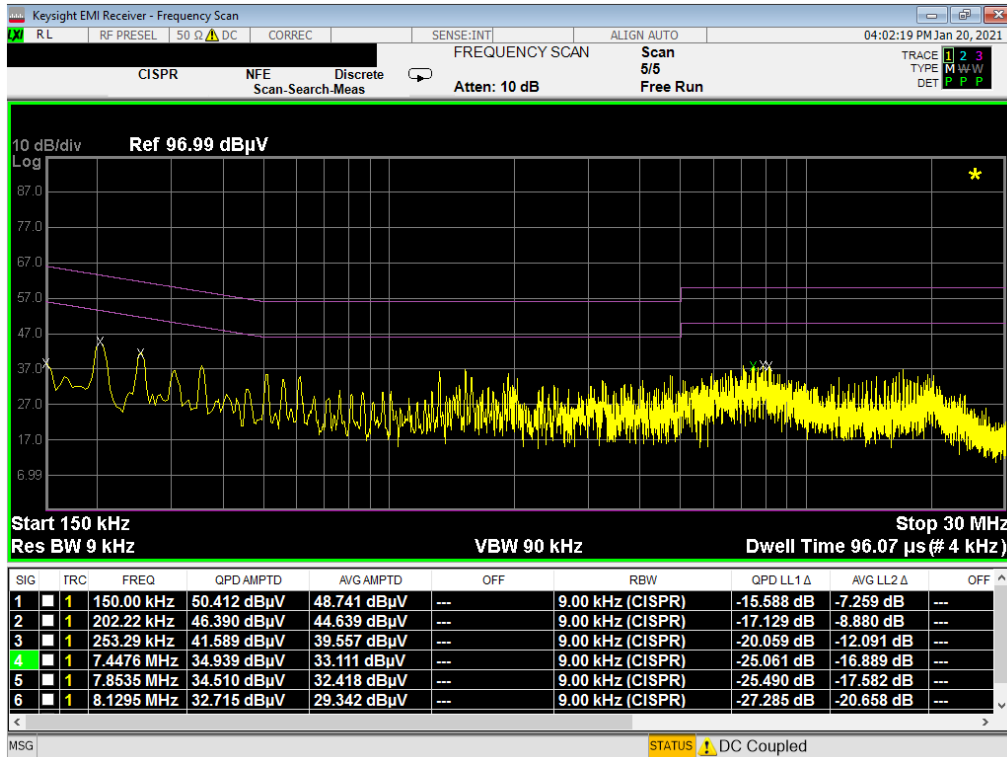


Plot 7-108. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 85 of 89

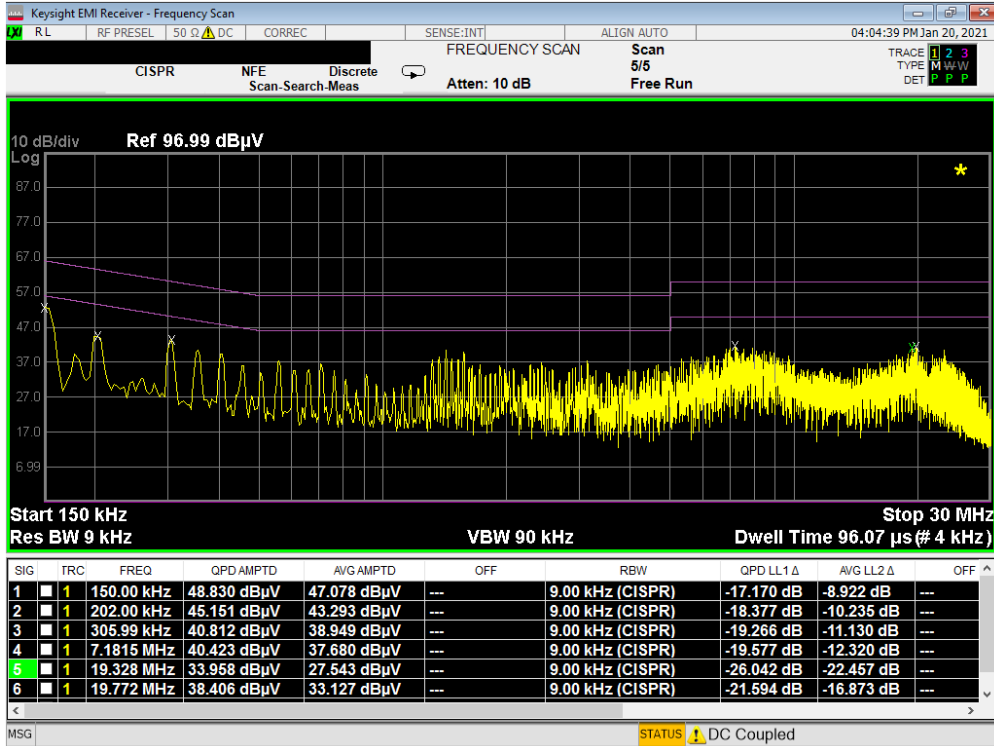


Plot 7-109. Line Conducted Plot with 802.11a UNII Band 2A (L1)

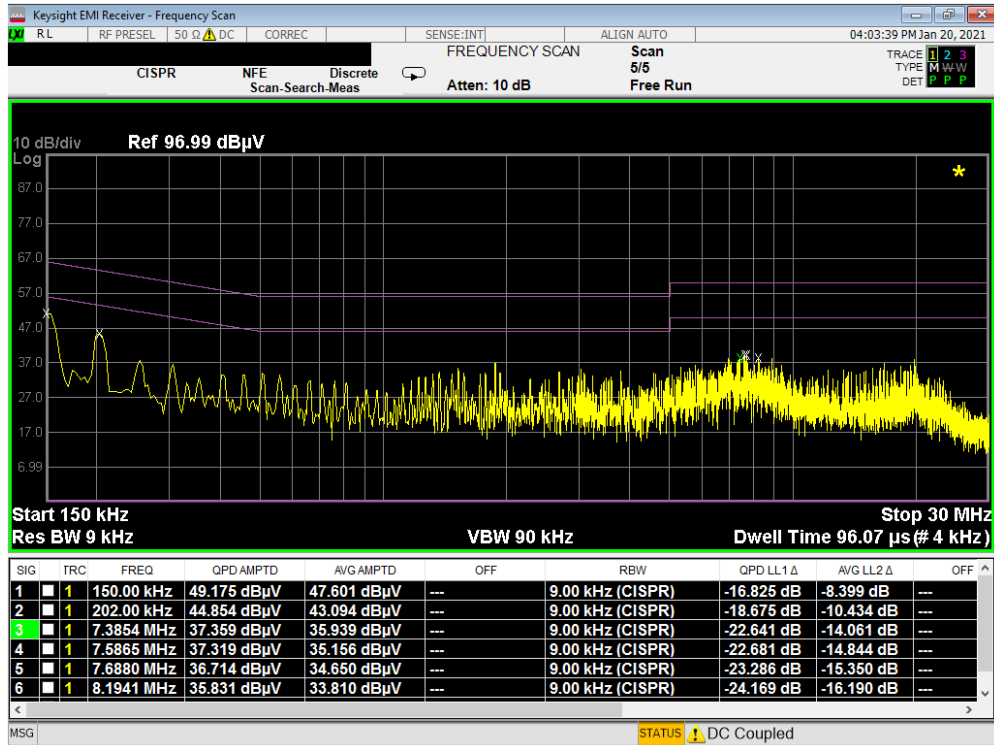


Plot 7-110. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 86 of 89

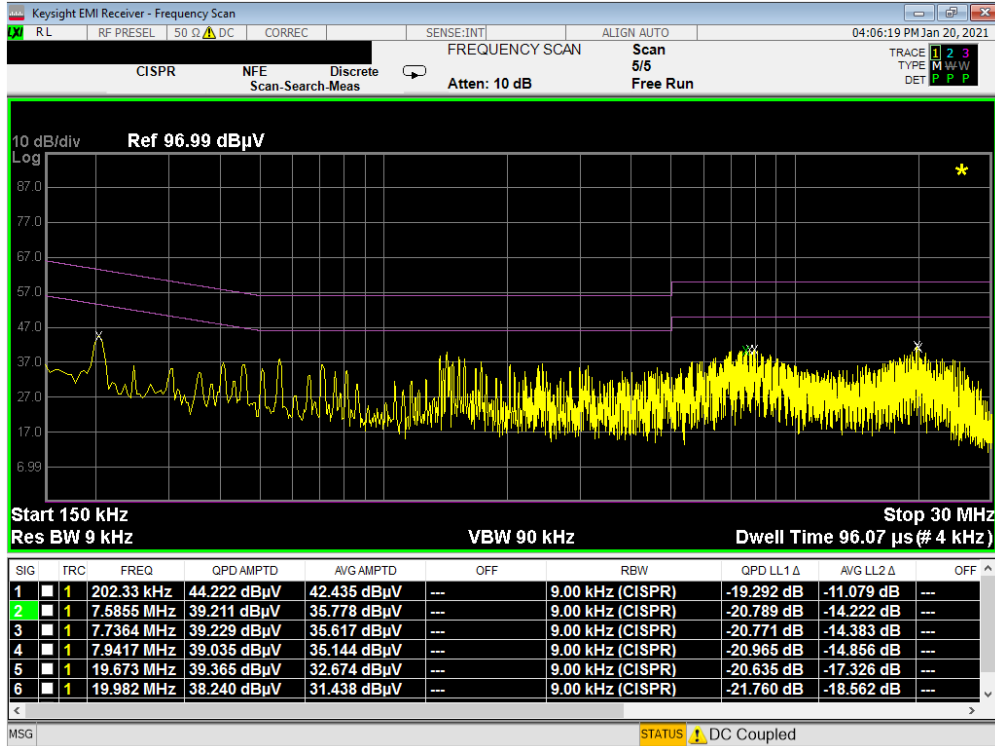


Plot 7-111. Line Conducted Plot with 802.11a UNII Band 2C (L1)

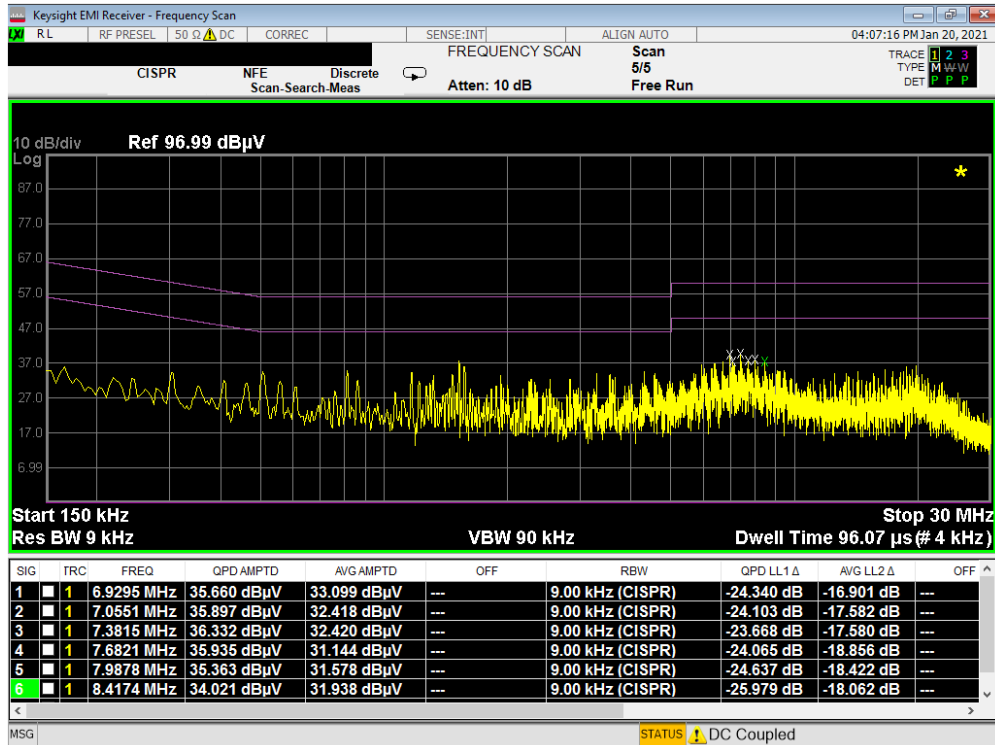


Plot 7-112. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 87 of 89

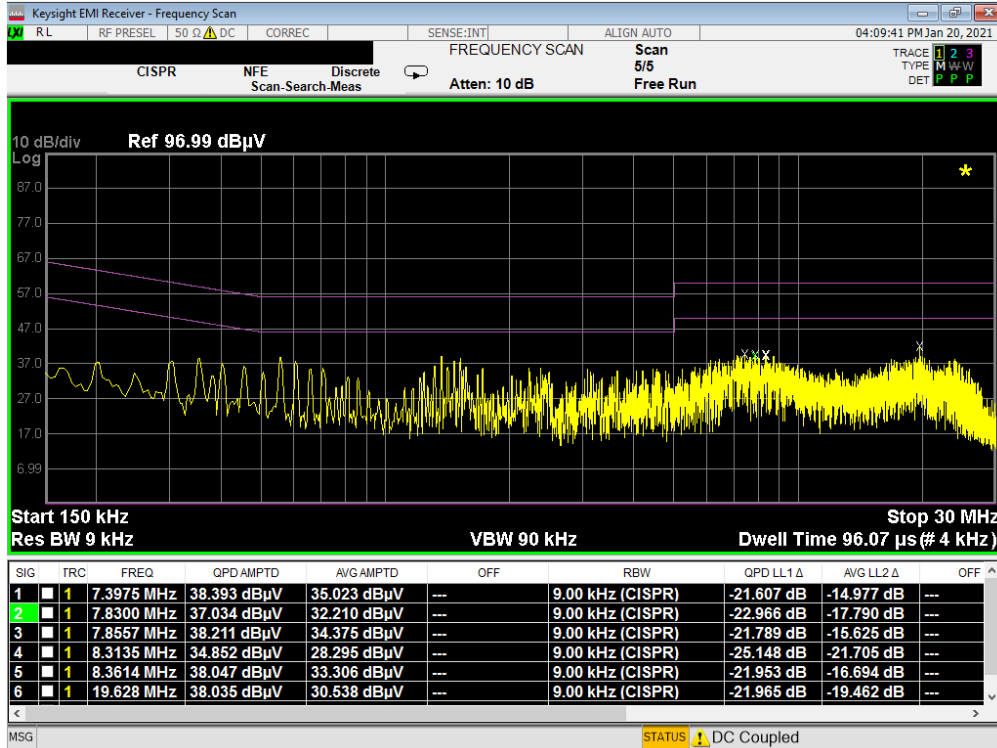

Plot 7-113. Line Conducted Plot with 802.11a UNII Band 3 (L1)

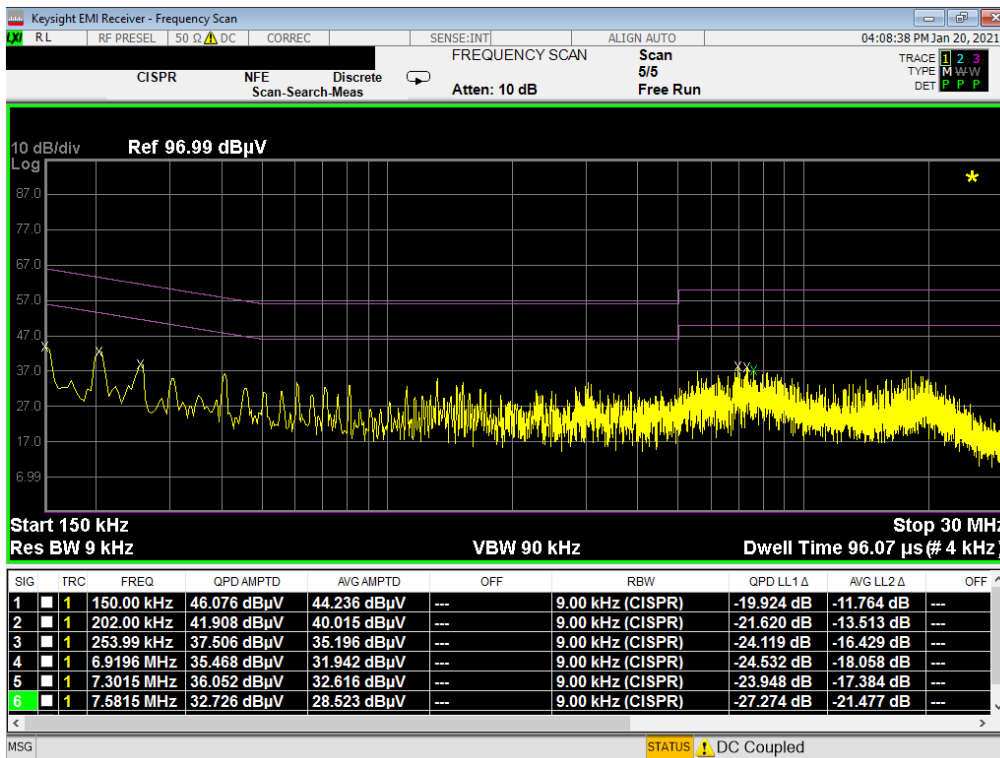

Plot 7-114. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset		Page 88 of 89

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMA426U** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: A3LSMA426U	 <small>Proud to be part of  element</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-08-R1.A3L	Test Dates: 01/08 – 02/19/2021	EUT Type: Portable Handset	Page 89 of 89	