

# EMC TEST REPORT

<b>Project No.</b>	LBE20190212	<b>Issue No.</b>	0
<b>Applicant</b>	<b>Name of organization</b>	Samsung Electronics Co., Ltd.	
	<b>Address</b>	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea	
	<b>Date of application</b>	January 21, 2019	
<b>EUT</b>	<b>Type of device</b>	<input checked="" type="checkbox"/> All other Receivers subject to part15 <input checked="" type="checkbox"/> Class B Personal Computers and peripherals <input checked="" type="checkbox"/> Other Class B digital devices and peripherals <input checked="" type="checkbox"/> FM Broadcast Receiver	
	<b>Equipment authorization</b>	<input checked="" type="checkbox"/> Certification <input type="checkbox"/> Supplier's Declaration of Conformity	
	<b>FCC ID</b>	A3LSMA505GT	
	<b>Kind of product</b>	Mobile Phone	
	<b>Model No.</b>	SM-A505GT/DS	
	<b>Variant Model No.</b>	Refer to clause 4.6	
	<b>Manufacturer</b>	SAMSUNG ELECTRONICS Av. Thomas Nilsen Junior 150 predio A Pq Imperador Campinas Sao Paulo SP 13097-105	
<b>Applied Standards</b>	47 CFR Part 15, Subpart B, Class B / ANSI C63.4-2014		
<b>Test Period</b>	January 28, 2019 ~ January 30, 2019		
<b>Issue date</b>	January 31, 2019		
<b>Test result : Complied</b>			
The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)			
<b>Tested by</b> : Soo-Joon Kim		<b>Reviewed by</b> : Young-Hun Kim	
<i>S. J. Kim</i>		<i>Y. H. Kim</i>	
The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from Global CS Center.			
Global CS Center of Samsung Electronics Co., Ltd. (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea			

# Table of contents

## 1. Report Information

1.1 Revision history .....	3
----------------------------	---

## 2. Summary of test results

2.1 Emission .....	3
--------------------	---

## 3. General Information

3.1 Test facility .....	3
-------------------------	---

## 4. Test Configuration

4.1 Test Peripherals .....	4
4.2 EUT operating mode .....	5
4.3 Details of Sampling .....	5
4.4 Used cable description .....	6
4.5 Test arrangement .....	7
4.6 EUT Description .....	10
4.7 EUT Frequencies .....	10
4.8 Test configuration and condition .....	11
4.9 Measurement uncertainty .....	11

## 5. Result of individual tests

5.1 Conducted disturbance .....	12
5.2 Radiated disturbance .....	18

## 1. Report Information

### 1.1 Revision history

No.	Revised detailed information
Issue 0	There are no revisions and this version is basic test report.

### 1.2 RSE test report no.

No.	Remark
4788805359-E1	The cellular receiver mode refers to the radiated spurious emissions test report.

## 2. Summary of test results

### 2.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
<input checked="" type="checkbox"/>	Conducted Disturbance (Mains port)	47 CFR Part 15 Subpart B / ANSI C63.4-2014 (Class B)	Complied
<input checked="" type="checkbox"/>	Radiated Disturbance		Complied

## 3. General Information

### 3.1 Test facility

The Global CS Center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea. All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 32, CISPR 16-1-4 and Shielded rooms. And all antennas are properly calibrated using ANSI C63.5:2017.

The Global CS Center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

## 4. Test Setup configuration

### 4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID
A	Mobile Phone	SM-A505GT/DS	-	SAMSUNG	A3LSMA505GT
B	Battery	EB-BA505ABU	-	SAMSUNG	-
C	Headset	EHS61ASFWE	-	SAMSUNG	-
D	Data Cable	EP-DR140AWE	-	SAMSUNG	-
E	Micro SD Card	64GB	-	SAMSUNG	-
F	Travel Adapter	EP-TA200	R37KB5A0711SE3	SAMSUNG	-
G	Notebook PC	Latitude5580	1WYRYM2	Dell	-
			D3HRYM2	Dell	-
H	AC Adapter	LA65NM130	5B3C	Dell	-
			5DEA	Dell	-
I	Router	DIR-806A	RF0F1D5000688	D-Link	-
		RT-AX88U	J9IAHP000940	ASUS	-
J	OTG Gender	EE-UG970	-	SAMSUNG	-
K	Mouse	AA-SM7PCP	CNBA5903634ADV8J 31O3050	SAMSUNG	-
		SC-1000	1034000281	SAMSUNG	-
L	AC Adapter for ASUS Router	ADP-45BW	18154	ASUS	

## 4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

### 4.2.1 Conducted Emission

No.	Operating mode
1	Camera (rear) + Charging (w/ TA) + Cellular receiver (GSM850 Center Frequency) + FM (Low Ch.)
2	Camera (front) + Charging (w/ TA) + FM (Mid Ch.)
3	Charging (w/ TA) + FM (High Ch.)
4	Video + Audio playback from internal memory data + Charging (w/ TA)
5	USB Data Communication with PC (from external memory data)

### 4.2.2 Radiated Emission

No.	Operating mode
1	Camera (rear) + Charging (w/ TA) + FM (Low Ch.)
2	Camera (front) + FM (Mid Ch.)
3	FM (High Ch.)
4	Video + Audio playback from internal memory data
5	USB Data Communication with PC (from external memory data)

## 4.3 Details of Sampling

Customer selected, single unit.


#### 4.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:


No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable	0.8	Yes	From EUT to Lap-Top Computer
2	Headset	1.6	No	For EUT
3	Power	1.8	No	For Notebook PC to AC Adapter
4	Power	1.5	No	For AC Adapter
5	LAN	1.5	No	From Notebook PC to Router
6	USB	0.8	No	From Notebook PC to Router for DC Power
7	USB	1.8	No	From OTG Gender to Mouse
8	Power	2.2	No	For ASUS Router

## 4.5 Test arrangement

### 4.5.1 Conducted Emission

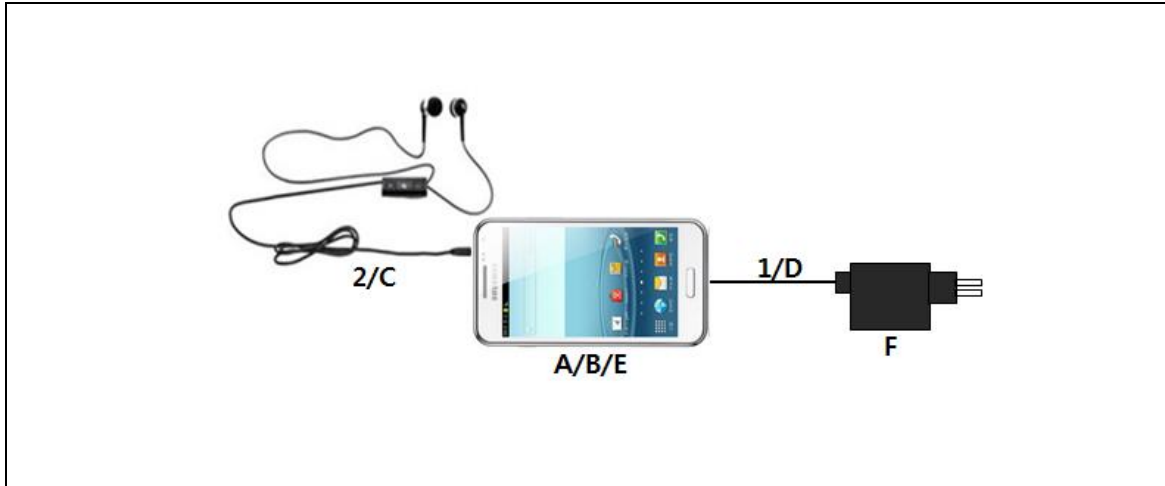


[ Mode 1 - 4 ]

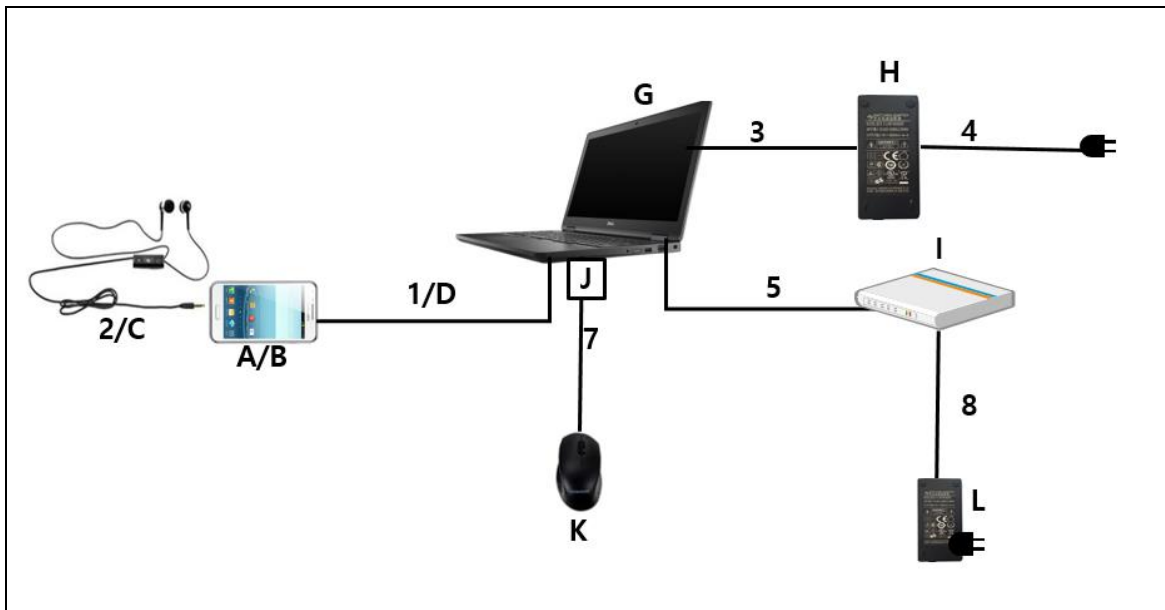


[ Mode 5 ]


### 4.5.2 Radiated Emission

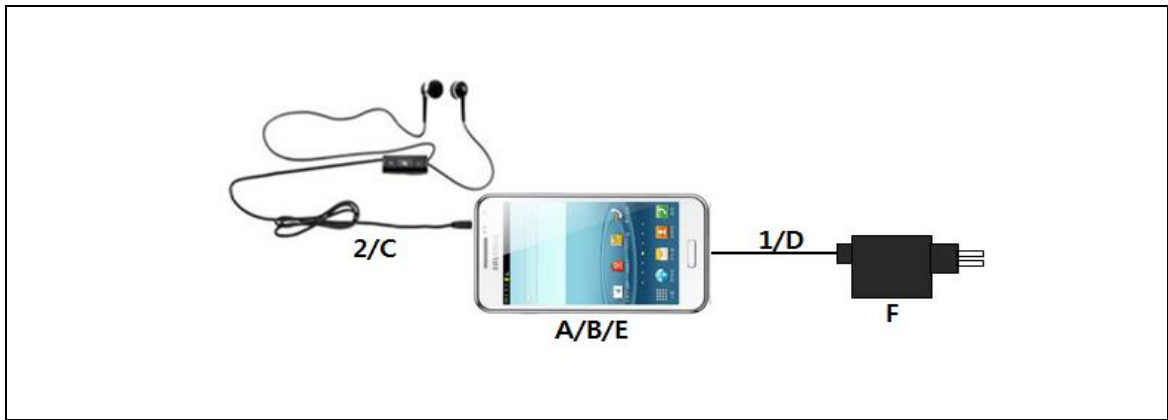

[ Mode 1 ]

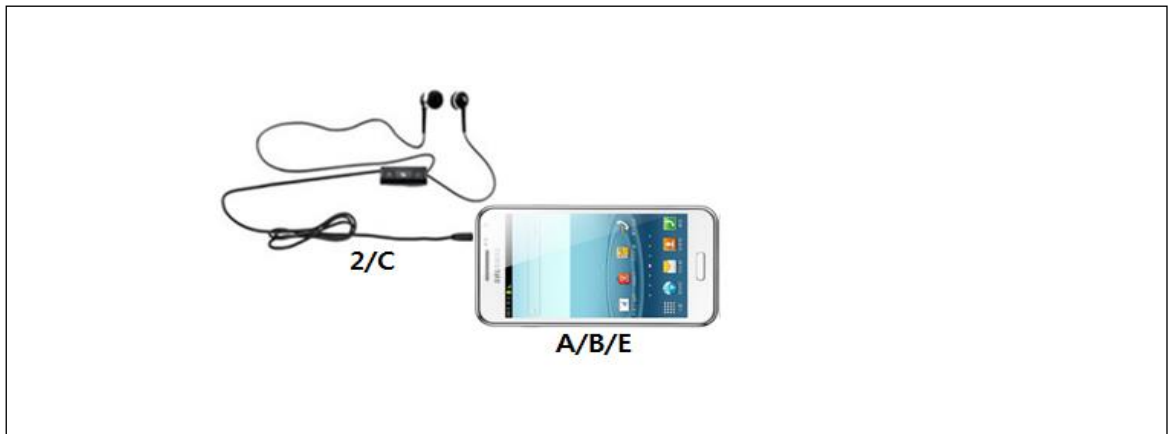

[ Mode 2 - 4 ]

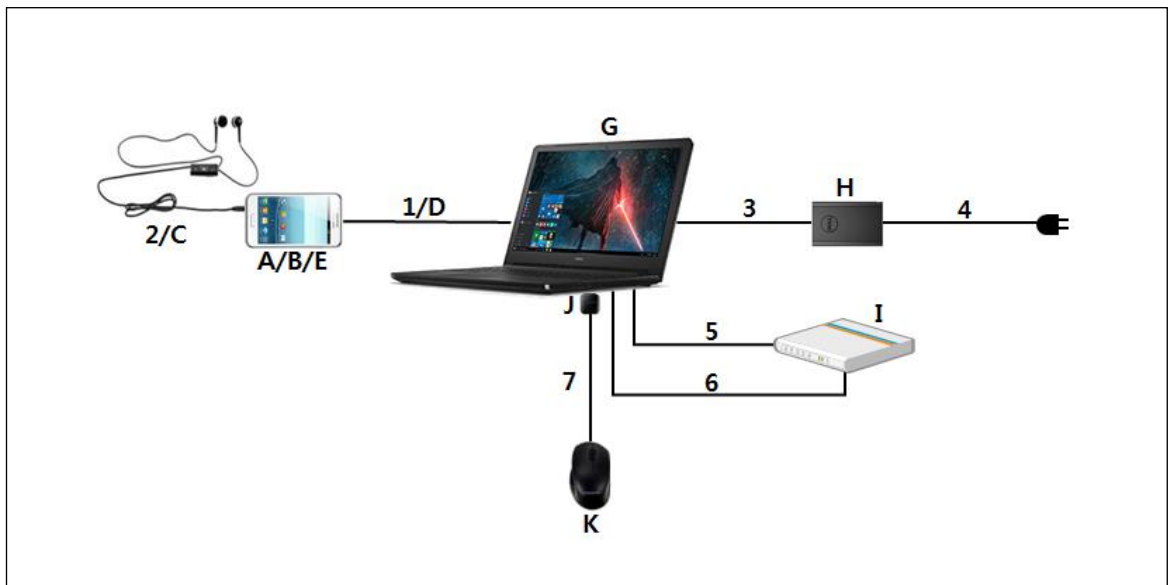

[ Mode 5 ]

## 4.6 EUT Description

The EUT is a bar type mobile phone which can operate on GSM850/900/1800/1900, WCDMA FDD1/2/4/5/8, LTE FDD1/2/3/4/5/7/8/12/13/17/20/26/28/66, LTE TDD38/40/41 bands and incorporates a Camera, Bluetooth, ANT+, DTV, Wi-Fi, FM Radio, GPS and MP3/MP4 player.

### 4.6.1 The variant models

- None

## 4.7 EUT Frequencies

The highest frequencies (Generated and used)	Frequency [ MHz ]
Wi-Fi	5 825

## 4.8 Test configuration and condition

The system was configured for testing in a typical fashion that a customer would normally use. Cables were attached to each of the available I/O Ports. Where applicable, peripherals were attached to the I/O cables. All the external I/O ports are exercised, as well as internal and the external SD card, by writing and reading arbitrary data or charging with TA.

The EUT was investigated in three orientations and the worst case orientation is reported.

RX mode(850MHz) radiated testing was performed with the GSM850 RX Test mode at center frequency. All licensed communication (850MHz) RX mode, GSM/WCDMA/LTE, test results are not significantly different.

The FM radio mode radiated testing was performed with the Low/Mid/High channel.

The video and music were repetitively played connected to the earphone.

The camera of the EUT was operated continuously.

Power source for the EUT operating was supplied by CVCF made by the Pacific Corp.

**- Test Voltage : AC 120 V, 60 Hz**

## 4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4-2 and UKAS M3003)

### 4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	3.52 dB
Radiated Disturbance (Below 1 GHz)	Horizontal	4.99 dB
	Vertical	4.90 dB
Radiated Disturbance (Above 1 GHz)	Horizontal	5.33 dB
	Vertical	5.32 dB

## 5. Results of individual test

### 5.1 Conducted disturbance

The EUT was connected to the Desk-Top Computer which was powered from one LISN for the measurements. The support equipment power cables were connected to a second LISN.

Both conducted lines are measured in Quasi-Peak and CISPR-Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

#### Limits for conducted disturbance at the mains ports of Class B ITE

Frequency range Limits [ MHz ]	Resolution Bandwidth [ kHz ]	Limits [ dB(μV) ]	
		Quasi-peak	Average
0,15 to 0,50	9	66 to 56	56 to 46
0,50 to 5	9	56	46
5 to 30	9	60	50

NOTE 1 The lower limit shall apply at the transition frequency.  
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-109	Universal Radio Communicator	CMU200	R&S	110431	2018-12-10	12
E5I-043	LISN	ENV216	R&S	101630	2018-08-17	12
E5I-123	EMI Test Receiver	ESU8	R&S	100475	2018-05-13	12
E5I-127	LISN	ENV216	R&S	102061	2018-07-23	12
-	Test software	EMC32	R&S	Ver 9.26.01	-	-

#### 5.1.2 Temperature and humidity condition

Test date	2019-01-30	Test engineer	Soo-Joon Kim
Climate condition	Ambient temperature	(22.6 ~ 22.9) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(37.8 ~ 39.9) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(101.4 ~ 101.6) kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR8)		

### 5.1.3 Test results

Operating Mode 1: AC Mains

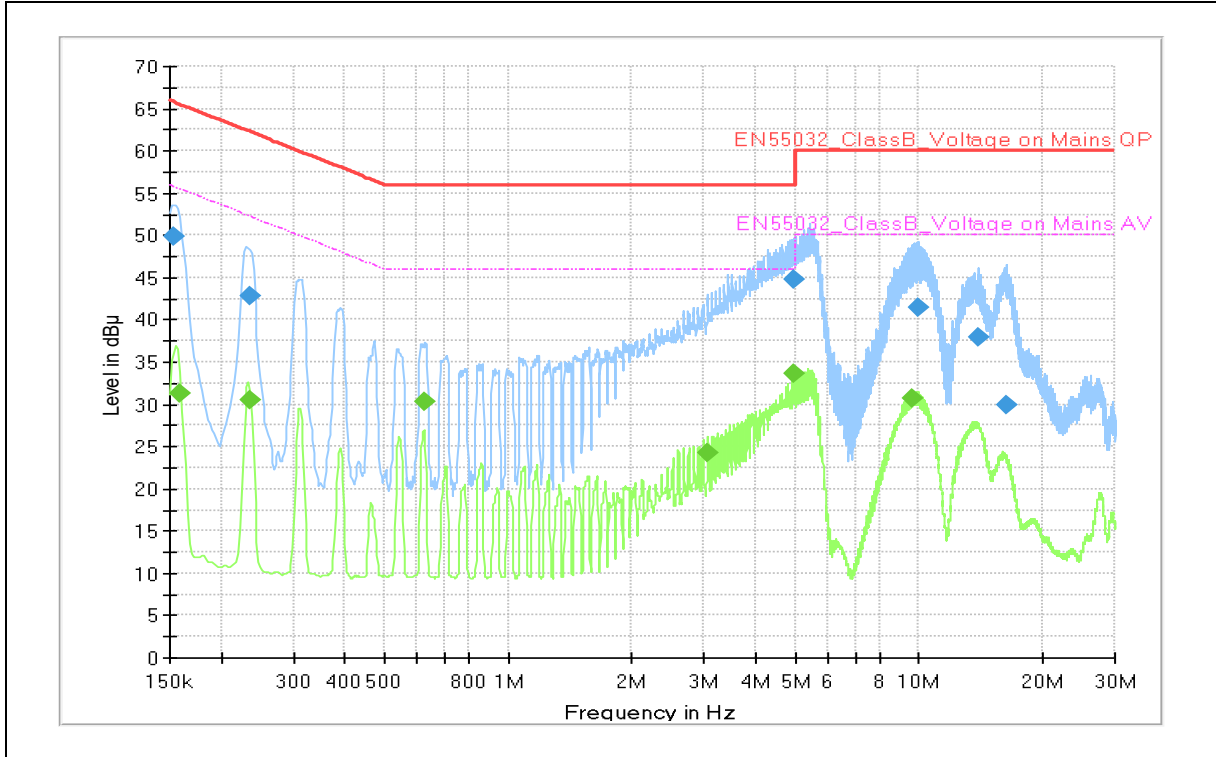


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBµV)	CAV (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154	49.9	---	65.8	15.9	N	9.9
0.158	---	31.2	55.6	24.4	N	9.9
0.234	42.8	---	62.3	19.5	N	9.8
0.236	---	30.4	52.2	21.8	N	9.8
0.626	---	30.4	46.0	15.6	N	10.1
3.069	---	24.2	46.0	21.8	N	9.9
4.954	---	33.7	46.0	12.3	N	9.9
4.970	44.7	---	56.0	11.3	N	9.9
9.609	---	30.7	50.0	19.3	N	10.2
10.011	41.5	---	60.0	18.5	L1	10.1
13.971	38.0	---	60.0	22.0	L1	10.3
16.394	30.0	---	60.0	30.0	N	10.5

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)  
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

**Operating Mode 2: AC Mains**

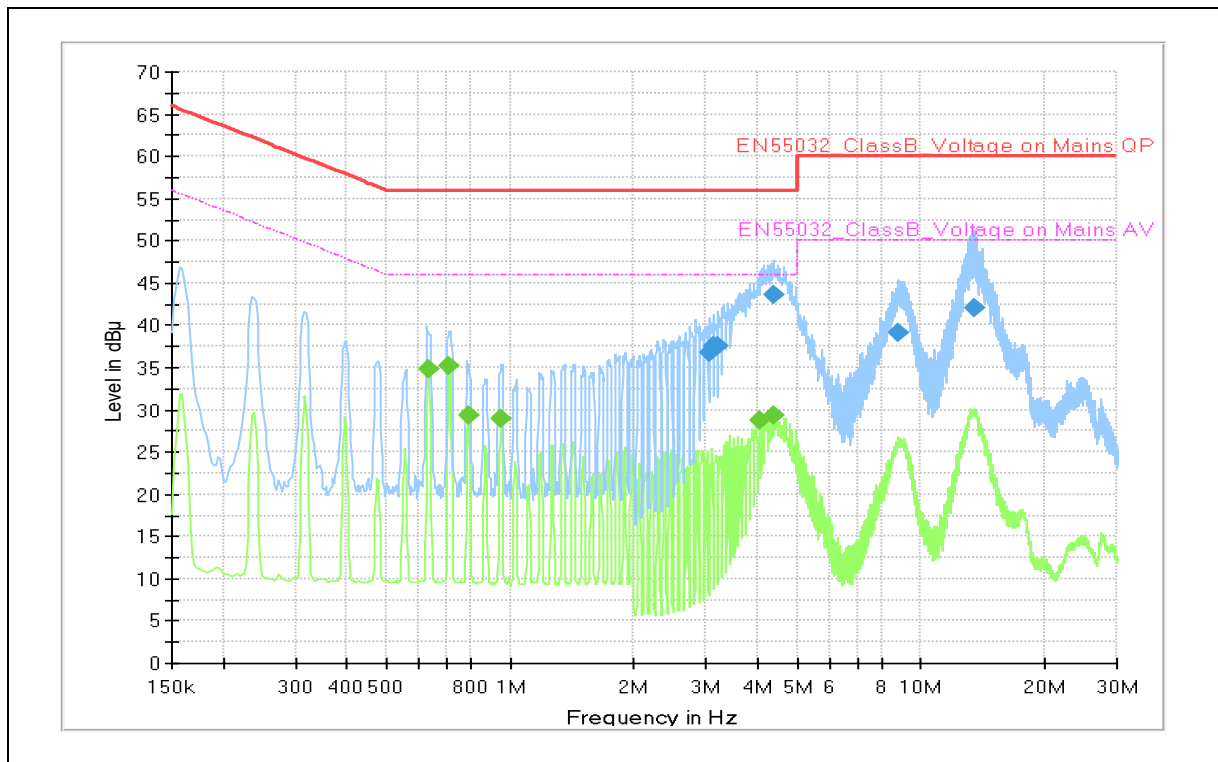


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBµV)	CAV (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.631	---	34.8	46.0	11.2	N	10.1
0.712	---	35.3	46.0	10.7	N	10.0
0.790	---	29.3	46.0	16.7	N	10.0
0.950	---	28.9	46.0	17.1	N	10.0
3.052	36.7	---	56.0	19.3	L1	10.0
3.135	37.6	---	56.0	18.4	N	9.9
3.211	37.6	---	56.0	18.4	N	9.9
4.051	---	28.8	46.0	17.2	N	9.9
4.371	---	29.2	46.0	16.8	N	9.9
4.392	43.5	---	56.0	12.5	L1	10.0
8.782	39.2	---	60.0	20.8	L1	10.1
13.552	42.0	---	60.0	18.0	L1	10.3

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)  
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

**Operating Mode 3: AC Mains**

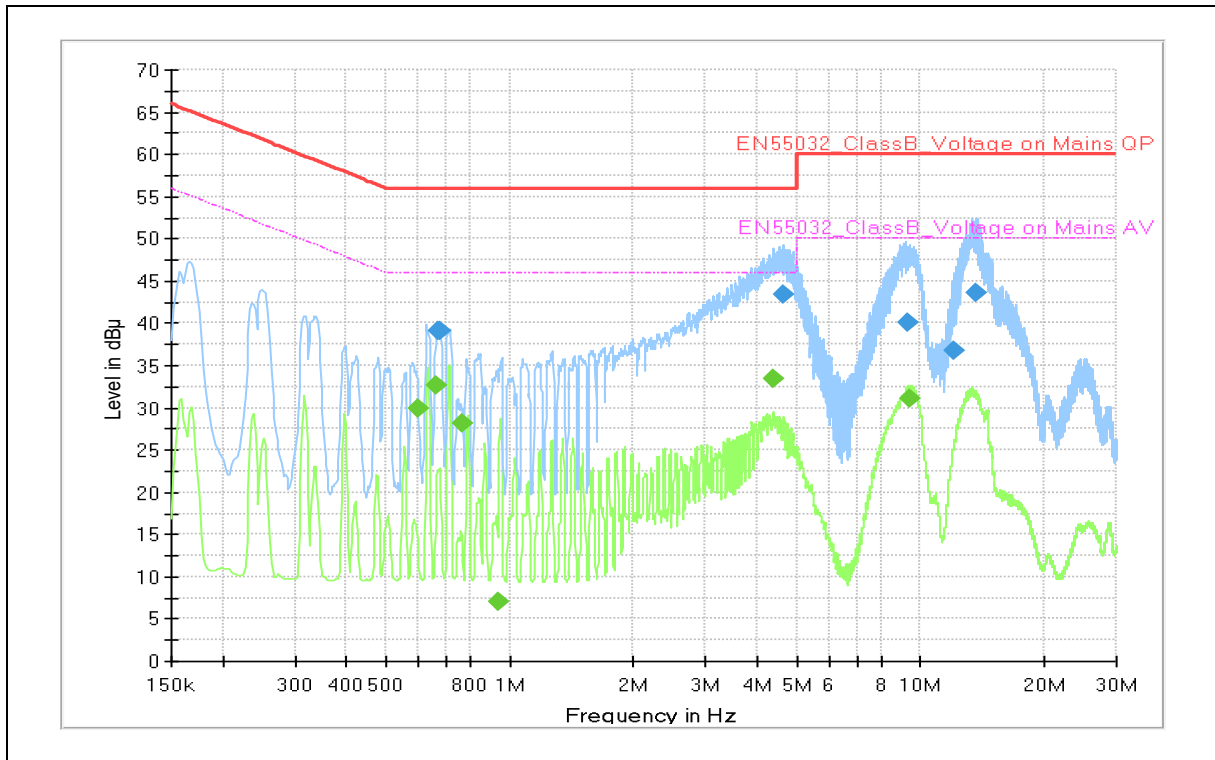


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dB $\mu$ V)	CAV (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Corr. (dB)
0.599	---	30.0	46.0	16.0	N	10.1
0.665	---	32.6	46.0	13.4	N	10.1
0.672	39.1	---	56.0	16.9	N	10.1
0.674	39.1	---	56.0	16.9	N	10.1
0.768	---	28.1	46.0	17.9	N	10.0
0.940	---	7.0	46.0	39.0	N	10.0
4.384	---	33.4	46.0	12.6	N	9.9
4.615	43.5	---	56.0	12.5	L1	10.0
9.267	40.0	---	60.0	20.0	N	10.2
9.427	---	31.2	50.0	18.8	N	10.2
12.091	36.7	---	60.0	23.3	N	10.3
13.712	43.6	---	60.0	16.4	L1	10.3

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)  
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

**Operating Mode 4: AC Mains**

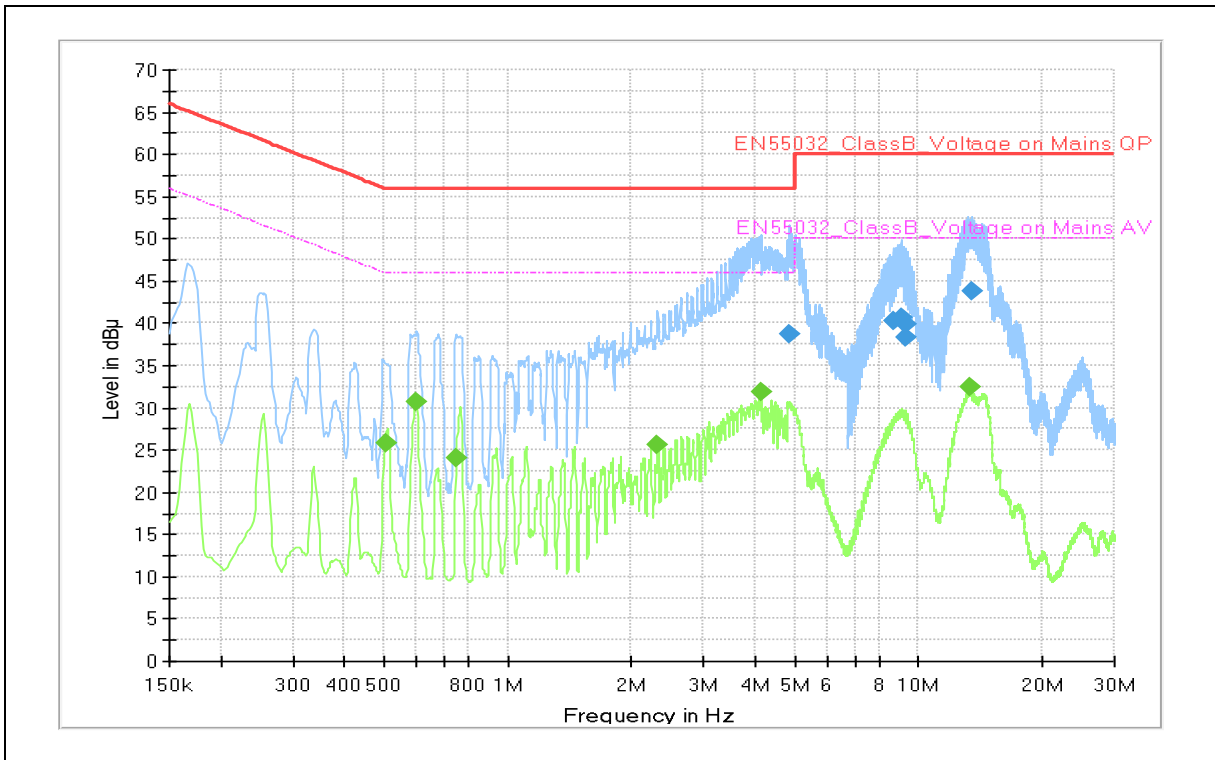


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dB $\mu$ V)	CAV (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Corr. (dB)
0.505	---	25.8	46.0	20.2	N	10.2
0.599	---	30.7	46.0	15.3	N	10.1
0.754	---	24.0	46.0	22.0	N	10.0
2.312	---	25.7	46.0	20.3	N	9.9
4.151	---	31.8	46.0	14.2	N	9.9
4.829	38.8	---	56.0	17.2	L1	10.0
8.687	40.3	---	60.0	19.7	L1	10.1
9.097	40.7	---	60.0	19.3	L1	10.1
9.284	38.3	---	60.0	21.7	L1	10.1
9.351	39.8	---	60.0	20.2	L1	10.1
13.338	---	32.4	50.0	17.6	N	10.4
13.514	43.9	---	60.0	16.1	L1	10.3

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)  
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

**Operating Mode 5: AC Mains**

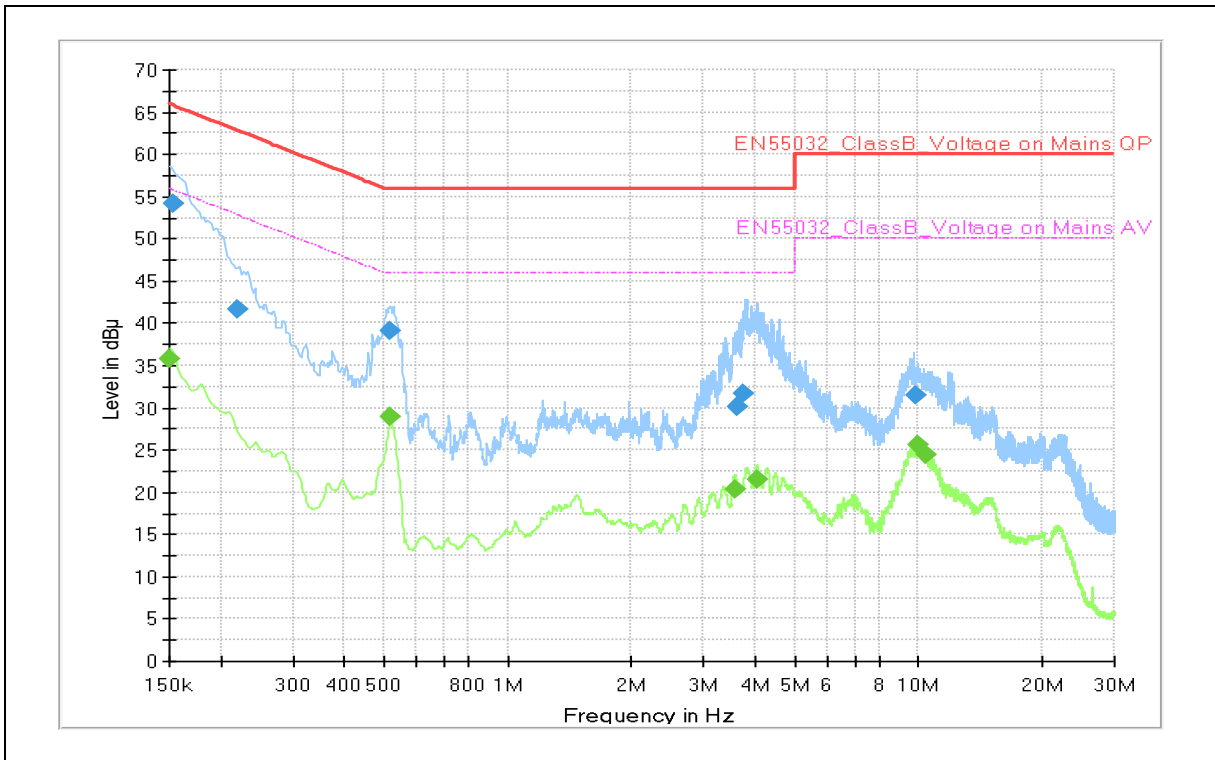

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dB $\mu$ V)	CAV (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Corr. (dB)
0.150	---	35.7	56.0	20.3	L1	9.8
0.154	54.1	---	65.8	11.7	N	9.7
0.221	41.6	---	62.8	21.2	N	9.8
0.518	39.1	---	56.0	16.9	L1	10.0
0.518	---	28.9	46.0	17.1	L1	10.0
3.595	---	20.3	46.0	25.7	N	9.7
3.611	30.1	---	56.0	25.9	N	9.7
3.725	31.6	---	56.0	24.4	L1	9.8
4.063	---	21.6	46.0	24.4	N	9.7
9.826	31.4	---	60.0	28.6	L1	9.8
9.923	---	25.5	50.0	24.5	L1	9.8
10.394	---	24.4	50.0	25.6	L1	9.8

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)  
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

## 5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [ cm ]	Antenna Polarisation	Resolution Bandwidth [ kHz ]	Video Bandwidth [ kHz ]	Turntable position [ degrees ]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detector.

Peak/CISPR-Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency generated or used in the device or on which the device operate or tunes at a measurement distance of 3 m for the following antenna and turntable arrangements. The measurements above 1 GHz were performed with the bore-sighting antenna aimed at the EUT.

Antenna Height [ cm ]	Antenna Polarisation	Resolution Bandwidth [ MHz ]	Video Bandwidth [ MHz ]	Turntable position
100 ~ 400	Horizontal, Vertical	1	3	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and CISPR-average detectors.

### Limits for radiated disturbance of Class B ITE at a measuring distance of 3 m and 10 m

Frequency range Limits [ MHz ]	Field Strength		
	3 m [ $\mu\text{V/m}$ ]	3 m [ dB( $\mu\text{V/m}$ ) ]	10 m [ dB( $\mu\text{V/m}$ ) ]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Results checked manually; and points close to the limit line were re-measured.

## 5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-002	Universal Radio Communicator	CMU200	R&S	100612	2018-08-31	12
E5I-018	EMI Test Receiver	ESU8	R&S	100484	2018-05-23	12
E5I-020	EMI Test Receiver	ESU40	R&S	100375	2018-08-21	12
E5I-036	Horn Antenna	HF907	R&S	100507	2018-06-15	24
E5I-040	Signal Conditioning Unit	SCU-18	R&S	10210	2018-04-06	12
E5I-037	Wide Band Horn Antenna	WBH 18-40K	R&S	11201	2017-10-13	24
E5I-042	Signal Conditioning Unit	SCU-40A	R&S	10004	2018-09-05	12
E5I-070	BiLog Antenna	CBL6112D	TESEQ	35383	2018-10-12	24
E5I-121	BiLog Antenna	CBL6112D	TESEQ	36999	2018-10-12	24
E5I-073	Preamplifier	310N	SONOMA	332016	2018-05-09	12
E5I-074	Preamplifier	310N	SONOMA	332017	2018-05-09	12
-	Test software	EP7RE	TOYO	Ver 5.8.2	-	-
-	Test software	EMC32	R&S	Ver 9.25.00	-	-


## 5.2.2 Temperature and humidity condition

<b>Test date</b>	2019-01-28	<b>Test engineer</b>	Soo-Joon Kim
<b>Climate condition</b>	Ambient temperature	(22.2 ~ 22.4) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(37.8 ~ 38.9) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(101.7 ~ 102.0) kPa	Limit (86.0 to 106.0) kPa
<b>Test place</b>	Semi-Anechoic Chamber (SAC5)		

### 5.2.3 Test results

Operating Mode 1

- Frequencies below 1 GHz

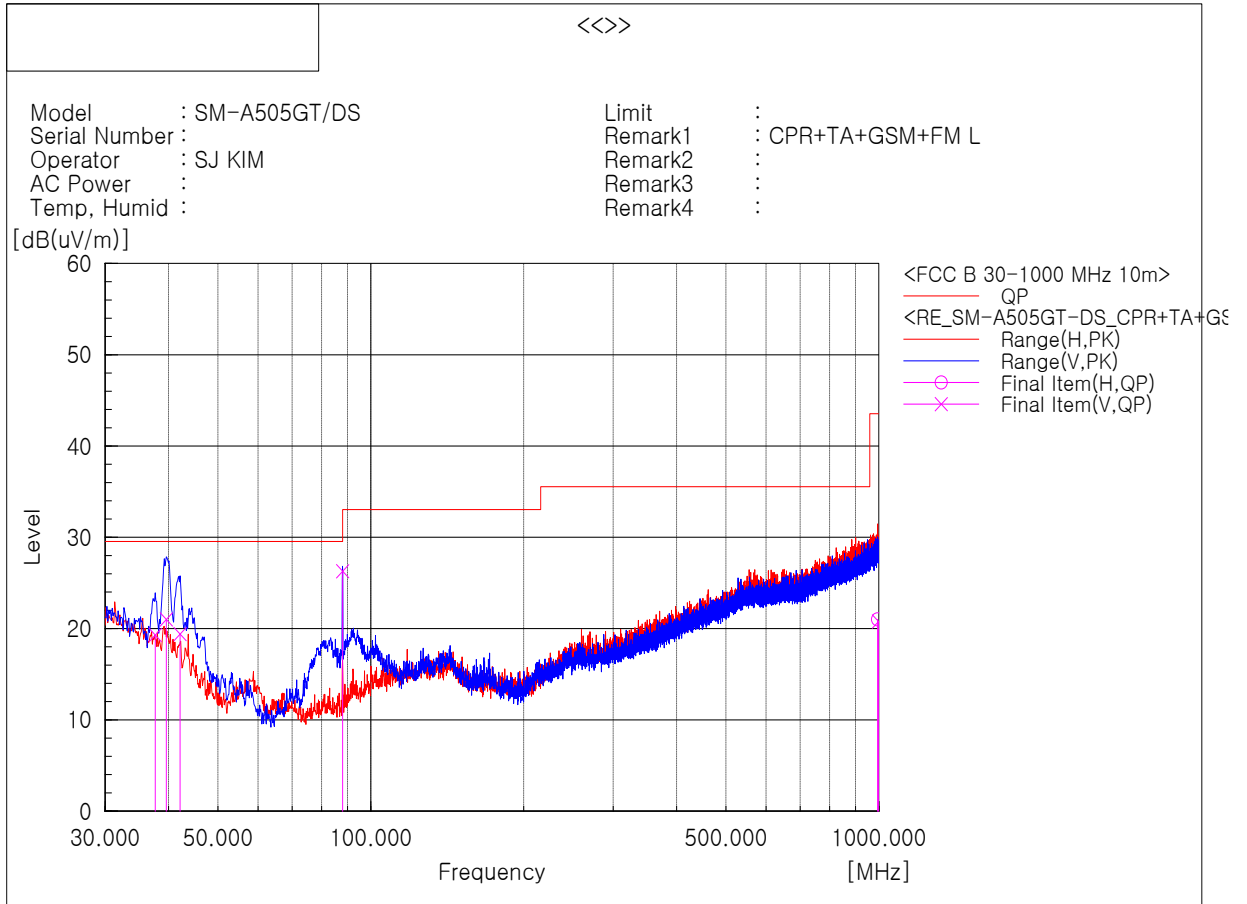

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	37.639	V	28.6	-9.3	19.3	29.5	10.2	106	351	2
2	39.579	V	31.3	-10.3	21.0	29.5	8.5	101	19	2
3	42.125	V	31.2	-11.8	19.4	29.5	10.1	103	337	2
4	88.018	V	42.5	-16.2	26.3	33.0	6.7	170	120	2
5	994.314	H	19.7	1.3	21.0	43.5	22.5	109	58	1
6	998.093	V	19.1	1.7	20.8	43.5	22.7	270	60	2

\* Radiated emissions (Rx frequency 88.018 MHz) from the transceiver shall be ignored

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

**- Frequencies above 1 GHz**

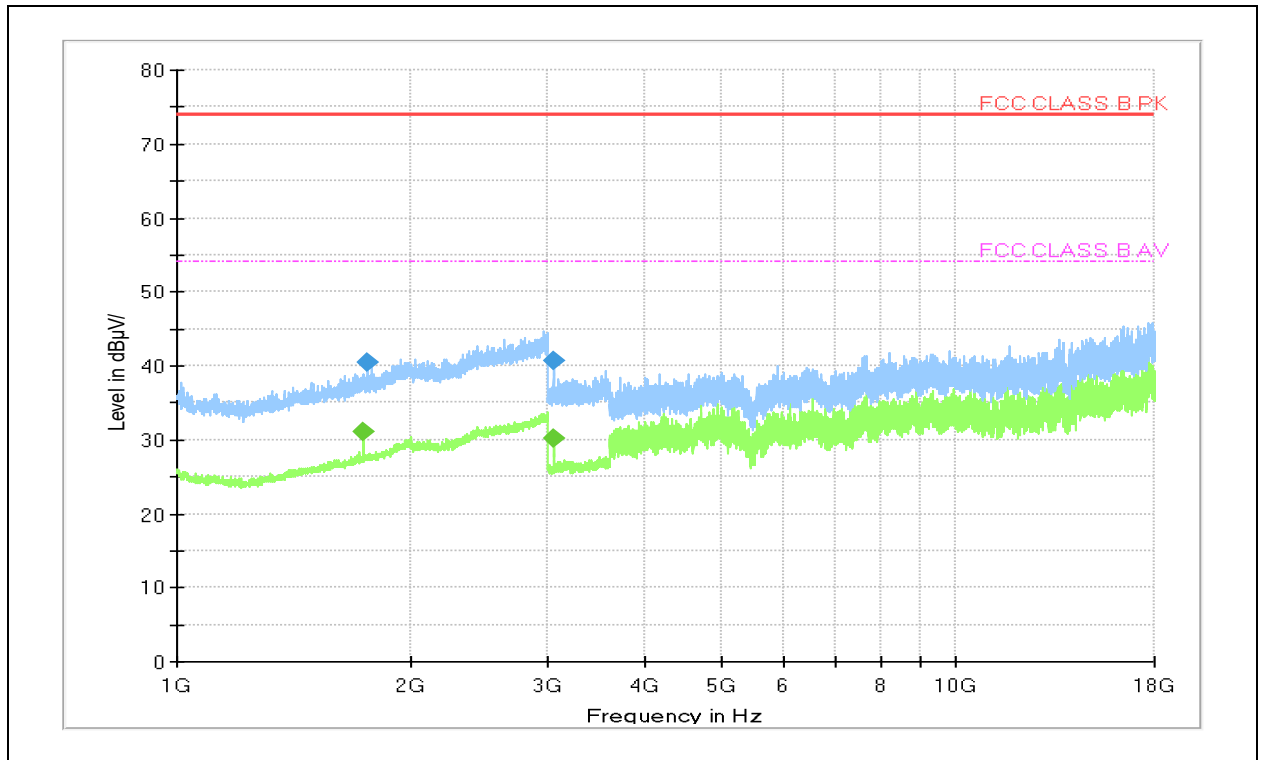

Frequency (MHz)	PK (dBµV/m)	CAV (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 733.500	---	31.0	54.0	23.0	100.0	V	16.0	10.3
1 758.500	40.5	---	74.0	33.5	100.0	V	21.0	10.4
3 046.000	---	30.2	54.0	23.8	100.0	H	47.0	0.7
3 046.000	40.8	---	74.0	33.2	100.0	H	47.0	0.7

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 2

- Frequencies below 1 GHz

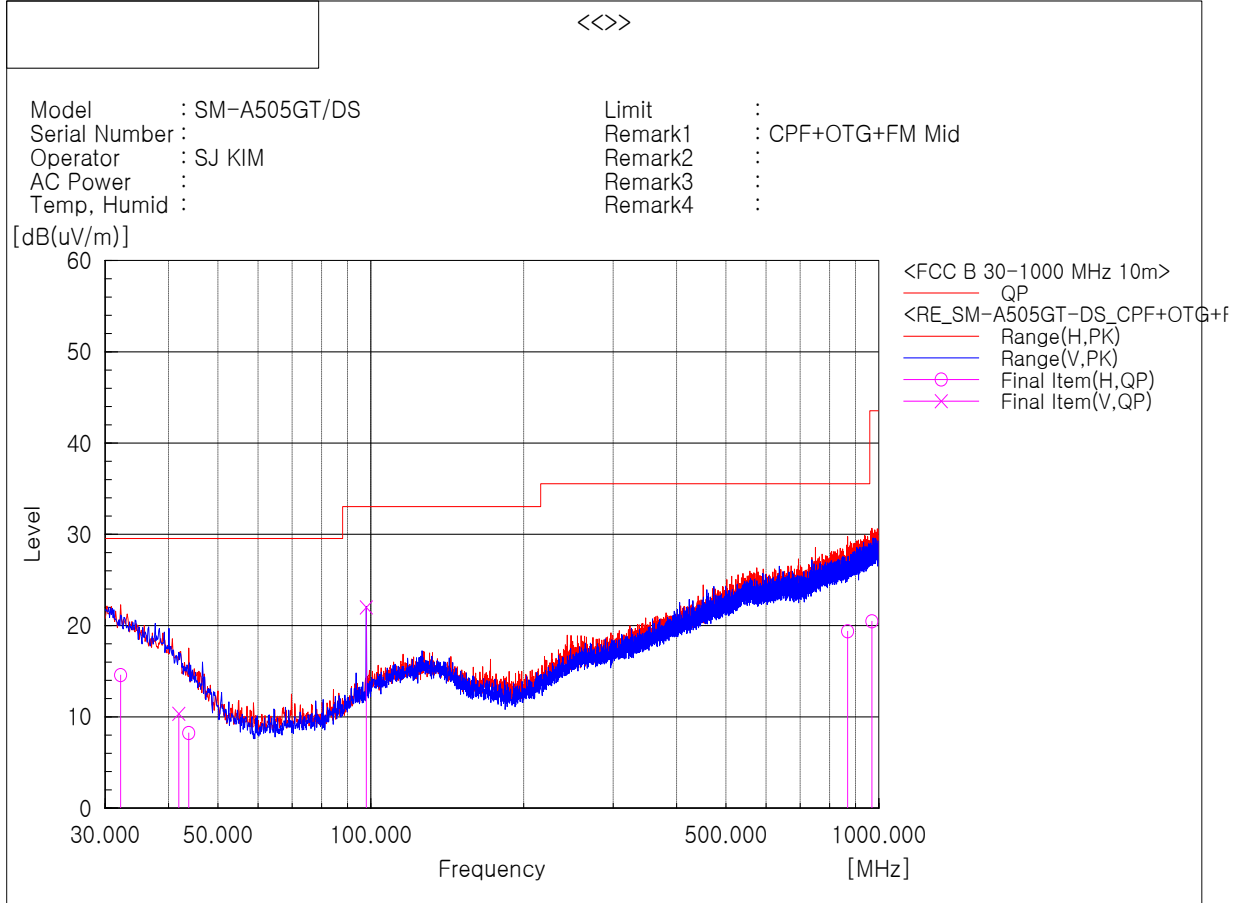

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	32.183	H	22.6	-8.0	14.6	29.5	14.9	385	163	1
2	41.883	V	22.0	-11.7	10.3	29.5	19.2	170	360	2
3	43.823	H	21.9	-13.7	8.2	29.5	21.3	400	360	1
4	97.973	V	36.3	-14.3	22.0	33.0	11.0	200	75	2
5	867.959	H	20.3	-0.9	19.4	35.5	16.1	327	338	1
6	968.960	H	19.8	0.7	20.5	43.5	23.0	230	343	1

\* Radiated emissions (Rx frequency 97.973 MHz) from the transceiver shall be ignored

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

**- Frequencies above 1 GHz**

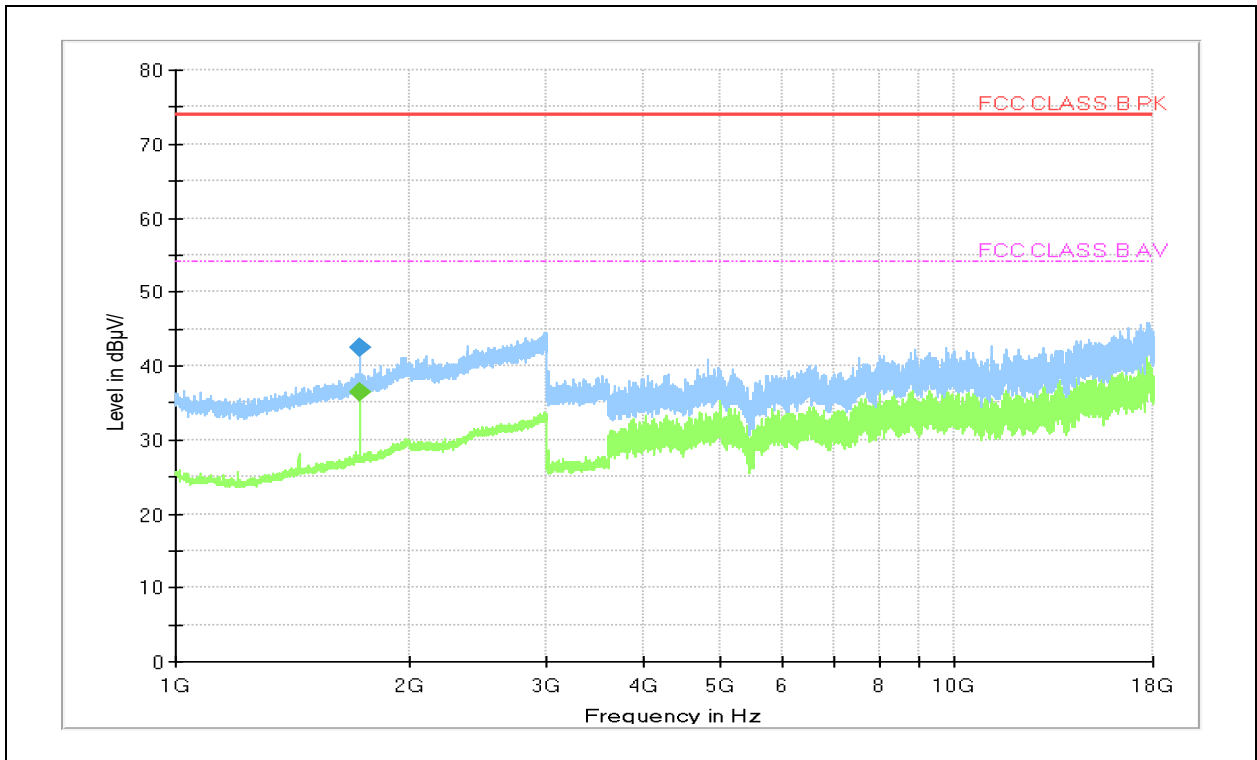

Frequency (MHz)	PK (dBµV/m)	CAV (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 723.500	---	36.4	54.0	17.6	100.0	V	226.0	10.2
1 723.500	42.4	---	74.0	31.6	100.0	V	226.0	10.2

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor



**- Frequencies above 1 GHz**

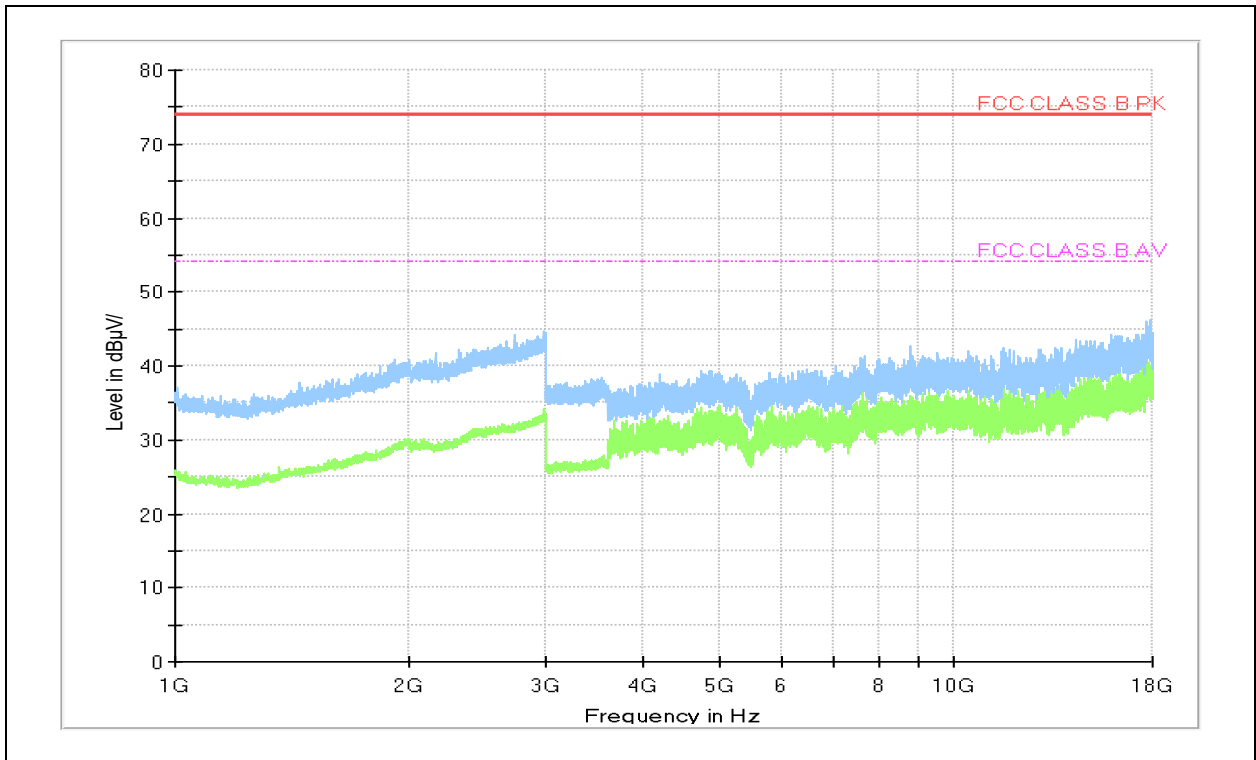

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

**Operating Mode 4**

**- Frequencies below 1 GHz**

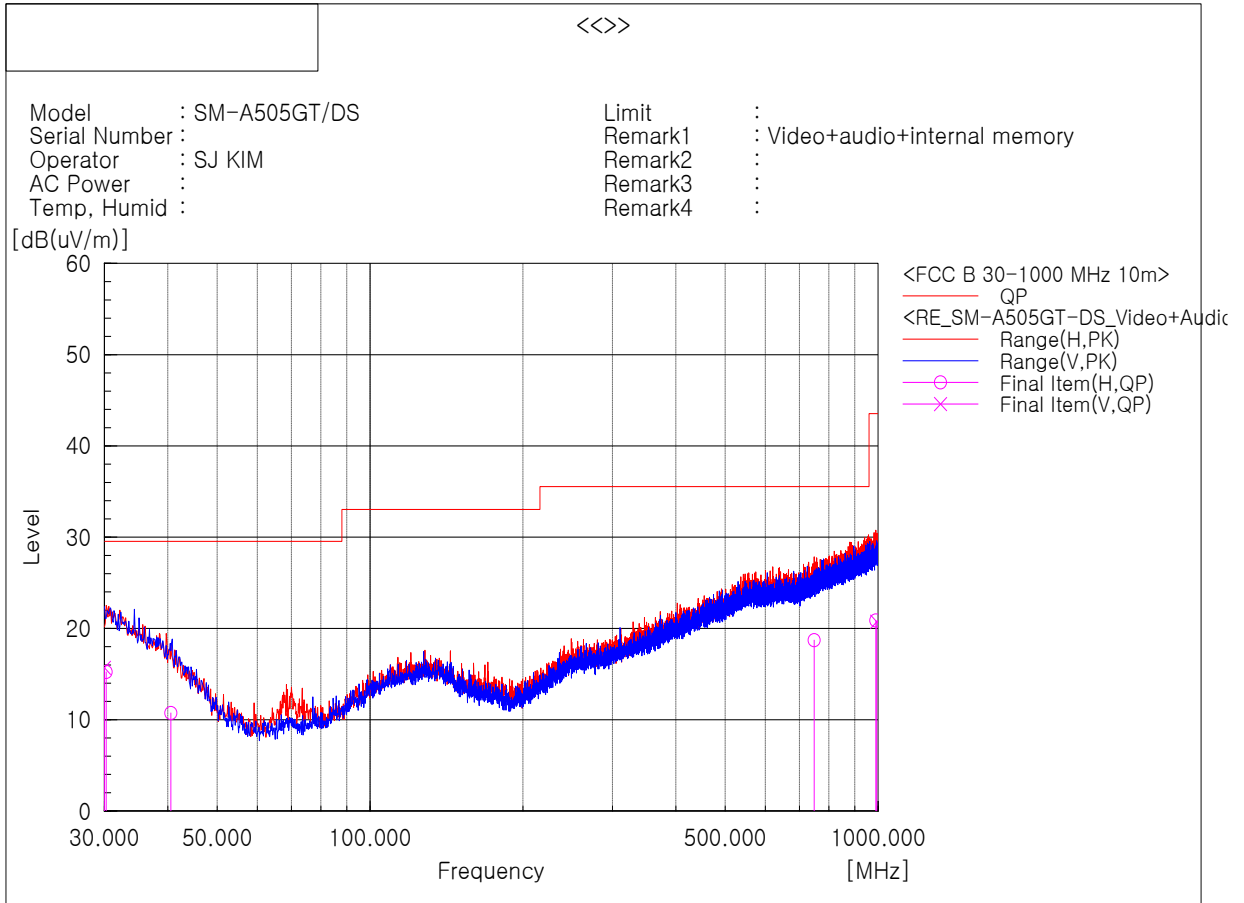

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	30.000	V	22.2	-6.5	15.7	29.5	13.8	112	360	2
2	30.243	H	22.5	-7.3	15.2	29.5	14.3	106	357	1
3	40.549	H	22.4	-11.7	10.7	29.5	18.8	280	360	1
4	748.528	H	21.1	-2.4	18.7	35.5	16.8	226	349	1
5	989.936	H	19.7	1.2	20.9	43.5	22.6	100	360	1
6	993.574	V	19.2	1.5	20.7	43.5	22.8	101	360	2

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

**- Frequencies above 1 GHz**

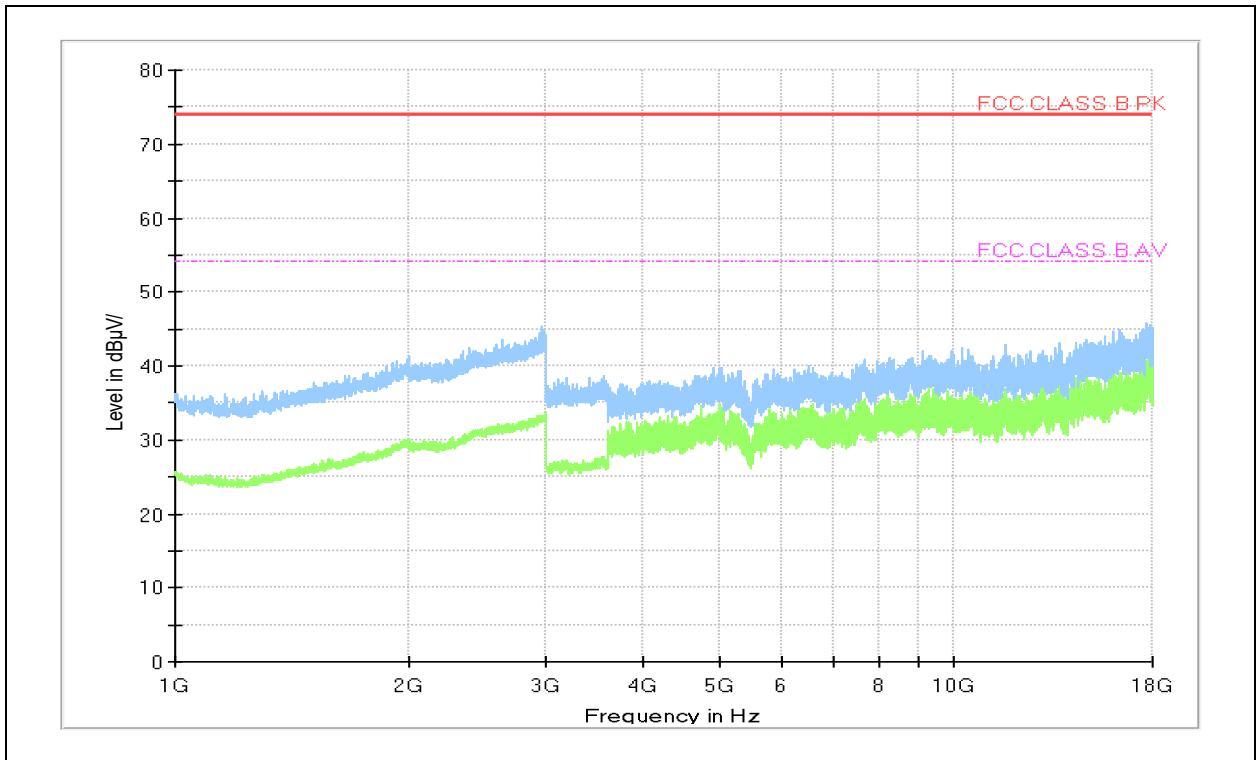

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 5

- Frequencies below 1 GHz

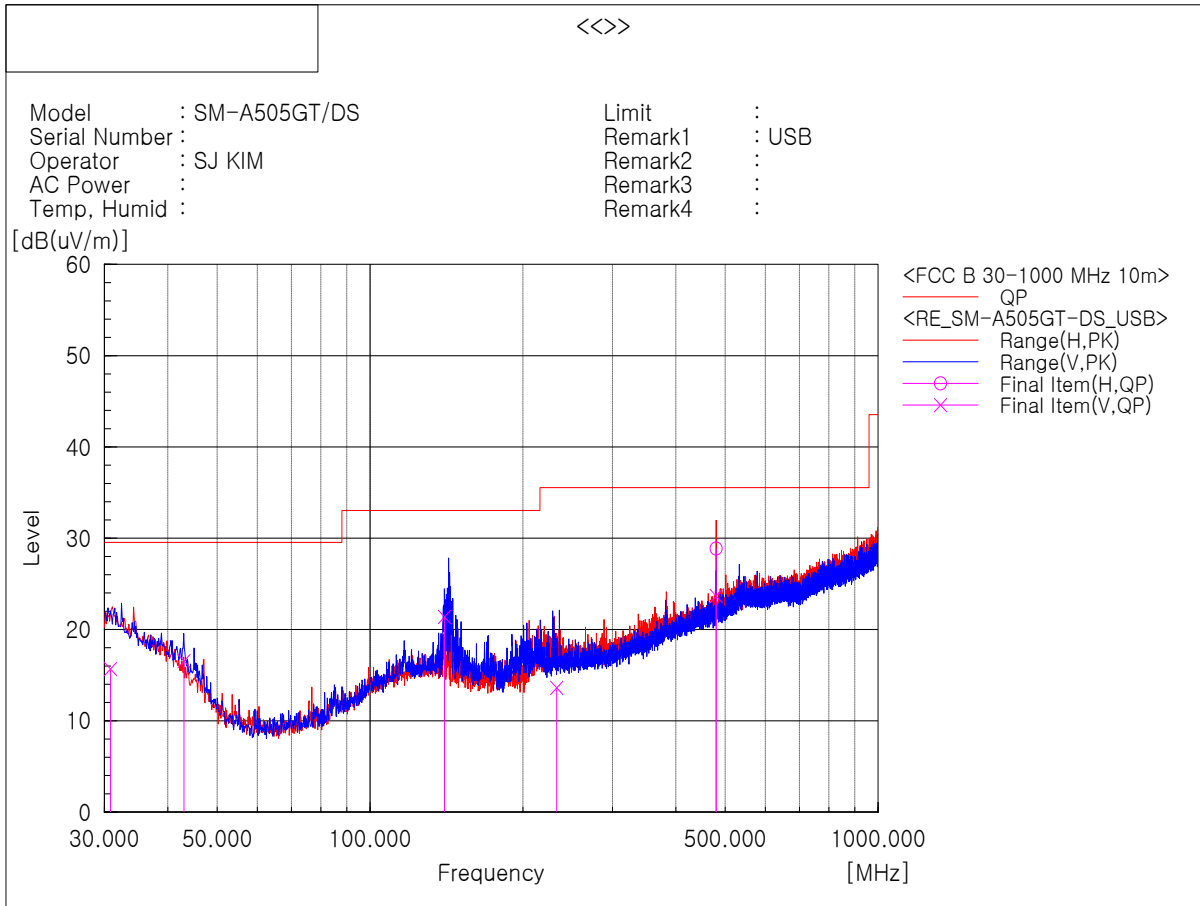

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	30.825	V	22.5	-6.8	15.7	29.5	13.8	125	328	2
2	43.021	V	28.9	-12.4	16.5	29.5	13.0	103	188	2
3	140.079	V	33.8	-12.4	21.4	33.0	11.6	101	253	2
4	232.986	V	25.6	-12.0	13.6	35.5	21.9	100	354	2
5	479.975	H	35.0	-6.1	28.9	35.5	6.6	266	71	1
6	480.018	V	29.2	-5.5	23.7	35.5	11.8	362	193	2

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

**- Frequencies above 1 GHz**

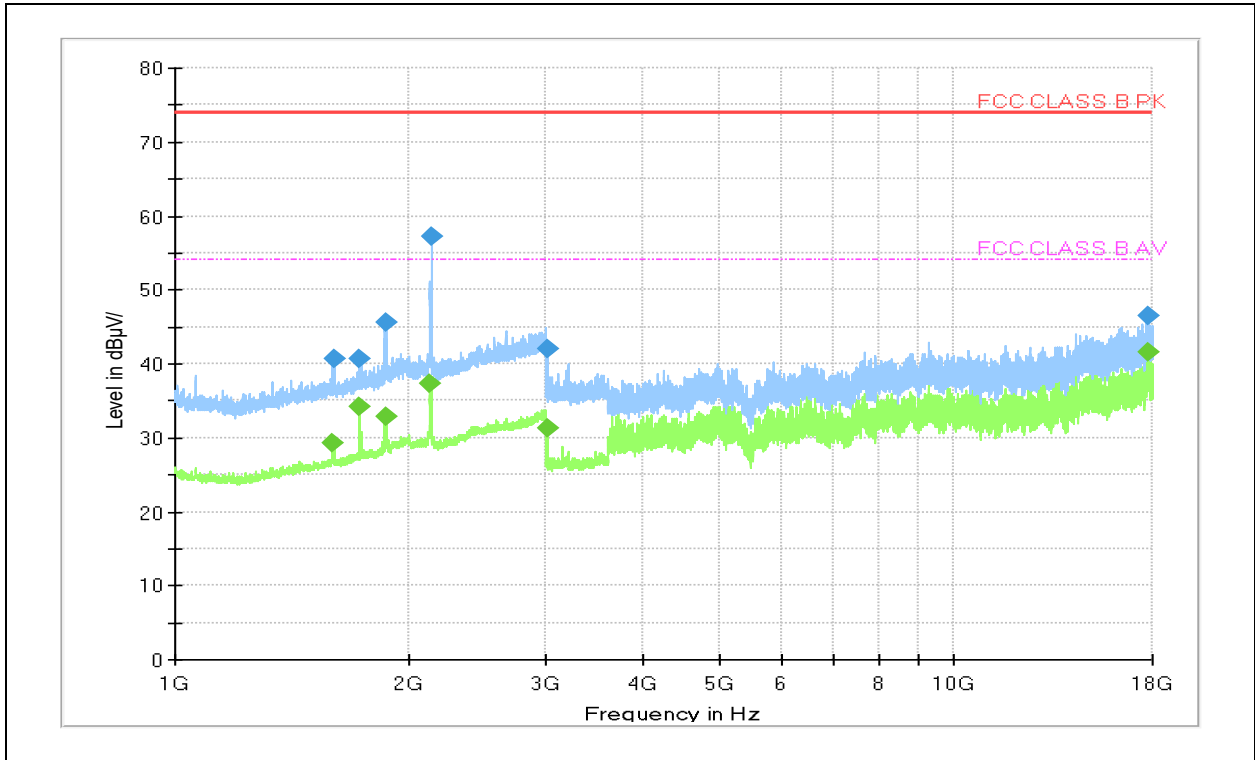

Frequency (MHz)	PK (dBµV/m)	CAV (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 595.500	---	29.2	54.0	24.8	100.0	V	174.0	9.4
1 599.500	40.7	---	74.0	33.3	100.0	V	185.0	9.4
1 722.000	40.7	---	74.0	33.3	100.0	V	73.0	10.2
1 722.500	---	34.2	54.0	19.8	100.0	V	73.0	10.2
1 862.000	---	32.8	54.0	21.2	100.0	V	0.0	11.1
1 866.500	45.5	---	74.0	28.5	100.0	V	16.0	11.1
2 127.500	---	37.4	54.0	16.6	100.0	V	22.0	12.4
2 133.000	57.2	---	74.0	16.8	100.0	V	282.0	12.4
3 019.000	---	31.4	54.0	22.6	100.0	H	0.0	0.5
3 019.000	42.1	---	74.0	31.9	100.0	H	0.0	0.5
17 768.500	46.4	---	74.0	27.6	100.0	H	308.0	30.4
17 774.000	---	41.7	54.0	12.3	100.0	H	192.0	30.4

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor