

Head Tissue Simulating Liquids

Head Tissue	Parameters according to IEEE Std 1528-2013 / IEC 62209 / FCC KDB 865664 D01		
Narrow-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	HSL300V2	300	Water, Sugar
	HSL450V2	450	Water, Sugar
	HSL750V2	750	Water, Sugar
	HSL900V2	835, 900	Water, Sugar
	HSL1450V2	1450, 1500, 1640	Water, DGBE
	HSL1750V2	1750	Water, DGBE
	HSL1800V2	1800, 1900	Water, DGBE
	HSL1900V2	1900	Water, DGBE
	HSL1950V2	1950, 2000	Water, DGBE
HSL2450V2	2450, 2600	Water, DGBE	
Broad-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	HBBL30-250V3	30-250	Water, Tween
	HBBL1350-1850V3	1400-1800	Water, Tween
	HBBL1550-1950V3	1750-1900	Water, Tween
	HBBL1900-3800V3	1950-3000	Water, Tween
HBBL3500-5800V5	3500-5800	Water, Oil	

Body Tissue Simulating Liquids

Body Tissue (Muscle)	Parameters according to FCC KDB 865664 D01		
Narrow-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	MSL300V2	300	Water, Sugar
	MSL450V2	400, 450	Water, Sugar
	MSL750V2	750	Water, Sugar
	MSL900V2	835, 900	Water, Sugar
	MSL1450V2	1450, 1500, 1640	Water, DGBE
	MSL1750V2	1750	Water, DGBE
	MSL1800V2	1800, 1900	Water, DGBE
	MSL1900V2	1900	Water, DGBE
	MSL1950V2	1950, 2100	Water, DGBE
MSL2450V2	2450, 2600	Water, DGBE	
Broad-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	MBBL130-250V3	130-250	Water, Tween
	MBBL1350-1850V3	1350-1800	Water, Tween
	MBBL1550-1950V3	1550-1850	Water, Tween
	MBBL1900-3800V3	1950-3800	Water, Tween
MBBL3500-5800V5	3500-5800	Water, Oil	

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Head Tissue Simulating Liquid (HSL750V2)
Product No.	SL AAH 075 AA (Charge: 140903-3)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.



Test Condition

Ambient	Environment temperatur (22 ± 3)°C and humidity < 70%.
TSL Temperature	22°C
Test Date	10-Sep-14
Operator	CL

Additional Information

TSL Density	1.284 g/cm ³
TSL Heat-capacity	2.701 kJ/(kg*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ -eps	Δ -sigma
600	44.6	22.48	0.75	42.7	0.88	4.5	-14.9
625	44.3	22.25	0.77	42.6	0.88	3.9	-12.5
650	43.9	22.03	0.80	42.5	0.89	3.4	-10.1
675	43.5	21.82	0.82	42.3	0.89	2.8	-7.7
700	43.1	21.61	0.84	42.2	0.89	2.2	-5.4
725	42.8	21.43	0.86	42.1	0.89	1.7	-3.0
750	42.5	21.26	0.89	41.9	0.89	1.3	-0.7
775	42.1	21.12	0.91	41.8	0.90	0.8	1.7
800	41.8	20.98	0.93	41.7	0.90	0.3	4.0
825	41.5	20.86	0.96	41.6	0.91	-0.2	5.6
838	41.3	20.80	0.97	41.5	0.91	-0.5	6.3
850	41.2	20.74	0.98	41.5	0.92	-0.7	7.0
875	40.9	20.61	1.00	41.5	0.94	-1.5	6.4
900	40.6	20.49	1.03	41.5	0.97	-2.2	5.8
925	40.3	20.39	1.05	41.5	0.98	-2.8	6.8
950	40.1	20.28	1.07	41.4	0.99	-3.3	7.8
975	39.8	20.20	1.10	41.4	1.00	-3.9	9.1
1000	39.5	20.13	1.12	41.3	1.01	-4.5	10.3

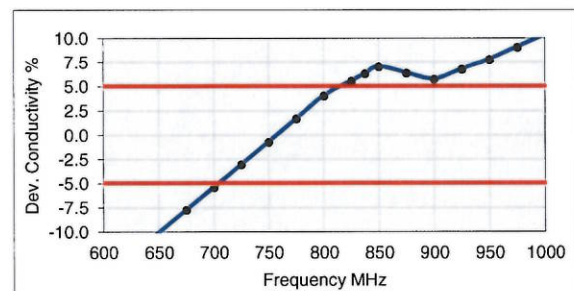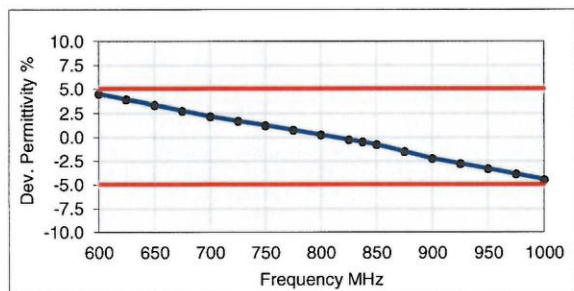

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Head Tissue Simulating Liquid (HSL900V2)
Product No.	SL AAH 090 BB (Charge: 140818-1)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.



Test Condition

Ambient	Environment temperatur (22 ± 3)°C and humidity < 70%.
TSL Temperature	22°C
Test Date	20-Aug-14
Operator	IEN

Additional Information

TSL Density	1.280 g/cm ³
TSL Heat-capacity	2.942 kJ/(kg*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ-eps	Δ-sigma
700	43.7	19.64	0.76	42.2	0.89	3.5	-14.0
725	43.3	19.47	0.78	42.1	0.89	2.8	-11.9
750	42.8	19.30	0.81	41.9	0.89	2.1	-9.9
775	42.6	19.26	0.83	41.8	0.90	1.8	-7.3
800	42.3	19.21	0.86	41.7	0.90	1.5	-4.7
825	42.0	19.10	0.88	41.6	0.91	0.9	-3.3
838	41.8	19.05	0.89	41.5	0.91	0.6	-2.6
850	41.6	18.99	0.90	41.5	0.92	0.3	-2.0
875	41.3	19.00	0.92	41.5	0.94	-0.4	-1.9
900	41.0	19.01	0.95	41.5	0.97	-1.2	-1.9
925	40.8	18.90	0.97	41.5	0.98	-1.6	-1.0
950	40.6	18.79	0.99	41.4	0.99	-2.1	-0.1
975	40.2	18.76	1.02	41.4	1.00	-2.8	1.3
1000	39.9	18.74	1.04	41.3	1.01	-3.6	2.7
1025	39.7	18.69	1.07	41.3	1.03	-3.9	4.0
1050	39.5	18.65	1.09	41.2	1.04	-4.3	5.2
1075	39.2	18.58	1.11	41.2	1.05	-4.9	6.2
1100	38.8	18.51	1.13	41.2	1.06	-5.6	7.3
1125	38.7	18.51	1.16	41.1	1.07	-5.9	8.6
1150	38.5	18.51	1.18	41.1	1.08	-6.3	10.0
1175	38.2	18.40	1.20	41.0	1.09	-6.8	10.7
1200	38.0	18.29	1.22	41.0	1.10	-7.3	11.3

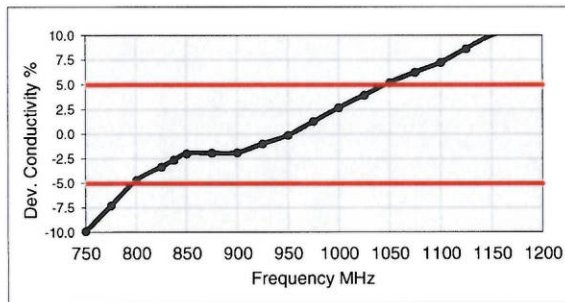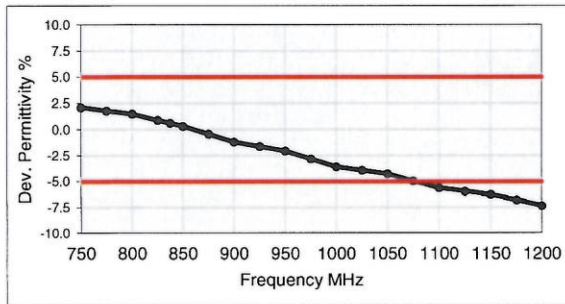

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Head Tissue Simulating Liquid (HBBL1550-1950V3)
Product No.	SL AAH 181 AA (Charge: 140916-1)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.



Test Condition

Ambient	Environment temperatur (22 ± 3)°C and humidity < 70%.
TSL Temperature	22°C
Test Date	17-Sep-14
Operator	IEN

Additional Information

TSL Density	1.052 g/cm ³
TSL Heat-capacity	3.322 kJ/(kg*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ -eps	Δ -sigma
1500	41.0	13.22	1.10	40.4	1.23	1.3	-10.2
1525	40.9	13.26	1.12	40.4	1.24	1.1	-9.5
1550	40.8	13.29	1.15	40.4	1.26	1.0	-8.8
1575	40.7	13.32	1.17	40.3	1.27	0.8	-8.1
1600	40.6	13.35	1.19	40.3	1.28	0.6	-7.5
1625	40.4	13.40	1.21	40.3	1.30	0.4	-6.7
1650	40.3	13.46	1.24	40.2	1.31	0.3	-5.9
1675	40.2	13.48	1.26	40.2	1.33	0.1	-5.4
1700	40.1	13.50	1.28	40.2	1.34	-0.1	-4.9
1725	40.0	13.55	1.30	40.1	1.36	-0.2	-4.2
1750	39.9	13.59	1.32	40.1	1.37	-0.3	-3.5
1775	39.8	13.62	1.35	40.0	1.39	-0.5	-2.9
1800	39.7	13.65	1.37	40.0	1.40	-0.6	-2.4
1825	39.6	13.69	1.39	40.0	1.40	-0.9	-0.7
1850	39.6	13.74	1.41	40.0	1.40	-1.1	1.0
1875	39.5	13.77	1.44	40.0	1.40	-1.3	2.6
1900	39.4	13.79	1.46	40.0	1.40	-1.6	4.1
1925	39.3	13.84	1.48	40.0	1.40	-1.8	5.9
1950	39.2	13.88	1.51	40.0	1.40	-2.0	7.6
1975	39.1	13.91	1.53	40.0	1.40	-2.3	9.2
2000	39.0	13.94	1.55	40.0	1.40	-2.5	10.8

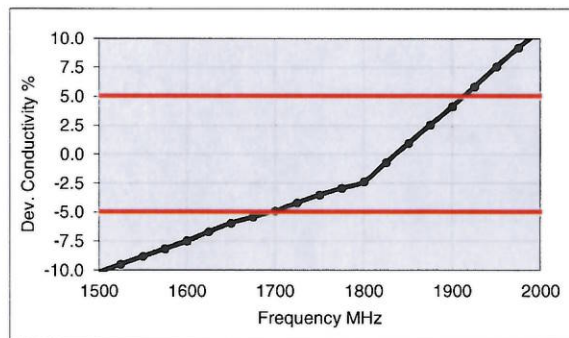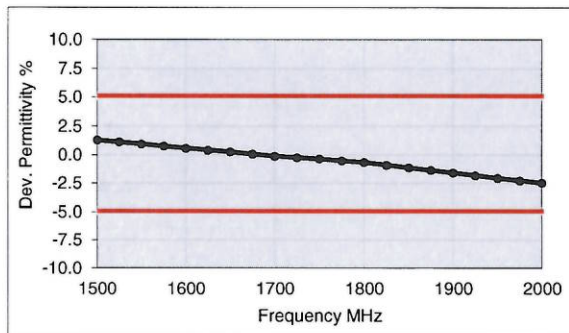

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Head Tissue Simulating Liquid (HBBL1900-3800V3)
Product No.	SL AAH 196 AB (Charge: 140729-2)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within ± 2.5% towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.



Test Condition

Ambient	Environment temperatur (22 ± 3)°C and humidity < 70%.
TSL Temperature	22°C
Test Date	30-Jul-14
Operator	CL

Additional Information

TSL Density	1.054 g/cm ³
TSL Heat-capacity	3.389 kJ/(kg*K)

f [MHz]	Measured			Target		Diff. to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ-eps	Δ-sigma
1900	40.6	12.5	1.3	40.0	1.4	1.5	-5.6
1950	40.4	12.6	1.4	40.0	1.4	1.1	-2.1
2000	40.3	12.7	1.4	40.0	1.4	0.6	1.3
2050	40.1	12.9	1.5	39.9	1.4	0.5	1.6
2100	39.9	13.0	1.5	39.8	1.5	0.3	1.9
2150	39.8	13.1	1.6	39.7	1.5	0.1	2.0
2200	39.6	13.2	1.6	39.6	1.6	-0.2	2.6
2250	39.4	13.3	1.7	39.6	1.6	-0.3	2.9
2300	39.2	13.5	1.7	39.5	1.7	-0.6	3.4
2350	39.1	13.6	1.8	39.4	1.7	-0.8	3.9
2400	38.9	13.7	1.8	39.3	1.8	-1.0	4.5
2450	38.7	13.9	1.9	39.2	1.8	-1.3	4.9
2500	38.5	14.0	1.9	39.1	1.9	-1.6	4.8
2550	38.4	14.1	2.0	39.1	1.9	-1.8	4.8
2600	38.1	14.2	2.1	39.0	2.0	-2.2	4.7
2650	37.9	14.3	2.1	38.9	2.0	-2.6	4.6
2700	37.8	14.5	2.2	38.9	2.1	-2.9	4.7
2750	37.5	14.5	2.2	38.8	2.1	-3.3	4.5
2800	37.4	14.6	2.3	38.8	2.2	-3.6	4.5
2850	37.2	14.7	2.3	38.7	2.2	-3.9	4.5
2900	37.0	14.9	2.4	38.6	2.3	-4.2	4.6
2950	36.8	14.9	2.5	38.6	2.3	-4.5	4.5
3000	36.6	15.0	2.5	38.5	2.4	-4.9	4.3
3050	36.4	15.1	2.6	38.4	2.5	-5.2	4.6
3100	36.2	15.2	2.6	38.4	2.5	-5.6	4.6
3150	36.1	15.3	2.7	38.3	2.6	-5.9	4.8
3200	35.9	15.3	2.7	38.3	2.6	-6.3	4.7
3250	35.7	15.4	2.8	38.2	2.7	-6.6	4.8
3300	35.5	15.4	2.8	38.2	2.7	-6.9	4.7
3350	35.4	15.5	2.9	38.1	2.8	-7.2	4.9
3400	35.2	15.6	2.9	38.0	2.8	-7.5	4.8
3450	35.0	15.6	3.0	38.0	2.9	-7.8	4.9
3500	34.9	15.7	3.1	37.9	2.9	-8.1	4.9
3550	34.7	15.7	3.1	37.9	3.0	-8.4	4.9
3600	34.5	15.8	3.2	37.8	3.0	-8.7	5.1
3650	34.4	15.9	3.2	37.8	3.1	-9.0	5.0
3700	34.2	15.9	3.3	37.7	3.1	-9.3	5.2
3750	34.0	16.0	3.3	37.6	3.2	-9.6	5.0
3800	33.9	16.0	3.4	37.6	3.2	-9.9	5.3
3850	33.7	16.1	3.4	37.5	3.3	-10.1	5.2

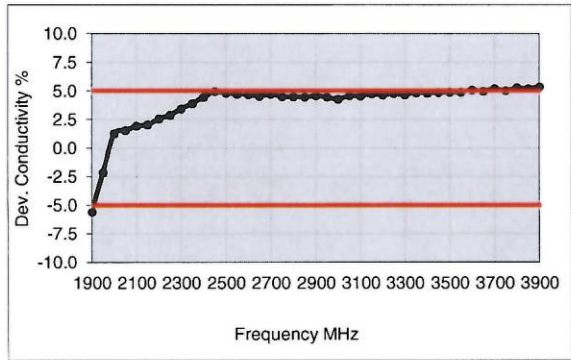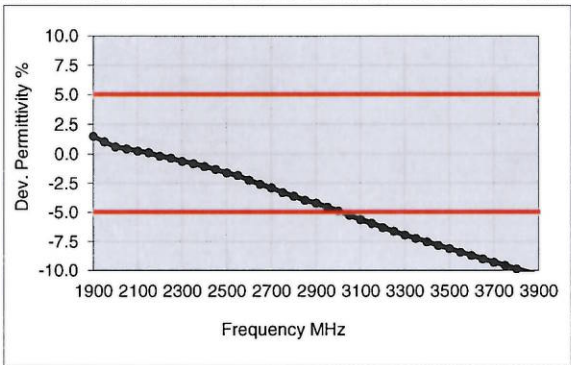

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Head Tissue Simulating Liquid (HBBL3500-5800V5)
Product No.	SL AAH 502 AE (Charge: 140617-1)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient	Environment temperatur (22 \pm 3) $^{\circ}$ C and humidity < 70%.
TSL Temperature	22 $^{\circ}$ C
Test Date	18-Jun-14
Operator	IEN

Additional Information

TSL Density	0.985 g/cm ³
TSL Heat-capacity	3.383 kJ/(kg*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ -eps	Δ -sigma
3400	38.6	15.01	2.84	38.0	2.81	1.5	1.1
3500	38.5	14.97	2.91	37.9	2.91	1.5	-0.1
3600	38.4	14.96	3.00	37.8	3.02	1.5	-0.5
3700	38.3	14.95	3.08	37.7	3.12	1.6	-1.2
3800	38.1	14.94	3.16	37.6	3.22	1.4	-1.9
3900	38.0	14.95	3.24	37.5	3.32	1.4	-2.5
4000	37.9	14.96	3.33	37.4	3.43	1.5	-2.8
4100	37.8	14.98	3.42	37.2	3.53	1.5	-3.0
4200	37.7	15.02	3.51	37.1	3.63	1.5	-3.3
4300	37.6	15.06	3.60	37.0	3.73	1.6	-3.5
4400	37.4	15.12	3.70	36.9	3.84	1.4	-3.5
4500	37.3	15.17	3.80	36.8	3.94	1.4	-3.5
4600	37.2	15.23	3.90	36.7	4.04	1.4	-3.5
4700	37.0	15.29	4.00	36.6	4.14	1.2	-3.4
4800	36.9	15.35	4.10	36.4	4.25	1.3	-3.4
4850	36.8	15.39	4.15	36.4	4.30	1.1	-3.4
4900	36.8	15.42	4.20	36.3	4.35	1.3	-3.4
4950	36.7	15.43	4.25	36.3	4.40	1.2	-3.4
5000	36.6	15.47	4.30	36.2	4.45	1.1	-3.4
5050	36.5	15.49	4.35	36.2	4.50	0.9	-3.4
5100	36.5	15.54	4.41	36.1	4.55	1.1	-3.1
5150	36.4	15.55	4.46	36.0	4.60	1.0	-3.1
5200	36.3	15.59	4.51	36.0	4.66	0.9	-3.1
5250	36.3	15.61	4.56	35.9	4.71	1.0	-3.1
5300	36.2	15.63	4.61	35.9	4.76	0.9	-3.1
5350	36.1	15.65	4.66	35.8	4.81	0.8	-3.1
5400	36.0	15.68	4.71	35.8	4.86	0.7	-3.1
5450	36.0	15.70	4.76	35.7	4.91	0.8	-3.1
5500	35.9	15.72	4.81	35.6	4.96	0.7	-3.1
5550	35.8	15.75	4.86	35.6	5.01	0.6	-3.1
5600	35.8	15.78	4.91	35.5	5.07	0.8	-3.1
5650	35.7	15.82	4.97	35.5	5.12	0.6	-2.9
5700	35.6	15.83	5.02	35.4	5.17	0.5	-2.9
5750	35.5	15.88	5.08	35.4	5.22	0.4	-2.7
5800	35.5	15.89	5.13	35.3	5.27	0.6	-2.7
5850	35.4	15.92	5.18	35.3	5.34	0.3	-2.9
5900	35.3	15.93	5.23	35.3	5.40	0.0	-3.1

