



HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

SAR TEST REPORT

Applicant Name: SAMSUNG Electronics Co., Ltd. 129, Samsung-ro, Yeongtong-gu, Suwon-Si, Gyeonggi-do, 16677 Rep. of Korea	Date of Issue: Jan. 19, 2023 Test Report No.: HCT-SR-2301-FC008 Test Site: HCT CO., LTD.
--	---

FCC ID:

A3LSMA546B

Equipment Type:	Mobile Phone
Application Type	Certification
FCC Rule Part(s):	CFR §2.1093
Model Name:	SM-A546B/DS
Date of Test:	Dec. 26, 2022 ~ Jan. 17, 2023

This device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in FCC KDB procedures and had been tested in accordance with the measurement procedures specified in FCC KDB procedures.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested By

Kyoung-Mo, Kim
Test Engineer
SAR Team
Certification Division

Reviewed By

Yun-jeang, Heo
Technical Manager
SAR Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	Jan. 19, 2023	Initial Release

This test results were applied only to the test methods required by the standard.

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

Table of Contents

1. Test Regulations	4
2. Test Location.....	5
3. Information of the EUT	5
4. Device Under Test Description.....	7
5. Introduction	19
6. Description of test equipment.....	20
7. SAR Measurement Procedure	21
8. Description of Test Position	23
9. RF Exposure Limits	28
10. FCC SAR General Measurement Procedures	29
11. Output Power Specifications	36
12. System Verification	108
13. SAR Test Data Summary.....	112
14. Simultaneous SAR Analysis.....	134
15. SAR Measurement Variability and Uncertainty	140
16. Measurement Uncertainty.....	141
17. SAR Test Equipment	142
18. Conclusion	144
19. References	145

Appendix A. DUT Ant. Information & Test SETUP PHOTO

Appendix B. SAR Test Plots

Appendix C. Dipole Verification Plots

Appendix D. SAR Tissue Characterization

Appendix E. SAR System Validation

Appendix F. Probe Calibration Data

Appendix G. Dipole Calibration Data

Appendix H. Power reduction verification

Appendix I. DLCA Power Measurement

1. Test Regulations

The tests documented in this report were performed in accordance with FCC CFR § 2.1093, IEEE 1528-2013, ANSI C63.26-2015 the following FCC Published RF exposure KDB procedures:

- FCC KDB Publication 941225 D01 3G SAR Procedures v03r01
- FCC KDB Publication 941225 D06 Hot Spot SAR v02r01
- FCC KDB Publication 941225 D05 SAR for LTE Devices v02r05
- FCC KDB Publication 941225 D05A LTE Rel.10 KDB Inquiry sheet v01r02
- FCC KDB Publication 248227 D01 802.11 WLAN SAR v02r02
- FCC KDB Publication 447498 D01 General SAR Guidance v06
- FCC KDB Publication 648474 D04 Handset SAR v01r03
- FCC KDB Publication 616217 D04 v01r02 (Proximity Sensor)
- FCC KDB Publication 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.
- FCC KDB Publication 865664 D02 SAR Reporting v01r02
- FCC KDB Publication 690783 D01 SAR Listings on Grants v01r03
- FCC KDB Publication 971168 D01 Power Meas License Digital Systems v03r01

In Addition to the above, the following information was used.

- October 2013 TCB Workshop Notes (GPRS testing criteria)
- October 2014 TCB Workshop Notes (Overlapping LTE Bands)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- November 2017 TCBC Workshop Notes (LTE Carrier Aggregation)
- April 2018 TCBC Workshop Notes (LTE DL CA SAR Test Exclusion)
- October 2018 TCB Workshop Notes (LTE Inter-Band Uplink Carrier Aggregation –Interim Procedures)
- October 2020 TCB Workshop Notes (Test Reductions via Data Referencing for Closely Related Products)

2. Test Location

2.1 Test Laboratory

Company Name	HCT Co., Ltd.
Address	74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Telephone	031-645-6300
Fax.	031-645-6401

2.2 Test Facilities

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Korea	National Radio Research Agency (Designation No. KR0032)
	KOLAS (Testing No. KT197)

3. Information of the EUT

3.1 General Information of the EUT

Model Name	SM-A546B/DS
Equipment Type	Mobile Phone
FCC ID	A3LSMA546B
Application Type	Certification
Applicant	SAMSUNG Electronics Co., Ltd.
	<p>This model (A3LSMA546B) is the depopulated variant model of the fully populated reference model A3LSMA546E (report no: HCT-SR-2301-FC006) and was tested by applying Spot Check Verification according to Oct.2020, TCBC Workshop note and FCC guidance.</p> <p>For detailed difference between the fully populated reference model (A3LSMA546E) and the depopulated Variant model (A3LSMA546B), please refer to the technical documentation.</p>

3.2 Attestation of test result of device under test

The Highest Reported SAR						
Band	Tx. Frequency	Equipment Class	Reported SAR (W/kg)			
			1g Head	1g Body-Worn	1g Hotspot	10g Extremity
GSM/GPRS/EDGE 850	824.2 MHz ~ 848.8 MHz	PCE	0.38	0.47	0.95	N/A
GSM/GPRS/EDGE 1900	1 850.2 MHz~ 1 909.8 MHz	PCE	0.15	0.31	0.92	N/A
UMTS Band 5	826.4 MHz~ 846.6 MHz	PCE	0.31	0.47	0.86	N/A
UMTS Band 4	1 712.4 MHz~ 1 752.6 MHz	PCE	0.27	0.63	0.75	N/A
UMTS Band 2	1 852.4 MHz~ 1 907.6 MHz	PCE	0.41	0.62	1.10	N/A
LTE Band 2 (PCS)	1 850.7 MHz~ 1 909.3 MHz	PCE	0.68	0.51	0.76	2.67
LTE Band 4 (AWS)	1 710.7 MHz ~ 1 754.3 MHz	PCE	0.60	0.28	0.64	N/A
LTE Band 5 (Cell)	824.7 MHz~ 848.3 MHz	PCE	N/A	N/A	N/A	N/A
LTE Band 12	699.7 MHz~ 715.3 MHz	PCE	0.27	0.34	0.48	N/A
LTE Band 17	706.5 MHz~ 713.5 MHz	PCE	N/A	N/A	N/A	N/A
LTE Band 26(Cell)	814.7 MHz~ 848.3 MHz	PCE	0.39	0.41	0.61	N/A
LTE TDD Band 41	2 498.5 MHz ~ 2 687.5 MHz	PCE	0.17	0.26	0.65	N/A
LTE Band 66 (AWS)	1 710.7 MHz ~ 1 779.3 MHz	PCE	0.26	0.39	1.00	2.78
802.11b	2 412 MHz ~ 2 472 MHz	DTS	0.24	0.20	0.46	N/A
U-NII-1	5 180 MHz~ 5 240 MHz	NII	N/A	N/A	N/A	N/A
U-NII-2A	5 260 MHz~ 5 320 MHz	NII	<0.10	0.28	N/A	0.81
U-NII-2C	5 500 MHz~ 5 720 MHz	NII	<0.10	0.19	N/A	0.73
U-NII-3	5 745 MHz~ 5 825 MHz	NII	0.13	0.17	0.25	N/A
Bluetooth /LE	2 402 MHz ~ 2 480 MHz	DSS/DTS	0.37	<0.10	0.14	N/A
NFC	13.56 MHz	DXX	N/A	N/A	N/A	<0.10
Simultaneous SAR per KDB 690783 D01v01r03			1.12	0.968	1.42	3.59
Date(s) of Tests:	Dec. 26, 2022 ~ Jan. 17, 2023					

4. Device Under Test Description

4.1 DUT specification

Device Wireless specification overview		
Band & Mode	Operating Mode	Tx Frequency
GSM/GPRS/EDGE 850	Voice / Data	824.2 MHz~ 848.8 MHz
GSM/GPRS/EDGE	Voice / Data	1 850.2 MHz~ 1 909.8 MHz
UMTS Band 5	Voice / Data	826.4 MHz~ 846.6 MHz
UMTS Band 4	Voice / Data	1 712.4 MHz~ 1 752.6 MHz
UMTS Band 2	Voice / Data	1 852.4 MHz~ 1 907.6 MHz
LTE Band 2 (PCS)	Voice / Data	1 850.7 MHz~ 1 909.3 MHz
LTE Band 4 (AWS)	Voice / Data	1 710.7 MHz~ 1 754.3 MHz
LTE Band 5 (Cell)	Voice / Data	824.7 MHz~ 848.3 MHz
LTE Band 12	Voice / Data	699.7 MHz~ 715.3 MHz
LTE Band 17	Voice / Data	706.5 MHz~ 713.5 MHz
LTE Band 26	Voice / Data	814.7 MHz~ 848.3 MHz
LTE TDD Band 41	Voice / Data	2 498.5 MHz ~ 2 687.5 MHz
LTE Band 66 (AWS)	Voice / Data	1 710.7 MHz ~ 1 779.3 MHz
U-NII-1	Voice / Data	5 180 MHz ~ 5 240 MHz
U-NII-2A	Voice / Data	5 260 MHz ~ 5 320 MHz
U-NII-2C	Voice / Data	5 500 MHz ~ 5 720 MHz
U-NII-3	Voice / Data	5 745 MHz ~ 5 825 MHz
U-NII-4	Voice / Data	5 845 MHz ~ 5 885 MHz
2.4 GHz WLAN	Voice / Data	2 412 MHz ~ 2 472 MHz
Bluetooth 5.3	Data	2 402 MHz ~ 2 480 MHz
NFC	Data	13.56 MHz
Device Description		
HW version	REV1.0	
SW version	A546B.001	
Battery	EB-BA546ABY (ATL)	
Device Serial Numbers	Mode	Serial Number
	GSM 850, GSM 1900, UMTS Band 2, UMTS Band 4, UMTS Band 5	VK01132M
	LTE B2 UL CA Sub Ant2, LTE B4 UL CA Sub Ant2, LTE B12, LTE B66	VK01127M
	2.4 GHz WLAN, 5 GHz WLAN, Bluetooth	VL52199M
	LTE B2, LTE B4, LTE B41, LTE B66, NFC	VK01123M
The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics are within operational tolerances expected for production units.		

4.2 Power Reduction for SAR

This device utilizes power reduction mechanisms for some wireless modes and bands for SAR compliance under hotspot conditions and under some conditions when the device is being used in close proximity to the user’s hand. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when Hotspot is enabled. FCC KDB Publication 616217 D04v01r02 Sec.6 was used as a guideline for selection SAR test distances for device when being used in phablet use conditions.

This device uses an independent fixed level power reduction mechanism for WLAN operations when during all voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

The reduced powers for the power reduction mechanisms were conformed via conducted power measurements at the RF Port

4.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01v06.

4.3.1 2G/3G/4G/5G Nominal and Maximum, Reduced Output Power

A. GSM Modes

Maximum Output Power

Mode / Band		Voice	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
GSM/GPRS/EDGE 850	Maximum	34.5	34.5	31.5	30.0	28.5	27.5	25.5	24.0	22.5
	Nominal	33.5	33.5	30.5	29.0	27.5	26.5	24.5	23.0	21.5
GSM/GPRS/EDGE1900	Maximum	31.5	31.5	28.5	26.5	24.5	26.0	24.0	22.0	20.0
	Nominal	30.5	30.5	27.5	25.5	23.5	25.0	23.0	21.0	19.0

(Tolerance: Nominal +1 dB ~-1.5 dB)

B. UMTS Modes

Maximum Output Power

Mode/Band		ModulatedAverage(dBm)				
		3GPP RMC Rel 99	3GPP AMR Rel 99	3GPP Cat.5 HSDPA	3GPP Cat.6 HSUPA	3GPP Cat.8 DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	25.5	25.5	24.0	23.5	24.0
	Nominal	24.5	24.5	23.0	22.5	23.0
UMTS Band 4 (1700 MHz)	Maximum	24.5	22.5	23.5	23.0	23.5
	Nominal	23.5	21.5	22.5	22.0	22.5
UMTS Band 2 (1900 MHz)	Maximum	25.0	23.0	24.0	23.5	24.0
	Nominal	24.0	22.0	23.0	22.5	23.0

(Tolerance: Nominal +1 dB ~-1.5 dB)

Hotspot Mode / Earjack Insert Mode / Grip Sensor Mode

Mode/Band		ModulatedAverage(dBm)				
		3GPP RMC Rel 99	3GPP AMR Rel 99	3GPP Cat.5 HSDPA	3GPP Cat.6 HSUPA	3GPP Cat.8 DC-HSDPA
UMTS Band 4 (1700 MHz)	Maximum	22.5	22.5	22.5	22.0	22.5
	Nominal	21.5	21.5	21.5	21.0	21.5
UMTS Band 2 (1900 MHz)	Maximum	23.0	23.0	22.0	22.0	22.0
	Nominal	22.0	22.0	21.0	21.0	21.0

(Tolerance: Nominal +1 dB ~-1.5 dB)

C. LTE Modes

Mode / Band		Modulated Average (dBm)		
		Max.	Hotspot / Earjack Insert / Grip Sensor Mode	RCV on
LTE Band 2	Maximum	25.0	23.0	
	Nominal	24.0	22.0	
LTE Band 4	Maximum	25.0	23.0	
	Nominal	24.0	22.0	
LTE Band 5	Maximum	25.5		
	Nominal	24.5		
LTE Band 12	Maximum	25.5		
	Nominal	24.5		
LTE Band 17	Maximum	25.5		
	Nominal	24.5		
LTE Band 26	Maximum	25.5		
	Nominal	24.5		
LTE Band 41	Maximum	25.5		
	Nominal	24.5		
LTE Band 66	Maximum	25.0	23.0	
	Nominal	24.0	22.0	
LTE Band 2 (Upper)	Maximum	21.0		19.0
	Nominal	20.0		18.0
LTE Band 4 (Upper)	Maximum	21.0		19.0
	Nominal	20.0		18.0

(Tolerance: Nominal +1 dB ~-1.5 dB)

4.3.2 Maximum 2.4 GHz, 5 GHz WIFI output power

2.4 GHz, 5 GHz WIFI

Mode	Band	SISO(2.4G : ANT1 / 5G ANT 2)						MIMO					
		a	b	g	n	ac	ax(SU)	a	b	g	n	ac	ax(SU)
2.4GHz	2.45GHz		18	16	16		16		21	19	19		19
5GHz (20 MHz)	5200 MHz	16			16	16	16	19			19	19	19
	5300 MHz	16			16	16	16	19			19	19	19
	5500 MHz	16			16	16	16	19			19	19	19
	5800 MHz	16			16	16	16	19			19	16	19
5GHz (40 MHz)	5200 MHz				14	14	14				17	17	17
	5300 MHz				14	14	14				17	17	17
	5500 MHz				14	14	14				17	17	17
	5800 MHz				14	14	14				17	17	17
5GHz (80 MHz)	5200 MHz					11	11					14	14
	5300 MHz					11	11					14	14
	5500 MHz					11	11					14	14
	5800 MHz					11	11					14	14

(Tolerance: Target +1dB)

4.3.3 Reduced output power

2.4 GHz, 5 GHz WIFI (RCV On)

Mode	Band	SISO(2.4G : ANT1 / 5G ANT 2)						MIMO					
		a	b	g	n	ac	ax(SU)	a	b	g	n	ac	ax(SU)
2.4GHz	2.45GHz		12	12	12		12		15	15	15		15
5GHz (20 MHz)	5200 MHz	10			10	10	10	13			13	13	13
	5300 MHz	10			10	10	10	13			13	13	13
	5500 MHz	10			10	10	10	13			13	13	13
	5800 MHz	10			10	10	10	13			13	13	13
5GHz (40 MHz)	5200 MHz				10	10	10				13	13	13
	5300 MHz				10	10	10				13	13	13
	5500 MHz				10	10	10				13	13	13
	5800 MHz				10	10	10				13	13	13
5GHz (80 MHz)	5200 MHz					10	10					13	13
	5300 MHz					10	10					13	13
	5500 MHz					10	10					13	13
	5800 MHz					10	10					13	13

(Tolerance: Target +1dB)

4.3.4 802.11ax RU Tx power Tables

Mode	Band	SISO(2.4G : ANT1 / 5G ANT 2)						MIMO					
		26T	52T	106T	242T	484T	996T	26T	52T	106T	242T	484T	996T
2.4GHz	2.45GHz	9	9	9	9			12	12	12	12		
5GHZ (20 MHz)	5200 MHz	9	9	9	9			12	12	12	12		
	5300 MHz	9	9	9	9			12	12	12	12		
	5500 MHz	9	9	9	9			12	12	12	12		
	5800 MHz	9	9	9	9			12	12	12	12		
5GHZ (40 MHz)	5200 MHz	9	9	9	9	9		12	12	12	12	12	
	5300 MHz	9	9	9	9	9		12	12	12	12	12	
	5500 MHz	9	9	9	9	9		12	12	12	12	12	
	5800 MHz	9	9	9	9	9		12	12	12	12	12	
5GHZ (80 MHz)	5200 MHz	9	9	9	9	9	9	12	12	12	12	12	12
	5300 MHz	9	9	9	9	9	9	12	12	12	12	12	12
	5500 MHz	9	9	9	9	9	9	12	12	12	12	12	12
	5800 MHz	9	9	9	9	9	9	12	12	12	12	12	12

4.3.8 Maximum Bluetooth Power

Mode	ANT1		
Bluetooth(1Mbps)(in dBm)	2402	2441	2480
	14 (Ch0~8: 12)		14
Bluetooth(EDR)(in dBm)	2402	2441	2480
	10	10	10
Bluetooth LE Legacy(in dBm)	14 (Ch0~2: 12)		
Bluetooth LE Audio(in dBm)	2402	2440	2480
	14	14	14

(Tolerance: target +1.0dB)

4.4 LTE Information

Item.	Description	
Frequency Range	LTE Band 2 (PCS)	1 850.7 MHz ~ 1 909.3 MHz
	LTE Band 4 (AWS)	1 710.7 MHz ~ 1 754.3 MHz
	LTE Band 5 (Cell)	824.7 MHz ~ 848.3 MHz
	LTE Band 12	699.7 MHz ~ 715.3 MHz
	LTE Band 17	706.5 MHz ~ 713.5 MHz
	LTE Band 26 (Cell)	814.7 MHz ~ 848.3 MHz
	LTE TDD Band 41	2 498.5 MHz ~ 2 687.5 MHz
	LTE Band 66 (AWS)	1 710.7 MHz ~ 1 779.3 MHz
Channel Bandwidths	LTE Band 2 (PCS)	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz
	LTE Band 4 (AWS)	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz
	LTE Band 5 (Cell)	1.4 MHz, 3 MHz, 5 MHz, 10 MHz
	LTE Band 12	1.4 MHz, 3 MHz, 5 MHz, 10 MHz
	LTE Band 17	5 MHz, 10 MHz
	LTE Band 26 (Cell)	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz
	LTE TDD Band 41	5 MHz, 10 MHz, 15 MHz, 20 MHz
	LTE Band 66 (AWS)	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz

Ch. No.&Freq.(MHz)	Low	Mid	High	
LTE Band 2 (PCS)	1.4 MHz	1 850.7 (18607)	1 880.0 (18900)	1 909.3 (19193)
	3 MHz	1 851.5 (18615)	1 880.0 (18900)	1 908.5 (19185)
	5 MHz	1 852.5 (18625)	1 880.0 (18900)	1 907.5 (19175)
	10 MHz	1 855.0 (18650)	1 880.0 (18900)	1 905.0 (19150)
	15 MHz	1 857.5 (18675)	1 880.0 (18900)	1 902.5 (19125)
	20 MHz	1 860.0 (18700)	1 880.0 (18900)	1 900.0 (19100)
LTE Band 4 (AWS)	1.4 MHz	1 710.7 (19957)	1 732.5 (20175)	1 754.3 (20393)
	3 MHz	1 711.5 (19965)	1 732.5 (20175)	1 753.5 (20385)
	5 MHz	1 712.5 (19975)	1 732.5 (20175)	1 752.5 (20375)
	10 MHz	1 715.0 (20000)	1 732.5 (20175)	1 750.0 (20350)
	15 MHz	1 717.5 (20025)	1 732.5 (20175)	1 747.5 (20325)
	20 MHz	1 720 (20050)	1 732.5 (20175)	1 745 (20300)
LTE Band 5 (Cell)	1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
	3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
	5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
	10 MHz		836.5 (20525)	
LTE Band 12	1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)
	3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)
	5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)
	10 MHz		707.5 (23095)	
LTE Band 17	5 MHz	706.5 (23755)	710.0(23790)	713.5 (23825)
	10 MHz		710.0(23790)	

Ch. No.&Freq.(MHz)		Low		Mid		High	
LTE Band 26 (Cell)	1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)	
	3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)	
	5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)	
	10 MHz	819.0 (26740)		831.5 (26865)		844.0 (26990)	
	15 MHz			831.5 (26865)			
LTE TDD Band 41	5 MHz	2506.0(39750)	2549.5(40185)	2593.0(40620)	2636.5(41055)	2680.0(41490)	
	10 MHz	2506.0(39750)	2549.5(40185)	2593.0(40620)	2636.5(41055)	2680.0(41490)	
	15 MHz	2506.0(39750)	2549.5(40185)	2593.0(40620)	2636.5(41055)	2680.0(41490)	
	20 MHz	2506.0(39750)	2549.5(40185)	2593.0(40620)	2636.5(41055)	2680.0(41490)	
LTE Band 66 (AWS)	1.4 MHz	1 710.7 (131979)		1 745 (132322)		1 779.3 (132665)	
	3 MHz	1 711.5 (131987)		1 745 (132322)		1 778.5 (132657)	
	5 MHz	1 712.5 (131997)		1 745 (132322)		1 777.5 (132647)	
	10 MHz	1 715.0 (132022)		1 745 (132322)		1 775.0 (132622)	
	15 MHz	1 717.5 (132047)		1 745 (132322)		1 772.5 (132597)	
	20 MHz	1 720.0 (132072)		1 745 (132322)		1 770.0 (132572)	
UE Category		LTE Rel. 15 DL: Category 18, UL: Category 18					
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3		Yes					
A-MPR disabled for SAR Testing.		Yes					
LTE Carrier Aggregation		This device supports Inter-band & Intra-band DL-link Carrier aggregations and inter-band UL-link Carrier aggregations. Detailed information of Down-Link CA are included in the Appendix.I and Technical Description document					
LTE Release information		This device does not support full CA features on 3GPP Release 15. It supports carrier aggregation, downlink MIMO. All other uplink communications are identical to the release 8 specifications. The following LTE Release 15 Features are not supported: Relay, Hetnet, Enhanced eICI, MDH, cross-carrier Scheduling, Enhanced SC-FDMA.					

4.5 DUT Antenna Locations

The overall dimensions of this device are > 9 X 5 cm. A diagram showing device antenna can be found in SAR_setup_photos. Since the diagonal dimension of this device is > 160 mm and < 200 mm, it is considered a “phablet”.

This model allows users to exchange data or media files with other Bluetooth enabled devices using Bluetooth, which means they can connect to other Bluetooth enabled devices via Bluetooth tethering. Therefore, SAR test was performed for additional simultaneous transmissions.

Head and Bluetooth Tethering SAR were evaluated for BT BDR tethering applications.

Antenna	Mode	Rear	Front	Left	Right	Bottom	Top
Main1	GSM/GPRS/EDGE 850	Yes	Yes	Yes	Yes	Yes	No
Main2	GSM/GPRS/EDGE 1900	Yes	Yes	Yes	No	Yes	No
Main1	UMTS Band 5	Yes	Yes	Yes	Yes	Yes	No
Main2	UMTS Band 4	Yes	Yes	Yes	No	Yes	No
Main2	UMTS Band 2	Yes	Yes	Yes	No	Yes	No
Main2	LTE Band 2	Yes	Yes	Yes	No	Yes	No
Sub2	LTE Band 2 Upper	Yes	Yes	Yes	No	No	Yes
Main2	LTE Band 4	Yes	Yes	Yes	No	Yes	No
Sub2	LTE Band 4 UL CA Upper	Yes	Yes	Yes	No	No	Yes
Main1	LTE Band 5	Yes	Yes	Yes	Yes	Yes	No
Main1	LTE Band 12	Yes	Yes	Yes	Yes	Yes	No
Main1	LTE Band 17	Yes	Yes	Yes	Yes	Yes	No
Main1	LTE Band 26	Yes	Yes	Yes	Yes	Yes	No
Main2	LTE TDD Band 41	Yes	Yes	Yes	No	Yes	No
Main2	LTE Band 66	Yes	Yes	Yes	No	Yes	No
Sub5, Sub9	2.4 GHz WLAN	Yes	Yes	Yes	No	No	Yes
Sub4, Sub9	5 GHz WLAN	Yes	Yes	Yes	No	No	Yes
Sub5	Bluetooth	Yes	Yes	Yes	No	No	Yes
NFC	NFC	Yes	Yes	Yes	No	No	Yes

Particular EUT edges were not required to be evaluated for Bluetooth Tethering and Hotspot SAR if the edges were > 25 mm from the transmitting antenna according to FCC KDB 941225 D06v02r01 on page 2.

The distance between the transmit antennas and the edges of the device are included in the filing.

- Note: All test configurations are based on front view position.

4.6 Near Field Communications (NFC) Antenna

This EUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in SAR_Setup_photos.

4.7 SAR Summation Scenario

According to FCC KDB 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown below paths and are mode in same rectangle to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB 447498 D01v06.

Simultaneous Transmission Scenarios				
Applicable Combination	Head	BodyWorn	Hotspot	Extremity
WWAN + 2.4 GHz WI-FI Ant.1	Yes [^]	Yes	Yes	Yes [^]
WWAN + 2.4 GHz WI-FI MIMO	Yes	Yes	Yes	Yes
WWAN + 5 GHz WI-FI Ant.2	Yes [^]	Yes	Yes	Yes [^]
WWAN + 5 GHz WI-FI MIMO	Yes	Yes	Yes	Yes
WWAN + 2.4GHz Bluetooth	Yes	Yes	Yes [^]	Yes
WWAN + 5 GHz WI-FI Ant.2 + 2.4GHz Bluetooth	Yes [^]	Yes	Yes [^]	Yes [^]
WWAN + 5 GHz WI-FI MIMO + 2.4GHz Bluetooth	Yes [^]	Yes	Yes [^]	Yes [^]

Note:

1. Bluetooth cannot transmit simultaneously with 2.4GHz WLAN.
2. 5GHz WLAN can transmit simultaneously with Bluetooth.
3. UMTS +WLAN scenario also represents the UMTS Voice/DATA + WLAN hotspot scenario.
4. VoIP is supported in GPRS/EDGE.
5. The highest reported SAR for each exposure condition is used for SAR summation purpose.
6. WLAN Hotspot is supported for 2.4 GHz/UNII-3 of 5 GHz WLAN.
7. Per the manufacture, WIFI Direct is not expected to be used in conjunction with a held to ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
8. This device supports Bluetooth tethering. [^] Bluetooth Tethering is considered.
9. * Pre-installed VOIP applications are considered.
10. This device supports VoLTE/ VoWiFi.
11. NFC was evaluated for phablet based on expected usage conditions.

4.8 SAR Test Considerations

4.8.1 WiFi

Since wireless router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WiFi, WiFi Hotspot SAR test and combinations are considered only 2.4 GHz and U-NII-3 for SAR with respected to wireless router configurations according to FCC KDB 941225 D06v02r01.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg for 1g SAR and is less than 3.0 W/kg for 10g SAR, SAR is not required for U-NII-1 band according to FCC KDB 248227D01v02r02.

This device supports IEEE 802.11 ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2Tx Antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported for 5 GHz
- f) Straddle channels are supported.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WIFI, 2.4 GHz Bluetooth, and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

4.8.2 Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US Bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

LTE SAR for the higher modulations and lower Bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest Bandwidth; and the reported LTE SAR for the highest Bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r05.

Per FCC KDB 648474 D04v01r03, this device is considered a "Phablet" since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR >1.2 W/kg. When hotspot mode applies, 10g SAR required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1g SAR > 1.2 W/kg.

This Device supports 64QAM and 256QAM on the uplink and 256QAM on the downlink for LTE Operations. Conducted powers for 64QAM and 256QAM uplink configurations were measured per section 5.1 of FCC KDB 941225 D05v02r05. SAR was not required for 64QAM or 256QAM since the highest maximum output power for 64QAM and 256QAM is ≤ 0.5 dB higher than the same configuration in QPSK and the reported SAR for QPSK configuration is ≤ 1.45 W/kg, per section 5.2.4 for FCC KDB941225 D05v02r05.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive.

Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of LTE Band falls completely within an LTE Band with a larger transmission frequency range, both LTE bands have the same target power or the band with the larger transmission frequency range has a higher target power and both LTE bands share the same transmission path and signal characteristics, SAR was only tested for the band with the larger transmission frequency range.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB publication 941225 D05A v01r02, SAR for LTE DL CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

This device supports LTE Carrier Aggregation (CA) for LTE band 2/4 with two component carriers in the uplink. SAR measurements and conducted powers were evaluated per 2017 Fall TCBC Workshop Notes.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE Band 4 (1 710.7 MHz ~ 1 754.3 MHz) is covered by LTE Band 66 (1 710.7 MHz ~ 1 779.3 MHz) each both LTE bands have the same target powers

LTE Band 5 (824.7 MHz~ 848.3 MHz) is covered by LTE Band 26(814.7 MHz ~848.3 MHz) each both LTE bands have the same target powers

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

Per FCC KDB 941225 D01v03r01, 12.2 kbps RMC is the primary mode and HSPA (HSUPA/HSDPA with RMC) is the secondary mode.

Per FCC KDB 941225 D01v03r01, The SAR test exclusion is applied to the secondary mode by the following equation.

$$\text{Adjusted SAR} = \text{Highest Reported SAR} \times \frac{\text{Secondary Max tune-up (mW)}}{\text{Primary Max tune-up (mW)}} \leq 1.2 \text{ W/kg.}$$

Based on the highest Reported SAR, the secondary mode is not required

Per FCC KDB 690783 1 D01 SAR Listings on Grants v01r03 and KDB 447498 D01 General RF Exposure Guidance v06 The SAR numbers listed must be consistent with the highest reported test results required by the published RF exposure KDB procedures. When the measured SAR is not at the maximum tune-up tolerance limit or maximum output power allowed for production units, the measured results are scaled to the maximum conditions to determine compliance; the scaled results are referred to as the reported SAR.

$$\text{The Reported SAR} = \text{The Measured SAR} \times \frac{\text{Maximum tune-up (mW)}}{\text{Measured Conducted Power (mW)}}$$

The Reported SAR for WLAN and Bluetooth

$$\text{The Reported SAR} = \text{The Measured SAR} \times \frac{\text{Maximum tune-up (mW)}}{\text{Measured Conducted Power (mW)}} \times \text{Duty factor}$$

5. Introduction

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative of the incremental electromagnetic energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (r). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body.

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right)$$

Figure 1. SAR Mathematical Equation
SAR is expressed in units of Watts per Kilogram (W/kg)

Where:

- = conductivity of the tissue-simulant material (S/m)
- = mass density of the tissue-simulant material (kg/m³)
- = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

6. Description of test equipment

6.1 SAR MEASUREMENT SETUP

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure.2).

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC with Windows XP or Windows 7 is working with SAR Measurement system DASY4 & DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

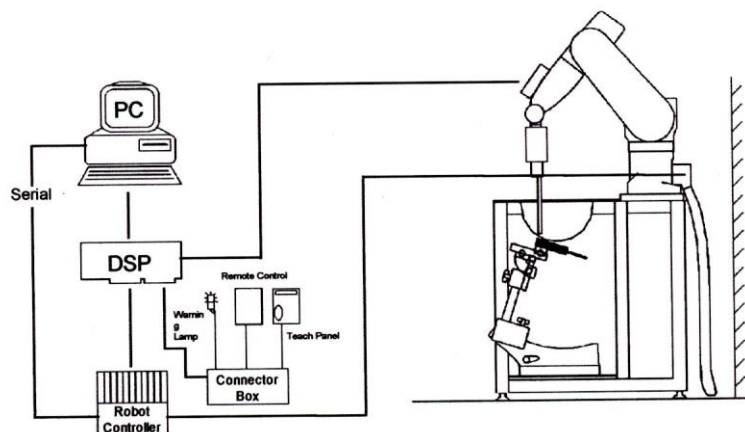


Figure 2. HCT SAR Lab. Test Measurement Set-up

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

7. SAR Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013.

1. The SAR distribution at the exposed side of the head or body was measured at a distance no more than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the DUT's head and body area and the horizontal grid resolution was depending on the FCC KDB 865664 D01v01r04 table 4-1 & IEEE 1528-2013.
2. Based on step, the area of the maximum absorption was determined by sophisticated interpolations routines implemented in DASY software. When an Area Scan has measured all reachable point. DASY system computes the field maximal found in the scanned are, within a range of the maximum. SAR at this fixed point was measured and used as a reference value.
3. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB 865664 D01v01r04 table 4-1 and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (reference from the DASY manual.)
 - a. The data at the surface were extrapolated, since the center of the dipoles is no more than 2.7 mm away from the tip of the probe (it is different from the probe type) and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan. If the value changed by more than 5 %, the SAR evaluation and drift measurements were repeated.

Area scan and zoom scan resolution setting follow KDB 865664 D01v01r04 quoted below.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\cdot \delta \cdot \ln(2) \pm 0.5$ mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan Spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2-3 GHz: ≤ 12 mm	3-4 GHz: ≤ 12 mm 4-6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan Spatial resolution: $\Delta x_{zoom}, \Delta y_{zoom}$		≤ 2 GHz: ≤ 8 mm 2-3 GHz: ≤ 5 mm*	3-4 GHz: ≤ 5 mm* 4-6 GHz: ≤ 4 mm*	
Maximum zoom scan Spatial resolution normal to phantom surface	uniform grid: $\Delta z_{zoom}(n)$	≤ 5 mm	3-4 GHz: ≤ 4 mm 4-5 GHz: ≤ 3 mm 5-6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{zoom}(1)$: between 1 st two Points closest to phantom surface	≤ 4 mm	3-4 GHz: ≤ 3 mm 4-5 GHz: ≤ 2.5 mm 5-6 GHz: ≤ 2 mm
		$\Delta z_{zoom}(n>1)$: between subsequent Points	$\leq 1.5 \cdot \Delta z_{zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3-4 GHz: ≥ 28 mm 4-5 GHz: ≥ 25 mm 5-6 GHz: ≥ 22 mm	
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				

8. Description of Test Position

8.1 EAR REFERENCE POINT

Figure 8-2 shows the front, back and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE.” Each ERP is on the B-M (back-mouth) line located 15 mm behind the entrance-to-ear-canal (EEC) point, as shown in Figure 6-1. The Reference Plane is defined as passing through the two ear reference point and point M. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (See Figure 5-1), Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.

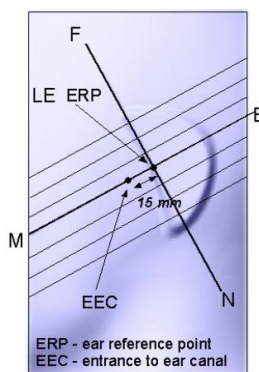


Figure 8-1
Close-up side view of ERP

8.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The device under test was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point”(see Figure 8-3). The acoustic output was then located at the same level as the center of the ear reference point. The device under test was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 8-2
Front, back and side views of SAM Twin Phantom

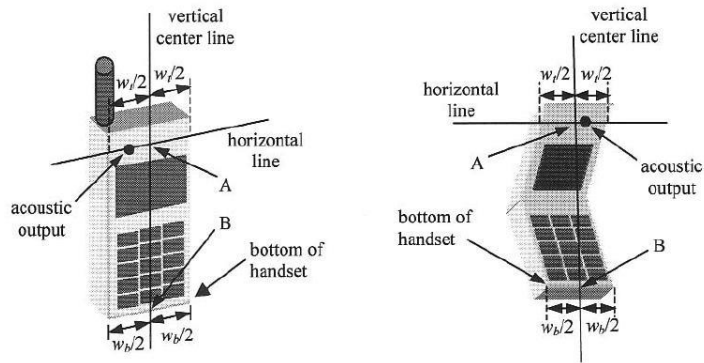


Figure 8-3. Handset vertical and horizontal reference lines

8.3 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameter; relative permittivity $\epsilon=3$ and loss tangent $\sigma=0.02$.

8.4 Position for cheek

Figure 6.4. shows cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

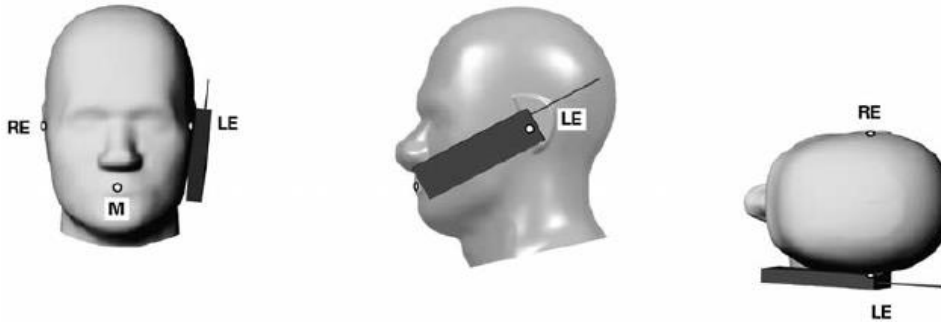


Figure 8-4 Cheek/ Touch position of the wireless device

8.5 Definition of the “tilted” position

Figure 8.5. shows tilted position. Place the device in the cheek position. Then while maintaining the orientation of the device, retract the device parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15°.

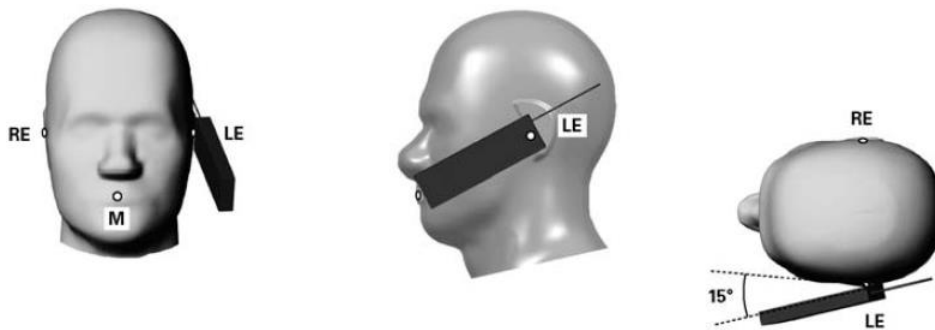


Figure 8.5. Tilt 15° position of the wireless device

8.6 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-dips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-6). Per FCC KDB Publication 648474 D04v01r03 Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in Body-worn accessories. The Body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for Body-worn accessory SAR compliance, without a headset connected to it.. When the reported SAR for a body- worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency Band should be repeated for that body-worn accessory with a headset attached to the handset.




Figure 8-6 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-dip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

8.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W \geq 9cmx5 cm) are based on a composite test separation distance of 10 mm from the front back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the Body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some Body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The Portable Hotspot feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

8.8 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions: i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear. the phablets procedures outlined in KDB Publication 648474 D04 v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna \leq 25 mm from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1-g SAR > 1.2 W/kg.

8.9 Additional Test Positions due to Proximity Conditions

This device uses a sensor to reduce output powers in extremity (hand-held) use conditions.

When the sensor detects a user is touching the device on or near to the antenna the device reduces the maximum allowed output power. However, the proximity sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

FCC KDB 616217 D04 v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional exposure conditions. The smallest separation distance determined by the sensor triggering and sensor coverage for each applicable edge, minus 1 mm, was used as the test separation distance for SAR testing. Sensor triggering distance summary data is included in below table.

Wireless technologies	Position	§6.2 Triggering Distance	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for Phablet SAR
UMTS B2/B4/ LTE B2/B4/B66/	Rear	11	N/A	N/A	10
	Front	7	N/A	N/A	6
	Bottom	13	N/A	N/A	12

8.10 Bluetooth tethering Configurations

Per May 2017 TCBC Workshop documents When Bluetooth tethering applies, simultaneous transmission SAR needs consideration.

This model allows users to exchange data or media files with other Bluetooth enabled devices using Bluetooth, which means they can connect to other Bluetooth enabled devices via Bluetooth tethering.

Therefore, SAR test was performed for additional simultaneous transmissions.

Head and Bluetooth tethering SAR were evaluated for BT BDR tethering applications.

9. RF Exposure Limits

HUMAN EXPOSURE	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Partial Body)	1.6	8.0
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.4
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.0	20.0

NOTES:

- * The Spatial Peak value of the SAR averaged over any 1 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole-body.
- *** The Spatial Peak value of the SAR averaged over any 10 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be mad fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

10. FCC SAR General Measurement Procedures

Power Measurements for licensed transmitters are performed using a base simulator under digital average power.

10.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as Reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

10.2 3G SAR Test Reduction Procedure

10.2.1 GSM, GPRS AND EDGE

The following procedures may be considered for each frequency Band to determine SAR test reduction for devices operating in GSM/GPRS/EDGE modes to demonstrate RF exposure compliance. GSM voice mode transmits with 1 time-slot. GPRS and EDGE may transmit up to 4 time slots in the 8 time-slot frame according to the multi-slot class implemented in a device.

10.2.2 SAR Test Reduction

In FCC KDB 941225 D01v03r01, certain transmission modes within a frequency Band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested

10.2.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB 941225 D01v03r01-3G SAR Measurement Procedures. The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluation SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement Software calculates a reference point at the start and end of the test to Check for power drifts. If conducted Power deviations of more than 5 % occurred, the tests were repeated.

10.3 SAR Measurement Conditions for UMTS

10.3.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in sec. 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

10.3.2 Body SAR measurements

SAR for body exposure configurations is measured using the 12.2kbps RMC with the TPC bits all “1s”. the 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using and applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported SAR configuration in 12.2kbps RMC.

10.3.3 SAR Measurements with Rel. 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using and FRC with H-SET 1 in Sub-test and a 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to release 6 HSPA test procedures. 8.4.5 SAR Measurement with Rel.6 HSUPA The 3G SAR test Reduction Procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, Using H-Set 1 and QPSK for FRC and a 12.2kbps RMC configured in Test Loop Mode 1 and Power Control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

10.3.4 SAR Measurements with Rel. 6 HSUPA


The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

10.3.5DC-HSDPA

SAR is required for Rel.8 DC-HSDPA when SAR is required for Rel.5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in table C.8.1.12 of 3GPP TS34.121-1 to determine SAR test reduction. Primary and secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

DC-HSDPA Configurations

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK)was conformed to be used during DC-HSDPA measurements.



10.4 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r05 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluation SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

10.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

10.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

10.4.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

10.4.4 Required RB Size and RB offsets for SAR testing

According to FCC KDB 941225 D05v02r05

- a. Per sec 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest Bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Sec 4.2.2, SAR is required for 50% RB allocation using the largest Bandwidth following the same procedures outlined in Sec 4.2.1.
- c. Per Sec. 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Sec. 4.2.4 and 4.3, SAR test for higher order modulations and lower Bandwidths configurations are not required when the conducted power of the required test configurations determined by Sec. 4.2.1 through 4.2.3 is less than or equal to 1/2 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

10.4.5 Downlink Carrier Aggregation

Conducted power measurements with LTE Carrier aggregation (CA) downlink only active are made in accordance to KDB publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output Powers are measured with downlink carrier aggregation active for the configuration with highest measured maximum conducted power with the downlink carrier aggregation inactive measured among the channel Bandwidth, modulation and RB combinations in each frequency Band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the

average output power with downlink only carrier aggregation active is not more than 0.25dB higher than the average output power with downlink only carrier aggregation inactive.

10.4.6 LTE(TDD) Considerations

According to KDB 941225 D05v02r05, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special subframe configuration 6. LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special sub frame configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$	-	-	-	-	-

Calculated Duty Cycle – Extended cyclic prefix in uplink x (T_s) x no of S + no of U

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $(5120 \times (1/(15000 \times 2048))) \times 2 + 0.006)/0.01 = 63.33 \%$

Where

$T_s = 1/(15000 \times 2048)$ seconds

10.4.7 The Call Box Setup for LTE(TDD)

When you Want to Test for LTE TDD, Please Change Frame Structure TDD and TDD Uplink Downlink Configuration 0 and Special Subframe Configuration 6.

2018/01/08 11:00 Idle(Regist) Phone-2 W-CDMA Phone-1 LTE
 <Fundamental Measurement> Output Main Continuous

Reference Signal not found UE Power : -21.5 dBm

Power Measurement (Meas. Count : 11/ 20)
 Avg. Max. Min. Limit
 TX Power ***** dBm 20.3 to 25.7 dBm
 Channel Power ***** dBm

Modulation Analysis View (Meas. Count : 1/ 1)

Common Parameter
 Test Parameter TX1 - Max. Power(QPSK/1 RB)

Call Processing On Scenario Normal

Frequency
 Frame Structure TDD
 Channel Bandwidth FDD Hz
 UL Channel & Frequency TDD 20 CH = 2593.000000 MHz
 DL Channel & Frequency 40620 CH = 2593.000000 MHz
 Operation Band 41
 Frequency Separation (0)MHz

Level
 Input Level 30.0 dBm

Parameter Common
 Physical Channel
 Call Processing
 TX Measurement Setup
 RX Measurement Setup
 Fundamental Measurement

2018/01/08 11:01 Idle(Regist) Phone-2 W-CDMA Phone-1 LTE
 <Fundamental Measurement> Output Main Continuous

Reference Signal not found UE Power : -21.5 dBm

Power Measurement (Meas. Count : 11/ 20)
 Avg. Max. Min. Limit
 TX Power ***** dBm 20.3 to 25.7 dBm
 Channel Power ***** dBm

Modulation Analysis View (Meas. Count : 1/ 1)

MCS Index (-) 5 (QPSK) (5) (2216) - -
 MCS Index (5) 5 (QPSK) (5) (1864) 4 -
 MCS Index (0) 5 (QPSK) (5) (2216) - 2
 MCS Index (1,6) N/A (----) (--) (----) - 2
 CFI 3

TDD subframe 0 1 2 3 4 5 6 7 8 9
 Uplink Downlink Configuration 0 : (5ms) D S U U U D S U U U
 Special Subframe Configuration 6

Physical Channel Parameter
 PSS Power 0.0 dB
 SSS Power 0.0 dB
 PBCH Power 0.0 dB
 PCFICH Power 0.0 dB
 PHICH Power 0.0 dB

Parameter Common
 Physical Channel
 Call Processing
 TX Measurement Setup
 RX Measurement Setup
 Fundamental Measurement

10.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

10.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR system to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

10.5.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII2A Bands, when the same maximum output power is specified for both Bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg for 1g SAR or > 3.0 W/kg for 10g SAR. When different maximum output powers are specified for the Bands, SAR measurement for the U-NII Band with the lower maximum output power is not required unless the highest reported SAR for the U-NII Band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two Bands, is > 1.2 W/kg for 1g SAR or > 3.0 W/kg for 10g SAR.

10.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 GHz – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 GHz – 5.65 GHz in U-NII-2C Band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless Band gap channels are permanently disabled, SAR must be considered for these channels.

10.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g SAR and ≤ 1.0 W/kg for 10g SAR, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR or all test positions are measured.

10.5.5 2.4 GHz SAR test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS is that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz Band, the Initial Test Configuration Procedures should be followed.

10.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz Bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency Band or aggregated Band, SAR is measured using the configuration with the largest channel Bandwidth, lowest order modulation and lowest data rate and lowest order 802.11 a/g/n/ac mode. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11 ac or 802.11g and 802.11n with the same channel Bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency Band or aggregated Band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

10.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 GHz and 5 GHz Bands, an initial test configuration is determined for each frequency Band and aggregated Band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency Band or aggregated Band, SAR is measured using the configuration(s) with the largest channel Bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

10.5.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency Band and aggregated Band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position on procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg for 1g SAR and ≤ 3.0 W/kg for 10g SAR, no additional SAR tests for the subsequent test configurations are required.

11. Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01v06.

Licensed Bands

Test Description	Test Procedure Used
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

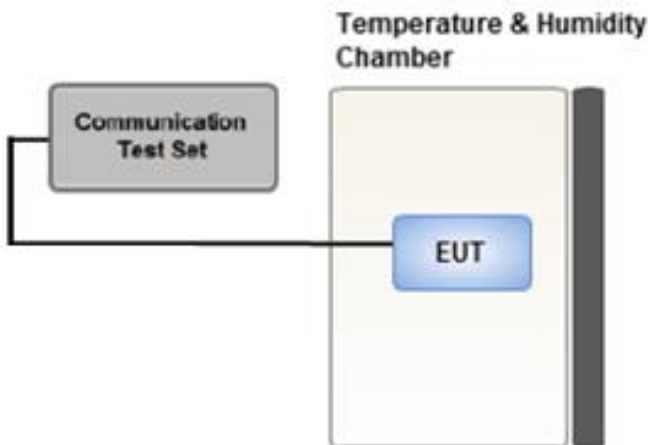

11.1 GSM

11.1.1 GSM Maximum Conducted Output Power

Mode / Band	Voice GSM	GPRS(GMSK) Data – CS1(dBm)				EDGE Data (dBm)				
		GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot	
Maximum	34.50	34.50	31.50	30.00	28.50	27.50	25.50	24.00	22.50	
Nominal	33.50	33.50	30.50	29.00	27.50	26.50	24.50	23.00	21.50	
GSM 850	128	33.69	33.66	31.23	29.43	27.88	26.51	24.54	22.94	21.51
	190	33.78	33.76	31.48	29.75	28.21	26.86	25.12	23.19	21.66
	251	33.78	33.77	31.52	29.66	27.98	26.79	24.92	23.12	21.47
Maximum	31.50	31.50	28.50	26.50	24.50	26.00	24.00	22.00	20.00	
Nominal	30.50	30.50	27.50	25.50	23.50	25.00	23.00	21.00	19.00	
GSM 1900	128	31.13	30.88	27.37	26.08	24.03	25.79	23.52	21.98	19.91
	190	30.93	30.91	27.50	26.18	23.89	25.50	23.32	21.80	19.97
	251	30.97	30.69	27.48	26.07	23.97	25.82	23.35	21.75	19.70

GSM Conducted output powers (Burst-Average)


Mode / Band	Voice GSM	GPRS(GMSK) Data – CS1(dBm)				EDGE Data (dBm)				
		GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot	
Maximum	25.47	25.47	25.48	25.74	25.49	18.47	19.48	19.74	19.49	
Nominal	24.47	24.47	24.48	24.74	24.49	17.47	18.48	18.74	18.49	
GSM 850	128	24.66	24.63	25.21	25.17	24.87	17.48	18.52	18.68	18.50
	190	24.75	24.73	25.46	25.49	25.20	17.83	19.10	18.93	18.65
	251	24.75	24.74	25.50	25.40	24.97	17.76	18.90	18.86	18.46
Maximum	22.47	22.47	22.48	22.24	21.49	16.97	17.98	17.74	16.99	
Nominal	21.47	21.47	21.48	21.24	20.49	15.97	16.98	16.74	15.99	
GSM 1900	512	22.10	21.85	21.35	21.82	21.02	16.76	17.50	17.72	16.90
	661	21.90	21.88	21.48	21.92	20.88	16.47	17.30	17.54	16.96
	810	21.94	21.66	21.46	21.81	20.96	16.79	17.33	17.49	16.69

GSM Conducted output powers (Frame-Average)

Note:

Time slot average factor is as follows:

- 1 Tx slot = 9.03 dB, Frame-Average output power = Burst-Average output power – 9.03 dB
- 2 Tx slot = 6.02 dB, Frame-Average output power = Burst-Average output power – 6.02 dB
- 3 Tx slot = 4.26 dB, Frame-Average output power = Burst-Average output power – 4.26 dB
- 4 Tx slot = 3.01 dB, Frame-Average output power = Burst-Average output power – 3.01 dB



11.2 UMTS

HSPA+

This DUT is only capable of QPSK HSPA+ in uplink. Therefore, the RF conducted power is not measured according to 941225 D01v03r01 3G SAR.

11.2.1 UMTS Maximum Conducted Output Power

UMTS Band 5 Maximum Conducted Output Power

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 5 [dBm]			3GPP MPR
		Subtest	UL4132 DL4357	UL4183 DL4408	UL4233 DL4458	
99	UMTS	12.2 kbps RMC	24.91	24.92	24.91	-
99		12.2 kbps AMR	23.53	23.52	23.56	-
2	HSDPA	Subtest 1	23.39	23.28	23.13	0
5		Subtest 2	22.68	22.68	22.64	0
5		Subtest 3	22.12	22.12	22.10	0.5
5		Subtest 4	21.67	21.61	21.61	0.5
6	HSUPA	Subtest 1	22.15	22.08	22.12	0
6		Subtest 2	20.19	20.14	20.13	2
6		Subtest 3	21.12	21.11	21.12	1
6		Subtest 4	20.14	20.12	20.14	2
6		Subtest 5	23.15	23.14	23.12	0
8	DC-HSDPA	Subtest1	23.09	22.99	22.86	0
8		Subtest2	22.40	22.33	22.26	0
8		Subtest3	21.21	21.12	21.06	0.5
8		Subtest4	21.36	21.27	21.21	0.5

UMTS Average Conducted output powers

UMTS Band 4 Maximum Conducted Output Power

3GPP Release Version	Mode	3GPP 34.121	UMTS Band4 [dBm]			3GPP MPR
		Subtest	UL 1312 DL 1537	UL 1412 DL 1637	UL 1513 DL 1738	
99	UMTS	12.2 kbps RMC	23.40	23.20	23.28	-
99		12.2 kbps AMR	21.64	21.42	21.41	-
2	HSDPA	Subtest 1	22.93	22.69	22.73	0
5		Subtest 2	22.44	22.19	22.29	0
5		Subtest 3	21.94	21.67	21.78	0.5
5		Subtest 4	20.63	20.53	20.52	0.5
6	HSUPA	Subtest 1	21.88	21.64	21.23	0
6		Subtest 2	19.32	19.06	19.12	2
6		Subtest 3	21.76	21.62	21.69	1
6		Subtest 4	19.50	19.26	18.63	2
6		Subtest 5	22.77	22.56	22.63	0
8	DC-HSDPA	Subtest1	22.88	22.68	22.80	0
8		Subtest2	22.23	22.23	22.30	0
8		Subtest3	21.59	21.43	21.50	0.5
8		Subtest4	21.07	21.02	21.05	0.5

UMTS Average Conducted output powers

UMTS Band 2 Maximum Conducted Output Power

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 2 [dBm]			3GPP MPR
		Subtest	UL9262 DL9662	UL9400 DL9800	UL9538 DL9938	
99	UMTS	12.2 kbps RMC	23.75	23.68	23.51	-
99		12.2 kbps AMR	21.64	21.62	21.43	-
2	HSDPA	Subtest 1	23.44	23.20	23.32	0
5		Subtest 2	22.97	22.80	22.98	0
5		Subtest 3	22.40	22.32	22.38	0.5
5		Subtest 4	21.86	21.84	21.84	0.5
6	HSUPA	Subtest 1	22.42	22.28	22.08	0
6		Subtest 2	19.78	19.68	19.49	2
6		Subtest 3	22.33	22.21	22.02	1
6		Subtest 4	20.12	20.01	19.83	2
6		Subtest 5	23.10	23.10	22.92	0
8	DC-HSDPA	Subtest 1	23.58	23.34	23.43	0
8		Subtest2	22.92	22.70	22.68	0
8		Subtest3	22.08	21.86	21.87	0.5
8		Subtest4	21.85	21.76	21.72	0.5

UMTS Average Conducted output powers

DC-HSDPA Configurations

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK)was conformed to be used during DC-HSDPA measurements.



11.2.2 UMTS Reduced Conducted Output Power (Hotspot mode activated)

UMTS Band 4

3GPP Release Version	Mode	3GPP 34.121	UMTS Band4 [dBm]			3GPP MPR
		Subtest	UL 1312 DL 1537	UL 1412 DL 1637	UL 1513 DL 1738	
99	UMTS	12.2 kbps RMC	21.61	21.20	21.29	-
99		12.2 kbps AMR	21.63	21.21	21.20	-
2	HSDPA	Subtest 1	21.26	21.01	21.07	0
5		Subtest 2	21.28	20.90	21.08	0
5		Subtest 3	21.27	21.05	21.10	0.5
5		Subtest 4	20.47	20.23	20.31	0.5
6	HSUPA	Subtest 1	20.08	19.83	19.92	0
6		Subtest 2	19.28	19.00	19.09	2
6		Subtest 3	20.08	19.84	19.91	1
6		Subtest 4	19.56	19.30	18.68	2
6		Subtest 5	21.04	20.81	20.89	0
8	DC-HSDPA	Subtest 1	21.19	21.01	21.16	0
8		Subtest2	21.26	21.08	21.18	0
8		Subtest3	21.20	21.07	21.14	0.5
8		Subtest4	20.66	20.58	20.61	0.5

UMTS Average Conducted output powers


UMTS Band 2

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 2 [dBm]			3GPP MPR
		Subtest	UL9262 DL9662	UL9400 DL9800	UL9538 DL9938	
99	UMTS	12.2 kbps RMC	21.38	21.44	21.22	-
99		12.2 kbps AMR	21.43	21.41	21.22	-
2	HSDPA	Subtest 1	21.45	21.38	21.13	0
5		Subtest 2	21.42	21.36	21.11	0
5		Subtest 3	21.44	21.34	21.14	0
5		Subtest 4	21.42	21.38	21.16	0
6	HSUPA	Subtest 1	20.45	20.24	20.02	0
6		Subtest 2	19.56	19.43	19.27	1
6		Subtest 3	20.31	20.21	20.03	1
6		Subtest 4	19.97	19.84	19.69	1
6		Subtest 5	21.24	21.15	20.97	0
8	DC-HSDPA	Subtest 1	21.48	21.35	21.21	0
8		Subtest2	21.41	21.30	21.24	0
8		Subtest3	21.38	21.29	21.25	0
8		Subtest4	21.31	21.25	21.18	0

UMTS Average Conducted output powers

DC-HSDPA Configurations

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK) was conformed to be used during DC-HSDPA measurements.



11.2.3 UMTS Reduced Conducted Output Power – (Grip back Activated/ Ear jack Activated)

UMTS Band 4

3GPP Release Version	Mode	3GPP 34.121	UMTS Band4 [dBm]			3GPP MPR
		Subtest	UL 1312 DL 1537	UL 1412 DL 1637	UL 1513 DL 1738	
99	UMTS	12.2 kbps RMC	21.58	21.17	21.27	-
99		12.2 kbps AMR	21.61	21.18	21.18	-
2	HSDPA	Subtest 1	21.24	20.98	21.05	0
5		Subtest 2	21.26	20.88	21.06	0
5		Subtest 3	21.24	21.02	21.08	0.5
5		Subtest 4	20.44	20.20	20.28	0.5
6	HSUPA	Subtest 1	20.05	19.81	19.89	0
6		Subtest 2	19.26	18.97	19.06	2
6		Subtest 3	20.05	19.82	19.88	1
6		Subtest 4	19.54	19.27	18.65	2
6		Subtest 5	21.01	20.78	20.87	0
8	DC-HSDPA	Subtest 1	21.16	20.99	21.13	0
8		Subtest2	21.24	21.05	21.15	0
8		Subtest3	21.17	21.04	21.11	0.5
8		Subtest4	20.64	20.56	20.58	0.5


UMTS Average Conducted output powers

UMTS Band 2

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 2 [dBm]			3GPP MPR
		Subtest	UL9262 DL9662	UL9400 DL9800	UL9538 DL9938	
99	UMTS	12.2 kbps RMC	21.31	21.38	21.17	-
99		12.2 kbps AMR	21.39	21.38	21.15	-
2	HSDPA	Subtest 1	21.41	21.34	21.05	0
5		Subtest 2	21.37	21.28	21.03	0
5		Subtest 3	21.38	21.31	21.08	0
5		Subtest 4	21.39	21.30	21.13	0
6	HSUPA	Subtest 1	20.41	20.21	19.98	0
6		Subtest 2	19.48	19.36	19.22	1
6		Subtest 3	20.28	20.14	19.95	1
6		Subtest 4	19.90	19.81	19.65	1
6		Subtest 5	21.20	21.07	20.90	0
8	DC-HSDPA	Subtest 1	21.44	21.28	21.16	0
8		Subtest2	21.38	21.23	21.20	0
8		Subtest3	21.34	21.26	21.18	0
8		Subtest4	21.24	21.21	21.11	0

UMTS Average Conducted output powers

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK) was conformed to be used during DC-HSDPA measurements.



11.3 LTE Maximum Output Power

LTE B4/5/12/17/26 at 20 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing.

11.3.1 LTE Maximum Conducted Power

[LTE Band 2 Conducted Power]

LTE Band 2 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18607 Ch. 1850.7 MHz	18900 Ch. 1880 MHz	19193 Ch. 1909.3 MHz		
1.4 MHz	QPSK	1	0	24.29	24.24	24.00	0	0
		1	3	24.22	24.19	24.02	0	0
		1	5	24.31	24.32	24.14	0	0
		3	0	24.38	24.44	24.21	0	0
		3	1	24.40	24.41	24.21	0	0
		3	3	24.33	24.34	24.17	0	0
	16QAM	6	0	23.43	23.36	23.26	0-1	1
		1	0	23.55	23.56	23.21	0-1	1
		1	3	23.57	23.51	23.21	0-1	1
		1	5	23.62	23.48	23.31	0-1	1
		3	0	23.38	23.51	23.31	0-1	1
		3	1	23.40	23.49	23.26	0-1	1
	64QAM	3	3	23.38	23.42	23.23	0-1	1
		6	0	22.53	22.39	22.15	0-2	2
		1	0	22.29	22.55	22.20	0-2	2
		1	3	22.35	22.33	22.16	0-2	2
		1	5	22.35	22.45	22.28	0-2	2
		3	0	22.34	22.31	22.13	0-2	2
	256QAM	3	1	22.31	22.28	22.06	0-2	2
		3	3	22.29	22.23	22.04	0-2	2
		6	0	21.35	21.33	21.13	0-3	3
		1	0	19.56	19.48	19.28	0-5	5
		1	3	19.49	19.31	19.16	0-5	5
		1	5	19.59	19.47	19.15	0-5	5
		3	0	19.47	19.35	19.14	0-5	5
		3	1	19.47	19.35	19.21	0-5	5
		3	3	19.49	19.35	19.16	0-5	5
6		0	19.47	19.33	19.14	0-5	5	

LTE Band 2 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18615 Ch. 1851.5 MHz	18900 Ch. 1880 MHz	19185 Ch. 1908.5 MHz		
3 MHz	QPSK	1	0	24.15	24.37	24.10	0	0
		1	7	24.57	24.43	24.28	0	0
		1	14	24.45	24.35	24.20	0	0
		8	0	23.55	23.49	23.34	0-1	1
		8	3	23.54	23.43	23.27	0-1	1
		8	7	23.50	23.50	23.30	0-1	1
		15	0	23.56	23.49	23.28	0-1	1
	16QAM	1	0	23.59	23.61	23.30	0-1	1
		1	7	23.71	23.65	23.54	0-1	1
		1	14	23.59	23.53	23.25	0-1	1
		8	0	22.45	22.49	22.26	0-2	2
		8	3	22.42	22.41	22.20	0-2	2
		8	7	22.45	22.44	22.22	0-2	2
		15	0	22.44	22.39	22.18	0-2	2
	64QAM	1	0	22.53	22.54	22.25	0-2	2
		1	7	22.45	22.61	22.17	0-2	2
		1	14	22.38	22.42	22.20	0-2	2
		8	0	21.52	21.43	21.21	0-3	3
		8	3	21.46	21.40	21.18	0-3	3
		8	7	21.49	21.44	21.22	0-3	3
		15	0	21.48	21.44	21.19	0-3	3
	256QAM	1	0	19.60	19.42	19.25	0-5	5
		1	7	19.75	19.52	19.41	0-5	5
		1	14	19.58	19.55	19.26	0-5	5
8		0	19.53	19.46	19.29	0-5	5	
8		3	19.48	19.43	19.28	0-5	5	
8		7	19.56	19.51	19.29	0-5	5	
15		0	19.49	19.42	19.26	0-5	5	

LTE Band 2 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18625 Ch. 1852.5 MHz	18900 Ch. 1880 MHz	19175 Ch. 1907.5 MHz		
5 MHz	QPSK	1	0	24.39	24.18	24.03	0	0
		1	12	24.48	24.38	24.19	0	0
		1	24	24.45	24.39	24.19	0	0
		12	0	23.48	23.47	23.26	0-1	1
		12	6	23.49	23.45	23.25	0-1	1
		12	11	23.50	23.49	23.27	0-1	1
	16QAM	25	0	23.66	23.62	23.43	0-1	1
		1	0	23.54	23.57	23.33	0-1	1
		1	12	23.70	23.65	23.41	0-1	1
		1	24	23.54	23.60	23.36	0-1	1
		12	0	22.46	22.43	22.19	0-2	2
		12	6	22.42	22.42	22.12	0-2	2
	64QAM	12	11	22.41	22.40	22.15	0-2	2
		25	0	22.51	22.52	22.33	0-2	2
		1	0	22.49	22.50	22.24	0-2	2
		1	12	22.43	22.52	22.24	0-2	2
		1	24	22.47	22.49	22.17	0-2	2
		12	0	21.39	21.49	21.16	0-3	3
	256QAM	12	6	21.42	21.42	21.17	0-3	3
		12	11	21.37	21.41	21.16	0-3	3
		25	0	21.47	21.45	21.24	0-3	3
		1	0	19.59	19.64	19.37	0-5	5
		1	12	19.66	19.66	19.23	0-5	5
		1	24	19.54	19.59	19.39	0-5	5
		12	0	19.44	19.46	19.24	0-5	5
		12	6	19.44	19.43	19.21	0-5	5
		12	11	19.43	19.39	19.22	0-5	5
25		0	19.50	19.49	19.23	0-5	5	

LTE Band 2 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18650 Ch. 1855 MHz	18900 Ch. 1880 MHz	19150 Ch. 1905 MHz		
10 MHz	QPSK	1	0	24.49	24.36	24.22	0	0
		1	24	24.54	24.52	24.35	0	0
		1	49	24.46	24.40	24.25	0	0
		25	0	23.72	23.60	23.47	0-1	1
		25	12	23.67	23.59	23.50	0-1	1
		25	24	23.70	23.63	23.55	0-1	1
	16QAM	50	0	23.78	23.67	23.60	0-1	1
		1	0	23.53	23.57	23.51	0-1	1
		1	24	23.64	23.82	23.66	0-1	1
		1	49	23.59	23.69	23.37	0-1	1
		25	0	22.60	22.58	22.49	0-2	2
		25	12	22.56	22.51	22.43	0-2	2
	64QAM	25	24	22.55	22.52	22.43	0-2	2
		50	0	22.59	22.57	22.44	0-2	2
		1	0	22.46	22.60	22.53	0-2	2
		1	24	22.42	22.47	22.49	0-2	2
		1	49	22.45	22.52	22.34	0-2	2
		25	0	21.51	21.43	21.34	0-3	3
	256QAM	25	12	21.51	21.47	21.33	0-3	3
		25	24	21.47	21.45	21.34	0-3	3
		50	0	21.56	21.53	21.41	0-3	3
		1	0	19.62	19.50	19.44	0-5	5
		1	24	19.79	19.65	19.42	0-5	5
		1	49	19.57	19.55	19.42	0-5	5
	25	0	19.53	19.43	19.37	0-5	5	
	25	12	19.54	19.42	19.36	0-5	5	
	25	24	19.55	19.46	19.34	0-5	5	
	50	0	19.53	19.43	19.35	0-5	5	

LTE Band 2 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18675 Ch. 1857.5 MHz	18900 Ch. 1880 MHz	19125 Ch. 1902.5 MHz		
15 MHz	QPSK	1	0	24.34	24.27	24.34	0	0
		1	36	24.43	24.37	24.36	0	0
		1	74	24.43	24.40	24.36	0	0
		36	0	23.54	23.54	23.49	0-1	1
		36	18	23.54	23.58	23.49	0-1	1
		36	39	23.54	23.61	23.50	0-1	1
		75	0	23.60	23.59	23.51	0-1	1
	16QAM	1	0	23.45	23.36	23.55	0-1	1
		1	36	23.45	23.75	23.43	0-1	1
		1	74	23.52	23.53	23.46	0-1	1
		36	0	22.41	22.55	22.44	0-2	2
		36	18	22.39	22.48	22.40	0-2	2
		36	39	22.41	22.46	22.35	0-2	2
		75	0	22.47	22.48	22.41	0-2	2
	64QAM	1	0	22.53	22.65	22.44	0-2	2
		1	36	22.35	22.72	22.50	0-2	2
		1	74	22.41	22.50	22.36	0-2	2
		36	0	21.42	21.51	21.41	0-3	3
		36	18	21.38	21.52	21.38	0-3	3
		36	39	21.42	21.47	21.35	0-3	3
		75	0	21.40	21.43	21.33	0-3	3
	256QAM	1	0	19.61	19.48	19.58	0-5	5
		1	36	19.51	19.63	19.36	0-5	5
		1	74	19.41	19.56	19.52	0-5	5
36		0	19.43	19.53	19.42	0-5	5	
36		18	19.47	19.49	19.39	0-5	5	
36		39	19.46	19.52	19.44	0-5	5	
75		0	19.46	19.50	19.41	0-5	5	

LTE Band 2 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	24.55	24.37	24.34	0	0
		1	49	24.64	24.53	24.54	0	0
		1	99	24.55	24.43	24.45	0	0
		50	0	23.85	23.76	23.69	0-1	1
		50	25	23.81	23.74	23.73	0-1	1
		50	49	23.78	23.71	23.80	0-1	1
	100	0	23.72	23.69	23.73	0-1	1	
	16QAM	1	0	23.68	23.63	23.67	0-1	1
		1	49	23.75	23.91	23.91	0-1	1
		1	99	23.64	23.63	23.61	0-1	1
		50	0	22.68	22.70	22.70	0-2	2
		50	25	22.65	22.68	22.69	0-2	2
		50	49	22.65	22.66	22.68	0-2	2
	100	0	22.57	22.58	22.64	0-2	2	
	64QAM	1	0	22.54	22.73	22.64	0-2	2
		1	49	22.75	22.55	22.78	0-2	2
		1	99	22.69	22.55	22.50	0-2	2
		50	0	21.64	21.63	21.64	0-3	3
		50	25	21.57	21.63	21.65	0-3	3
		50	49	21.62	21.62	21.62	0-3	3
	100	0	21.54	21.53	21.58	0-3	3	
	256QAM	1	0	19.58	19.60	19.58	0-5	5
		1	49	19.61	19.66	19.74	0-5	5
		1	99	19.71	19.66	19.66	0-5	5
50		0	19.57	19.55	19.58	0-5	5	
50		25	19.55	19.57	19.61	0-5	5	
50		49	19.56	19.61	19.59	0-5	5	
100	0	19.55	19.59	19.57	0-5	5		

[LTE Band 4 Conducted Power]

LTE Band 4 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19957 Ch. 1710.7 MHz	20175 Ch. 1732.5 MHz	20393 Ch. 1754.3 MHz		
1.4 MHz	QPSK	1	0	23.09	22.95	23.13	0	0
		1	3	23.11	22.88	23.11	0	0
		1	5	23.31	23.06	23.24	0	0
		3	0	23.38	23.12	23.29	0	0
		3	1	23.37	23.13	23.21	0	0
		3	3	23.34	23.05	23.20	0	0
	16QAM	6	0	22.40	22.10	22.23	0-1	1
		1	0	22.48	22.03	22.21	0-1	1
		1	3	22.45	22.22	22.25	0-1	1
		1	5	22.36	22.24	22.36	0-1	1
		3	0	22.39	22.22	22.36	0-1	1
		3	1	22.30	22.11	22.28	0-1	1
	64QAM	3	3	22.33	22.18	22.25	0-1	1
		6	0	21.44	21.16	21.34	0-2	2
		1	0	21.45	21.23	21.37	0-2	2
		1	3	21.34	21.17	21.28	0-2	2
		1	5	21.44	21.24	21.34	0-2	2
		3	0	21.41	21.08	21.23	0-2	2
	256QAM	3	1	21.38	21.11	21.27	0-2	2
		3	3	21.36	21.10	21.23	0-2	2
		6	0	20.34	20.05	20.18	0-3	3
		1	0	18.57	18.15	18.31	0-5	5
		1	3	18.48	18.04	18.30	0-5	5
		1	5	18.52	18.19	18.37	0-5	5
	3	0	18.43	18.14	18.22	0-5	5	
	3	1	18.48	18.16	18.26	0-5	5	
	3	3	18.43	18.12	18.27	0-5	5	
	6	0	18.44	18.11	18.20	0-5	5	

LTE Band 4 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19965 Ch. 1711.5 MHz	20175 Ch. 1732.5 MHz	20385 Ch. 1753.5 MHz		
3 MHz	QPSK	1	0	23.33	23.26	23.10	0	0
		1	7	23.54	23.45	23.39	0	0
		1	14	23.35	23.24	23.18	0	0
		8	0	22.40	22.34	22.30	0-1	1
		8	3	22.43	22.33	22.27	0-1	1
		8	7	22.52	22.41	22.34	0-1	1
	15	0	22.45	22.35	22.34	0-1	1	
	16QAM	1	0	22.46	22.45	22.34	0-1	1
		1	7	22.53	22.51	22.51	0-1	1
		1	14	22.54	22.47	22.47	0-1	1
		8	0	21.49	21.41	21.34	0-2	2
		8	3	21.39	21.39	21.31	0-2	2
		8	7	21.49	21.36	21.32	0-2	2
	64QAM	15	0	21.43	21.31	21.27	0-2	2
		1	0	21.54	21.40	21.44	0-2	2
		1	7	21.72	21.43	21.46	0-2	2
		1	14	21.54	21.34	21.40	0-2	2
		8	0	20.46	20.26	20.24	0-3	3
		8	3	20.40	20.26	20.19	0-3	3
	256QAM	8	7	20.39	20.22	20.21	0-3	3
		15	0	20.38	20.20	20.17	0-3	3
		1	0	18.45	18.34	18.41	0-5	5
		1	7	18.53	18.56	18.45	0-5	5
		1	14	18.66	18.44	18.30	0-5	5
		8	0	18.52	18.33	18.33	0-5	5
		8	3	18.45	18.34	18.24	0-5	5
		8	7	18.56	18.37	18.32	0-5	5
15		0	18.45	18.33	18.27	0-5	5	

LTE Band 4 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19975 Ch. 1712.5 MHz	20175 Ch. 1732.5 MHz	20375 Ch. 1752.5 MHz		
5 MHz	QPSK	1	0	23.12	22.92	23.36	0	0
		1	12	23.52	23.29	23.54	0	0
		1	24	23.41	23.11	23.45	0	0
		12	0	22.38	22.14	22.44	0-1	1
		12	6	22.42	22.17	22.40	0-1	1
		12	11	22.43	22.18	22.43	0-1	1
	16QAM	25	0	22.55	22.22	22.49	0-1	1
		1	0	22.41	22.31	22.52	0-1	1
		1	12	22.57	22.22	22.51	0-1	1
		1	24	22.60	22.31	22.47	0-1	1
		12	0	21.44	21.16	21.40	0-2	2
		12	6	21.42	21.15	21.39	0-2	2
	64QAM	12	11	21.42	21.14	21.42	0-2	2
		25	0	21.48	21.15	21.41	0-2	2
		1	0	21.48	21.31	21.40	0-2	2
		1	12	21.65	21.30	21.47	0-2	2
		1	24	21.58	21.34	21.58	0-2	2
		12	0	20.44	20.10	20.37	0-3	3
	256QAM	12	6	20.37	20.08	20.35	0-3	3
		12	11	20.40	20.08	20.38	0-3	3
		25	0	20.44	20.10	20.34	0-3	3
		1	0	18.67	18.24	18.53	0-5	5
		1	12	18.61	18.34	18.56	0-5	5
		1	24	18.59	18.24	18.47	0-5	5
	12	0	18.44	18.13	18.35	0-5	5	
	12	6	18.47	18.12	18.36	0-5	5	
	12	11	18.47	18.12	18.37	0-5	5	
	25	0	18.48	18.16	18.41	0-5	5	

LTE Band 4 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20000 Ch. 1715 MHz	20175 Ch. 1732.5 MHz	20350 Ch. 1750 MHz		
10 MHz	QPSK	1	0	22.80	23.36	23.25	0	0
		1	24	23.48	23.50	23.44	0	0
		1	49	23.64	23.35	23.34	0	0
		25	0	22.74	22.49	22.45	0-1	1
		25	12	22.73	22.49	22.43	0-1	1
		25	24	22.76	22.51	22.50	0-1	1
	16QAM	50	0	22.79	22.54	22.52	0-1	1
		1	0	22.52	22.52	22.43	0-1	1
		1	24	22.86	22.65	22.65	0-1	1
		1	49	22.65	22.62	22.55	0-1	1
		25	0	21.59	21.45	21.44	0-2	2
		25	12	21.60	21.46	21.37	0-2	2
	64QAM	25	24	21.62	21.45	21.41	0-2	2
		50	0	21.58	21.47	21.42	0-2	2
		1	0	21.55	21.36	21.46	0-2	2
		1	24	21.68	21.59	21.47	0-2	2
		1	49	21.73	21.51	21.48	0-2	2
		25	0	20.47	20.37	20.32	0-3	3
	256QAM	25	12	20.49	20.32	20.31	0-3	3
		25	24	20.50	20.32	20.31	0-3	3
		50	0	20.55	20.39	20.37	0-3	3
		1	0	18.63	18.48	18.33	0-5	5
		1	24	18.78	18.51	18.41	0-5	5
		1	49	18.66	18.52	18.47	0-5	5
	25	0	18.52	18.37	18.34	0-5	5	
	25	12	18.51	18.39	18.36	0-5	5	
	25	24	18.57	18.40	18.40	0-5	5	
	50	0	18.53	18.39	18.31	0-5	5	

LTE Band 4 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20025 Ch. 1717.5 MHz	20175 Ch. 1732.5 MHz	20325 Ch. 1747.5 MHz		
15 MHz	QPSK	1	0	22.80	22.97	23.28	0	0
		1	36	23.56	23.28	23.46	0	0
		1	74	23.54	23.16	23.44	0	0
		36	0	22.56	22.21	22.41	0-1	1
		36	18	22.53	22.24	22.44	0-1	1
		36	39	22.52	22.26	22.41	0-1	1
	16QAM	75	0	22.56	22.27	22.43	0-1	1
		1	0	22.15	22.28	22.41	0-1	1
		1	36	22.68	22.41	22.47	0-1	1
		1	74	22.59	22.31	22.48	0-1	1
		36	0	21.42	21.17	21.36	0-2	2
		36	18	21.44	21.16	21.33	0-2	2
	64QAM	36	39	21.46	21.20	21.39	0-2	2
		75	0	21.44	21.20	21.33	0-2	2
		1	0	21.37	21.30	21.48	0-2	2
		1	36	21.67	21.33	21.57	0-2	2
		1	74	21.64	21.27	21.56	0-2	2
		36	0	20.39	20.14	20.33	0-3	3
	256QAM	36	18	20.40	20.13	20.32	0-3	3
		36	39	20.43	20.15	20.36	0-3	3
		75	0	20.39	20.12	20.31	0-3	3
		1	0	18.43	18.19	18.37	0-5	5
		1	36	18.60	18.24	18.43	0-5	5
		1	74	18.62	18.38	18.50	0-5	5
		36	0	18.44	18.19	18.34	0-5	5
		36	18	18.45	18.16	18.37	0-5	5
		36	39	18.47	18.22	18.36	0-5	5
75		0	18.45	18.21	18.37	0-5	5	

LTE Band 4 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20050 Ch. 1720 MHz	20175 Ch. 1732.5 MHz	20300 Ch. 1745 MHz		
20 MHz	QPSK	1	0	23.02	22.95	23.24	0	0
		1	49	23.34	23.23	23.42	0	0
		1	99	23.25	23.08	23.32	0	0
		50	0	22.41	22.24	22.41	0-1	1
		50	25	22.40	22.29	22.38	0-1	1
		50	49	22.39	22.31	22.41	0-1	1
	16QAM	100	0	22.40	22.25	22.34	0-1	1
		1	0	22.33	22.22	22.33	0-1	1
		1	49	22.47	22.39	22.67	0-1	1
		1	99	22.43	22.32	22.54	0-1	1
		50	0	21.37	21.24	21.28	0-2	2
		50	25	21.35	21.21	21.29	0-2	2
	64QAM	50	49	21.38	21.28	21.35	0-2	2
		100	0	21.34	21.20	21.26	0-2	2
		1	0	21.34	21.28	21.35	0-2	2
		1	49	21.44	21.13	21.60	0-2	2
		1	99	21.44	21.21	21.52	0-2	2
		50	0	20.32	20.19	20.24	0-3	3
	256QAM	50	25	20.34	20.21	20.22	0-3	3
		50	49	20.38	20.18	20.27	0-3	3
		100	0	20.28	20.10	20.21	0-3	3
		1	0	18.41	18.17	18.33	0-5	5
		1	49	18.26	18.35	18.23	0-5	5
		1	99	18.56	18.28	18.40	0-5	5
	50	0	18.30	18.12	18.23	0-5	5	
	50	25	18.32	18.17	18.26	0-5	5	
	50	49	18.35	18.20	18.29	0-5	5	
	100	0	18.35	18.21	18.27	0-5	5	

[LTE Band 5 Conducted Power]

LTE Band 5 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20407 Ch. 824.7 MHz	20525 Ch. 836.5 MHz	20643 Ch. 848.3 MHz		
1.4 MHz	QPSK	1	0	24.80	24.87	24.78	0	0
		1	3	24.75	24.73	24.60	0	0
		1	5	24.85	24.79	24.62	0	0
		3	0	24.85	24.79	24.64	0	0
		3	1	24.81	24.71	24.57	0	0
		3	3	24.83	24.77	24.64	0	0
		6	0	23.85	23.79	23.70	0-1	1
	16QAM	1	0	23.91	23.79	23.76	0-1	1
		1	3	23.84	23.86	23.67	0-1	1
		1	5	23.82	23.76	23.73	0-1	1
		3	0	23.91	23.78	23.70	0-1	1
		3	1	23.76	23.76	23.68	0-1	1
		3	3	23.80	23.71	23.64	0-1	1
		6	0	22.86	22.81	22.73	0-2	2
	64QAM	1	0	22.99	22.84	22.81	0-2	2
		1	3	22.93	22.76	22.74	0-2	2
		1	5	22.83	22.90	22.76	0-2	2
		3	0	22.85	22.78	22.71	0-2	2
		3	1	22.76	22.79	22.67	0-2	2
		3	3	22.74	22.76	22.65	0-2	2
		6	0	21.81	21.75	21.65	0-3	3
	256QAM	1	0	19.87	19.86	19.77	0-5	5
		1	3	19.83	19.69	19.63	0-5	5
		1	5	19.96	19.85	19.69	0-5	5
		3	0	19.79	19.78	19.71	0-5	5
		3	1	19.86	19.82	19.67	0-5	5
		3	3	19.82	19.81	19.66	0-5	5
		6	0	19.73	19.71	19.61	0-5	5

LTE Band 5 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20415 Ch. 825.5 MHz	20525 Ch. 836.5 MHz	20635 Ch. 847.5 MHz		
3 MHz	QPSK	1	0	24.97	24.83	24.73	0	0
		1	7	25.03	24.93	24.77	0	0
		1	14	24.89	24.80	24.67	0	0
		8	0	23.94	23.83	23.71	0-1	1
		8	3	23.91	23.89	23.75	0-1	1
		8	7	23.95	23.80	23.65	0-1	1
		15	0	23.94	23.82	23.73	0-1	1
	16QAM	1	0	24.06	23.92	23.73	0-1	1
		1	7	23.88	23.82	23.74	0-1	1
		1	14	23.96	23.82	23.76	0-1	1
		8	0	22.97	22.87	22.79	0-2	2
		8	3	22.96	22.91	22.76	0-2	2
		8	7	22.94	22.81	22.73	0-2	2
		15	0	22.88	22.84	22.77	0-2	2
	64QAM	1	0	22.97	22.87	22.97	0-2	2
		1	7	22.93	23.07	22.95	0-2	2
		1	14	22.98	22.96	22.95	0-2	2
		8	0	21.96	21.84	21.76	0-3	3
		8	3	21.91	21.86	21.75	0-3	3
		8	7	21.92	21.82	21.76	0-3	3
		15	0	21.88	21.84	21.73	0-3	3
	256QAM	1	0	19.91	19.97	19.87	0-5	5
		1	7	20.04	19.89	19.91	0-5	5
		1	14	19.94	19.89	19.68	0-5	5
		8	0	19.92	19.82	19.70	0-5	5
		8	3	19.88	19.85	19.71	0-5	5
		8	7	19.88	19.78	19.74	0-5	5
15		0	19.86	19.81	19.67	0-5	5	

LTE Band 5 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20425 Ch. 826.5 MHz	20525 Ch. 836.5 MHz	20625 Ch. 846.5 MHz		
5 MHz	QPSK	1	0	25.01	24.89	24.73	0	0
		1	12	25.04	24.97	24.88	0	0
		1	24	24.97	24.86	24.79	0	0
		12	0	24.00	23.90	23.79	0-1	1
		12	6	23.92	23.86	23.80	0-1	1
		12	11	23.96	23.88	23.74	0-1	1
	16QAM	25	0	24.10	24.02	23.89	0-1	1
		1	0	24.07	23.98	23.95	0-1	1
		1	12	23.95	23.86	23.68	0-1	1
		1	24	24.02	23.91	23.82	0-1	1
		12	0	22.99	22.86	22.79	0-2	2
		12	6	22.94	22.89	22.83	0-2	2
	64QAM	12	11	22.93	22.89	22.83	0-2	2
		25	0	22.98	22.93	22.79	0-2	2
		1	0	23.04	23.01	22.99	0-2	2
		1	12	23.18	23.03	22.99	0-2	2
		1	24	23.01	22.94	22.95	0-2	2
		12	0	21.98	21.85	21.80	0-3	3
	256QAM	12	6	21.95	21.90	21.79	0-3	3
		12	11	21.94	21.90	21.79	0-3	3
		25	0	21.96	21.88	21.74	0-3	3
		1	0	20.03	19.93	19.89	0-5	5
		1	12	19.92	19.97	19.91	0-5	5
		1	24	19.92	19.96	19.79	0-5	5
		12	0	19.92	19.85	19.74	0-5	5
12		6	19.86	19.86	19.75	0-5	5	
12		11	19.85	19.84	19.71	0-5	5	
25		0	19.91	19.88	19.77	0-5	5	

LTE Band 5 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR Allowed Per 3GPP [dB]	MPR [dB]
				20525 Ch.	836.5 MHz		
10 MHz	QPSK	1	0	24.91	0	0	
		1	24	24.89	0	0	
		1	49	24.79	0	0	
		25	0	24.04	0-1	1	
		25	12	23.95	0-1	1	
		25	24	23.98	0-1	1	
		50	0	24.02	0-1	1	
	16QAM	1	0	23.89	0-1	1	
		1	24	23.85	0-1	1	
		1	49	23.94	0-1	1	
		25	0	22.93	0-2	2	
		25	12	22.89	0-2	2	
		25	24	22.84	0-2	2	
		50	0	22.94	0-2	2	
	64QAM	1	0	22.96	0-2	2	
		1	24	22.89	0-2	2	
		1	49	22.94	0-2	2	
		25	0	21.89	0-3	3	
		25	12	21.84	0-3	3	
		25	24	21.82	0-3	3	
		50	0	21.93	0-3	3	
	256QAM	1	0	20.07	0-5	5	
		1	24	20.06	0-5	5	
		1	49	19.97	0-5	5	
		25	0	19.87	0-5	5	
		25	12	19.82	0-5	5	
		25	24	19.85	0-5	5	
		50	0	19.82	0-5	5	

[LTE Band 12 Conducted Power]

LTE Band 12 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23017 Ch. 699.7 MHz	23095 Ch. 707.5 MHz	23173 Ch. 715.3 MHz		
1.4 MHz	QPSK	1	0	24.88	24.83	24.72	0	0
		1	3	24.85	24.78	24.61	0	0
		1	5	24.95	24.88	24.78	0	0
		3	0	24.96	24.88	24.77	0	0
		3	1	24.85	24.81	24.63	0	0
		3	3	24.91	24.84	24.79	0	0
		6	0	23.93	23.80	23.80	0-1	1
	16QAM	1	0	24.01	23.96	23.81	0-1	1
		1	3	24.04	23.89	23.82	0-1	1
		1	5	23.96	23.94	23.83	0-1	1
		3	0	23.90	23.76	23.73	0-1	1
		3	1	23.94	23.88	23.71	0-1	1
		3	3	23.90	23.79	23.73	0-1	1
		6	0	22.89	22.87	22.71	0-2	2
	64QAM	1	0	23.02	22.94	22.76	0-2	2
		1	3	22.79	22.84	22.72	0-2	2
		1	5	22.89	22.93	22.83	0-2	2
		3	0	22.97	22.83	22.69	0-2	2
		3	1	22.85	22.85	22.78	0-2	2
		3	3	22.82	22.87	22.80	0-2	2
		6	0	21.87	21.80	21.68	0-3	3
	256QAM	1	0	20.03	19.92	19.88	0-5	5
		1	3	19.94	19.85	19.67	0-5	5
		1	5	19.96	19.90	19.85	0-5	5
		3	0	19.91	19.98	19.82	0-5	5
		3	1	19.97	19.86	19.78	0-5	5
		3	3	19.99	19.87	19.75	0-5	5
		6	0	19.91	19.84	19.68	0-5	5

LTE Band 12_3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23025 Ch. 700.5 MHz	23095 Ch. 707.5 MHz	23165 Ch. 714.5 MHz		
3 MHz	QPSK	1	0	25.00	25.00	24.78	0	0
		1	7	25.07	25.04	24.90	0	0
		1	14	24.93	24.92	24.77	0	0
		8	0	24.01	23.96	23.87	0-1	1
		8	3	24.00	23.95	23.78	0-1	1
		8	7	23.96	23.91	23.79	0-1	1
		15	0	23.99	23.97	23.87	0-1	1
	16QAM	1	0	24.01	24.05	23.90	0-1	1
		1	7	23.90	23.92	23.69	0-1	1
		1	14	24.03	24.05	23.89	0-1	1
		8	0	22.96	22.94	22.84	0-2	2
		8	3	23.01	22.95	22.89	0-2	2
		8	7	22.96	22.94	22.84	0-2	2
		15	0	22.94	22.92	22.80	0-2	2
	64QAM	1	0	23.13	23.07	22.96	0-2	2
		1	7	23.05	23.14	23.03	0-2	2
		1	14	22.93	23.06	22.95	0-2	2
		8	0	21.88	21.89	21.77	0-3	3
		8	3	21.98	21.90	21.76	0-3	3
		8	7	21.93	21.89	21.78	0-3	3
		15	0	21.91	21.89	21.78	0-3	3
	256QAM	1	0	20.10	20.01	19.98	0-5	5
		1	7	20.18	20.08	20.01	0-5	5
		1	14	20.16	20.03	20.02	0-5	5
		8	0	19.97	19.92	19.86	0-5	5
		8	3	20.00	19.97	19.87	0-5	5
		8	7	19.96	19.90	19.80	0-5	5
15		0	19.90	19.93	19.86	0-5	5	

LTE Band 12 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23035 Ch. 701.5 MHz	23095 Ch. 707.5 MHz	23155 Ch. 713.5 MHz		
5 MHz	QPSK	1	0	24.94	24.89	24.80	0	0
		1	12	25.09	24.99	24.90	0	0
		1	24	24.99	24.87	24.83	0	0
		12	0	24.04	23.95	23.80	0-1	1
		12	6	23.99	23.92	23.83	0-1	1
		12	11	23.98	23.90	23.82	0-1	1
		25	0	24.09	23.99	23.89	0-1	1
	16QAM	1	0	24.06	24.03	23.92	0-1	1
		1	12	24.08	23.54	23.75	0-1	1
		1	24	24.01	23.88	23.87	0-1	1
		12	0	22.95	22.92	22.84	0-2	2
		12	6	22.96	22.94	22.79	0-2	2
		12	11	22.94	22.91	22.80	0-2	2
		25	0	23.00	22.92	22.82	0-2	2
	64QAM	1	0	23.07	23.02	22.97	0-2	2
		1	12	23.04	22.93	22.90	0-2	2
		1	24	23.04	22.91	22.86	0-2	2
		12	0	22.00	21.91	21.77	0-3	3
		12	6	21.96	21.87	21.75	0-3	3
		12	11	21.92	21.85	21.73	0-3	3
		25	0	21.93	21.89	21.77	0-3	3
	256QAM	1	0	20.14	19.97	19.90	0-5	5
		1	12	19.93	19.99	19.73	0-5	5
		1	24	20.00	19.97	19.86	0-5	5
		12	0	19.95	19.91	19.79	0-5	5
12		6	19.96	19.88	19.77	0-5	5	
12		11	19.93	19.85	19.71	0-5	5	
25		0	20.03	19.89	19.79	0-5	5	

LTE Band 12 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR Allowed Per 3GPP [dB]	MPR [dB]
				23095 Ch.	707.5 MHz		
10 MHz	QPSK	1	0	25.05	0	0	
		1	24	24.99	0	0	
		1	49	24.82	0	0	
		25	0	24.11	0-1	1	
		25	12	24.03	0-1	1	
		25	24	23.99	0-1	1	
		50	0	24.05	0-1	1	
	16QAM	1	0	24.11	0-1	1	
		1	24	23.86	0-1	1	
		1	49	23.82	0-1	1	
		25	0	22.98	0-2	2	
		25	12	22.95	0-2	2	
		25	24	22.94	0-2	2	
		50	0	22.97	0-2	2	
	64QAM	1	0	23.05	0-2	2	
		1	24	23.09	0-2	2	
		1	49	22.94	0-2	2	
		25	0	21.96	0-3	3	
		25	12	21.94	0-3	3	
		25	24	21.89	0-3	3	
		50	0	21.96	0-3	3	
	256QAM	1	0	20.07	0-5	5	
		1	24	20.04	0-5	5	
		1	49	19.88	0-5	5	
		25	0	19.99	0-5	5	
		25	12	19.93	0-5	5	
		25	24	19.90	0-5	5	
		50	0	19.95	0-5	5	

[LTE Band 17 Conducted Power]

LTE Band 17 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23755ch. 706.5 MHz z	23790ch. 710 MHz z	23825ch. 713.5 MHz z		
5 MHz	QPSK	1	0	24.98	24.81	24.82	0	0
		1	12	25.05	24.98	24.90	0	0
		1	24	24.92	24.87	24.87	0	0
		12	0	24.01	23.92	23.86	0-1	1
		12	6	23.98	23.93	23.85	0-1	1
		12	11	23.96	23.94	23.84	0-1	1
		25	0	24.01	24.03	23.93	0-1	1
	16QAM	1	0	24.07	24.04	24.00	0-1	1
		1	12	23.95	23.70	23.79	0-1	1
		1	24	24.05	23.95	23.79	0-1	1
		12	0	22.95	22.93	22.85	0-2	2
		12	6	22.90	22.93	22.82	0-2	2
		12	11	22.94	22.93	22.81	0-2	2
		25	0	22.97	22.94	22.88	0-2	2
	64QAM	1	0	23.14	23.11	22.98	0-2	2
		1	12	23.04	23.06	23.05	0-2	2
		1	24	22.98	22.99	22.93	0-2	2
		12	0	21.88	21.90	21.82	0-3	3
		12	6	21.92	21.87	21.72	0-3	3
		12	11	21.82	21.84	21.78	0-3	3
		25	0	21.89	21.88	21.82	0-3	3
	256QAM	1	0	19.99	20.12	19.93	0-5	5
		1	12	20.20	20.15	19.99	0-5	5
		1	24	20.01	19.86	19.90	0-5	5
		12	0	19.89	19.93	19.81	0-5	5
		12	6	19.92	19.87	19.78	0-5	5
		12	11	19.92	19.88	19.80	0-5	5
		25	0	19.90	19.91	19.88	0-5	5

LTE Band17 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				23790 Ch. 7010 MHz		
10 MHz	QPSK	1	0	25.03	0	0
		1	24	24.99	0	0
		1	49	24.80	0	0
		25	0	24.12	0-1	1
		25	12	24.05	0-1	1
		25	24	24.00	0-1	1
		50	0	24.04	0-1	1
	16QAM	1	0	24.15	0-1	1
		1	24	23.97	0-1	1
		1	49	23.91	0-1	1
		25	0	23.00	0-2	2
		25	12	22.98	0-2	2
		25	24	22.92	0-2	2
		50	0	22.99	0-2	2
	64QAM	1	0	23.06	0-2	2
		1	24	22.95	0-2	2
		1	49	22.87	0-2	2
		25	0	21.95	0-3	3
		25	12	21.89	0-3	3
		25	24	21.86	0-3	3
		50	0	21.97	0-3	3
	256QAM	1	0	20.09	0-5	5
		1	24	19.99	0-5	5
		1	49	19.91	0-5	5
		25	0	19.99	0-5	5
		25	12	19.92	0-5	5
		25	24	19.90	0-5	5
		50	0	19.94	0-5	5

[LTE Band 26 Conducted Power]

LTE Band 26 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26697 Ch. 814.7 MHz	26865 Ch. 831.5 MHz	27033 Ch. 848.3 MHz		
1.4 MHz	QPSK	1	0	24.83	24.55	24.42	0	0
		1	3	24.74	24.50	24.20	0	0
		1	5	24.85	24.61	24.45	0	0
		3	0	24.88	24.64	24.49	0	0
		3	1	24.82	24.54	24.37	0	0
		3	3	24.81	24.58	24.46	0	0
	16QAM	6	0	23.85	23.65	23.53	0-1	1
		1	0	23.99	23.86	23.70	0-1	1
		1	3	23.98	23.78	23.61	0-1	1
		1	5	24.10	23.80	23.79	0-1	1
		3	0	23.93	23.77	23.72	0-1	1
		3	1	23.93	23.64	23.58	0-1	1
	64QAM	3	3	23.89	23.73	23.68	0-1	1
		6	0	22.83	22.63	22.31	0-2	2
		1	0	22.96	22.72	22.69	0-2	2
		1	3	22.86	22.68	22.57	0-2	2
		1	5	22.96	22.78	22.61	0-2	2
		3	0	22.84	22.57	22.54	0-2	2
	256QAM	3	1	22.75	22.58	22.53	0-2	2
		3	3	22.79	22.56	22.52	0-2	2
		6	0	21.84	21.64	21.45	0-3	3
		1	0	19.93	19.66	19.64	0-5	5
		1	3	19.84	19.60	19.49	0-5	5
		1	5	19.94	19.76	19.58	0-5	5
		3	0	19.94	19.66	19.53	0-5	5
		3	1	19.81	19.61	19.47	0-5	5
		3	3	19.84	19.66	19.47	0-5	5
		6	0	19.82	19.59	19.38	0-5	5

LTE Band 26 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26705 Ch. 815.5 MHz	26865 Ch. 831.5 MHz	27025 Ch. 847.5 MHz		
3 MHz	QPSK	1	0	24.88	24.62	24.45	0	0
		1	7	24.92	24.69	24.57	0	0
		1	14	24.76	24.54	24.43	0	0
		8	0	23.95	23.65	23.50	0-1	1
		8	3	23.91	23.71	23.56	0-1	1
		8	7	23.92	23.69	23.56	0-1	1
	15	0	23.97	23.72	23.58	0-1	1	
	16QAM	1	0	24.00	23.93	23.66	0-1	1
		1	7	23.86	23.77	23.41	0-1	1
		1	14	24.05	23.98	23.72	0-1	1
		8	0	22.90	22.64	22.54	0-2	2
		8	3	22.87	22.66	22.58	0-2	2
		8	7	22.83	22.61	22.51	0-2	2
	64QAM	15	0	22.85	22.64	22.50	0-2	2
		1	0	23.02	22.71	22.61	0-2	2
		1	7	23.04	22.85	22.75	0-2	2
		1	14	22.94	22.82	22.56	0-2	2
		8	0	21.79	21.65	21.52	0-3	3
		8	3	21.86	21.62	21.51	0-3	3
	256QAM	8	7	21.83	21.66	21.52	0-3	3
		15	0	21.84	21.61	21.45	0-3	3
		1	0	20.07	19.71	19.62	0-5	5
		1	7	20.00	19.76	19.57	0-5	5
		1	14	19.88	19.63	19.58	0-5	5
		8	0	19.87	19.65	19.48	0-5	5
		8	3	19.81	19.63	19.47	0-5	5
		8	7	19.79	19.55	19.44	0-5	5
15		0	19.87	19.61	19.46	0-5	5	

LTE Band 26 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26715 Ch. 816.5 MHz	26865 Ch. 831.5 MHz	27015 Ch. 846.5 MHz		
5 MHz	QPSK	1	0	24.77	24.60	24.45	0	0
		1	12	24.95	24.70	24.56	0	0
		1	24	24.83	24.58	24.51	0	0
		12	0	23.90	23.68	23.59	0-1	1
		12	6	23.89	23.65	23.57	0-1	1
		12	11	23.93	23.67	23.55	0-1	1
		25	0	23.94	23.76	23.58	0-1	1
	16QAM	1	0	24.13	23.89	23.76	0-1	1
		1	12	23.93	23.62	23.49	0-1	1
		1	24	23.97	23.74	23.85	0-1	1
		12	0	22.87	22.67	22.58	0-2	2
		12	6	22.88	22.66	22.60	0-2	2
		12	11	22.86	22.64	22.52	0-2	2
		25	0	22.90	22.72	22.51	0-2	2
	64QAM	1	0	22.91	22.74	22.68	0-2	2
		1	12	22.99	22.71	22.68	0-2	2
		1	24	23.02	22.68	22.63	0-2	2
		12	0	21.87	21.68	21.51	0-3	3
		12	6	21.84	21.68	21.49	0-3	3
		12	11	21.87	21.63	21.54	0-3	3
		25	0	21.86	21.65	21.46	0-3	3
	256QAM	1	0	19.90	19.73	19.62	0-5	5
		1	12	19.87	19.82	19.54	0-5	5
		1	24	19.87	19.80	19.60	0-5	5
		12	0	19.82	19.63	19.44	0-5	5
		12	6	19.81	19.61	19.48	0-5	5
		12	11	19.78	19.60	19.45	0-5	5
		25	0	19.81	19.60	19.50	0-5	5

LTE Band 26 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26740 Ch. 819 MHz	26865 Ch. 831.5 MHz	26990 Ch. 844 MHz		
10 MHz	QPSK	1	0	24.91	24.69	24.57	0	0
		1	24	24.91	24.65	24.57	0	0
		1	49	24.77	24.60	24.45	0	0
		25	0	23.97	23.77	23.65	0-1	1
		25	12	23.92	23.74	23.59	0-1	1
		25	24	23.84	23.72	23.58	0-1	1
		50	0	23.95	23.84	23.63	0-1	1
	16QAM	1	0	24.06	23.90	23.85	0-1	1
		1	24	24.01	23.62	23.58	0-1	1
		1	49	23.95	23.82	23.80	0-1	1
		25	0	22.97	22.79	22.63	0-2	2
		25	12	22.90	22.73	22.60	0-2	2
		25	24	22.85	22.72	22.57	0-2	2
		50	0	22.93	22.78	22.60	0-2	2
	64QAM	1	0	22.95	22.83	22.83	0-2	2
		1	24	23.03	22.78	22.68	0-2	2
		1	49	22.96	22.72	22.65	0-2	2
		25	0	21.86	21.71	21.58	0-3	3
		25	12	21.83	21.69	21.54	0-3	3
		25	24	21.79	21.66	21.51	0-3	3
		50	0	21.87	21.74	21.58	0-3	3
	256QAM	1	0	20.03	19.73	19.67	0-5	5
		1	24	19.99	19.78	19.71	0-5	5
		1	49	19.89	19.64	19.62	0-5	5
		25	0	19.84	19.71	19.59	0-5	5
		25	12	19.83	19.69	19.51	0-5	5
		25	24	19.76	19.63	19.50	0-5	5
50		0	19.81	19.65	19.50	0-5	5	

LTE Band 26 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR Allowed Per 3GPP [dB]	MPR [dB]
				26865 Ch. 831.5 MHz			
15 MHz	QPSK	1	0	24.76	0	0	
		1	36	24.72	0	0	
		1	74	24.60	0	0	
		36	0	23.83	0-1	1	
		36	18	23.75	0-1	1	
		36	39	23.72	0-1	1	
		75	0	23.77	0-1	1	
	16QAM	1	0	24.03	0-1	1	
		1	36	23.69	0-1	1	
		1	74	23.82	0-1	1	
		36	0	22.76	0-2	2	
		36	18	22.71	0-2	2	
		36	39	22.65	0-2	2	
		75	0	22.73	0-2	2	
	64QAM	1	0	22.93	0-2	2	
		1	36	22.80	0-2	2	
		1	74	22.74	0-2	2	
		36	0	21.79	0-3	3	
		36	18	21.71	0-3	3	
		36	39	21.64	0-3	3	
		75	0	21.71	0-3	3	
	256QAM	1	0	19.88	0-5	5	
		1	36	19.71	0-5	5	
		1	74	19.75	0-5	5	
		36	0	19.70	0-5	5	
		36	18	19.68	0-5	5	
		36	39	19.62	0-5	5	
		75	0	19.70	0-5	5	

[LTE Band 41 Conducted Power]

LTE Band 41 _ 5 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
5 MHz	QPSK	1	0	24.45	23.82	23.77	24.57	24.44	0	0
		1	12	24.77	24.17	24.18	24.79	24.82	0	0
		1	24	24.46	23.88	23.85	24.62	24.45	0	0
		12	0	23.52	22.92	22.86	23.70	23.51	0-1	1
		12	6	23.54	22.97	22.88	23.72	23.55	0-1	1
		12	11	23.52	22.93	22.86	23.72	23.51	0-1	1
		25	0	23.53	22.97	22.88	23.71	23.50	0-1	1
	16QAM	1	0	23.48	23.08	22.91	23.94	23.59	0-1	1
		1	12	23.41	22.99	23.26	24.16	23.78	0-1	1
		1	24	23.51	22.91	22.93	23.96	23.50	0-1	1
		12	0	22.50	22.04	21.97	22.84	22.61	0-2	2
		12	6	22.58	22.03	21.94	22.82	22.61	0-2	2
		12	11	22.54	22.03	21.94	22.81	22.55	0-2	2
		25	0	22.53	22.09	21.95	22.77	22.57	0-2	2
	64QAM	1	0	22.60	22.30	22.39	22.89	22.73	0-2	2
		1	12	22.98	22.52	22.38	23.23	22.93	0-2	2
		1	24	22.60	22.30	22.39	22.89	22.74	0-2	2
		12	0	21.47	21.00	20.94	21.68	21.43	0-3	3
		12	6	21.46	20.97	20.96	21.68	21.44	0-3	3
		12	11	21.43	20.93	20.91	21.64	21.42	0-3	3
		25	0	21.53	20.91	20.95	21.77	21.49	0-3	3
	256QAM	1	0	19.60	18.85	18.93	19.90	19.58	0-5	5
		1	12	19.91	19.10	19.34	20.00	19.99	0-5	5
		1	24	19.55	18.81	18.93	19.85	19.55	0-5	5
		12	0	19.51	18.93	18.88	19.81	19.56	0-5	5
12		6	19.51	18.92	18.90	19.84	19.57	0-5	5	
12		11	19.48	18.91	18.86	19.80	19.51	0-5	5	
25		0	19.51	18.94	18.89	19.80	19.51	0-5	5	

LTE Band 41 _ 10 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per 3GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
10 MHz	QPSK	1	0	24.31	23.88	23.77	24.73	24.89	0	0
		1	24	24.56	24.11	24.07	24.95	25.15	0	0
		1	49	24.32	23.87	23.83	24.69	24.91	0	0
		25	0	23.40	22.96	22.87	23.78	24.01	0-1	1
		25	12	23.39	22.94	22.86	23.75	24.00	0-1	1
		25	24	23.36	22.93	22.85	23.73	23.99	0-1	1
	16QAM	1	0	23.65	22.95	22.94	24.06	24.09	0-1	1
		1	24	23.49	22.70	23.01	23.78	23.78	0-1	1
		1	49	23.47	22.82	22.90	23.94	23.88	0-1	1
		25	0	22.45	22.10	21.93	22.77	23.10	0-2	2
		25	12	22.45	22.07	21.91	22.75	23.12	0-2	2
		25	24	22.44	22.03	21.92	22.73	23.08	0-2	2
	64QAM	1	0	22.59	22.36	22.42	23.25	23.39	0-2	2
		1	24	22.68	22.25	22.52	23.32	23.28	0-2	2
		1	49	22.60	22.23	22.32	23.10	23.27	0-2	2
		25	0	21.48	20.97	20.94	21.87	22.02	0-3	3
		25	12	21.45	20.93	20.94	21.83	21.98	0-3	3
		25	24	21.44	20.92	20.93	21.80	21.97	0-3	3
	256QAM	1	0	19.32	18.90	19.08	19.88	19.98	0-5	5
		1	24	19.34	19.10	19.25	19.92	20.13	0-5	5
		1	49	19.27	18.79	19.05	19.79	19.88	0-5	5
		25	0	19.49	18.99	18.87	19.83	20.10	0-5	5
		25	12	19.45	18.97	18.83	19.80	20.06	0-5	5
		25	24	19.45	18.95	18.81	19.77	20.04	0-5	5
		50	0	19.44	18.96	18.87	19.79	20.04	0-5	5

LTE Band 41 _ 15 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per 3GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
15 MHz	QPSK	1	0	24.40	24.02	23.89	24.71	24.94	0	0
		1	36	24.75	24.31	24.23	24.96	25.31	0	0
		1	74	24.41	23.91	23.87	24.66	24.91	0	0
		36	0	23.49	23.00	22.87	23.80	24.08	0-1	1
		36	18	23.47	22.97	22.85	23.78	24.06	0-1	1
		36	39	23.47	22.94	22.83	23.77	24.03	0-1	1
		75	0	23.48	22.98	22.86	23.81	24.07	0-1	1
	16QAM	1	0	23.45	23.43	23.16	24.05	24.10	0-1	1
		1	36	23.51	22.96	22.63	24.01	24.40	0-1	1
		1	74	23.46	23.12	22.93	23.83	24.02	0-1	1
		36	0	22.45	22.07	21.85	22.83	23.07	0-2	2
		36	18	22.44	22.04	21.83	22.81	23.01	0-2	2
		36	39	22.43	22.01	21.82	22.78	22.98	0-2	2
		75	0	22.50	21.99	21.89	22.83	23.08	0-2	2
	64QAM	1	0	22.59	22.14	21.76	23.11	23.48	0-2	2
		1	36	22.92	22.26	21.90	23.45	22.99	0-2	2
		1	74	22.59	22.06	21.75	23.15	23.45	0-2	2
		36	0	21.48	21.04	20.92	21.88	22.09	0-3	3
		36	18	21.46	21.00	20.89	21.78	22.04	0-3	3
		36	39	21.44	20.96	20.88	21.76	22.02	0-3	3
		75	0	21.46	21.01	20.89	21.82	22.09	0-3	3
	256QAM	1	0	19.59	19.18	19.10	19.89	20.21	0-5	5
		1	36	19.85	19.36	19.28	20.17	20.49	0-5	5
		1	74	19.52	19.02	18.98	19.77	20.07	0-5	5
		36	0	19.42	18.94	18.82	19.76	20.04	0-5	5
		36	18	19.40	18.91	18.80	19.71	20.01	0-5	5
		36	39	19.39	18.87	18.77	19.68	19.98	0-5	5
		75	0	19.42	18.92	18.81	19.76	20.02	0-5	5

LTE Band 41 _ 20 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per 3GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
20 MHz	QPSK	1	0	24.48	24.04	23.81	24.88	24.56	0	0
		1	49	24.61	24.19	24.09	24.79	24.64	0	0
		1	99	24.47	23.89	23.83	24.63	24.41	0	0
		50	0	23.60	23.01	22.87	23.80	23.58	0-1	1
		50	25	23.55	22.98	22.85	23.76	23.54	0-1	1
		50	49	23.52	22.93	22.82	23.75	23.51	0-1	1
	16QAM	100	0	23.56	22.98	22.85	23.80	23.56	0-1	1
		1	0	23.51	23.34	22.97	23.99	23.70	0-1	1
		1	49	23.30	22.72	22.89	23.83	23.52	0-1	1
		1	99	23.49	23.02	22.88	23.80	23.51	0-1	1
		50	0	22.55	22.04	21.90	22.90	22.61	0-2	2
		50	25	22.52	21.99	21.87	22.84	22.56	0-2	2
	64QAM	50	49	22.49	21.94	21.84	22.79	22.51	0-2	2
		100	0	22.52	22.05	21.91	22.84	22.58	0-2	2
		1	0	22.65	22.43	22.41	23.07	22.77	0-2	2
		1	49	22.60	22.49	22.54	22.99	22.68	0-2	2
		1	99	22.59	22.22	22.33	22.88	22.57	0-2	2
		50	0	21.54	21.06	20.94	21.89	21.62	0-3	3
	256QAM	50	25	21.52	21.00	20.91	21.83	21.57	0-3	3
		50	49	21.49	20.96	20.87	21.79	21.53	0-3	3
		100	0	21.46	20.99	20.85	21.80	21.52	0-3	3
		1	0	19.63	19.21	19.02	19.81	19.45	0-5	5
		1	49	19.80	19.28	19.14	19.85	19.57	0-5	5
		1	99	19.53	19.00	18.88	19.63	19.36	0-5	5
		50	0	19.50	19.01	18.91	19.84	19.59	0-5	5
		50	25	19.49	18.97	18.90	19.81	19.57	0-5	5
		50	49	19.48	18.95	18.88	19.78	19.54	0-5	5
		100	0	19.39	18.90	18.79	19.74	19.47	0-5	5

Note; LTE Band 41 has 5 required test channels per FCC KDB 447498 D01v06.

[LTE Band 66 Conducted Power]

LTE Band 66 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131979Ch. 1710.7 MHz	132322 Ch. 1745 MHz	132665 Ch. 1779.3 MHz		
1.4 MHz	QPSK	1	0	24.06	24.20	24.34	0	0
		1	3	24.13	24.25	24.32	0	0
		1	5	24.31	24.39	24.45	0	0
		3	0	24.26	24.47	24.53	0	0
		3	1	24.24	24.48	24.49	0	0
		3	3	24.22	24.41	24.48	0	0
	16QAM	6	0	23.43	23.44	23.52	0-1	1
		1	0	23.53	23.43	23.50	0-1	1
		1	3	23.47	23.32	23.45	0-1	1
		1	5	23.50	23.41	23.63	0-1	1
		3	0	23.38	23.38	23.56	0-1	1
		3	1	23.39	23.32	23.59	0-1	1
	64QAM	3	3	23.38	23.32	23.46	0-1	1
		6	0	22.49	22.33	22.51	0-2	2
		1	0	22.45	22.45	22.38	0-2	2
		1	3	22.40	22.32	22.32	0-2	2
		1	5	22.51	22.40	22.45	0-2	2
		3	0	22.37	22.36	22.46	0-2	2
	256QAM	3	1	22.32	22.36	22.37	0-2	2
		3	3	22.28	22.27	22.31	0-2	2
		6	0	21.44	21.32	21.35	0-3	3
		1	0	19.63	19.38	19.53	0-5	5
		1	3	19.49	19.36	19.34	0-5	5
		1	5	19.61	19.48	19.56	0-5	5
		3	0	19.49	19.43	19.46	0-5	5
		3	1	19.51	19.46	19.40	0-5	5
		3	3	19.54	19.35	19.37	0-5	5
		6	0	19.48	19.33	19.42	0-5	5

LTE Band 66 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131987 Ch. 1711.5 MHz	132322 Ch. 1745 MHz	132657 Ch. 1778.5 MHz		
3 MHz	QPSK	1	0	24.25	24.49	24.26	0	0
		1	7	24.43	24.61	24.11	0	0
		1	14	24.33	24.51	23.74	0	0
		8	0	23.44	23.54	23.53	0-1	1
		8	3	23.48	23.51	23.48	0-1	1
		8	7	23.55	23.56	23.51	0-1	1
	16QAM	15	0	23.43	23.51	23.48	0-1	1
		1	0	23.28	23.65	23.49	0-1	1
		1	7	23.42	23.74	23.57	0-1	1
		1	14	23.53	23.74	23.50	0-1	1
		8	0	22.53	22.48	22.51	0-2	2
		8	3	22.48	22.47	22.42	0-2	2
	64QAM	8	7	22.51	22.50	22.49	0-2	2
		15	0	22.46	22.46	22.44	0-2	2
		1	0	22.50	22.51	22.50	0-2	2
		1	7	22.65	22.65	22.52	0-2	2
		1	14	22.48	22.55	22.42	0-2	2
		8	0	21.45	21.47	21.41	0-3	3
	256QAM	8	3	21.43	21.45	21.38	0-3	3
		8	7	21.48	21.41	21.38	0-3	3
		15	0	21.43	21.42	21.39	0-3	3
		1	0	19.61	19.65	19.47	0-5	5
		1	7	19.82	19.67	19.56	0-5	5
		1	14	19.64	19.66	19.55	0-5	5
	8	0	19.63	19.55	19.54	0-5	5	
	8	3	19.57	19.55	19.49	0-5	5	
	8	7	19.67	19.55	19.56	0-5	5	
	8	0	19.63	19.55	19.54	0-5	5	
	15	0	19.57	19.53	19.53	0-5	5	

LTE Band 66 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131997 Ch. 1712.5 MHz	132322Ch. 1745 MHz	132647 Ch. 1777.5 MHz		
5 MHz	QPSK	1	0	24.11	24.38	24.34	0	0
		1	12	24.38	24.56	24.49	0	0
		1	24	24.50	24.47	24.47	0	0
		12	0	23.44	23.50	23.51	0-1	1
		12	6	23.51	23.50	23.53	0-1	1
		12	11	23.55	23.55	23.53	0-1	1
	16QAM	25	0	23.57	23.58	23.60	0-1	1
		1	0	23.37	23.74	23.56	0-1	1
		1	12	23.59	23.65	23.78	0-1	1
		1	24	23.67	23.56	23.65	0-1	1
		12	0	22.48	22.43	22.45	0-2	2
		12	6	22.47	22.42	22.40	0-2	2
	64QAM	12	11	22.49	22.40	22.39	0-2	2
		25	0	22.53	22.45	22.46	0-2	2
		1	0	22.51	22.50	22.44	0-2	2
		1	12	22.54	22.68	22.45	0-2	2
		1	24	22.59	22.47	22.50	0-2	2
		12	0	21.43	21.40	21.37	0-3	3
	256QAM	12	6	21.42	21.37	21.34	0-3	3
		12	11	21.45	21.41	21.33	0-3	3
		25	0	21.45	21.40	21.35	0-3	3
		1	0	19.63	19.51	19.57	0-5	5
		1	12	19.71	19.49	19.42	0-5	5
		1	24	19.55	19.56	19.46	0-5	5
	12	0	19.51	19.41	19.44	0-5	5	
	12	6	19.48	19.42	19.43	0-5	5	
	12	11	19.53	19.44	19.45	0-5	5	
	25	0	19.54	19.45	19.43	0-5	5	

LTE Band 66 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132022 Ch. 1715 MHz	132322 Ch. 1745 MHz	132622 Ch. 1775 MHz		
10 MHz	QPSK	1	0	23.60	24.19	24.28	0	0
		1	24	24.27	24.48	24.56	0	0
		1	49	24.59	24.35	23.67	0	0
		25	0	23.18	23.54	23.70	0-1	1
		25	12	23.52	23.51	23.64	0-1	1
		25	24	23.77	23.54	23.69	0-1	1
	16QAM	50	0	23.53	23.56	23.71	0-1	1
		1	0	23.00	23.33	23.58	0-1	1
		1	24	23.64	23.69	23.74	0-1	1
		1	49	23.79	23.43	23.57	0-1	1
		25	0	22.66	22.41	22.53	0-2	2
		25	12	22.66	22.39	22.53	0-2	2
	64QAM	25	24	22.67	22.43	22.55	0-2	2
		50	0	22.65	22.42	22.58	0-2	2
		1	0	22.48	22.40	22.55	0-2	2
		1	24	22.63	22.46	22.56	0-2	2
		1	49	22.55	22.53	22.61	0-2	2
		25	0	21.53	21.35	21.45	0-3	3
	256QAM	25	12	21.53	21.34	21.43	0-3	3
		25	24	21.53	21.32	21.45	0-3	3
		50	0	21.56	21.40	21.55	0-3	3
		1	0	19.62	19.43	19.52	0-5	5
		1	24	19.60	19.63	19.61	0-5	5
		1	49	19.71	19.45	19.62	0-5	5
	25	0	19.59	19.41	19.51	0-5	5	
	25	12	19.53	19.37	19.47	0-5	5	
	25	24	19.60	19.40	19.48	0-5	5	
	50	0	19.60	19.37	19.49	0-5	5	

LTE Band 66 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132047 Ch. 1717.5 MHz	132322 Ch. 1745 MHz	132597 Ch. 1772.5 MHz		
15 MHz	QPSK	1	0	23.62	24.37	24.24	0	0
		1	36	24.43	24.56	24.46	0	0
		1	74	24.37	24.45	23.96	0	0
		36	0	23.27	23.58	23.52	0-1	1
		36	18	23.49	23.57	23.54	0-1	1
		36	39	23.52	23.62	23.57	0-1	1
		75	0	23.56	23.64	23.60	0-1	1
	16QAM	1	0	22.58	23.56	23.51	0-1	1
		1	36	23.74	23.52	23.45	0-1	1
		1	74	23.62	23.62	23.48	0-1	1
		36	0	22.43	22.50	22.46	0-2	2
		36	18	22.43	22.48	22.46	0-2	2
		36	39	22.45	22.49	22.44	0-2	2
		75	0	22.45	22.49	22.48	0-2	2
	64QAM	1	0	22.13	22.61	22.53	0-2	2
		1	36	22.57	22.56	22.50	0-2	2
		1	74	22.47	22.60	22.47	0-2	2
		36	0	21.42	21.43	21.43	0-3	3
		36	18	21.43	21.45	21.45	0-3	3
		36	39	21.44	21.44	21.44	0-3	3
		75	0	21.40	21.41	21.39	0-3	3
	256QAM	1	0	19.29	19.64	19.63	0-5	5
		1	36	19.67	19.71	19.61	0-5	5
		1	74	19.64	19.60	19.68	0-5	5
36		0	19.48	19.49	19.48	0-5	5	
36		18	19.50	19.53	19.49	0-5	5	
36		39	19.51	19.54	19.48	0-5	5	
75		0	19.49	19.55	19.49	0-5	5	

LTE Band 66 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132072 Ch. 1720 MHz	132322 Ch. 1745 MHz	132572 Ch. 1770 MHz		
20 MHz	QPSK	1	0	23.38	24.19	24.23	0	0
		1	49	24.43	24.45	24.53	0	0
		1	99	24.33	24.38	24.28	0	0
		50	0	23.15	23.62	23.69	0-1	1
		50	25	23.50	23.55	23.71	0-1	1
		50	49	23.56	23.56	23.70	0-1	1
	100	0	23.52	23.51	23.66	0-1	1	
	16QAM	1	0	22.65	23.43	23.44	0-1	1
		1	49	23.68	23.58	23.63	0-1	1
		1	99	23.64	23.52	23.60	0-1	1
		50	0	22.45	22.45	22.55	0-2	2
		50	25	22.50	22.46	22.58	0-2	2
		50	49	22.49	22.47	22.56	0-2	2
	100	0	22.42	22.44	22.52	0-2	2	
	64QAM	1	0	22.10	22.44	22.48	0-2	2
		1	49	22.54	22.60	22.60	0-2	2
		1	99	22.55	22.54	22.60	0-2	2
		50	0	21.39	21.43	21.51	0-3	3
		50	25	21.44	21.41	21.51	0-3	3
		50	49	21.41	21.45	21.52	0-3	3
	100	0	21.33	21.36	21.43	0-3	3	
	256QAM	1	0	19.27	19.42	19.63	0-5	5
		1	49	19.40	19.54	19.64	0-5	5
		1	99	19.59	19.50	19.65	0-5	5
50		0	19.36	19.40	19.50	0-5	5	
50		25	19.42	19.42	19.48	0-5	5	
50		49	19.44	19.42	19.51	0-5	5	
100	0	19.44	19.45	19.50	0-5	5		

The EUT enables maximum power reduction in accordance with 3GPP 36.101. The MPR settings are configured during the manufacture process and are not configurable by the network, carrier, or end user.

11.3.2 LTE Reduced Conducted Power (Hotspot, Earjack Insert, Grip Sensor Mode)

[LTE Band 2 Conducted Power]

LTE Band 2 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				18607 Ch. 1850.7 MHz	18900 Ch. 1880 MHz	19193 Ch. 1909.3 MHz	
1.4 MHz	QPSK	1	0	22.24	22.28	22.08	0
		1	3	22.21	22.24	22.06	0
		1	5	22.35	22.31	22.18	0
		3	0	22.39	22.30	22.25	0
		3	1	22.45	22.32	22.24	0
		3	3	22.38	22.24	22.14	0
	16QAM	6	0	22.46	22.31	22.23	0
		1	0	22.74	22.44	22.29	0
		1	3	22.61	22.41	22.20	0
		1	5	22.73	22.36	22.22	0
		3	0	22.43	22.39	22.22	0
		3	1	22.50	22.30	22.23	0
	64QAM	3	3	22.54	22.30	22.16	0
		6	0	22.50	22.32	22.17	0
		1	0	22.45	22.32	22.20	0
		1	3	22.54	22.25	22.14	0
		1	5	22.60	22.34	22.22	0
		3	0	22.59	22.37	22.21	0
	256QAM	3	1	22.46	22.29	22.09	0
		3	3	22.58	22.30	22.12	0
		6	0	21.32	21.31	21.17	1
		1	0	19.59	19.31	19.35	3
		1	3	19.52	19.29	19.25	3
		1	5	19.62	19.40	19.35	3
		3	0	19.55	19.37	19.25	3
		3	1	19.55	19.42	19.27	3
		3	3	19.56	19.28	19.23	3
		6	0	19.51	19.28	19.25	3

LTE Band 2 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				18615 Ch. 1851.5 MHz	18900 Ch. 1880 MHz	19185 Ch. 1908.5 MHz	
3 MHz	QPSK	1	0	22.16	22.22	22.03	0
		1	7	22.24	22.20	22.07	0
		1	14	22.16	22.10	21.97	0
		8	0	22.30	22.23	22.09	0
		8	3	22.24	22.24	22.08	0
		8	7	22.31	22.25	22.04	0
	16QAM	15	0	22.32	22.26	22.10	0
		1	0	22.42	22.35	22.04	0
		1	7	22.32	22.13	21.95	0
		1	14	22.34	22.31	22.15	0
		8	0	22.30	22.31	22.07	0
		8	3	22.30	22.19	22.06	0
	64QAM	8	7	22.30	22.30	22.07	0
		15	0	22.31	22.22	21.96	0
		1	0	22.39	22.40	22.07	0
		1	7	22.46	22.48	22.37	0
		1	14	22.24	22.44	22.06	0
		8	0	21.33	21.26	21.11	1
	256QAM	8	3	21.33	21.28	21.08	1
		8	7	21.32	21.35	21.09	1
		15	0	21.29	21.25	21.06	1
		1	0	19.42	19.37	19.18	3
		1	7	19.65	19.54	19.32	3
		1	14	19.40	19.39	19.14	3
	8	0	19.37	19.32	19.16	3	
	8	3	19.36	19.26	19.15	3	
	8	7	19.40	19.31	19.17	3	
	8	0	19.36	19.26	19.11	3	
	15	0	19.36	19.26	19.11	3	

LTE Band 2 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				18625 Ch. 1852.5 MHz	18900 Ch. 1880 MHz	19175 Ch. 1907.5 MHz	
5 MHz	QPSK	1	0	22.11	22.13	21.96	0
		1	12	22.24	22.19	22.03	0
		1	24	22.19	22.15	22.03	0
		12	0	22.27	22.19	22.05	0
		12	6	22.25	22.20	22.03	0
		12	11	22.29	22.23	22.05	0
		25	0	22.38	22.24	22.16	0
	16QAM	1	0	22.32	22.30	22.21	0
		1	12	22.14	22.18	21.98	0
		1	24	22.33	22.21	22.02	0
		12	0	22.23	22.26	22.06	0
		12	6	22.25	22.23	22.00	0
		12	11	22.25	22.21	22.03	0
		25	0	22.32	22.20	22.09	0
	64QAM	1	0	22.38	22.38	22.08	0
		1	12	22.52	22.47	22.24	0
		1	24	22.33	22.24	22.09	0
		12	0	21.28	21.23	21.11	1
		12	6	21.29	21.25	21.05	1
		12	11	21.27	21.22	21.01	1
		25	0	21.25	21.21	21.04	1
	256QAM	1	0	19.35	19.34	19.16	3
		1	12	19.55	19.39	19.23	3
		1	24	19.44	19.33	19.15	3
		12	0	19.26	19.17	19.09	3
		12	6	19.27	19.20	19.08	3
		12	11	19.27	19.15	19.07	3
25		0	19.33	19.18	19.09	3	

LTE Band 2 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				18650 Ch. 1855 MHz	18900 Ch. 1880 MHz	19150 Ch. 1905 MHz	
10 MHz	QPSK	1	0	22.12	22.17	22.08	0
		1	24	22.17	22.32	22.16	0
		1	49	22.12	22.13	22.01	0
		25	0	22.28	22.29	22.16	0
		25	12	22.36	22.34	22.19	0
		25	24	22.38	22.34	22.23	0
	16QAM	50	0	22.42	22.40	22.27	0
		1	0	22.39	22.34	22.44	0
		1	24	22.04	22.45	22.04	0
		1	49	22.33	22.27	22.04	0
		25	0	22.28	22.32	22.19	0
		25	12	22.29	22.29	22.18	0
	64QAM	25	24	22.32	22.30	22.21	0
		50	0	22.37	22.40	22.19	0
		1	0	22.40	22.58	22.32	0
		1	24	22.31	22.48	22.21	0
		1	49	22.35	22.38	22.16	0
		25	0	21.25	21.29	21.15	1
	256QAM	25	12	21.24	21.30	21.16	1
		25	24	21.27	21.30	21.12	1
		50	0	21.34	21.33	21.23	1
		1	0	19.50	19.42	19.26	3
		1	24	19.35	19.45	19.36	3
		1	49	19.42	19.44	19.16	3
		25	0	19.32	19.33	19.15	3
		25	12	19.31	19.30	19.14	3
	25	24	19.32	19.32	19.14	3	
	50	0	19.31	19.28	19.14	3	

LTE Band 2 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				18675 Ch. 1857.5 MHz	18900 Ch. 1880 MHz	19125 Ch. 1902.5 MHz	
15 MHz	QPSK	1	0	22.00	22.14	22.13	0
		1	36	22.10	22.24	22.17	0
		1	74	22.13	22.17	22.11	0
		36	0	22.17	22.27	22.23	0
		36	18	22.21	22.30	22.21	0
		36	39	22.21	22.29	22.20	0
		75	0	22.28	22.29	22.21	0
	16QAM	1	0	22.27	22.53	22.44	0
		1	36	22.21	22.21	22.16	0
		1	74	22.25	22.34	22.17	0
		36	0	22.18	22.31	22.19	0
		36	18	22.16	22.26	22.19	0
		36	39	22.17	22.24	22.15	0
		75	0	22.21	22.26	22.19	0
	64QAM	1	0	22.42	22.41	22.27	0
		1	36	22.29	22.50	22.33	0
		1	74	22.44	22.31	22.17	0
		36	0	21.26	21.30	21.22	1
		36	18	21.20	21.35	21.24	1
		36	39	21.27	21.29	21.21	1
		75	0	21.22	21.28	21.16	1
	256QAM	1	0	19.39	19.37	19.30	3
		1	36	19.44	19.54	19.31	3
		1	74	19.47	19.39	19.28	3
		36	0	19.25	19.32	19.23	3
		36	18	19.24	19.32	19.20	3
		36	39	19.27	19.30	19.21	3
		75	0	19.28	19.33	19.21	3

LTE Band 2 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz	
20 MHz	QPSK	1	0	22.15	22.33	22.17	0
		1	49	22.21	22.41	22.30	0
		1	99	22.20	22.24	22.18	0
		50	0	22.39	22.47	22.37	0
		50	25	22.38	22.42	22.32	0
		50	49	22.38	22.46	22.39	0
	16QAM	100	0	22.33	22.38	22.33	0
		1	0	22.38	22.46	22.34	0
		1	49	22.17	22.44	22.35	0
		1	99	22.54	22.48	22.32	0
		50	0	22.38	22.41	22.36	0
		50	25	22.39	22.41	22.35	0
	64QAM	50	49	22.35	22.37	22.35	0
		100	0	22.27	22.31	22.30	0
		1	0	22.37	22.43	22.25	0
		1	49	22.27	22.50	22.43	0
		1	99	22.51	22.35	22.29	0
		50	0	21.38	21.39	21.33	1
	256QAM	50	25	21.37	21.39	21.32	1
		50	49	21.33	21.39	21.32	1
		100	0	21.24	21.34	21.26	1
		1	0	19.32	19.48	19.40	3
		1	49	19.32	19.31	19.41	3
		1	99	19.49	19.46	19.37	3
	50	0	19.31	19.35	19.31	3	
	50	25	19.30	19.32	19.30	3	
	50	49	19.27	19.37	19.31	3	
	100	0	19.28	19.34	19.30	3	

[LTE Band 4 Conducted Power]

LTE Band 4 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				19957 Ch. 1710.7 MHz	20175 Ch. 1732.5 MHz	20393 Ch. 1754.3 MHz	
1.4 MHz	QPSK	1	0	21.88	21.69	21.91	0
		1	3	21.84	21.63	21.84	0
		1	5	22.00	21.76	22.05	0
		3	0	21.97	21.76	21.91	0
		3	1	21.99	21.65	22.00	0
		3	3	21.98	21.74	21.93	0
		6	0	22.05	21.77	21.99	0
	16QAM	1	0	22.08	21.84	22.14	0
		1	3	22.06	21.85	22.05	0
		1	5	22.11	21.97	22.21	0
		3	0	22.02	21.79	22.07	0
		3	1	21.96	21.81	22.01	0
		3	3	22.04	21.79	21.96	0
		6	0	21.07	20.84	20.79	0
	64QAM	1	0	21.16	20.87	21.09	0
		1	3	21.04	20.86	21.06	0
		1	5	21.12	20.88	21.18	0
		3	0	21.10	20.83	21.11	0
		3	1	21.04	20.78	20.98	0
		3	3	20.96	20.78	20.95	0
		6	0	19.99	19.80	20.01	1
	256QAM	1	0	18.11	17.79	17.95	3
		1	3	18.10	17.85	18.03	3
		1	5	18.20	17.91	18.09	3
		3	0	18.17	17.93	18.09	3
		3	1	18.07	17.85	18.03	3
		3	3	18.07	17.82	18.01	3
		6	0	18.04	17.78	17.97	3

LTE Band 4 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				19965 Ch. 1711.5 MHz	20175 Ch. 1732.5 MHz	20385 Ch. 1753.5 MHz	
3 MHz	QPSK	1	0	21.88	21.70	22.05	0
		1	7	22.00	21.84	22.07	0
		1	14	21.94	21.78	22.00	0
		8	0	22.05	21.84	22.06	0
		8	3	22.07	21.79	22.04	0
		8	7	22.07	21.85	22.05	0
		15	0	22.10	21.86	22.05	0
	16QAM	1	0	22.09	21.85	22.23	0
		1	7	22.01	21.73	21.84	0
		1	14	22.20	21.85	22.21	0
		8	0	21.11	20.94	21.09	0
		8	3	21.14	20.86	21.09	0
		8	7	21.14	20.91	21.10	0
		15	0	21.08	20.85	21.01	0
	64QAM	1	0	21.19	20.98	21.24	0
		1	7	21.29	21.01	21.37	0
		1	14	21.20	20.96	21.21	0
		8	0	20.11	19.83	20.03	1
		8	3	20.10	19.83	20.04	1
		8	7	20.14	19.85	20.05	1
		15	0	20.09	19.78	20.02	1
	256QAM	1	0	18.23	17.93	18.16	3
		1	7	18.15	17.98	18.22	3
		1	14	18.23	17.84	18.20	3
		8	0	18.14	17.83	18.09	3
		8	3	18.19	17.83	18.08	3
		8	7	18.20	17.88	18.11	3
15		0	18.18	17.84	18.05	3	

LTE Band 4 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				19975 Ch. 1712.5 MHz	20175 Ch. 1732.5 MHz	20375 Ch. 1752.5 MHz	
5 MHz	QPSK	1	0	22.08	22.06	22.04	0
		1	12	22.23	22.23	22.25	0
		1	24	22.17	22.17	22.11	0
		12	0	22.17	22.16	22.10	0
		12	6	22.18	22.14	22.16	0
		12	11	22.22	22.17	22.17	0
	16QAM	25	0	22.32	22.21	22.18	0
		1	0	22.32	22.26	22.32	0
		1	12	22.51	22.40	22.33	0
		1	24	22.36	22.43	22.33	0
		12	0	21.15	21.15	21.14	0
		12	6	21.16	21.08	21.11	0
	64QAM	12	11	21.22	21.14	21.17	0
		25	0	21.22	21.17	21.14	0
		1	0	21.13	21.27	21.18	0
		1	12	21.41	21.32	21.37	0
		1	24	21.35	21.26	21.28	0
		12	0	20.07	20.08	20.03	1
	256QAM	12	6	20.08	20.10	20.04	1
		12	11	20.09	20.06	20.02	1
		25	0	20.12	20.07	20.05	1
		1	0	18.25	18.14	18.05	3
		1	12	18.29	18.33	18.35	3
		1	24	18.29	18.24	18.16	3
	12	0	18.19	18.12	18.06	3	
	12	6	18.13	18.12	18.09	3	
	12	11	18.13	18.08	18.06	3	
	25	0	18.21	18.13	18.10	3	

LTE Band 4 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				20000 Ch. 1715 MHz	20175 Ch. 1732.5 MHz	20350 Ch. 1750 MHz	
10 MHz	QPSK	1	0	22.19	22.36	22.35	0
		1	24	22.41	22.53	22.50	0
		1	49	22.31	22.35	22.28	0
		25	0	22.47	22.44	22.37	0
		25	12	22.45	22.43	22.39	0
		25	24	22.51	22.46	22.42	0
		50	0	22.53	22.47	22.45	0
	16QAM	1	0	22.42	22.42	22.44	0
		1	24	22.56	22.45	22.43	0
		1	49	22.50	22.51	22.51	0
		25	0	21.45	21.38	21.39	0
		25	12	21.42	21.39	21.36	0
		25	24	21.43	21.38	21.36	0
		50	0	21.48	21.40	21.35	0
	64QAM	1	0	21.51	21.47	21.39	0
		1	24	21.68	21.55	21.61	0
		1	49	21.51	21.50	21.50	0
		25	0	20.40	20.34	20.27	1
		25	12	20.40	20.33	20.31	1
		25	24	20.39	20.32	20.31	1
		50	0	20.44	20.39	20.33	1
	256QAM	1	0	18.50	18.46	18.48	3
		1	24	18.58	18.50	18.48	3
		1	49	18.68	18.58	18.49	3
		25	0	18.47	18.39	18.34	3
		25	12	18.44	18.37	18.34	3
		25	24	18.49	18.39	18.38	3
50		0	18.44	18.36	18.35	3	

LTE Band 4 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				20025 Ch. 1717.5 MHz	20175 Ch. 1732.5 MHz	20325 Ch. 1747.5 MHz	
15 MHz	QPSK	1	0	22.05	22.22	22.17	0
		1	36	22.28	22.42	22.45	0
		1	74	22.28	22.30	22.30	0
		36	0	22.32	22.31	22.31	0
		36	18	22.35	22.33	22.29	0
		36	39	22.39	22.32	22.33	0
		75	0	22.42	22.35	22.34	0
	16QAM	1	0	22.32	22.42	22.40	0
		1	36	22.40	22.07	22.29	0
		1	74	22.47	22.35	22.45	0
		36	0	21.35	21.29	21.28	0
		36	18	21.33	21.30	21.24	0
		36	39	21.35	21.32	21.31	0
		75	0	21.33	21.26	21.25	0
	64QAM	1	0	21.44	21.37	21.38	0
		1	36	21.47	21.56	21.51	0
		1	74	21.64	21.48	21.55	0
		36	0	20.32	20.30	20.22	1
		36	18	20.38	20.31	20.27	1
		36	39	20.31	20.29	20.25	1
		75	0	20.27	20.25	20.21	1
	256QAM	1	0	18.35	18.48	18.36	3
		1	36	18.36	18.49	18.52	3
		1	74	18.54	18.49	18.46	3
		36	0	18.33	18.31	18.23	3
		36	18	18.33	18.31	18.29	3
		36	39	18.40	18.35	18.31	3
		75	0	18.37	18.31	18.32	3

LTE Band 4 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				2050 Ch. 1720 MHz	20175 Ch. 1732.5 MHz	20300 Ch. 1745 MHz	
20 MHz	QPSK	1	0	21.97	22.25	22.12	0
		1	49	22.31	22.43	22.36	0
		1	99	22.18	22.29	22.29	0
		50	0	22.31	22.39	22.38	0
		50	25	22.32	22.43	22.38	0
		50	49	22.37	22.46	22.41	0
		100	0	22.31	22.42	22.35	0
	16QAM	1	0	22.21	22.39	22.41	0
		1	49	22.30	22.53	22.38	0
		1	99	22.42	22.54	22.47	0
		50	0	21.31	21.34	21.35	0
		50	25	21.28	21.37	21.32	0
		50	49	21.34	21.39	21.37	0
		100	0	21.29	21.34	21.28	0
	64QAM	1	0	21.24	21.48	21.39	0
		1	49	21.47	21.43	21.27	0
		1	99	21.47	21.54	21.42	0
		50	0	20.25	20.29	20.32	1
		50	25	20.29	20.36	20.32	1
		50	49	20.30	20.38	20.30	1
		100	0	20.23	20.26	20.20	1
	256QAM	1	0	18.34	18.31	18.36	3
		1	49	18.44	18.32	18.37	3
		1	99	18.52	18.51	18.30	3
50		0	18.25	18.30	18.25	3	
50		25	18.28	18.29	18.27	3	
50		49	18.26	18.32	18.32	3	
100		0	18.32	18.31	18.31	3	

[LTE Band 66 Conducted Power]

LTE Band 66 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				131979Ch. 1710.7 MHz	132322 Ch. 1745 MHz	132665 Ch. 1779.3 MHz	
1.4 MHz	QPSK	1	0	22.10	22.11	22.13	0
		1	3	22.05	22.11	22.16	0
		1	5	22.22	22.20	22.27	0
		3	0	22.23	22.22	22.31	0
		3	1	22.24	22.22	22.29	0
		3	3	22.21	22.22	22.27	0
	16QAM	6	0	22.29	22.20	22.32	0
		1	0	22.27	22.37	22.38	0
		1	3	22.31	22.28	22.32	0
		1	5	22.25	22.27	22.47	0
		3	0	22.33	22.32	22.37	0
		3	1	22.27	22.19	22.32	0
	64QAM	3	3	22.29	22.30	22.29	0
		6	0	22.31	22.20	22.35	0
		1	0	22.31	22.31	22.39	0
		1	3	22.24	22.19	22.32	0
		1	5	22.42	22.29	22.35	0
		3	0	22.38	22.32	22.40	0
	256QAM	3	1	22.32	22.29	22.26	0
		3	3	22.24	22.23	22.26	0
		6	0	21.28	21.19	21.33	1
		1	0	19.39	19.37	19.45	3
		1	3	19.35	19.31	19.49	3
		1	5	19.56	19.36	19.53	3
		3	0	19.37	19.25	19.34	3
		3	1	19.39	19.28	19.46	3
		3	3	19.41	19.25	19.37	3
		6	0	19.41	19.29	19.40	3

LTE Band 66 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				131987 Ch. 1711.5 MHz	132322 Ch. 1745 MHz	132657 Ch. 1778.5 MHz	
3 MHz	QPSK	1	0	22.16	22.34	22.24	0
		1	7	22.35	22.51	22.48	0
		1	14	22.20	22.26	22.21	0
		8	0	22.29	22.36	22.34	0
		8	3	22.31	22.32	22.31	0
		8	7	22.36	22.35	22.29	0
	15	0	22.36	22.33	22.31	0	
	16QAM	1	0	22.29	22.36	22.34	0
		1	7	22.37	22.26	22.30	0
		1	14	22.45	22.36	22.34	0
		8	0	22.32	22.36	22.31	0
		8	3	22.31	22.38	22.25	0
		8	7	22.37	22.38	22.32	0
	15	0	22.35	22.30	22.29	0	
	64QAM	1	0	22.43	22.43	22.39	0
		1	7	22.35	22.43	22.46	0
		1	14	22.45	22.39	22.36	0
		8	0	21.28	21.30	21.31	1
		8	3	21.36	21.31	21.28	1
		8	7	21.41	21.31	21.23	1
	15	0	21.35	21.29	21.26	1	
	256QAM	1	0	19.54	19.40	19.38	3
		1	7	19.60	19.54	19.51	3
		1	14	19.55	19.50	19.45	3
		8	0	19.44	19.37	19.37	3
		8	3	19.45	19.33	19.37	3
		8	7	19.53	19.37	19.34	3
15	0	19.47	19.34	19.34	3		

LTE Band 66 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				131997 Ch. 1712.5 MHz	132322Ch. 1745 MHz	132647 Ch. 1777.5 MHz	
5 MHz	QPSK	1	0	22.10	22.27	22.25	0
		1	12	22.39	22.53	22.46	0
		1	24	22.32	22.33	22.33	0
		12	0	22.34	22.32	22.28	0
		12	6	22.36	22.33	22.29	0
		12	11	22.39	22.36	22.35	0
	25	0	22.47	22.41	22.41	0	
	16QAM	1	0	22.39	22.48	22.35	0
		1	12	22.26	22.49	22.36	0
		1	24	22.51	22.49	22.36	0
		12	0	22.36	22.34	22.31	0
		12	6	22.37	22.32	22.29	0
		12	11	22.40	22.33	22.34	0
	25	0	22.48	22.36	22.34	0	
	64QAM	1	0	22.39	22.38	22.39	0
		1	12	22.48	22.48	22.56	0
		1	24	22.52	22.54	22.46	0
		12	0	21.37	21.30	21.27	1
		12	6	21.36	21.30	21.33	1
		12	11	21.40	21.26	21.25	1
	25	0	21.37	21.31	21.27	1	
	256QAM	1	0	19.53	19.44	19.41	3
		1	12	19.50	19.40	19.47	3
		1	24	19.57	19.46	19.46	3
		12	0	19.44	19.34	19.37	3
		12	6	19.49	19.35	19.33	3
		12	11	19.47	19.34	19.31	3
	25	0	19.51	19.38	19.37	3	

LTE Band 66 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				132022 Ch. 1715 MHz	132322 Ch. 1745 MHz	132622 Ch. 1775 MHz	
10 MHz	QPSK	1	0	22.21	22.44	22.23	0
		1	24	22.42	22.58	22.44	0
		1	49	22.28	22.40	22.35	0
		25	0	22.41	22.51	22.48	0
		25	12	22.45	22.51	22.44	0
		25	24	22.47	22.53	22.48	0
	16QAM	50	0	22.51	22.53	22.48	0
		1	0	22.33	22.45	22.35	0
		1	24	22.51	22.46	22.56	0
		1	49	22.59	22.44	22.46	0
		25	0	22.41	22.34	22.41	0
		25	12	22.44	22.36	22.42	0
	64QAM	25	24	22.42	22.35	22.44	0
		50	0	22.47	22.42	22.45	0
		1	0	22.40	22.35	22.53	0
		1	24	22.44	22.27	22.33	0
		1	49	22.47	22.36	22.54	0
		25	0	21.38	21.23	21.34	1
	256QAM	25	12	21.42	21.28	21.35	1
		25	24	21.38	21.26	21.36	1
		50	0	21.45	21.31	21.42	1
		1	0	19.49	19.41	19.41	3
		1	24	19.63	19.28	19.41	3
		1	49	19.58	19.39	19.52	3
		25	0	19.47	19.29	19.47	3
		25	12	19.47	19.29	19.41	3
		25	24	19.48	19.30	19.45	3
50		0	19.48	19.26	19.42	3	

LTE Band 66 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				132047 Ch. 1717.5 MHz	132322 Ch. 1745 MHz	132597 Ch. 1772.5 MHz	
15 MHz	QPSK	1	0	21.89	21.87	21.93	0
		1	36	22.02	22.05	22.07	0
		1	74	22.13	22.11	22.03	0
		36	0	22.12	22.06	22.03	0
		36	18	22.12	22.09	22.04	0
		36	39	22.23	22.14	22.08	0
		75	0	22.18	22.12	22.06	0
	16QAM	1	0	22.18	22.19	22.20	0
		1	36	22.18	22.25	22.02	0
		1	74	22.30	22.15	22.24	0
		36	0	22.13	22.07	21.99	0
		36	18	22.12	22.10	22.00	0
		36	39	22.18	22.07	22.01	0
		75	0	22.15	22.05	21.97	0
	64QAM	1	0	22.20	22.19	22.08	0
		1	36	22.35	22.30	22.24	0
		1	74	22.30	22.27	22.17	0
		36	0	21.13	21.02	21.01	1
		36	18	21.16	21.08	21.02	1
		36	39	21.19	21.07	21.03	1
		75	0	21.13	21.05	20.94	1
	256QAM	1	0	19.25	19.20	19.14	3
		1	36	19.18	19.13	19.17	3
		1	74	19.22	19.30	19.25	3
		36	0	19.18	19.08	19.03	3
		36	18	19.21	19.14	19.02	3
		36	39	19.24	19.17	19.12	3
		75	0	19.21	19.15	19.08	3

LTE Band 66 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR [dB]
				132072 Ch. 1720 MHz	132322 Ch. 1745 MHz	132572 Ch. 1770 MHz	
20 MHz	QPSK	1	0	21.98	21.96	21.96	0
		1	49	22.19	22.14	22.07	0
		1	99	22.08	21.98	21.99	0
		50	0	22.15	22.20	22.05	0
		50	25	22.17	22.09	22.10	0
		50	49	22.20	22.11	22.08	0
	100	0	22.17	22.04	22.04	0	
	16QAM	1	0	22.11	22.13	22.03	0
		1	49	22.01	21.93	22.25	0
		1	99	22.33	22.08	22.01	0
		50	0	22.13	22.03	22.00	0
		50	25	22.16	22.05	22.01	0
		50	49	22.19	22.06	22.03	0
	100	0	22.09	21.99	21.99	0	
	64QAM	1	0	22.20	22.09	22.12	0
		1	49	22.41	22.12	22.12	0
		1	99	22.25	22.18	22.08	0
		50	0	21.10	21.03	21.03	1
		50	25	21.12	20.99	21.03	1
		50	49	21.15	21.01	21.04	1
	100	0	21.07	20.98	20.94	1	
	256QAM	1	0	19.18	19.14	19.10	3
		1	49	19.34	19.19	19.06	3
		1	99	19.32	19.18	19.20	3
50		0	19.10	19.03	18.99	3	
50		25	19.13	19.01	18.97	3	
50		49	19.14	19.03	19.05	3	
100	0	19.16	19.05	19.06	3		

11.3.4 LTE Uplink Carrier Aggregation Conducted Power

LTE Inter-Band Uplink Carrier Aggregation – Interim Procedures

LTE Inter-Band Carrier Aggregation

According to October 2018 TCB workshop, Uplink CA SAR Test Guidance as follows:

- Provide the single uplink SAR values you have obtained for the relevant SAR configurations and frequency bands that employ inter-band uplink carrier aggregation.
- If the single uplink 1-g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1-g SAR values are less than 1.45 W/kg no additional measurements need to be performed.
- If one of the single uplink 1-g SAR values is greater than 0.8 W/kg, instead of algebraically summing the 1-g SAR values, sum up the SAR distributions, similar to the enlarged zoom scan (volume scan) procedures found in FCC KDB Publication 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.
- If the algebraic sum of the 1-g SAR values is > 1.45 W/kg additional measurements may have to be made.

Submit a KDB inquiry for additional guidance.

- As the uplink SAR values for each carrier are less than 0.8 W/kg and the sum-SAR values for the carrier aggregation are less than 1.45 W/kg this assessment meets the requirements detailed in TCBC workshop October 2018 and PAG is not required to address carrier aggregation

Maximum Output Power (Tune-up Limit) and SAR test exemption for LTE UL Carrier Aggregation

When 2A-4A combination is connected to SCC, PCC changes from Main2 to sub2 and operates.

In ANT 2A(Sub2)-4A(Main2) combination UL CA SAR is replaced from the LTE B4/66 Main2 Ant., 2A Sub2 Ant obtained SAR Results during the Test.

And in Ant 4A(Sub2)-2A(Main2) combination UL CA SAR is replaced from the LTE B2 Main2 Ant., 4A Sub2 Ant obtained SAR Results during the Test.

[LTE Band 2 (PCC, Sub Ant2) Uplink Carrier Aggregation Conducted Power]

- Maximum Conducted Power

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP[dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	19.69	19.75	19.85	0	0
		1	99	19.67	19.70	19.84	0	0
		18	0	19.64	19.80	19.84	0	0
		18	82	19.62	19.75	19.80	0	0

- Reduced Conducted Power

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP[dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	18.66	18.77	18.77	0	0
		1	99	18.62	18.75	18.76	0	0
		18	0	18.59	18.80	18.76	0	0
		18	82	18.62	18.77	18.75	0	0

[LTE Band 4(PCC, Sub Ant2) Uplink Carrier Aggregation Conducted Power]

- Maximum Conducted Power

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP[dB]	MPR [dB]
				20175 Ch. 1732.5 MHz		
20 MHz	QPSK	1	0	20.01	0	0
		1	99	19.84	0	0
		18	0	20.03	0	0
		18	82	19.82	0	0

- Reduced Conducted Power

Bandwidth	Modulation	RB Size	RB Offset	Reduced Average Power [dBm]	MPR Allowed Per 3GPP[dB]	MPR [dB]
				20175 Ch. 1732.5 MHz		
20 MHz	QPSK	1	0	18.00	0	0
		1	99	17.83	0	0
		18	0	18.01	0	0
		18	82	17.82	0	0

The single uplink 1g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1g SAR values are less than 1.45 W/kg therefore, no additional measurements are required.

11.5 WIFI Conducted Power measurement method


Un-Licensed Bands (DTS Band)

Test Description	Test Procedure Used
Conducted Output Power	- KDB 558074 v05 - Section 8.3.2.3 - ANSI 63.10-2013 - Section 11.9.2.3

Test Procedure

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test setup




Un-Licensed Bands(NII Band)

Test Description	Test Procedure Used
Conducted Output Power	- KDB 789033 D02 v02r01 - Section E.3.a

Test Procedure

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test setup



11.5.1 IEEE 802.11 (2.4 GHz) Maximum Conducted Power

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Average RF Conducted Power [dBm]			
			SISO	MIMO		
			Ant.1	Ant.1	Ant.2	MIMO
802.11b	2 412	1	17.91	18.63	18.26	21.46
	2 437	6	18.37	18.25	17.88	21.08
	2 462	11	17.49	17.76	18.56	21.19
	2 467	12	7.32	7.22	7.62	10.44
	2 472	13	0.20	0.07	0.78	3.45
802.11g	2 412	1	16.08	16.70	16.12	19.43
	2 437	6	15.86	15.90	16.13	19.03
	2 462	11	15.25	15.74	16.73	19.27
	2 467	12	7.24	7.30	7.69	10.51
	2 472	13	0.51	-0.24	0.60	3.21
802.11n (HT20)	2 412	1	16.03	16.85	16.14	19.52
	2 437	6	16.01	16.57	16.14	19.37
	2 462	11	15.18	15.74	16.82	19.33
	2 467	12	5.23	5.79	5.92	8.87
	2 472	13	-0.99	-0.58	0.62	3.07
802.11ax (HT20)	2 412	1	16.18	17.58	16.10	19.92
	2 437	6	16.76	17.19	16.16	19.72
	2 462	11	14.55	15.78	15.94	18.88
	2 467	12	4.71	4.95	5.18	8.08
	2 472	13	-0.69	-1.06	0.67	2.90

11.5.2 IEEE 802.11 (2.4 GHz) Reduced Conducted Power (Held to ear VOIP)

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Average RF Conducted Power [dBm]			
			SISO	MIMO		
			Ant.1	Ant.1	Ant.2	MIMO
802.11b	2 412	1	11.82	11.97	12.32	15.16
	2 437	6	12.41	12.55	11.98	15.28
	2 462	11	11.58	11.73	12.85	15.34
	2 467	12	7.32	7.22	7.62	10.44
	2 472	13	0.20	0.07	0.78	3.45
802.11g	2 412	1	11.90	11.87	12.15	15.02
	2 437	6	12.41	12.32	12.20	15.27
	2 462	11	11.58	11.49	12.31	14.93
	2 467	12	7.24	7.30	7.69	10.51
	2 472	13	0.51	-0.24	0.60	3.21
802.11n (HT20)	2 412	1	11.86	11.58	12.17	14.89
	2 437	6	12.41	12.38	12.26	15.33
	2 462	11	11.58	11.14	12.74	15.02
	2 467	12	5.50	5.48	5.85	8.68
	2 472	13	-1.28	-0.86	0.68	2.99
802.11ax (HT20)	2 412	1	12.04	11.75	12.13	14.96
	2 437	6	12.50	12.28	12.18	15.24
	2 462	11	11.33	11.15	12.53	14.91
	2 467	12	4.71	4.95	5.18	8.08
	2 472	13	-0.69	-1.06	0.67	2.90

11.5.3 IEEE 802.11 (5 GHz) Maximum Conducted Power

Mode	Frequency [MHz]	Channel	IEEE 802.11 (5 GHz) Average RF Conducted Power [dBm]			
			SISO	MIMO		
			Ant.2	Ant.1	Ant.2	MIMO
802.11a (20 MHz BW)	5 180	36	15.33	15.84	15.49	18.68
	5 200	40	15.78	15.60	15.80	18.71
	5 220	44	15.79	16.10	15.80	18.96
	5 240	48	15.88	16.12	16.13	19.13
	5 260	52	15.81	15.63	15.83	18.74
	5 280	56	15.54	15.95	15.57	18.77
	5 300	60	15.55	16.26	15.63	18.97
	5 320	64	15.25	15.93	15.63	18.79
	5 500	100	15.41	16.05	15.63	18.85
	5 600	120	15.93	16.65	15.98	19.34
	5 620	124	16.10	16.32	16.50	19.42
	5 720	144	16.15	16.23	16.56	19.41
	5 745	149	16.01	16.26	16.30	19.29
	5 785	157	15.67	16.38	15.71	19.07
	5 825	165	15.68	15.93	15.95	18.95


11.5.4 IEEE 802.11 (5 GHz) Reduced Conducted Power

Mode	Frequency [MHz]	Channel	IEEE 802.11 (5 GHz) Average Conducted Power [dBm]			
			SISO	MIMO		
			Ant.2	Ant.1	Ant.2	MIMO
802.11ac (80 MHz BW)	5 210	42	10.16	10.27	10.16	13.22
	5 290	58	9.91	10.53	9.56	13.08
	5 530	106	9.31	9.73	9.36	12.56
	5 610	122	9.28	9.65	9.72	12.69
	5 690	138	9.26	10.52	9.67	13.12
	5 775	155	9.45	10.22	9.53	12.89

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission mode with the same maximum output power specification, powers were measured for the largest channel Bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel Bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-Band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-Band channels, due to an even number of channels, both channels were measured.

Test Configuration



11.6 Bluetooth

Maximum Conducted Power

The Burst averaged-conducted power

Mode	Frequency [MHz]	Channel	Bluetooth Power [dBm]
DH5	2 402	0	11.27
	2 406	4	12.14
	2 410	8	12.47
	2 411	9	13.11
	2 441	39	14.13
	2 480	78	13.71
2-DH5	2 402	0	7.7
	2 441	39	10.45
	2 480	78	9.7
3-DH5	2 402	0	7.7
	2 441	39	10.43
	2 480	78	9.7

Mode	Packet length	Frequency [MHz]	Channel	Bluetooth Power [dBm]
LE 1M	37	2 402	0	11.89
		2 404	1	12.44
		2 406	2	12.87
		2 408	3	13.55
		2 440	19	14.71
		2 480	39	13.95
	255	2 402	0	11.92
		2 404	1	12.41
		2 406	2	12.88
		2 408	3	13.63
		2 440	19	14.68
		2 480	39	13.82
LE 2M	37	2 402	0	11.78
		2 404	1	12.36
		2 406	2	12.89
		2 408	3	13.34
		2 440	19	14.54
		2 480	39	13.85
	255	2 402	0	11.64
		2 404	1	12.15
		2 406	2	12.62
		2 408	3	13.53
		2 440	19	14.69
		2 480	39	13.99


Mode	Packet length	Frequency [MHz]	Channel	Bluetooth Power [dBm]
LE 125k	37	2 402	0	11.84
		2 404	1	12.29
		2 406	2	12.84
		2 408	3	13.30
		2 440	19	14.53
		2 480	39	13.88
	255	2 402	0	11.77
		2 404	1	12.27
		2 406	2	12.72
		2 408	3	13.33
		2 440	19	14.45
		2 480	39	13.74
LE 500k	37	2 402	0	11.90
		2 404	1	12.41
		2 406	2	12.87
		2 408	3	13.13
		2 440	19	14.59
		2 480	39	13.90
	255	2 402	0	11.62
		2 404	1	12.09
		2 406	2	12.61
		2 408	3	13.01
		2 440	19	14.48
		2 480	39	13.56

Per October 2016 TCB Workshop Notes:

When call box and Bluetooth protocol are used for Bluetooth SAR measurement, time-domain plot is required to identify duty factor for supporting the test setup and result.

Bluetooth duty cycle was measured using Bluetooth tester equipment (CBT / R&S) with Bluetooth DH5 mode. Bluetooth LE was measured in FTM Mode.

Bluetooth DH 5 Mode

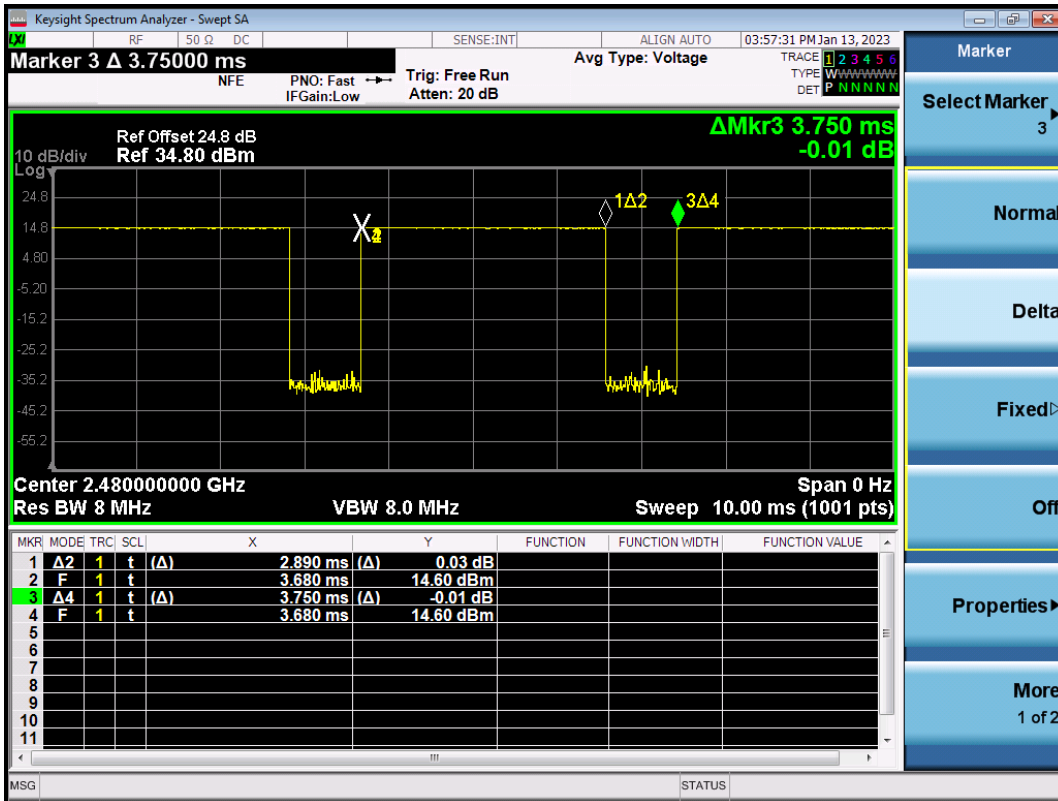


Bluetooth Duty Cycle [BDR]

Duty Cycle = (BT-On time /BT-Full time) =(2.890/3.750) = 0.771 (DH5)

BT DH5 Maximum Duty Factor:

The theoretical maximum duty cycle defined by chipset manufacturer is 77.83 % In the ideal theory Duty Cycle, the test error tolerance [1%] of the test equipment was considered and applied to the measurement results. The duty cycle of DH5 measured by DUT was 77.06 %, and the duty cycle was compensated by applying test error tolerance 1%.

Bluetooth LE Mode

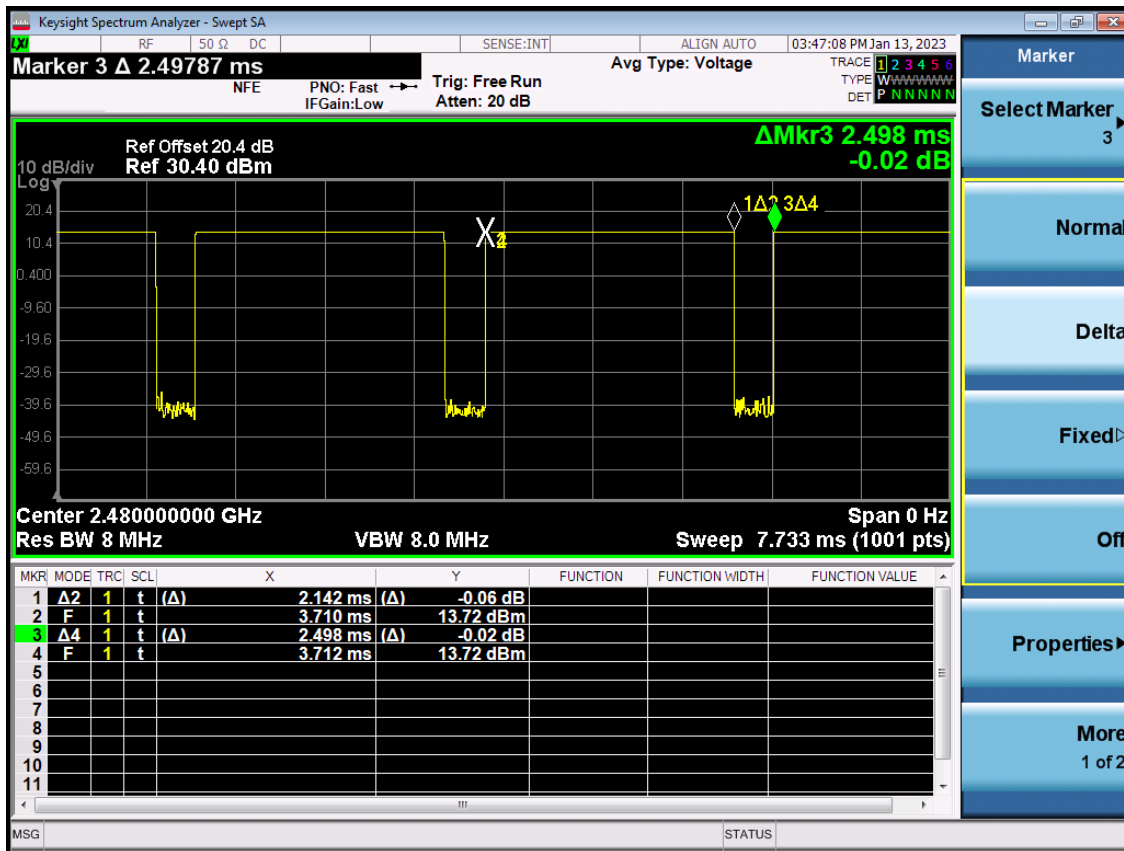

Bluetooth Duty Cycle [LE 1M]

Duty Cycle = (BT-On time /BT-Full time) =(2.142/2.498) = 0.857 (Bluetooth LE)

BT LE 1M Maximum Duty Factor:

The theoretical maximum duty cycle defined by chipset manufacturer is 86.46 % In the ideal theory Duty Cycle, the test error tolerance [1%] of the test equipment was considered and applied to the measurement results. The duty cycle of LE 1M measured by DUT was 85.7 %, and the duty cycle was compensated by applying test error tolerance 1%.

Bluetooth LE was measured in FTM Mode.

12. System Verification

12.1 Tissue Verification

The body simulating material is calibrated by HCT using the DAKS 3.5 to determine the conductivity and permittivity.

Table for Head Tissue Verification									
Date of Tests	Tissue Temp. (°C)	Tissue Type	Freq. (MHz)	Measured Conductivity σ (S/m)	Measured Dielectric Constant, ϵ	Target Conductivity σ (S/m)	Target Dielectric Constant, ϵ	% dev σ	% dev ϵ
01/10/2023	22.1	13H	12	0.744	54.211	0.750	55.000	-0.80	-1.43
			13	0.724	54.246	0.750	55.000	-3.47	-1.37
			14	0.756	54.227	0.750	55.000	0.80	-1.41
12/26/2022	19.8	750H	705	0.852	43.723	0.889	42.174	-4.16	3.67
			710	0.858	43.637	0.890	42.148	-3.60	3.53
			750	0.902	43.046	0.893	41.940	1.01	2.64
12/28/2022	20.2	835H	820	0.873	42.252	0.899	41.577	-2.89	1.62
			835	0.888	42.015	0.900	41.500	-1.33	1.24
			850	0.900	41.851	0.916	41.500	-1.75	0.85
12/28/2022	21.2	835H	820	0.881	41.736	0.899	41.577	-2.00	0.38
			835	0.898	41.532	0.900	41.500	-0.22	0.08
			850	0.911	41.330	0.916	41.500	-0.55	-0.41
12/27/2022	20.4	835H	820	0.913	43.195	0.899	41.577	1.56	3.89
			835	0.929	42.986	0.900	41.500	3.22	3.58
			850	0.944	42.791	0.916	41.500	3.06	3.11
12/29/2022	22.0	1800H	1710	1.303	39.774	1.348	40.144	-3.34	-0.92
			1750	1.346	39.632	1.371	40.080	-1.82	-1.12
			1800	1.400	39.397	1.400	40.000	0.00	-1.51
01/02/2023	20.1	1800H	1710	1.292	39.770	1.348	40.144	-4.15	-0.93
			1750	1.336	39.618	1.371	40.080	-2.55	-1.15
			1800	1.388	39.383	1.400	40.000	-0.86	-1.54
01/03/2023	20.8	1800H	1710	1.297	40.320	1.348	40.144	-3.78	0.44
			1750	1.340	40.174	1.371	40.080	-2.26	0.23
			1800	1.393	39.938	1.400	40.000	-0.50	-0.16
01/17/2023	21.7	1800H	1710	1.302	39.766	1.348	40.144	-3.41	-0.94
			1750	1.345	39.628	1.371	40.080	-1.90	-1.13
			1800	1.400	39.394	1.400	40.000	0.00	-1.52
01/02/2023	19.3	1900H	1850	1.362	40.529	1.400	40.000	-2.71	1.32
			1900	1.399	40.319	1.400	40.000	-0.07	0.80
			1910	1.418	40.388	1.400	40.000	1.29	0.97
01/02/2023	20.6	1900H	1850	1.332	40.437	1.400	40.000	-4.86	1.09
			1900	1.380	40.246	1.400	40.000	-1.43	0.62
			1910	1.387	40.216	1.400	40.000	-0.93	0.54
12/28/2022	19.8	1900H	1850	1.370	41.462	1.400	40.000	-2.14	3.66
			1900	1.425	41.276	1.400	40.000	1.79	3.19
			1910	1.431	41.256	1.400	40.000	2.21	3.14
12/29/2022	19.6	1900H	1850	1.367	41.426	1.400	40.000	-2.36	3.57
			1900	1.422	41.249	1.400	40.000	1.57	3.12
			1910	1.428	41.225	1.400	40.000	2.00	3.06
01/04/2023	24.0	1900H	1850	1.370	41.441	1.400	40.000	-2.14	3.60
			1900	1.421	41.255	1.400	40.000	1.50	3.14
			1910	1.419	41.255	1.400	40.000	1.36	3.14

Table for Head Tissue Verification									
Date of Tests	Tissue Temp. (°C)	Tissue Type	Freq. (MHz)	Measured Conductivity σ (S/m)	Measured Dielectric Constant, ϵ	Target Conductivity σ (S/m)	Target Dielectric Constant, ϵ	% dev σ	% dev ϵ
01/09/2023	20.6	2450H	2400	1.767	39.436	1.756	39.290	0.63	0.37
			2450	1.824	39.210	1.800	39.200	1.33	0.03
			2500	1.881	39.049	1.855	39.140	1.40	-0.23
01/11/2023	20.3	2450H	2400	1.756	39.070	1.756	39.290	0.00	-0.56
			2450	1.816	38.860	1.800	39.200	0.89	-0.87
			2500	1.872	38.680	1.855	39.140	0.92	-1.18
12/27/2022	22.5	2600H	2500	1.876	38.512	1.855	39.140	1.13	-1.60
			2550	1.926	38.306	1.909	39.070	0.89	-1.96
			2600	1.980	38.100	1.964	39.010	0.81	-2.33
01/06/2023	19.6	5250H	5180	4.561	36.127	4.635	36.010	-1.60	0.32
			5250	4.692	35.921	4.706	35.930	-0.30	-0.03
			5280	4.727	35.894	4.737	35.894	-0.21	0.00
			5320	4.780	35.957	4.778	35.846	0.04	0.31
01/06/2023	19.6	5600H	5500	4.905	35.753	4.963	35.640	-1.17	0.32
			5600	4.968	35.378	5.065	35.530	-1.92	-0.43
01/06/2023	19.6	5750H	5750	5.255	35.256	5.219	35.360	0.69	-0.29
			5800	5.243	35.268	5.270	35.300	-0.51	-0.09
			5825	5.244	35.236	5.296	35.270	-0.98	-0.10
01/09/2023	21.4	5250H	5180	4.570	36.162	4.635	36.010	-1.40	0.42
			5250	4.670	36.011	4.706	35.930	-0.76	0.23
			5280	4.715	35.983	4.737	35.894	-0.46	0.25
			5320	4.802	35.963	4.778	35.846	0.50	0.33
01/09/2023	21.4	5600H	5500	4.912	35.673	4.963	35.640	-1.03	0.09
			5600	4.979	35.412	5.065	35.530	-1.70	-0.33
01/09/2023	21.4	5750H	5750	5.244	35.158	5.219	35.360	0.48	-0.57
			5800	5.211	35.168	5.270	35.300	-1.12	-0.37
			5825	5.196	35.156	5.296	35.270	-1.89	-0.32
01/03/2023	20.3	5250H	5180	4.695	36.636	4.635	36.010	1.29	1.74
			5250	4.810	36.500	4.706	35.930	2.21	1.59
			5280	4.853	36.466	4.737	35.894	2.45	1.59
			5320	4.928	36.400	4.778	35.846	3.14	1.55
01/03/2023	20.3	5600H	5500	5.049	36.238	4.963	35.640	1.73	1.68
			5600	5.110	35.900	5.065	35.530	0.89	1.04
01/03/2023	20.3	5750H	5750	5.390	35.600	5.219	35.360	3.28	0.68
			5800	5.389	35.675	5.270	35.300	2.26	1.06
			5825	5.370	35.677	5.296	35.270	1.40	1.15
01/04/2023	18.8	5250H	5180	4.665	36.542	4.635	36.010	0.65	1.48
			5250	4.780	36.400	4.706	35.930	1.57	1.31
			5280	4.823	36.371	4.737	35.894	1.82	1.33
			5320	4.894	36.300	4.778	35.846	2.43	1.27
01/04/2023	18.8	5600H	5500	5.018	36.130	4.963	35.640	1.11	1.37
			5600	5.080	35.800	5.065	35.530	0.30	0.76
01/04/2023	18.8	5750H	5750	5.360	35.500	5.219	35.360	2.70	0.40
			5800	5.356	35.572	5.270	35.300	1.63	0.77
			5825	5.336	35.570	5.296	35.270	0.76	0.85

12.2 System Verification

Input Power: 50 mW

Freq. [MHz]	Date	Probe (S/N)	Dipole (S/N)	Liquid	Amb. Temp. [°C]	Liquid Temp. [°C]	1 W Target SAR _{1g} (SPEAG) [W/kg]	50mW Measured SAR _{1g} [W/kg]	1 W Normalized SAR _{1g} [W/kg]	Deviation [%]	Limit [%]
750	12/26/2022	3903	1014	Head	19.9	19.8	8.71	0.404	8.08	- 7.23	± 10
835	12/28/2022	7702	441	Head	20.3	20.2	9.73	0.481	9.62	- 1.13	± 10
835	12/28/2022	7751		Head	21.3	21.2	9.73	0.466	9.32	- 4.21	± 10
835	12/27/2022	3903		Head	20.5	20.4	9.73	0.495	9.9	+ 1.75	± 10
1 800	12/29/2022	7751	2d007	Head	22.1	22.0	38.2	1.830	36.6	- 4.19	± 10
1 800	01/02/2023	3903		Head	20.3	20.1	38.2	2.100	42	+ 9.95	± 10
1 800	01/17/2023	7732		Head	21.9	21.7	38.2	1.920	38.4	+ 0.52	± 10
1 900	01/02/2023	7702	5d032	Head	19.4	19.3	40.0	2.030	40.6	+ 1.50	± 10
1 900	01/02/2023	7751		Head	20.7	20.6	40.0	2.030	40.6	+1.50	± 10
1 900	12/28/2022	3903		Head	19.9	19.8	40.0	1.890	37.8	- 5.50	± 10
1 900	01/04/2023	7732		Head	24.1	24.0	40.0	1.920	38.4	- 4.00	± 10
2 450	01/09/2023	7681	743	Head	20.7	20.6	53.2	2.860	57.2	+ 7.52	± 10
2 450	01/11/2023	7654		Head	20.4	20.3	53.2	2.680	53.6	+ 0.75	± 10
2 600	12/27/2022	3968	1015	Head	22.6	22.5	56.3	2.600	52	- 7.64	± 10
5 250	01/06/2023	7622	1253	Head	19.7	19.6	80.4	4.250	85	+ 5.72	± 10
5 600	01/06/2023	7622		Head	19.7	19.6	82.1	4.390	87.8	+ 6.94	± 10
5 750	01/06/2023	7622		Head	19.7	19.6	79.9	4.270	85.4	+ 6.88	± 10
5 250	01/09/2023	7622		Head	21.5	21.4	80.6	4.070	81.4	+ 0.99	± 10
5 600	01/09/2023	7622		Head	21.5	21.4	84.2	4.360	87.2	+ 3.56	± 10
5 750	01/09/2023	7622		Head	21.5	21.4	80.9	4.240	84.8	+ 4.82	± 10
5 250	01/03/2023	3768		Head	20.4	20.3	80.4	3.880	77.6	- 3.48	± 10
5 600	01/03/2023	3768		Head	20.4	20.3	82.1	4.070	81.4	- 0.85	± 10
5 750	01/03/2023	3768		Head	20.4	20.3	79.9	3.930	78.6	- 1.63	± 10
5 250	01/04/2023	3768		Head	18.9	18.8	80.6	4.310	86.2	+ 6.95	± 10
5 600	01/04/2023	3768		Head	18.9	18.8	84.2	4.480	89.6	+ 6.41	± 10
5 750	01/04/2023	3768		Head	18.9	18.8	80.9	3.980	79.6	- 1.61	± 10

System Verification Results – Phablet SAR

Input Power: 50 mW

Freq.	Date	Probe (S/N)	Dipole (S/N)	Liquid	Amb. Temp.	Liquid Temp.	1 W Target SAR _{10g} (SPEAG)	50mW Measured SAR _{10g}	1 W Normalized SAR _{10g}	Deviation	Limit
[MHz]					[°C]	[°C]	[W/kg]	[W/kg]	[W/kg]	[%]	[%]
13	01/10/2023	3076	1016	Head	22.2	22.1	0.353	0.017	0.340	- 3.68	± 10
1 800	01/03/2023	3903	2d007	Head	20.9	20.8	19.8	0.955	19.1	- 3.54	± 10
1 900	01/02/2023	7751	5d032	Head	20.7	20.6	20.9	1.030	20.6	-1.44	± 10
5 250	01/03/2023	3768	1253	Head	20.4	20.3	23.2	1.110	22.2	- 4.31	± 10
5 600	01/03/2023	3768		Head	20.4	20.3	24.2	1.150	23	- 4.96	± 10
5 250	01/04/2023	3768		Head	18.9	18.8	23.2	1.200	24	+ 3.45	± 10
5 600	01/04/2023	3768		Head	18.9	18.8	24.2	1.230	24.6	+ 1.65	± 10

12.3 System Verification Procedure

SAR measurement was prior to assessment; the system is verified to the ± 10 % of the specifications at each frequency Band by using the system verification kit. (Graphic Plots Attached)

- Cabling the system, using the verification kit equipment.
- Generate about 50 mW Input level from the signal generator to the Dipole Antenna.
- Dipole antenna was placed below the flat phantom.
- The measured one-gram SAR at the surface of the phantom above the dipole feed-point should be within 10 % of the target reference value.
- The results are normalized to 1 W input power.

Note

SAR Verification was performed according to the FCC KDB 865664 D01v01r04.

13. SAR Test Data Summary

13.1 SAR Measurement Results

Spot Check Verification Results : GSM 850 Head SAR (1g)																	
Reference Model Measurement Results										Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	(dB)	(dB)	(dB)	(W/kg)		(W/kg)	
836.6	190	GSM	34.5	33.25	0.11	Left Cheek	1:8.3	0.200	1.334	0.267	34.5	33.78					
836.6	190	GSM	34.5	33.25	0.11	Left Tilt	1:8.3	0.126	1.334	0.168	34.5	33.78					
836.6	190	GSM	34.5	33.25	0.18	Right Cheek	1:8.3	0.260	1.334	0.347	34.5	33.78					
836.6	190	GSM	34.5	33.25	0.14	Right Tilt	1:8.3	0.119	1.334	0.159	34.5	33.78					
836.6	190	GPRS 3TX	30.0	29.04	0.17	Left Cheek	1:2.77	0.223	1.247	0.278	30.0	29.75					
836.6	190	GPRS 3TX	30.0	29.04	0.00	Left Tilt	1:2.77	0.123	1.247	0.153	30.0	29.75					
836.6	190	GPRS 3TX	30.0	29.04	0.13	Right Cheek	1:2.77	0.301	1.247	0.375	30.0	29.75	-0.17	0.236	1.059	0.250	A1
836.6	190	GPRS 3TX	30.0	29.04	-0.01	Right Tilt	1:2.77	0.136	1.247	0.170	30.0	29.75					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram											

Spot Check Verification Results : GSM 1900 Head SAR (1g)																	
Reference Model Measurement Results										Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	(dB)	(dB)	(dB)	(W/kg)		(W/kg)	
1 880	661	GSM	31.5	30.50	-0.13	Left Cheek	1:8.3	0.118	1.259	0.149	31.5	30.93	0.10	0.101	1.140	0.115	A2
1 880	661	GSM	31.5	30.50	0.17	Left Tilt	1:8.3	0.087	1.259	0.110	31.5	30.93					
1 880	661	GSM	31.5	30.50	-0.12	Right Cheek	1:8.3	0.065	1.259	0.082	31.5	30.93					
1 880	661	GSM	31.5	30.50	0.08	Right Tilt	1:8.3	0.104	1.259	0.131	31.5	30.93					
1 880	661	GPRS 2TX	28.5	27.87	-0.13	Left Cheek	1:4.15	0.129	1.156	0.149	28.5	27.50					
1 880	661	GPRS 2TX	28.5	27.87	0.10	Left Tilt	1:4.15	0.095	1.156	0.110	28.5	27.50					
1 880	661	GPRS 2TX	28.5	27.87	0.11	Right Cheek	1:4.15	0.076	1.156	0.088	28.5	27.50					
1 880	661	GPRS 2TX	28.5	27.87	0.04	Right Tilt	1:4.15	0.115	1.156	0.133	28.5	27.50					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram											

Spot Check Verification Results : UMTS Band 5 Head SAR (1g)																	
Reference Model Measurement Results										Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																
836.6	4183	RMC	25.5	24.89	0.09	Left Cheek	1:1	0.192	1.151	0.221	25.5	24.92					
836.6	4183	RMC	25.5	24.89	0.10	Left Tilt	1:1	0.105	1.151	0.121	25.5	24.92					
836.6	4183	RMC	25.5	24.89	0.07	Right Cheek	1:1	0.269	1.151	0.310	25.5	24.92	0.13	0.258	1.143	0.295	A3
836.6	4183	RMC	25.5	24.89	0.01	Right Tilt	1:1	0.128	1.151	0.147	25.5	24.92					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population										Head 1.6 W/kg Averaged over 1 gram							

Spot Check Verification Results : UMTS Band 4 Head SAR (1g)																	
Reference Model Measurement Results										Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																
1 732.4	1412	RMC	24.5	23.43	0.07	Left Cheek	1:1	0.214	1.279	0.274	24.5	23.2	-0.15	0.197	1.349	0.266	A4
1 732.4	1412	RMC	24.5	23.43	-0.10	Left Tilt	1:1	0.145	1.279	0.185	24.5	23.2					
1 732.4	1412	RMC	24.5	23.43	-0.01	Right Cheek	1:1	0.190	1.279	0.243	24.5	23.2					
1 732.4	1412	RMC	24.5	23.43	0.16	Right Tilt	1:1	0.163	1.279	0.208	24.5	23.2					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population										Head 1.6 W/kg Averaged over 1 gram							

Spot Check Verification Results : UMTS Band 2 Head SAR (1g)																	
Reference Model Measurement Results										Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																
1 880	9400	RMC	25.0	23.81	-0.12	Left Cheek	1:1	0.241	1.315	0.317	25.0	23.68	-0.13	0.304	1.355	0.412	A5
1 880	9400	RMC	25.0	23.81	0.12	Left Tilt	1:1	0.156	1.315	0.205	25.0	23.68					
1 880	9400	RMC	25.0	23.81	0.12	Right Cheek	1:1	0.161	1.315	0.212	25.0	23.68					
1 880	9400	RMC	25.0	23.81	-0.00	Right Tilt	1:1	0.171	1.315	0.225	25.0	23.68					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population										Head 1.6 W/kg Averaged over 1 gram							

Spot Check Verification Results : LTE Band 2 Head SAR (1g)																						
Reference Model Measurement Results														Variant Model Measurement Results								
Frequency		Mode	Band width (MHz)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	Test Position	MPR (dB)	RB Size	RB offset	Duty Cycle	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plot No.	
MHz	Ch.																					
1 860	18700	QPSK	20	25.0	24.56	0.16	Left Cheek	0	1	0	1:1	0.232	1.107	0.257	25.0	24.64	0.19	0.261	1.086	0.284	A6	
1 880	18900	QPSK	20	24.0	23.71	-0.15	Left Cheek	1	50	0	1:1	0.222	1.069	0.237	24.0	23.85						
1 860	18700	QPSK	20	25.0	24.56	0.10	Left Tilt	0	1	0	1:1	0.181	1.107	0.200	25.0	24.64						
1 880	18900	QPSK	20	24.0	23.71	0.14	Left Tilt	1	50	0	1:1	0.147	1.069	0.157	24.0	23.85						
1 860	18700	QPSK	20	25.0	24.56	-0.12	Right Cheek	0	1	0	1:1	0.177	1.107	0.196	25.0	24.64						
1 880	18900	QPSK	20	24.0	23.71	-0.12	Right Cheek	1	50	0	1:1	0.147	1.069	0.157	24.0	23.85						
1 860	18700	QPSK	20	25.0	24.56	0.15	Right Tilt	0	1	0	1:1	0.188	1.107	0.208	25.0	24.64						
1 880	18900	QPSK	20	24.0	23.71	0.03	Right Tilt	1	50	0	1:1	0.154	1.069	0.165	24.0	23.85						
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : LTE Band 2 Upper Head SAR (1g)																							
Reference Model Measurement Results														Variant Model Measurement Results									
Frequency		Mode	Band width (MHz)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	Test Position	MP R (dB)	RB Size	RB offset	Duty Cycle	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	RB Size	RB offset	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plot No.
MHz	Ch.																						
1 900	19100	QPSK	20	19.0	18.63	-0.07	Left Cheek	0	1	99	1:1	0.308	1.089	0.335	1	99	19	18.76					
1 900	19100	QPSK	20	19.0	18.64	-0.01	Left Cheek	0	50	49	1:1	0.330	1.086	0.358	18	82	19	18.75					
1 900	19100	QPSK	20	19.0	18.63	-0.03	Left Tilt	0	1	99	1:1	0.406	1.089	0.442	1	99	19	18.76	-0.01	0.476	1.330	0.503	-
1 900	19100	QPSK	20	19.0	18.64	0.03	Left Tilt	0	50	49	1:1	0.435	1.086	0.472	18	82	19	18.75	-0.12	0.479	1.334	0.507	-
1 900	19100	QPSK	20	19.0	18.63	-0.17	Right Cheek	0	1	99	1:1	0.509	1.089	0.554	1	99	19	18.76	-0.12	0.546	1.330	0.577	-
1 900	19100	QPSK	20	19.0	18.64	0.02	Right Cheek	0	50	49	1:1	0.585	1.086	0.635	18	82	19	18.75	-0.03	0.559	1.334	0.592	-
1 900	19100	QPSK	20	19.0	18.63	0.12	Right Tilt	0	1	99	1:1	0.587	1.089	0.639	1	99	19	18.76	-0.01	0.582	1.330	0.615	A7
1 900	19100	QPSK	20	19.0	18.64	-0.01	Right Tilt	0	50	49	1:1	0.625	1.086	0.679	18	82	19	18.75	0.04	0.580	1.334	0.614	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram																

Spot Check Verification Results : LTE Band 4 Upper Head SAR (1g)																						
Reference Model Measurement Results														Variant Model Measurement Results								
Frequency		Mode	Band width (MHz)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	Test Position	MPR (dB)	RB Size	RB offset	Duty Cycle	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plot No.	
MHz	Ch.																					
1 732.5	20175	QPSK	20	19.0	17.75	-0.06	Left Cheek	0	1	99	1:1	0.247	1.334	0.329	19.0	18.0						
1 732.5	20175	QPSK	20	19.0	17.73	0.05	Left Cheek	0	18	82	1:1	0.246	1.340	0.330	19.0	17.82						
1 732.5	20175	QPSK	20	19.0	17.75	-0.04	Left Tilt	0	1	99	1:1	0.313	1.334	0.418	19.0	18.0	-0.12	0.305	1.309	0.399	-	
1 732.5	20175	QPSK	20	19.0	17.73	0.07	Left Tilt	0	18	82	1:1	0.307	1.340	0.411	19.0	17.82	-0.04	0.307	1.312	0.403	-	
1 732.5	20175	QPSK	20	19.0	17.75	-0.14	Right Cheek	0	1	99	1:1	0.406	1.334	0.542	19.0	18.0	-0.09	0.395	1.309	0.517	-	
1 732.5	20175	QPSK	20	19.0	17.73	0.07	Right Cheek	0	18	82	1:1	0.419	1.340	0.561	19.0	17.82	-0.17	0.401	1.312	0.526	-	
1 732.5	20175	QPSK	20	19.0	17.75	0.01	Right Tilt	0	1	99	1:1	0.434	1.334	0.579	19.0	18.0	-0.06	0.444	1.309	0.541	-	
1 732.5	20175	QPSK	20	19.0	17.73	0.02	Right Tilt	0	18	82	1:1	0.447	1.340	0.599	19.0	17.82	-0.06	0.442	1.312	0.583	A8	
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : LTE Band 12 Head SAR (1g)																						
Reference Model Measurement Results														Variant Model Measurement Results								
Frequency		Mode	Band width (MHz)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	Test Position	MPR (dB)	RB Size	RB offset	Duty Cycle	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plot No.	
MHz	Ch.																					
707.5	23095	QPSK	10	25.5	25.23	0.15	Left Cheek	0	1	0	1:1	0.184	1.064	0.196	25.5	25.05						
707.5	23095	QPSK	10	24.5	24.07	0.18	Left Cheek	1	25	0	1:1	0.136	1.104	0.150	24.5	24.11						
707.5	23095	QPSK	10	25.5	25.23	0.12	Left Tilt	0	1	0	1:1	0.098	1.064	0.104	25.5	25.05						
707.5	23095	QPSK	10	24.5	24.07	-0.03	Left Tilt	1	25	0	1:1	0.070	1.104	0.077	24.5	24.11						
707.5	23095	QPSK	10	25.5	25.23	0.10	Right Cheek	0	1	0	1:1	0.198	1.064	0.211	25.5	25.05	0.17	0.242	1.109	0.268	A9	
707.5	23095	QPSK	10	24.5	24.07	0.10	Right Cheek	1	25	0	1:1	0.156	1.104	0.172	24.5	24.11						
707.5	23095	QPSK	10	25.5	25.23	0.10	Right Tilt	0	1	0	1:1	0.105	1.064	0.112	25.5	25.05						
707.5	23095	QPSK	10	24.5	24.07	0.05	Right Tilt	1	25	0	1:1	0.074	1.104	0.082	24.5	24.11						
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : LTE Band 26 Head SAR (1g)																						
Reference Model Measurement Results														Variant Model Measurement Results								
Frequency		Mode	Band width (MHz)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	Test Position	MPR (dB)	RB Size	RB offset	Duty Cycle	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plot No.	
MHz	Ch.																					
831.5	26865	QPSK	15	25.5	24.92	0.14	Left Cheek	0	1	0	1:1	0.168	1.143	0.192	25.5	24.76						
831.5	26865	QPSK	15	24.5	23.83	0.15	Left Cheek	1	36	0	1:1	0.137	1.167	0.160	24.5	23.83						
831.5	26865	QPSK	15	25.5	24.92	0.02	Left Tilt	0	1	0	1:1	0.103	1.143	0.118	25.5	24.76						
831.5	26865	QPSK	15	24.5	23.83	0.13	Left Tilt	1	36	0	1:1	0.082	1.167	0.096	24.5	23.83						
831.5	26865	QPSK	15	25.5	24.92	-0.07	Right Cheek	0	1	0	1:1	0.230	1.143	0.263	25.5	24.76	0.12	0.325	1.186	0.385	A10	
831.5	26865	QPSK	15	24.5	23.83	0.15	Right Cheek	1	36	0	1:1	0.185	1.167	0.216	24.5	23.83	0.17	0.246	1.167	0.287	-	
831.5	26865	QPSK	15	24.5	23.81		Right Cheek	1	75	0	1:1				24.5	23.77	-0.11	0.246	1.183	0.291	-	
831.5	26865	QPSK	15	25.5	24.92	-0.12	Right Tilt	0	1	0	1:1	0.116	1.143	0.133	25.5	24.76						
831.5	26865	QPSK	15	24.5	23.83	0.16	Right Tilt	1	36	0	1:1	0.090	1.167	0.105	24.5	23.83						
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : LTE TDD Band 41 Head SAR (1g)																						
Reference Model Measurement Results														Variant Model Measurement Results								
Frequency		Mode	Band width (MHz)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	Test Position	MPR (dB)	RB Size	RB offset	Duty Cycle	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	1g Meas. SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plot No.	
MHz	Ch.																					
2 636.5	41055	QPSK	20	25.5	25.20	0.19	Left Cheek	0	1	0	1:1.58	0.130	1.072	0.139	25.5	24.88	0.16	0.150	1.153	0.173	A11	
2 636.5	41055	QPSK	20	24.5	24.31	0.00	Left Cheek	1	50	0	1:1.58	0.107	1.045	0.112	24.5	23.80						
2 636.5	41055	QPSK	20	25.5	25.20	-0.15	Left Tilt	0	1	0	1:1.58	0.047	1.072	0.050	25.5	24.88						
2 636.5	41055	QPSK	20	24.5	24.31	0.14	Left Tilt	1	50	0	1:1.58	0.031	1.045	0.032	24.5	23.80						
2 636.5	41055	QPSK	20	25.5	25.20	-0.11	Right Cheek	0	1	0	1:1.58	0.063	1.072	0.068	25.5	24.88						
2 636.5	41055	QPSK	20	24.5	24.31	0.15	Right Cheek	1	50	0	1:1.58	0.038	1.045	0.040	24.5	23.80						
2 636.5	41055	QPSK	20	25.5	25.20	0.17	Right Tilt	0	1	0	1:1.58	0.082	1.072	0.088	25.5	24.88						
2 636.5	41055	QPSK	20	24.5	24.31	0.18	Right Tilt	1	50	0	1:1.58	0.066	1.045	0.069	24.5	23.80						
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : LTE Band 66 Head SAR (1g)																					
Reference Model Measurement Results														Variant Model Measurement Results							
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																				
1 770	132572	QPSK	20	25.0	24.63	-0.11	Left Cheek	0	1	49	1:1	0.267	1.089	0.291	25.0	24.53	0.18	0.229	1.114	0.255	A12
1 770	132572	QPSK	20	24.0	23.81	0.19	Left Cheek	1	50	0	1:1	0.216	1.045	0.226	24.0	23.71					
1 770	132572	QPSK	20	25.0	24.63	0.15	Left Tilt	0	1	49	1:1	0.157	1.089	0.171	25.0	24.53					
1 770	132572	QPSK	20	24.0	23.81	0.02	Left Tilt	1	50	0	1:1	0.117	1.045	0.122	24.0	23.71					
1 770	132572	QPSK	20	25.0	24.63	-0.17	Right Cheek	0	1	49	1:1	0.258	1.089	0.281	25.0	24.53					
1 770	132572	QPSK	20	24.0	23.81	0.14	Right Cheek	1	50	0	1:1	0.208	1.045	0.217	24.0	23.71					
1 770	132572	QPSK	20	25.0	24.63	-0.03	Right Tilt	0	1	49	1:1	0.183	1.089	0.199	25.0	24.53					
1 770	132572	QPSK	20	24.0	23.81	0.08	Right Tilt	1	50	0	1:1	0.136	1.045	0.142	24.0	23.71					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram														

Spot Check Verification Results : DTS Head SAR (1g)																								
Reference Model Measurement Results														Variant Model Measurement Results										
Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.		
Mhz	Ch.																						(Mhz)	(Mbps)
2 437	6	802.11b	20	1	13.0	12.51	-0.17	Left Cheek	Ant.1	98.4	0.0983	0.055	1.119	1.016	0.063	13.0	12.41							
2 437	6	802.11b	20	1	13.0	12.51	0.13	Left Tilt	Ant.1	98.4	0.0705	0.041	1.119	1.016	0.047	13.0	12.41							
2 437	6	802.11b	20	1	13.0	12.51	0.12	Right Cheek	Ant.1	98.4	0.356	0.183	1.119	1.016	0.208	13.0	12.41	-0.15	0.451	0.179	1.146	1.013	0.208	-
2 437	6	802.11b	20	1	13.0	12.51	-0.11	Right Tilt	Ant.1	98.4	0.121	0.061	1.119	1.016	0.069	13.0	12.41							
2 437	6	802.11b	20	1	16.0	15.61	-0.12	Left Cheek	MIMO	98.4	0.0896	0.033	1.102	1.016	0.037	16.0	15.25							
2 437	6	802.11b	20	1	16.0	15.61	0.10	Left Tilt	MIMO	98.4	0.0638	0.025	1.102	1.016	0.028	16.0	15.25							
2 437	6	802.11b	20	1	16.0	15.61	0.12	Right Cheek	MIMO	98.4	0.414	0.211	1.102	1.016	0.236	16.0	15.25	-0.17	0.383	0.173	1.265	1.014	0.222	A13
2 437	6	802.11b	20	1	16.0	15.61	0.07	Right Tilt	MIMO	98.4	0.146	0.083	1.102	1.016	0.093	16.0	15.25							
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram																	

Verification Results : NII Head SAR (1g)																								
Reference Model Measurement Results														Variant Model Measurement Results										
Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config	Duty Cycle	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.		(Mhz)	(Mbps)	(dB)	(dB)	(dB)				(W/kg)	(W/kg)	(Duty)	(W/kg)	(dB)	(dB)	(dB)	(W/kg)	(W/kg)	(Duty)	(W/kg)			
5 290	58	802.11ac	80	MCS0	11.0	9.91	0	Left Cheek	Ant.2	91.0	0	0	1.285	1.099	0.000	11.0	10.06							
5 290	58	802.11ac	80	MCS0	11.0	9.91	0.02	Left Tilt	Ant.2	91.0	0.0377	0.00807	1.285	1.099	0.011	11.0	10.06	0.00	0.159	0.00044	1.242	1.111	0.001	-
5 290	58	802.11ac	80	MCS0	11.0	9.91	0	Right Cheek	Ant.2	91.0	0.0305	0.00383	1.285	1.099	0.005	11.0	10.06							
5 290	58	802.11ac	80	MCS0	11.0	9.91	0.00	Right Tilt	Ant.2	91.0	0.0663	0.00761	1.285	1.099	0.011	11.0	10.06							
5 530	106	802.11ac	80	MCS0	11.0	9.31	0	Left Cheek	Ant.2	91.0	0	0	1.476	1.099	0.000	11.0	10.51							
5 530	106	802.11ac	80	MCS0	11.0	9.31	-0.05	Left Tilt	Ant.2	91.0	0.0357	0.00449	1.476	1.099	0.007	11.0	10.51	0.00	0.026	0.0089	1.119	1.111	0.011	-
5 530	106	802.11ac	80	MCS0	11.0	9.31	0	Right Cheek	Ant.2	91.0	0	0	1.476	1.099	0.000	11.0	10.51							
5 530	106	802.11ac	80	MCS0	11.0	9.31	0	Right Tilt	Ant.2	91.0	0	0	1.476	1.099	0.000	11.0	10.51							
5 775	155	802.11ac	80	MCS0	11.0	9.45	0	Left Cheek	Ant.2	91.0	0	0	1.429	1.099	0.000	11.0	9.87							
5 775	155	802.11ac	80	MCS0	11.0	9.45	-0.10	Left Tilt	Ant.2	91.0	0.0236	0.00248	1.429	1.099	0.004	11.0	9.87	0.00	0.017	0.000985	1.297	1.111	0.001	-
5 775	155	802.11ac	80	MCS0	11.0	9.45	0	Right Cheek	Ant.2	91.0	0	0	1.429	1.099	0.000	11.0	9.87							
5 775	155	802.11ac	80	MCS0	11.0	9.45	0	Right Tilt	Ant.2	91.0	0	0	1.429	1.099	0.000	11.0	9.87							
5 290	58	802.11ac	80	MCS0	14.0	13.08	0	Left Cheek	MIMO	85.0	0	0	1.442	1.176	0.000	14.0	12.96							
5 290	58	802.11ac	80	MCS0	14.0	13.08	0	Left Tilt	MIMO	85.0	0.0000779	0	1.442	1.176	0.000	14.0	12.96							
5 290	58	802.11ac	80	MCS0	14.0	13.08	0.00	Right Cheek	MIMO	85.0	0.275	0.058	1.442	1.176	0.098	14.0	12.96	0.00	0.197	0.054	1.384	1.175	0.088	-
5 290	58	802.11ac	80	MCS0	14.0	13.08		Right Tilt	MIMO	85.0	0	0	1.442	1.176	0.000	14.0	12.96							
5 690	138	802.11ac	80	MCS0	14.0	13.12	0	Left Cheek	MIMO	85.0	0	0	1.358	1.176	0.000	14.0	13.12							
5 690	138	802.11ac	80	MCS0	14.0	13.12	0	Left Tilt	MIMO	85.0	0	0	1.358	1.176	0.000	14.0	13.12							
5 690	138	802.11ac	80	MCS0	14.0	13.12	0.00	Right Cheek	MIMO	85.0	0.214	0.051	1.358	1.176	0.081	14.0	13.12	0.00	0.156	0.046	1.291	1.175	0.070	-
5 690	138	802.11ac	80	MCS0	14.0	13.12	0	Right Tilt	MIMO	85.0	0	0	1.358	1.176	0.000	14.0	13.12							
5 775	155	802.11ac	80	MCS0	14.0	12.89	-0.10	Left Cheek	MIMO	85.0	0.0457	0.0077	1.403	1.176	0.013	14.0	12.69							
5 775	155	802.11ac	80	MCS0	14.0	12.89	0	Left Tilt	MIMO	85.0	0	0	1.403	1.176	0.000	14.0	12.69							
5 775	155	802.11ac	80	MCS0	14.0	12.89	0.00	Right Cheek	MIMO	85.0	0.425	0.078	1.403	1.176	0.129	14.0	12.69	0.00	0.372	0.073	1.476	1.175	0.127	A14
5 775	155	802.11ac	80	MCS0	14.0	12.89	0.00	Right Tilt	MIMO	85.0	0.116	0.017	1.403	1.176	0.028	14.0	12.69							
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population									Head 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : DSS / DTS Head SAR (1g)																							
Reference Model Measurement Results														Variant Model Measurement Results									
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Plot No.				
Mhz	Ch.		(dB)	(dB)	(dB)			(W/kg)	(Duty)	(W/kg)	(dB)	(dB)	(dB)	(W/kg)	(Duty)	(W/kg)							
2 480	78	Bluetooth DH5	15.0	14.43	0.19	Left Cheek	Ant.1	0.049	1.140	1.010	0.056	15.0	13.71										
2 480	78	Bluetooth DH5	15.0	14.43	-0.15	Left Tilt	Ant.1	0.026	1.140	1.010	0.030	15.0	13.71										
2 480	78	Bluetooth DH5	15.0	14.43	0.19	Right Cheek	Ant.1	0.205	1.140	1.010	0.236	15.0	13.71	0.12	0.247	1.346	1.010	0.336	A15				
2 480	78	Bluetooth DH5	15.0	14.43	-0.18	Right Tilt	Ant.1	0.074	1.140	1.010	0.085	15.0	13.71										
2 480	39	Bluetooth LE 1M 255 Packet	15.0	14.32	-0.14	Left Cheek	Ant.1	0.058	1.169	1.010	0.068	15.0	13.82										
2 480	39	Bluetooth LE 1M 255 Packet	15.0	14.32	0.15	Left Tilt	Ant.1	0.033	1.169	1.010	0.039	15.0	13.82										
2 440	19	Bluetooth LE 1M 255 Packet	15.0	13.97		Right Cheek	Ant.1					15	14.68	-0.13	0.336	1.076	1.010	0.365	A16				
2 480	39	Bluetooth LE 1M 255 Packet	15.0	14.32	0.12	Right Cheek	Ant.1	0.183	1.169	1.010	0.216	15.0	13.82	-0.15	0.267	1.312	1.010	0.354	-				
2 480	39	Bluetooth LE 1M 255 Packet	15.0	14.32	0.09	Right Tilt	Ant.1	0.075	1.169	1.010	0.089	15.0	13.82										
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population									Head 1.6 W/kg Averaged over 1 gram														

13.2 Body-worn SAR Measurement Results

Spot Check Verification Results : GSM/ UMTS Body-Worn SAR (1g)																		
Reference Model Measurement Results												Variant Model Measurement Results						
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)			(mm)	(W/kg)		(W/kg)	(dB)	(dB)	(dB)	(W/kg)		(W/kg)	
836.6	190	GSM850 VOICE	34.5	33.25	-0.01	Rear	1:8.3	15	0.300	1.334	0.400	34.5	33.78	0.12	0.222	1.180	0.262	-
836.6	190		34.5	33.25	0.12	Front	1:8.3	15	0.350	1.334	0.467	34.5	33.78	-0.04	0.239	1.180	0.282	-
836.6	190	GSM850 GPRS 3TX	30.0	29.04	-0.04	Rear	1:2.77	15	0.355	1.247	0.443	30.0	29.75	-0.06	0.207	1.059	0.219	-
836.6	190		30.0	29.04	-0.07	Front	1:2.77	15	0.380	1.247	0.474	30.0	29.75	-0.06	0.279	1.059	0.296	B1
1 880	661	GSM1900 VOICE	31.5	30.50	-0.04	Rear	1:8.3	15	0.244	1.259	0.307	31.5	30.93	-0.17	0.224	1.140	0.255	B2
1 880	661		31.5	30.50	-0.04	Front	1:8.3	15	0.183	1.259	0.230	31.5	30.93					
1 880	661	GSM1900 GPRS 2TX	28.5	27.87	0.11	Rear	1:4.15	15	0.253	1.156	0.292	28.5	27.50					
1 880	661		28.5	27.87	0.06	Front	1:4.15	15	0.202	1.156	0.234	28.5	27.50					
1 880	9400	UMTS Band 2 RMC	25.0	23.81	-0.03	Rear	1:1	15	0.432	1.315	0.568	25.0	23.68	-0.05	0.456	1.355	0.618	B3
1 880	9400		25.0	23.81	-0.00	Front	1:1	15	0.363	1.315	0.477	25.0	23.68	-0.06	0.336	1.355	0.455	-
1 732.4	1412	UMTS Band 4 RMC	24.5	23.43	-0.04	Rear	1:1	15	0.493	1.279	0.631	24.5	23.20	-0.02	0.418	1.349	0.564	B4
1 732.4	1412		24.5	23.43	0.04	Front	1:1	15	0.438	1.279	0.560	24.5	23.20	-0.15	0.374	1.349	0.505	-
836.6	4183	UMTS Band 5 RMC	25.5	24.89	0.00	Rear	1:1	15	0.406	1.151	0.467	25.5	24.92	-0.04	0.351	1.143	0.401	B5
836.6	4183		25.5	24.89	0.16	Front	1:1	15	0.212	1.151	0.244	25.5	24.92					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram											

Spot Check Verification Results : LTE Body-Worn SAR (1g)																						
Reference Model Measurement Results															Variant Model Measurement Results							
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																					
1 860	18700	LTE 2 QPSK	20	25.0	24.56	-0.10	Rear	0	1	0	1:1	15	0.464	1.107	0.514	25.0	24.64	0.10	0.396	1.086	0.430	B6
1 880	18900		20	24.0	23.71	-0.04	Rear	1	50	0	1:1	15	0.393	1.069	0.420	24.0	23.76	0.00	0.327	1.057	0.352	-
1 860	18700		20	25.0	24.56	0.00	Front	0	1	0	1:1	15	0.382	1.107	0.423	25.0	24.64	0.02	0.316	1.086	0.343	-
1 880	18900		20	24.0	23.71	-0.06	Front	1	50	0	1:1	15	0.327	1.069	0.350	24.0	23.76					
1 732.5	20175	LTE 4 Upper UL CA QPSK	20	21.0	19.82	0.05	Rear	0	1	99	1:1	15	0.203	1.312	0.266	21.0	19.84	0.00	0.168	1.306	0.219	B8
1 732.5	20175		20	21.0	19.72	0.08	Rear	0	18	82	1:1	15	0.209	1.343	0.281	21.0	19.82					
1 732.5	20175		20	21.0	19.82	0.19	Front	0	1	99	1:1	15	0.085	1.312	0.112	21.0	19.84					
1 732.5	20175		20	21.0	19.72	-0.06	Front	0	18	82	1:1	15	0.086	1.343	0.115	21.0	19.82					
707.5	23095	LTE 12 QPSK	10	25.5	25.23	-0.00	Rear	0	1	0	1:1	15	0.291	1.064	0.310	25.5	25.05					
707.5	23095		10	24.5	24.07	0.05	Rear	1	25	0	1:1	15	0.241	1.104	0.266	24.5	24.11					
707.5	23095		10	25.5	25.23	0.03	Front	0	1	0	1:1	15	0.316	1.064	0.336	25.5	25.05	0.08	0.227	1.109	0.252	B9
707.5	23095		10	24.5	24.07	0.00	Front	1	25	0	1:1	15	0.242	1.104	0.267	24.5	24.11					
831.5	26865	LTE 26 QPSK	15	25.5	24.92	0.09	Rear	0	1	0	1:1	15	0.325	1.143	0.371	25.5	24.76	0.10	0.343	1.186	0.407	B10
831.5	26865		15	24.5	23.83	-0.00	Rear	1	36	0	1:1	15	0.259	1.167	0.302	24.5	23.83					
831.5	26865		15	25.5	24.92	0.05	Front	0	1	0	1:1	15	0.318	1.143	0.363	25.5	24.76					
831.5	26865		15	24.5	23.83	0.00	Front	1	36	0	1:1	15	0.239	1.167	0.279	24.5	23.83					
2 636.5	41055	LTE 41 QPSK	20	25.5	25.20	-0.03	Rear	0	1	0	1:1.58	15	0.223	1.072	0.239	25.5	24.88	-0.18	0.221	1.153	0.255	B11
2 636.5	41055		20	24.5	24.31	0.03	Rear	1	50	0	1:1.58	15	0.170	1.045	0.178	24.5	23.80					
2 636.5	41055		20	25.5	25.20	0.14	Front	0	1	0	1:1.58	15	0.141	1.072	0.151	25.5	24.88					
2 636.5	41055		20	24.5	24.31	0.18	Front	1	50	0	1:1.58	15	0.106	1.045	0.111	24.5	23.80					
1 770	132572	LTE 66 QPSK	20	25.0	24.63	-0.07	Rear	0	1	49	1:1	15	0.331	1.089	0.360	25.0	24.53					
1 770	132572		20	24.0	23.81	-0.01	Rear	1	50	0	1:1	15	0.345	1.045	0.361	24.0	23.71					
1 770	132572		20	25.0	24.63	-0.13	Front	0	1	49	1:1	15	0.360	1.089	0.392	25.0	24.53	-0.00	0.272	1.114	0.303	B12
1 770	132572		20	24.0	23.81	-0.12	Front	1	50	0	1:1	15	0.315	1.045	0.329	24.0	23.71					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : LTE Body-Worn SAR (1g)																								
Reference Model Measurement Results															Variant Model Measurement Results									
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	RB Size	RB offset	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																							
1 900	19100	LTE 2 Upper QPSK	20	21.0	20.37	0.18	Rear	0	1	99	1:1	15	0.179	1.156	0.207	1	99	21.0	19.84	0.14	0.213	1.306	0.278	B7
1 900	19100		20	21.0	20.52	0.17	Rear	0	50	49	1:1	15	0.181	1.117	0.202	18	82	21.0	19.80					
1 900	19100		20	21.0	20.37	0.02	Front	0	1	99	1:1	15	0.069	1.156	0.080	1	99	21.0	19.84					
1 900	19100		20	21.0	20.52	0.17	Front	0	50	49	1:1	15	0.068	1.117	0.076	18	82	21.0	19.80					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram																	

Spot Check Verification Results : DTS Body-Worn SAR (1g)

Reference Model Measurement Results

Variant Model Measurement Results

Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance (mm)	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																								
2 462	11	802.11b	20	1	19.0	17.97	-0.16	Rear	Ant.1	98.4	15	0.249	0.155	1.268	1.016	0.200	19.0	17.97	0.00	0.112	0.075	1.416	1.013	0.108	-
2 462	11	802.11b	20	1	19.0	17.97	-0.18	Front	Ant.1	98.4	15	0.111	0.070	1.268	1.016	0.090	19.0	17.97							
2 462	11	802.11b	20	1	22.0	21.19	-0.11	Rear	MIMO	98.4	15	0.188	0.117	1.291	1.016	0.153	22.0	21.19	0.00	0.148	0.094	1.330	1.014	0.127	B13
2 462	11	802.11b	20	1	22.0	21.19	0.00	Front	MIMO	98.4	15	0.103	0.064	1.291	1.016	0.084	22.0	21.19							
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram																		

Verification Results : NII Body-Worn SAR (1g)

Reference Model Measurement Results																	Variant Model Measurement Results									
Frequency	Mode		Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance (mm)	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Plot No.	
																										Mhz
5 300	60	802.11a	20	6	17	16.52	-0.08	Rear	Ant.2	92.9	15	0.451	0.191	1.117	1.090	0.232	17	15.87	-0.14	0.254	0.183	1.297	1.076	0.255	-	
5 300	60	802.11a	20	6	17	16.52	0	Front	Ant.2	92.9	15	0	0	1.117	1.090	0.000	17	15.87								
5 500	100	802.11a	20	6	17	16.45	0.00	Rear	Ant.2	92.9	15	0.263	0.076	1.135	1.090	0.094	17	15.73	-0.15	0.153	0.106	1.340	1.076	0.153	-	
5 500	100	802.11a	20	6	17	16.45	0	Front	Ant.2	92.9	15	0	0	1.135	1.090	0.000	17	15.73								
5 785	157	802.11a	20	6	17	16.65	0.00	Rear	Ant.2	92.9	15	0.318	0.129	1.084	1.090	0.152	17	15.99	0.02	0.177	0.125	1.262	1.076	0.170	-	
5 785	157	802.11a	20	6	17	16.65	0	Front	Ant.2	92.9	15	0	0	1.084	1.090	0.000	17	15.99								
5 300	60	802.11a	20	6	20	19.40	-0.05	Rear	MIMO	92.9	15	0.359	0.143	1.205	1.090	0.188	20	18.97	-0.17	0.263	0.189	1.371	1.076	0.279	B14	
5 300	60	802.11a	20	6	20	19.40	0.00	Front	MIMO	92.9	15	0.0311	0.00911	1.205	1.090	0.012	20	18.97								
5 720	144	802.11a	20	6	20	19.48	0.00	Rear	MIMO	92.9	15	0.305	0.094	1.164	1.090	0.119	20	19.41	0.11	0.200	0.151	1.194	1.076	0.194	-	
5 720	144	802.11a	20	6	20	19.48	0.00	Front	MIMO	92.9	15	0.0994	0.034	1.164	1.090	0.043	20	19.41								
5 825	165	802.11a	20	6	20	19.83	0.00	Rear	MIMO	92.9	15	0.358	0.125	1.067	1.090	0.145	20	18.95	-0.17	0.159	0.114	1.279	1.076	0.157	-	
5 825	165	802.11a	20	6	20	19.83	0.00	Front	MIMO	92.9	15	0.282	0.055	1.067	1.090	0.064	20	18.95								
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak										Body 1.6 W/kg																
Uncontrolled Exposure/ General Population										Averaged over 1 gram																

Spot Check Verification Results : DSS Body-Worn SAR (1g)

Reference Model Measurement Results																	Variant Model Measurement Results									
Frequency	Mode		Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant.	Distance	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Plot No.						
																					Mhz	Ch.	(dB)	(dB)	(dB)	(mm)
2 480	78	Bluetooth DH5	15.0	14.43	-0.13	Rear	Ant.1	15	0.031	1.140	1.010	0.036	15.0	13.71	-0.12	0.035	1.346	1.010	0.048	B15						
2 480	78	Bluetooth DH5	15.0	14.43	0.10	Front	Ant.1	15	0.014	1.140	1.010	0.016	15.0	13.71												
2 440	19	Bluetooth LE 1M 255 Packet	15.0	13.97		Rear	Ant.1	15					15.0	14.68	-0.18	0.053	1.076	1.010	0.058	B16						
2 480	39	Bluetooth LE 1M 255 Packet	15.0	14.32	-0.09	Rear	Ant.1	15	0.035	1.169	1.010	0.041	15.0	13.82	-0.16	0.038	1.312	1.010	0.050	-						
2 480	39	Bluetooth LE 1M 255 Packet	15.0	14.32	0.17	Front	Ant.1	15	0.017	1.169	1.010	0.020	15.0	13.82												
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak										Body 1.6 W/kg																
Uncontrolled Exposure/ General Population										Averaged over 1 gram																

13.3 Hotspot SAR Measurement Results

Spot Check Verification Results : GSM 850 Hotspot SAR (1g)																		
Reference Model Measurement Results											Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)				(mm)		(W/kg)	(W/kg)	(dB)	(dB)	(dB)		(W/kg)	
836.6	190	GPRS 3TX	30.0	29.04	0.03	Rear	1:2.77	10	0.755	1.247	0.941	30	29.75	0.13	0.765	1.059	0.810	-
824.2	128	GPRS 3TX	30.0	29.08	-0.05	Rear	1:2.77	10	0.605	1.236	0.748	30	29.43	-0.02	0.636	1.140	0.725	-
848.8	251	GPRS 3TX	30.0	29.53	-0.12	Rear	1:2.77	10	0.838	1.114	0.934	30	29.66	0.09	0.882	1.081	0.954	C1
836.6	190	GPRS 3TX	30.0	29.04	-0.03	Front	1:2.77	10	0.423	1.247	0.527	30	29.75	0.02	0.333	1.059	0.353	-
836.6	190	GPRS 3TX	30.0	29.04	0.03	Left	1:2.77	10	0.251	1.247	0.313	30	29.75					
836.6	190	GPRS 3TX	30.0	29.04	0.04	Right	1:2.77	10	0.513	1.247	0.640	30	29.75	0.04	0.453	1.059	0.480	-
836.6	190	GPRS 3TX	30.0	29.04	0.07	Bottom	1:2.77	10	0.498	1.247	0.621	30	29.75	-0.04	0.581	1.059	0.615	-
848.8	251	GPRS 3TX	30.0	29.53	0.10	Rear	1:2.77	10	0.834	1.114	0.929	30	29.66	0.05	0.870	1.081	0.941	*
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram												

Note: * Data entry indicate Variability measurement

Spot Check Verification Results : GSM 1900 Hotspot SAR (1g)																		
Reference Model Measurement Results											Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)				(mm)		(W/kg)	(W/kg)	(dB)	(dB)	(dB)		(W/kg)	
1 880	661	GPRS 2TX	28.5	27.87	0.19	Rear	1:4.15	10	0.411	1.156	0.475	28.5	27.50	-0.16	0.451	1.259	0.568	-
1 880	661	GPRS 2TX	28.5	27.87	0.03	Front	1:4.15	10	0.306	1.156	0.354	28.5	27.50					
1 880	661	GPRS 2TX	28.5	27.87	0.15	Left	1:4.15	10	0.153	1.156	0.177	28.5	27.50					
1 880	661	GPRS 2TX	28.5	27.87	0.16	Bottom	1:4.15	10	0.727	1.156	0.840	28.5	27.50	0.11	0.730	1.259	0.919	C2
1 850.2	512	GPRS 2TX	28.5	28.03	0.13	Bottom	1:4.15	10	0.591	1.114	0.658	28.5	27.37	0.11	0.701	1.297	0.909	-
1 910	810	GPRS 2TX	28.5	27.85	0.15	Bottom	1:4.15	10	0.734	1.161	0.852	28.5	27.48	0.11	0.723	1.265	0.914	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram												

Spot Check Verification Results : UMTS 5 Hotspot SAR (1g)																		
Reference Model Measurement Results											Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)				(mm)		(W/kg)	(W/kg)	(dB)	(dB)	(dB)		(W/kg)	
826.4	4132	RMC	25.5	24.90	0.02	Rear	1:1	10	0.641	1.148	0.736	25.5	24.91	-0.10	0.634	1.146	0.726	-
836.6	4183	RMC	25.5	24.89	0.04	Rear	1:1	10	0.743	1.151	0.855	25.5	24.92	0.14	0.633	1.143	0.723	-
846.6	4233	RMC	25.5	24.78	0.05	Rear	1:1	10	0.595	1.180	0.702	25.5	24.91	-0.11	0.662	1.146	0.758	C3
836.6	4183	RMC	25.5	24.89	-0.03	Front	1:1	10	0.444	1.151	0.511	25.5	24.92	-0.05	0.376	1.143	0.430	-
836.6	4183	RMC	25.5	24.89	0.03	Left	1:1	10	0.202	1.151	0.233	25.5	24.92					
836.6	4183	RMC	25.5	24.89	0.02	Right	1:1	10	0.322	1.151	0.371	25.5	24.92					
836.6	4183	RMC	25.5	24.89	0.02	Bottom	1:1	10	0.524	1.151	0.603	25.5	24.92	-0.05	0.474	1.143	0.542	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram												

Spot Check Verification Results : UMTS 4 Hotspot SAR (1g)																		
Reference Model Measurement Results											Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)							(mm)	(W/kg)	(W/kg)	(dB)	(dB)	(dB)	
1 732.4	1412	RMC	22.5	21.67	-0.10	Rear	1:1	10	0.586	1.211	0.710	22.5	21.20	-0.07	0.436	1.349	0.588	-
1 732.4	1412	RMC	22.5	21.67	0.05	Front	1:1	10	0.456	1.211	0.552	22.5	21.20	0.02	0.373	1.349	0.503	-
1 732.4	1412	RMC	22.5	21.67	0.06	Left	1:1	10	0.323	1.211	0.391	22.5	21.20					
1 732.4	1412	RMC	22.5	21.67	0.10	Bottom	1:1	10	0.615	1.211	0.745	22.5	21.20	0.15	0.546	1.349	0.737	C4
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram												

Spot Check Verification Results : UMTS 2 Hotspot SAR (1g)																		
Reference Model Measurement Results											Variant Model Measurement Results							
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)							(mm)	(W/kg)	(W/kg)	(dB)	(dB)	(dB)	
1 880	9400	RMC	23.0	21.77	-0.03	Rear	1:1	10	0.569	1.327	0.755	23.0	21.44	-0.04	0.483	1.432	0.692	-
1 880	9400	RMC	23.0	21.77	0.08	Front	1:1	10	0.427	1.327	0.567	23.0	21.44	-0.04	0.382	1.432	0.547	-
1 880	9400	RMC	23.0	21.77	0.03	Left	1:1	10	0.280	1.327	0.372	23.0	21.44					
1 880	9400	RMC	23.0	21.77	0.02	Bottom	1:1	10	0.752	1.327	0.998	23.0	21.44	0.10	0.679	1.432	0.972	-
1 852.4	9262	RMC	23.0	21.84	0.06	Bottom	1:1	10	0.656	1.306	0.857	23.0	21.38	0.17	0.654	1.452	0.950	-
1 907.6	9538	RMC	23.0	21.92	0.02	Bottom	1:1	10	0.791	1.282	1.014	23.0	21.22	0.19	0.733	1.507	1.104	C5
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram												

Spot Check Verification Results : LTE Band 2 Hotspot SAR (1g)																						
Reference Model Measurement Results													Variant Model Measurement Results									
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.			(dB)	(dB)	(dB)										(dB)	(mm)	(W/kg)	(W/kg)	(dB)	(dB)	
1 860	18700	QPSK	20	23.0	22.50	0.05	Rear	0	1	49	1:1	10	0.541	1.122	0.607	23.0	22.21	-0.11	0.458	1.199	0.540	-
1 860	18700	QPSK	20	23.0	22.68	0.01	Rear	0	50	0	1:1	10	0.557	1.076	0.599	23.0	22.39	-0.08	0.472	1.151	0.533	-
1 860	18700	QPSK	20	23.0	22.50	-0.00	Front	0	1	49	1:1	10	0.444	1.122	0.498	23.0	22.21	-0.02	0.357	1.199	0.420	-
1 860	18700	QPSK	20	23.0	22.68	-0.03	Front	0	50	0	1:1	10	0.448	1.076	0.482	23.0	22.39	-0.05	0.368	1.151	0.415	-
1 860	18700	QPSK	20	23.0	22.50	0.01	Left	0	1	49	1:1	10	0.239	1.122	0.268	23.0	22.21					
1 860	18700	QPSK	20	23.0	22.68	0.09	Left	0	50	0	1:1	10	0.258	1.076	0.278	23.0	22.39					
1 860	18700	QPSK	20	23.0	22.50	-0.16	Bottom	0	1	49	1:1	10	0.668	1.122	0.749	23.0	22.21	0.04	0.606	1.199	0.727	-
1 860	18700	QPSK	20	23.0	22.68	-0.09	Bottom	0	50	0	1:1	10	0.699	1.076	0.752	23.0	22.39	0.03	0.657	1.151	0.756	C6
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram																

Spot Check Verification Results : LTE Band 2 Upper Hotspot SAR (1g)																										
Reference Model Measurement Results															Variant Model Measurement Results											
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	RB Size	RB offset	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.		
Mhz	Ch.																								(Mhz)	(dB)
1 900	19100	QPSK	20	21.0	20.37	-0.07	Rear	0	1	99	1:1	10	0.407	1.156	0.470	1	99	21.0	19.84	0.10	0.445	1.306	0.581	-		
1 900	19100	QPSK	20	21.0	20.52	0.04	Rear	0	50	49	1:1	10	0.429	1.117	0.479	18	82	21.0	19.80	-0.08	0.456	1.318	0.601	-		
1 900	19100	QPSK	20	21.0	20.37	0.06	Front	0	1	99	1:1	10	0.132	1.156	0.153	1	99	21.0	19.84							
1 900	19100	QPSK	20	21.0	20.52	0.01	Front	0	50	49	1:1	10	0.139	1.117	0.155	18	82	21.0	19.80							
1 900	19100	QPSK	20	21.0	20.37	-0.06	Left	0	1	99	1:1	10	0.052	1.156	0.060	1	99	21.0	19.84							
1 900	19100	QPSK	20	21.0	20.52	0.13	Left	0	50	49	1:1	10	0.044	1.117	0.049	18	82	21.0	19.80							
1 900	19100	QPSK	20	21.0	20.37	-0.05	Top	0	1	99	1:1	10	0.590	1.156	0.682	1	99	21.0	19.84	0.06	0.527	1.306	0.688	-		
1 900	19100	QPSK	20	21.0	20.52	-0.06	Top	0	50	49	1:1	10	0.605	1.117	0.676	18	82	21.0	19.80	0.07	0.546	1.318	0.720	C7		
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population															Body 1.6 W/kg Averaged over 1 gram											

Spot Check Verification Results : LTE Band 4 Upper Hotspot SAR (1g)																										
Reference Model Measurement Results															Variant Model Measurement Results											
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.				
Mhz	Ch.																						(Mhz)	(dB)	(dB)	(dB)
1 732.5	20175	QPSK	20	21.0	19.82	-0.18	Rear	0	1	99	1:1	10	0.395	1.312	0.518	21.0	19.84	-0.18	0.422	1.306	0.551	-				
1 732.5	20175	QPSK	20	21.0	19.72	0.09	Rear	0	18	82	1:1	10	0.375	1.343	0.504	21.0	19.82	-0.03	0.402	1.312	0.528	-				
1 732.5	20175	QPSK	20	21.0	19.82	0.14	Front	0	1	99	1:1	10	0.178	1.312	0.234	21.0	19.84									
1 732.5	20175	QPSK	20	21.0	19.72	-0.14	Front	0	18	82	1:1	10	0.179	1.343	0.240	21.0	19.82									
1 732.5	20175	QPSK	20	21.0	19.82	0.19	Left	0	1	99	1:1	10	0.063	1.312	0.083	21.0	19.84									
1 732.5	20175	QPSK	20	21.0	19.72	-0.05	Left	0	18	82	1:1	10	0.068	1.343	0.091	21.0	19.82									
1 732.5	20175	QPSK	20	21.0	19.82	0.01	Top	0	1	99	1:1	10	0.473	1.312	0.621	21.0	19.84	-0.06	0.468	1.306	0.611	-				
1 732.5	20175	QPSK	20	21.0	19.72	0.03	Top	0	18	82	1:1	10	0.476	1.343	0.639	21.0	19.82	-0.05	0.467	1.312	0.613	C8				
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population															Body 1.6 W/kg Averaged over 1 gram											

Spot Check Verification Results : LTE Band 12 Hotspot SAR (1g)																										
Reference Model Measurement Results															Variant Model Measurement Results											
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.				
Mhz	Ch.																						(Mhz)	(dB)	(dB)	(dB)
707.5	23095	QPSK	10	25.5	25.23	0.16	Rear	0	1	0	1:1	10	0.451	1.064	0.480	25.5	25.05	-0.00	0.361	1.109	0.400	C9				
707.5	23095	QPSK	10	24.5	24.07	-0.05	Rear	1	25	0	1:1	10	0.362	1.104	0.400	24.5	24.11	0.04	0.283	1.094	0.310	-				
707.5	23095	QPSK	10	25.5	25.23	-0.03	Front	0	1	0	1:1	10	0.282	1.064	0.300	25.5	25.05									
707.5	23095	QPSK	10	24.5	24.07	-0.03	Front	1	25	0	1:1	10	0.227	1.104	0.251	24.5	24.11									
707.5	23095	QPSK	10	25.5	25.23	0.14	Left	0	1	0	1:1	10	0.215	1.064	0.229	25.5	25.05									
707.5	23095	QPSK	10	24.5	24.07	-0.01	Left	1	25	0	1:1	10	0.157	1.104	0.173	24.5	24.11									
707.5	23095	QPSK	10	25.5	25.23	0.05	Right	0	1	0	1:1	10	0.146	1.064	0.155	25.5	25.05									
707.5	23095	QPSK	10	24.5	24.07	-0.05	Right	1	25	0	1:1	10	0.118	1.104	0.130	24.5	24.11									
707.5	23095	QPSK	10	25.5	25.23	0.07	Bottom	0	1	0	1:1	10	0.283	1.064	0.301	25.5	25.05									
707.5	23095	QPSK	10	24.5	24.07	0.01	Bottom	1	25	0	1:1	10	0.210	1.104	0.232	24.5	24.11									
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population															Body 1.6 W/kg Averaged over 1 gram											

Spot Check Verification Results : LTE Band 26 Hotspot SAR (1g)																						
Reference Model Measurement Results															Variant Model Measurement Results							
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
MHz	Ch.																					
831.5	26865	QPSK	15	25.5	24.92	0.01	Rear	0	1	0	1:1	10	0.508	1.143	0.581	25.5	24.76	0.10	0.514	1.186	0.609	C10
831.5	26865	QPSK	15	24.5	23.83	0.02	Rear	1	36	0	1:1	10	0.425	1.167	0.496	24.5	23.83	0.00	0.416	1.167	0.485	-
831.5	26865	QPSK	15	25.5	24.92	-0.01	Front	0	1	0	1:1	10	0.326	1.143	0.373	25.5	24.76					
831.5	26865	QPSK	15	24.5	23.83	-0.00	Front	1	36	0	1:1	10	0.273	1.167	0.319	24.5	23.83					
831.5	26865	QPSK	15	25.5	24.92	-0.01	Left	0	1	0	1:1	10	0.241	1.143	0.275	25.5	24.76					
831.5	26865	QPSK	15	24.5	23.83	-0.05	Left	1	36	0	1:1	10	0.178	1.167	0.208	24.5	23.83					
831.5	26865	QPSK	15	25.5	24.92	0.11	Right	0	1	0	1:1	10	0.382	1.143	0.437	25.5	24.76	0.09	0.370	1.186	0.439	-
831.5	26865	QPSK	15	24.5	23.83	-0.04	Right	1	36	0	1:1	10	0.288	1.167	0.336	24.5	23.83					
831.5	26865	QPSK	15	25.5	24.92	0.03	Bottom	0	1	0	1:1	10	0.385	1.143	0.440	25.5	24.76	0.16	0.442	1.186	0.524	-
831.5	26865	QPSK	15	24.5	23.83	-0.05	Bottom	1	36	0	1:1	10	0.316	1.167	0.369	24.5	23.83					
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : LTE TDD Band 41 Hotspot SAR (1g)																						
Reference Model Measurement Results															Variant Model Measurement Results							
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
MHz	Ch.																					
2 636.5	41055	QPSK	20	25.5	25.20	-0.11	Rear	0	1	0	1:1.58	10	0.521	1.072	0.559	25.5	24.88	0.15	0.497	1.153	0.573	-
2 636.5	41055	QPSK	20	24.5	24.31	0.10	Rear	1	50	0	1:1.58	10	0.411	1.045	0.429	24.5	23.80	0.07	0.383	1.175	0.450	-
2 636.5	41055	QPSK	20	25.5	25.20	-0.10	Front	0	1	0	1:1.58	10	0.296	1.072	0.317	25.5	24.88					
2 636.5	41055	QPSK	20	24.5	24.31	-0.13	Front	1	50	0	1:1.58	10	0.263	1.045	0.275	24.5	23.80					
2 636.5	41055	QPSK	20	25.5	25.20	0.03	Left	0	1	0	1:1.58	10	0.141	1.072	0.151	25.5	24.88					
2 636.5	41055	QPSK	20	24.5	24.31	0.01	Left	1	50	0	1:1.58	10	0.107	1.045	0.112	24.5	23.80					
2 636.5	41055	QPSK	20	25.5	25.20	0.17	Bottom	0	1	0	1:1.58	10	0.530	1.072	0.568	25.5	24.88	0.02	0.567	1.153	0.654	C11
2 636.5	41055	QPSK	20	24.5	24.31	0.18	Bottom	1	50	0	1:1.58	10	0.408	1.045	0.426	24.5	23.80	-0.00	0.439	1.175	0.516	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : LTE Band 66 Hotspot SAR (1g)																						
Reference Model Measurement Results															Variant Model Measurement Results							
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																					
1 745	132322	QPSK	20	23.0	22.65	0.03	Rear	0	1	49	1:1	10	0.531	1.084	0.576	23.0	22.19	0.05	0.509	1.205	0.613	-
1 745	132322	QPSK	20	23.0	22.81	0.01	Rear	0	50	0	1:1	10	0.565	1.045	0.590	23.0	22.2	-0.06	0.519	1.202	0.624	-
1 745	132322	QPSK	20	23.0	22.65	-0.03	Front	0	1	49	1:1	10	0.436	1.084	0.473	23.0	22.19	0.01	0.385	1.205	0.464	-
1 745	132322	QPSK	20	23.0	22.81	-0.05	Front	0	50	0	1:1	10	0.455	1.045	0.475	23.0	22.2	-0.10	0.42	1.202	0.505	-
1 745	132322	QPSK	20	23.0	22.65	0.14	Left	0	1	49	1:1	10	0.537	1.084	0.582	23.0	22.19	0.17	0.247	1.205	0.298	-
1 745	132322	QPSK	20	23.0	22.81	-0.03	Left	0	50	0	1:1	10	0.431	1.045	0.450	23.0	22.2	-0.02	0.249	1.202	0.299	-
1 720	132072	QPSK	20	23.0	22.29		Bottom	0	1	49	1:1	10				23.0	22.19	0.09	0.664	1.205	0.800	-
1 745	132322	QPSK	20	23.0	22.65	-0.04	Bottom	0	1	49	1:1	10	0.696	1.084	0.754	23.0	22.14	-0.18	0.737	1.219	0.898	-
1 770	132572	QPSK	20	23.0	22.55		Bottom	0	1	49	1:1	10				23.0	22.07	0.06	0.803	1.239	0.995	C12
1 720	132072	QPSK	20	23.0	22.40		Bottom	0	50	0	1:1	10				23.0	22.2	0.03	0.684	1.202	0.822	-
1 745	132322	QPSK	20	23.0	22.81	-0.03	Bottom	0	50	0	1:1	10	0.695	1.045	0.726	23.0	22.11	0.06	0.747	1.227	0.917	-
1 770	132572	QPSK	20	23.0	22.80		Bottom	0	50	25	1:1	10				23.0	22.1	0.02	0.784	1.230	0.965	-
1 745	132322	QPSK	20	23.0	22.75		Bottom	0	100	0	1:1	10				23.0	22.17	-0.15	0.633	1.211	0.766	-
1 770	132572	QPSK	20	23.0	22.55		Bottom	0	1	49	1:1	10				23.0	22.07	0.07	0.801	1.239	0.992	*
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram															

Note: * Data entry indicate Variability measurement.

Spot Check Verification Results : DTS Hotspot SAR (1g)																									
Reference Model Measurement Results															Variant Model Measurement Results										
Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance (mm)	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																								
2 462	11	802.11b	20	1	19.0	17.97	-0.12	Rear	Ant.1	98.4	10	0.564	0.351	1.268	1.016	0.452	19.0	17.97	-0.18	0.249	0.156	1.416	1.013	0.224	C13
2 462	11	802.11b	20	1	19.0	17.97	-0.12	Front	Ant.1	98.4	10	0.258	0.165	1.268	1.016	0.213	19.0	17.97							
2 462	11	802.11b	20	1	19.0	17.97	-0.13	Left	Ant.1	98.4	10	0.347	0.213	1.268	1.016	0.274	19.0	17.97							
2 462	11	802.11b	20	1	19.0	17.97	0.01	Top	Ant.1	98.4	10	0.0698	0.046	1.268	1.016	0.059	19.0	17.97							
2 462	11	802.11b	20	1	22.0	21.19	-0.14	Rear	MIMO	98.4	10	0.549	0.354	1.291	1.016	0.464	22.0	21.19	0.01	0.229	0.149	1.330	1.014	0.201	-
2 462	11	802.11b	20	1	22.0	21.19	-0.13	Front	MIMO	98.4	10	0.322	0.192	1.291	1.016	0.252	22.0	21.19							
2 462	11	802.11b	20	1	22.0	21.19	0.16	Left	MIMO	98.4	10	0.342	0.208	1.291	1.016	0.273	22.0	21.19							
2 462	11	802.11b	20	1	22.0	21.19	-0.12	Top	MIMO	98.4	10	0.0648	0.040	1.291	1.016	0.052	22.0	21.19							
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram																		

Verification Results : 5 GHz WLAN Hotspot SAR (1g)																									
Reference Model Measurement Results													Variant Model Measurement Results												
Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance (mm)	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	Area Scan Peak SAR	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Plot No.
Mhz	Ch.																								
5 785	157	802.11a	20	6	17.0	16.65	-0.06	Rear	Ant.2	92.9	10	0.463	0.172	1.084	1.090	0.203	17.0	15.99	-0.01	0.244	0.183	1.262	1.076	0.248	C14
5 785	157	802.11a	20	6	17.0	16.65	0	Front	Ant.2	92.9	10	0	0	1.084	1.090	0.000	17.0	15.99							
5 785	157	802.11a	20	6	17.0	16.65	0	Left	Ant.2	92.9	10	0	0	1.084	1.090	0.000	17.0	15.99							
5 785	157	802.11a	20	6	17.0	16.65	0.14	Top	Ant.2	92.9	10	0.259	0.087	1.084	1.090	0.103	17.0	15.99							
5 825	165	802.11a	20	6	20.0	19.83	0.00	Rear	MIMO	92.9	10	0.559	0.169	1.067	1.090	0.196	20.0	18.95	0.12	0.244	0.177	1.279	1.076	0.244	-
5 825	165	802.11a	20	6	20.0	19.83	0.00	Front	MIMO	92.9	10	0.301	0.084	1.067	1.090	0.098	20.0	18.95							
5 825	165	802.11a	20	6	20.0	19.83	-0.07	Left	MIMO	92.9	10	0.586	0.130	1.067	1.090	0.151	20.0	18.95							
5 825	165	802.11a	20	6	20.0	19.83	0.05	Top	MIMO	92.9	10	0.223	0.078	1.067	1.090	0.091	20.0	18.95							
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population										Body 1.6 W/kg Averaged over 1 gram															

Spot Check Verification Results : DSS Hotspot SAR (1g)																						
Reference Model Measurement Results													Variant Model Measurement Results									
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Distance	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	1g Meas. SAR	Scaling Factor	Scaling Factor	1g Scaled SAR	Plot No.			
Mhz	Ch.																			(dB)	(dB)	(dB)
2 480	78	Bluetooth DH5	15.0	14.43	-0.12	Rear	Ant.1	10	0.062	1.140	1.010	0.071	15.0	13.71	-0.14	0.084	1.346	1.010	0.114	C15		
2 480	78	Bluetooth DH5	15.0	14.43	-0.19	Front	Ant.1	10	0.028	1.140	1.010	0.032	15.0	13.71								
2 480	78	Bluetooth DH5	15.0	14.43	-0.11	Left	Ant.1	10	0.058	1.140	1.010	0.058	15.0	13.71								
2 480	78	Bluetooth DH5	15.0	14.43	0.18	Top	Ant.1	10	0.016	1.140	1.010	0.018	15.0	13.71								
2 440	19	Bluetooth LE 1M	15.0	13.97		Rear	Ant.1	10					15.0	14.68	-0.12	0.125	1.076	1.010	0.136	C16		
2 480	39	Bluetooth LE 1M	15.0	14.32	-0.09	Rear	Ant.1	10	0.077	1.169	1.010	0.091	15.0	13.82	0.14	0.091	1.312	1.010	0.121	-		
2 480	39	Bluetooth LE 1M	15.0	14.32	-0.02	Front	Ant.1	10	0.035	1.169	1.010	0.041	15.0	13.82								
2 480	39	Bluetooth LE 1M	15.0	14.32	0.18	Left	Ant.1	10	0.070	1.169	1.010	0.083	15.0	13.82								
2 480	39	Bluetooth LE 1M	15.0	14.32	0.14	Top	Ant.1	10	0.015	1.169	1.010	0.018	15.0	13.82								
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population										Body 1.6 W/kg Averaged over 1 gram												

13.4 Phablet SAR Measurement Considerations

Per FCC KDB 648474 D04v01r03, this device is considered a “Phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR >1.2 W/kg. When hotspot mode applies, 10g SAR required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1g SAR > 1.2 W/kg.

13.5 Phablet SAR Measurement Results

Spot Check Verification Results : UMTS Band 2 Phablet SAR (10g)																				
Reference Model Measurement Results												Variant Model Measurement Results								
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Sensor	Duty Cycle	Distance	10g Meas. SAR	Scaling Factor	10g Scaled SAR	Tune-Up Limit	Meas. Power	Power Drift	10g Meas. SAR	Scaling Factor	10g Scaled SAR	Plot No.	
MHz	Ch.		(dB)	(dB)	(dB)								(mm)	(W/kg)	(W/kg)	(dB)	(dB)	(dB)		(W/kg)
1 880	9400	RMC	25.0	23.81	-0.05	Rear	OFF	1:1	10	0.416	1.315	0.547	25	23.68						
1 880	9400	RMC	25.0	23.81	-0.07	Front	OFF	1:1	6	0.789	1.315	1.038	25	23.68	0.12	0.714	1.355	0.968	-	
1 880	9400	RMC	25.0	23.81	-0.12	Left	N/A	1:1	0	0.986	1.315	1.297	25	23.68	0.15	1.180	1.355	1.599	-	
1 880	9400	RMC	25.0	23.81	-0.05	Bottom	OFF	1:1	12	0.583	1.315	0.767	25	23.68						
1 880	9400	RMC	23.0	21.75	-0.15	Rear	ON	1:1	0	1.63	1.334	2.174	23	21.38	-0.17	1.660	1.452	2.411	-	
1 852.4	9262	RMC	23.0	21.83	0.19	Rear	ON	1:1	0	1.78	1.309	2.330	23	21.31	0.12	1.550	1.476	2.287	-	
1 907.6	9538	RMC	23.0	21.95	0.10	Rear	ON	1:1	0	1.94	1.274	2.472	23	21.17	0.10	1.540	1.524	2.347	-	
1 880	9400	RMC	23.0	21.75	0.12	Front	ON	1:1	0	1.29	1.334	1.721	23	21.38	0.00	1.510	1.452	2.193	-	
1 852.4	9262	RMC	23.0	21.83		Front	ON	1:1	0				23	21.31	0.00	1.570	1.476	2.317	-	
1 907.6	9538	RMC	23.0	21.95		Front	ON	1:1	0				23	21.17	0.00	1.520	1.524	2.317	-	
1 880	9400	RMC	23.0	21.75	-0.14	Bottom	ON	1:1	0	1.67	1.334	2.228	23	21.38	0.11	1.700	1.452	2.469	-	
1 852.4	9262	RMC	23.0	21.83	-0.16	Bottom	ON	1:1	0	1.57	1.309	2.055	23	21.31	0.15	1.810	1.476	2.671	C17	
1 907.6	9538	RMC	23.0	21.95	-0.19	Bottom	ON	1:1	0	1.68	1.274	2.140	23	21.17	0.13	1.730	1.524	2.637	-	
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Hand 4.0 W/kg Averaged over 10 gram													

LTE Band 66 Phablet SAR 10g																	
Frequency		Mode	Band Width	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	Test Position	Sensor	MPR (dB)	RB Size	RB Offset	Duty Cycle	Distance (mm)	Meas. SAR (W/kg)	Scaling Factor	Scaled SAR (W/kg)	Plot No.
Mhz	Ch.																
1 720	132072	QPSK	20	23.0	22.19	0.02	Rear	ON	0	1	49	1:1	0	2.020	1.205	2.434	-
1 745	132322	QPSK	20	23.0	22.14	0.18	Rear	ON	0	1	49	1:1	0	1.990	1.219	2.426	-
1 770	132572	QPSK	20	23.0	22.07	0.10	Rear	ON	0	1	49	1:1	0	2.040	1.239	2.527	-
1 720	132072	QPSK	20	23.0	22.20	0.04	Rear	ON	0	50	49	1:1	0	2.150	1.202	2.585	-
1 745	132332	QPSK	20	23.0	22.11	0.07	Rear	ON	0	50	49	1:1	0	2.130	1.227	2.614	-
1 770	132572	QPSK	20	23.0	22.10	-0.14	Rear	ON	0	50	25	1:1	0	2.260	1.230	2.780	C18
1 720	132072	QPSK	20	23.0	22.17	-0.10	Rear	ON	0	100	0	1:1	0	2.130	1.211	2.579	-
1 720	132072	QPSK	20	23.0	22.19	0.15	Front	ON	0	1	49	1:1	0	1.450	1.205	1.747	-
1 720	132072	QPSK	20	23.0	22.20	0.16	Front	ON	0	50	49	1:1	0	1.460	1.202	1.755	-
1 770	132572	QPSK	20	25.0	24.53	0.07	Left	N/A	0	1	49	1:1	0	1.250	1.114	1.393	-
1 770	132572	QPSK	20	24.0	23.71	0.12	Left	N/A	1	50	25	1:1	0	1.040	1.069	1.112	-
1 720	132072	QPSK	20	23.0	22.19	-0.14	Bottom	ON	0	1	49	1:1	0	1.950	1.205	2.350	-
1 745	132322	QPSK	20	23.0	22.14	0.10	Bottom	ON	0	1	49	1:1	0	1.960	1.219	2.389	-
1 770	132572	QPSK	20	23.0	22.07	0.16	Bottom	ON	0	1	49	1:1	0	2.000	1.239	2.478	-
1 720	132072	QPSK	20	23.0	22.20	0.03	Bottom	ON	0	50	49	1:1	0	2.080	1.202	2.501	-
1 745	132322	QPSK	20	23.0	22.11	0.13	Bottom	ON	0	50	49	1:1	0	2.110	1.227	2.590	-
1 770	132572	QPSK	20	23.0	22.10	0.16	Bottom	ON	0	50	25	1:1	0	2.170	1.230	2.670	-
1 720	132072	QPSK	20	23.0	22.17	0.12	Bottom	ON	0	100	0	1:1	0	2.060	1.211	2.494	-
1 770	132572	QPSK	20	25.0	24.53	0.06	Rear	OFF	0	1	49	1:1	10	0.585	1.114	0.652	-
1 770	132572	QPSK	20	24.0	23.71	-0.19	Rear	OFF	1	50	25	1:1	10	0.467	1.069	0.499	-
1 770	132572	QPSK	20	25.0	24.53	0.14	Front	OFF	0	1	49	1:1	6	0.803	1.114	0.895	-
1 770	132572	QPSK	20	24.0	23.71	-0.09	Front	OFF	1	50	25	1:1	6	0.625	1.069	0.668	-
1 770	132572	QPSK	20	25.0	24.53	0.01	Bottom	OFF	0	1	49	1:1	12	0.664	1.114	0.740	-
1 770	132572	QPSK	20	24.0	23.71	-0.06	Bottom	OFF	1	50	25	1:1	12	0.541	1.069	0.578	-
1 770	132572	QPSK	20	23.0	22.10	0.08	Rear	ON	0	50	25	1:1	0	2.180	1.230	2.682	*
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Hand 4.0 W/kg Averaged over 10 gram									

Note: * Data entry indicate Variability measurement.

Verification Results : 5 GHz WLAN Phablet SAR (10g)																									
Reference Model Measurement Results															Variant Model Measurement Results										
Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance (mm)	Area Scan Peak SAR (W/kg)	10g Meas. SAR (W/kg)	Scaling Factor	Scaling Factor (Duty)	10g Scaled SAR (W/kg)	Tune-Up Limit (dB)	Meas. Power (dB)	Power Drift (dB)	Area Scan Peak SAR (W/kg)	10g Meas. SAR (W/kg)	Scaling Factor (Duty)	10g Scaled SAR (W/kg)	Plot No.	
Mhz	Ch.		(Mhz)	(Mbps)	(dB)	(dB)	(dB)																		
5 300	60	802.11a	20	6	17	16.52	0.01	Rear	Ant.2	92.9	0	7.0	0.612	1.117	1.090	0.745	17	15.87	0.15	3.01	0.578	1.297	1.076	0.807	-
5 300	60	802.11a	20	6	17	16.52	0.00	Front	Ant.2	92.9	0	0.709	0.032	1.117	1.090	0.039	17	15.87							
5 300	60	802.11a	20	6	17	16.52	0	Left	Ant.2	92.9	0	0	0	1.117	1.090	0.000	17	15.87							
5 300	60	802.11a	20	6	17	16.52	0.16	Top	Ant.2	92.9	0	1.03	0.133	1.117	1.090	0.162	17	15.87							
5 500	100	802.11a	20	6	17	16.45	-0.01	Rear	Ant.2	92.9	0	2.57	0.245	1.135	1.090	0.303	17	15.73	0.00	1.61	0.343	1.340	1.076	0.494	-
5 500	100	802.11a	20	6	17	16.45	0.00	Front	Ant.2	92.9	0	0.151	0.011	1.135	1.090	0.014	17	15.73							
5 500	100	802.11a	20	6	17	16.45	0	Left	Ant.2	92.9	0	0	0	1.135	1.090	0.000	17	15.73							
5 500	100	802.11a	20	6	17	16.45	0.03	Top	Ant.2	92.9	0	0.53	0.056	1.135	1.090	0.069	17	15.73							
5 300	60	802.11a	20	6	20	19.40	0.07	Rear	MIMO	92.9	0	5.51	0.497	1.205	1.090	0.653	20	18.97	-0.10	2.66	0.550	1.371	1.076	0.811	C19
5 300	60	802.11a	20	6	20	19.40	0.00	Front	MIMO	92.9	0	1.68	0.128	1.205	1.090	0.168	20	18.97							
5 300	60	802.11a	20	6	20	19.40	0.05	Left	MIMO	92.9	0	4.43	0.318	1.205	1.090	0.418	20	18.97							
5 300	60	802.11a	20	6	20	19.40	-0.07	Top	MIMO	92.9	0	0.962	0.106	1.205	1.090	0.139	20	18.97							
5 720	144	802.11a	20	6	20	19.48	0.00	Rear	MIMO	92.9	0	2.86	0.199	1.164	1.090	0.252	20	19.41							
5 720	144	802.11a	20	6	20	19.48	-0.07	Front	MIMO	92.9	0	2.43	0.225	1.164	1.090	0.285	20	19.41							
5 720	144	802.11a	20	6	20	19.48	0.03	Left	MIMO	92.9	0	4.05	0.418	1.164	1.090	0.530	20	19.41	-0.19	3.33	0.566	1.194	1.076	0.727	-
5 720	144	802.11a	20	6	20	19.48	0.12	Top	MIMO	92.9	0	0.799	0.072	1.164	1.090	0.091	20	19.41							
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Hand 4.0 W/kg Averaged over 10 gram																	

Verification Results : NFC Phablet SAR (10g)										
Reference Model Measurement Results							Variant Model Measurement Results			
Frequency		Mode	Data Rate	Power Drift	Test Position	Distance (mm)	10g Meas. SAR	Power Drift	10g Meas. SAR	Plot No.
Mhz			(Mbps)	(dB)		(mm)	(W/kg)	(dB)	(W/kg)	
13.56		NFC (Type A)	106	0.00	Rear	0	0.000053	0.00	0.000308	C20
13.56		NFC (Type A)	106	0	Front	0	0	0.00	0.000000223	-
13.56		NFC (Type A)	106	0.15	Left	0	0.000000896	0.00	0.00000173	-
13.56		NFC (Type A)	106	0.00	Top	0	0.000015	0.00	0.0000352	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Hand 4.0 W/kg Averaged over 10 gram			

13.6 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, FCC KDB Procedure.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB 648474 D04v01r03, SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was 1.2 W/kg, no additional SAR evaluation using a headset cable were required.
8. Per KDB 648474 D04v01r03, this device is considered a "Phablet" since the diagonal dimension is > 160 mm and < 200 mm. When hotspot mode applies, extremity SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (with tolerance) is 1 g SAR > 1.2 W/kg.
9. Per FCC KDB 865664 D01v01r04, variability SAR measurement were performed not when the measured SAR results for a frequency Band were greater than or equal to 0.8 W/kg for 1g SAR and >2 for 10g SAR Please see Section 15 for variability analysis.
10. This device utilizes power reduction for some wireless mode and technologies, as outlined in sec. 4 The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous scenarios.
11. During SAR testing for the Hotspot conditions per KDB 941225 D06v02r01, the actual portable hotspotoperation (with actual simultaneous transmission of a transmitter with WiFi) was not activated.

GSM/GPRS Test Notes:

1. This EUT'S GSM and GPRS device class is B.
2. This device supports GPRS VOIP in the head and the body-worn configurations therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB 941225 D01v03r01: The source-based time-averaged output power was evaluated for all multi-slot operations. The multi-slot configuration with the highest frame averaged output power including tolerance was evaluated for SAR.
4. Per FCC KDB 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is 1/2 dB, instead of the middle channel, the highest output power channel must be used.

UMTS Notes:

1. The 12.2 kbps RMC mode is the primary mode per KDB 941225 D01v03r01.
2. UMTS SAR was tested under RMC 12.2 kbps with HSPA inactive per KDB publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
3. Per FCC KDB 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the channel highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Consideration for LTE Devices in FCC KDB 941225 D05v02r05.
2. According to FCC KDB 941225 D05v02r05:
When the reported SAR is 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the 1RB, 50%RB and 100%RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1RB allocation and 50%RB allocation were less than 1.45W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to target MPR is indicated alongside the SAR results.
4. When Power reduction is applied, MPR is 0 for some modes.
5. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator.
6. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) LTE TDD Band 41 SAR measured at the highest output power channel for each test configuration is 0.6 W/kg then testing at the other channels is not required for such test configurations.
7. TDD LTE (Power Class 3) was tested using UL-DL configuration 0 with 6 UL sub frames and 2S subframes using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633(cf=1.58).
8. Per KDB 941225 D05Av01r02, SAR for LTE Carrier Aggregation operations was not needed because the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink CA was not activated.
9. SAR test reduction is applied using the following criteria:
Start with the largest channel Bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is >0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are >0.8 W/kg, testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation <1.45 W/kg. Testing for 16-QAM modulation is not required because the reported SAR for QPSK is <1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel Bandwidths is not required because the reported SAR for the highest channel Bandwidth is <1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel Bandwidth.

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. For initial test position, the highest extrapolated peak SAR will be used. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g SAR and ≤ 1.0 W/kg for 10g SAR, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR results is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR or all test position are measured.
2. Per KDB 2482227 D01v02r02 justification for test configurations of 2.4 GHz WiFi Single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11 g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
3. Per KDB 2482227 D01v02r02 justification for test configurations of 5 GHz WiFi Single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission mode was not investigated since the highest reported SAR for initial test configuration adjusted by the ration of maximum output powers is less than 1.2 W/kg for 1g SAR and less than 3.0 W/kg for 10 g SAR.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rated, channel Bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated WLAN test reports.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests mode type. Per October 2016 TCBC Workshop Notes, the reported SAR was scaled to Bluetooth [BDR]: 77.83%, Bluetooth [LE 1M] 86.46% transmission duty factor to determine compliance. Please see sec.11.6 for the time-domain plot and calculation for duty factor of the device.
2. Head and Bluetooth tethering SAR were evaluated for BT /LE tethering applications.

14. Simultaneous SAR Analysis

This device is containing transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per KDB Publication 447498 D01v06 4.3.2, simultaneous transmission SAR test exclusion may be applied when the sum of 1g SAR and 10g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is $\leq 1.6\text{W/kg}$ for 1g SAR and $\leq 4\text{ W/kg}$ for 10g SAR. The different test positions in an exposure condition may be considered collectively to determine SAR exclusion according to the sum of 1g or 10g SAR.

14.2 Body-Worn SAR Simultaneous Transmission Analysis.

Simultaneous Transmission Scenario (Body Worn SAR) (15mm)															
Band		WWAN SAR	2.4 GHz SISO Ant.1	2.4 GHz MIMO	5 GHz SISO Ant.2	5 GHz MIMO	BT	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	SPLSR	
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	4	5	6	1+2	1+3	1+4	1+5	1+6	1+4+6	1+5+6	
GSM 850	Rear	0.443	0.200	0.153	0.255	0.279	0.058	0.643	0.596	0.698	0.722	0.501	0.756	0.780	No
	Front	0.474	0.090	0.084	0.000	0.064	0.020	0.564	0.558	0.474	0.538	0.494	0.494	0.558	No
GSM 1900	Rear	0.307	0.200	0.153	0.255	0.279	0.058	0.507	0.460	0.562	0.586	0.365	0.620	0.644	No
	Front	0.234	0.090	0.084	0.000	0.064	0.020	0.324	0.318	0.234	0.298	0.254	0.254	0.318	No
UMTS Band 2	Rear	0.618	0.200	0.153	0.255	0.279	0.058	0.818	0.771	0.873	0.897	0.676	0.931	0.955	No
	Front	0.477	0.090	0.084	0.000	0.064	0.020	0.567	0.561	0.477	0.541	0.497	0.497	0.561	No
UMTS Band 4	Rear	0.631	0.200	0.153	0.255	0.279	0.058	0.831	0.784	0.886	0.910	0.689	0.944	0.968	No
	Front	0.560	0.090	0.084	0.000	0.064	0.020	0.650	0.644	0.560	0.624	0.580	0.580	0.644	No
UMTS Band 5	Rear	0.467	0.200	0.153	0.255	0.279	0.058	0.667	0.620	0.722	0.746	0.525	0.780	0.804	No
	Front	0.244	0.090	0.084	0.000	0.064	0.020	0.334	0.328	0.244	0.308	0.264	0.264	0.328	No
LTE Band 2	Rear	0.514	0.200	0.153	0.255	0.279	0.058	0.714	0.667	0.769	0.793	0.572	0.827	0.851	No
	Front	0.423	0.090	0.084	0.000	0.064	0.020	0.513	0.507	0.423	0.487	0.443	0.443	0.507	No
LTE Band 2 Upper	Rear	0.278	0.200	0.153	0.255	0.279	0.058	0.478	0.431	0.533	0.557	0.336	0.591	0.615	No
	Front	0.080	0.090	0.084	0.000	0.064	0.020	0.170	0.164	0.080	0.144	0.100	0.100	0.164	No
LTE Band 4 Upper	Rear	0.281	0.200	0.153	0.255	0.279	0.058	0.481	0.434	0.536	0.560	0.339	0.594	0.618	No
	Front	0.115	0.090	0.084	0.000	0.064	0.020	0.205	0.199	0.115	0.179	0.135	0.135	0.199	No
LTE Band 12	Rear	0.310	0.200	0.153	0.255	0.279	0.058	0.510	0.463	0.565	0.589	0.368	0.623	0.647	No
	Front	0.336	0.090	0.084	0.000	0.064	0.020	0.426	0.420	0.336	0.400	0.356	0.356	0.420	No
LTE Band 26	Rear	0.407	0.200	0.153	0.255	0.279	0.058	0.607	0.560	0.662	0.686	0.465	0.720	0.744	No
	Front	0.363	0.090	0.084	0.000	0.064	0.020	0.453	0.447	0.363	0.427	0.383	0.383	0.447	No
LTE Band 41	Rear	0.255	0.200	0.153	0.255	0.279	0.058	0.455	0.408	0.510	0.534	0.313	0.568	0.592	No
	Front	0.151	0.090	0.084	0.000	0.064	0.020	0.241	0.235	0.151	0.215	0.171	0.171	0.235	No
LTE Band 66	Rear	0.361	0.200	0.153	0.255	0.279	0.058	0.561	0.514	0.616	0.640	0.419	0.674	0.698	No
	Front	0.392	0.090	0.084	0.000	0.064	0.020	0.482	0.476	0.392	0.456	0.412	0.412	0.476	No

Simultaneous Transmission Summation Scenario (Hotspot SAR) (10mm)															
Band	WWAN SAR	2.4 GHz SISO Ant.1	2.4 GHz MIMO	5 GHz SISO Ant.2	5 GHz MIMO	BT	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	SPLSR	
	(W/kg) 1	(W/kg) 2	(W/kg) 3	(W/kg) 4	(W/kg) 5	(W/kg) 6	(W/kg) 1+2	(W/kg) 1+3	(W/kg) 1+4	(W/kg) 1+5	(W/kg) 1+6	(W/kg) 1+4+6	(W/kg) 1+5+6	(Yes/No)	
LTE Band 26	Rear	0.609	0.452	0.464	0.248	0.244	0.136	1.061	1.073	0.857	0.853	0.745	0.993	0.989	No
	Front	0.373	0.213	0.252	0.000	0.098	0.041	0.586	0.625	0.373	0.471	0.414	0.414	0.512	No
	Left	0.275	0.274	0.273	0.000	0.151	0.083	0.549	0.548	0.275	0.426	0.358	0.358	0.509	No
	Right	0.439						0.439	0.439	0.439	0.439	0.439	0.439	0.439	No
	Top		0.059	0.052	0.103	0.091	0.018	0.059	0.052	0.103	0.091	0.018	0.121	0.109	No
	Bottom	0.524						0.524	0.524	0.524	0.524	0.524	0.524	0.524	No
LTE Band 41	Rear	0.573	0.452	0.464	0.248	0.244	0.136	1.025	1.037	0.821	0.817	0.709	0.957	0.953	No
	Front	0.317	0.213	0.252	0.000	0.098	0.041	0.530	0.569	0.317	0.415	0.358	0.358	0.456	No
	Left	0.151	0.274	0.273	0.000	0.151	0.083	0.425	0.424	0.151	0.302	0.234	0.234	0.385	No
	Right							0.000	0.000	0.000	0.000	0.000	0.000	0.000	No
	Top		0.059	0.052	0.103	0.091	0.018	0.059	0.052	0.103	0.091	0.018	0.121	0.109	No
	Bottom	0.654						0.654	0.654	0.654	0.654	0.654	0.654	0.654	No
LTE Band 66	Rear	0.624	0.452	0.464	0.248	0.244	0.136	1.076	1.088	0.872	0.868	0.760	1.008	1.004	No
	Front	0.505	0.213	0.252	0.000	0.098	0.041	0.718	0.757	0.505	0.603	0.546	0.546	0.644	No
	Left	0.582	0.274	0.273	0.000	0.151	0.083	0.856	0.855	0.582	0.733	0.665	0.665	0.816	No
	Right							0.000	0.000	0.000	0.000	0.000	0.000	0.000	No
	Top		0.059	0.052	0.103	0.091	0.018	0.059	0.052	0.103	0.091	0.018	0.121	0.109	No
	Bottom	0.995						0.995	0.995	0.995	0.995	0.995	0.995	0.995	No

14.4 Phablet SAR Simultaneous Transmission Analysis.

Simultaneous Transmission Scenario (Phablet SAR)										
Band		WWAN SAR	5 GHz Ant.2	5 GHz MIMO	NFC	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	∑ 1-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	4	1+2	1+2	1+2+4	1+3+4	
UMTS Band 2	Rear	2.472	0.807	0.811	0.000308	3.279	3.283	3.279	3.283	NO
	Front	2.317	0.039	0.285	0.000000223	2.356	2.602	2.356	2.602	NO
	Left	1.599	0.000	0.722	0.00000173	1.599	2.321	1.599	2.321	NO
	Right					0.000	0.000	0.000	0.000	NO
	Top		0.162	0.139	0.0000352	0.162	0.139	0.162	0.139	NO
	Bottom	2.671				2.671	2.671	2.671	2.671	NO
LTE Band 2	Rear	2.780	0.807	0.811	0.000308	3.587	3.591	3.587	3.591	NO
	Front	1.755	0.039	0.285	0.000000223	1.794	2.040	1.794	2.040	NO
	Left	1.393	0.000	0.722	0.00000173	1.393	2.115	1.393	2.115	NO
	Right					0.000	0.000	0.000	0.000	NO
	Top		0.162	0.139	0.0000352	0.162	0.139	0.162	0.139	NO
	Bottom	2.670				2.670	2.670	2.670	2.670	NO
LTE Band 66	Rear	2.472	0.807	0.811	0.000308	3.279	3.283	3.279	3.283	NO
	Front	2.317	0.039	0.285	0.000000223	2.356	2.602	2.356	2.602	NO
	Left	1.599	0.000	0.722	0.00000173	1.599	2.321	1.599	2.321	NO
	Right					0.000	0.000	0.000	0.000	NO
	Top		0.162	0.139	0.0000352	0.162	0.139	0.162	0.139	NO
	Bottom	2.671				2.671	2.671	2.671	2.671	NO

14.5 Simultaneous Transmission Conclusion

The above numerical summed SAR Results are sufficient to determine that simultaneous transmission cases will not exceed the SAR Limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE1528-2013.

15. SAR Measurement Variability and Uncertainty

In accordance with KDB procedure 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz, SAR additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency Band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement variability was assessed using the following procedures for each frequency Band:

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg for 1g SAR or < 2.0 W/kg for 10g SAR; steps 2) through 4) do not apply.
- 2) When the original highest measured 1g SAR is ≥ 0.80 W/kg or 10g SAR ≥ 2.0 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg for 1g SAR or ≥ 3.625 W/kg for 10g SAR (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg for 1g SAR or ≥ 3.75 W/kg for 10g SAR and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Hotspot SAR measurement variability Results

Frequency		Mode/Band	Configuration	Measured SAR (W/kg)	Repeated SAR (W/kg)	SAR Ratio
MHz	Channel					
848.8	251	GSM850 GPRS 3TX	Rear	0.882	0.870	1.01
1 770	132572	LTE Band 66	Bottom (1RB, 49offset)	0.803	0.801	1.00

Phablet SAR measurement variability Results

Frequency		Mode/Band	Configuration	Measured SAR (W/kg)	Repeated SAR (W/kg)	SAR Ratio
MHz	Channel					
1 770	132572	LTE Band 66	Rear (50RB, 25offset)	2.260	2.180	1.04

16. Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g SAR and <3.75 W/kg For 10g SAR for all frequency Bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE1528-2013 was not required.

17. SAR Test Equipment

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
SPEAG	SAM Phantom	-	N/A	N/A	N/A
Staubli	CS8Cspeag-TX90	F12/ 5K9GA1/ C/ 01	N/A	N/A	N/A
Staubli	CS8Cspeag-TX90	F17/ 59RAA1/ C/ 01	N/A	N/A	N/A
Staubli	CS8Cspeag-TX90	F13/ 5R4XF1/ C/ 01	N/A	N/A	N/A
Staubli	CS9spe-TX2-60	F/21/0029145/C/001	N/A	N/A	N/A
Staubli	CS8Cspeag-TX90	F07/56W9A1/C/01	N/A	N/A	N/A
Staubli	TX90 XLspeag	F12/ 5K9GA1/ A/ 01	N/A	N/A	N/A
Staubli	TX90 XLspeag	F17/ 59RAA1/ A/ 01	N/A	N/A	N/A
Staubli	TX90 XLspeag	F13/ 5R4XF1/ A/ 01	N/A	N/A	N/A
Staubli	TX2-60 Lspe	F/21/0029145/A/001	N/A	N/A	N/A
Staubli	TX90 XLspeag	F07/56W9A1/A/01	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick) D2114210603	S-1206 0513	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick) D21142606B	011578	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick) D21142605	S-1338 1332	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick) LB	2008	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick) D21142102	S-0602	N/A	N/A	N/A
TESTO	175-H1/Thermometer	40331939309	01/04/2022	Annual	01/04/2023
TESTO	175-H1/Thermometer	40331939309	12/29/2022	Annual	12/29/2023
TESTO	175-H1/Thermometer	40331922309	01/04/2022	Annual	01/04/2023
TESTO	175-H1/Thermometer	40331922309	12/29/2022	Annual	12/29/2023
TESTO	175-H1/Thermometer	40332651310	01/04/2022	Annual	01/04/2023
TESTO	175-H1/Thermometer	40332651310	12/29/2022	Annual	12/29/2023
TESTO	608-H1/Thermometer	2183499992	12/09/2021	Annual	12/09/2022
TESTO	608-H1/Thermometer	2183499992	11/29/2022	Annual	11/29/2023
TESTO	608-H1/Thermometer	83406789	07/07/2022	Annual	07/07/2023
SPEAG	DAE4	868	09/21/2022	Annual	09/21/2023
SPEAG	DAE4	466	05/02/2022	Annual	05/02/2023
SPEAG	DAE4	652	01/24/2022	Annual	01/24/2023
SPEAG	DAE4	1464	06/15/2022	Annual	06/15/2023
SPEAG	DAE4	1629	08/17/2022	Annual	08/17/2023
SPEAG	DAE4	1687	07/18/2022	Annual	07/18/2023
SPEAG	DAE4	1422	08/18/2022	Annual	08/18/2023
SPEAG	DAE4	1254	06/15/2022	Annual	06/15/2023
SPEAG	DAE4	648	04/29/2022	Annual	04/29/2023
SPEAG	E-Field Probe EX3DV4	3903	03/29/2022	Annual	03/29/2023
SPEAG	E-Field Probe EX3DV4	7702	01/20/2022	Annual	01/20/2023
SPEAG	E-Field Probe EX3DV4	3968	09/28/2022	Annual	09/28/2023
SPEAG	E-Field Probe EX3DV4	7751	10/07/2022	Annual	10/07/2023
SPEAG	E-Field Probe EX3DV4	3768	06/30/2022	Annual	06/30/2023
SPEAG	E-Field Probe EX3DV4	7681	11/21/2022	Annual	11/21/2023
SPEAG	E-Field Probe EX3DV4	7622	11/22/2022	Annual	11/22/2023
SPEAG	E-Field Probe EX3DV4	7654	05/31/2022	Annual	05/31/2023
SPEAG	E-Field Probe EX3DV4	7732	06/30/2022	Annual	06/30/2023
SPEAG	E-Field Probe ES3DV3	3076	07/20/2022	Annual	07/20/2023
SPEAG	Dipole CLA13	1016	11/16/2022	Annual	11/16/2023
SPEAG	Dipole D750V3	1014	05/25/2022	Annual	05/25/2023
SPEAG	Dipole D835V2	441	07/15/2022	Annual	07/15/2023
SPEAG	Dipole D1800V2	2d007	07/18/2022	Annual	07/18/2023
SPEAG	Dipole D1900V2	5d032	01/28/2022	Annual	01/28/2023
SPEAG	Dipole D2450V2	743	05/31/2022	Annual	05/31/2023
SPEAG	Dipole D2600V2	1015	07/15/2022	Annual	07/15/2023
SPEAG	Dipole D5GHzV2	1253	05/31/2022	Annual	05/31/2023
Agilent	Power Meter E4419B	MY41291386	09/27/2022	Annual	09/27/2023
Agilent	Power Meter N1911A	MY45101406	06/27/2022	Annual	06/27/2023

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
Agilent	Power Sensor 8481A	SG1091286	09/27/2022	Annual	09/27/2023
H.P	Power Sensor 8481A	MY41090873	02/07/2022	Annual	02/07/2023
Agilent	Power Sensor 8481A	MY41090675	09/27/2022	Annual	09/27/2023
Agilent	Wideband Power Sensor N1921A	MY55220026	08/02/2022	Annual	08/02/2023
Agilent	11636B/Power Divider	58698	02/24/2022	Annual	02/24/2023
SPEAG	DAKS 3.5	1038	03/28/2022	Annual	03/28/2023
SPEAG	Vector Reflectometer	0141013	03/25/2022	Annual	03/25/2023
H.P	Network Analyzer /8753ES	JP38481384	08/26/2022	Annual	08/26/2023
Agilent	WIRELESS COMMUNICATION E5515C	MY48361100	09/27/2022	Annual	09/27/2023
Agilent	WIRELESS COMMUNICATION E5515C	MY48360252	08/08/2022	Annual	08/08/2023
R&S	Wireless Communication Test Set CMW500	115733	04/14/2022	Annual	04/14/2023
Agilent	SIGNAL GENERATOR N5182A	MY47070230	04/28/2022	Annual	04/28/2023
EMPOWER	RF Power Amplifier	1084	06/20/2022	Annual	06/20/2023
EMPOWER	RF Power Amplifier	1011	09/27/2022	Annual	09/27/2023
MICRO LAB	LP Filter / LA-15N	10453	09/27/2022	Annual	09/27/2023
MICRO LAB	LP Filter / LA-30N	-	09/27/2022	Annual	09/27/2023
MICRO LAB	LP Filter / LA-60N	32011	09/27/2022	Annual	09/27/2023
Agilent	Attenuator (3dB) 8693B	MY39260298	08/25/2022	Annual	08/25/2023
HP	Attenuator (3dB) 33340A	02427	08/25/2022	Annual	08/25/2023
HP	Attenuator (20dB) 8493C	09271	08/25/2022	Annual	08/25/2023
Agilent	Directional Bridge 86205A	3140A04581	05/26/2022	Annual	05/26/2023
OSI	Power Divider	#3	06/17/2022	Annual	06/17/2023
Agilent	MXA Signal Analyzer N9020A	MY50510407	06/07/2022	Annual	06/07/2023
HP	Dual Directional Coupler	16072	09/27/2022	Annual	09/27/2023
Anritsu	Radio Communication Tester MT8820C	6201074225	02/24/2022	Annual	02/24/2023
Anritsu	Radio Communication Tester MT8820C	6200695605	04/15/2022	Annual	04/15/2023
Anritsu	Radio Communication Tester MT8821C	6201502997	06/27/2022	Annual	06/27/2023
Anritsu	Radio Communication Tester MT8821C	6262044720	12/07/2022	Annual	12/07/2023
Agilent	WIRELESS COMMUNICATION E5515C	MY50260992	06/27/2022	Annual	06/27/2023
ROHDE&SCHWARZ	BLUETOOTH TESTER CBT	100272	02/28/2022	Annual	02/28/2023

* The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Verification measurement is performed by HCT Lab. before each test. The brain/body simulating material is calibrated by HCT using the DAKS 3.5 to determine the conductivity and permittivity (dielectric constant) of the brain/body-equivalent material.

18. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the ANSI/ IEEE C95.1 - 2005.

These measurements were taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

19. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 - 2005 , American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 kHz to 300 GHz, New York: IEEE, Sept. 1992
- [3] ANSI/IEEE C 95.1 - 2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz, New York: IEEE, 2006
- [4] ANSI/IEEE C95.3 - 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: December 2002.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice or Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body from Wireless Communications Devices
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300 MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectro magnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10 kHz-300 GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation and procedures – Part 1: Procedure to determine the

specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), July. 2016..

[21] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) Mar. 2010.

[22] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio Communication Apparatus (All Frequency Band) Issue 5, March 2015.

[23] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009

[24] FCC SAR Test procedures for 2G-3G Devices, Mobile Hotspot and UMPC Device KDB 941225 D01.

[25] SAR Measurement Guidance for IEEE 802.11 transmitters, KDB 248227 D01v02r02

[26] SAR Evaluation of Handsets with Multiple Transmitters and Antennas KDB 648474 D03, D04.

[27] SAR Evaluation for Laptop, Notebook, Netbook and Tablet computers KDB 616217 D04.

[28] SAR Measurement and Reporting Requirements for 100 MHz – 6 GHz, KDB 865664 D01, D02.

[29] FCC General RF Exposure Guidance and SAR procedures for Dongles, KDB 447498 D01,D02.

Appendix A. DUT Ant. Information & SETUP PHOTO

Please refer to test DUT Ant. Information & setup photo file no. as follows:

Report No.
HCT-SR-2301-FC008-P